



Test Report

FCC Part15 Subpart E

Product Name : Wireless Access
Point
Model No. : AP650
FCC ID : WBV-AP650

Applicant : Aerohive Networks, Inc.
Address : Aerohive Networks, 1011 McCarthy Boulevard,
Milpitas, CA 95035, United States

Date of Receipt : Apr. 04, 2018
Test Date : May. 15, 2018 ~ Aug. 14, 2018
Issued Date : Aug. 23, 2018
Report No. : 1842038R-RF-US-P09V01
Report Version : V1.1

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, A2LA any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.

Test Report Certification

Issued Date : Aug. 23, 2018

Report No. : 1842038R-RF-US-P09V01




Product Name : Wireless Access Point
Applicant : Aerohive Networks, Inc.
Address : Aerohive Networks, 1011 McCarthy Boulevard, Milpitas, CA 95035, United States
Manufacturer : Aerohive Networks, Inc.
Address : Aerohive Networks, 1011 McCarthy Boulevard, Milpitas, CA 95035, United States
Model No. : AP650
FCC ID : WBV-AP650
EUT Voltage : POE 48V
Test Voltage : AC 120V/60Hz
Brand Name : Aerohive
Applicable Standard : FCC CFR Title 47 Part 15 Subpart E
ANSI C63.10:2013;
789033 D02 General UNII Test Procedures New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01
Test Result : Complied
Performed Location : DEKRA Testing and Certification (Suzhou) Co., Ltd.
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006, Jiangsu, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Designation Number: CN1199;
Documented By : 
(Adm. Specialist: Kitty Li)
Reviewed By : 
(Senior Engineer: Frank He)
Approved By : 
(Engineering Manager: Harry Zhao)

TABLE OF CONTENTS

Description	Page
1. General Information	7
1.1. EUT Description	7
1.2. Antenna information	8
1.3. Working Frequency of Each Channel:	8
1.4. Mode of Operation	9
1.5. Tested System Details	10
1.6. Configuration of Tested System	11
1.7. EUT Exercise Software	12
2. Technical Test	13
2.1. Summary of Test Result	13
2.2. Test Frequency configuration:	13
2.3. Power Parameter Value of the test software	14
2.4. Power vs Data Rate	17
2.5. Duty Cycle	23
2.6. Test Environment	29
2.7. Uncertainty	29
3. Conducted Emission	30
3.1. Test Equipment	30
3.2. Test Setup	30
3.3. Limit	31
3.4. Test Procedure	31
3.5. Test Result	32
4. Radiated Emission	34
4.1. Test Equipment	34
4.2. Test Setup	35
4.3. Limit	36
4.4. Test Procedure	39

4.5.	EUT test Axis definition	40
4.6.	Test Result	41
5.	Emission bandwidth and occupied bandwidth	46
5.1.	Test Equipment	46
5.2.	Test Setup	46
5.3.	Limit.....	46
5.4.	Test Procedure	47
5.5.	EUT test Axis definition	48
5.6.	Test Result	49
6.	6dB bandwidth	61
6.1.	Test Equipment	61
6.2.	Test Setup	61
6.3.	Limit.....	61
6.4.	Test Procedure	62
6.5.	EUT test Axis definition	63
6.6.	Test Result	64
7.	Power Output.....	74
7.1.	Test Equipment	74
7.2.	Test Setup	74
7.3.	Limit.....	75
7.4.	Test Procedure	76
7.5.	EUT test Axis definition	78
7.6.	Test Result	79
8.	Peak Power Spectral Density.....	113
8.1.	Test Equipment	113
8.2.	Test Setup	113
8.3.	Limit.....	114
8.4.	Test Procedure	116
8.5.	EUT test Axis definition	117

8.6.	Test Result	118
9.	Conducted Band Edge.....	140
9.1.	Test Equipment	140
9.2.	Test Setup	140
9.3.	Limit.....	141
9.4.	Test Procedure	144
9.5.	EUT test Axis definition	145
9.6.	Test Result	146
10.	Frequency Stability	233
10.1.	Test Equipment	233
10.2.	Test Setup	233
10.3.	Limit.....	234
10.4.	Test Procedure	235
10.5.	EUT test Axis definition	236
10.6.	Test Result	237
11.	Antenna Requirement.....	241
11.1.	Limit.....	241
11.2.	Antenna Connector Construction	241

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1842038R-RF-US-P09V01	V1.0	Initial Issued Report	Aug. 06, 2018
1842038R-RF-US-P09V01	V1.1	1. Modified the description at P7; 2. Modified some PSD data.	Aug. 23, 2018

1. General Information

1.1. EUT Description

Product Name	Wireless Access Point					
Brand Name	Aerohive					
Model No.	AP650					
EUT Voltage	PoE 48V					
Type of Modulation	OFDM-BPSK, QPSK, 16QAM, 64QAM, 128QAM, 256QAM, 1024QAM					
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps					
	802.11n: up to 600Mbps					
	802.11ac: up to 1.7Gbps					
	802.11ax: up to 2.4Gbps					
Channel Control	Auto					
Transmit modes	☒	802.11a	☒	802.11n(20MHz)	☒	802.11n(40MHz)
	☒	802.11ac(20MHz)	☒	802.11ac(40MHz)	☒	802.11ac(80MHz)
	☒	802.11ax(20MHz)	☒	802.11ax(40MHz)	☒	802.11ax(80MHz)
	☐	802.11ax(160MHz)				
Support Bands	☒	5150MHz~5250MHz	☐	Outdoor AP		
			☒	Indoor AP		
			☐	Fixed point-to-point AP		
			☐	Mobile and Portable Client		
	☐	5250MHz~5350MHz				
	☐	5470MHz~5725MHz	☐	With TDWR Channels		
			☐	Without TDWR Channels		
	☒	5725MHz~5850MHz				

Note1: The device contains two 5GHz modules, and called eth6 and eth7, eth6 can work separately and eth7 can only transmit with eth6 which at 5150~5250MHz and eth6 work at 5725~5850MHz. So eth6 test all the frequency bands and eth7 only test 5150~5250MHz.

2: The output power of 802.11ax is lower than 802.11ac, so we didn't show 802.11ax test data in this report.

1.2. Antenna information

Antenna Model No.	N/A									
Antenna Manufacturer	N/A									
Antenna Delivery	☒	1*TX+1*RX	☒	2*TX+2*RX	☒	3*TX+3*RX	☒	4*TX+4*RX		
Antenna Technology	☒	SISO								
			☐	Basic methodology						
			☐	Sectorized antenna systems						
			☐	Cross-polarized antennas						
			☐	Unequal antenna gains, with equal transmit powers						
		☒	MIMO	☒	Spatial Multiplexing					
				☒	Cyclic Delay Diversity (CDD)					
Antenna Type	F type Metal Antenna									
Antenna Technology(2*TX+2*RX)	Ant Gain (dBi)				Directional Gain (dBi)					
					For Power			For PSD		
☒ CDD	6				6			9		
☒ Beam-forming					9			9		
Antenna Technology(4*TX+4*RX)	Ant Gain (dBi)				Directional Gain (dBi)					
					For Power			For PSD		
☒ CDD	6				6			12		
☒ Beam-forming					12			12		

1.3. Working Frequency of Each Channel:

802.11a/n/ac/ax(20MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz	48	5240 MHz
149	5745 MHz	153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825MHz	N/A	N/A	N/A	N/A	N/A	N/A
802.11n/ac/ax(40MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	151	5755 MHz	159	5795 MHz
802.11ac/ax(80MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	155	5775 MHz	N/A	N/A	N/A	N/A

1.4. Mode of Operation

DEKRA Testing and Certification (Suzhou) Co., Ltd. has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit by 802.11a
Mode 2: Transmit by 802.11n(20MHz)
Mode 3: Transmit by 802.11n(40MHz)
Mode 4: Transmit by 802.11ac(20MHz)
Mode 5: Transmit by 802.11ac(40MHz)
Mode 6: Transmit by 802.11ac(80MHz)
Mode 7: Transmit by 802.11ax(20MHz)
Mode 8: Transmit by 802.11ax(40MHz)
Mode 9: Transmit by 802.11ax(80MHz)

Note 1: Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Note 2: For portable device, radiated tests was verified over X, Y, Z axis, and shown the worst case on this report.


1.5. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:


Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Lenovo	Think pad x220	SUA0600195	Non-shielded
2	PoE	HUAWEI	PoE35-54A	2102220369ARDB000358	N/A
A	WLAN cable	N/A	N/A	N/A	Shielded, 0.5m
B	WLAN cable	N/A	N/A	N/A	Shielded, 10m

1.6. Configuration of Tested System

Test setup Diagram- AC Line Conducted Emission Test

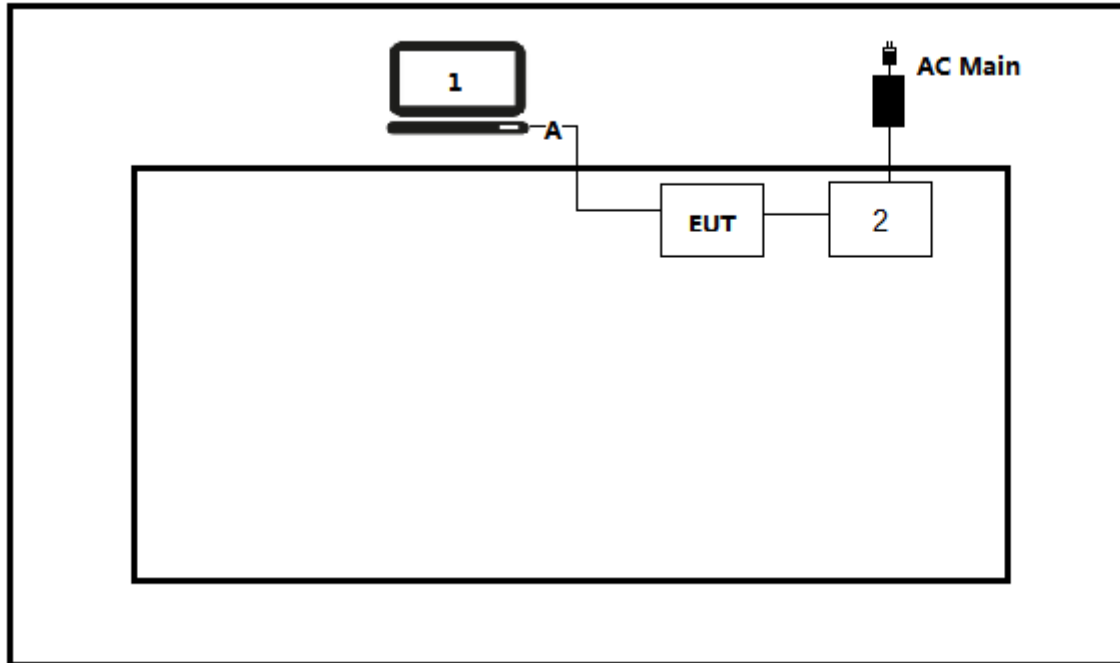

Test setup Diagram- Radiated Emission

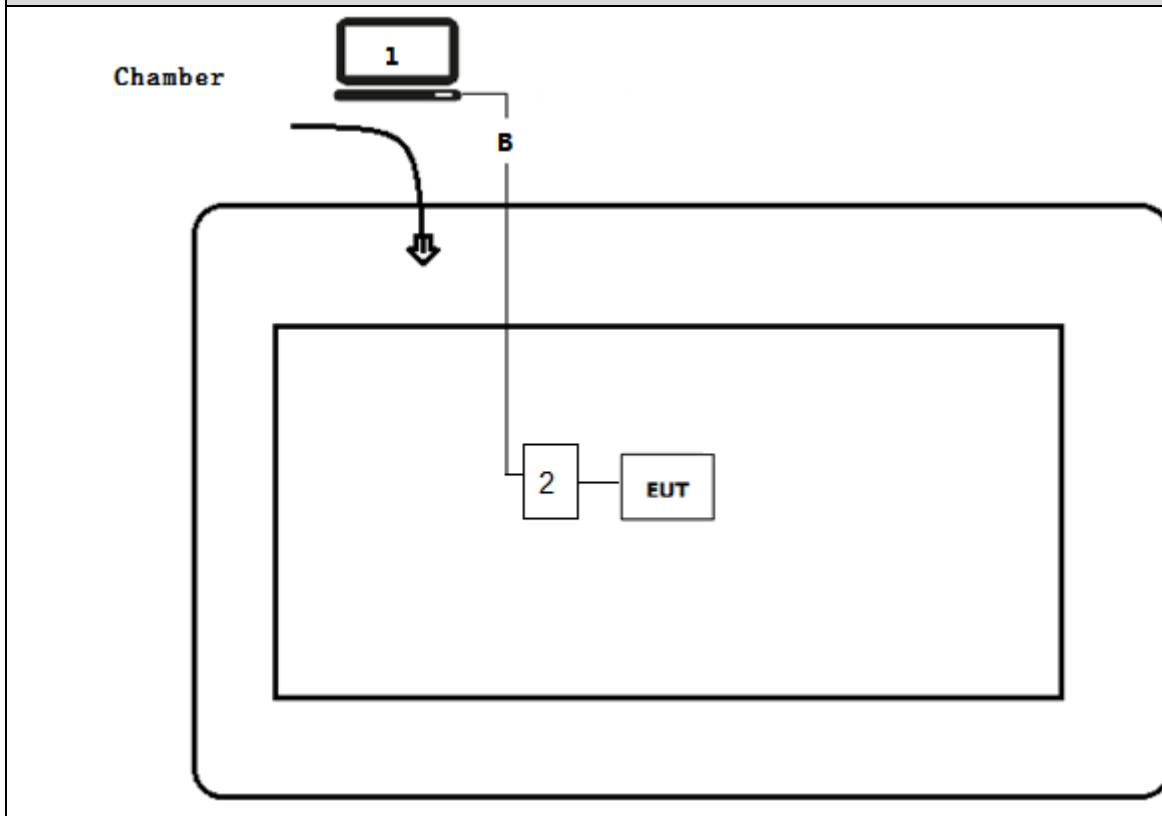

1.7.EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of equipment.
3	Run RF software [MTool], and set the test mode and channel, then press OK to start to continue transmit.

2. Technical Test

2.1. Summary of Test Result

- ☒ No deviations from the test standards
☐ Deviations from the test standards as below description:

Performed Test Item	Normative References	Limit	Result
Conducted Emission	FCC CFR Title 47 Part 15 Subpart E: Section 15.207	FCC 15.207	PASS
Radiated Emission	FCC CFR Title 47 Part 15 Subpart E: Section 15.209	FCC 15.209	PASS
Emission bandwidth and occupied bandwidth	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(a)	FCC 15.407(e)	PASS
6dB Emission Bandwidth	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(a)	FCC 15.407(e)	PASS
Power Output	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(a)	FCC 15.407(a)	PASS
Peak Power Spectral Density	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(a)	FCC 15.407(a)	PASS
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart E: Section 15.205, 15.407(b)	FCC 15.407(b)	PASS
Frequency Stability	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(g)	± 20ppm	PASS

2.2. Test Frequency configuration:

Modulation Mode	Channel	Frequency	Channel	Frequency	Channel	Frequency
802.11a/n/ac/ax(20MHz)	36	5180MHz	44	5220MHz	48	5240MHz
	149	5745MHz	157	5785MHz	165	5825MHz
802.11n/ac/ax(40MHz)	38	5190MHz	46	5230MHz	N/A	N/A
	151	5755MHz	159	5795MHz	N/A	N/A
802.11ac/ax(80MHz)	42	5210MHz	155	5775MHz	N/A	N/A

2.3. Power Parameter Value of the test software

Test Mode	Frequency	Eth6 Power Setting						
		1*1	2*2		3*3		4*4	
			CDD	Beamforming	CDD	Beamforming	CDD	Beamforming
802.11a	5180	78	78	74	63	60	63	60
	5220	78	78	76	63	60	63	60
	5240	78	78	76	63	60	63	60
	5745	86	86	83	79	70	79	70
	5785	86	86	83	79	70	79	70
	5825	86	86	83	79	70	79	70
802.11n(20MHz)	5180	78	78	76	62	58	62	58
	5220	78	78	76	62	58	62	58
	5240	78	78	76	62	58	62	58
	5745	86	86	83	78	72	78	72
	5785	86	86	83	77	73	77	73
	5825	86	86	83	77	73	77	73
802.11n(40MHz)	5190	72	72	69	55	50	55	50
	5230	72	72	69	55	46	55	46
	5755	86	86	83	80	78	80	78
	5795	86	86	83	86	78	86	78
802.11ac(20MHz)	5180	78	78	76	62	60	62	60
	5220	78	78	76	62	60	62	60
	5240	78	78	76	62	60	62	60
	5745	86	86	83	77	74	77	74
	5785	86	86	83	76	74	76	74
	5825	86	86	83	77	74	77	74
802.11ac(40MHz)	5190	70	70	69	54	48	54	48
	5230	70	70	69	54	47	54	47
	5755	86	86	83	80	71	80	71
	5795	86	86	83	86	71	86	71
802.11ac(80MHz)	5210	72	72	69	50	50	50	50
	5775	82	82	79	65	65	65	65

802.11ax(20MHz)	5180	76	76	76	61	59	61	59
	5220	76	76	76	61	59	61	59
	5240	76	76	76	61	59	61	59
	5745	86	86	83	78	70	78	70
	5785	86	86	83	75	73	75	73
	5825	86	86	83	74	73	74	73
802.11ax(40MHz)	5190	70	70	69	54	48	54	48
	5230	70	70	69	54	48	54	48
	5755	86	86	83	80	76	80	76
	5795	86	86	83	83	72	83	72
802.11ax(80MHz)	5210	72	72	70	50	46	50	46
	5775	82	82	79	65	62	65	62

Note: The 1*1 and 3*3 power setting are same with 2*2 and 4*4, so we only test 2*2 and 4*4 for compliance.

Test Mode	Frequency	Eth7 Power Setting						
		1*1	2*2		3*3		4*4	
			CDD	Beamforming	CDD	Beamforming	CDD	Beamforming
802.11a	5180	78	78	74	63	60	63	60
	5220	78	78	76	63	60	63	60
	5240	78	78	76	63	60	63	60
802.11n(20MHz)	5180	78	78	76	62	58	62	58
	5220	78	78	76	62	58	62	58
	5240	78	78	76	62	58	62	58
802.11n(40MHz)	5190	72	72	69	55	52	55	52
	5230	72	72	69	55	52	55	52
802.11ac(20MHz)	5180	78	78	76	62	60	62	60
	5220	78	78	76	62	60	62	60
	5240	78	78	76	62	60	62	60
802.11ac(40MHz)	5190	70	70	69	54	53	54	53
	5230	70	70	69	54	53	54	53
802.11ac(80MHz)	5210	72	72	69	50	50	50	50
802.11ax(20MHz)	5180	76	76	76	61	59	61	59
	5220	76	76	76	61	59	61	59
	5240	76	76	76	61	59	61	59
802.11ax(40MHz)	5190	70	70	69	54	51	54	51
	5230	70	70	69	54	51	54	51
802.11ax(80MHz)	5210	72	72	70	50	46	50	46

Note: The 1*1 and 3*3 power setting are same with 2*2 and 4*4, so we only test 2*2 and 4*4 for compliance.s

2.4. Power vs Data Rate

MCS Index for 802.11n	Spatial Streams	Data Rate (Mbps)						
		802.11b	802.11g	802.11a	20MHz Bandwidth		40MHz Bandwidth	
					800ns GI	400ns GI	800ns GI	400ns GI
0	1	1	6	6	6.5	7.2	13.5	15.0
1	1	2	9	9	13.0	14.4	27.0	30.0
2	1	5.5	12	12	19.5	21.7	40.5	45.0
3	1	11	18	18	26.0	28.9	54.0	60.0
4	1	---	24	24	39.0	43.3	81.0	90.0
5	1	---	36	36	52.0	57.8	108.0	120.0
6	1	---	48	48	58.5	65.0	121.5	135.0
7	1	---	54	54	65.0	72.2	135.0	150.0
8	2	---	---	---	13.0	14.4	27.0	30.0
9	2	---	---	---	26.0	28.9	54.0	60.0
10	2	---	---	---	39.0	43.3	81.0	90.0
11	2	---	---	---	52.0	57.8	108.0	120.0
12	2	---	---	---	78.0	86.7	162.0	180.0
13	2	---	---	---	104.0	115.6	216.0	240.0
14	2	---	---	---	117.0	130.0	243.0	270.0
15	2	---	---	---	130.0	144.0	270.0	300.0
16	3	---	---	---	19.5	21.6	40.5	45.0
17	3	---	---	---	39.0	43.2	81.0	90.0
18	3	---	---	---	58.5	65.1	121.5	135.0
19	3	---	---	---	78.0	86.7	162.0	180.0
20	3	---	---	---	117.0	129.9	243.0	270.0
21	3	---	---	---	156.0	173.4	324.0	360.0
22	3	---	---	---	175.5	195.0	364.5	405.0
23	3	---	---	---	195.0	216.6	405.0	450.0
24	4	---	---	---	26.0	28.8	54.0	60.0
25	4	---	---	---	52.0	57.6	108.0	120.0
26	4	---	---	---	78.0	86.8	162.0	180.0
27	4	---	---	---	104.0	115.6	216.0	240.0
28	4	---	---	---	156.0	173.2	324.0	360.0
29	4	---	---	---	208.0	231.2	432.0	480.0
30	4	---	---	---	234.0	260.0	486.0	540.0

31	4	---	---	---	260.0	288.8	540.0	600.0
Note1: The blue form is the maximum power data rate.								
2: The EUT supports four spatial streams.								

Spatial Streams (Note1)	MCS Index	Modulation type	Coding rate	Data Rate(Mb/s)					
				20MHz		40MHz		80MHz	
				Guard Interval		Guard Interval		Guard Interval	
				800ns	400ns	800ns	400ns	800ns	400ns
1	0	BPSK	1/2	6.5	7.2	13.5	15	29.3	32.5
	1	QPSK	1/2	13	14.4	27	30	58.5	65
	2	QPSK	3/4	19.5	21.7	40.5	45	87.8	97.5
	3	16-QAM	1/2	26	28.9	54	60	117	130
	4	16-QAM	3/4	39	43.3	81	90	175.5	195
	5	64-QAM	2/3	52	57.8	108	120	234	260
	6	64-QAM	3/4	58.5	65	121.5	135	263.3	292.5
	7	64-QAM	5/6	65	72.2	135	150	292.5	325
	8	256-QAM	3/4	78	86.7	162	180	351	390
	9	256-QAM	5/6	N/A	N/A	180	200	390	433.3
2	10	BPSK	1/2	13.0	14.4	27.0	30.0	58.6	65.0
	11	QPSK	1/2	26.0	28.8	54.0	60.0	117.0	130.0
	12	QPSK	3/4	39.0	43.4	81.0	90.0	175.6	195.0
	13	16-QAM	1/2	52.0	57.8	108.0	120.0	234.0	260.0
	14	16-QAM	3/4	78.0	86.6	162.0	180.0	351.0	390.0
	15	64-QAM	2/3	104.0	115.6	216.0	240.0	468.0	520.0
	16	64-QAM	3/4	117.0	130.0	243.0	270.0	526.6	585.0
	17	64-QAM	5/6	130.0	144.4	270.0	300.0	585.0	650.0
	18	256-QAM	3/4	156.0	173.4	324.0	360.0	702.0	780.0
	19	256-QAM	5/6	N/A	N/A	360.0	400.0	780.0	866.6
3	20	BPSK	1/2	19.5	21.6	40.5	45.0	87.9	97.5
	21	QPSK	1/2	39.0	43.2	81.0	90.0	175.5	195.0
	22	QPSK	3/4	58.5	65.1	121.5	135.0	263.4	292.5
	23	16-QAM	1/2	78.0	86.7	162.0	180.0	351.0	390.0
	24	16-QAM	3/4	117.0	129.9	243.0	270.0	526.5	585.0
	25	64-QAM	2/3	156.0	173.4	324.0	360.0	702.0	780.0
	26	64-QAM	3/4	175.5	195.0	364.5	405.0	789.9	877.5
	27	64-QAM	5/6	195.0	216.6	405.0	450.0	877.5	975.0
	28	256-QAM	3/4	234.0	260.1	486.0	540.0	1053.0	1170.0
	29	256-QAM	5/6	N/A	N/A	540.0	600.0	1170.0	1299.9
4	30	BPSK	1/2	26.0	28.8	54.0	60.0	117.2	130.0
	31	QPSK	1/2	52.0	57.6	108.0	120.0	234.0	260.0
	32	QPSK	3/4	78.0	86.8	162.0	180.0	351.2	390.0

	33	16-QAM	1/2	104.0	115.6	216.0	240.0	468.0	520.0
	34	16-QAM	3/4	156.0	173.2	324.0	360.0	702.0	780.0
	35	64-QAM	2/3	208.0	231.2	432.0	480.0	936.0	1040.0
	36	64-QAM	3/4	234.0	260.0	486.0	540.0	1053.2	1170.0
	37	64-QAM	5/6	260.0	288.8	540.0	600.0	1170.0	1300.0
	38	256-QAM	3/4	312.0	346.8	648.0	720.0	1404.0	1560.0
	39	256-QAM	5/6	N/A	N/A	720.0	800.0	1560.0	1733.2
Note 1: The blue form is the maximum power data rate.									
2: The EUT supports four spatial streams.									

Spatial Streams (Note1)	MCS Index	Modulation type	Coding rate	Data Rate(Mb/s)							
				20MHz		40MHz		80MHz		160MHz	
				Guard Interval		Guard Interval		Guard Interval		Guard Interval	
				1600 ns GI	800 ns GI	1600 ns GI	800 ns GI	1600 ns GI	800 ns GI	1600 ns GI	800 ns GI
1	0	BPSK	1/2	4	4	8	9	17	18	34	36
	1	QPSK	1/2	16	17	33	34	68	72	136	144
	2	QPSK	3/4	24	26	49	52	102	108	204	216
	3	16-QAM	1/2	33	34	65	69	136	144	272	282
	4	16-QAM	3/4	49	52	98	103	204	216	408	432
	5	64-QAM	2/3	65	69	130	138	272	288	544	576
	6	64-QAM	3/4	73	77	146	155	306	324	613	649
	7	64-QAM	5/6	81	86	163	172	340	360	681	721
	8	256-QAM	3/4	98	103	195	207	408	432	817	865
	9	256-QAM	5/6	108	115	217	229	453	480	907	961
	10	1024-QAM	3/4	122	129	244	258	510	540	1021	1081
	11	1024-QAM	5/6	135	143	271	287	567	600	1134	1201
2	12	BPSK	1/2	8	8	16	18	34	36	68	72
	13	QPSK	1/2	32	34	66	68	136	144	272	288
	14	QPSK	3/4	48	52	98	104	204	216	408	432
	15	16-QAM	1/2	66	68	130	138	272	288	544	564
	16	16-QAM	3/4	98	104	196	206	408	432	816	864
	17	64-QAM	2/3	130	138	260	276	544	576	1088	1152
	18	64-QAM	3/4	146	154	292	310	612	648	1226	1298
	19	64-QAM	5/6	162	172	326	344	680	720	1362	1442
	20	256-QAM	3/4	196	206	390	414	816	864	1634	1730
	21	256-QAM	5/6	216	230	434	458	906	960	1814	1922
	22	1024-QAM	3/4	244	258	488	516	1020	1080	2042	2162
	23	1024-QAM	5/6	270	286	542	574	1134	1200	2268	2402
3	24	BPSK	1/2	12	12	24	27	51	54	102	108
	25	QPSK	1/2	48	51	99	102	204	216	408	432
	26	QPSK	3/4	72	78	147	156	306	324	612	648
	27	16-QAM	1/2	99	102	195	207	408	432	816	846
	28	16-QAM	3/4	147	156	294	309	612	648	1224	1296
	29	64-QAM	2/3	195	207	390	414	816	864	1632	1728
	30	64-QAM	3/4	219	231	438	465	918	972	1839	1947
	31	64-QAM	5/6	243	258	489	516	1020	1080	2043	2163

	32	256-QAM	3/4	294	309	585	621	1224	1296	2451	2595
	33	256-QAM	5/6	324	345	651	687	1359	1440	2721	2883
	34	1024-QAM	3/4	366	387	732	774	1530	1620	3063	3243
	35	1024-QAM	5/6	405	429	813	861	1701	1800	3402	3603
4	36	BPSK	1/2	16	16	32	36	68	72	136	144
	37	QPSK	1/2	64	68	132	136	272	288	544	576
	38	QPSK	3/4	96	104	196	208	408	432	816	864
	39	16-QAM	1/2	132	136	260	276	544	576	1088	1128
	40	16-QAM	3/4	196	208	392	412	816	864	1632	1728
	41	64-QAM	2/3	260	276	520	552	1088	1152	2176	2304
	42	64-QAM	3/4	292	308	584	620	1224	1296	2452	2596
	43	64-QAM	5/6	324	344	652	688	1360	1440	2724	2884
	44	256-QAM	3/4	392	412	780	828	1632	1728	3268	3460
	45	256-QAM	5/6	432	460	868	916	1812	1920	3628	3844
	46	1024-QAM	3/4	488	516	976	1032	2040	2160	4084	4324
	47	1024-QAM	5/6	540	572	1084	1148	2268	2400	4536	4804
Note 1: The blue form is the maximum power data rate. 2: The EUT supports four spatial streams.											

2.5. Duty Cycle


CDD:

Test Mode	Tx On (ms)	Tx Off (ms)	VBW(Hz)	Tx On + Tx Off (ms)	Duty Cycle
802.11a	2.065	0.115	510	2.180	94.72%
802.11n(20MHz)	1.900	0.12	560	2.020	94.06%
802.11n(40MHz)	0.946	0.098	1.1k	1.044	90.61%
802.11ac(20MHz)	1.905	0.045	560	1.950	97.69%
802.11ac(40MHz)	0.912	0.07	1.1k	0.982	92.87%
802.11ac(80MHz)	0.421	0.067	2.4k	0.488	86.27%
802.11ax(20MHz)	1.475	0.035	680	1.510	97.68%
802.11ax(40MHz)	0.728	0.074	1.5k	0.802	90.77%
802.11ax(80MHz)	0.361	0.071	3k	0.432	83.56%


Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 789033 , when test for Radiated Emission Band Edge and Radiated Emission, $VBW \geq 1/T$ will be used.


802.11a

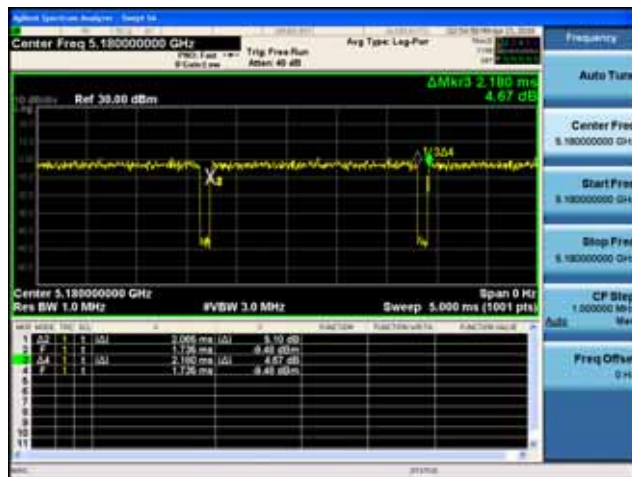


802.11n(20MHz)

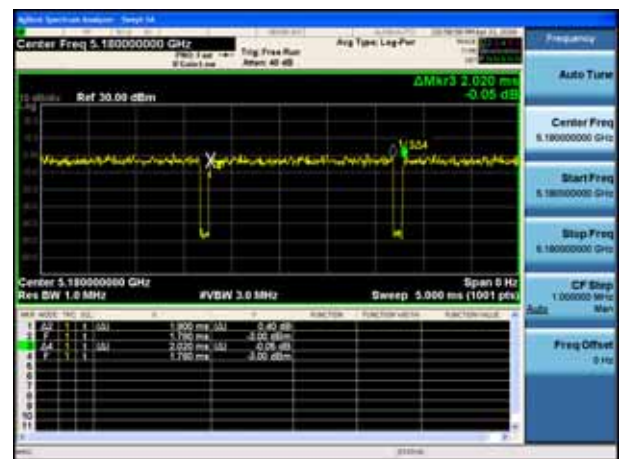


802.11n(40MHz)

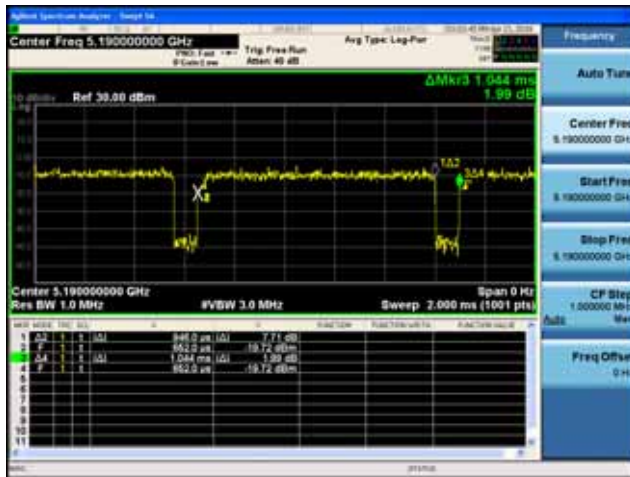

802.11ac(20MHz)

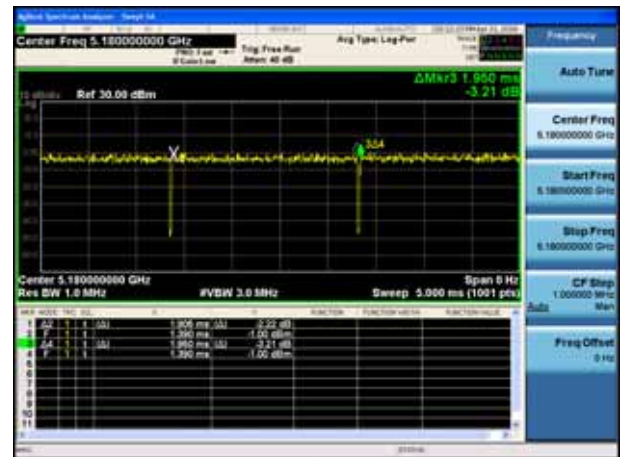


802.11ac(40MHz)

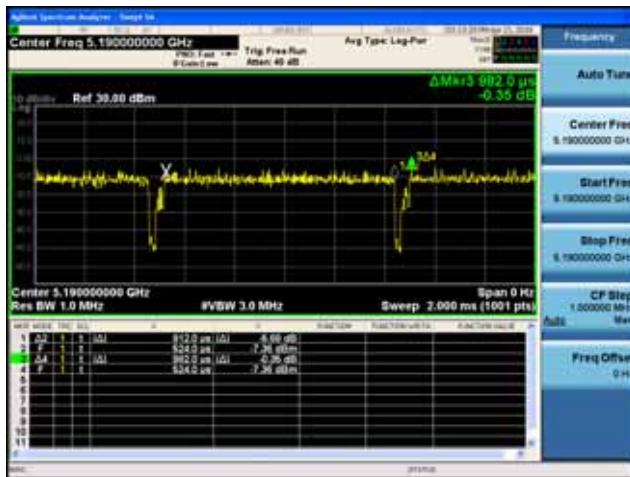


802.11ac(80MHz)




802.11ax(20MHz)

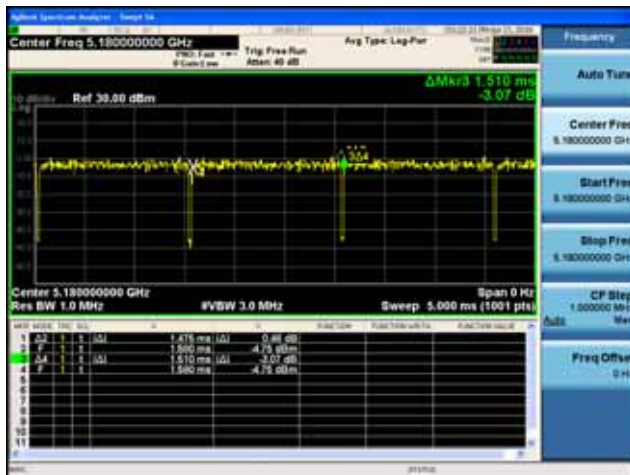

802.11ax(40MHz)

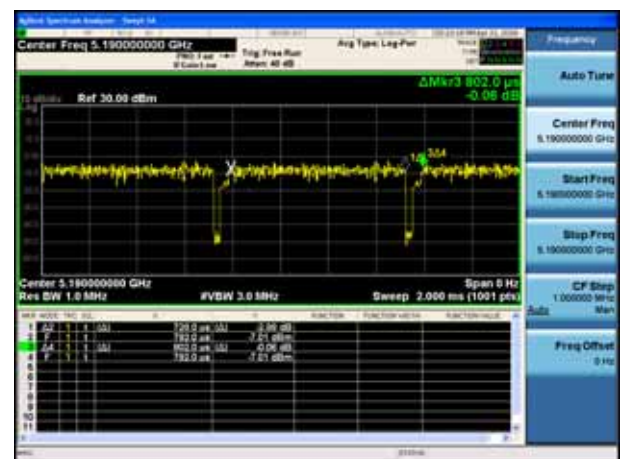

802.11ax(80MHz)

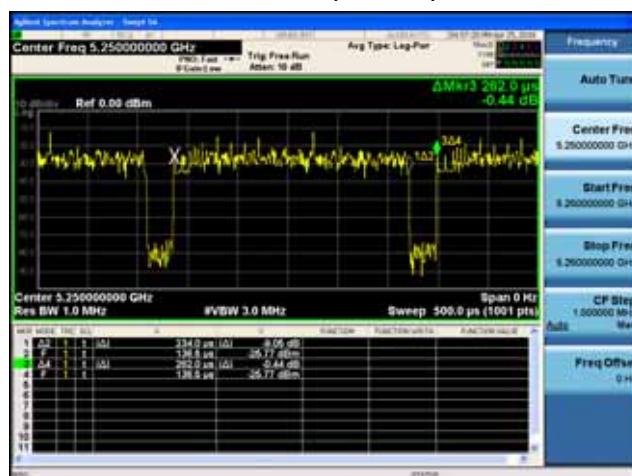


Beam-forming:


Test Mode	Tx On (ms)	Tx Off (ms)	VBW(Hz)	Tx On + Tx Off (ms)	Duty Cycle
802.11a	2.045	0.12	510	2.165	94.46%
802.11n(20MHz)	1.915	0.105	560	2.020	94.80%
802.11n(40MHz)	0.944	0.106	1.1k	1.050	89.90%
802.11ac(20MHz)	1.905	0.05	560	1.955	97.44%
802.11ac(40MHz)	0.944	0.036	1.1k	0.980	96.33%
802.11ac(80MHz)	0.459	0.03	2.2k	0.489	93.87%
802.11ax(20MHz)	1.473	0.048	680	1.521	96.84%
802.11ax(40MHz)	0.762	0.042	1.5k	0.804	94.78%
802.11ax(80MHz)	0.401	0.032	2.7k	0.433	92.61%

Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 789033 , when test for Radiated Emission Band Edge and Radiated Emission, $VBW \geq 1/T$ will be used.

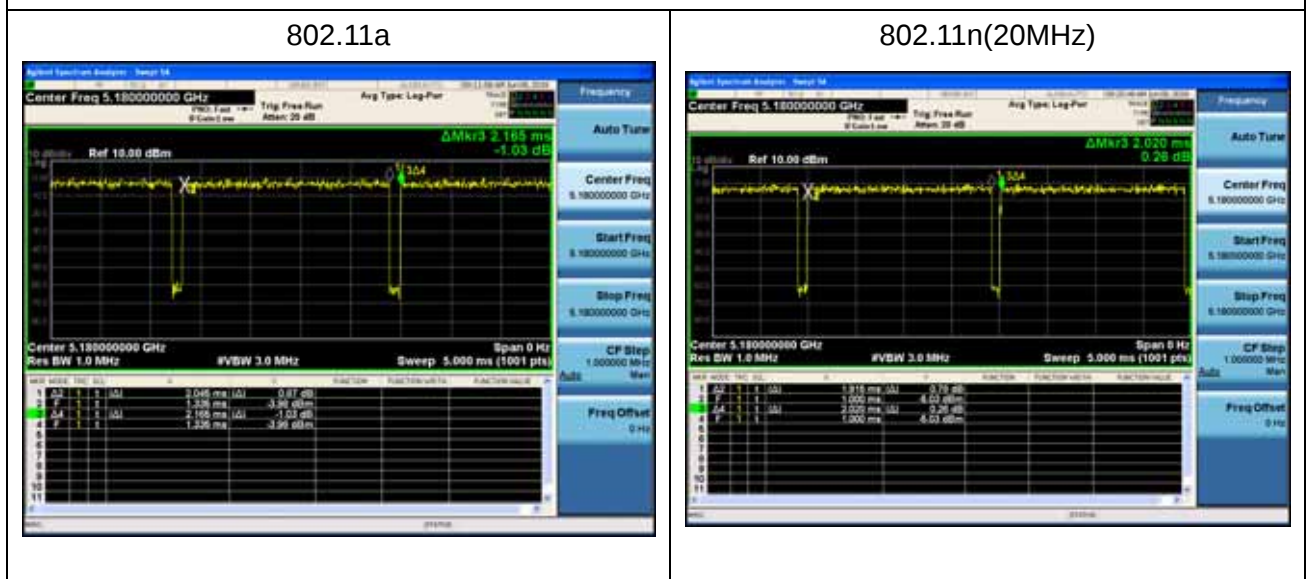


802.11n(40MHz)

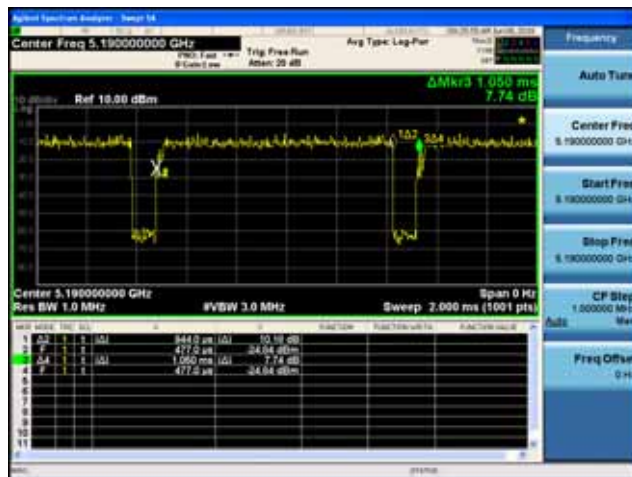


802.11ac(20MHz)




802.11ac(40MHz)

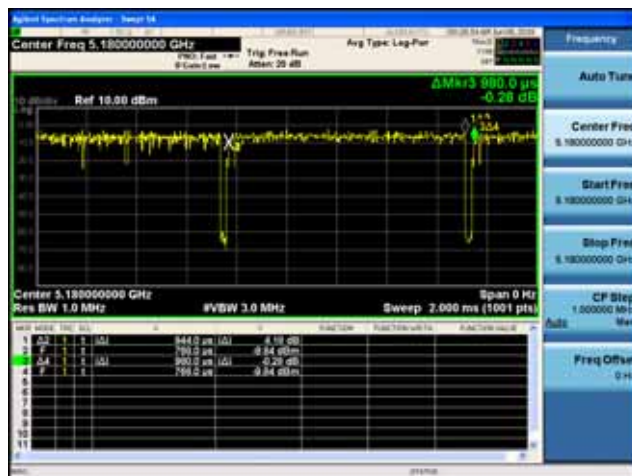


802.11ac(80MHz)

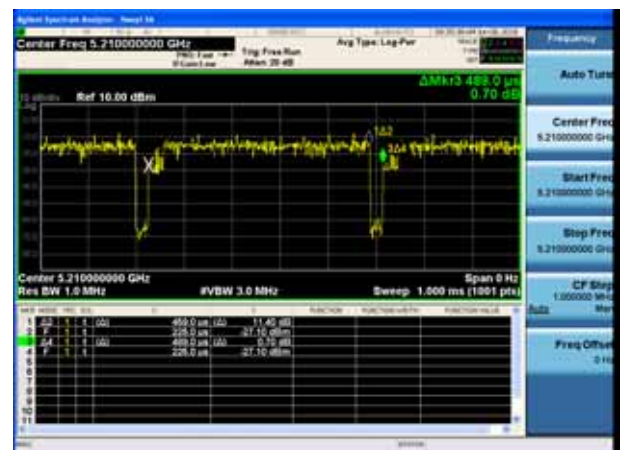


802.11ax(20MHz)

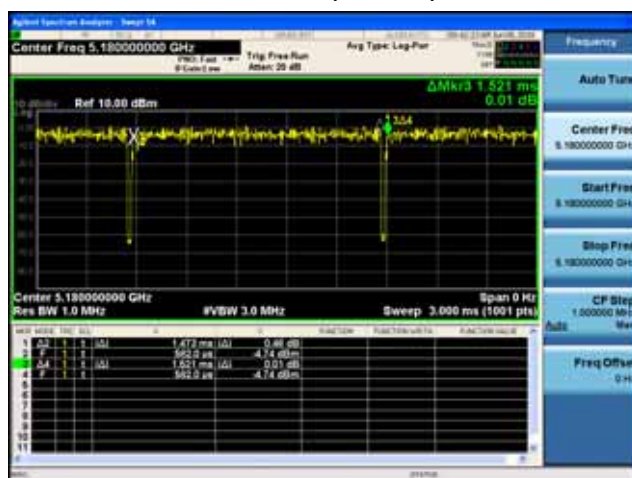

802.11ax(40MHz)

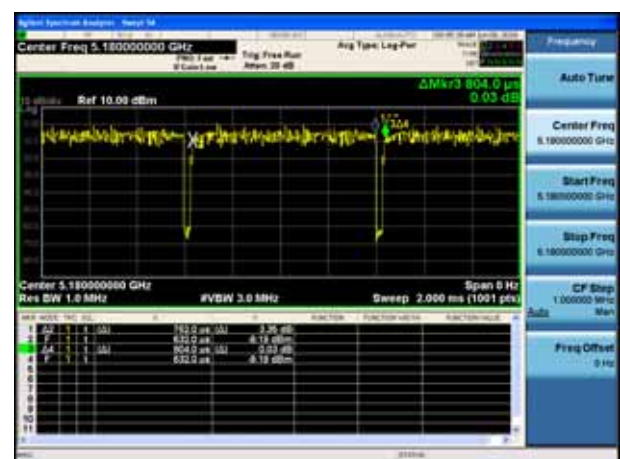

802.11ax(80MHz)

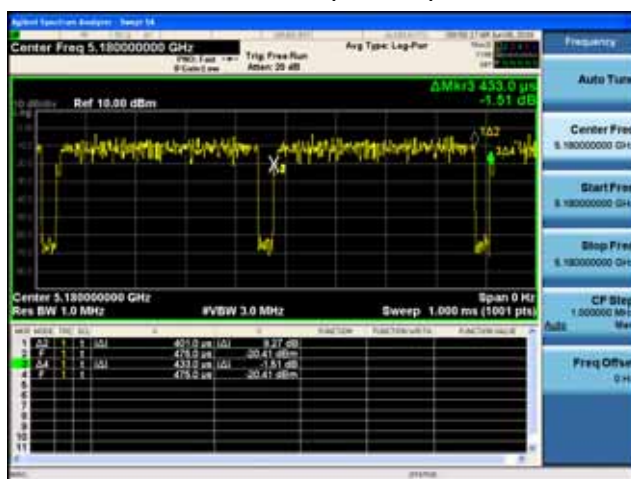

2.6. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

2.7. Uncertainty

Test Items	Uncertainty
AC Power Line Conducted Emission	$\pm 2.02\text{dB}$
Radiated Emission	Below 1GHz $\pm 3.8\text{ dB}$
	Above 1GHz $\pm 3.9\text{ dB}$
RF Antenna Port Conducted Emission	$\pm 1.27\text{dB}$
Radiated Emission Band Edge	$\pm 3.9\text{dB}$
Occupied Bandwidth	$\pm 1\text{kHz}$
Power Spectral Density	$\pm 1.27\text{dB}$
Frequency Stability	$\pm 100\text{ Hz}$


3. Conducted Emission

3.1. Test Equipment

Conducted Emission / TR-1					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100906	2018.03.05	2019.03.04
Two-Line V-Network	R&S	ENV 216	101189	2018.06.16	2019.06.15
Two-Line V-Network	R&S	ENV 216	101044	2017.09.16	2018.09.15
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
50ohm Termination	SHX	TF2	07081402	2017.09.16	2018.09.15
Temperature/Humidity Meter	Zhichen	ZC1-2	TR1-TH	2018.01.05	2019.01.04

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

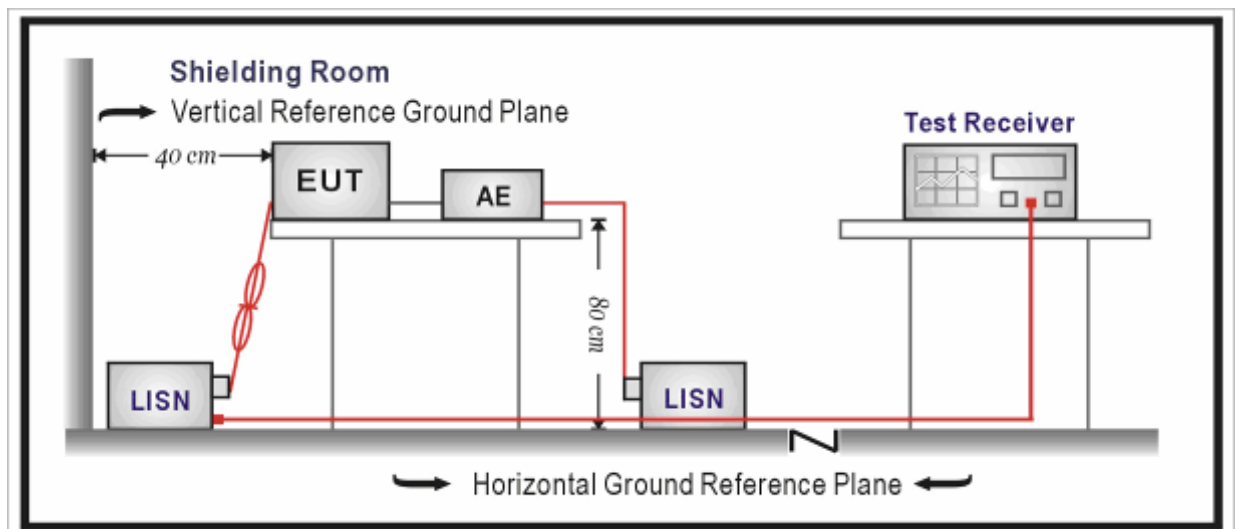

3.3. Limit

Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 – 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

3.4. Test Procedure

Test Method			
	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

3.5. Test Result

Site: TR1	Time: 2018/06/29
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: Wireless Access Point	Power: AC 120V/60Hz
Note: Mode 1	

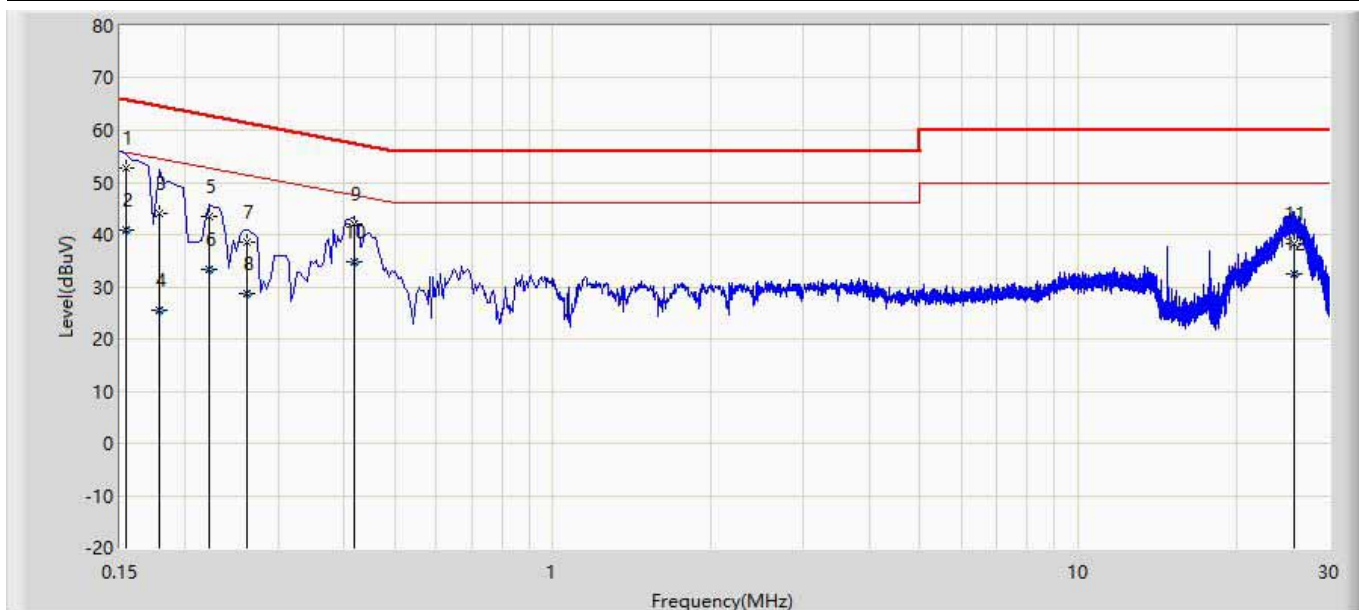


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1	*	0.154	52.824	43.189	-13.062	65.886	9.609	0.025	0.000	QP
2		0.154	40.753	31.119	-15.133	55.886	9.609	0.025	0.000	AV
3		0.178	44.058	34.426	-21.142	65.200	9.604	0.028	0.000	QP
4		0.178	25.473	15.841	-29.727	55.200	9.604	0.028	0.000	AV
5		0.222	43.573	33.943	-20.370	63.943	9.600	0.029	0.000	QP
6		0.222	33.352	23.723	-20.591	53.943	9.600	0.029	0.000	AV
7		0.262	38.548	28.916	-24.252	62.800	9.600	0.032	0.000	QP
8		0.262	28.749	19.117	-24.051	52.800	9.600	0.032	0.000	AV
9		0.418	41.968	32.329	-16.375	58.343	9.600	0.039	0.000	QP
10		0.418	34.874	25.235	-13.469	48.343	9.600	0.039	0.000	AV
11		25.778	38.206	27.420	-21.794	60.000	10.456	0.330	0.000	QP
12		25.778	32.331	21.545	-17.669	50.000	10.456	0.330	0.000	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site: TR1	Time: 2018/06/29
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: Wireless Access Point	Power: AC 120V/60Hz
Note: Mode 1	

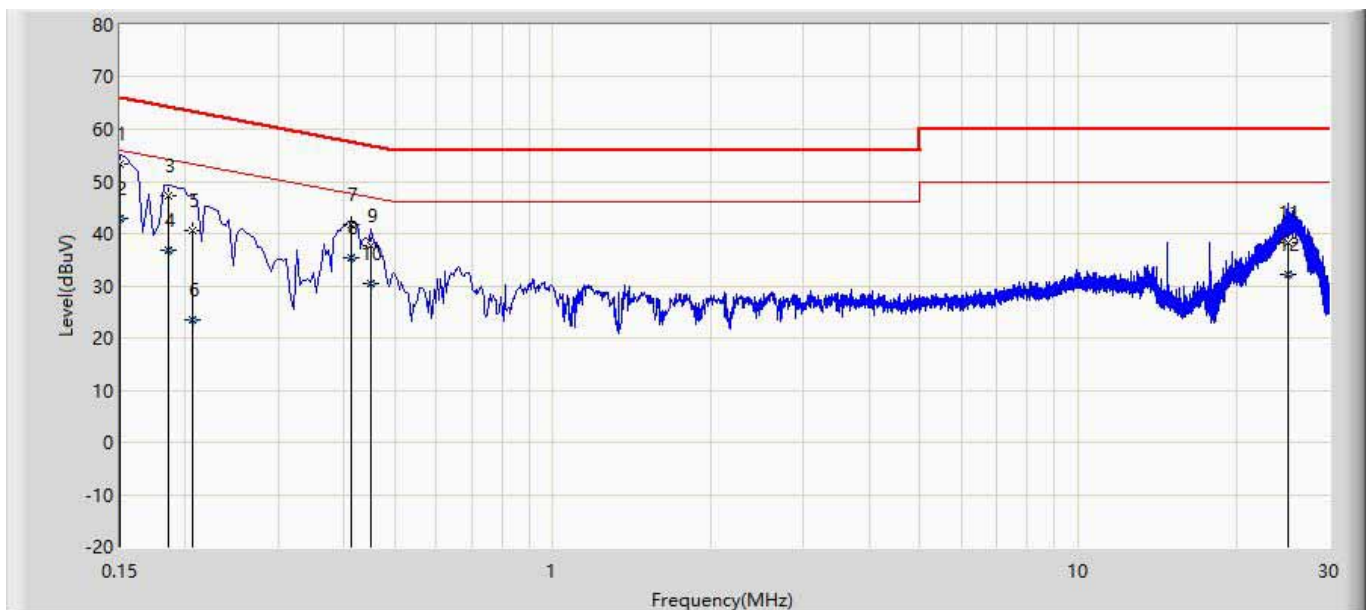

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1	*	0.150	53.411	43.792	-12.589	66.000	9.594	0.025	0.000	QP
2		0.150	42.996	33.377	-13.004	56.000	9.594	0.025	0.000	AV
3		0.186	47.231	37.605	-17.740	64.971	9.597	0.028	0.000	QP
4		0.186	36.691	27.066	-18.280	54.971	9.597	0.028	0.000	AV
5		0.206	40.708	31.080	-23.692	64.400	9.599	0.029	0.000	QP
6		0.206	23.488	13.861	-30.912	54.400	9.599	0.029	0.000	AV
7		0.414	41.613	31.982	-16.844	58.457	9.592	0.039	0.000	QP
8		0.414	35.339	25.708	-13.118	48.457	9.592	0.039	0.000	AV
9		0.450	37.691	28.058	-19.738	57.429	9.591	0.041	0.000	QP
10		0.450	30.512	20.879	-16.917	47.429	9.591	0.041	0.000	AV
11		25.022	38.172	27.188	-21.828	60.000	10.660	0.324	0.000	QP
12		25.022	32.215	21.231	-17.785	50.000	10.660	0.324	0.000	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4. Radiated Emission


4.1. Test Equipment

Radiated Emission(Below 1GHz) / AC-2					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2018.03.29	2019.03.28
Loop Antenna	R&S	HFH2-Z2	833799/003	2017.11.16	2018.11.15
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2017.10.16	2018.10.15
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2018.03.02	2019.03.01
Temperature/Humidity Meter	Zhichen	ZC1-2	AC2-TH	2018.01.04	2019.01.03
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					


Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2018.01.04	2019.01.03
Preamplifier	Miteq	NSP1800-25	1364185	2018.05.06	2019.05.05
Preamplifier	QuieTek	AP-040G	CHM-0906001	2018.05.06	2019.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2018.01.22	2019.01.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2017.11.25	2018.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2018.03.02	2019.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2018.03.02	2019.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2018.03.02	2019.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2018.06.10	2019.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2018.01.04	2019.01.03
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

4.2. Test Setup


Below 30MHz Test Setup:

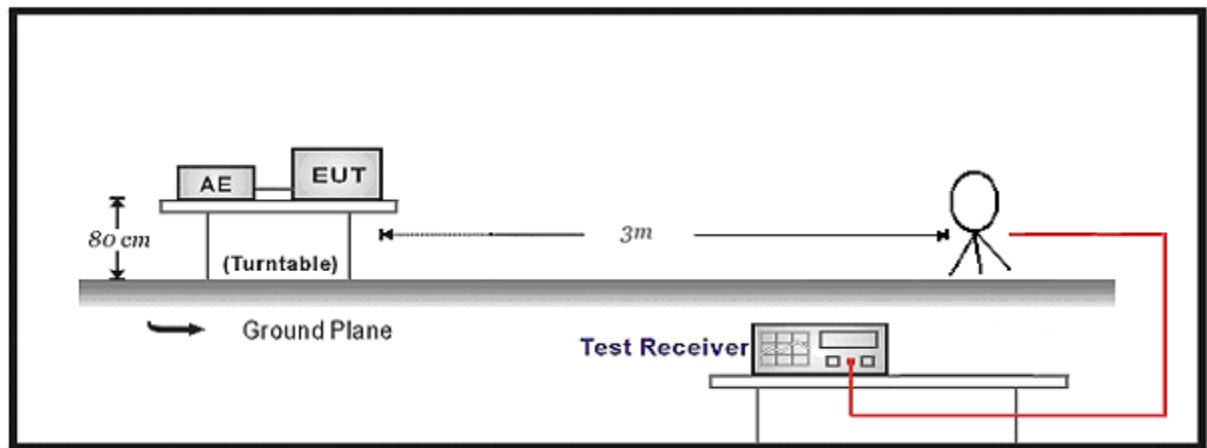

30MHz-1GHz Test Setup:

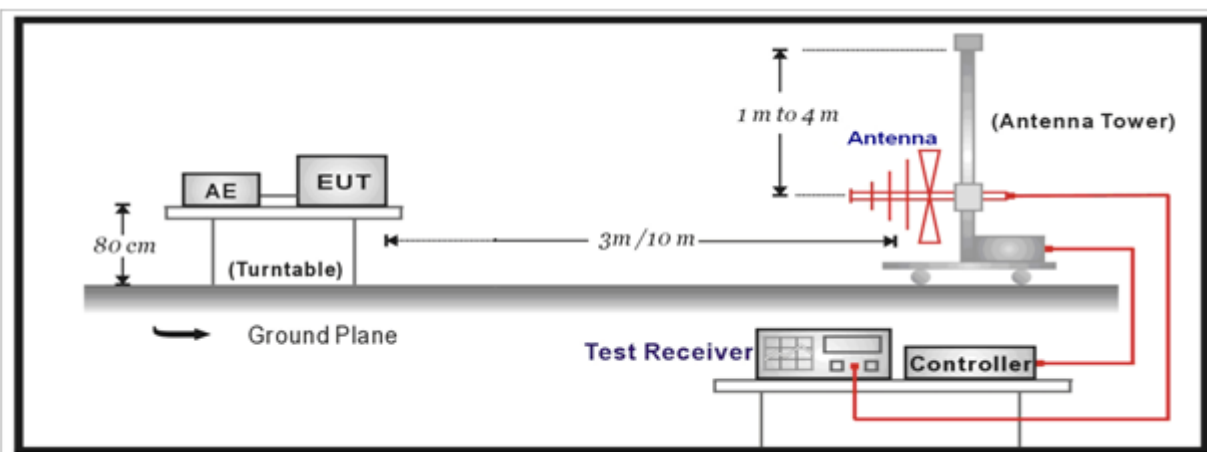

Above 1GHz Test Setup:

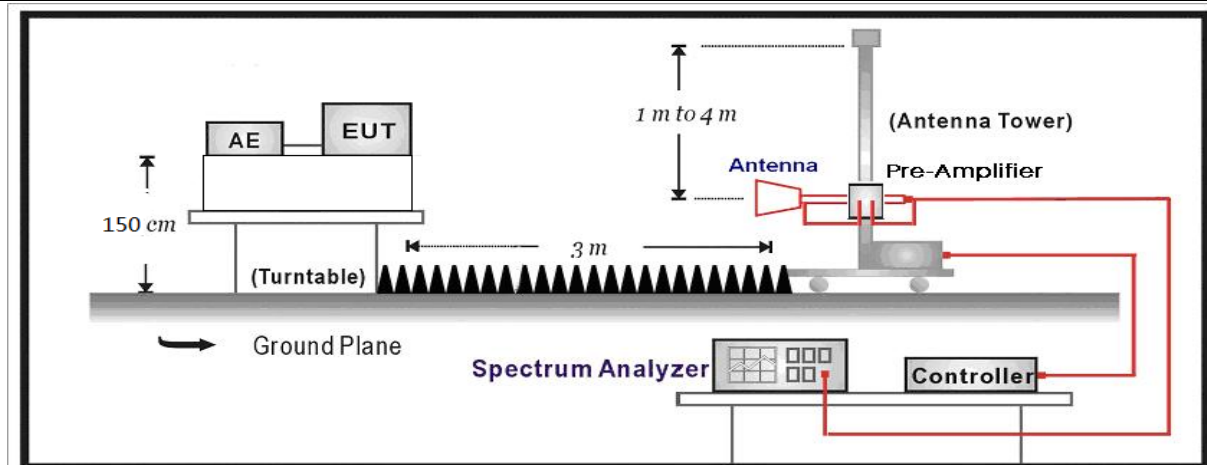


4.3. Limit

FCC Part 15 Subpart C Paragraph 15.209 (Restricted Band Emissions Limit)		
Frequency (MHz)	Distance (m)	Level (dB μ V/m)
0.009-0.490	300	2400/F(kHz)
0.490-1.705	30	24000/F(kHz)
1.705-30.0	30	30
30-88	3	100**
88-216	3	150**
216-960	3	200**
Above 960	3	500

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).





FCC Part 15 Subpart C Paragraph 15.205 (Restricted Band)			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

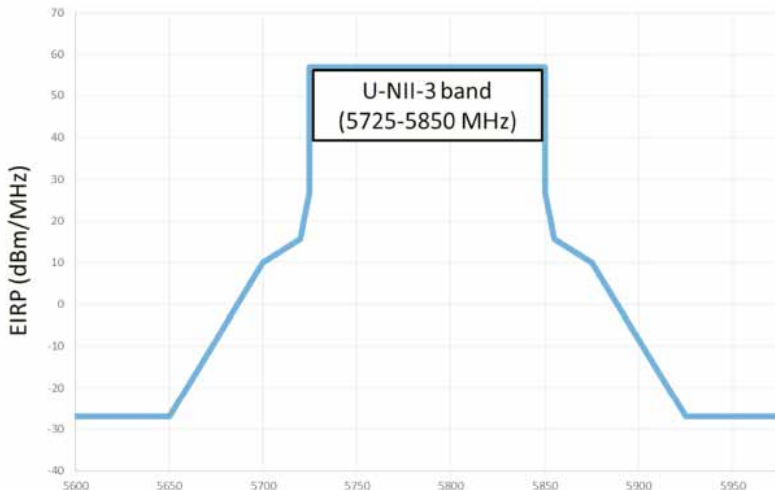FCC Part 15 Subpart C Paragraph 15.407(5)(b) (Unrestricted Band Emissions Limit)		
Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dB μ V/m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3
Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	
5725 - 5850	 U-NII-3 band (5725-5850 MHz)	

4.4. Test Procedure

Test Method				
	References Rule		Chapter	Description
☐	ANSI C63.10		12.7.3	Emissions in non-restricted frequency bands
☒	ANSI C63.10		12.7.2	Emissions in restricted frequency bands
	☒	ANSI C63.10	12.7.5	Radiated emission measurements
	☒	ANSI C63.10	12.7.6	Procedure for peak unwanted emissions measurements above 1000 MHz
	☒	ANSI C63.10	12.7.7	Procedures for average unwanted emissions measurements above 1000 MHz
	☐	ANSI C63.10	12.7.7.2	Method AD (average detection)—primary method
	☒	ANSI C63.10	12.7.7.3	Method VB-A (Alternative)
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
☐	FCC KDB 789033 D02v02r01		G.2	Unwanted Emissions that fall Outside of the Restricted Bands
☐	FCC KDB 789033 D02v02r01		G.1	Unwanted Emissions in the Restricted Bands
	☐	FCC KDB 789033 D02v02r01	G.4	Procedure for Unwanted Emissions Measurements below 1000 MHz
	☐	FCC KDB 789033 D02v02r01	G.5	Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz
	☐	FCC KDB 789033 D02v02r01	G.6	Procedures for Average Unwanted Emissions Measurements above 1000 MHz
	☐	FCC KDB 789033 D02v02r01	G.6.c	Method AD (Average detection)—primary method
	☐	FCC KDB 789033 D02v02r01	G.6.d	Method VB (Averaging using reduced video bandwidth): Alternative method.

4.5.EUT test Axis definition

Item	Radiated Emission				
Device Category	☒	Indoor use			
	☐	Outdoor use			
	☐	Fix position use			
	☐	Client use			
Test mode	Mode 1-9				
Test method	☒	Radiated			
		X Axis	Y Axis	Z Axis	
					
		Worst Axis ☒	Worst Axis ☐	Worst Axis ☐	
	☐	Conducted			
	☐	Chain 1			
					
	☐	Chain 1	Chain 2		
					
	☐	Chain 1	Chain 2	Chain 3	
					
	☐	Chain 1	Chain 2	Chain 3	Chain 4
					

4.6. Test Result

Note:

1. Measured Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, 18GHz~40GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. As the radiated emission was performed, so conducted emission was not tested.
5. The data was too large so was showed in below attached files.

Appendix 1: CDD Ant 2x2 RSE


Appendix 2: CDD Ant 4x4 RSE

Appendix 3: Beam-Forming Ant 2x2 RSE

Appendix 4: Beam-Forming Ant 4x4 RSE

The worst case of Radiated Emission below 1GHz:

Engineer: Tirito	
Site: AC3	Time: 2018/06/29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Note: Mode 1	

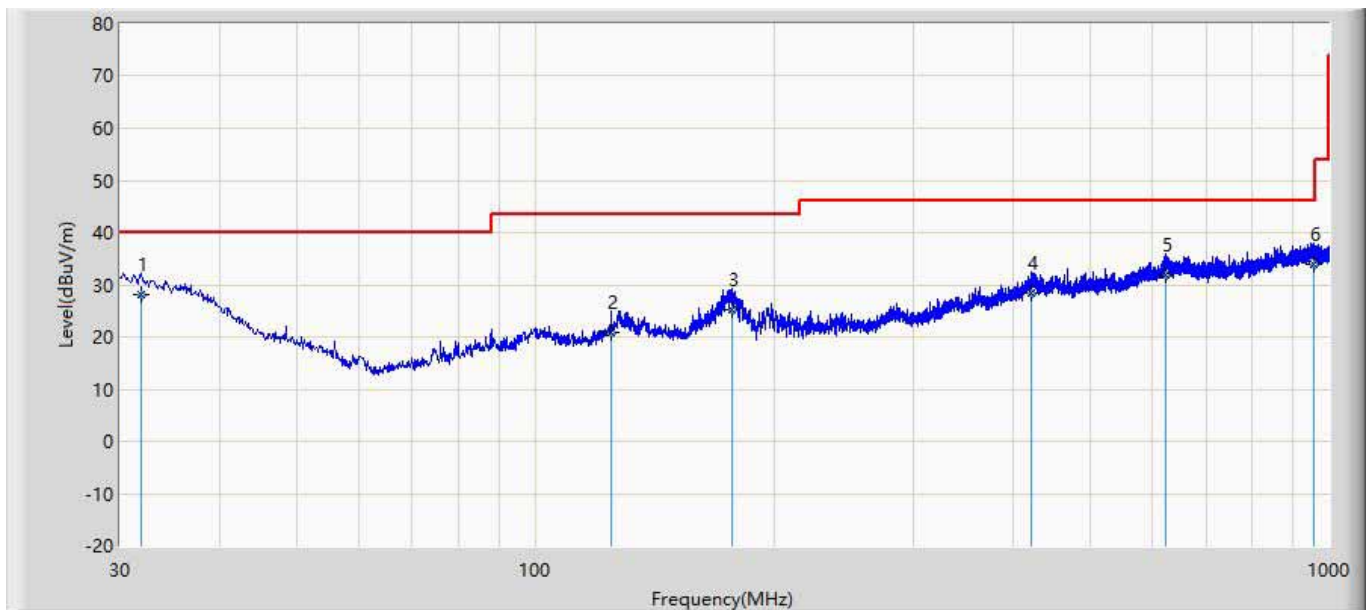


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1	*	31.940	28.120	1.300	-11.880	40.000	20.356	6.464	0.000	100	96	QP
2		124.817	20.895	4.500	-22.605	43.500	9.427	6.968	0.000	100	331	QP
3		177.319	25.236	8.000	-18.264	43.500	10.042	7.194	0.000	100	210	QP
4		421.000	28.368	1.200	-17.632	46.000	19.208	7.960	0.000	100	42	QP
5		623.883	31.745	1.900	-14.255	46.000	21.356	8.489	0.000	200	174	QP
6		956.229	33.872	1.100	-12.128	46.000	23.552	9.220	0.000	100	157	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Tirito	
Site: AC3	Time: 2018/06/29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Note: Mode 1	

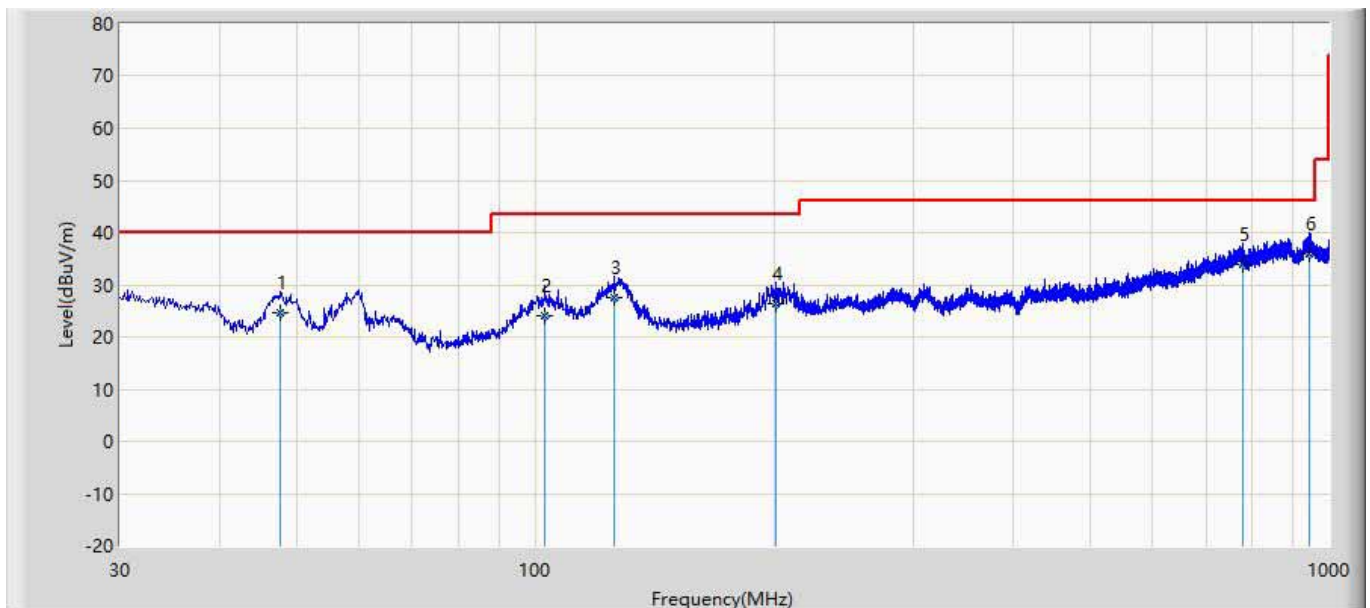


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		47.824	24.730	6.600	-15.270	40.000	11.557	6.572	0.000	100	157	QP
2		102.750	24.176	2.100	-19.324	43.500	15.209	6.867	0.000	100	230	QP
3		126.030	27.541	6.200	-15.959	43.500	14.367	6.974	0.000	100	174	QP
4		200.841	26.367	3.800	-17.133	43.500	15.283	7.283	0.000	100	93	QP
5		777.749	33.819	1.800	-12.181	46.000	23.177	8.842	0.000	200	331	QP
6	*	943.497	35.942	1.600	-10.058	46.000	25.153	9.189	0.000	100	214	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).


The worst case of Simultaneous Radiated Emission:

Engineer: Damon	
Site: AC5	Time: 2018/06/29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Wireless Access Point	Power: AC 120V/60Hz
Note: WIFI+BT simultaneous transmit	

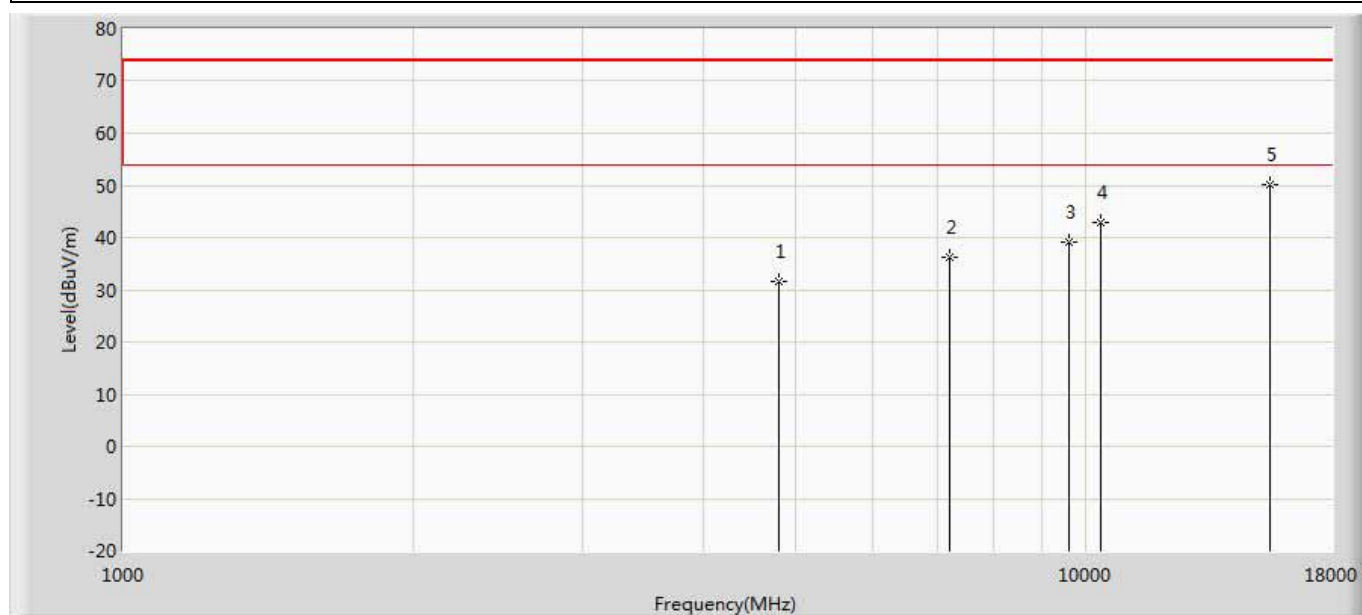

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	31.708	40.006	-42.292	74.000	-8.298	PK
2		7206.000	36.145	41.115	-37.855	74.000	-4.970	PK
3		9608.000	39.135	40.065	-34.865	74.000	-0.930	PK
4		10360.000	42.952	42.981	-31.048	74.000	-0.029	PK
5	*	15540.000	50.014	44.157	-23.986	74.000	5.857	PK

Engineer: Damon	
Site: AC5	Time: 2018/06/29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Wireless Access Point	Power: AC 120V/60Hz
Note: WIFI+BT simultaneous transmit	

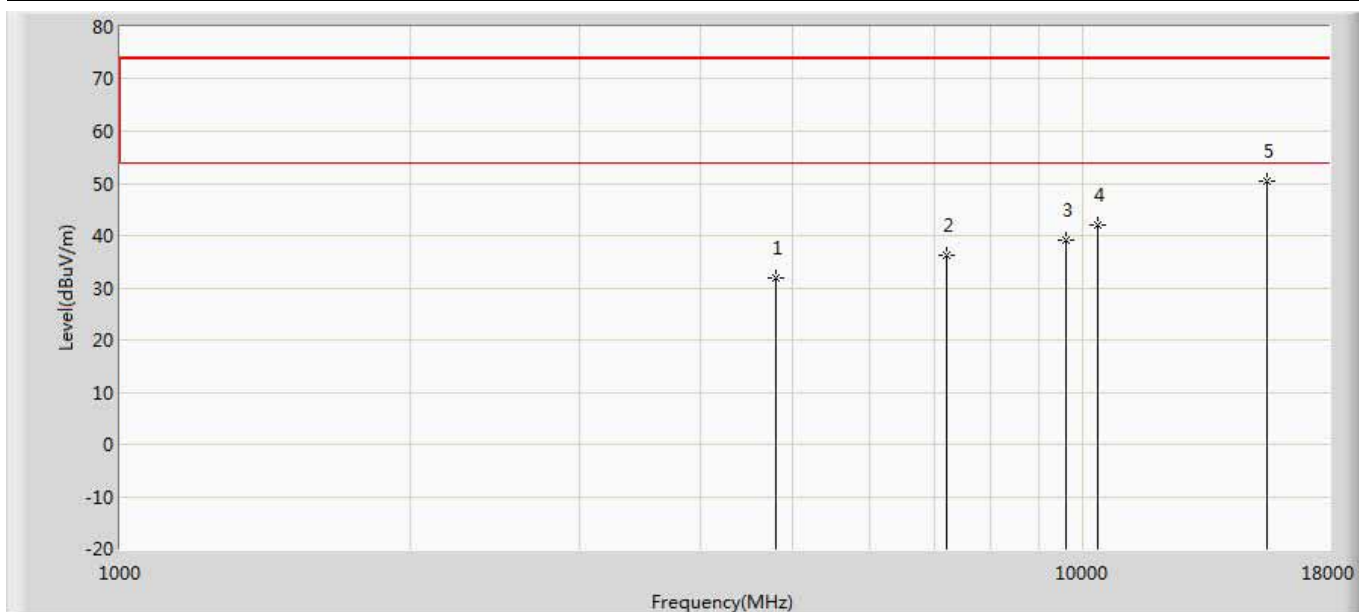

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	31.759	40.057	-42.241	74.000	-8.298	PK
2		7206.000	36.146	41.116	-37.854	74.000	-4.970	PK
3		9608.000	39.148	40.078	-34.852	74.000	-0.930	PK
4		10360.000	42.123	42.152	-31.877	74.000	-0.029	PK
5	*	15540.000	50.452	44.595	-23.548	74.000	5.857	PK

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).


5. Emission bandwidth and occupied bandwidth

5.1. Test Equipment

Emission bandwidth and occupied bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2019.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

5.2. Test Setup

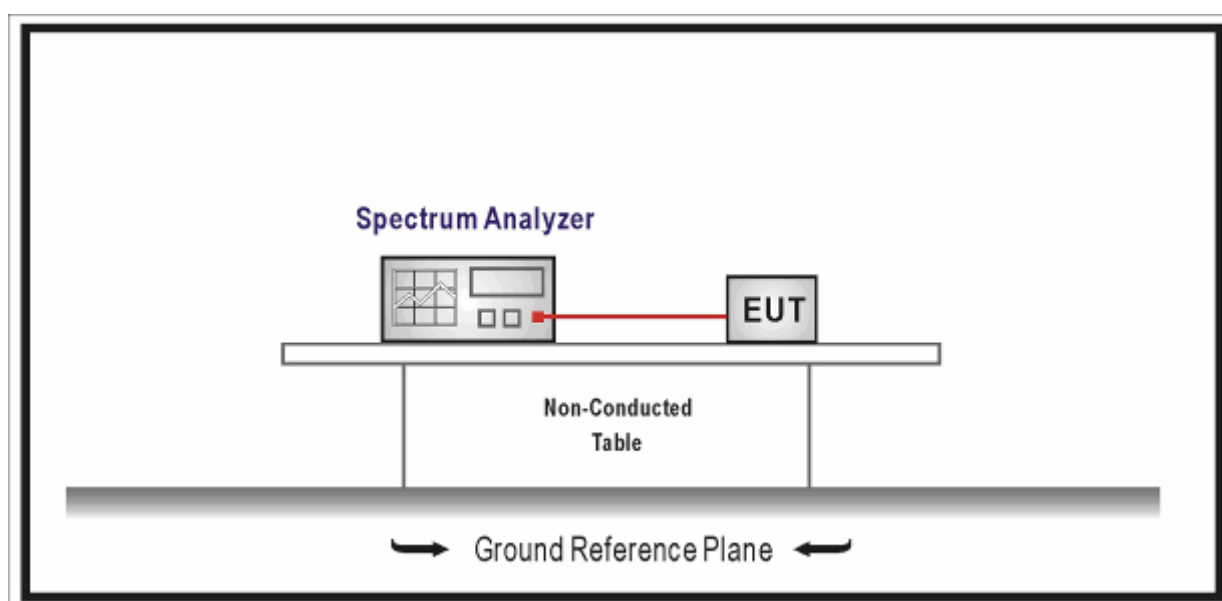







5.3. Limit

N/A

5.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
☐	ANSI C63.10	12.4	Emission bandwidth and occupied bandwidth
	☐ ANSI C63.10	12.4.1	Emission bandwidth (26dB)
	☐ ANSI C63.10	12.4.2	Occupied bandwidth (99%)
☒	FCC KDB 789033 D02v02r01	C	Bandwidth Measurement
	☒ FCC KDB 789033 D02v02r01	C.1	Emission Bandwidth (26dB)
	☐ FCC KDB 789033 D02v02r01	C.2	Minimum Emission Bandwidth for the band 5.725-5.85 GHz (6dB)
☒	FCC KDB 789033 D02v02r01	D	99 Percent Occupied Bandwidth

5.5.EUT test Axis definition

Item	Occupied bandwidth				
Device Category	☒	Indoor use			
	☐	Outdoor use			
	☐	Fix position use			
	☐	Client use			
Test mode	Mode 1-9				
Test method	☐	Radiated			
		X Axis	Y Axis	Z Axis	
					
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐	
	☒	Conducted			
	☐	Chain 1			
					
	☒	Chain 1	Chain 2		
					
	☐	Chain 1	Chain 2	Chain 3	
					
	☒	Chain 1	Chain 2	Chain 3	Chain 4
					

5.6. Test Result

Product Name	:	Wireless Access Point	Power	:	AC 120V/60Hz
Test Mode	:	Mode 1~9	Test Site	:	TR8
Test Date	:	2018.05.20	Test Engineer	:	Damon

Mode 1: Transmit by 802.11a with CDD by Ant 1+2

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	22.08	16.901	5171.550	Pass
CH44	5220	26.15	16.952	N/A	Pass
CH48	5240	26.34	16.965	5248.483	Pass
CH149	5745	29.96	17.444	N/A	Pass
CH157	5785	29.26	17.119	N/A	Pass
CH165	5825	29.22	17.099	N/A	Pass

Mode 1: Transmit by 802.11a with CDD by Ant 1+2+3+4

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	21.35	16.789	5171.606	Pass
CH44	5220	21.45	16.744	N/A	Pass
CH48	5240	21.21	16.784	5248.392	Pass
CH149	5745	29.17	17.062	N/A	Pass
CH157	5785	29.92	17.272	N/A	Pass
CH165	5825	28.51	17.015	N/A	Pass

Mode 2: Transmit by 802.11n(20MHz) with CDD by Ant 1+2					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	21.46	17.945	5171.028	Pass
CH44	5220	21.70	17.967	N/A	Pass
CH48	5240	22.63	17.947	5248.974	Pass
CH149	5745	29.99	18.224	N/A	Pass
CH157	5785	29.42	18.090	N/A	Pass
CH165	5825	30.00	18.114	N/A	Pass

Mode 2: Transmit by 802.11n(20MHz) with CDD by Ant 1+2+3+4					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	21.50	17.880	5171.060	Pass
CH44	5220	21.22	17.859	N/A	Pass
CH48	5240	21.52	17.875	5248.938	Pass
CH149	5745	24.86	18.022	N/A	Pass
CH157	5785	28.87	18.112	N/A	Pass
CH165	5825	24.77	18.035	N/A	Pass

Mode 3: Transmit by 802.11n(40MHz) with CDD by Ant 1+2					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH38	5190	39.50	36.383	5171.809	Pass
CH46	5230	39.40	36.401	5248.201	Pass
CH151	5755	59.55	36.740	N/A	Pass
CH159	5795	56.49	36.575	N/A	Pass

Mode 3: Transmit by 802.11n(40MHz) with CDD by Ant 1+2+3+4					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH38	5190	39.50	36.402	5171.799	Pass
CH46	5230	39.34	36.290	5248.145	Pass
CH151	5755	57.19	36.557	N/A	Pass
CH159	5795	60.00	37.082	N/A	Pass

Mode 4: Transmit by 802.11ac(20MHz) with CDD by Ant 1+2					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	21.54	17.956	5171.022	Pass
CH44	5220	22.76	17.963	N/A	Pass
CH48	5240	22.55	17.976	5248.988	Pass
CH149	5745	28.26	18.179	N/A	Pass
CH157	5785	26.65	18.152	N/A	Pass
CH165	5825	29.94	18.129	N/A	Pass

Mode 4: Transmit by 802.11ac(20MHz) with CDD by Ant 1+2+3+4					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	21.54	17.924	5171.038	Pass
CH44	5220	21.55	17.925	N/A	Pass
CH48	5240	21.39	17.942	5248.971	Pass
CH149	5745	22.48	18.053	N/A	Pass
CH157	5785	26.48	18.129	N/A	Pass
CH165	5825	28.98	18.082	N/A	Pass

Mode 5: Transmit by 802.11ac(40MHz) with CDD by Ant 1+2					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH38	5190	39.80	36.331	5171.835	Pass
CH46	5230	39.78	36.360	5248.180	Pass
CH151	5755	57.95	36.569	N/A	Pass
CH159	5795	56.80	36.648	N/A	Pass

Mode 5: Transmit by 802.11ac(40MHz) with CDD by Ant 1+2+3+4					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH38	5190	39.34	36.423	5171.789	Pass
CH46	5230	39.81	36.390	5248.195	Pass
CH151	5755	57.85	36.535	N/A	Pass
CH159	5795	60.00	36.997	N/A	Pass

Mode 6: Transmit by 802.11ac(80MHz) with CDD by Ant 1+2					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH42	5210	81.47	77.139	5171.431/5248.570	Pass
CH155	5775	113.8	77.414	N/A	Pass

Mode 6: Transmit by 802.11ac(80MHz) with CDD by Ant 1+2+3+4					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH42	5210	81.29	75.496	5172.252/5247.748	Pass
CH155	5775	81.35	75.764	N/A	Pass

Mode 7: Transmit by 802.11ax(20MHz) with CDD by Ant 1+2					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	22.24	19.104	5170.448	Pass
CH44	5220	24.21	19.124	N/A	Pass
CH48	5240	23.99	19.099	5249.550	Pass
CH149	5745	29.81	19.268	N/A	Pass
CH157	5785	30.00	19.248	N/A	Pass
CH165	5825	27.70	19.120	N/A	Pass

Mode 7: Transmit by 802.11ax(20MHz) with CDD by Ant 1+2+3+4					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	21.61	19.048	5170.476	Pass
CH44	5220	21.34	19.055	N/A	Pass
CH48	5240	21.34	19.063	5249.532	Pass
CH149	5745	29.04	19.160	N/A	Pass
CH157	5785	22.82	19.112	N/A	Pass
CH165	5825	22.36	19.141	N/A	Pass

Mode 8: Transmit by 802.11ax(40MHz) with CDD by Ant 1+2					
Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH38	5190	40.01	37.497	5171.252	Pass
CH46	5230	40.12	37.595	5248.798	Pass
CH151	5755	49.29	37.622	N/A	Pass
CH159	5795	49.69	37.705	N/A	Pass

Mode 8: Transmit by 802.11ax(40MHz) with CDD by Ant 1+2+3+4

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH38	5190	39.93	37.573	5171.214	Pass
CH46	5230	39.86	37.600	5248.800	Pass
CH151	5755	55.64	37.731	N/A	Pass
CH159	5795	58.90	37.863	N/A	Pass

Mode 9: Transmit by 802.11ax(80MHz) with CDD by Ant 1+2

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH42	5210	81.56	77.044	5171.478/5248.522	Pass
CH155	5775	113.7	77.401	N/A	Pass

Mode 9: Transmit by 802.11ax(80MHz) with CDD by Ant 1+2+3+4

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH42	5210	81.43	77.002	5171.499/5248.501	Pass
CH155	5775	81.86	77.087	N/A	Pass

Mode 1: Transmit by 802.11a with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	22.25	16.915	5171.543	Pass
CH44	5220	23.99	16.983	N/A	Pass
CH48	5240	23.77	16.903	5248.452	Pass
CH149	5745	28.46	17.570	N/A	Pass
CH157	5785	28.87	17.288	N/A	Pass
CH165	5825	29.30	18.046	N/A	Pass

Mode 1: Transmit by 802.11a with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	21.12	16.850	5171.575	Pass
CH44	5220	20.90	16.801	N/A	Pass
CH48	5240	21.31	16.833	5248.417	Pass
CH149	5745	28.05	16.969	N/A	Pass
CH157	5785	29.05	17.173	N/A	Pass
CH165	5825	29.15	17.225	N/A	Pass

Mode 2: Transmit by 802.11n(20MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	21.61	17.898	5171.051	Pass
CH44	5220	22.34	17.894	N/A	Pass
CH48	5240	21.74	17.937	5248.969	Pass
CH149	5745	24.75	18.081	N/A	Pass
CH157	5785	28.50	18.957	N/A	Pass
CH165	5825	24.98	18.131	N/A	Pass

Mode 2: Transmit by 802.11n(20MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	21.31	17.934	5171.033	Pass
CH44	5220	21.30	17.876	N/A	Pass
CH48	5240	21.68	17.925	5248.963	Pass
CH149	5745	24.32	18.028	N/A	Pass
CH157	5785	28.51	18.149	N/A	Pass
CH165	5825	24.25	18.003	N/A	Pass

Mode 3: Transmit by 802.11n(40MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH38	5190	39.68	36.336	5171.832	Pass
CH46	5230	39.71	36.313	5248.157	Pass
CH151	5755	55.85	36.812	N/A	Pass
CH159	5795	59.70	37.292	N/A	Pass

Mode 3: Transmit by 802.11n(40MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH38	5190	39.48	36.307	5171.847	Pass
CH46	5230	39.50	36.323	5248.162	Pass
CH151	5755	55.84	36.564	N/A	Pass
CH159	5795	60.00	37.025	N/A	Pass

Mode 4: Transmit by 802.11ac(20MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	21.41	17.939	5171.031	Pass
CH44	5220	21.96	17.936	N/A	Pass
CH48	5240	21.71	17.936	5248.968	Pass
CH149	5745	26.87	18.680	N/A	Pass
CH157	5785	27.25	18.542	N/A	Pass
CH165	5825	24.88	18.307	N/A	Pass

Mode 4: Transmit by 802.11ac(20MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	21.58	17.957	5171.022	Pass
CH44	5220	21.61	17.979	N/A	Pass
CH48	5240	21.57	17.933	5248.967	Pass
CH149	5745	26.14	18.045	N/A	Pass
CH157	5785	27.50	18.141	N/A	Pass
CH165	5825	24.83	18.123	N/A	Pass

Mode 5: Transmit by 802.11ac(40MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH38	5190	39.89	36.387	5171.807	Pass
CH46	5230	39.85	36.365	5248.183	Pass
CH151	5755	59.07	37.061	N/A	Pass
CH159	5795	59.78	36.983	N/A	Pass

Mode 5: Transmit by 802.11ac(40MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH38	5190	39.44	36.389	5171.806	Pass
CH46	5230	39.45	36.399	5248.200	Pass
CH151	5755	58.88	36.634	N/A	Pass
CH159	5795	59.82	36.941	N/A	Pass

Mode 6: Transmit by 802.11ac(80MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH42	5210	81.25	75.717	5172.142/5247.859	Pass
CH155	5775	80.96	75.625	N/A	Pass

Mode 6: Transmit by 802.11ac(80MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH42	5210	80.89	75.509	5172.246/5247.755	Pass
CH155	5775	81.32	75.829	N/A	Pass

Mode 7: Transmit by 802.11ax(20MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	21.18	19.074	5170.463	Pass
CH44	5220	22.33	19.105	N/A	Pass
CH48	5240	22.36	19.042	5249.521	Pass
CH149	5745	28.21	19.299	N/A	Pass
CH157	5785	26.49	19.294	N/A	Pass
CH165	5825	23.43	19.256	N/A	Pass

Mode 7: Transmit by 802.11ax(20MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH36	5180	21.42	19.046	5170.477	Pass
CH44	5220	21.46	19.168	N/A	Pass
CH48	5240	21.71	19.086	5249.543	Pass
CH149	5745	27.54	19.213	N/A	Pass
CH157	5785	26.29	19.133	N/A	Pass
CH165	5825	23.09	19.043	N/A	Pass

Mode 8: Transmit by 802.11ax(40MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH38	5190	39.88	37.552	5171.224	Pass
CH46	5230	40.01	37.569	5248.785	Pass
CH151	5755	52.41	37.748	N/A	Pass
CH159	5795	49.81	38.048	N/A	Pass

Mode 8: Transmit by 802.11ax(40MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH38	5190	40.01	37.676	5171.162	Pass
CH46	5230	39.85	37.622	5248.811	Pass
CH151	5755	52.90	37.776	N/A	Pass
CH159	5795	50.00	37.868	N/A	Pass


Mode 9: Transmit by 802.11ax(80MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH42	5210	81.63	77.056	5171.472/5248.528	Pass
CH155	5775	82.48	77.038	N/A	Pass

Mode 9: Transmit by 802.11ax(80MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Lower/Higher Frequency (MHz)	Result
		Ant1(Worst Data)	Ant1(Worst Data)	Ant1(Worst Data)	
CH42	5210	81.72	77.014	5171.493/5248.507	Pass
CH155	5775	82.51	77.222	N/A	Pass

The worst case of Occupied Bandwidth as below:

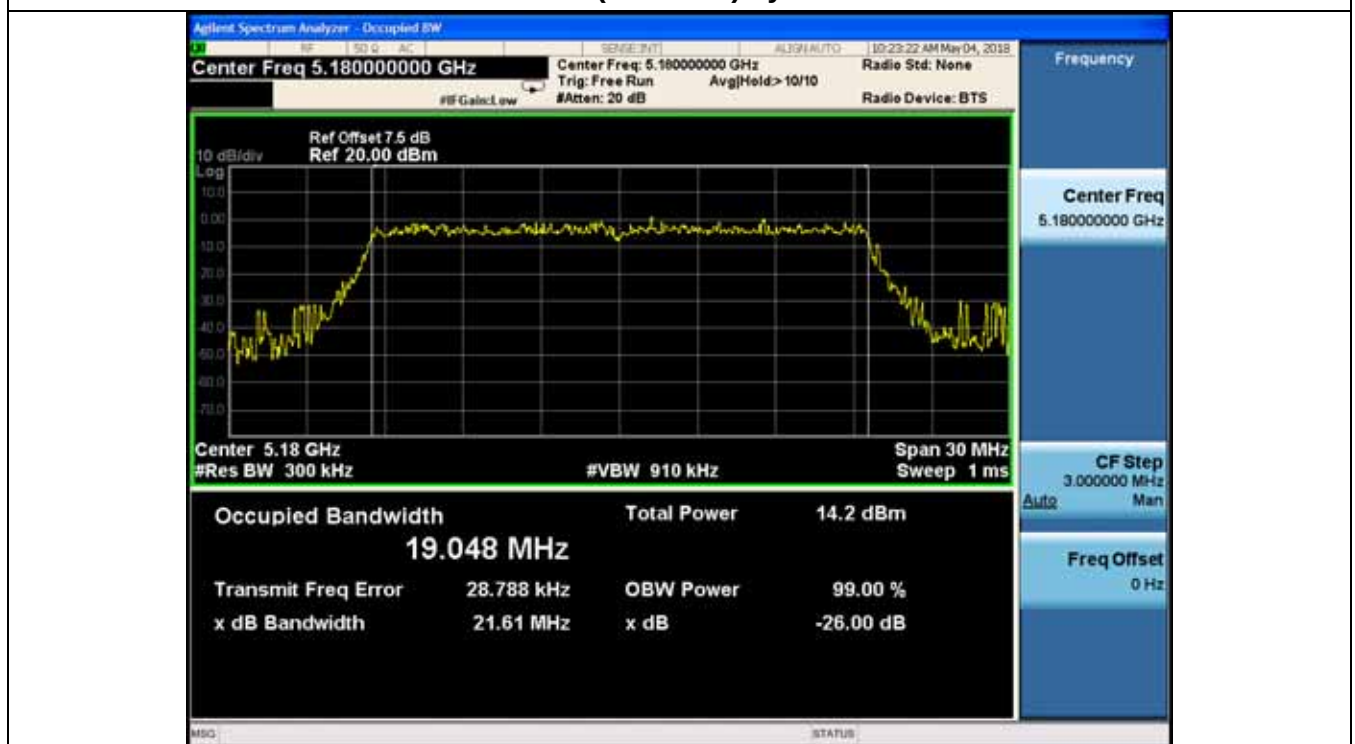Mode 7: CH36 (5180MHz) by Ant 1+2+3+4


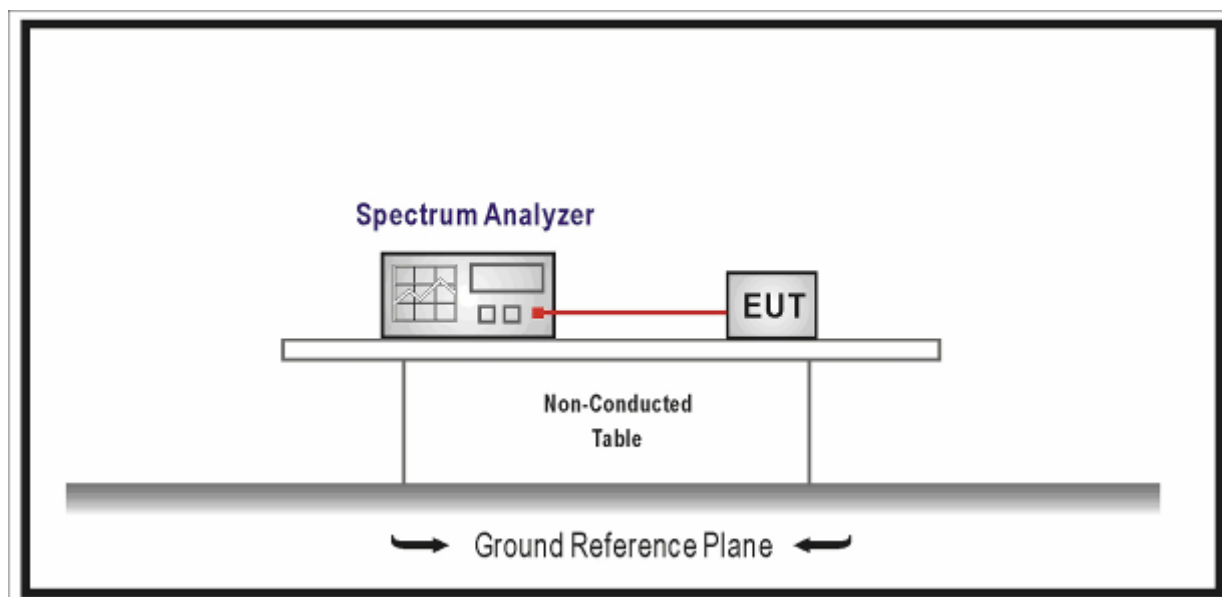
6. 6dB bandwidth

6.1. Test Equipment

6dB bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2019.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

6.2. Test Setup







6.3. Limit

>500kHz

6.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
☐	ANSI C63.10	12.4	Emission bandwidth and occupied bandwidth
	☐ ANSI C63.10	12.4.1	Emission bandwidth (26dB)
	☐ ANSI C63.10	12.4.2	Occupied bandwidth (99%)
☒	FCC KDB 789033 D02v02r01	C	Bandwidth Measurement
	☐ FCC KDB 789033 D02v02r01	C.1	Emission Bandwidth (26dB)
	☒ FCC KDB 789033 D02v02r01	C.2	Minimum Emission Bandwidth for the band 5.725-5.85 GHz (6dB)
☒	FCC KDB 789033 D02v02r01	D	99 Percent Occupied Bandwidth

6.5.EUT test Axis definition

Item	6dB bandwidth				
Device Category	☒	Indoor use			
	☐	Outdoor use			
	☐	Fix position use			
	☐	Client use			
Test mode	Mode 1-9				
Test method	☐	Radiated			
		X Axis	Y Axis	Z Axis	
					
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐	
	☒	Conducted			
	☐	Chain 1			
					
	☒	Chain 1	Chain 2		
					
	☐	Chain 1	Chain 2	Chain 3	
					
	☒	Chain 1	Chain 2	Chain 3	Chain 4
					

6.6. Test Result

Product Name	: Wireless Access Point	Power	: AC 120V/60Hz
Test Mode	: Mode 1~9	Test Site	: TR8
Test Date	: 2018.05.20	Test Engineer	: Damon

Mode 1: Transmit by 802.11a with CDD by Ant 1+2				
Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	16.37	>500	Pass
157	5785	16.54		Pass
165	5825	16.40		Pass
Mode 1: Transmit by 802.11a with CDD by Ant 1+2+3+4				
Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	16.36	>500	Pass
157	5785	16.40		Pass
165	5825	16.39		Pass
Mode 2: Transmit by 802.11n(20MHz) with CDD by Ant 1+2				
Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	17.61	>500	Pass
157	5785	17.63		Pass
165	5825	17.61		Pass
Mode 2: Transmit by 802.11n(20MHz) with CDD by Ant 1+2+3+4				
Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	17.61	>500	Pass
157	5785	17.58		Pass
165	5825	17.62		Pass

Mode 3: Transmit by 802.11n(40MHz) with CDD by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
151	5755	36.36	>500	Pass
159	5795	36.36		Pass

Mode 3: Transmit by 802.11n(40MHz) with CDD by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
151	5755	36.36	>500	Pass
159	5795	36.35		Pass

Mode 4: Transmit by 802.11ac(20MHz) with CDD by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	17.58	>500	Pass
157	5785	17.60		Pass
165	5825	17.60		Pass

Mode 4: Transmit by 802.11ac(20MHz) with CDD by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	17.59	>500	Pass
157	5785	17.78		Pass
165	5825	17.61		Pass

Mode 5: Transmit by 802.11ac(40MHz) with CDD by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
151	5755	36.39	>500	Pass
159	5795	36.38		Pass

Mode 5: Transmit by 802.11ac(40MHz) with CDD by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
151	5755	36.38	>500	Pass
159	5795	36.36		Pass

Mode 6: Transmit by 802.11ac(80MHz) with CDD by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
155	5775	76.17	>500	Pass

Mode 6: Transmit by 802.11ac(80MHz) with CDD by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
155	5775	76.45	>500	Pass

Mode 7: Transmit by 802.11ax(20MHz) with CDD by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	18.38	>500	Pass
157	5785	18.57		Pass
165	5825	18.76		Pass

Mode 7: Transmit by 802.11ax(20MHz) with CDD by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	18.92	>500	Pass
157	5785	18.56		Pass
165	5825	18.70		Pass

Mode 8: Transmit by 802.11ax(40MHz) with CDD by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
151	5755	37.26	>500	Pass
159	5795	37.33		Pass

Mode 8: Transmit by 802.11ax(40MHz) with CDD by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
151	5755	37.32	>500	Pass
159	5795	37.33		Pass

Mode 9: Transmit by 802.11ax(80MHz) with CDD by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
155	5775	76.41	>500	Pass

Mode 9: Transmit by 802.11ax(80MHz) with CDD by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
155	5775	76.96	>500	Pass

Mode 1: Transmit by 802.11a with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	16.38	>500	Pass
157	5785	16.37		Pass
165	5825	16.36		Pass

Mode 1: Transmit by 802.11a with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	16.40	>500	Pass
157	5785	16.38		Pass
165	5825	16.37		Pass

Mode 2: Transmit by 802.11n(20MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	17.61	>500	Pass
157	5785	17.64		Pass
165	5825	17.61		Pass

Mode 2: Transmit by 802.11n(20MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	17.63	>500	Pass
157	5785	17.63		Pass
165	5825	17.61		Pass

Mode 3: Transmit by 802.11n(40MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
151	5755	36.36	>500	Pass
159	5795	36.37		Pass

Mode 3: Transmit by 802.11n(40MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
151	5755	36.32	>500	Pass
159	5795	36.35		Pass

Mode 4: Transmit by 802.11ac(20MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	17.62	>500	Pass
157	5785	17.59		Pass
165	5825	17.61		Pass

Mode 4: Transmit by 802.11ac(20MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	17.62	>500	Pass
157	5785	17.61		Pass
165	5825	17.59		Pass

Mode 5: Transmit by 802.11ac(40MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
151	5755	36.11	>500	Pass
159	5795	36.38		Pass

Mode 5: Transmit by 802.11ac(40MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
151	5755	36.35	>500	Pass
159	5795	36.37		Pass

Mode 6: Transmit by 802.11ac(80MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
155	5775	75.76	>500	Pass

Mode 6: Transmit by 802.11ac(80MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
155	5775	75.53	>500	Pass

Mode 7: Transmit by 802.11ax(20MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	18.75	>500	Pass
157	5785	18.51		Pass
165	5825	18.78		Pass

Mode 7: Transmit by 802.11ax(20MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
149	5745	18.80	>500	Pass
157	5785	18.80		Pass
165	5825	18.77		Pass

Mode 8: Transmit by 802.11ax(40MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
151	5755	37.29	>500	Pass
159	5795	37.38		Pass

Mode 8: Transmit by 802.11ax(40MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
151	5755	37.30	>500	Pass
159	5795	36.77		Pass

Mode 9: Transmit by 802.11ax(80MHz) with Beam-forming by Ant 1+2

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
155	5775	75.69	>500	Pass

Mode 9: Transmit by 802.11ax(80MHz) with Beam-forming by Ant 1+2+3+4

Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
		Ant1(Worst Data)		
155	5775	76.40	>500	Pass

The worst case of 6dB Bandwidth as below:

Mode 1: CH157 (5785MHz) Ant 0+1+2+3


7. Power Output

7.1. Test Equipment

Power Output / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2018.01.04	2019.01.03
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2017.10.14	2018.10.13
Power Sensor	Anritsu	MA2411B	0846014	2017.10.14	2018.10.13
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2018.04.10	2019.04.09

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

7.2. Test Setup

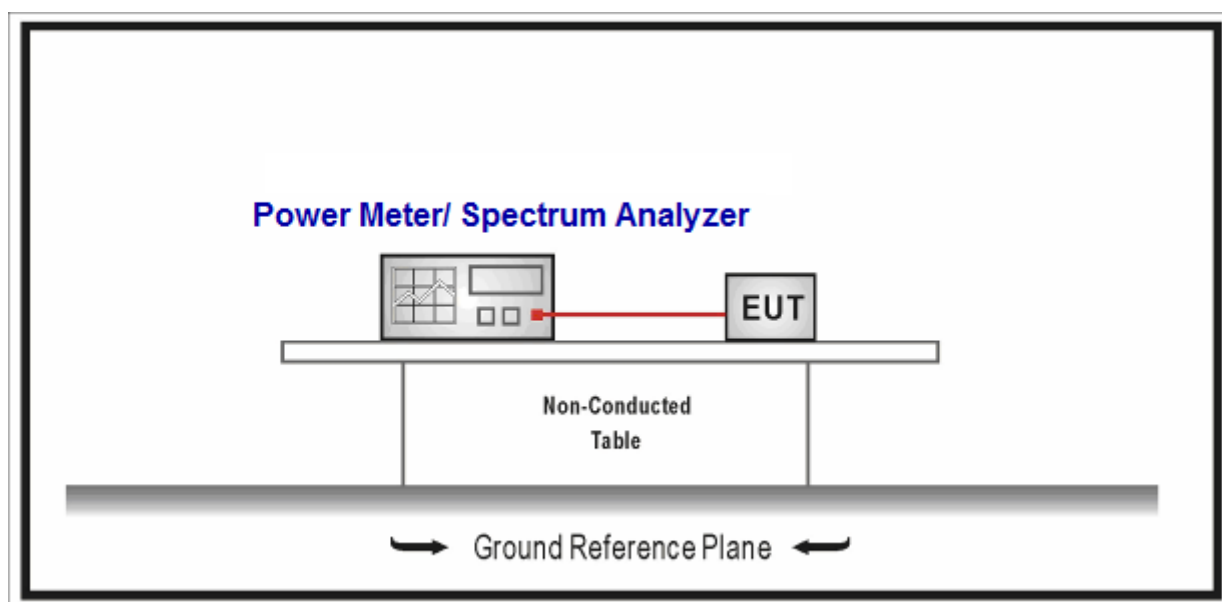

7.3. Limit




Fundamental emission output power Limit	
☒	For the band 5.15-5.25 GHz
☐	Outdoor access point: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$ and $\leq 125\text{mW}$ at any angle above 30 degrees
☒	Indoor access point: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$
☐	Fixed point-to-point access points: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 23\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 23)$
☐	Mobile and portable client devices: the maximum conducted output power shall not exceed 250mW. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 24 - (G_{TX} - 6)$
☐	For the band 5.25-5.35 GHz:
☐	The maximum conducted output power shall not exceed 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq (\text{The lesser of } 24 \text{ or } 11\text{dBm} + 10 \log B) - (G_{TX} - 6)$
☐	For the 5.47-5.725 GHz:
☐	The maximum conducted output power shall not exceed 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq (\text{The lesser of } 24 \text{ or } 11\text{dBm} + 10 \log B) - (G_{TX} - 6)$
☒	For the band 5.725-5.85 GHz:
☒	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6 \text{ dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$
☐	Point-to-point systems (P2P): the maximum conducted output power (P_{out}) shall not exceed the lesser of 1 W
Note 1 : G_{TX} directional gain of transmitting antennas.	
Note 2 : P_{out} is maximum peak conducted output power .	

7.4. Test Procedure

Fundamental emission output power Test Method				
	References Rule		Chapter	Description
☒	ANSI C63.10		12.3	Maximum conducted output power
	☒	ANSI C63.10	12.3.2	Maximum conducted output power measurement using a spectrum analyzer (SA) or EMI receiver
		☐ ANSI C63.10	12.3.2.2	Method SA-1
		☐ ANSI C63.10	12.3.2.3	Method SA-1A (alternative)
		☒ ANSI C63.10	12.3.2.4	Method SA-2
		☐ ANSI C63.10	12.3.2.5	Method SA-2A (alternative)
		☐ ANSI C63.10	12.3.2.6	Method SA-3
		☐ ANSI C63.10	12.3.2.7	Method SA-3A (alternative)
	☒	ANSI C63.10	12.3.3	Maximum conducted output power using a power meter
		☐ ANSI C63.10	12.3.3.1	Method PM
		☒ ANSI C63.10	12.3.3.2	Method PM-G

Directional Gain Calculations for In-Band test method				
	References Rule		Chapter	Description
☐	KDB 662911		F2)a)	Basic methodology
	☐	KDB 662911	F2)a) (i)	transmit signals are correlated
	☐	KDB 662911	F2)a) (ii)	transmit signals are uncorrelated
☐	KDB 662911		F2)b)	Sectorized antenna systems.
☐	KDB 662911		F2)c)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (i)	Cross-polarized antennas
	☐	ANSI C63.10	F2)c) (ii)	Multiple antennas
☒	KDB 662911		F2)e)	Spatial stream
	☒	KDB 662911	F2)e) (i)	Antennas have the same gain
	☐	KDB 662911	F2)e) (ii)	Antenna have the different gain with one spatial stream
	☐	KDB 662911	F2)e) (iii)	Antenna have the different gain with more than one spatial stream
☒	KDB 662911		F2)f)	Cyclic Delay Diversity (CDD)
	☒	KDB 662911	F2)f) (i)	Antennas have the same gain
	☐	KDB 662911	F2)f) (ii)	Antenna have the different gain with one spatial stream
	☐	KDB 662911	F2)f) (iii)	Antenna have the different gain with more than one spatial stream

7.5.EUT test Axis definition

Item	output power				
Device Category	☒	Indoor use			
	☐	Outdoor use			
	☐	Fix position use			
	☐	Client use			
Test mode	Mode 1-9				
Test method	☐	Radiated			
		X Axis	Y Axis	Z Axis	
					
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐	
	☒	Conducted			
	☐	Chain 1			
					
	☒	Chain 1	Chain 2		
					
	☐	Chain 1	Chain 2	Chain 3	
					
	☒	Chain 1	Chain 2	Chain 3	Chain 4
					

7.6. Test Result

Product Name	:	Wireless Access Point	Power	:	AC 120V/60Hz
Test Mode	:	Mode 1~9	Test Site	:	TR8
Test Date	:	2018.05.20	Test Engineer	:	Damon

ETH6:

Mode 1: Transmit by 802.11a with CDD by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH36	5180	18.24	18.11	21.19	30.00	Pass
CH44	5220	17.86	17.65	20.77	30.00	Pass
CH48	5240	18.01	18.32	21.18	30.00	Pass
CH149	5745	20.93	20.29	23.63	30.00	Pass
CH157	5785	20.44	20.38	23.42	30.00	Pass
CH165	5825	20.89	21.02	23.97	30.00	Pass

Mode 1: Transmit by 802.11a with CDD by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH36	5180	15.62	15.08	14.93	15.22	21.24	30.00	Pass
CH44	5220	15.28	14.67	15.32	14.97	21.09	30.00	Pass
CH48	5240	14.96	15.22	14.99	15.02	21.07	30.00	Pass
CH149	5745	18.85	18.40	18.77	18.37	24.62	30.00	Pass
CH157	5785	18.26	18.59	19.00	17.89	24.47	30.00	Pass
CH165	5825	17.81	18.64	18.64	18.34	24.39	30.00	Pass

Mode 1: Transmit by 802.11a with Beam-forming by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH36	5180	17.39	17.40	20.40	27.00	Pass
CH44	5220	17.45	17.14	20.31	27.00	Pass
CH48	5240	17.09	17.10	20.11	27.00	Pass
CH149	5745	20.03	19.64	22.85	27.00	Pass
CH157	5785	20.00	20.32	23.17	27.00	Pass
CH165	5825	19.21	19.67	22.46	27.00	Pass

Mode 1: Transmit by 802.11a with Beam-forming by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH36	5180	15.07	14.68	15.17	14.51	20.89	24.00	Pass
CH44	5220	14.67	14.44	14.80	14.95	20.74	24.00	Pass
CH48	5240	14.91	15.26	15.35	14.57	21.05	24.00	Pass
CH149	5745	17.77	17.89	18.44	17.68	23.98	24.00	Pass
CH157	5785	17.63	17.68	18.39	17.87	23.92	24.00	Pass
CH165	5825	17.43	17.78	17.93	17.84	23.77	24.00	Pass

Mode 2: Transmit by 802.11n(20MHz) with CDD by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH36	5180	18.30	17.80	21.07	30.00	Pass
CH44	5220	18.65	18.01	21.35	30.00	Pass
CH48	5240	18.15	18.13	21.15	30.00	Pass
CH149	5745	20.61	20.48	23.56	30.00	Pass
CH157	5785	20.44	20.56	23.51	30.00	Pass
CH165	5825	20.88	20.03	23.49	30.00	Pass

Mode 2: Transmit by 802.11n(20MHz) with CDD by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH36	5180	15.00	14.07	14.57	14.22	20.50	30.00	Pass
CH44	5220	15.25	14.37	14.72	14.84	20.83	30.00	Pass
CH48	5240	15.03	14.30	15.01	14.62	20.77	30.00	Pass
CH149	5745	17.98	18.03	17.90	17.56	23.89	30.00	Pass
CH157	5785	17.68	17.51	18.03	17.51	23.71	30.00	Pass
CH165	5825	18.35	18.35	18.27	17.11	24.07	30.00	Pass

Mode 2: Transmit by 802.11n(20MHz) with Beam-forming by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH36	5180	17.22	16.87	20.06	27.00	Pass
CH44	5220	17.96	17.35	20.68	27.00	Pass
CH48	5240	17.40	17.01	20.22	27.00	Pass
CH149	5745	19.71	20.04	22.89	27.00	Pass
CH157	5785	20.20	19.27	22.77	27.00	Pass
CH165	5825	19.46	19.00	22.25	27.00	Pass

Mode 2: Transmit by 802.11n(20MHz) with Beam-forming by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH36	5180	15.02	14.45	14.89	15.10	20.89	24.00	Pass
CH44	5220	14.95	14.74	15.25	15.31	21.09	24.00	Pass
CH48	5240	14.62	14.83	15.36	15.11	21.01	24.00	Pass
CH149	5745	17.81	17.66	17.81	17.26	23.66	24.00	Pass
CH157	5785	17.56	17.44	17.77	17.17	23.51	24.00	Pass
CH165	5825	17.86	17.74	17.86	17.26	23.71	24.00	Pass

Mode 3: Transmit by 802.11n(40MHz) with CDD by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH38	5190	16.85	16.96	19.92	30.00	Pass
CH46	5230	16.58	17.18	19.90	30.00	Pass
CH151	5755	20.19	20.19	23.20	30.00	Pass
CH159	5795	19.88	19.65	22.78	30.00	Pass

Mode 3: Transmit by 802.11n(40MHz) with CDD by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH38	5190	12.81	11.44	12.89	12.04	18.36	30.00	Pass
CH46	5230	12.75	11.96	12.35	11.87	18.27	30.00	Pass
CH151	5755	18.12	18.01	18.18	18.41	24.20	30.00	Pass
CH159	5795	19.29	18.76	19.84	18.87	25.23	30.00	Pass

Mode 3: Transmit by 802.11n(40MHz) with Beam-forming by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH38	5190	15.91	15.97	18.95	27.00	Pass
CH46	5230	15.71	15.38	18.56	27.00	Pass
CH151	5755	19.01	19.33	22.18	27.00	Pass
CH159	5795	18.74	18.52	21.64	27.00	Pass

Mode 3: Transmit by 802.11n(40MHz) with Beam-forming by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH38	5190	12.11	11.21	12.38	11.89	17.94	24.00	Pass
CH46	5230	11.80	11.25	11.46	11.24	17.46	24.00	Pass
CH151	5755	18.15	17.41	17.86	18.05	23.90	24.00	Pass
CH159	5795	17.80	17.68	18.26	18.09	23.98	24.00	Pass

Mode 4: Transmit by 802.11ac(20MHz) with CDD by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH36	5180	18.51	18.44	21.49	30.00	Pass
CH44	5220	17.91	18.21	21.07	30.00	Pass
CH48	5240	18.35	18.39	21.38	30.00	Pass
CH149	5745	20.15	20.60	23.39	30.00	Pass
CH157	5785	20.35	21.13	23.77	30.00	Pass
CH165	5825	20.99	20.99	24.00	30.00	Pass

Mode 4: Transmit by 802.11ac(20MHz) with CDD by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH36	5180	14.98	14.22	14.77	14.50	20.65	30.00	Pass
CH44	5220	14.24	14.05	14.69	14.74	20.46	30.00	Pass
CH48	5240	14.76	13.86	14.72	14.67	20.54	30.00	Pass
CH149	5745	17.61	17.73	17.75	17.99	23.79	30.00	Pass
CH157	5785	18.09	17.89	17.99	17.49	23.89	30.00	Pass
CH165	5825	18.23	17.73	18.06	17.33	23.87	30.00	Pass

Mode 4: Transmit by 802.11ac(20MHz) with Beam-forming by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH36	5180	16.84	16.75	19.81	27.00	Pass
CH44	5220	17.43	17.56	20.51	27.00	Pass
CH48	5240	17.62	17.37	20.51	27.00	Pass
CH149	5745	19.09	20.17	22.67	27.00	Pass
CH157	5785	19.23	20.30	22.81	27.00	Pass
CH165	5825	19.84	20.02	22.94	27.00	Pass

Mode 4: Transmit by 802.11ac(20MHz) with Beam-forming by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH36	5180	15.31	14.11	14.85	14.50	20.74	24.00	Pass
CH44	5220	14.84	14.00	14.78	14.85	20.65	24.00	Pass
CH48	5240	14.51	14.58	14.43	15.25	20.73	24.00	Pass
CH149	5745	17.32	17.32	18.03	18.08	23.72	24.00	Pass
CH157	5785	17.74	17.97	17.21	17.25	23.58	24.00	Pass
CH165	5825	18.19	17.80	18.06	17.15	23.84	24.00	Pass

Mode 5: Transmit by 802.11ac(40MHz) with CDD by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH38	5190	16.68	16.33	19.52	30.00	Pass
CH46	5230	17.32	17.01	20.18	30.00	Pass
CH151	5755	20.28	20.96	23.64	30.00	Pass
CH159	5795	20.70	21.06	23.89	30.00	Pass

Mode 5: Transmit by 802.11ac(40MHz) with CDD by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH38	5190	12.67	11.53	12.47	12.19	18.26	30.00	Pass
CH46	5230	12.35	11.69	12.98	12.24	18.36	30.00	Pass
CH151	5755	18.64	17.78	18.98	18.73	24.58	30.00	Pass
CH159	5795	19.80	19.63	20.49	19.41	25.87	30.00	Pass

Mode 5: Transmit by 802.11ac(40MHz) with Beam-forming by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH38	5190	15.69	15.21	18.47	27.00	Pass
CH46	5230	15.75	15.48	18.63	27.00	Pass
CH151	5755	19.05	19.60	22.34	27.00	Pass
CH159	5795	19.39	19.45	22.43	27.00	Pass

Mode 5: Transmit by 802.11ac(40MHz) with Beam-forming by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH38	5190	11.75	10.63	11.21	11.57	17.33	24.00	Pass
CH46	5230	11.49	10.64	11.96	11.09	17.34	24.00	Pass
CH151	5755	17.65	17.82	17.98	18.02	23.89	24.00	Pass
CH159	5795	17.57	17.89	18.14	18.06	23.94	24.00	Pass

Mode 6: Transmit by 802.11ac(80MHz) with CDD by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH42	5210	16.22	16.29	19.27	30.00	Pass
CH155	5775	18.49	18.33	21.42	30.00	Pass

Mode 6: Transmit by 802.11ac(80MHz) with CDD by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH42	5210	11.34	11.38	11.72	10.33	17.24	30.00	Pass
CH155	5775	14.52	13.58	14.60	13.53	20.11	30.00	Pass

Mode 6: Transmit by 802.11ac(80MHz) with Beam-forming by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH42	5210	15.83	14.76	18.34	27.00	Pass
CH155	5775	18.22	16.90	20.62	27.00	Pass

Mode 6: Transmit by 802.11ac(80MHz) with Beam-forming by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH42	5210	11.95	11.73	11.20	11.21	17.56	24.00	Pass
CH155	5775	14.64	14.39	14.59	14.24	20.49	24.00	Pass

Mode 7: Transmit by 802.11ax(20MHz) with CDD by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH36	5180	18.16	17.86	21.02	30.00	Pass
CH44	5220	18.11	17.95	21.04	30.00	Pass
CH48	5240	18.56	17.56	21.10	30.00	Pass
CH149	5745	20.65	20.39	23.53	30.00	Pass
CH157	5785	20.74	20.54	23.65	30.00	Pass
CH165	5825	20.37	20.44	23.42	30.00	Pass

Mode 7: Transmit by 802.11ax(20MHz) with CDD by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH36	5180	14.22	14.02	14.89	14.00	20.32	30.00	Pass
CH44	5220	14.25	13.88	14.44	14.05	20.18	30.00	Pass
CH48	5240	13.88	14.21	14.31	15.11	20.42	30.00	Pass
CH149	5745	18.36	17.98	18.18	18.41	24.26	30.00	Pass
CH157	5785	17.64	17.21	17.46	17.03	23.36	30.00	Pass
CH165	5825	16.75	16.58	17.26	16.64	22.84	30.00	Pass

Mode 7: Transmit by 802.11ax(20MHz) with Beam-forming by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH36	5180	16.78	16.12	19.47	27.00	Pass
CH44	5220	17.79	16.47	20.19	27.00	Pass
CH48	5240	17.15	16.70	19.94	27.00	Pass
CH149	5745	19.61	19.71	22.67	27.00	Pass
CH157	5785	19.53	19.27	22.41	27.00	Pass
CH165	5825	19.07	19.90	22.52	27.00	Pass

Mode 7: Transmit by 802.11ax(20MHz) with Beam-forming by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH36	5180	14.50	14.70	14.49	14.12	20.48	24.00	Pass
CH44	5220	14.67	14.22	14.49	14.56	20.51	24.00	Pass
CH48	5240	13.87	13.69	14.42	14.57	20.17	24.00	Pass
CH149	5745	17.77	17.87	17.99	18.02	23.93	24.00	Pass
CH157	5785	17.67	17.39	17.63	17.22	23.50	24.00	Pass
CH165	5825	17.16	16.67	17.46	17.08	23.12	24.00	Pass

Mode 8: Transmit by 802.11ax(40MHz) with CDD by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH38	5190	16.30	16.30	19.31	30.00	Pass
CH46	5230	16.97	16.76	19.88	30.00	Pass
CH151	5755	20.75	19.97	23.39	30.00	Pass
CH159	5795	20.03	19.74	22.90	30.00	Pass

Mode 8: Transmit by 802.11ax(40MHz) with CDD by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH38	5190	12.34	11.50	12.54	12.35	18.22	30.00	Pass
CH46	5230	11.73	11.56	11.87	12.42	17.93	30.00	Pass
CH151	5755	17.87	18.10	19.14	18.12	24.36	30.00	Pass
CH159	5795	18.38	18.57	19.59	18.23	24.75	30.00	Pass

Mode 8: Transmit by 802.11ax(40MHz) with Beam-forming by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH38	5190	15.77	15.20	18.50	27.00	Pass
CH46	5230	15.55	15.31	18.44	27.00	Pass
CH151	5755	19.56	18.31	21.99	27.00	Pass
CH159	5795	19.53	18.49	22.05	27.00	Pass

Mode 8: Transmit by 802.11ax(40MHz) with Beam-forming by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH38	5190	11.19	10.85	11.88	11.26	17.33	24.00	Pass
CH46	5230	11.13	10.35	11.24	11.73	17.16	24.00	Pass
CH151	5755	18.10	17.42	18.07	17.52	23.81	24.00	Pass
CH159	5795	18.03	18.11	17.62	18.02	23.97	24.00	Pass

Mode 9: Transmit by 802.11ax(80MHz) with CDD by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH42	5210	17.01	16.92	19.98	30.00	Pass
CH155	5775	18.73	18.40	21.58	30.00	Pass

Mode 9: Transmit by 802.11ax(80MHz) with CDD by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH42	5210	11.07	11.10	11.80	11.47	17.39	30.00	Pass
CH155	5775	14.55	13.96	13.61	13.68	19.99	30.00	Pass

Mode 9: Transmit by 802.11ax(80MHz) with Beam-forming by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH42	5210	15.19	16.04	18.65	27.00	Pass
CH155	5775	18.12	17.36	20.77	27.00	Pass

Mode 9: Transmit by 802.11ax(80MHz) with Beam-forming by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH42	5210	10.74	10.74	11.15	10.69	16.85	24.00	Pass
CH155	5775	14.70	14.36	14.65	13.97	20.45	24.00	Pass

ETH7:

Mode 1: Transmit by 802.11a with CDD by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH36	5180	18.13	17.92	21.04	30.00	Pass
CH44	5220	17.64	17.47	20.57	30.00	Pass
CH48	5240	17.78	18.17	20.99	30.00	Pass

Mode 1: Transmit by 802.11a with CDD by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH36	5180	15.51	14.94	14.69	15.00	21.07	30.00	Pass
CH44	5220	15.19	14.43	15.10	14.78	20.91	30.00	Pass
CH48	5240	14.88	15.00	14.80	14.87	20.91	30.00	Pass

Mode 1: Transmit by 802.11a with Beam-forming by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH36	5180	17.20	17.17	20.19	27.00	Pass
CH44	5220	17.23	16.96	20.11	27.00	Pass
CH48	5240	16.91	16.91	19.92	27.00	Pass

Mode 1: Transmit by 802.11a with Beam-forming by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH36	5180	15.00	14.47	15.02	14.28	20.73	24.00	Pass
CH44	5220	14.54	14.29	14.63	14.82	20.59	24.00	Pass
CH48	5240	14.80	15.09	15.17	14.43	20.90	24.00	Pass

Mode 2: Transmit by 802.11n(20MHz) with CDD by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH36	5180	18.19	17.66	20.94	30.00	Pass
CH44	5220	18.42	17.86	21.16	30.00	Pass
CH48	5240	17.90	18.02	20.97	30.00	Pass

Mode 2: Transmit by 802.11n(20MHz) with CDD by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH36	5180	14.78	13.93	14.35	14.08	20.32	30.00	Pass
CH44	5220	15.06	14.15	14.53	14.62	20.62	30.00	Pass
CH48	5240	14.88	14.11	14.82	14.43	20.59	30.00	Pass

Mode 2: Transmit by 802.11n(20MHz) with Beam-forming by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH36	5180	17.09	16.72	19.92	27.00	Pass
CH44	5220	17.81	17.19	20.53	27.00	Pass
CH48	5240	17.24	16.84	20.05	27.00	Pass

Mode 2: Transmit by 802.11n(20MHz) with Beam-forming by Ant 1+2+3+4								
Channel No.	Frequency (MHz)	Measurement Power(dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3	Ant4			
CH36	5180	14.87	14.22	14.76	14.87	14.87	24.00	Pass
CH44	5220	14.78	14.61	15.11	15.10	14.78	24.00	Pass
CH48	5240	14.44	14.69	15.21	14.96	14.44	24.00	Pass

Mode 3: Transmit by 802.11n(40MHz) with CDD by Ant 1+2						
Channel No.	Frequency (MHz)	Measurement Power(dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant1	Ant2			
CH38	5190	16.70	16.81	19.77	30.00	Pass
CH46	5230	16.35	17.07	19.74	30.00	Pass