


Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

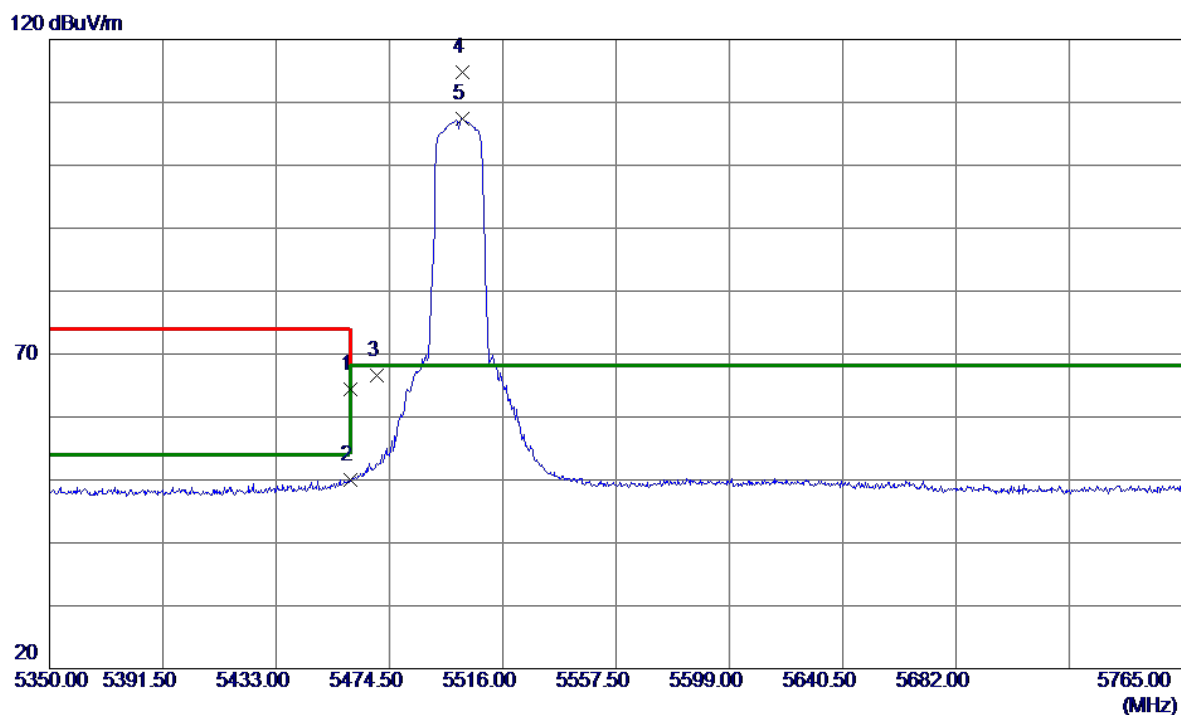


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	26.36	38.12	64.48	74.00	-9.52	Peak	
2	5460.0000	11.80	38.12	49.92	54.00	-4.08	AVG	
3	5470.0000	28.40	38.15	66.55	68.20	-1.65	Peak	
4 *	5501.0600	76.49	38.24	114.73	68.20	46.53	Peak	No limit
5	5501.0600	69.11	38.24	107.35	68.20	39.15	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

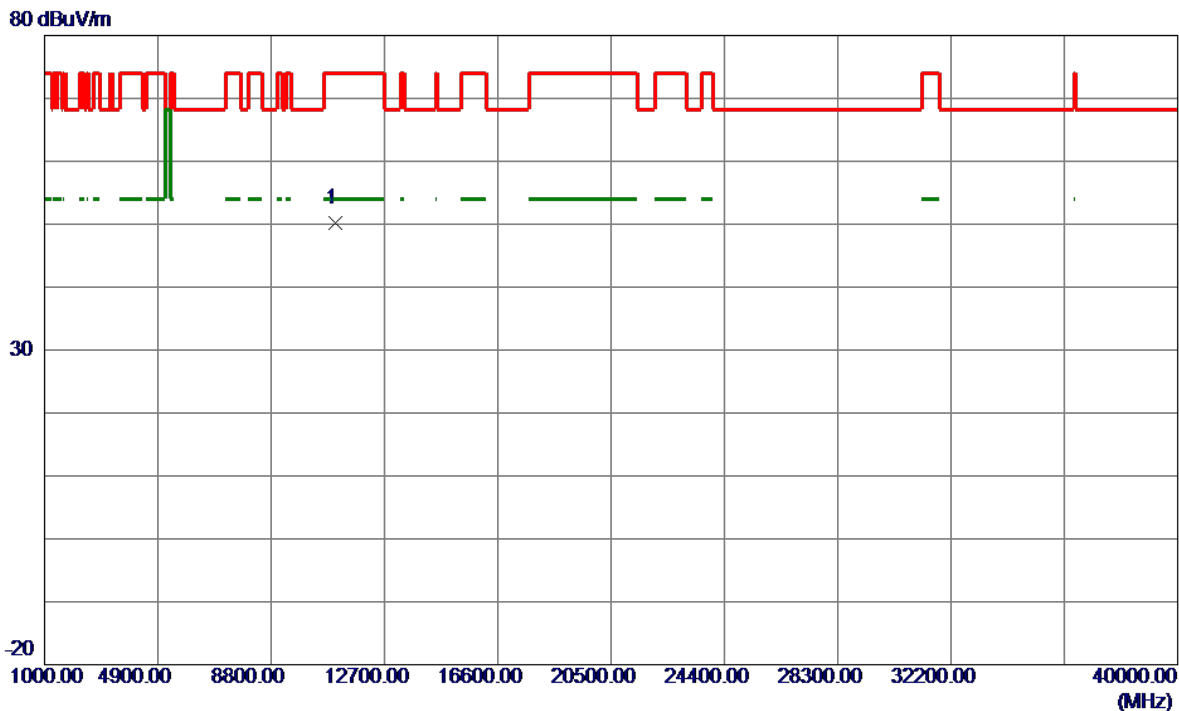


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10995.7000	47.85	2.33	50.18	74.00	-23.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

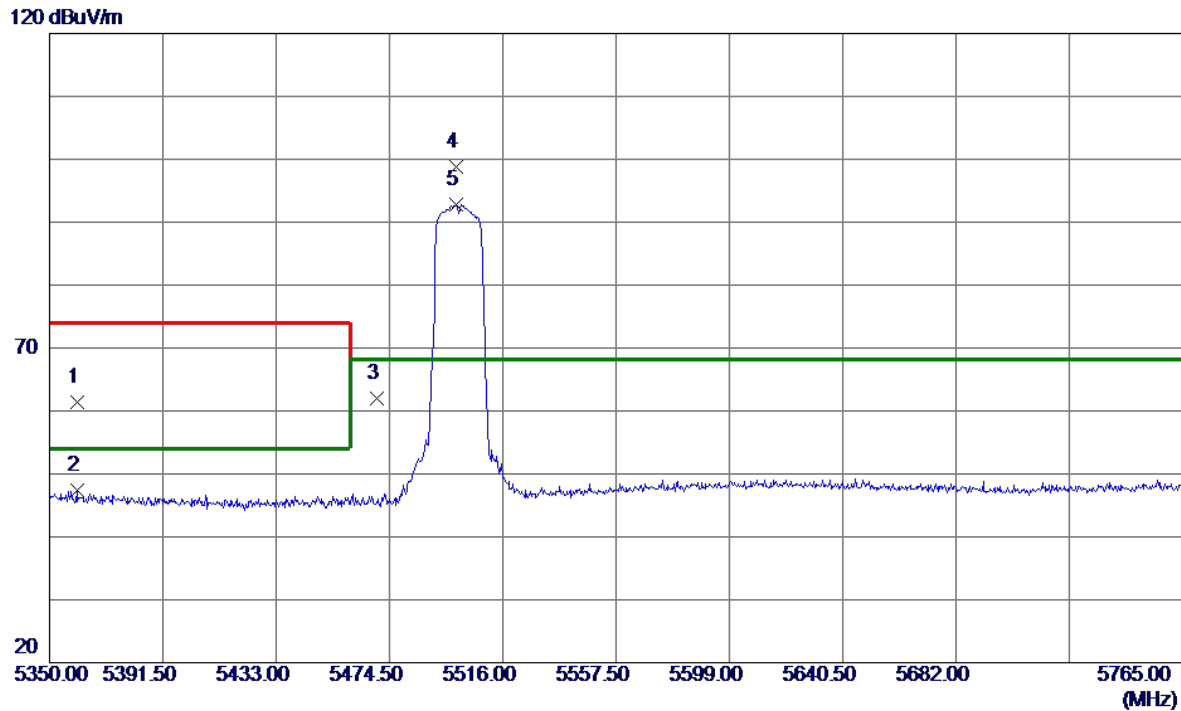


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5360.1669	23.61	37.78	61.39	74.00	-12.61	Peak	
2	5360.1669	9.55	37.78	47.33	54.00	-6.67	AVG	
3	5470.0000	23.90	38.15	62.05	68.20	-6.15	Peak	
4 *	5498.9850	60.57	38.24	98.81	68.20	30.61	Peak	No limit
5	5498.9850	54.55	38.24	92.79	68.20	24.59	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

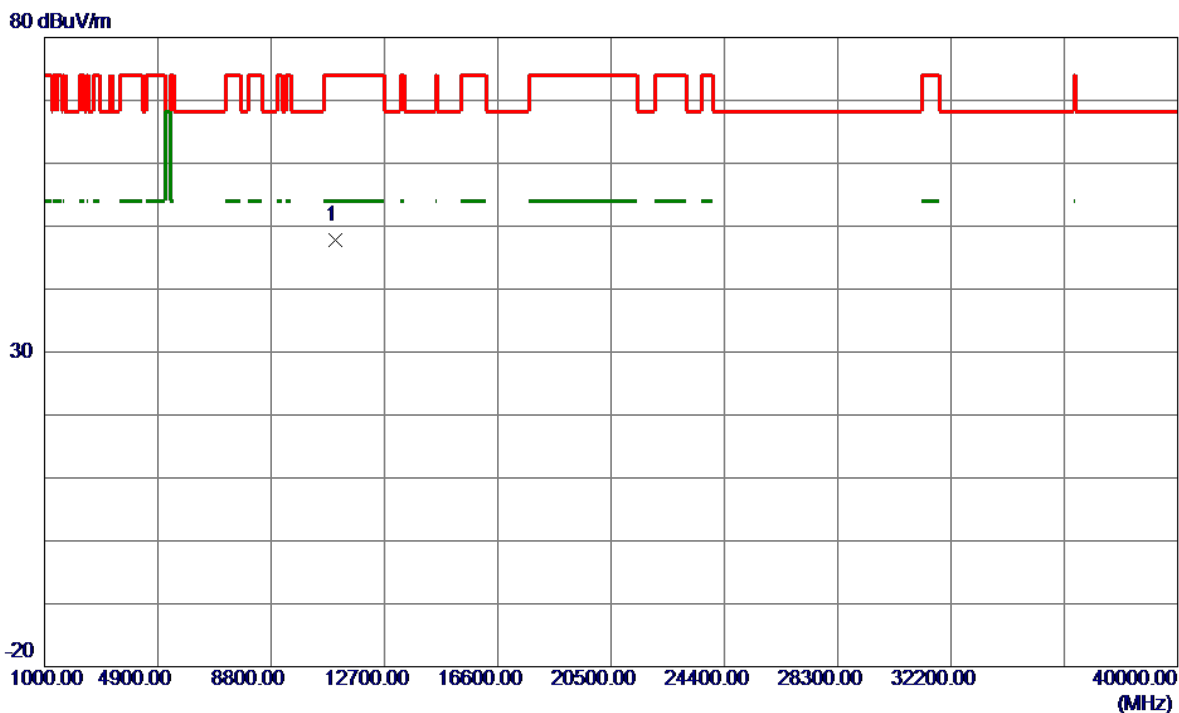


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11000.0000	45.39	2.34	47.73	74.00	-26.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

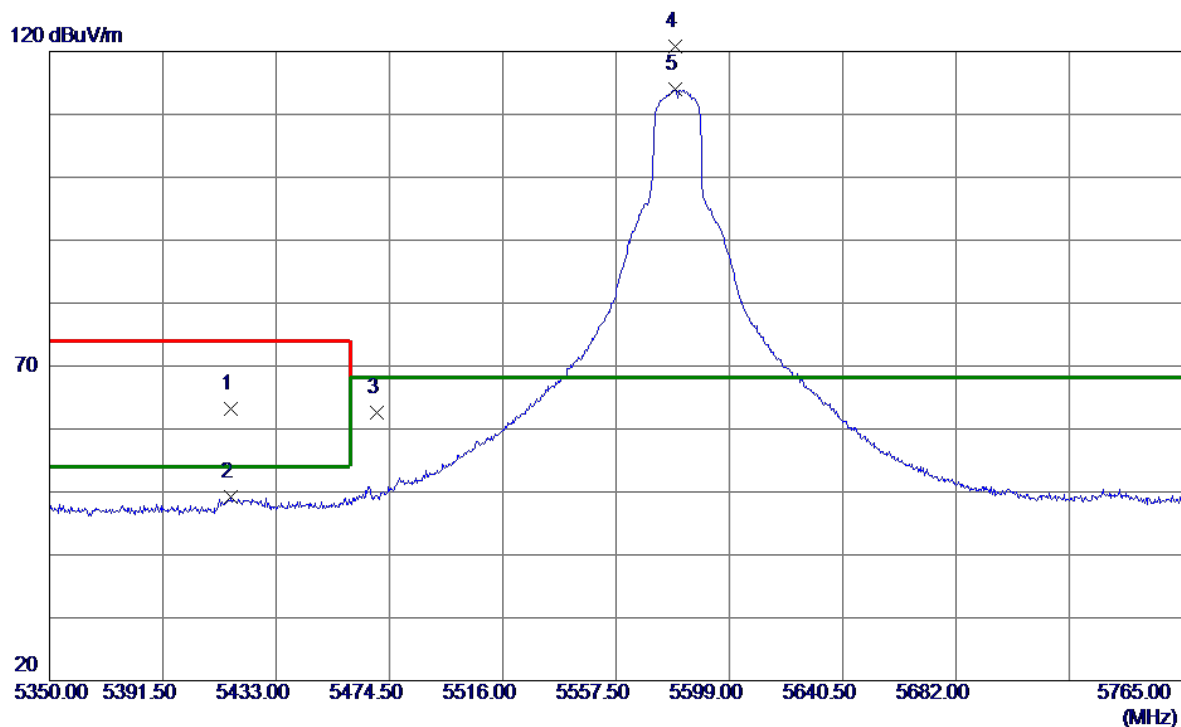


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5416.4000	25.26	37.99	63.25	74.00	-10.75	Peak	
2	5416.4000	11.14	37.99	49.13	54.00	-4.87	AVG	
3	5470.0000	24.46	38.15	62.61	68.20	-5.59	Peak	
4 *	5579.0800	82.45	38.32	120.77	68.20	52.57	Peak	No limit
5	5579.0800	75.64	38.32	113.96	68.20	45.76	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

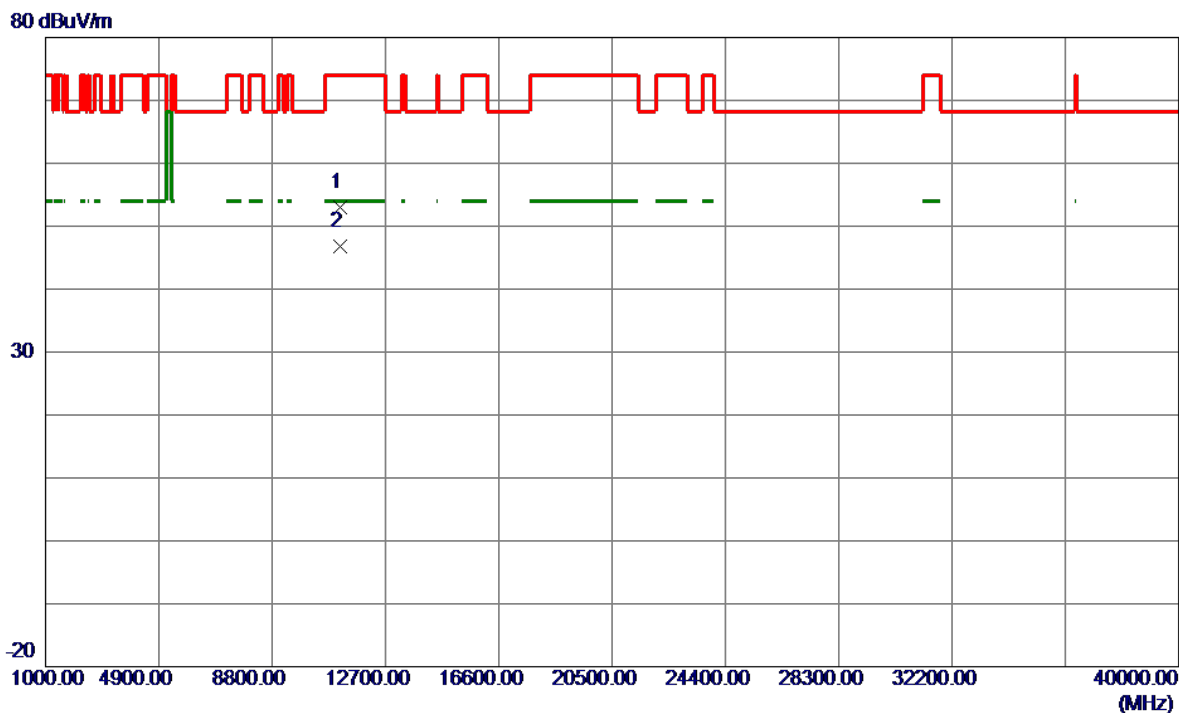


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11155.6000	51.03	2.04	53.07	74.00	-20.93	Peak	
2 *	11157.2619	44.85	2.04	46.89	54.00	-7.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

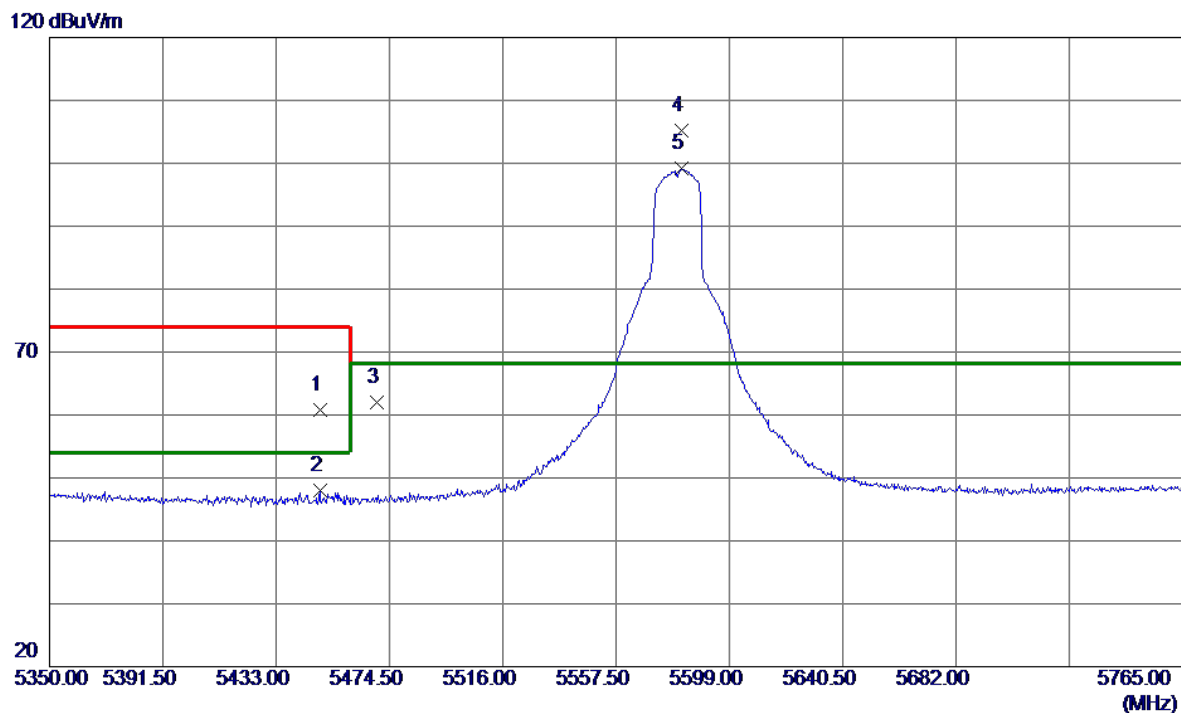


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5448.9770	22.66	38.09	60.75	74.00	-13.25	Peak	
2	5448.9770	9.98	38.09	48.07	54.00	-5.93	AVG	
3	5470.0000	23.82	38.15	61.97	68.20	-6.23	Peak	
4 *	5581.3630	66.81	38.32	105.13	68.20	36.93	Peak	No limit
5	5581.3630	60.80	38.32	99.12	68.20	30.92	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

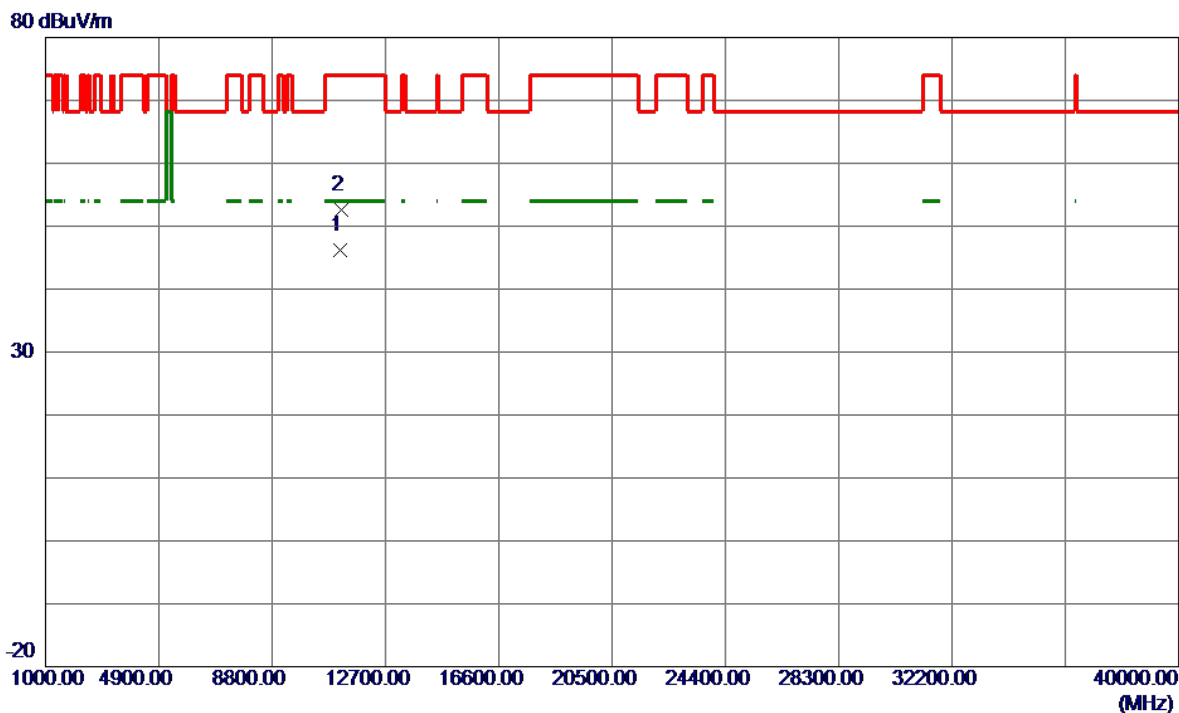


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11161.0990	44.24	2.03	46.27	54.00	-7.73	AVG	
2	11163.4000	50.51	2.03	52.54	74.00	-21.46	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

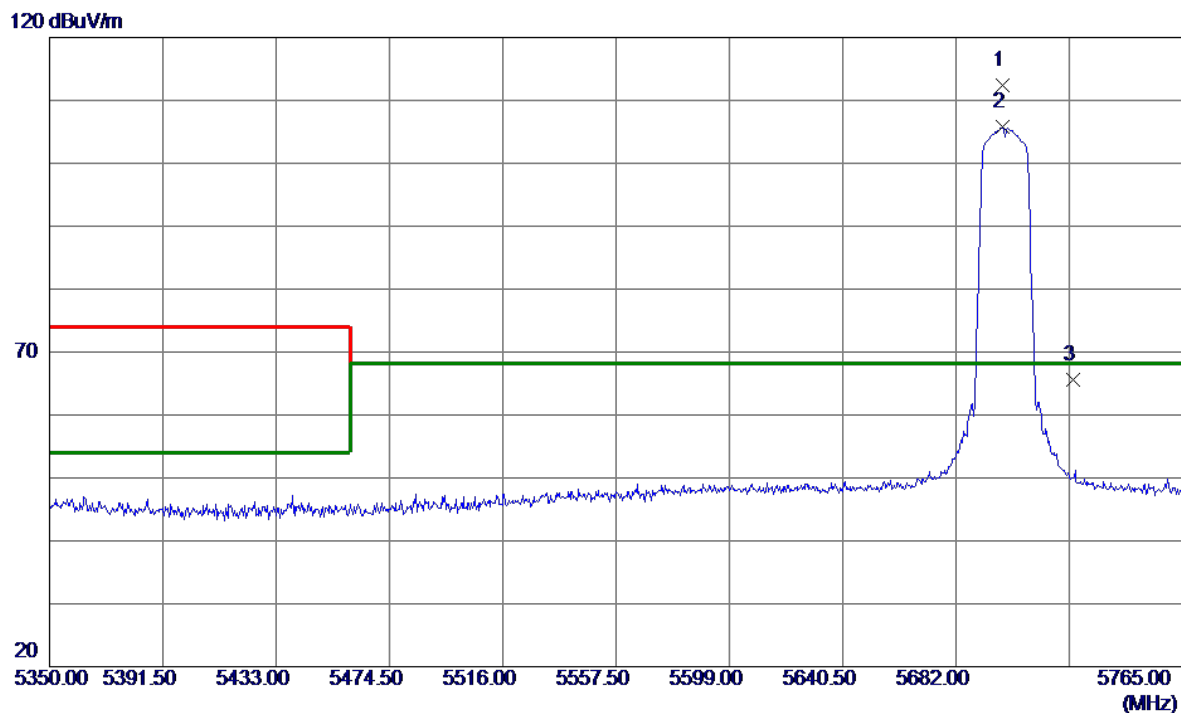


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5699.0150	73.98	38.40	112.38	68.20	44.18	Peak	No limit
2	5699.0150	67.33	38.40	105.73	68.20	37.53	AVG	No limit
3	5725.0000	27.12	38.50	65.62	68.20	-2.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

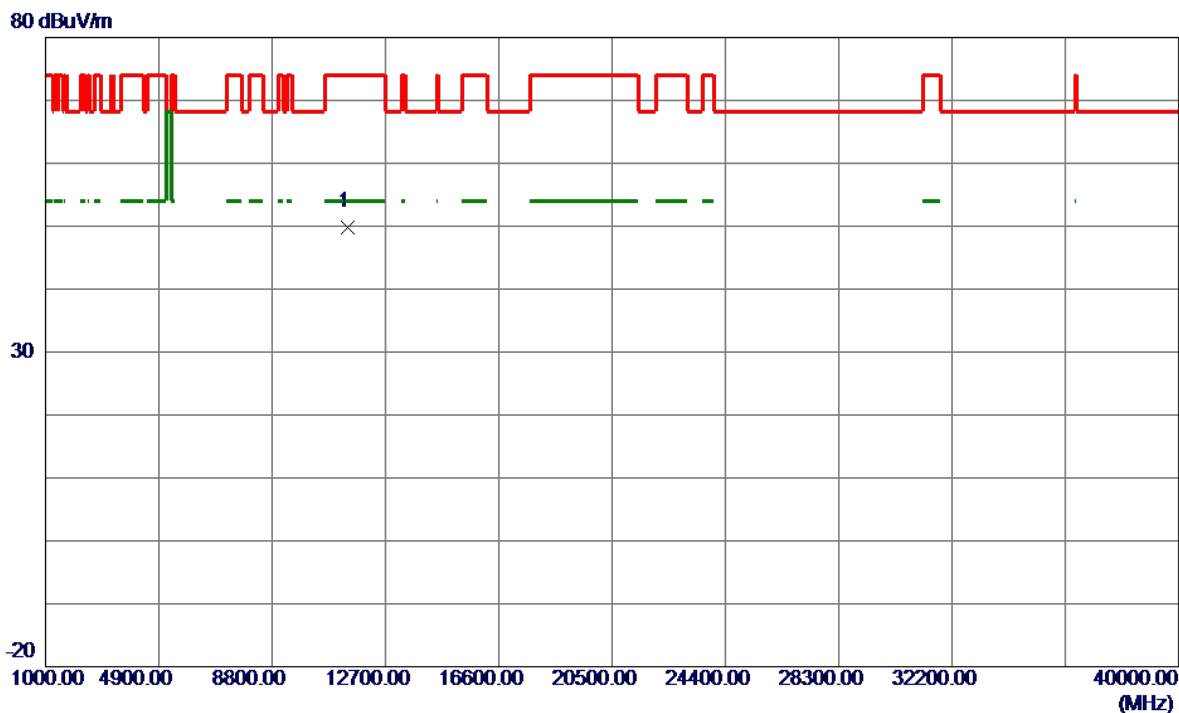


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11395.4500	47.77	2.13	49.90	74.00	-24.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

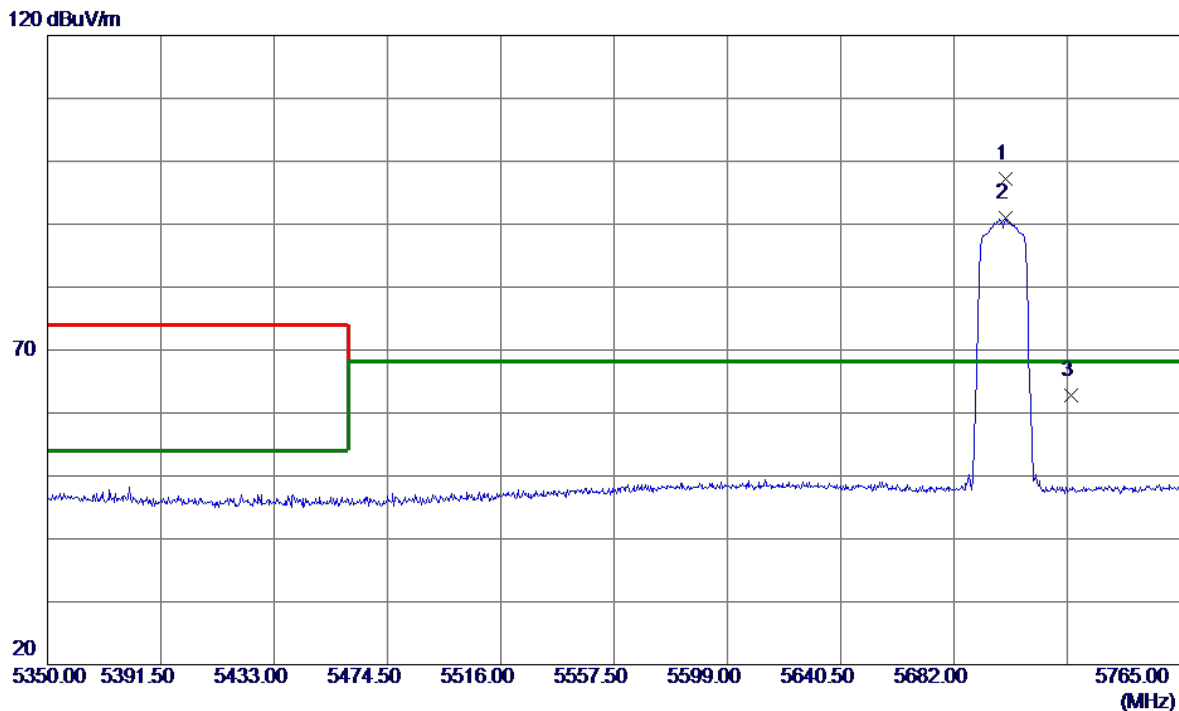


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5701.0900	58.70	38.41	97.11	68.20	28.91	Peak	No limit
2	5701.0900	52.60	38.41	91.01	68.20	22.81	AVG	No limit
3	5725.0000	24.26	38.50	62.76	68.20	-5.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

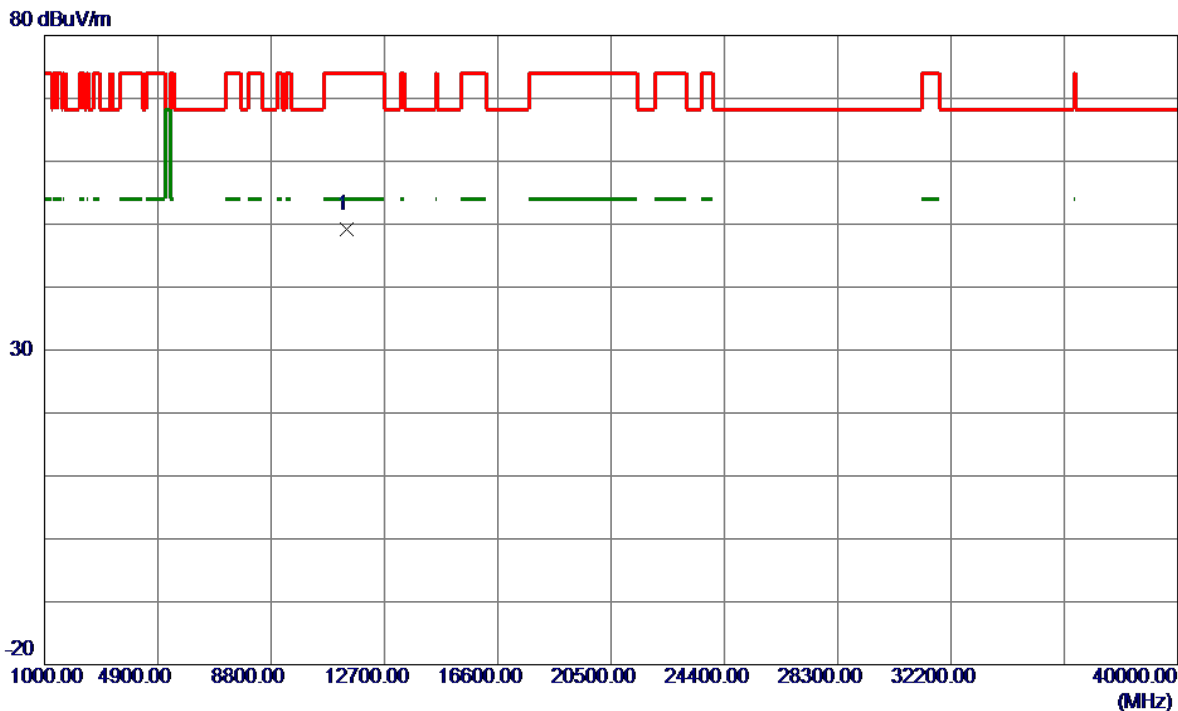


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.0000	47.09	2.13	49.22	74.00	-24.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

120 dBuV/m

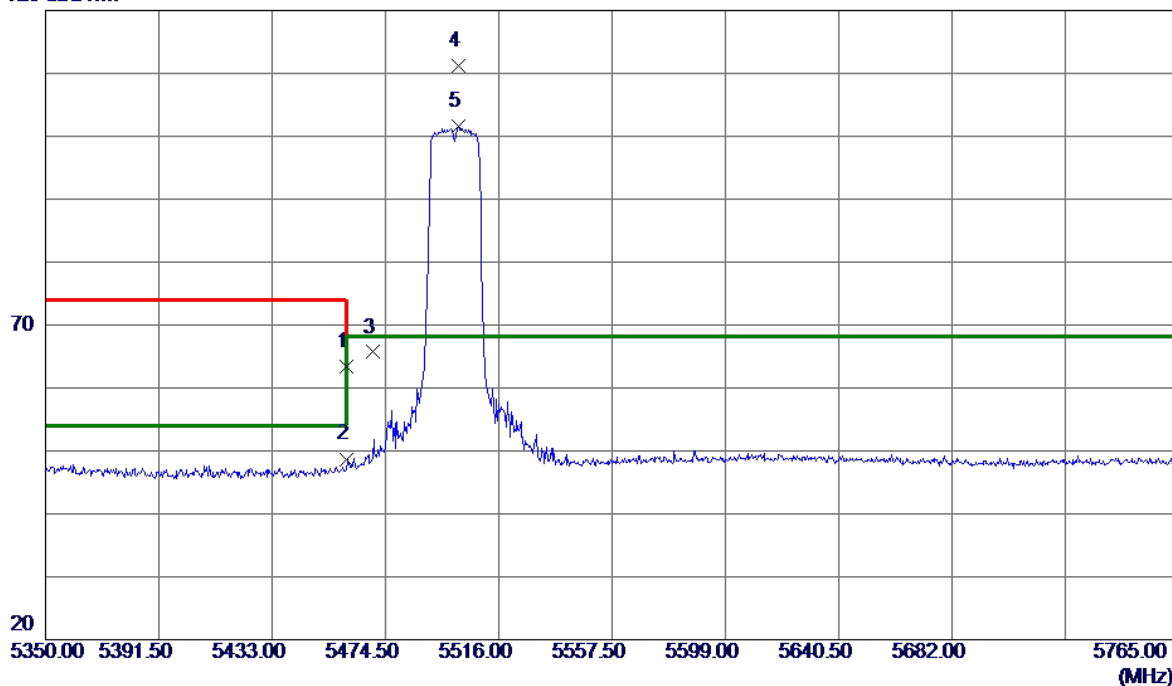


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	25.30	38.12	63.42	74.00	-10.58	Peak	
2	5460.0000	10.58	38.12	48.70	54.00	-5.30	AVG	
3	5470.0000	27.55	38.15	65.70	68.20	-2.50	Peak	
4 *	5501.0600	72.96	38.24	111.20	68.20	43.00	Peak	No limit
5	5501.0600	63.37	38.24	101.61	68.20	33.41	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

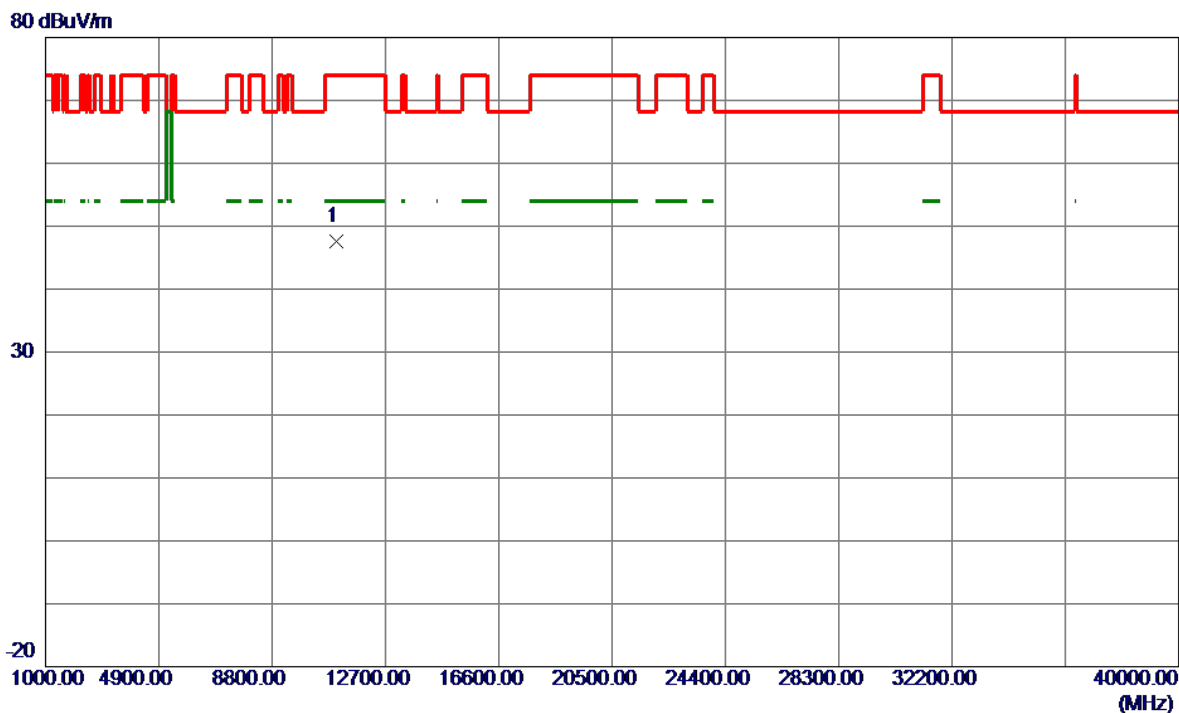


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11000.0000	45.35	2.34	47.69	74.00	-26.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

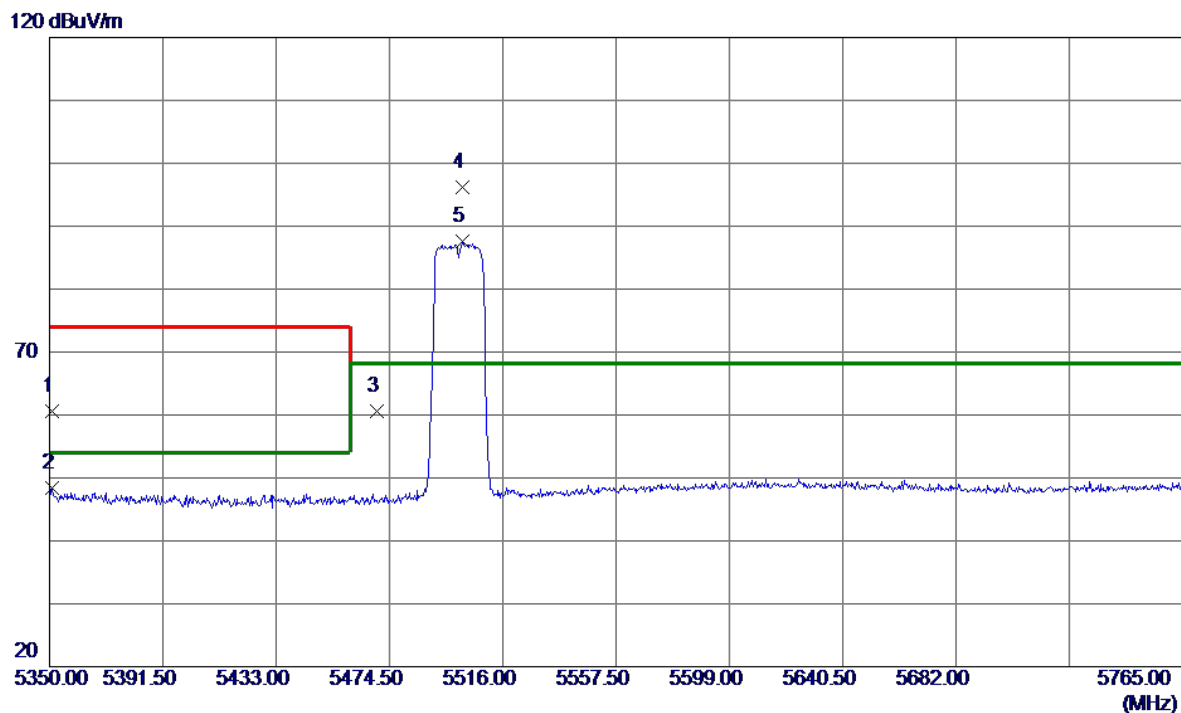


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5350.8300	22.80	37.74	60.54	74.00	-13.46	Peak	
2	5350.8300	10.64	37.74	48.38	54.00	-5.62	AVG	
3	5470.0000	22.52	38.15	60.67	68.20	-7.53	Peak	
4 *	5501.2670	57.96	38.24	96.20	68.20	28.00	Peak	No limit
5	5501.2670	49.36	38.24	87.60	68.20	19.40	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

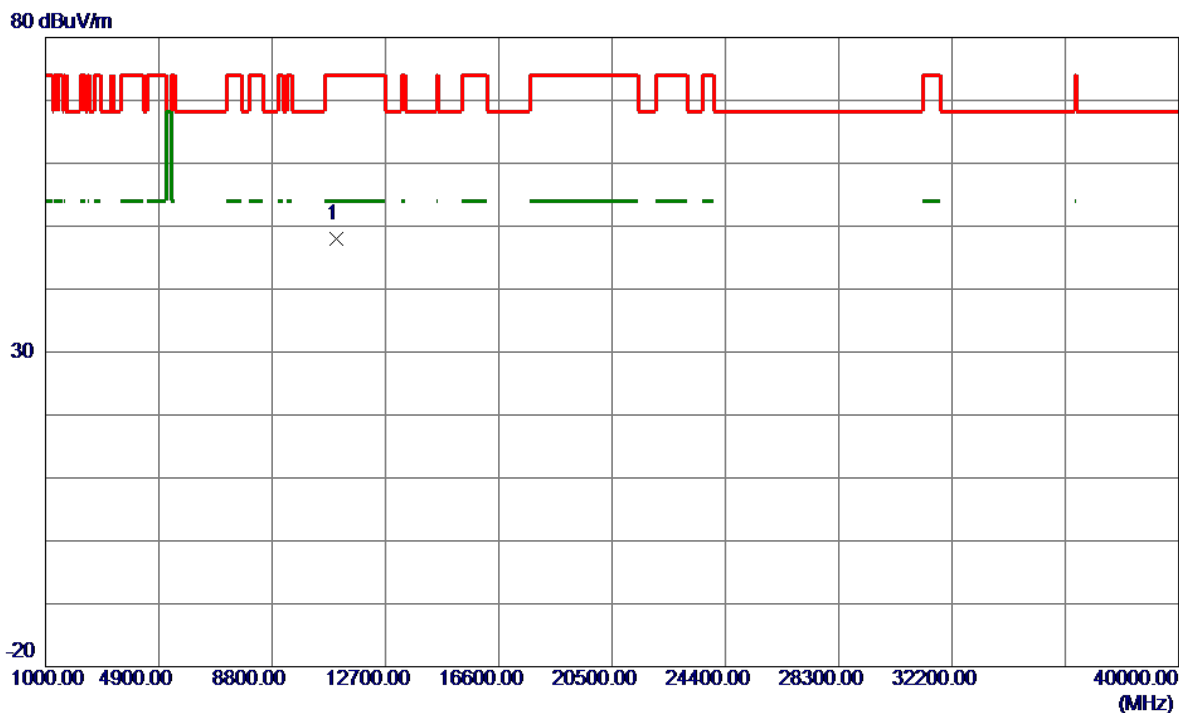


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11000.0000	45.69	2.34	48.03	74.00	-25.97	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

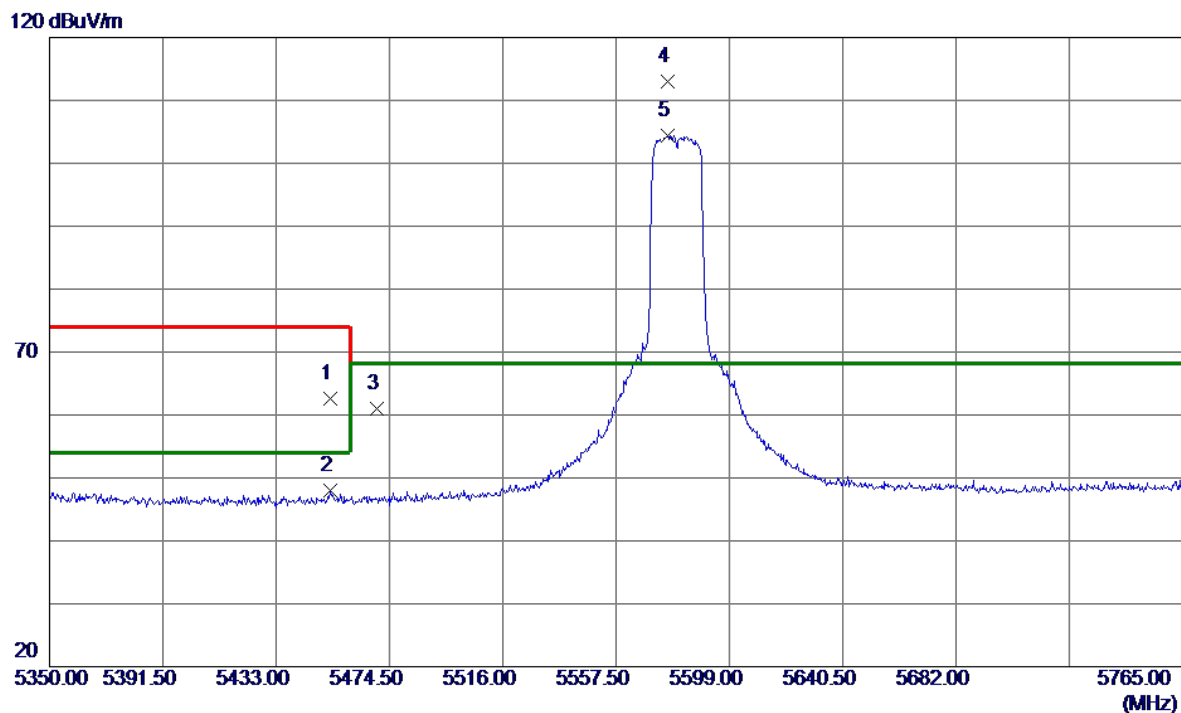


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5452.7120	24.58	38.10	62.68	74.00	-11.32	Peak	
2	5452.7120	9.81	38.10	47.91	54.00	-6.09	AVG	
3	5470.0000	22.78	38.15	60.93	68.20	-7.27	Peak	
4 *	5576.5900	74.72	38.32	113.04	68.20	44.84	Peak	No limit
5	5576.5900	66.16	38.32	104.48	68.20	36.28	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

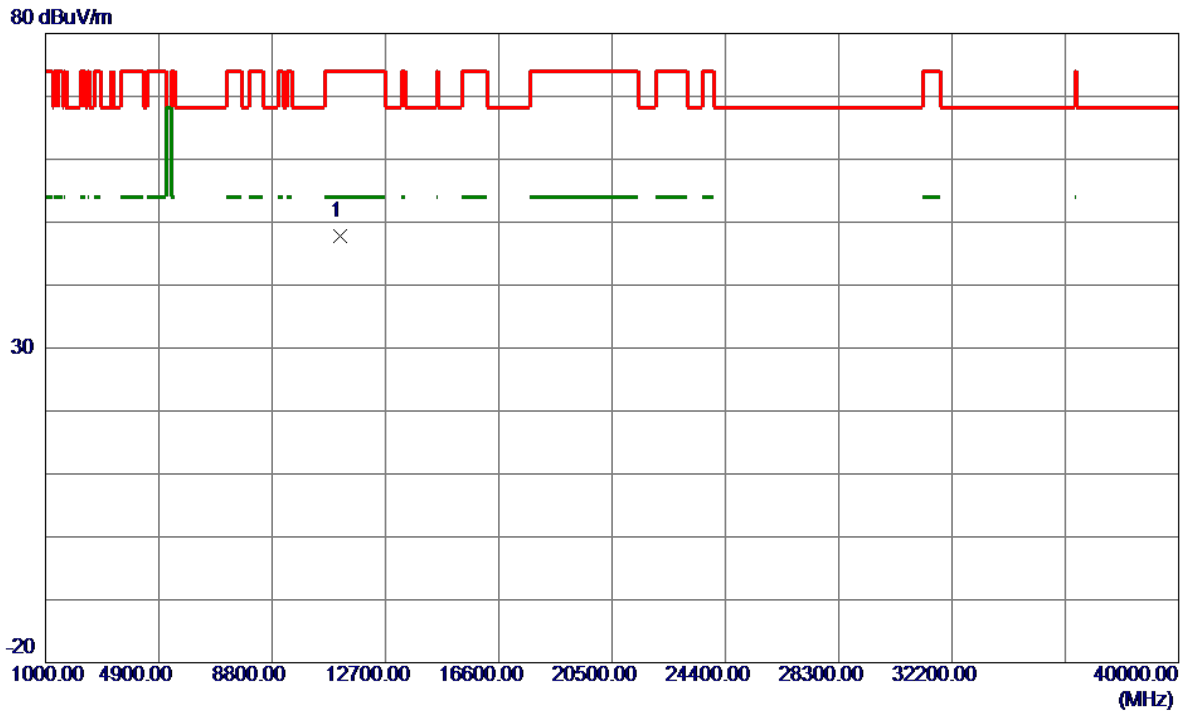


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11160.0000	45.71	2.04	47.75	74.00	-26.25	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

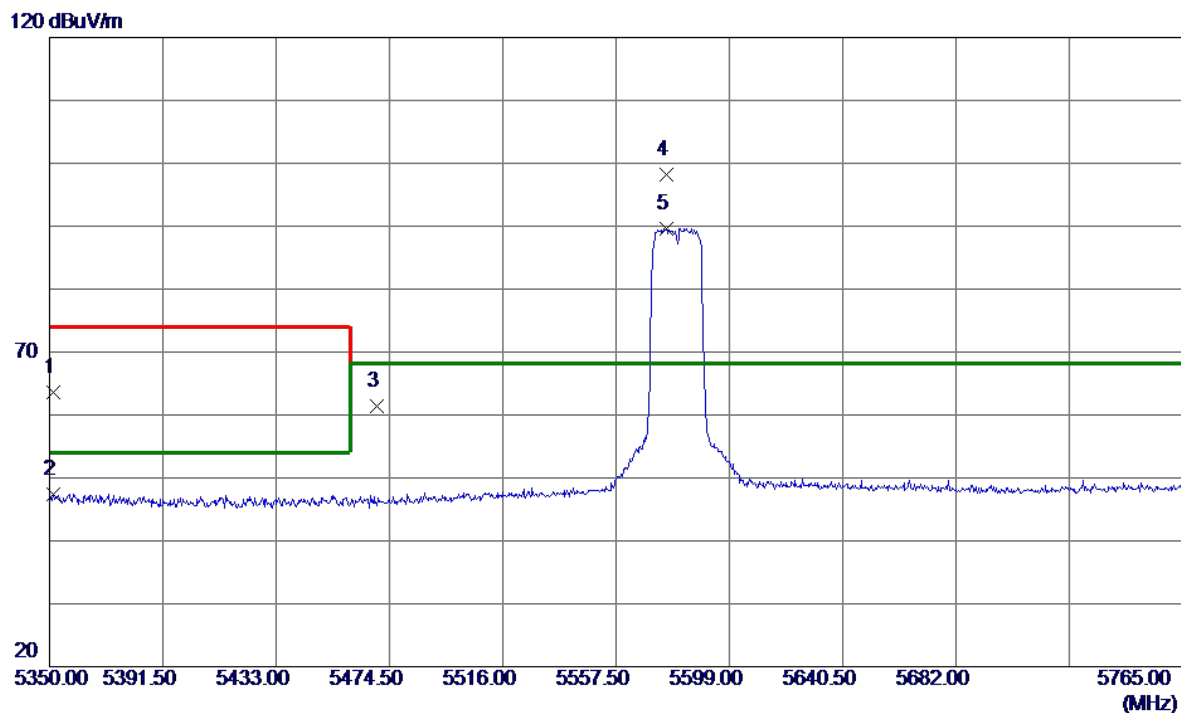


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5351.2450	25.86	37.74	63.60	74.00	-10.40	Peak	
2	5351.2450	9.75	37.74	47.49	54.00	-6.51	AVG	
3	5470.0000	23.20	38.15	61.35	68.20	-6.85	Peak	
4 *	5575.9670	59.85	38.32	98.17	68.20	29.97	Peak	No limit
5	5575.9670	51.37	38.32	89.69	68.20	21.49	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

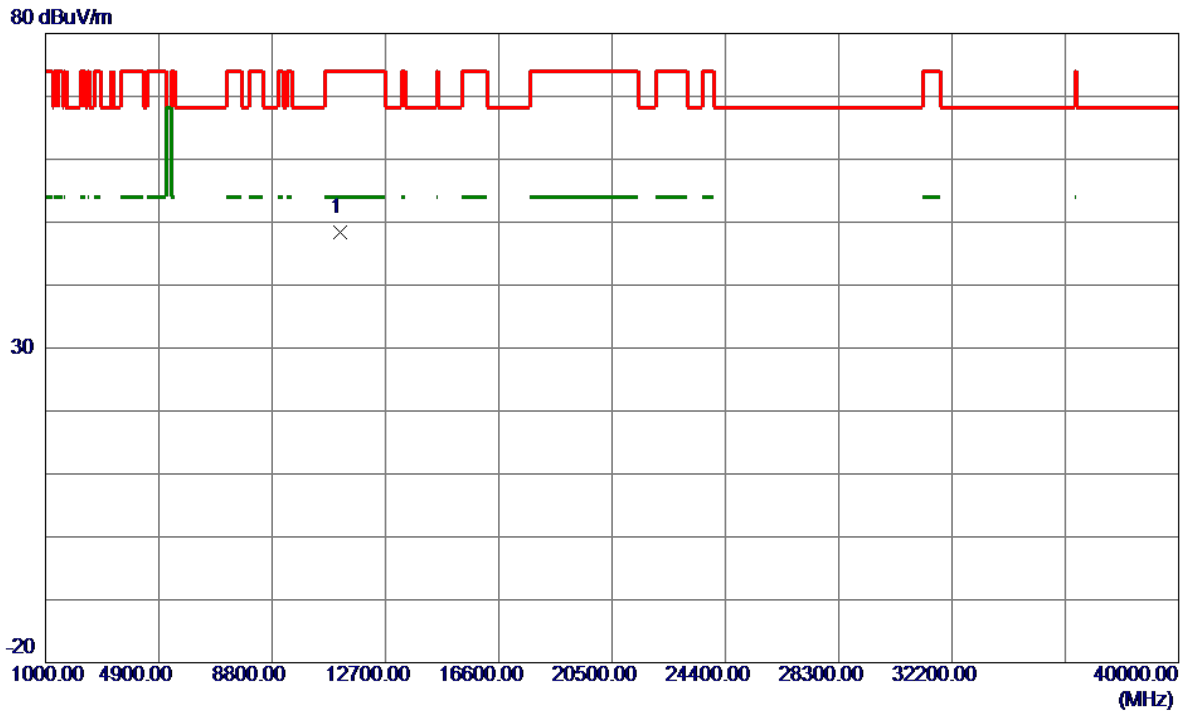


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11160.0000	46.32	2.04	48.36	74.00	-25.64	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

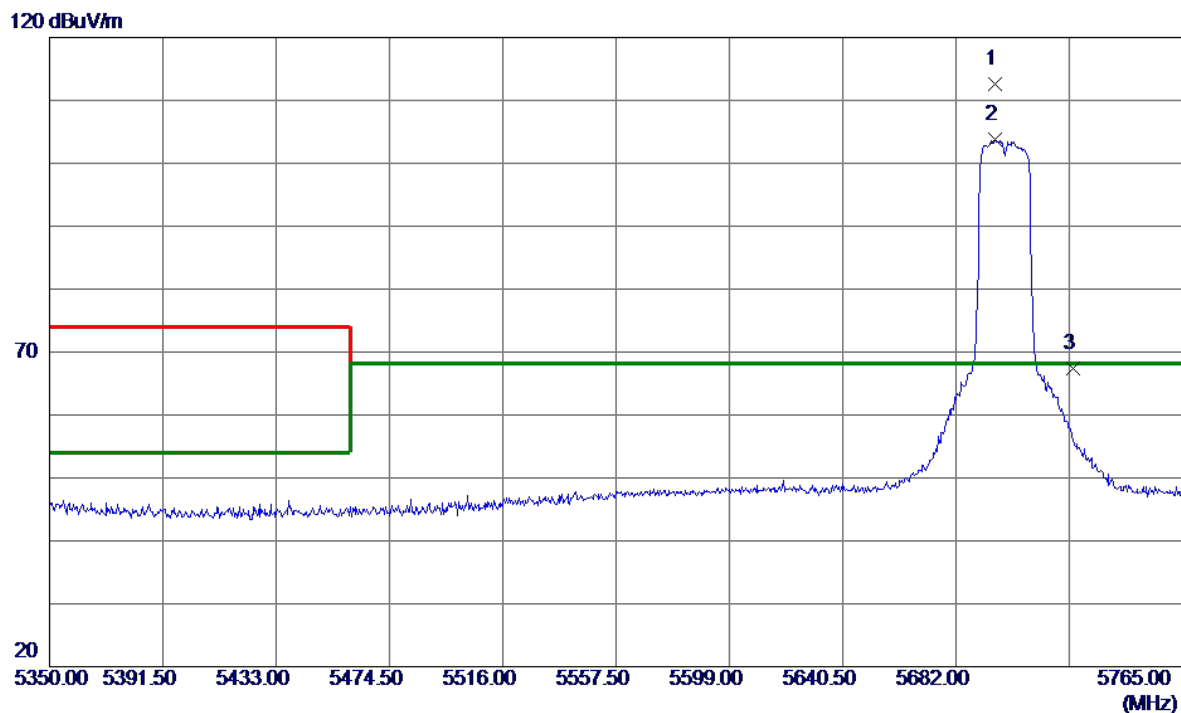


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5696.1100	74.15	38.40	112.55	68.20	44.35	Peak	No limit
2	5696.1100	65.38	38.40	103.78	68.20	35.58	AVG	No limit
3	5725.0000	28.98	38.50	67.48	68.20	-0.72	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

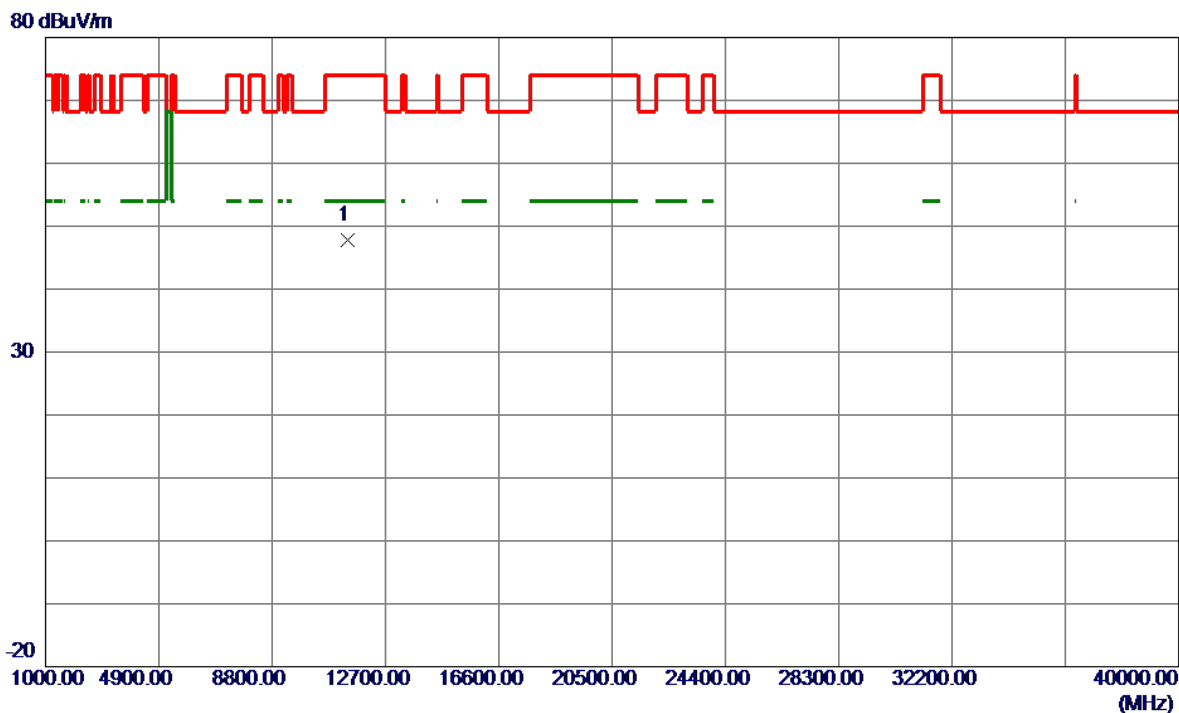


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11400.0000	45.58	2.13	47.71	74.00	-26.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

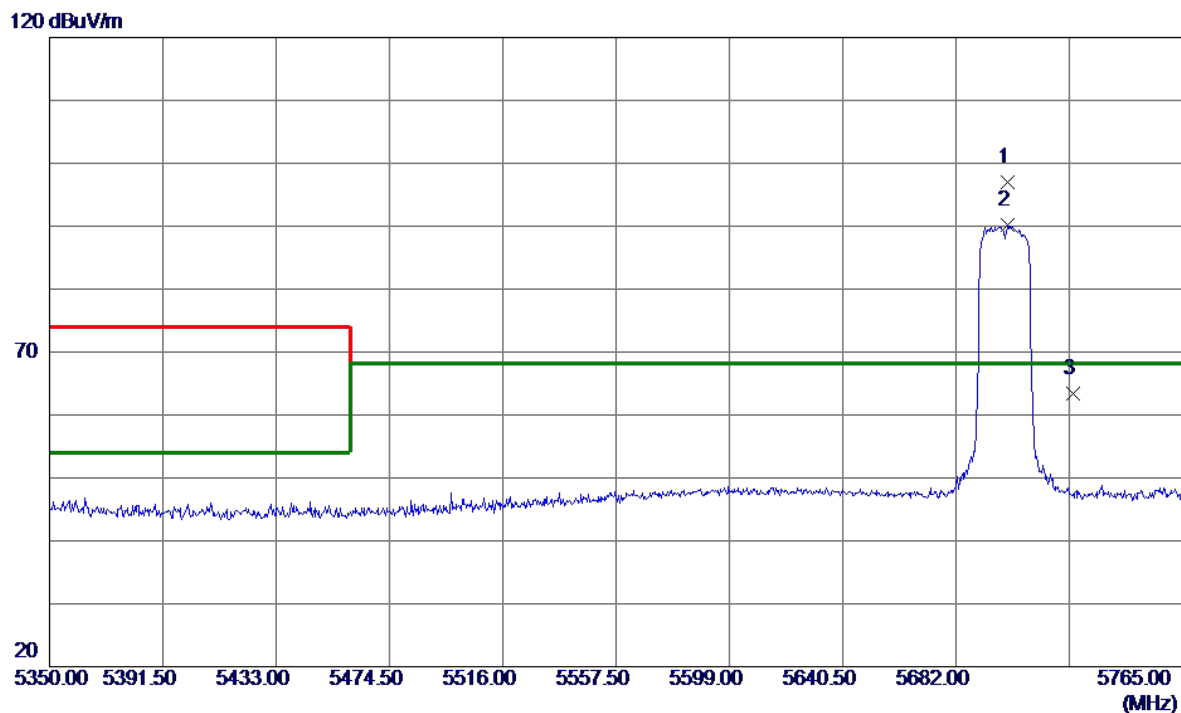


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5701.0900	58.52	38.41	96.93	68.20	28.73	Peak	No limit
2	5701.0900	51.74	38.41	90.15	68.20	21.95	AVG	No limit
3	5725.0000	24.96	38.50	63.46	68.20	-4.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

80 dBuV/m

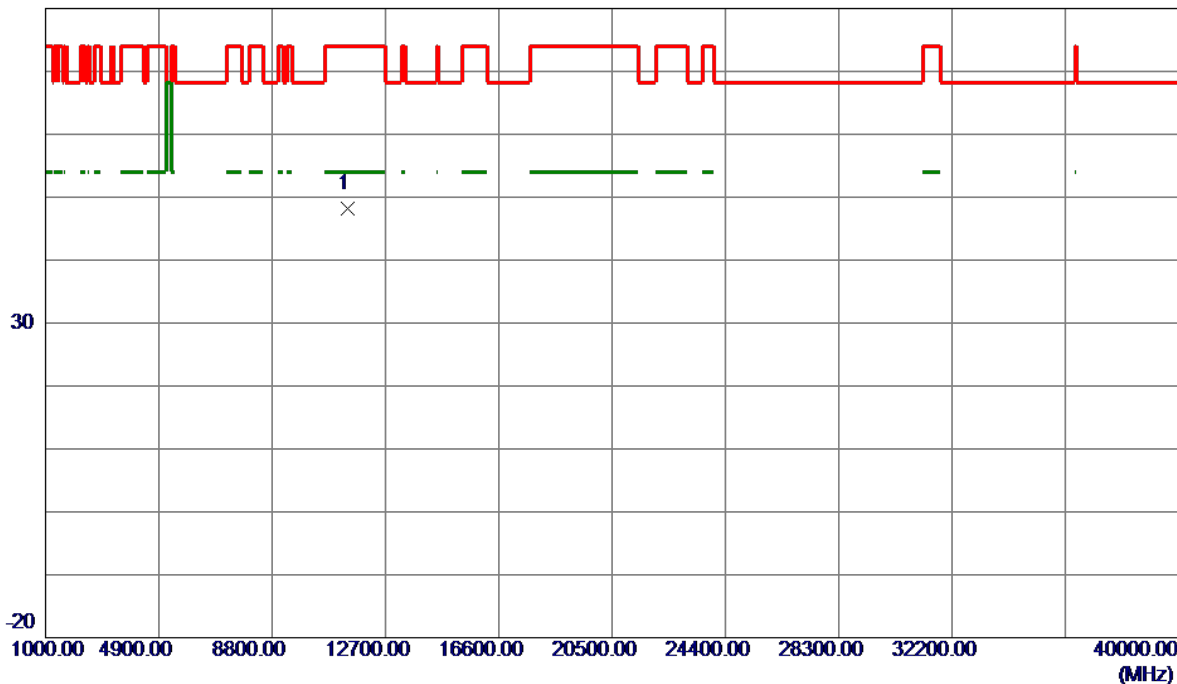


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.0000	46.13	2.13	48.26	74.00	-25.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

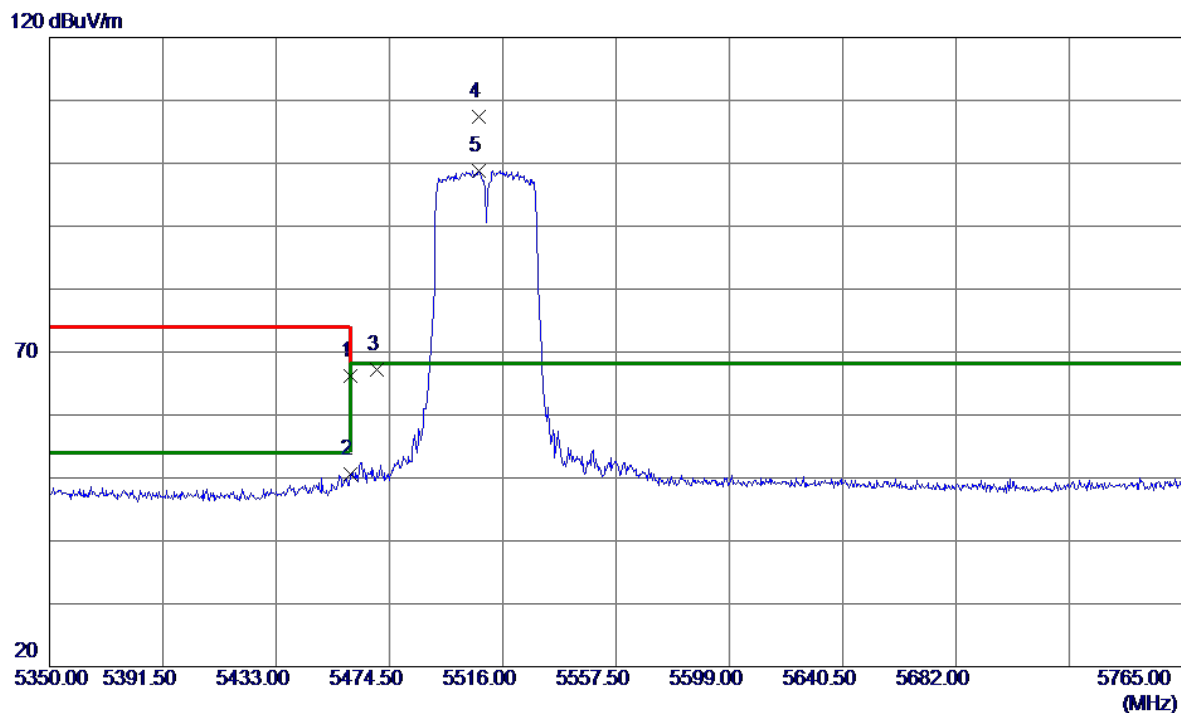


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	27.99	38.12	66.11	74.00	-7.89	Peak	
2	5460.0000	12.43	38.12	50.55	54.00	-3.45	AVG	
3	5470.0000	29.00	38.15	67.15	68.20	-1.05	Peak	
4 *	5507.2850	69.07	38.25	107.32	68.20	39.12	Peak	No limit
5	5507.2850	60.63	38.25	98.88	68.20	30.68	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

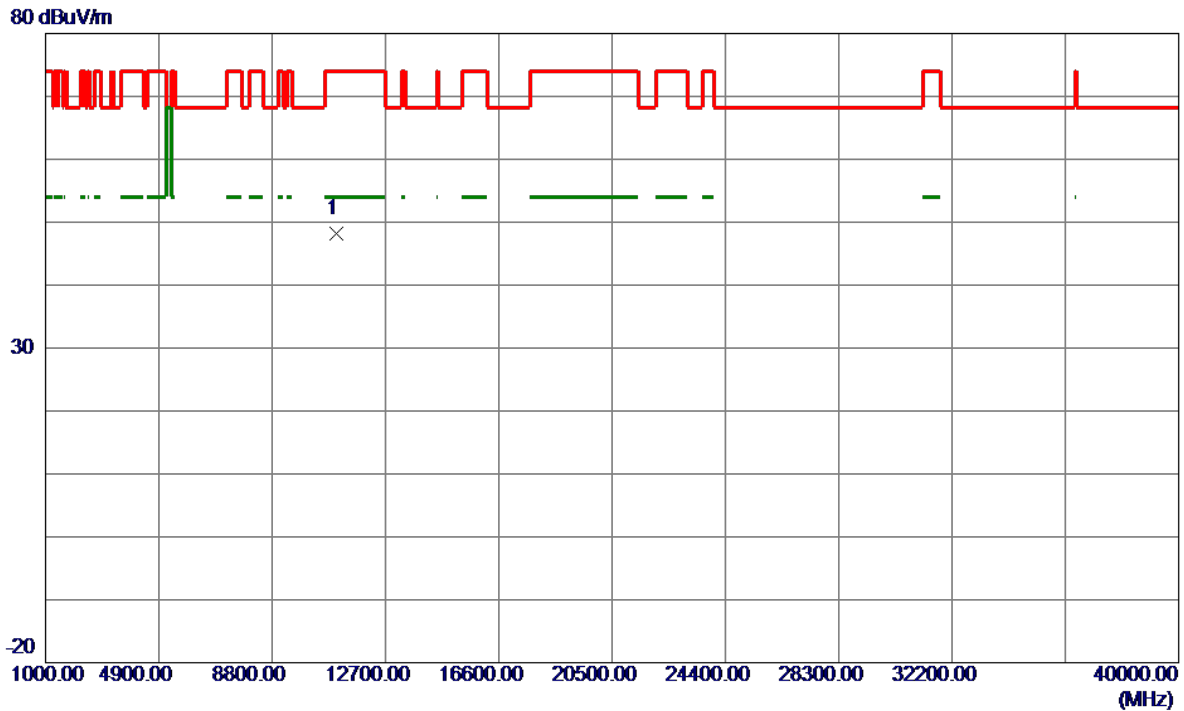


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11020.0000	45.93	2.30	48.23	74.00	-25.77	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

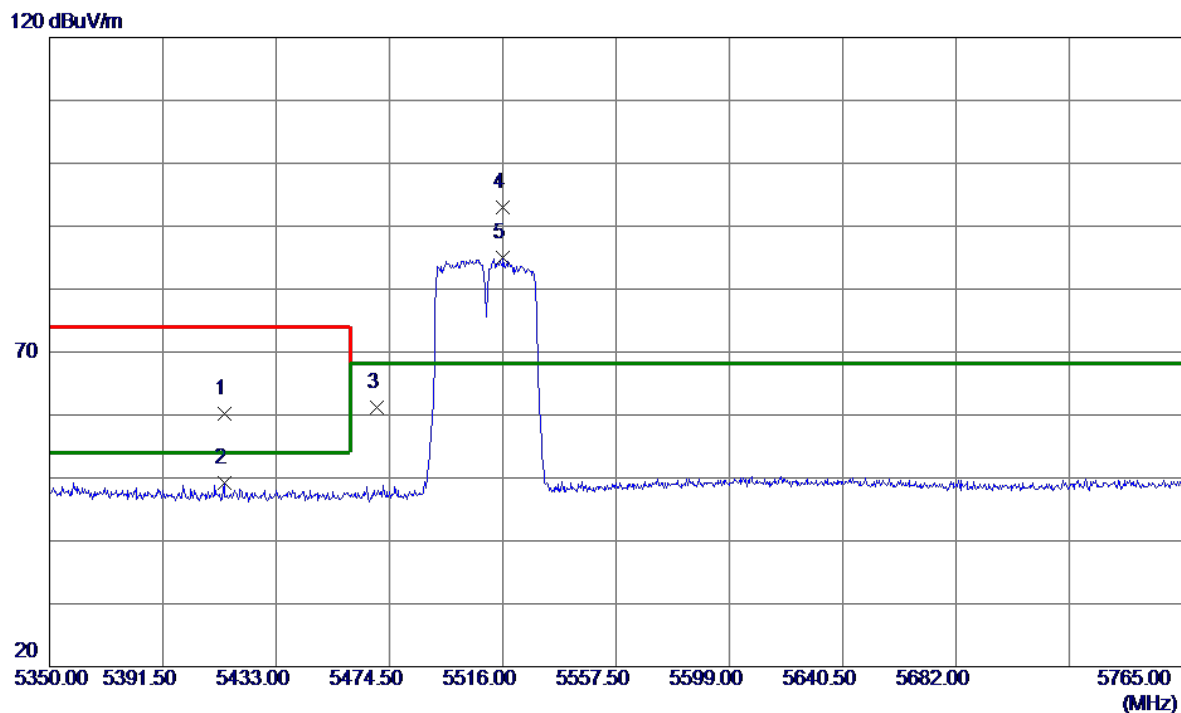


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5413.9100	22.21	37.98	60.19	74.00	-13.81	Peak	
2	5413.9100	11.23	37.98	49.21	54.00	-4.79	AVG	
3	5470.0000	23.06	38.15	61.21	68.20	-6.99	Peak	
4 *	5516.2080	54.75	38.26	93.01	68.20	24.81	Peak	No limit
5	5516.2080	46.66	38.26	84.92	68.20	16.72	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

80 dBuV/m

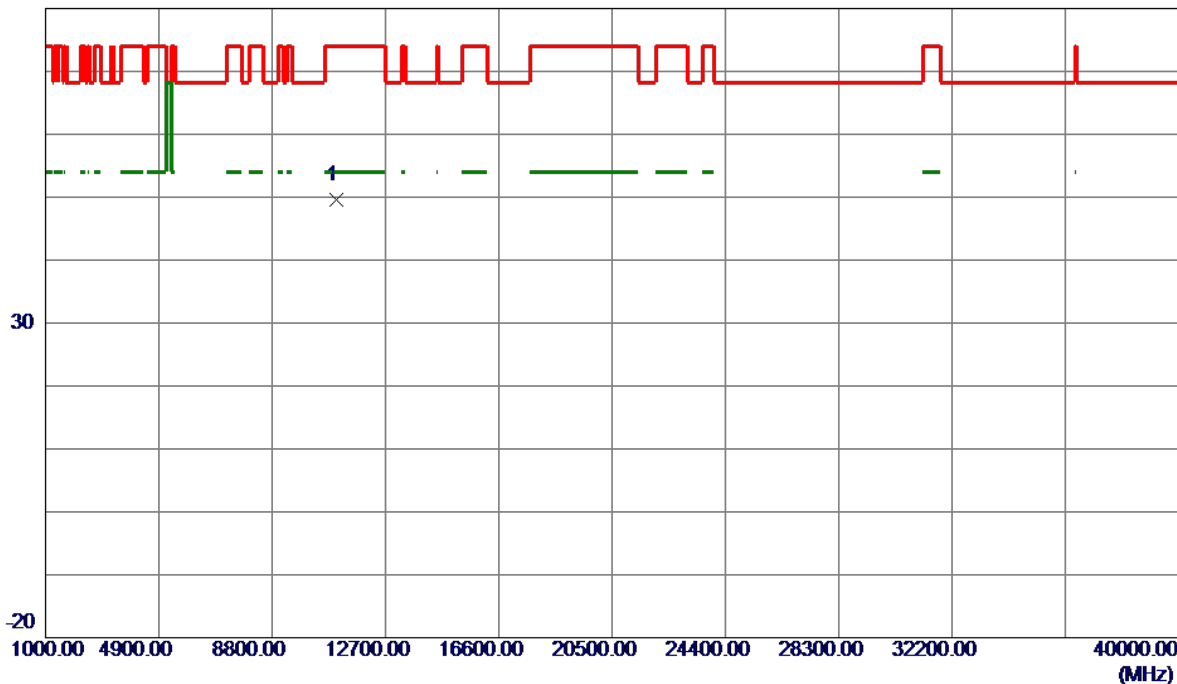


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11011.3000	47.23	2.32	49.55	74.00	-24.45	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

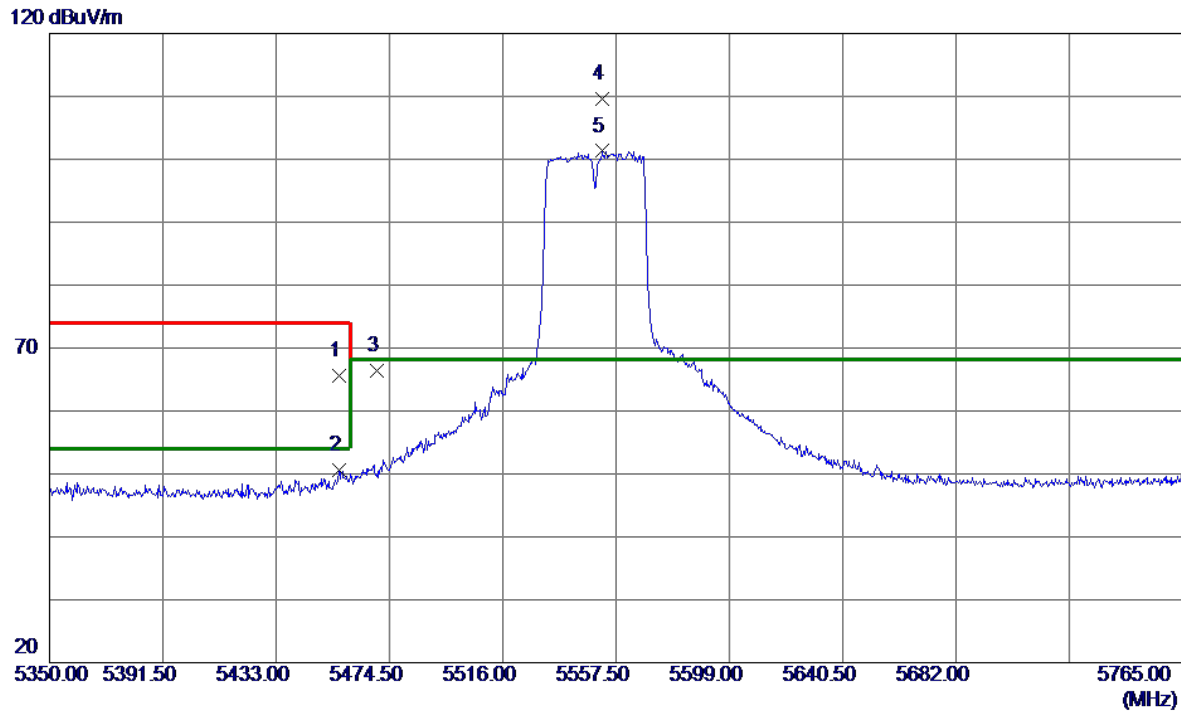


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5456.0330	27.57	38.11	65.68	74.00	-8.32	Peak	
2	5456.0330	12.45	38.11	50.56	54.00	-3.44	AVG	
3	5470.0000	28.23	38.15	66.38	68.20	-1.82	Peak	
4 *	5552.3130	71.28	38.29	109.57	68.20	41.37	Peak	No limit
5	5552.3130	63.01	38.29	101.30	68.20	33.10	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

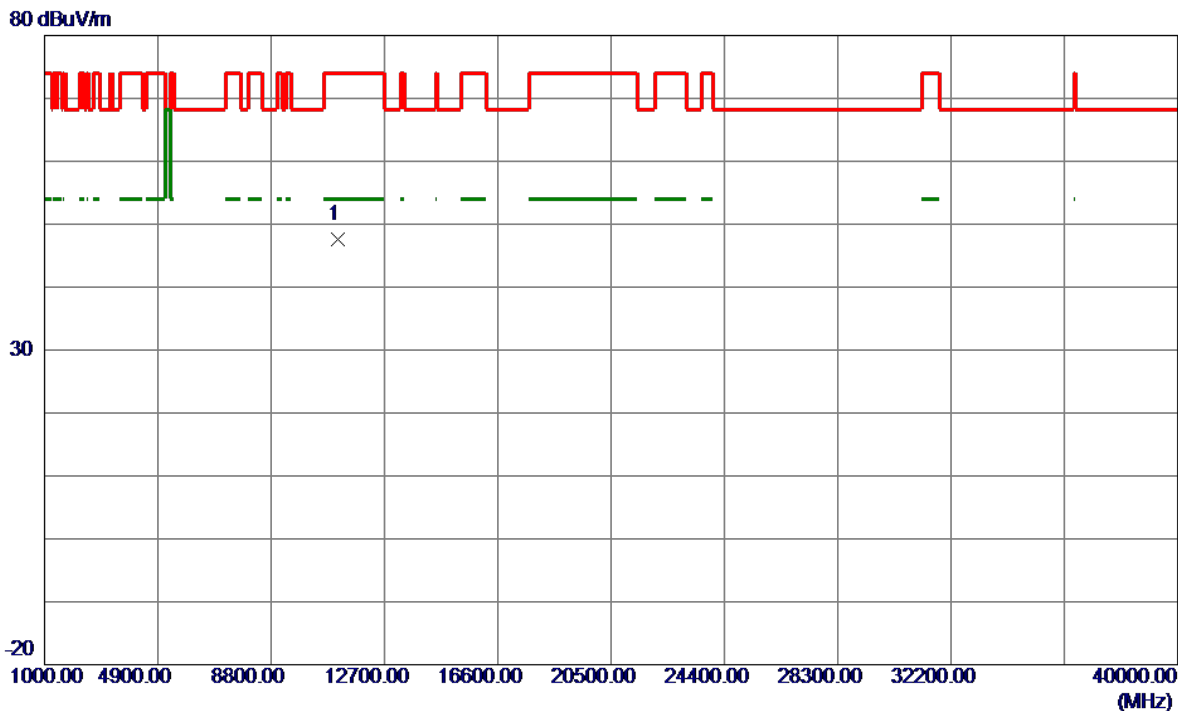


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.0000	45.42	2.15	47.57	74.00	-26.43	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

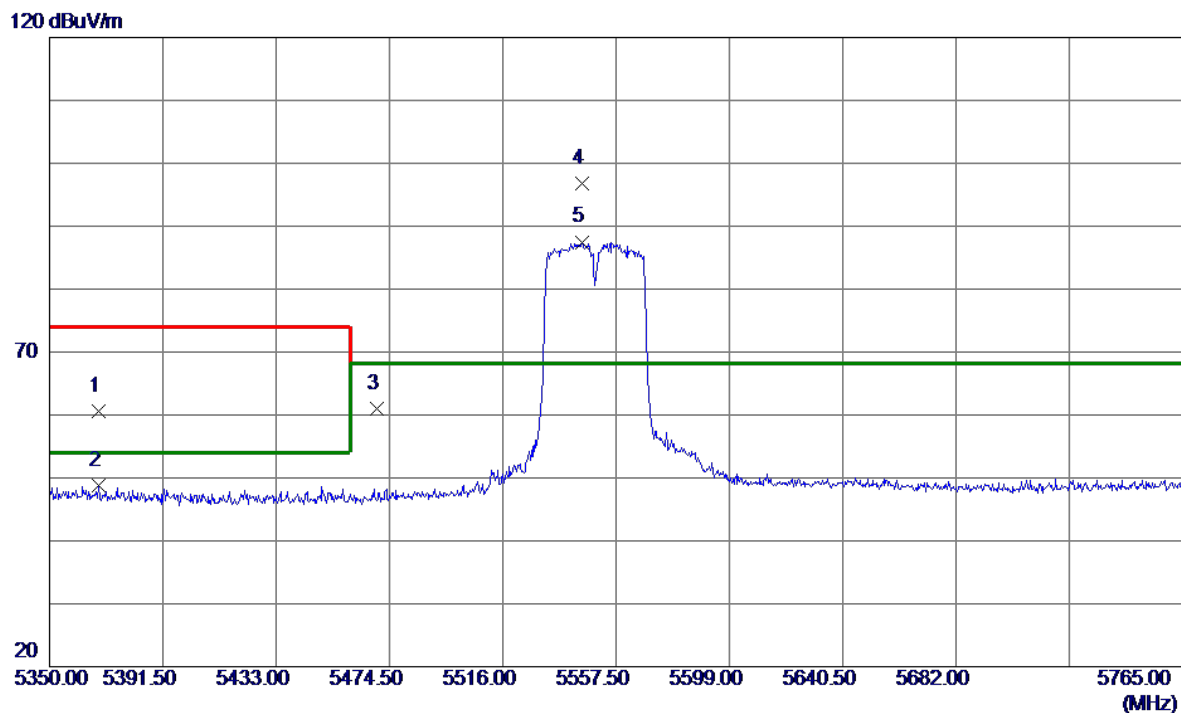


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5367.8450	22.83	37.81	60.64	74.00	-13.36	Peak	
2	5367.8450	10.97	37.81	48.78	54.00	-5.22	AVG	
3	5470.0000	22.90	38.15	61.05	68.20	-7.15	Peak	
4 *	5545.0500	58.42	38.29	96.71	68.20	28.51	Peak	No limit
5	5545.0500	49.21	38.29	87.50	68.20	19.30	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

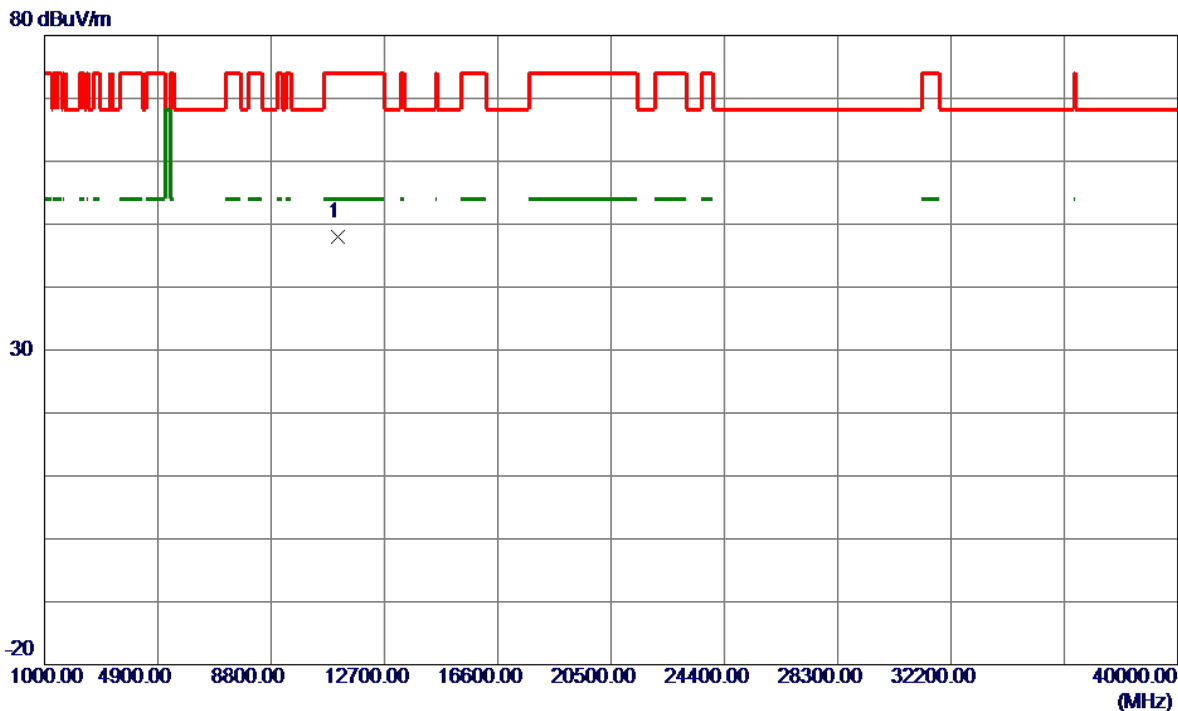


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.0000	45.93	2.15	48.08	74.00	-25.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

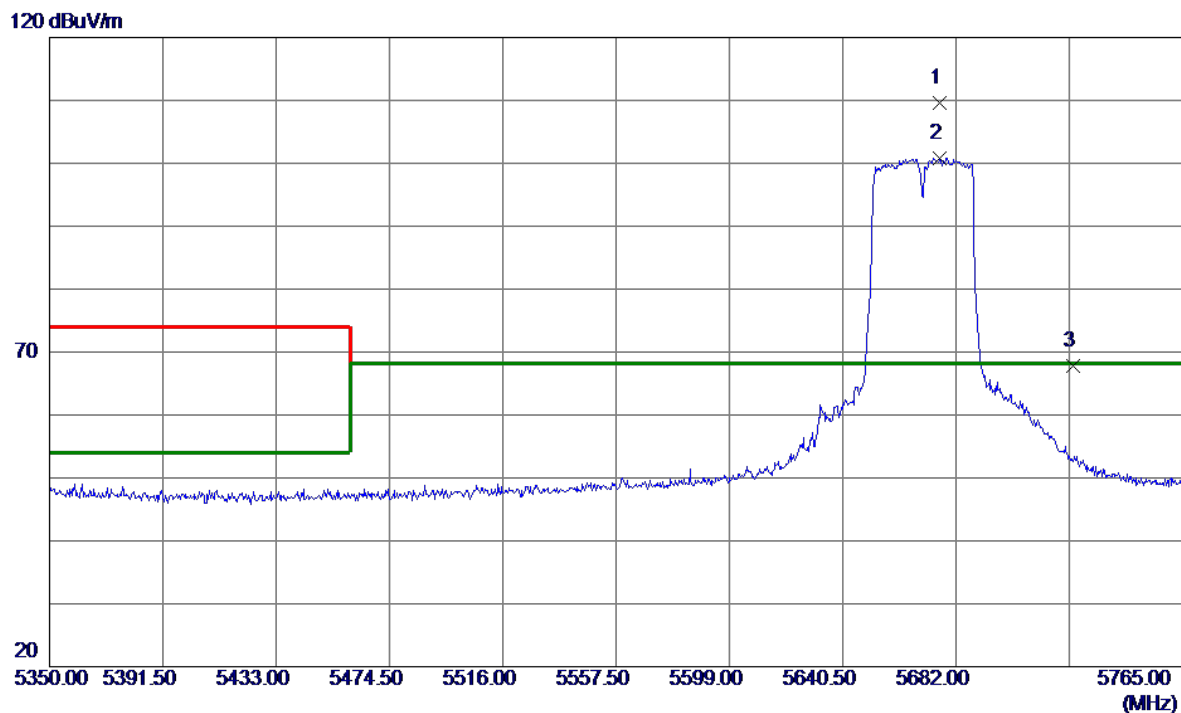


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5676.1900	71.12	38.39	109.51	68.20	41.31	Peak	No limit
2	5676.1900	62.46	38.39	100.85	68.20	32.65	AVG	No limit
3	5725.0000	29.28	38.50	67.78	68.20	-0.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

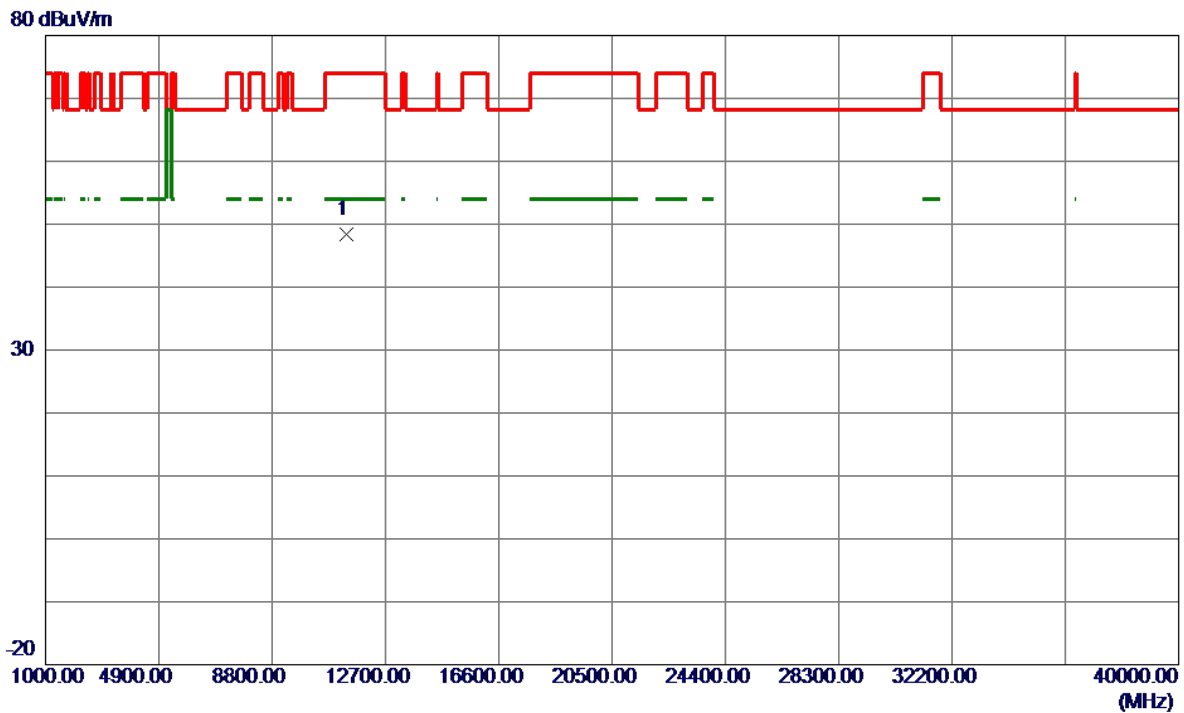


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11340.0000	46.41	2.08	48.49	74.00	-25.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

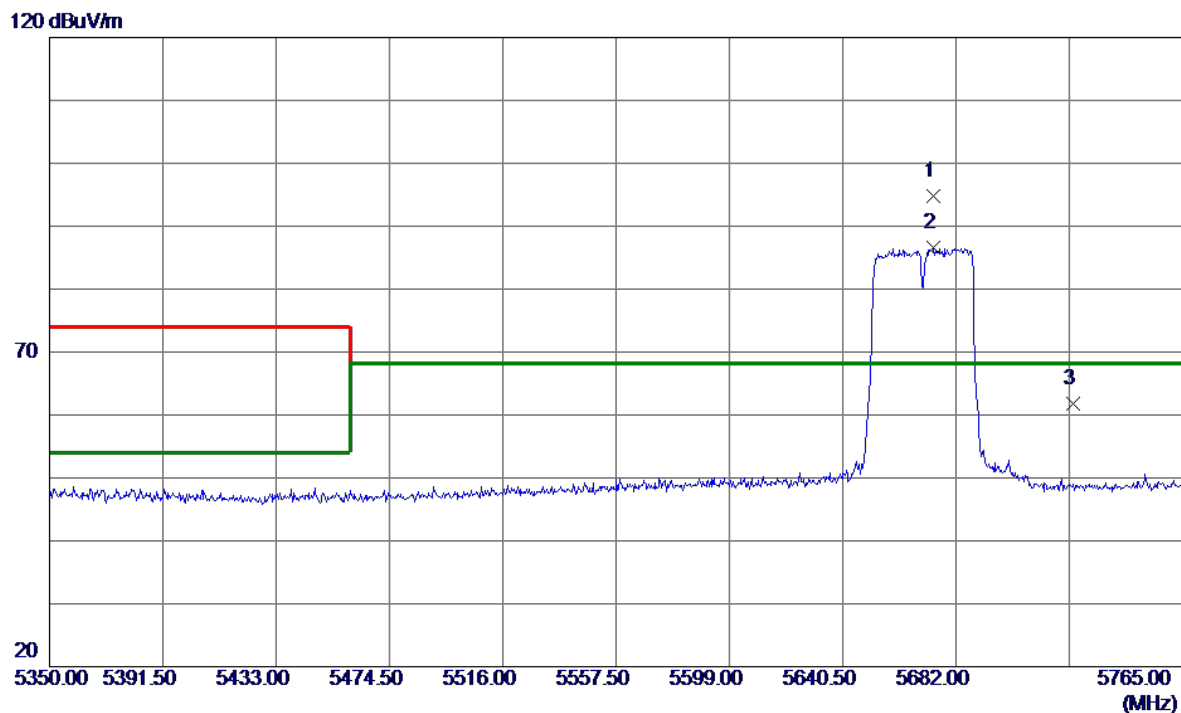


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5673.7000	56.33	38.39	94.72	68.20	26.52	Peak	No limit
2	5673.7000	48.14	38.39	86.53	68.20	18.33	AVG	No limit
3	5725.0000	23.34	38.50	61.84	68.20	-6.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

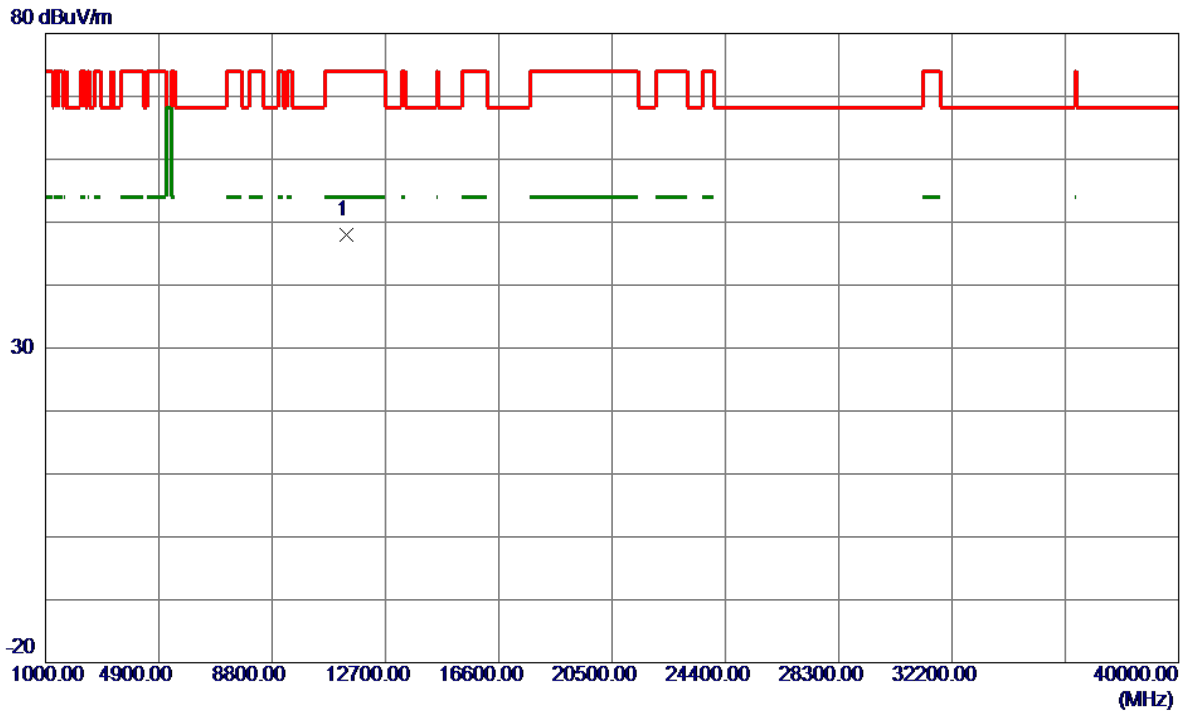


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11340.0000	45.91	2.08	47.99	74.00	-26.01	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

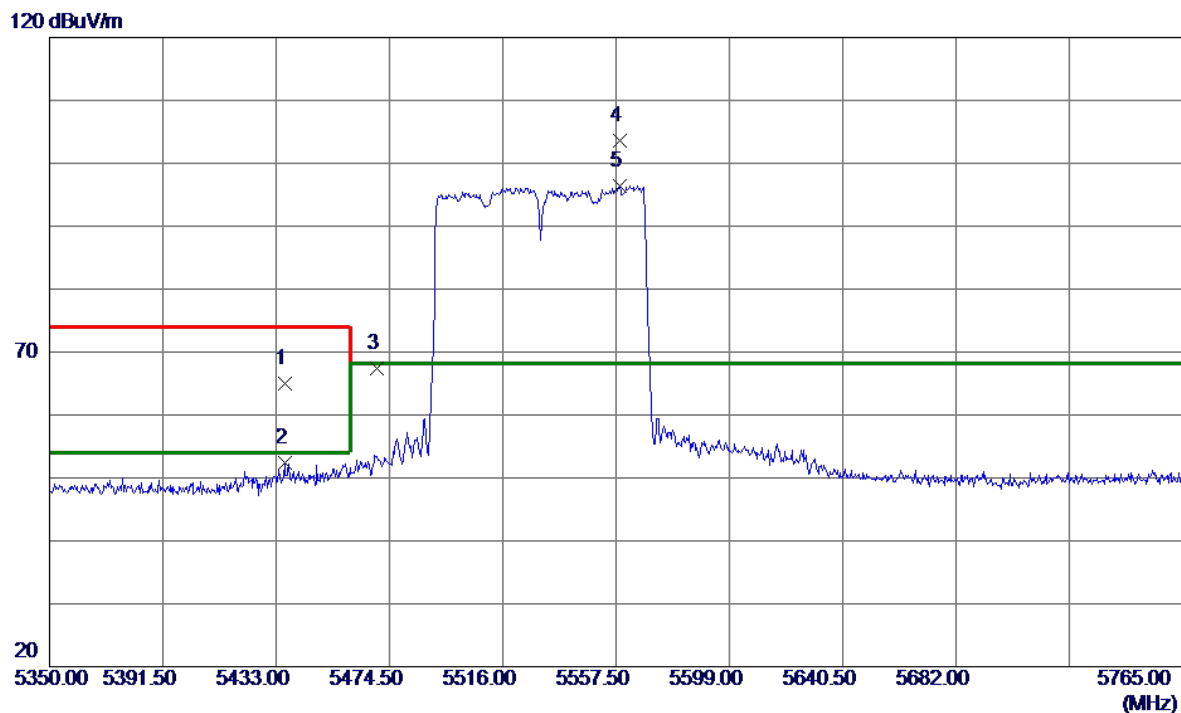


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5436.1130	26.89	38.05	64.94	74.00	-9.06	Peak	
2	5436.1130	14.36	38.05	52.41	54.00	-1.59	AVG	
3	5470.0000	29.19	38.15	67.34	68.20	-0.86	Peak	
4 *	5558.9530	65.37	38.30	103.67	68.20	35.47	Peak	No limit
5	5558.9530	58.11	38.30	96.41	68.20	28.21	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

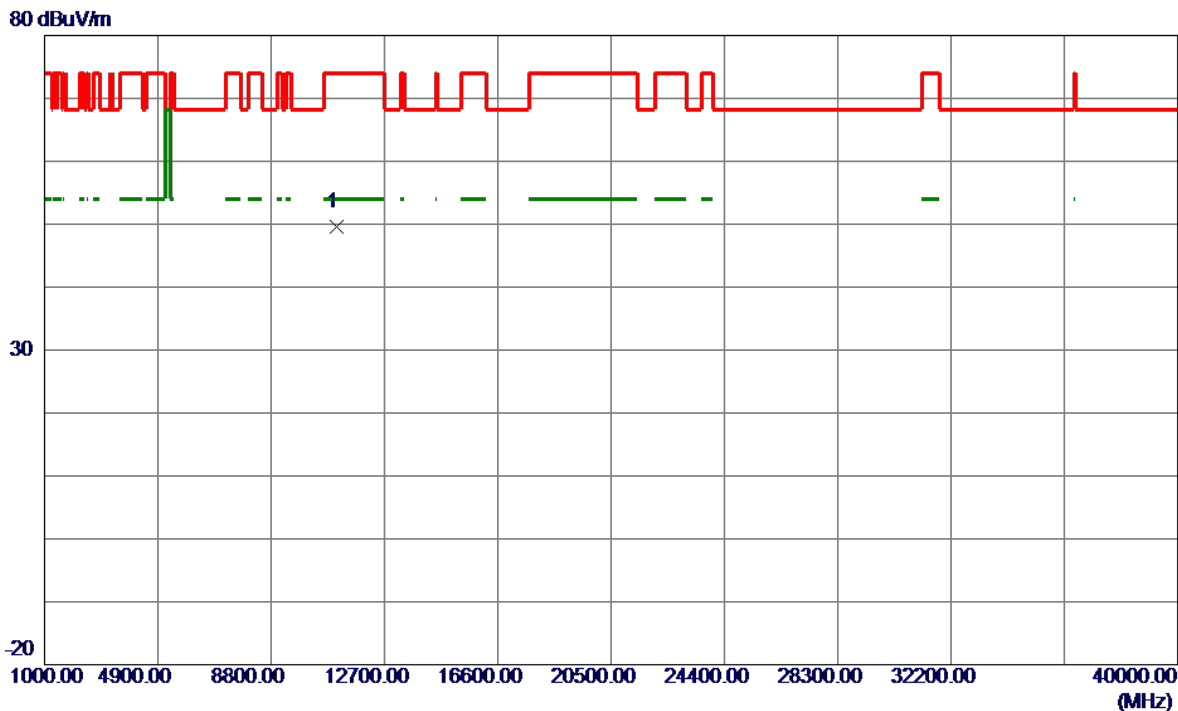


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0000	47.38	2.23	49.61	74.00	-24.39	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

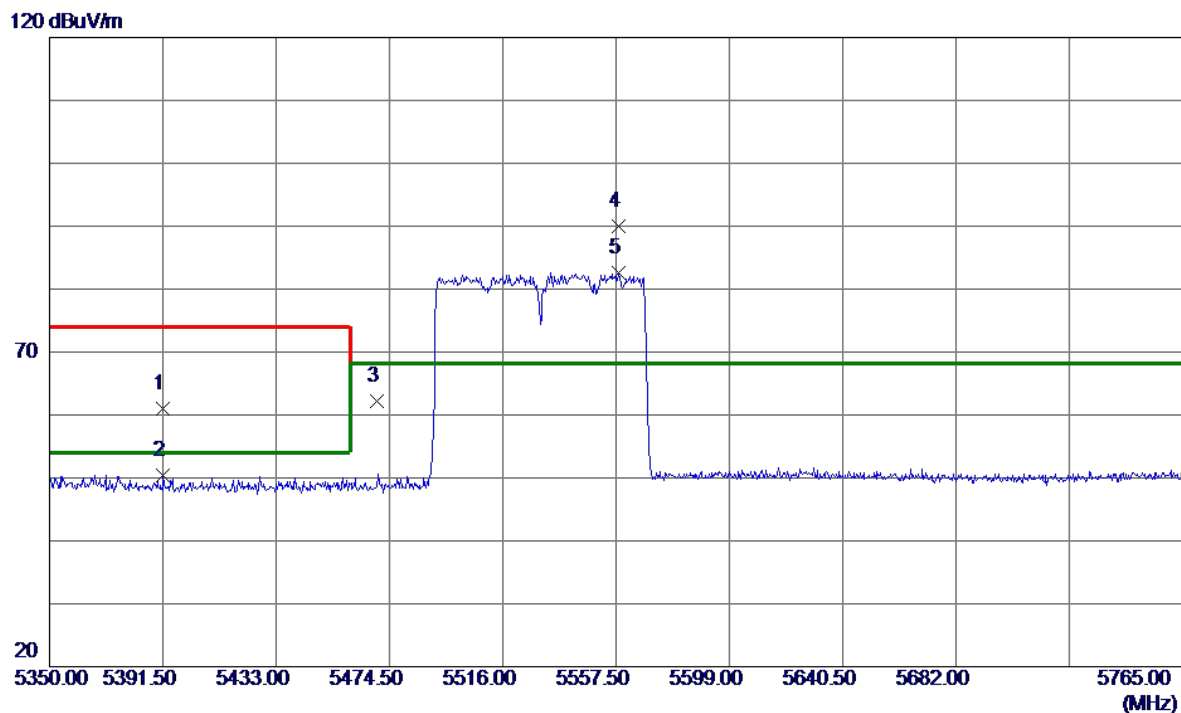


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5391.7080	23.10	37.91	61.01	74.00	-12.99	Peak	
2	5391.7080	12.45	37.91	50.36	54.00	-3.64	AVG	
3	5470.0000	24.05	38.15	62.20	68.20	-6.00	Peak	
4 *	5558.5379	51.62	38.30	89.92	68.20	21.72	Peak	No limit
5	5558.5379	44.37	38.30	82.67	68.20	14.47	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

80 dBuV/m

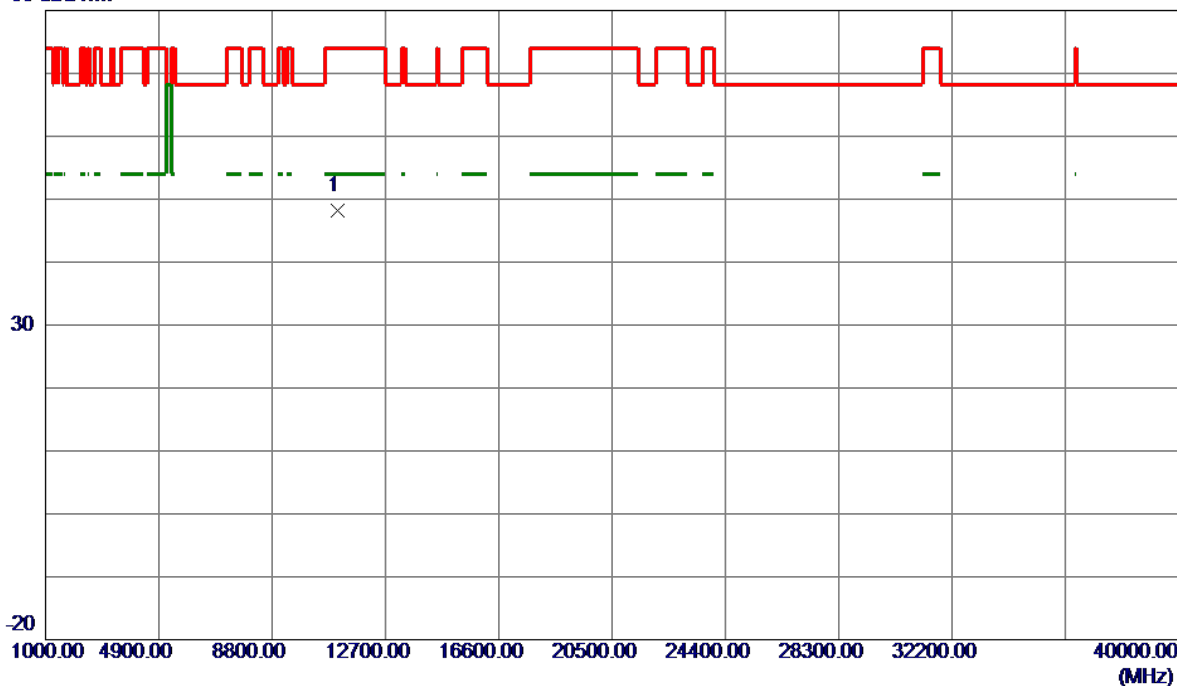


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0000	45.91	2.23	48.14	74.00	-25.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

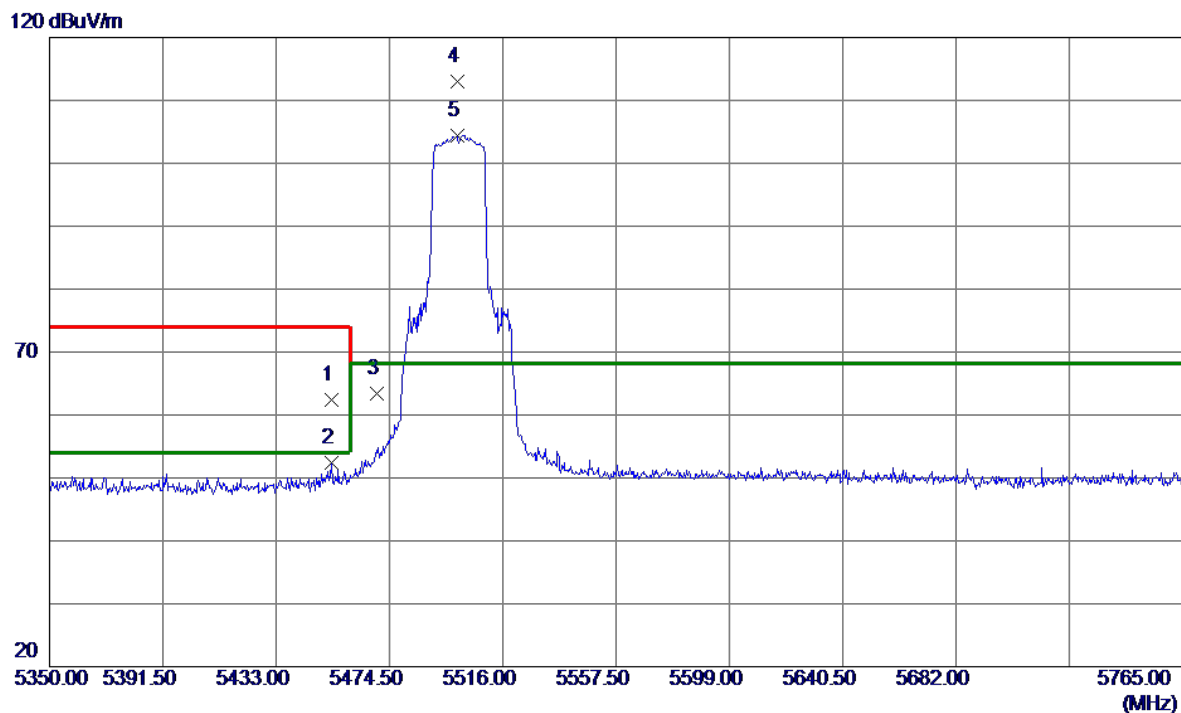


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5453.3350	24.25	38.10	62.35	74.00	-11.65	Peak	
2	5453.3350	14.31	38.10	52.41	54.00	-1.59	AVG	
3	5470.0000	25.34	38.15	63.49	68.20	-4.71	Peak	
4 *	5499.1930	74.74	38.24	112.98	68.20	44.78	Peak	No limit
5	5499.1930	66.23	38.24	104.47	68.20	36.27	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

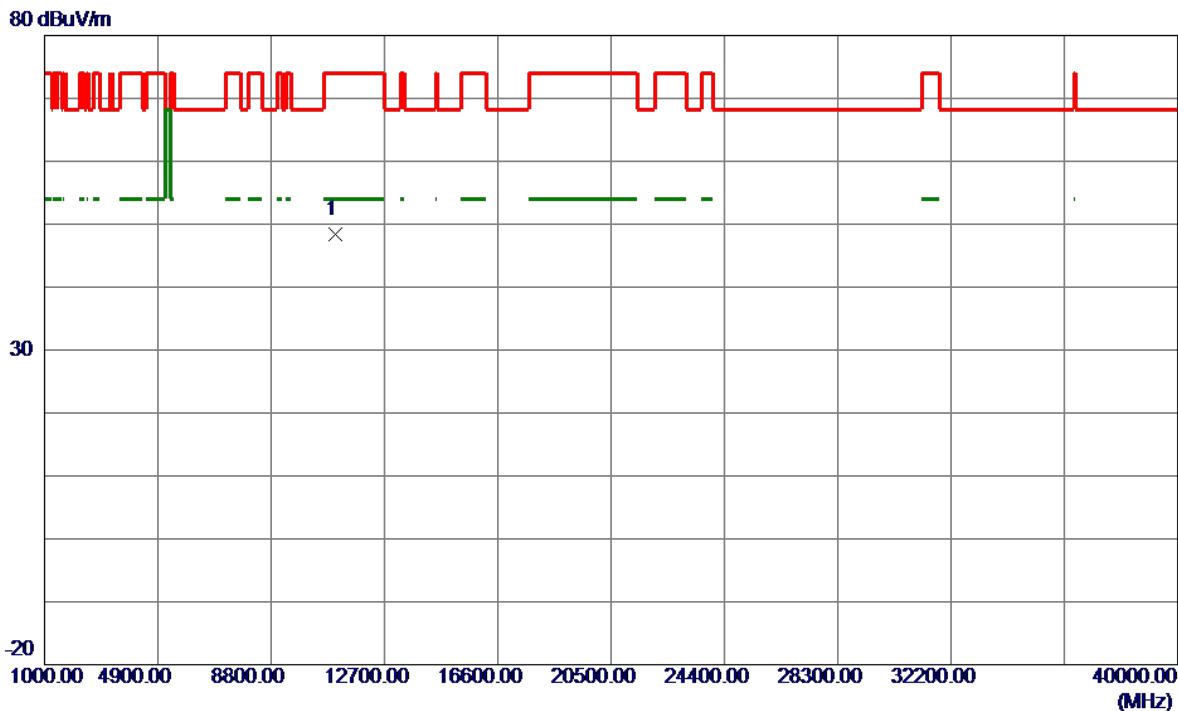


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.0000	46.06	2.34	48.40	74.00	-25.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

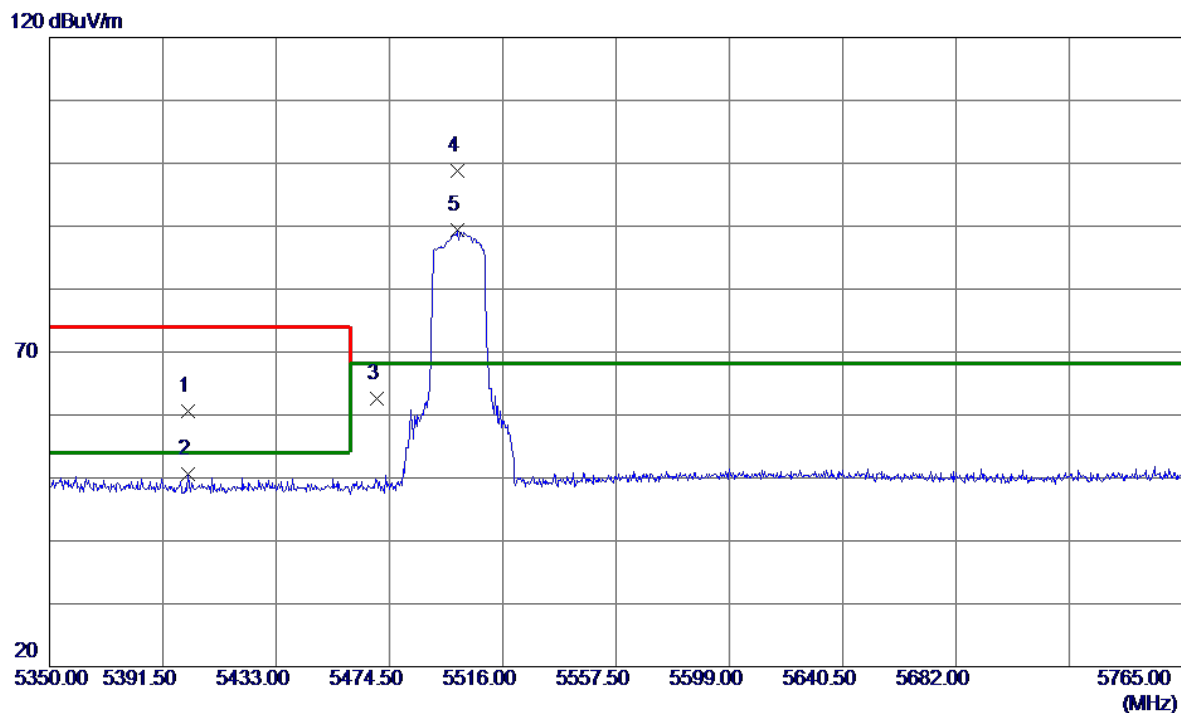


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5400.6300	22.61	37.94	60.55	74.00	-13.45	Peak	
2	5400.6300	12.72	37.94	50.66	54.00	-3.34	AVG	
3	5470.0000	24.53	38.15	62.68	68.20	-5.52	Peak	
4 *	5499.1930	60.48	38.24	98.72	68.20	30.52	Peak	No limit
5	5499.1930	51.20	38.24	89.44	68.20	21.24	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

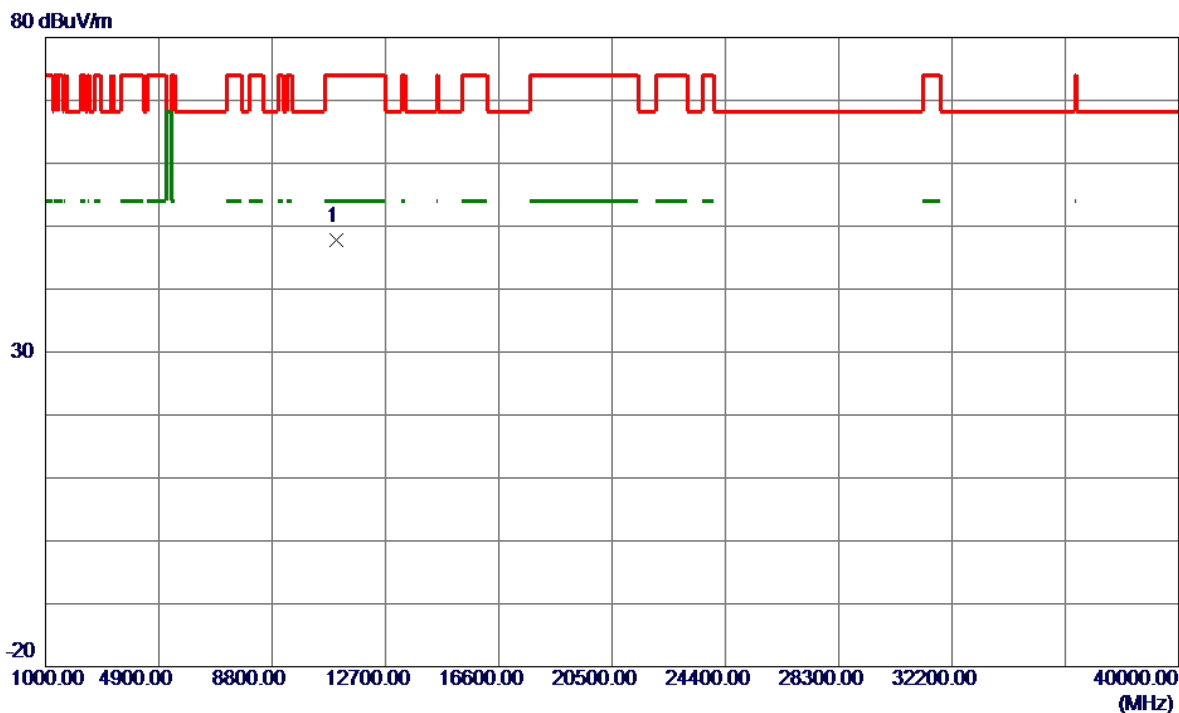


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11000.0000	45.36	2.34	47.70	74.00	-26.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

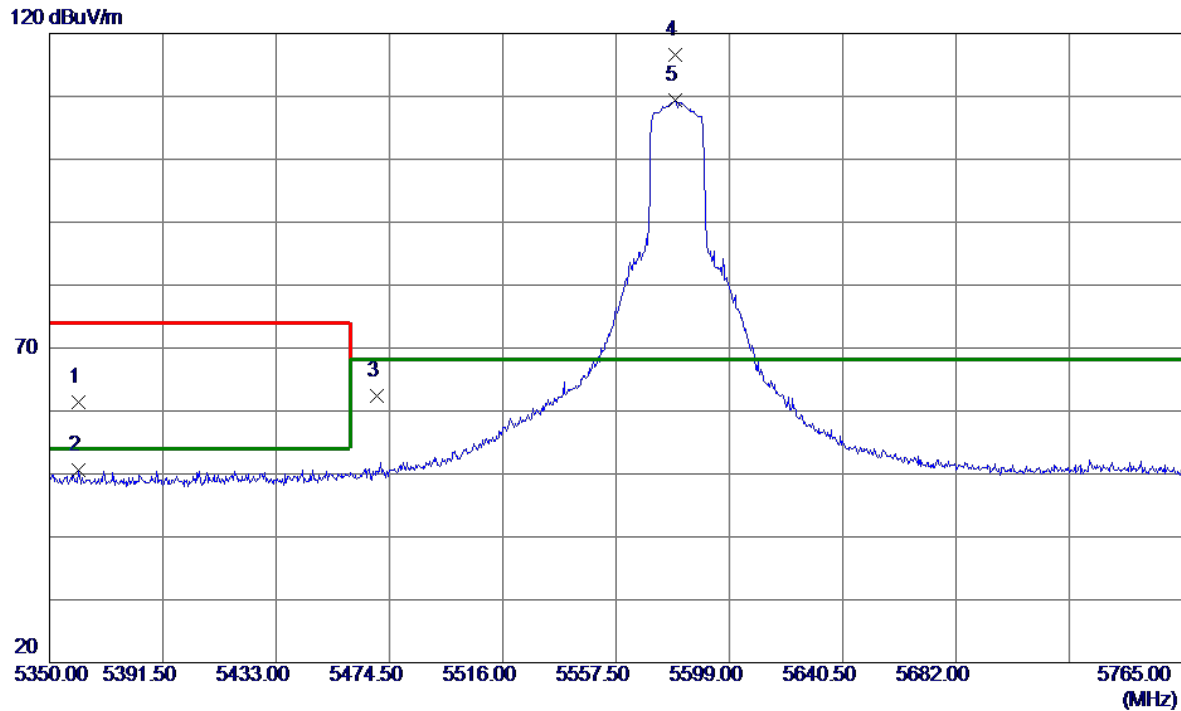


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5360.5830	23.53	37.78	61.31	74.00	-12.69	Peak	
2	5360.5830	12.87	37.78	50.65	54.00	-3.35	AVG	
3	5470.0000	24.23	38.15	62.38	68.20	-5.82	Peak	
4 *	5579.0800	78.23	38.32	116.55	68.20	48.35	Peak	No limit
5	5579.0800	71.13	38.32	109.45	68.20	41.25	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

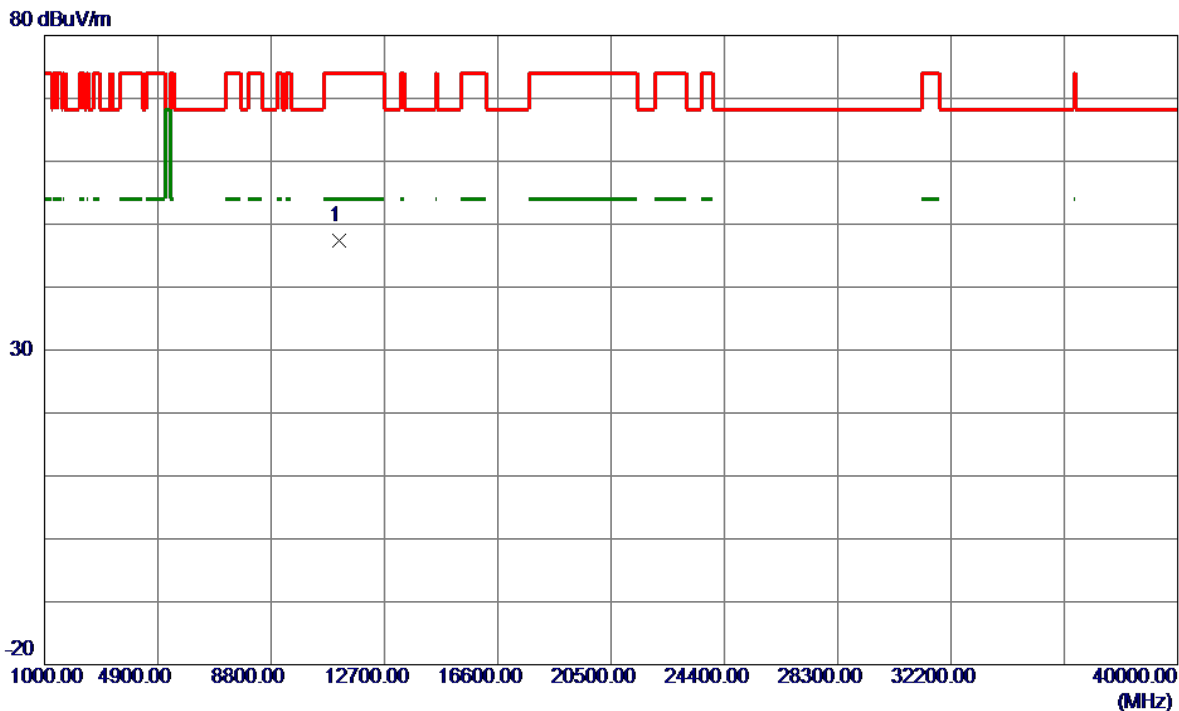


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.0000	45.28	2.04	47.32	74.00	-26.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

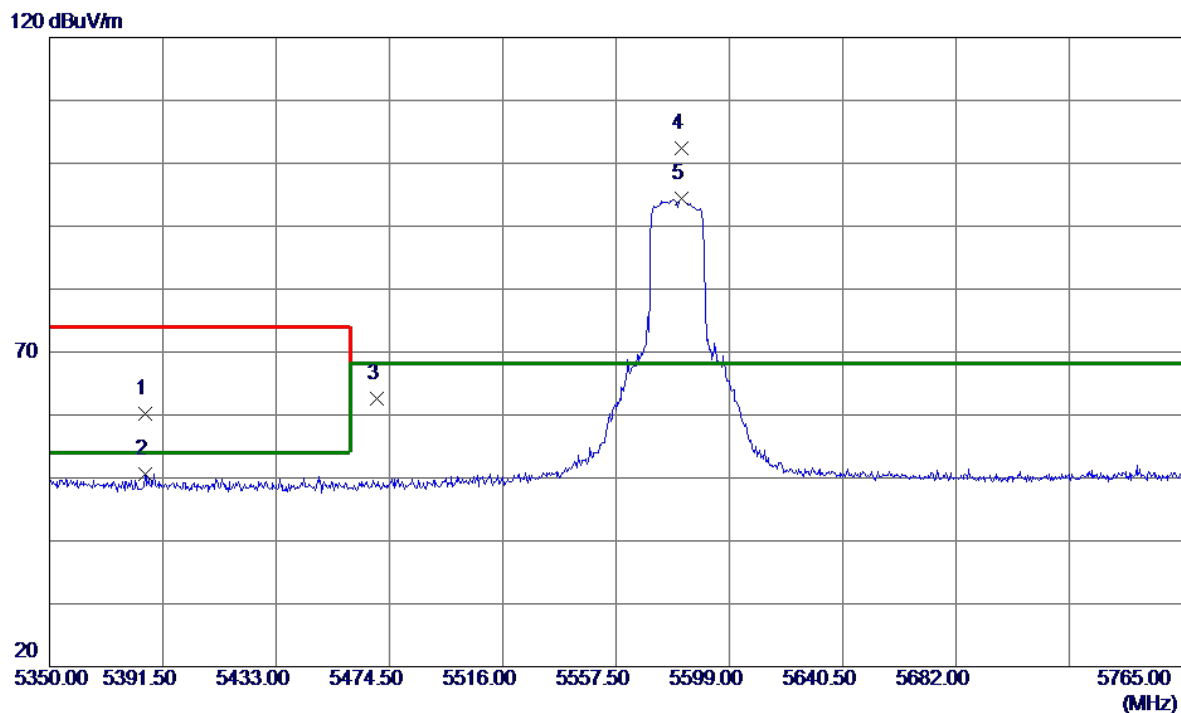


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5385.0680	22.41	37.88	60.29	74.00	-13.71	Peak	
2	5385.0680	12.76	37.88	50.64	54.00	-3.36	AVG	
3	5470.0000	24.39	38.15	62.54	68.20	-5.66	Peak	
4 *	5581.5700	64.08	38.32	102.40	68.20	34.20	Peak	No limit
5	5581.5700	56.05	38.32	94.37	68.20	26.17	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

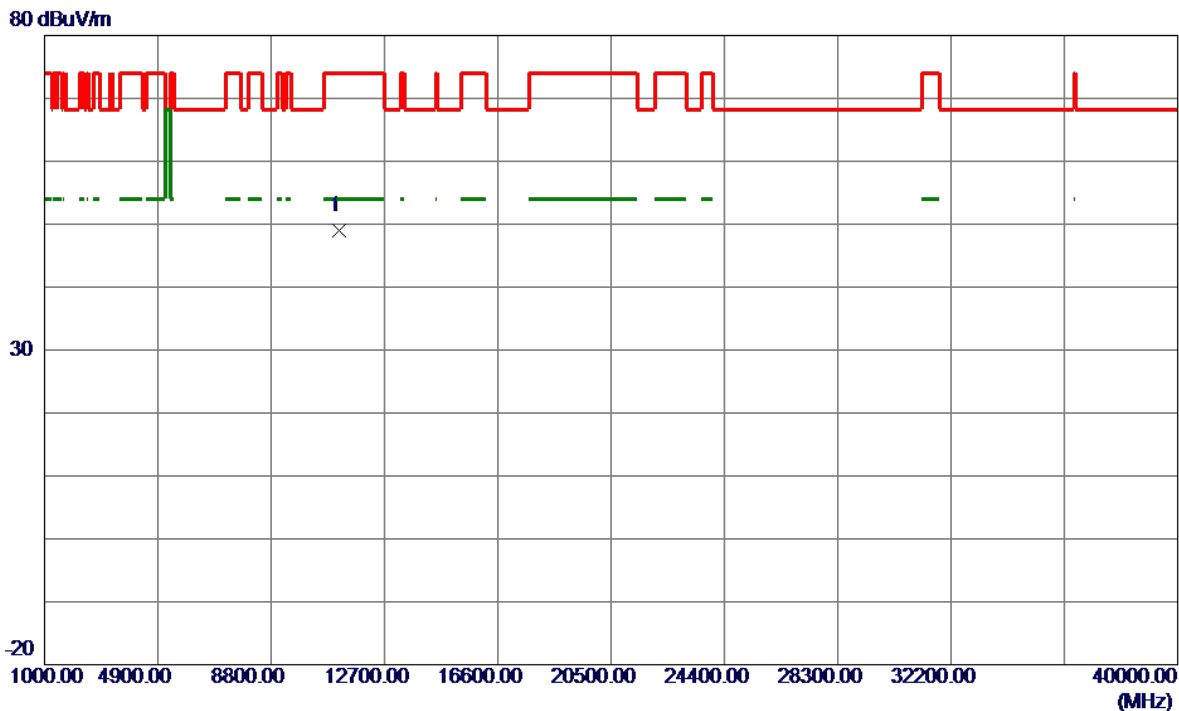


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.0000	47.00	2.04	49.04	74.00	-24.96	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

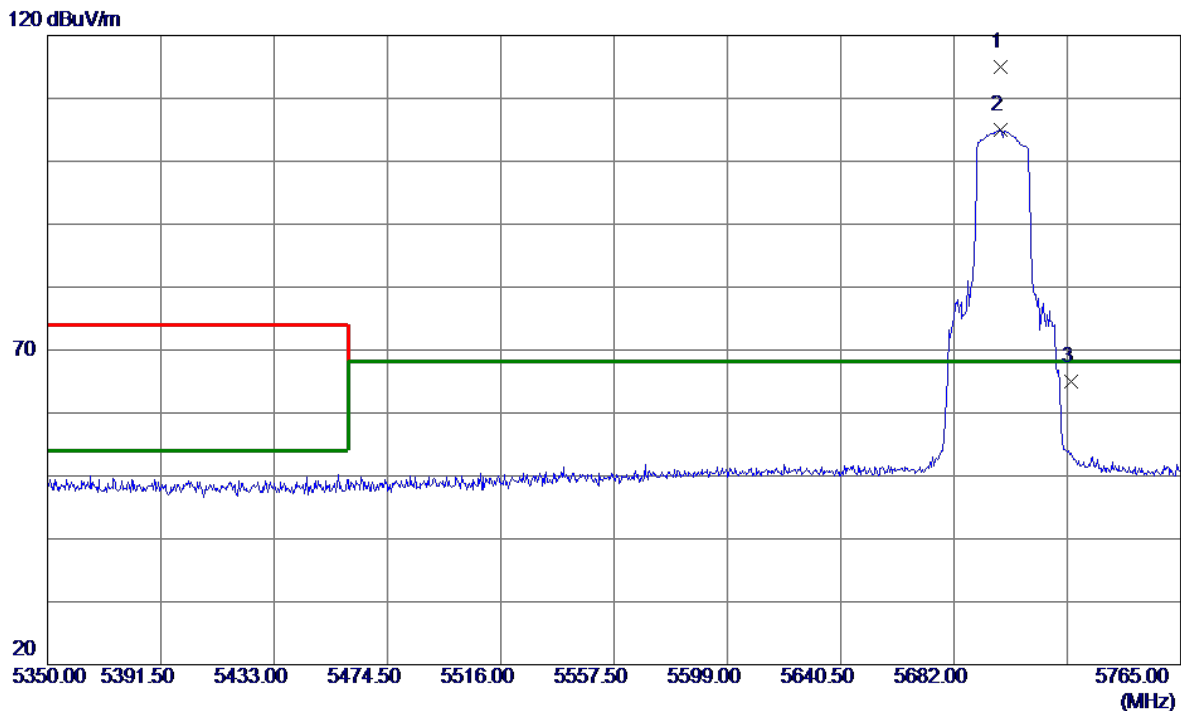


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5699.2220	76.51	38.40	114.91	68.20	46.71	Peak	No limit
2	5699.2220	66.59	38.40	104.99	68.20	36.79	AVG	No limit
3	5725.0000	26.51	38.50	65.01	68.20	-3.19	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

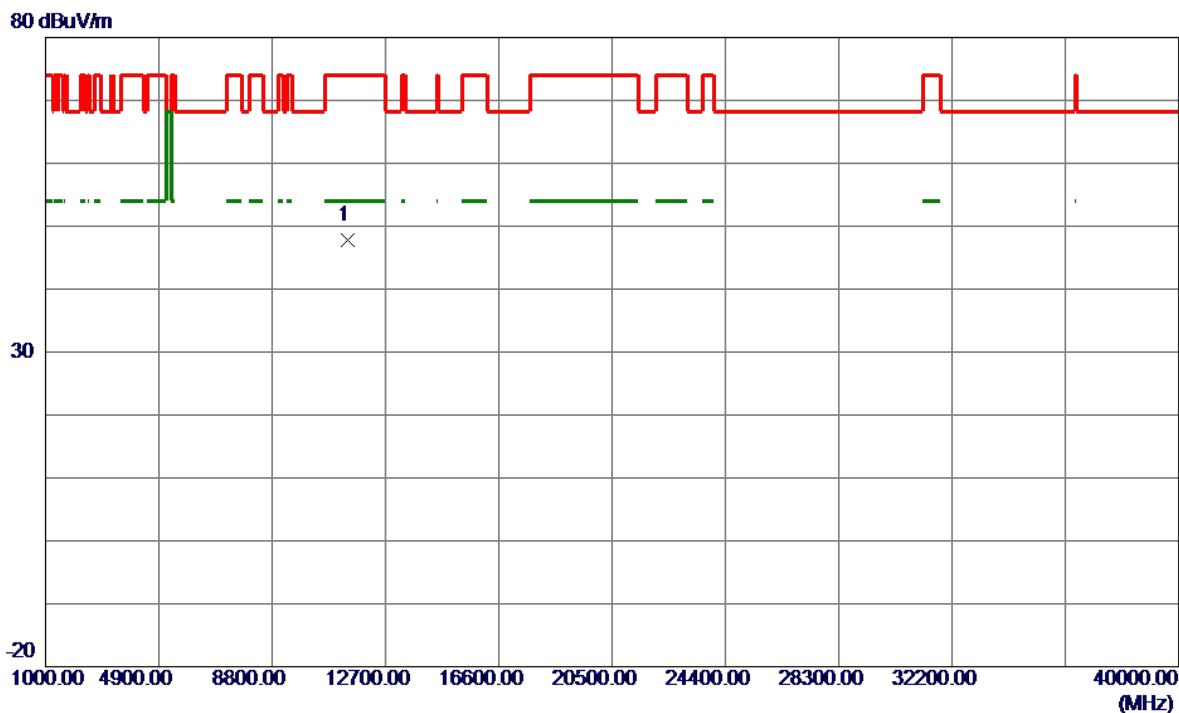


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.0000	45.64	2.13	47.77	74.00	-26.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

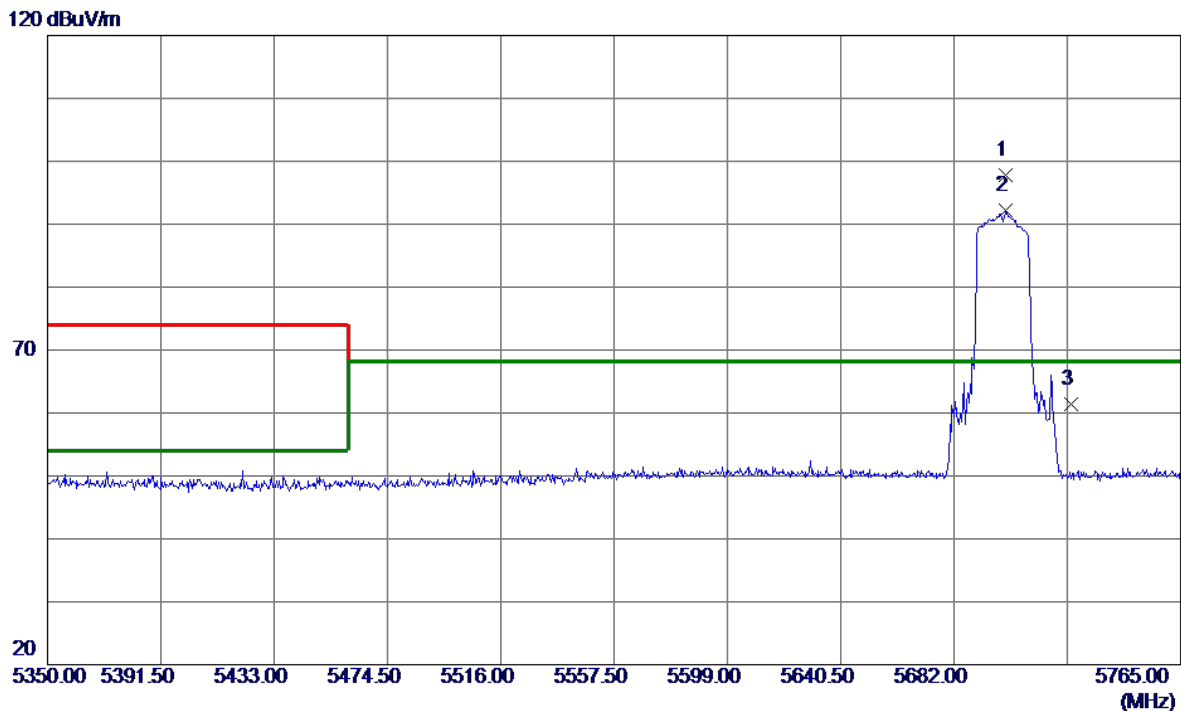


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5701.0900	59.48	38.41	97.89	68.20	29.69	Peak	No limit
2	5701.0900	53.84	38.41	92.25	68.20	24.05	AVG	No limit
3	5725.0000	22.87	38.50	61.37	68.20	-6.83	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

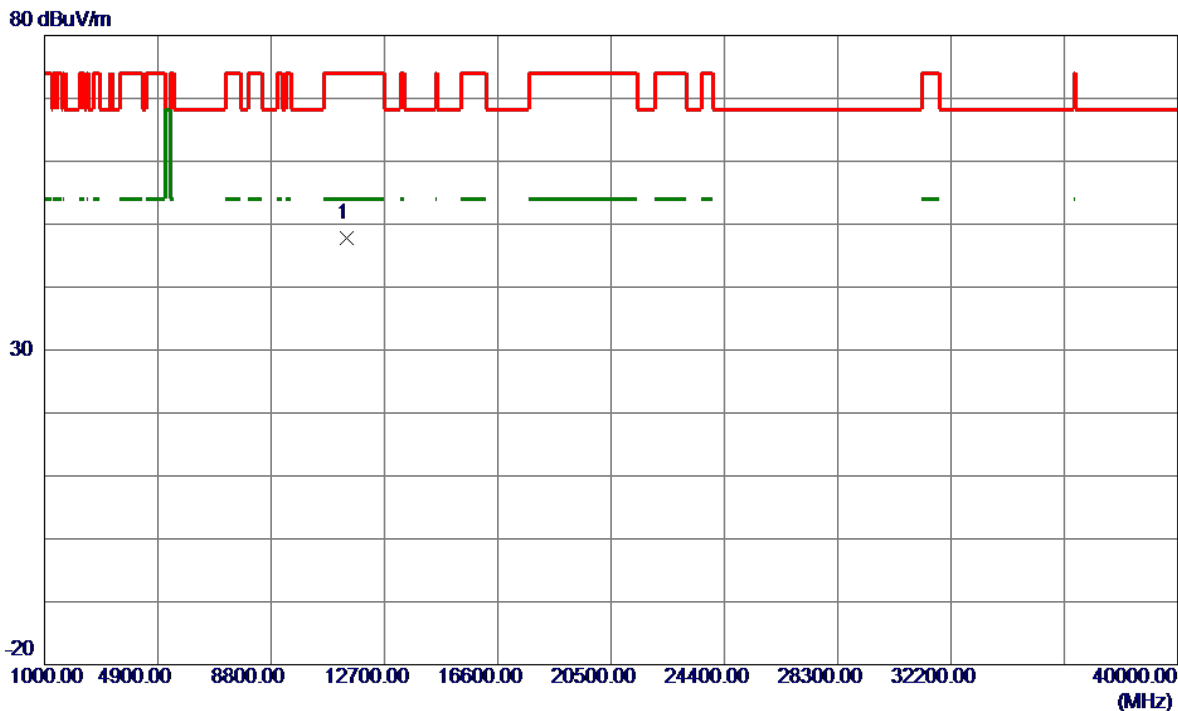


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11400.0000	45.72	2.13	47.85	74.00	-26.15	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

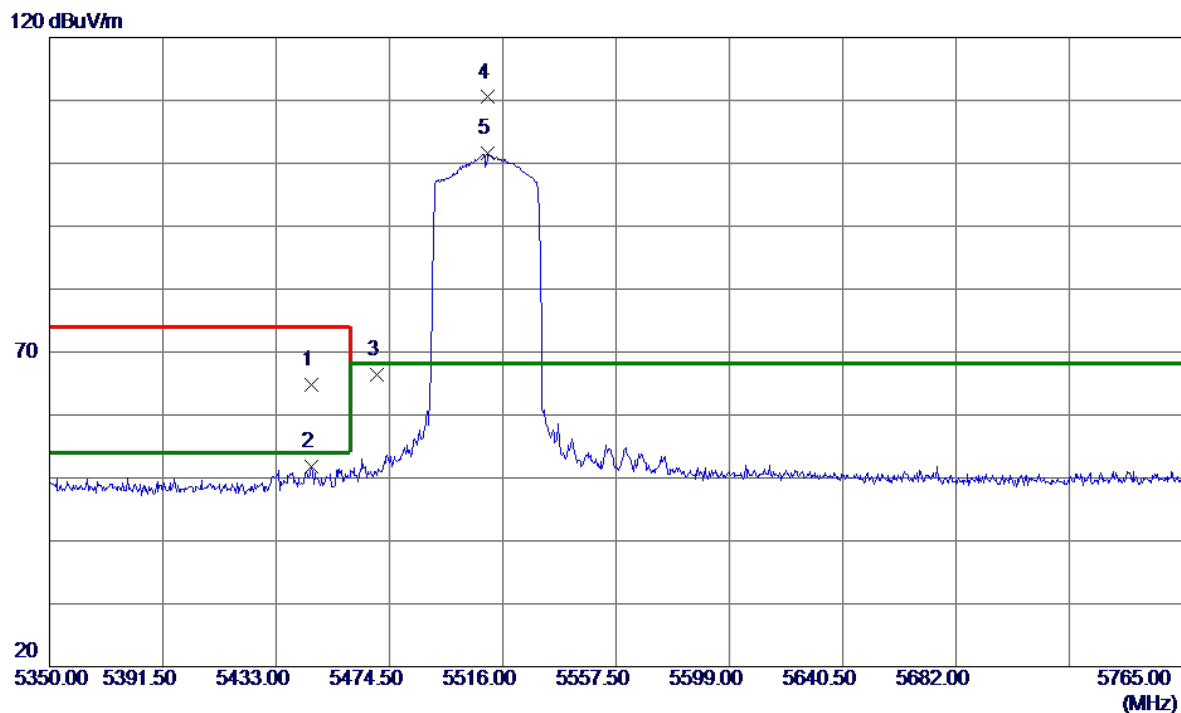


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5445.8650	26.67	38.08	64.75	74.00	-9.25	Peak	
2	5445.8650	13.72	38.08	51.80	54.00	-2.20	AVG	
3	5470.0000	28.17	38.15	66.32	68.20	-1.88	Peak	
4 *	5510.6050	72.25	38.25	110.50	68.20	42.30	Peak	No limit
5	5510.6050	63.32	38.25	101.57	68.20	33.37	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

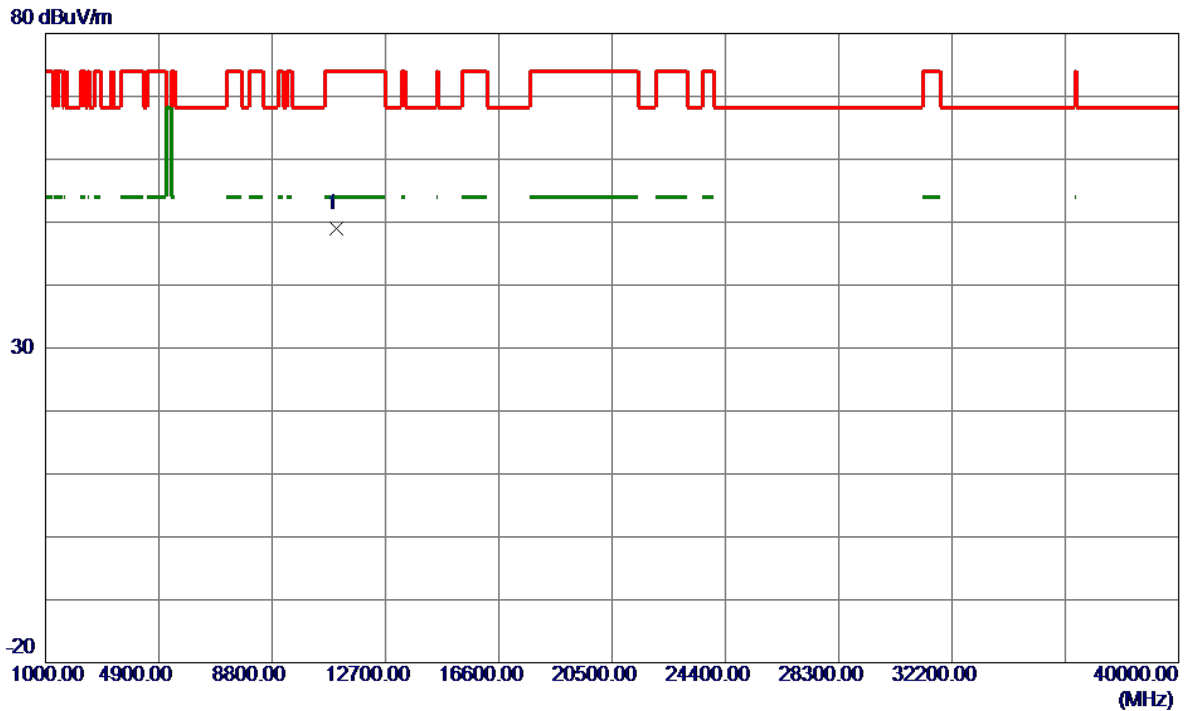


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11020.0000	46.77	2.30	49.07	74.00	-24.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

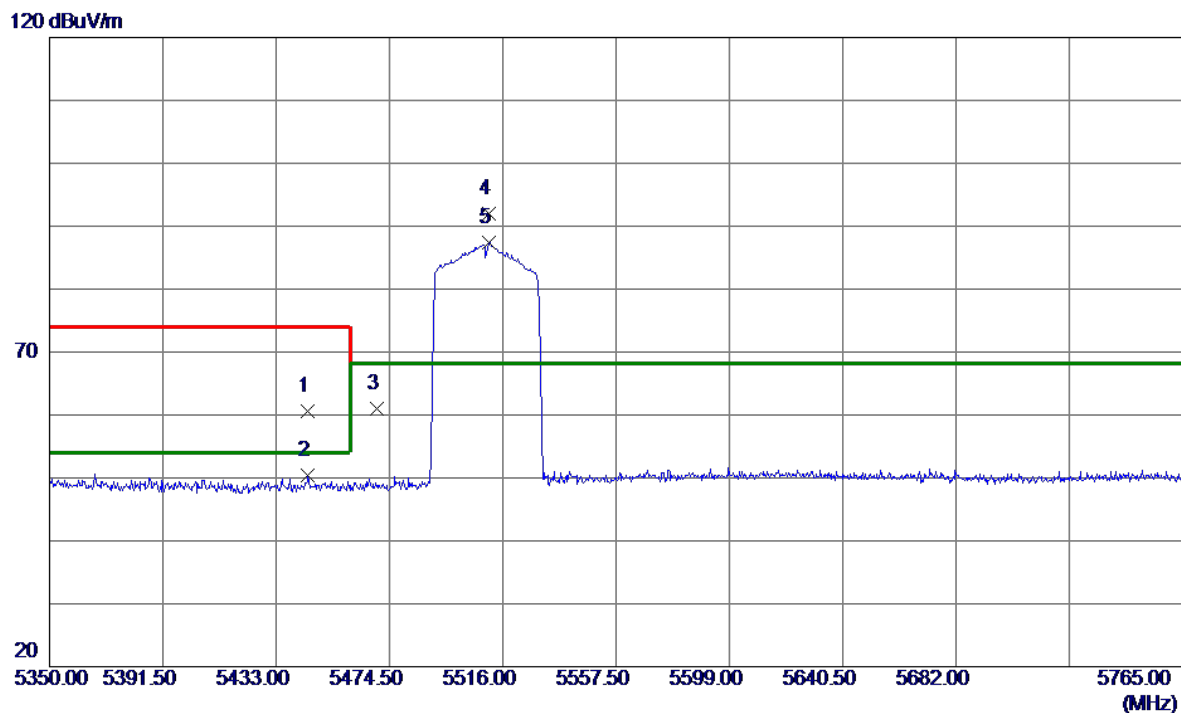


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5444.6200	22.62	38.07	60.69	74.00	-13.31	Peak	
2	5444.6200	12.31	38.07	50.38	54.00	-3.62	AVG	
3	5470.0000	22.91	38.15	61.06	68.20	-7.14	Peak	
4 *	5510.8130	53.66	38.25	91.91	68.20	23.71	Peak	No limit
5	5510.8130	49.18	38.25	87.43	68.20	19.23	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

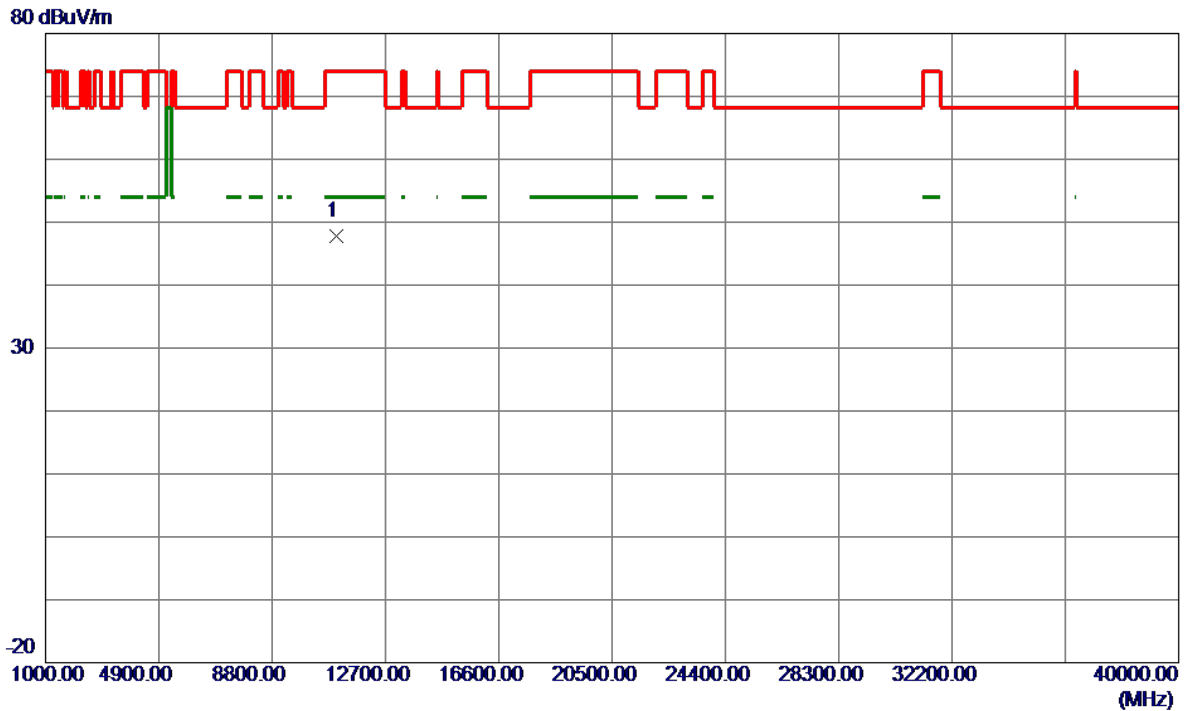


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11020.0000	45.46	2.30	47.76	74.00	-26.24	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

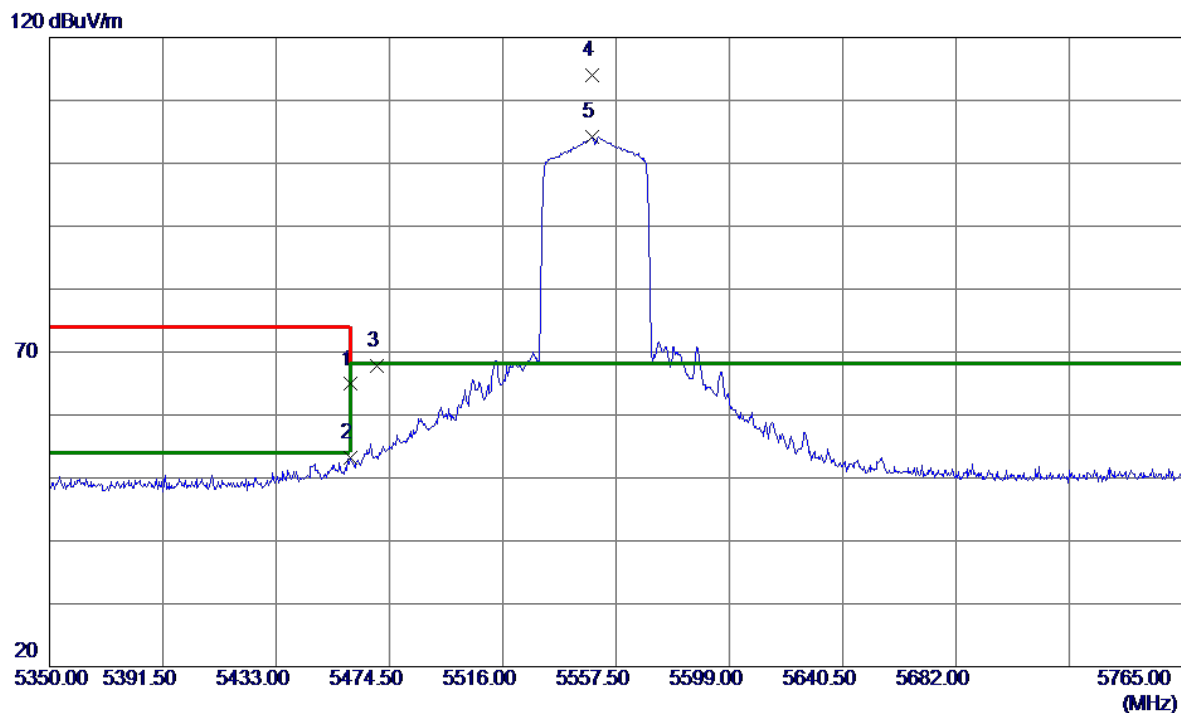


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	26.78	38.12	64.90	74.00	-9.10	Peak	
2	5460.0000	15.04	38.12	53.16	54.00	-0.84	AVG	
3	5470.0000	29.65	38.15	67.80	68.20	-0.40	Peak	
4 *	5548.7850	75.65	38.29	113.94	68.20	45.74	Peak	No limit
5	5548.7850	65.86	38.29	104.15	68.20	35.95	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

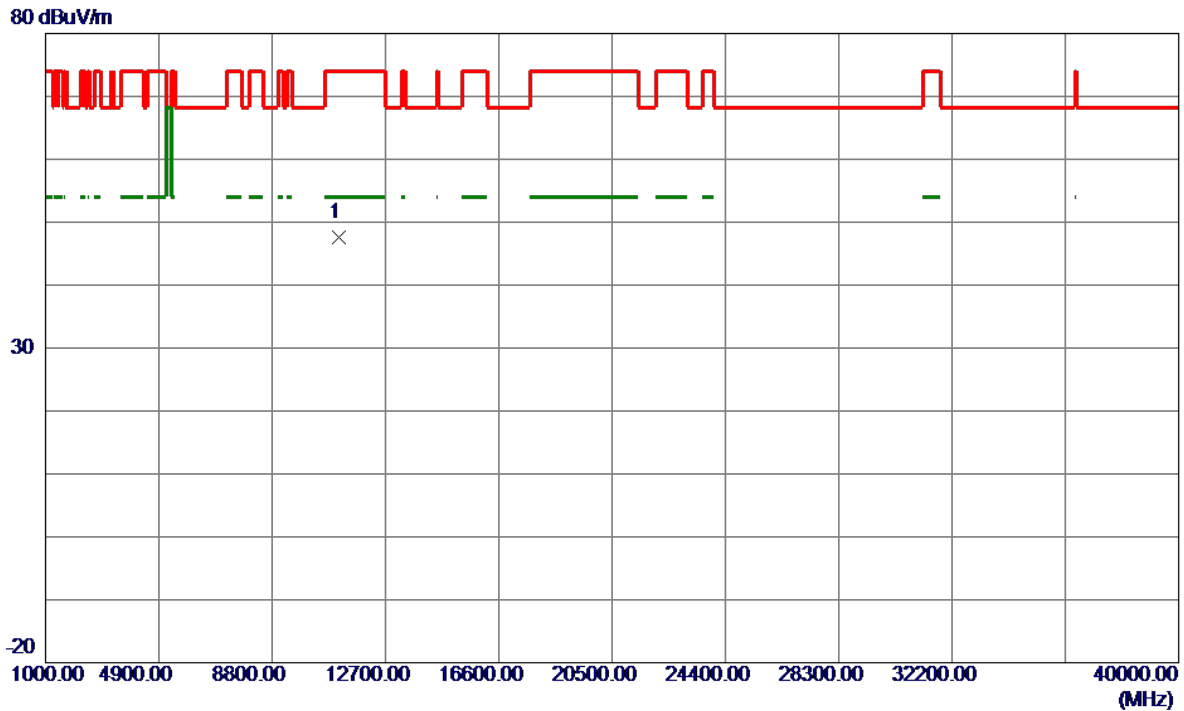


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.0000	45.36	2.15	47.51	74.00	-26.49	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

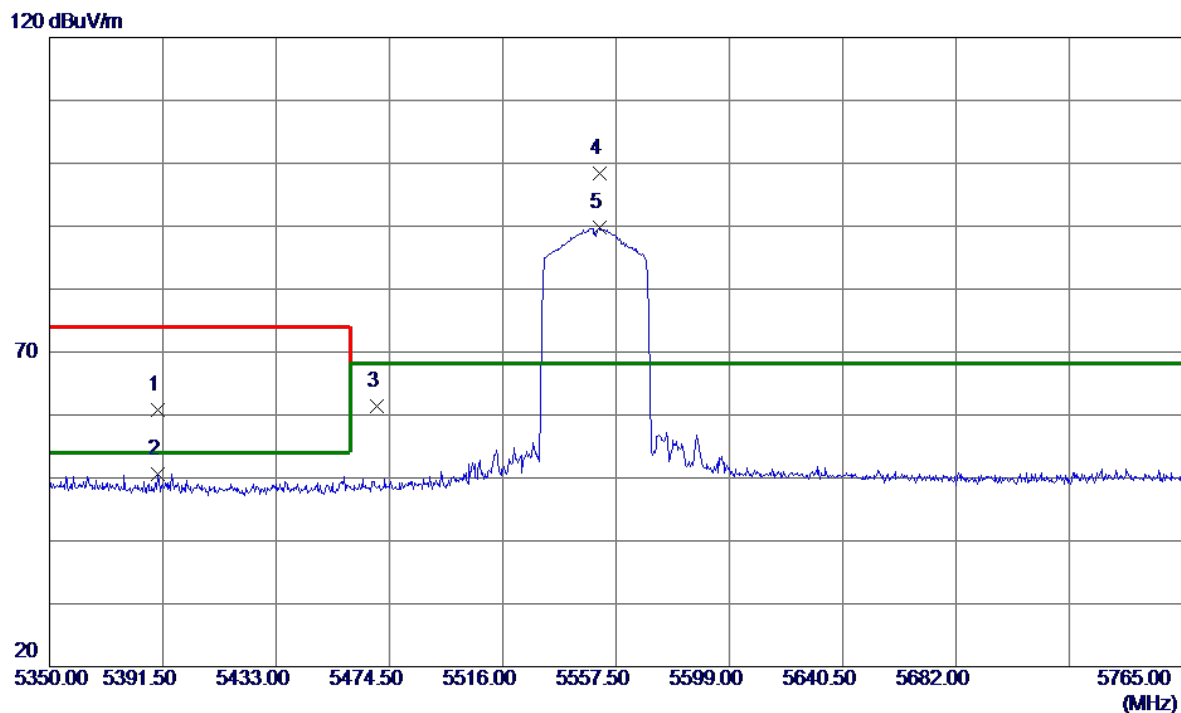


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5389.8400	22.81	37.90	60.71	74.00	-13.29	Peak	
2	5389.8400	12.70	37.90	50.60	54.00	-3.40	AVG	
3	5470.0000	23.27	38.15	61.42	68.20	-6.78	Peak	
4 *	5551.4830	60.08	38.29	98.37	68.20	30.17	Peak	No limit
5	5551.4830	51.43	38.29	89.72	68.20	21.52	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

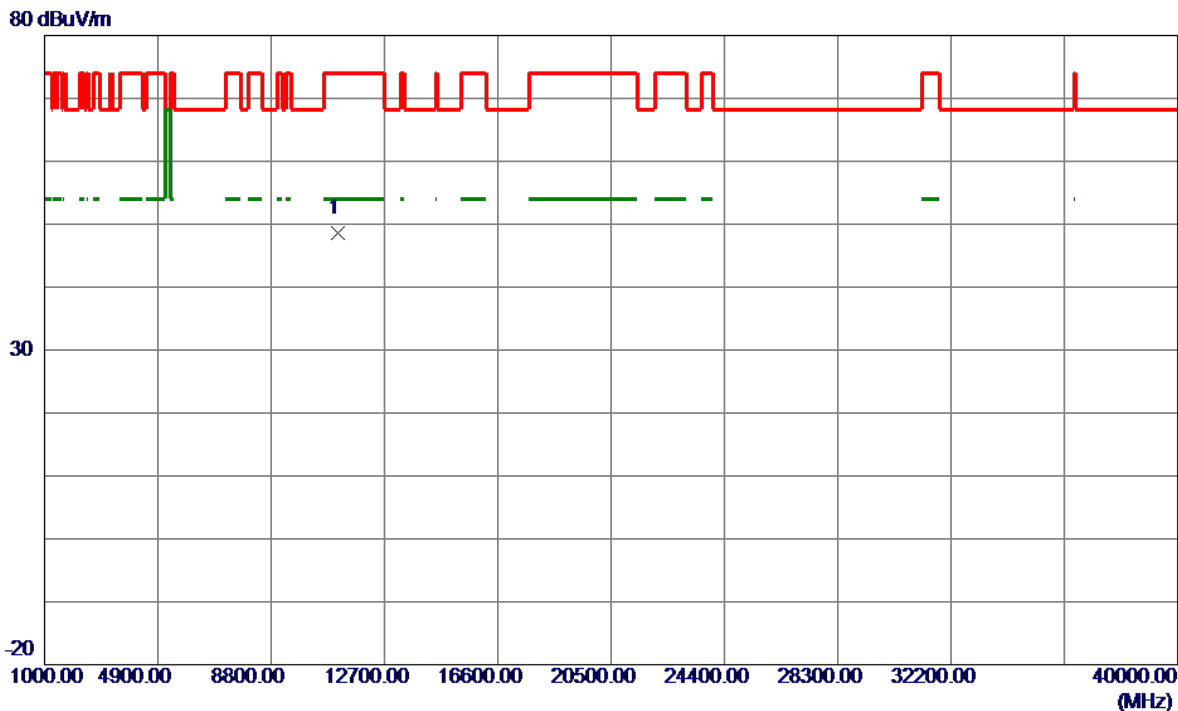


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11100.0000	46.40	2.15	48.55	74.00	-25.45	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

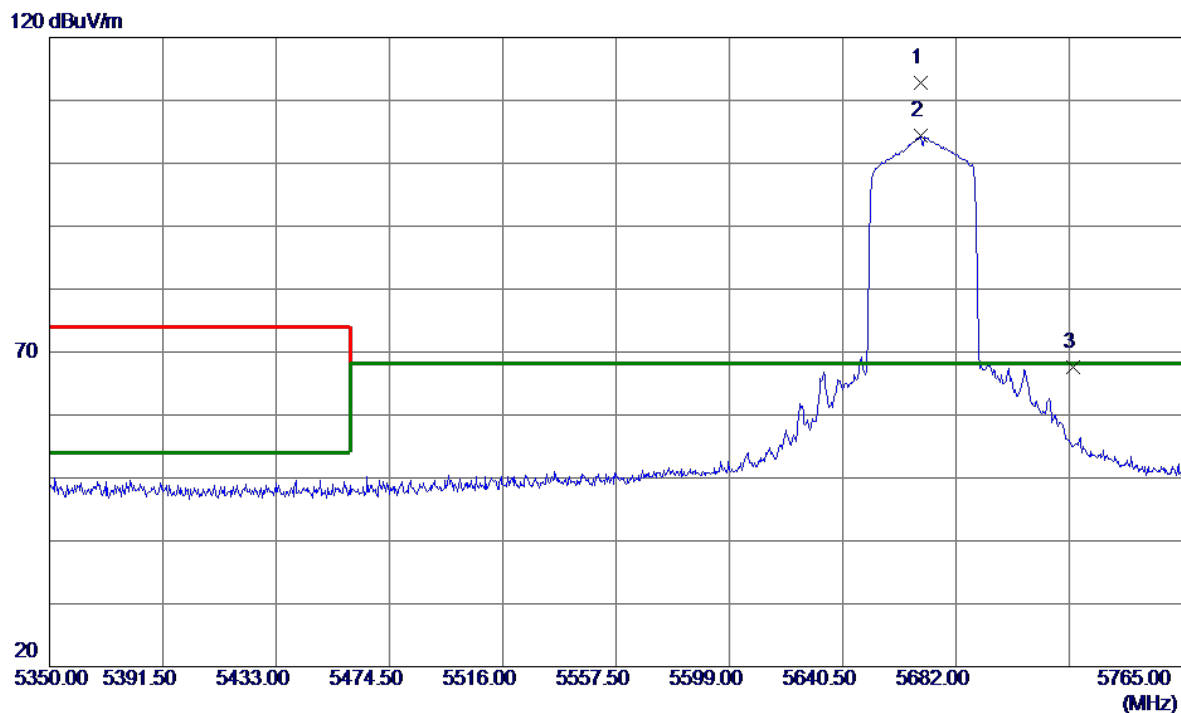


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5669.1349	74.38	38.38	112.76	68.20	44.56	Peak	No limit
2	5669.1349	66.07	38.38	104.45	68.20	36.25	AVG	No limit
3	5725.0000	29.03	38.50	67.53	68.20	-0.67	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

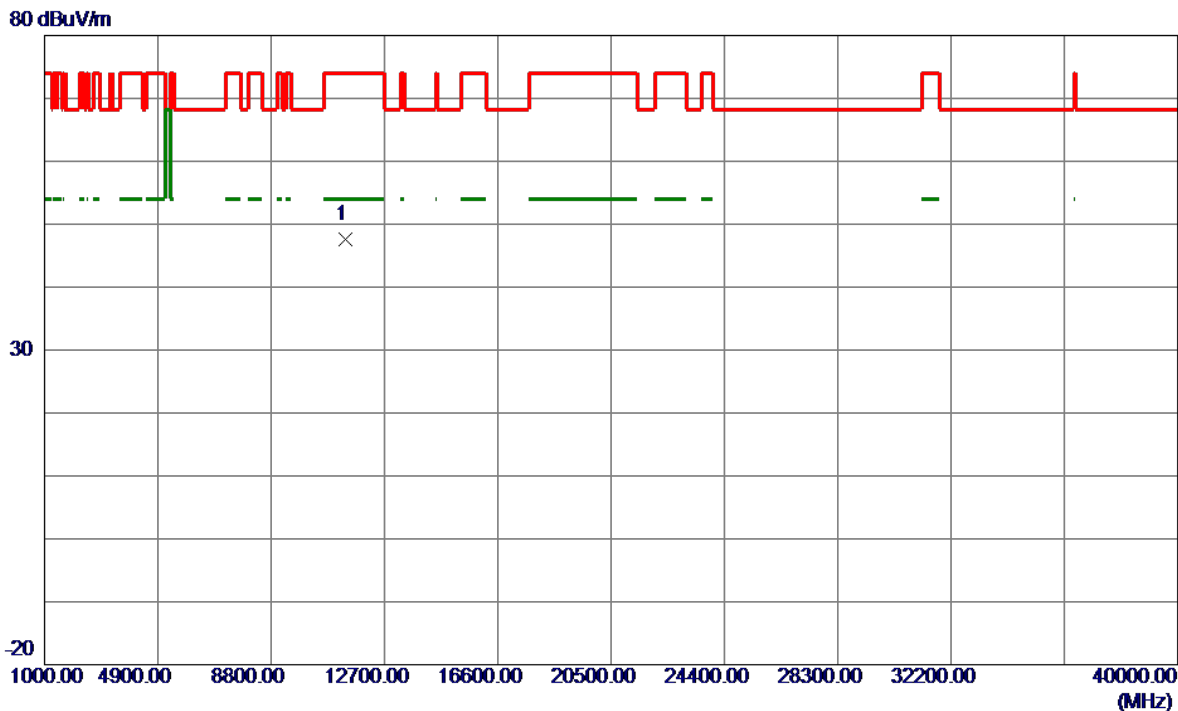


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11340.0000	45.45	2.08	47.53	74.00	-26.47	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

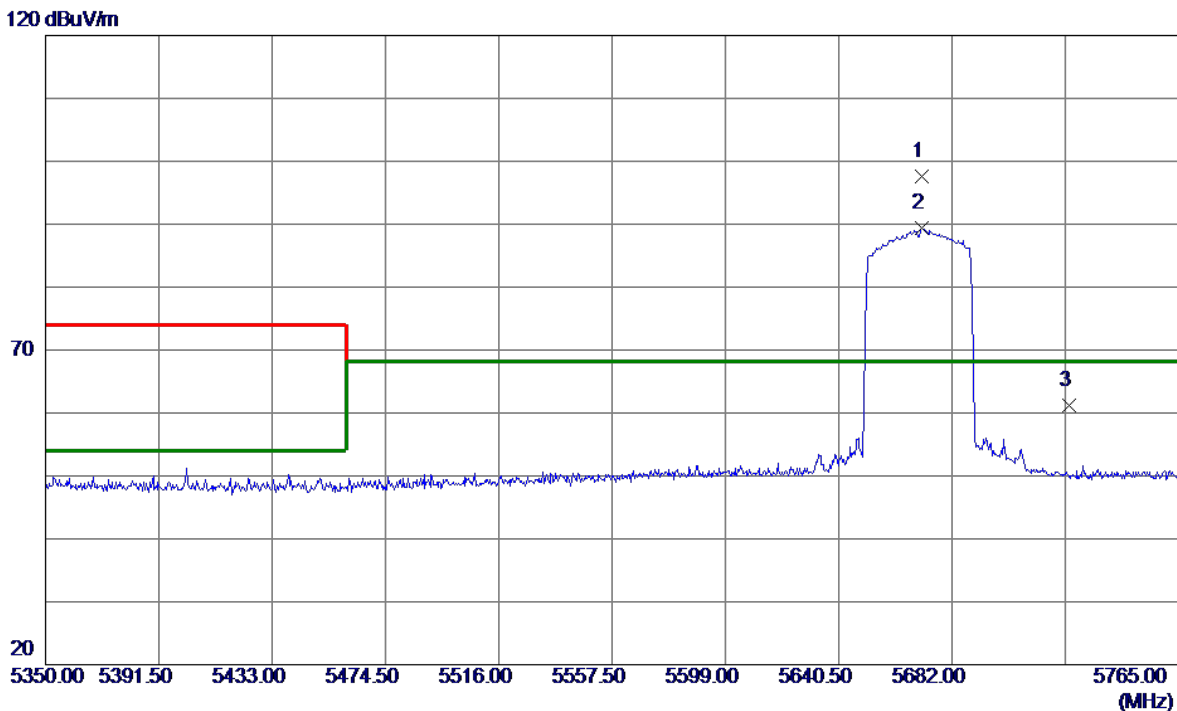


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5670.7950	59.30	38.39	97.69	68.20	29.49	Peak	No limit
2	5670.7950	51.04	38.39	89.43	68.20	21.23	AVG	No limit
3	5725.0000	22.62	38.50	61.12	68.20	-7.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

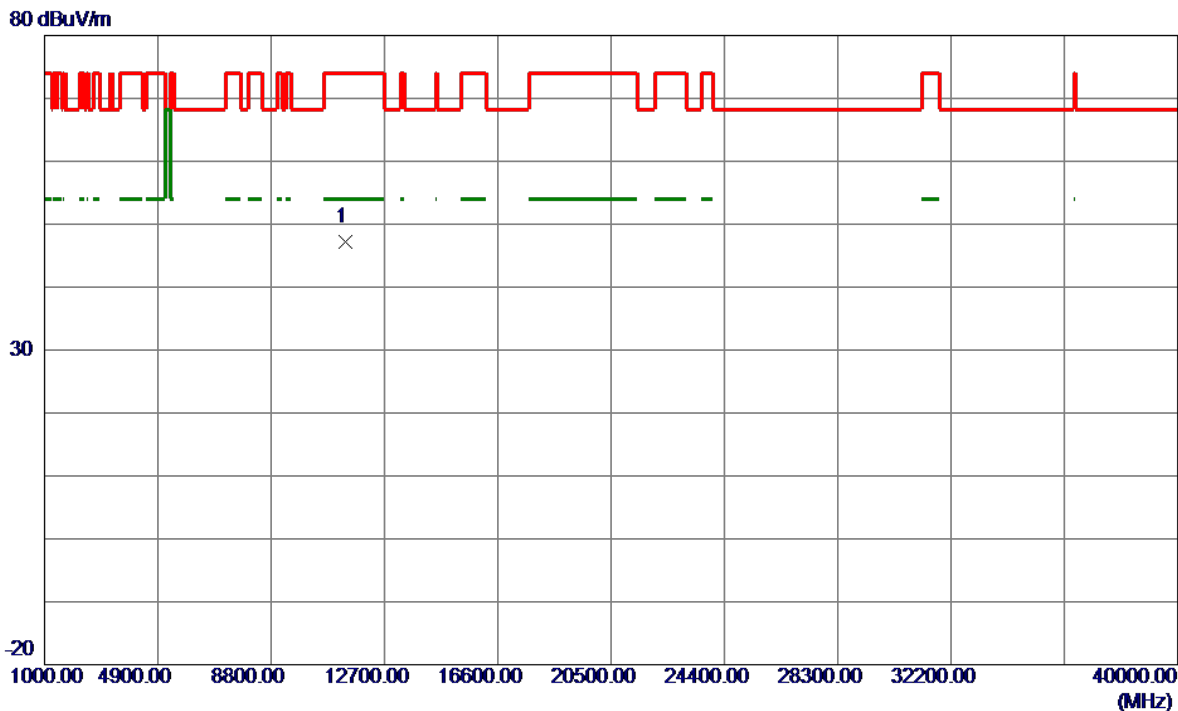


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11340.0000	45.13	2.08	47.21	74.00	-26.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

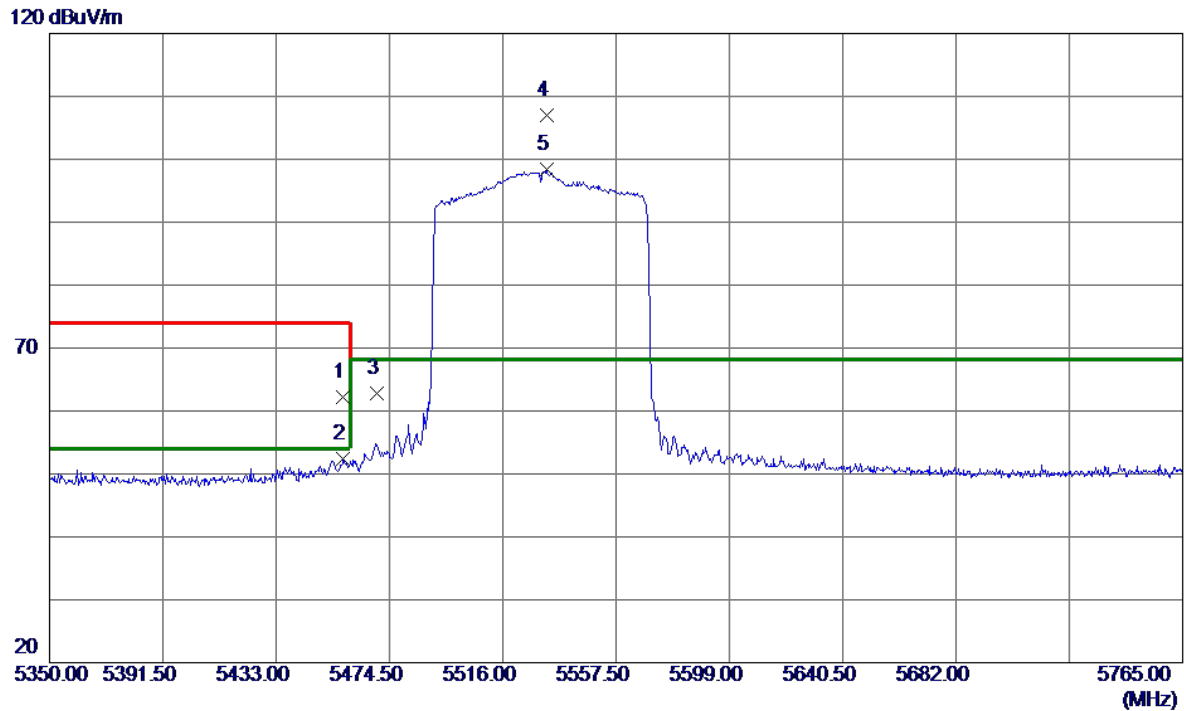


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.4850	24.01	38.11	62.12	74.00	-11.88	Peak	
2	5457.4850	14.27	38.11	52.38	54.00	-1.62	AVG	
3	5470.0000	24.72	38.15	62.87	68.20	-5.33	Peak	
4 *	5531.9770	68.65	38.27	106.92	68.20	38.72	Peak	No limit
5	5531.9770	60.04	38.27	98.31	68.20	30.11	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

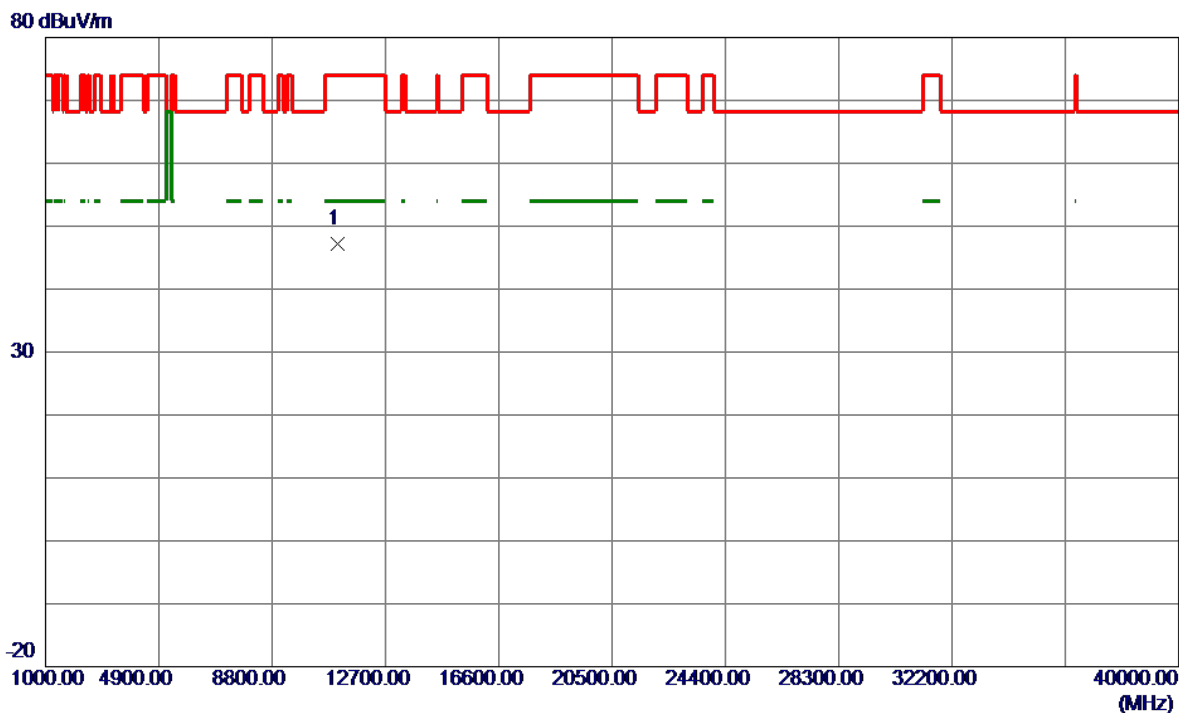


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11060.0000	45.05	2.23	47.28	74.00	-26.72	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

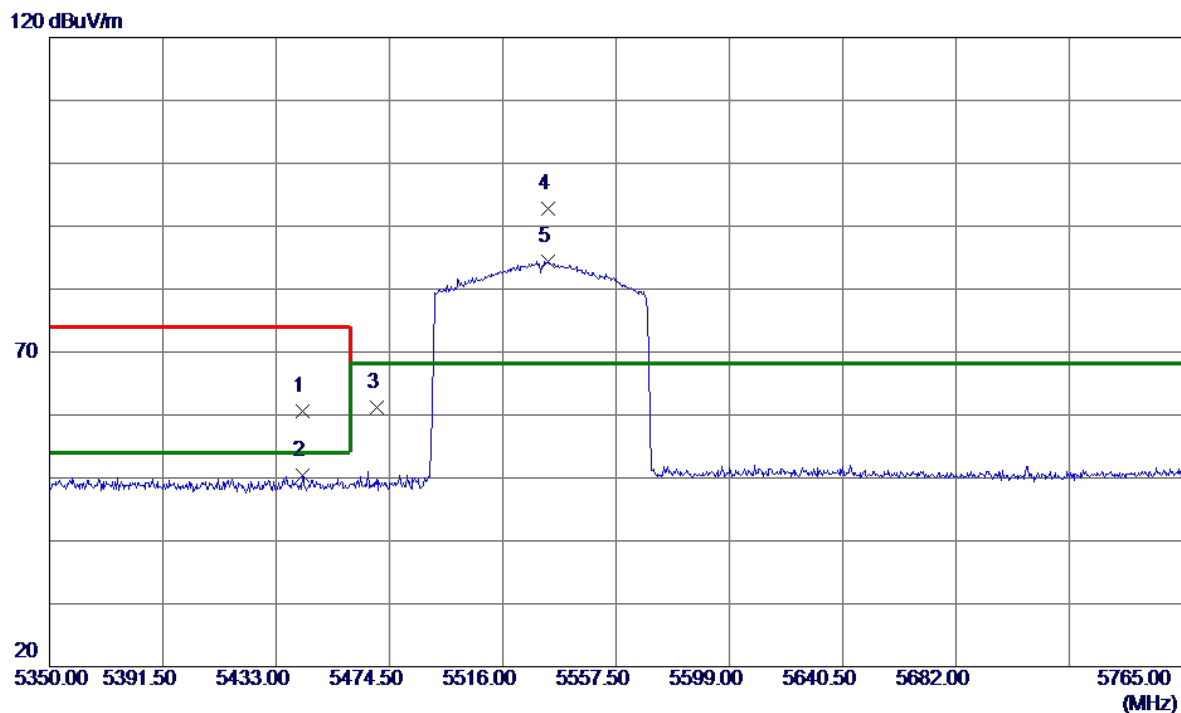


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5442.7519	22.44	38.07	60.51	74.00	-13.49	Peak	
2	5442.7519	12.32	38.07	50.39	54.00	-3.61	AVG	
3	5470.0000	22.98	38.15	61.13	68.20	-7.07	Peak	
4 *	5532.6000	54.53	38.27	92.80	68.20	24.60	Peak	No limit
5	5532.6000	46.15	38.27	84.42	68.20	16.22	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

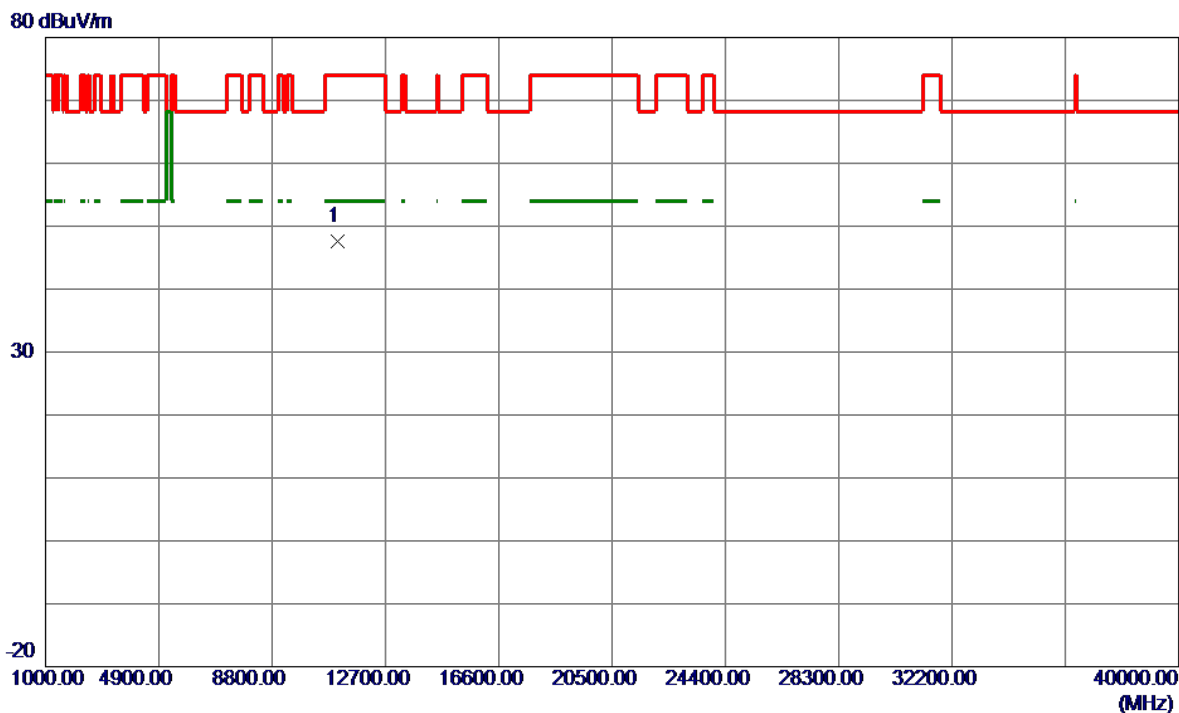


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11060.0000	45.30	2.23	47.53	74.00	-26.47	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

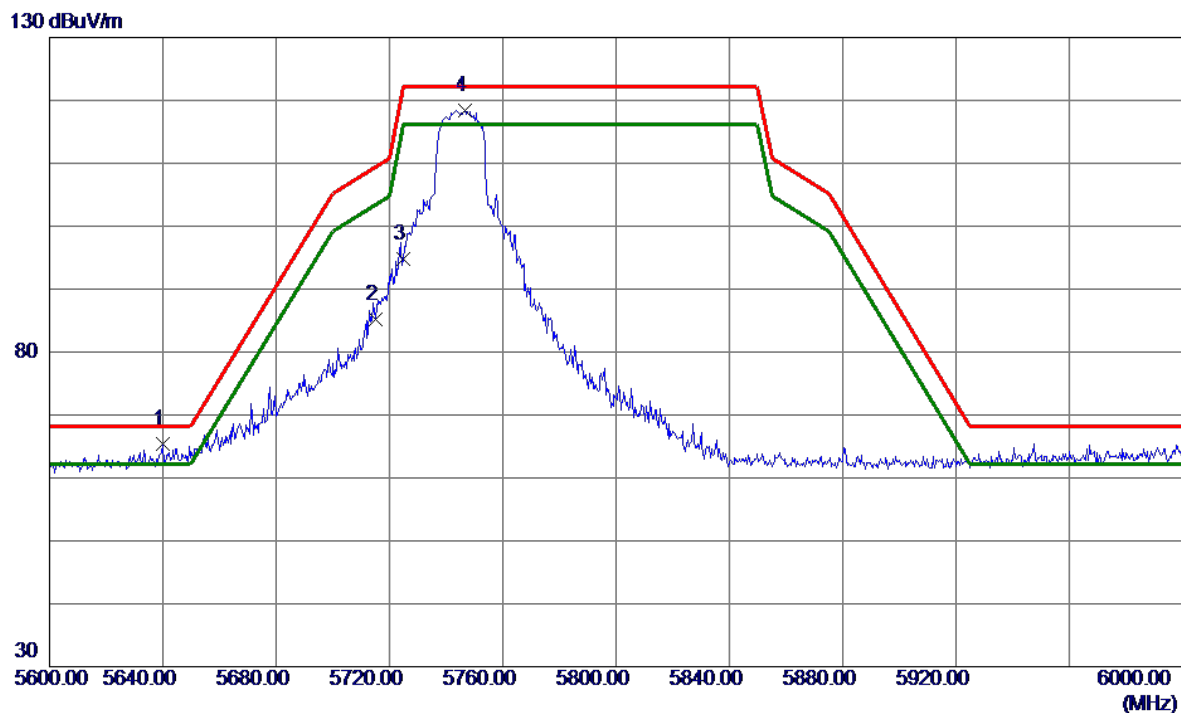


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5639.8000	27.02	38.37	65.39	68.20	-2.81	Peak	
2	5715.0000	46.81	38.46	85.27	109.40	-24.13	Peak	
3	5725.0000	56.31	38.50	94.81	122.20	-27.39	Peak	
4	5746.8000	79.90	38.58	118.48	122.20	-3.72	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

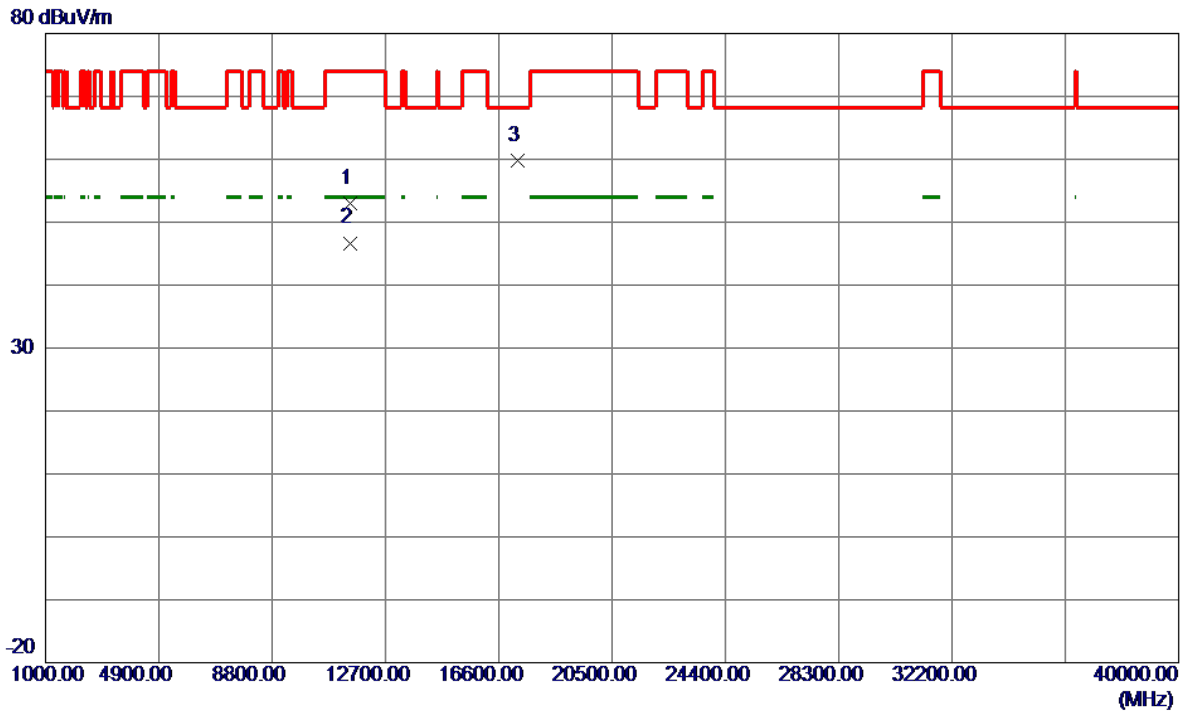


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11487.1000	50.85	2.20	53.05	74.00	-20.95	Peak	
2 *	11488.1120	44.50	2.20	46.70	54.00	-7.30	AVG	
3	17235.7000	53.13	6.63	59.76	68.20	-8.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

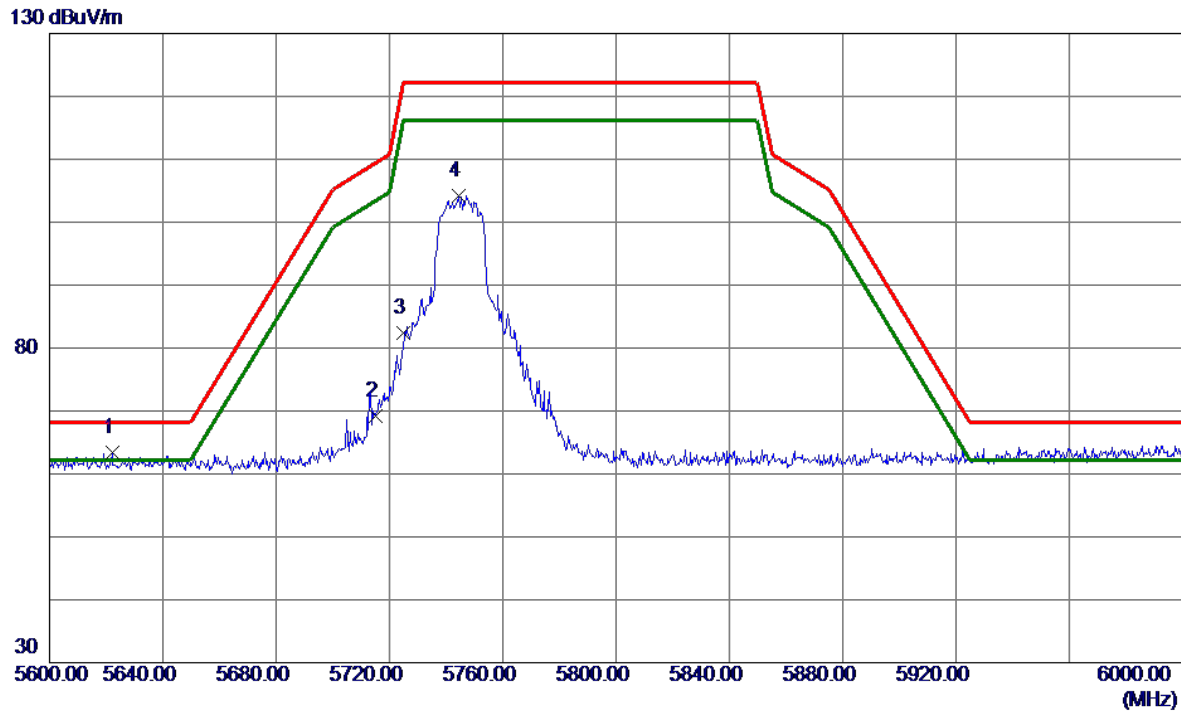


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5622.2000	25.04	38.35	63.39	68.20	-4.81	Peak	
2	5715.0000	30.67	38.46	69.13	109.40	-40.27	Peak	
3	5725.0000	43.97	38.50	82.47	122.20	-39.73	Peak	
4	5744.4000	65.69	38.57	104.26	122.20	-17.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

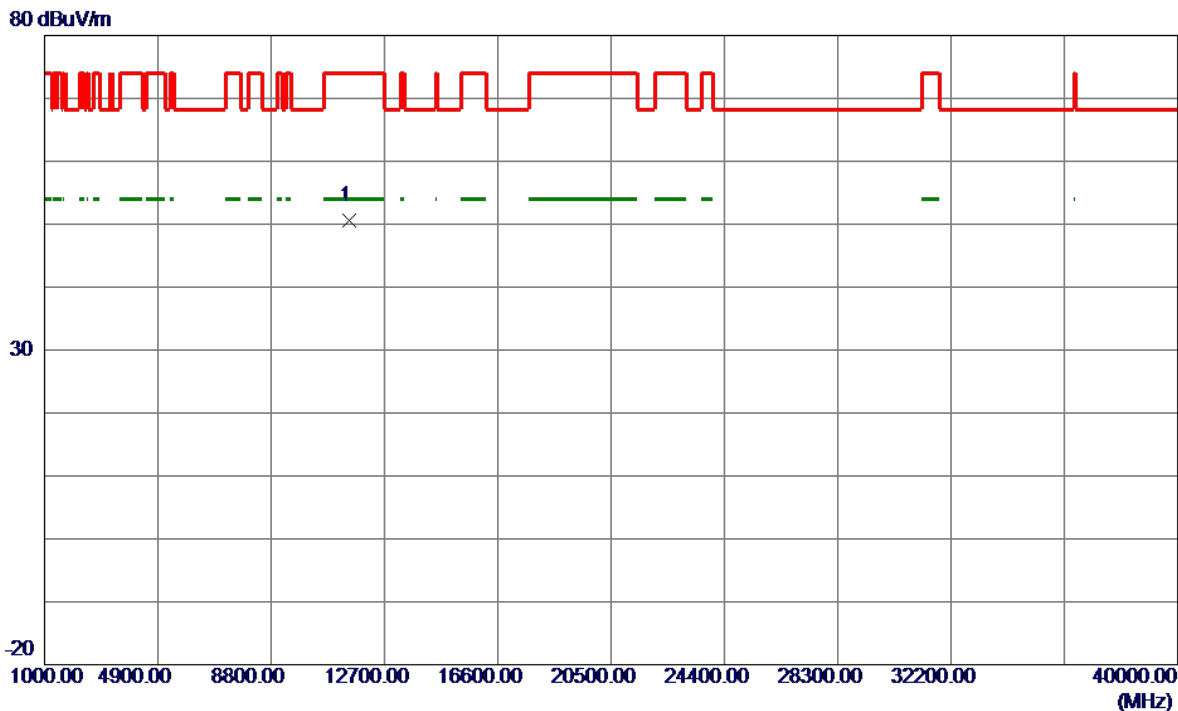


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11487.1000	48.44	2.20	50.64	74.00	-23.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

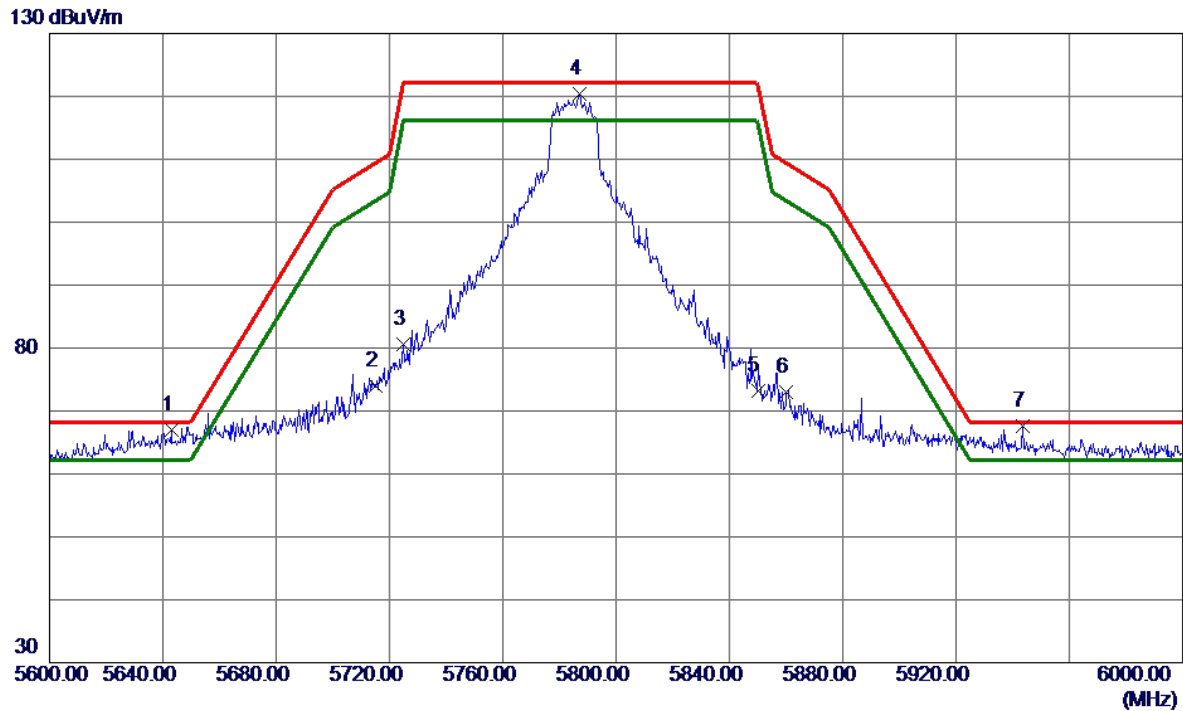


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5643.0000	28.68	38.37	67.05	68.20	-1.15	Peak	
2	5715.0000	35.50	38.46	73.96	109.40	-35.44	Peak	
3	5725.0000	42.06	38.50	80.56	122.20	-41.64	Peak	
4	5787.0000	81.76	38.73	120.49	122.20	-1.71	Peak	
5	5850.0000	34.23	38.91	73.14	122.20	-49.06	Peak	
6	5860.0000	34.11	38.94	73.05	109.40	-36.35	Peak	
7 *	5943.6000	28.44	39.14	67.58	68.20	-0.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

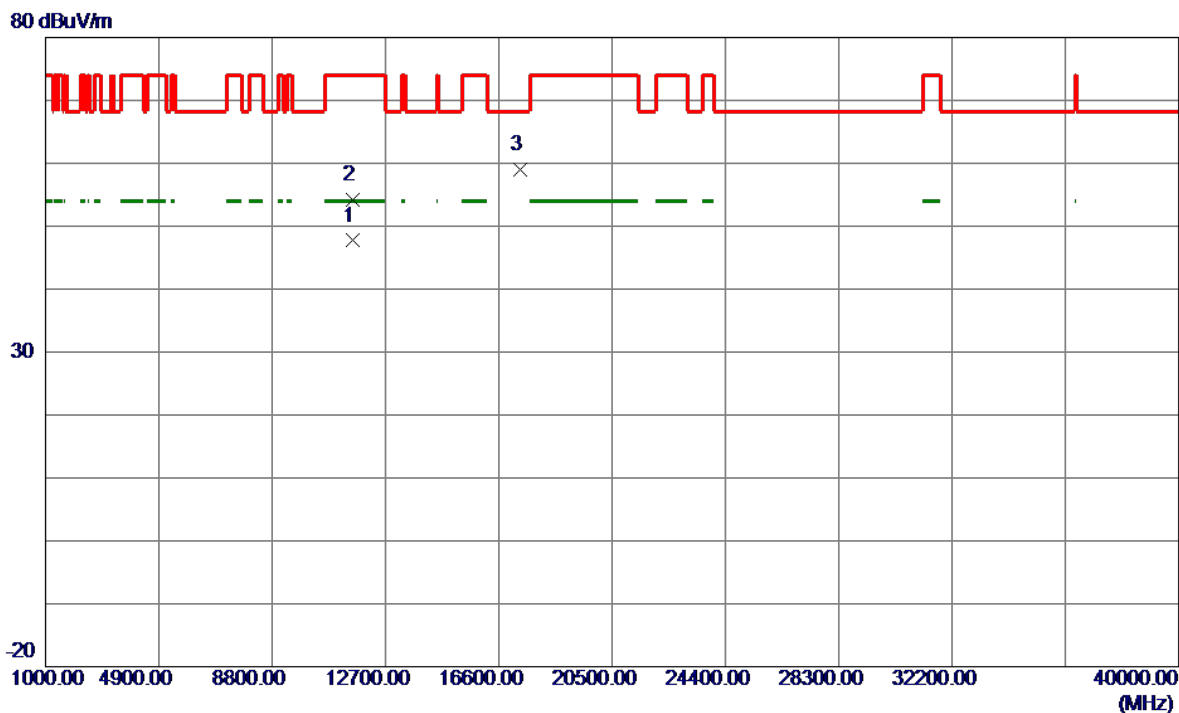


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.7820	45.42	2.28	47.70	54.00	-6.30	AVG	
2	11576.8000	52.01	2.28	54.29	74.00	-19.71	Peak	
3	17350.7500	51.70	7.36	59.06	68.20	-9.14	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

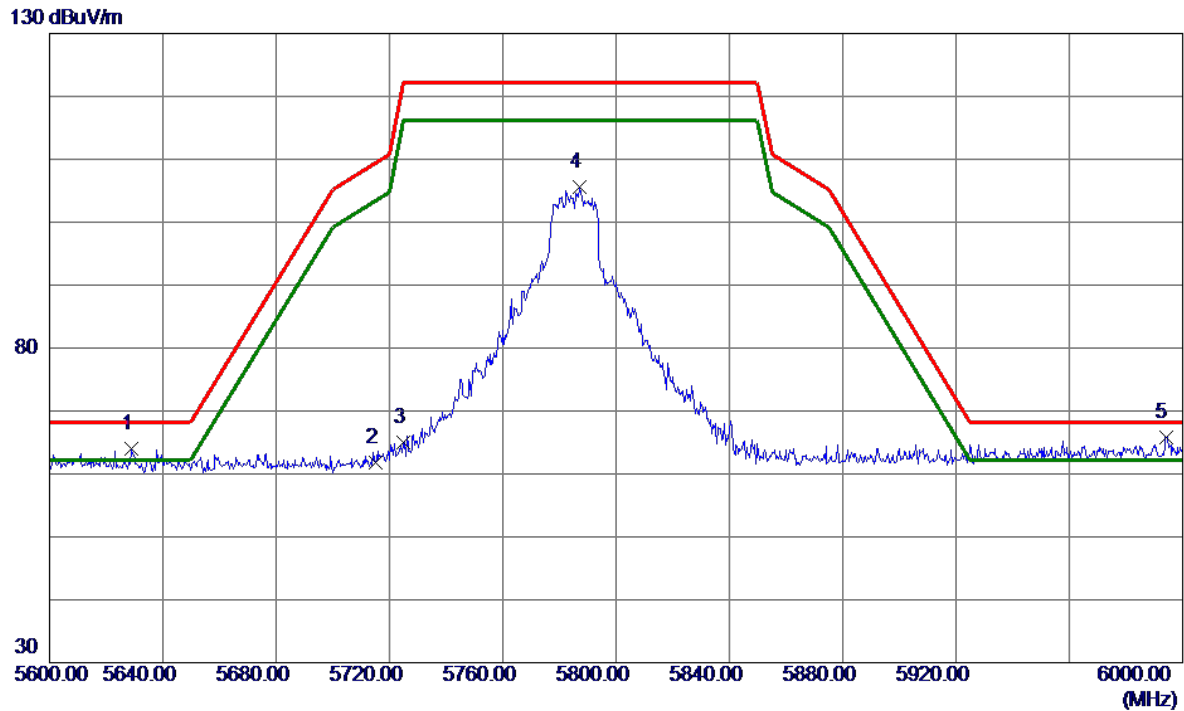


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5629.0000	25.57	38.36	63.93	68.20	-4.27	Peak	
2	5715.0000	23.28	38.46	61.74	109.40	-47.66	Peak	
3	5725.0000	26.50	38.50	65.00	122.20	-57.20	Peak	
4	5787.0000	66.78	38.73	105.51	122.20	-16.69	Peak	
5 *	5994.0000	26.60	39.24	65.84	68.20	-2.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

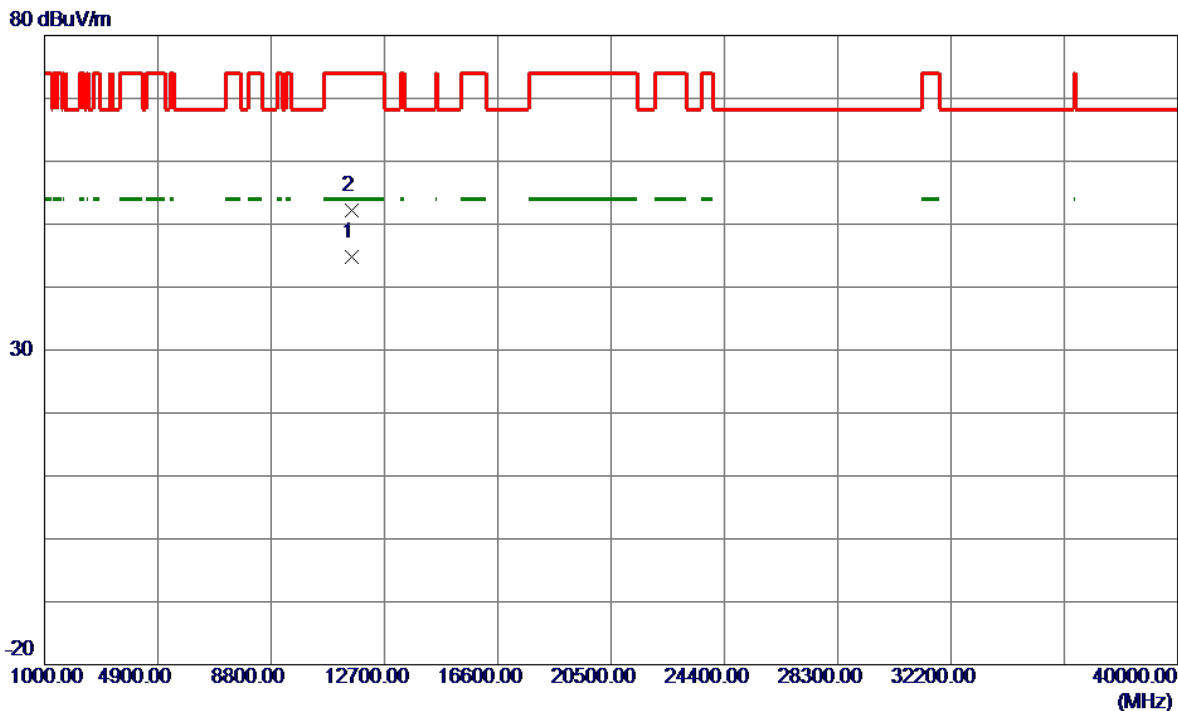


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11568.5140	42.49	2.27	44.76	54.00	-9.24	AVG	
2	11570.9500	49.91	2.28	52.19	74.00	-21.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

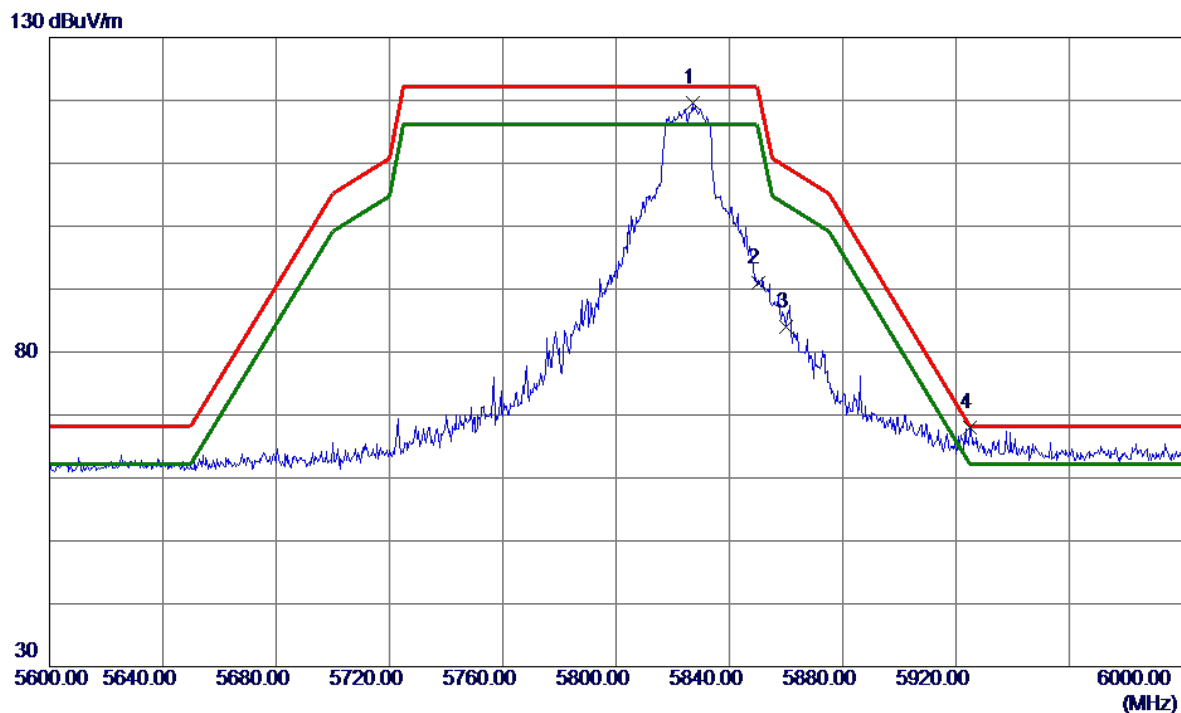


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5827.0000	80.73	38.85	119.58	122.20	-2.62	Peak	
2	5850.0000	51.99	38.91	90.90	122.20	-31.30	Peak	
3	5860.0000	44.98	38.94	83.92	109.40	-25.48	Peak	
4 *	5925.0000	28.81	39.10	67.91	68.20	-0.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

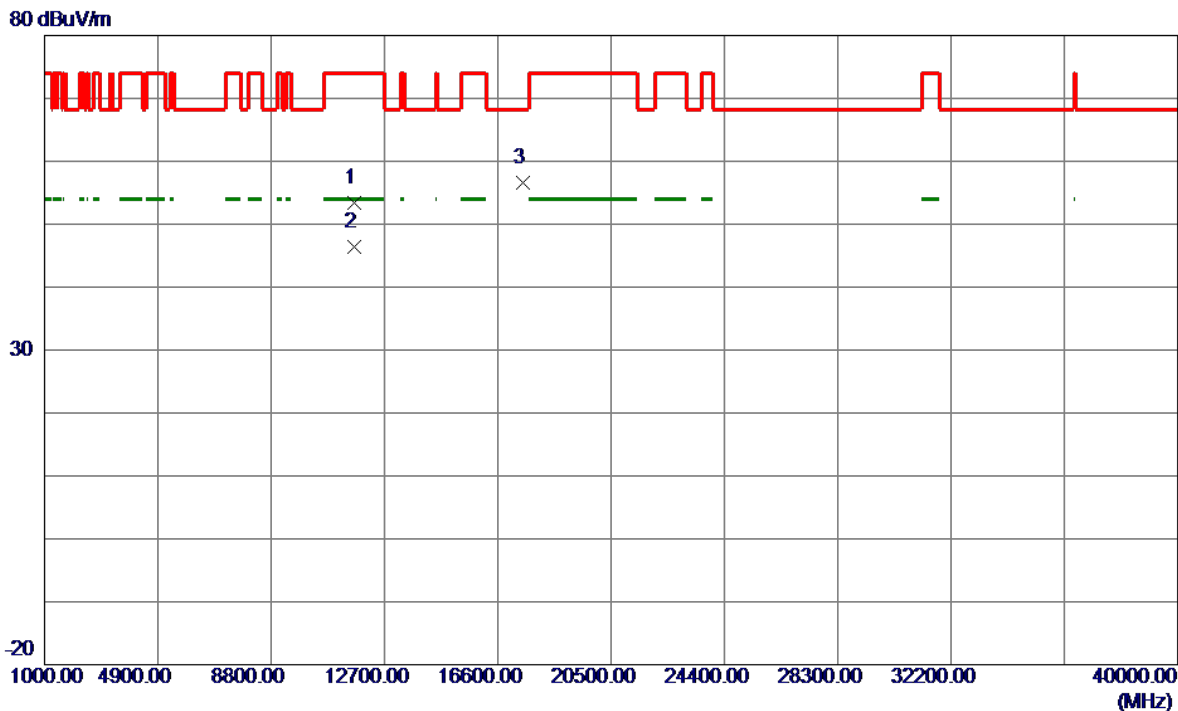


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11647.0000	51.26	2.12	53.38	74.00	-20.62	Peak	
2 *	11651.3060	44.30	2.10	46.40	54.00	-7.60	AVG	
3	17475.5500	48.66	8.03	56.69	68.20	-11.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

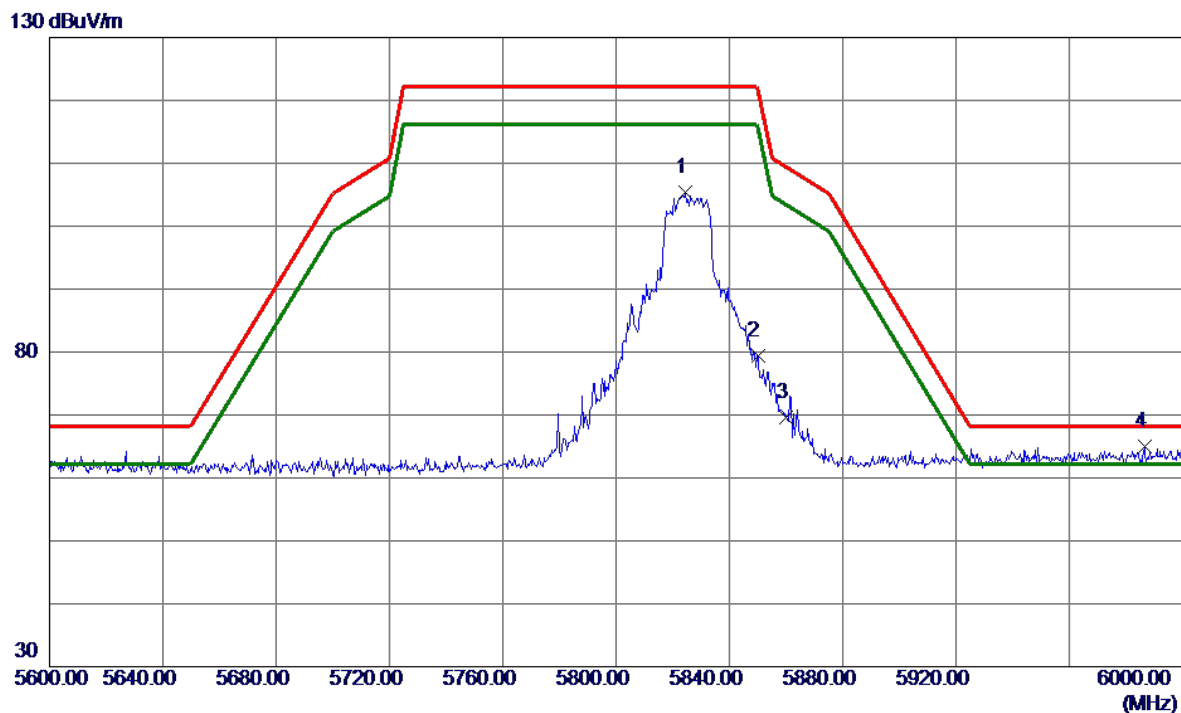

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5824.4000	66.51	38.85	105.36	122.20	-16.84	Peak	
2	5850.0000	40.41	38.91	79.32	122.20	-42.88	Peak	
3	5860.0000	30.71	38.94	69.65	109.40	-39.75	Peak	
4 *	5986.6000	25.87	39.22	65.09	68.20	-3.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------




No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11652.8500	48.85	2.09	50.94	74.00	-23.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

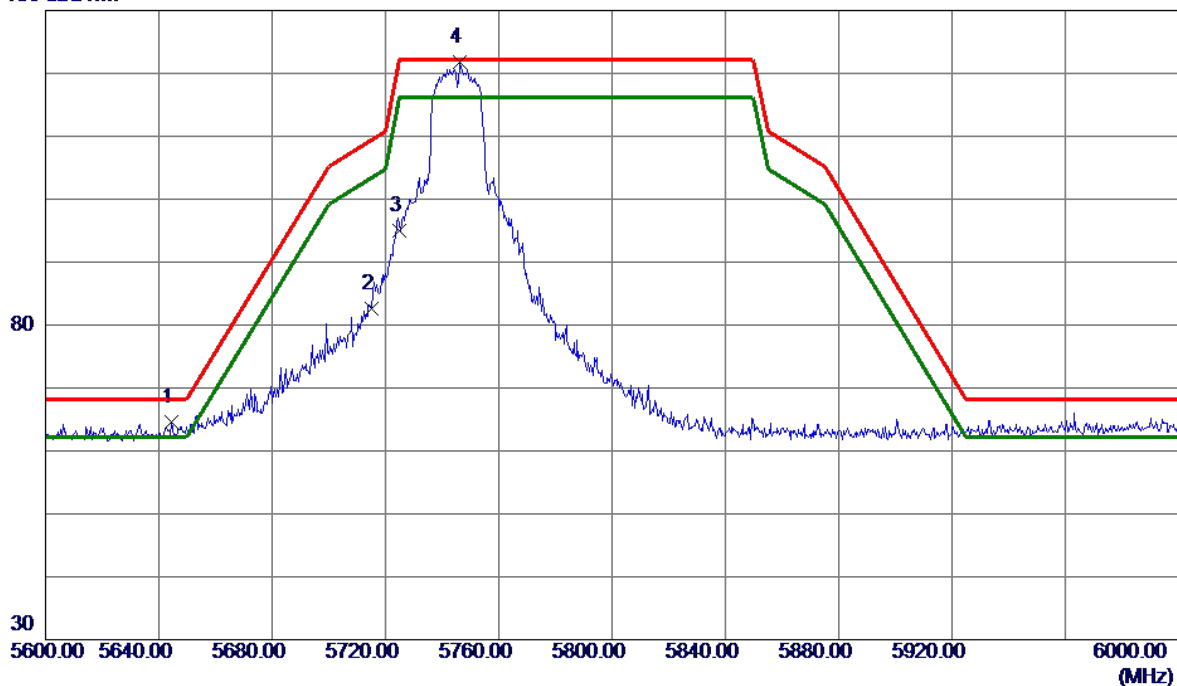


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5644.6000	26.19	38.37	64.56	68.20	-3.64	Peak	
2	5715.0000	44.21	38.46	82.67	109.40	-26.73	Peak	
3	5725.0000	56.55	38.50	95.05	122.20	-27.15	Peak	
4 *	5746.4000	83.18	38.58	121.76	122.20	-0.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

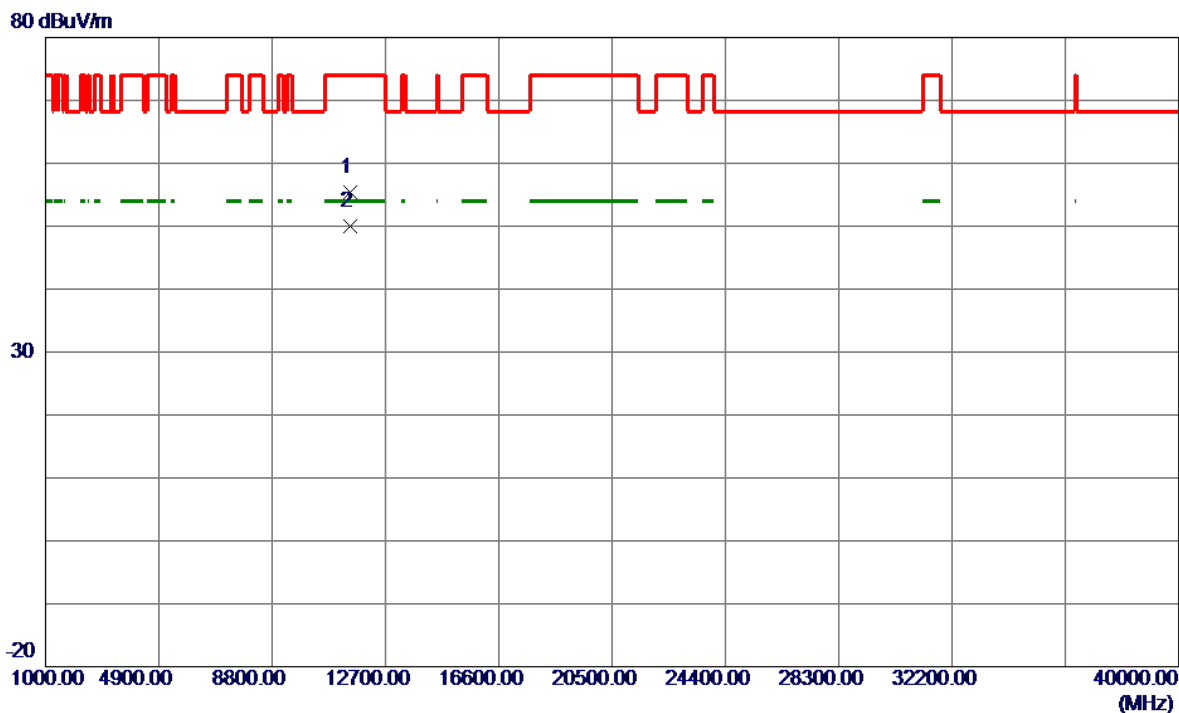


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11489.0500	53.17	2.21	55.38	74.00	-18.62	Peak	
2 *	11493.0580	47.84	2.21	50.05	54.00	-3.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

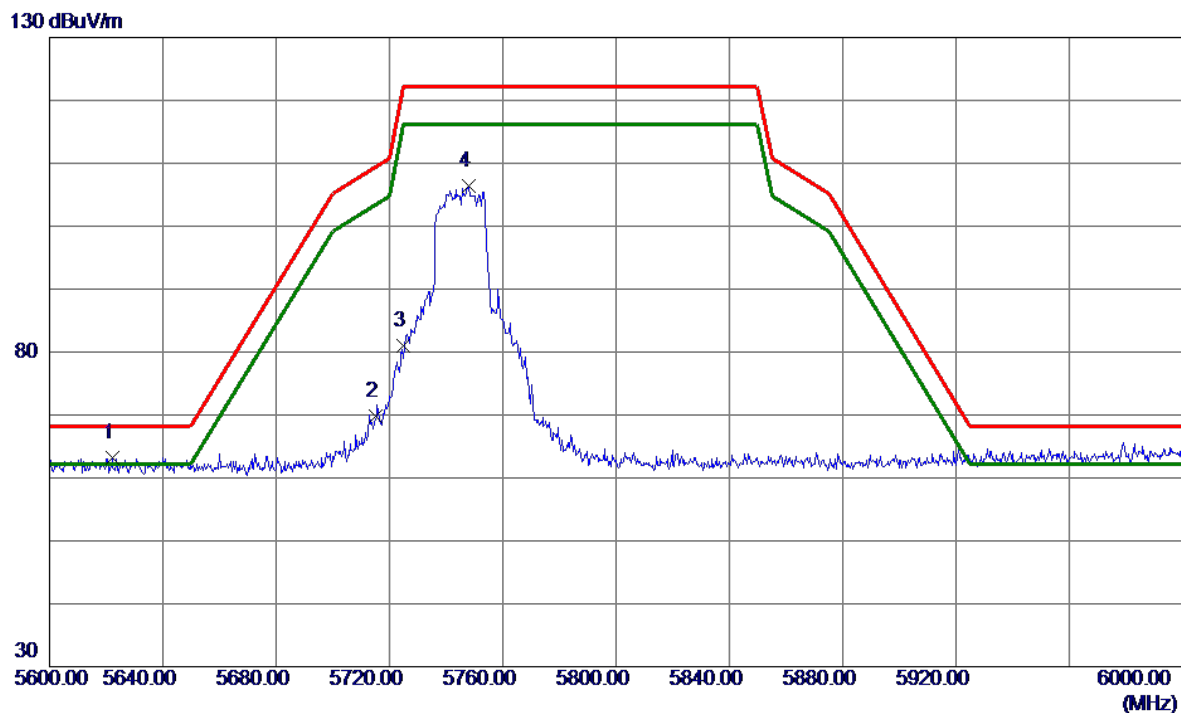


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5622.2000	24.92	38.35	63.27	68.20	-4.93	Peak	
2	5715.0000	31.43	38.46	69.89	109.40	-39.51	Peak	
3	5725.0000	42.46	38.50	80.96	122.20	-41.24	Peak	
4	5748.0000	67.73	38.58	106.31	122.20	-15.89	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

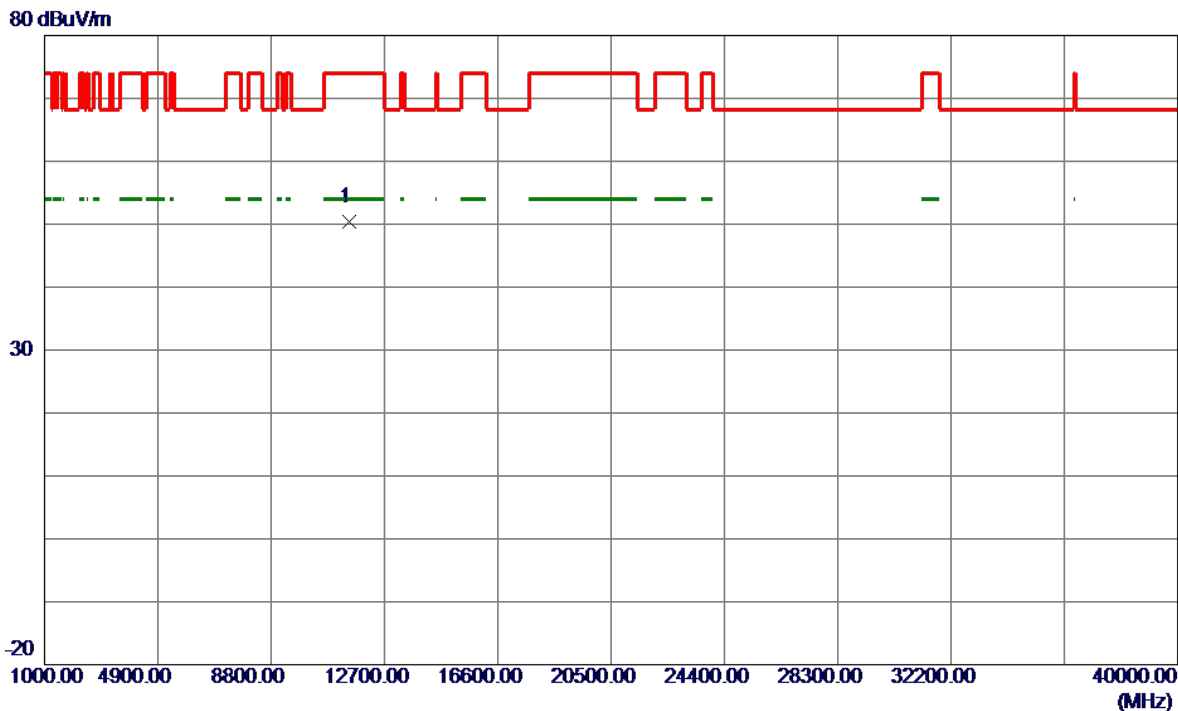


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11496.8500	48.23	2.21	50.44	74.00	-23.56	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

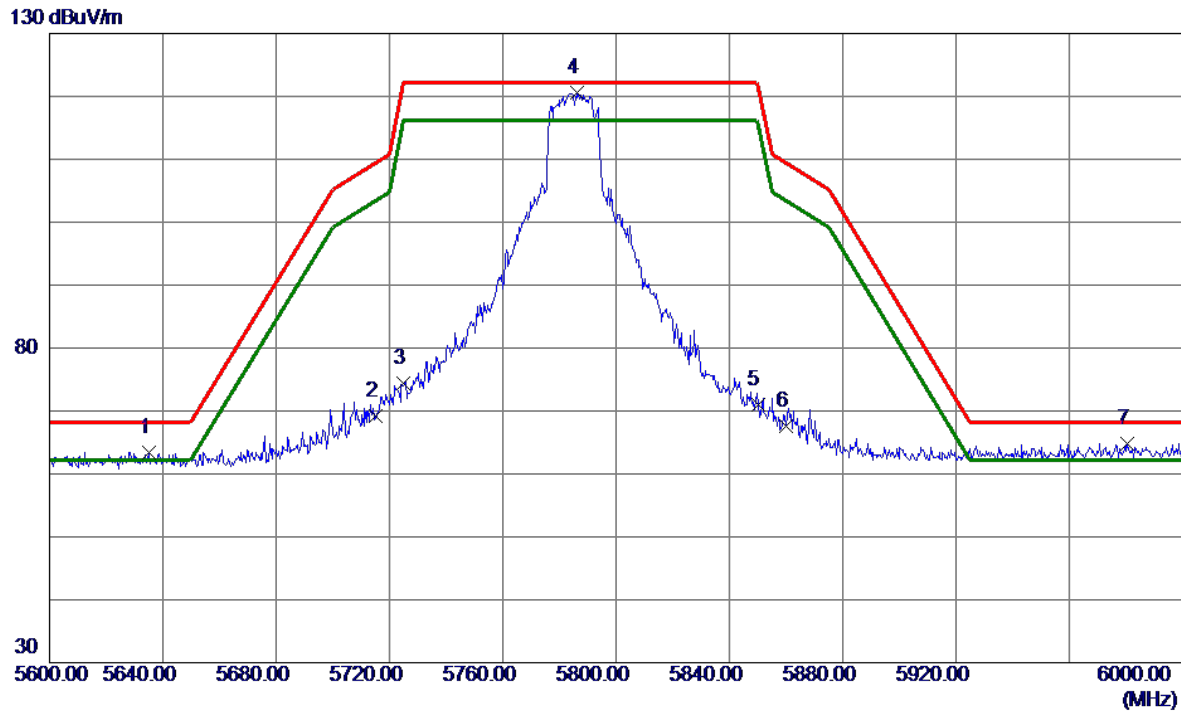


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5635.0000	25.11	38.36	63.47	68.20	-4.73	Peak	
2	5715.0000	30.79	38.46	69.25	109.40	-40.15	Peak	
3	5725.0000	35.90	38.50	74.40	122.20	-47.80	Peak	
4 *	5786.4000	81.80	38.73	120.53	122.20	-1.67	Peak	
5	5850.0000	32.15	38.91	71.06	122.20	-51.14	Peak	
6	5860.0000	28.62	38.94	67.56	109.40	-41.84	Peak	
7	5980.4000	25.65	39.21	64.86	68.20	-3.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

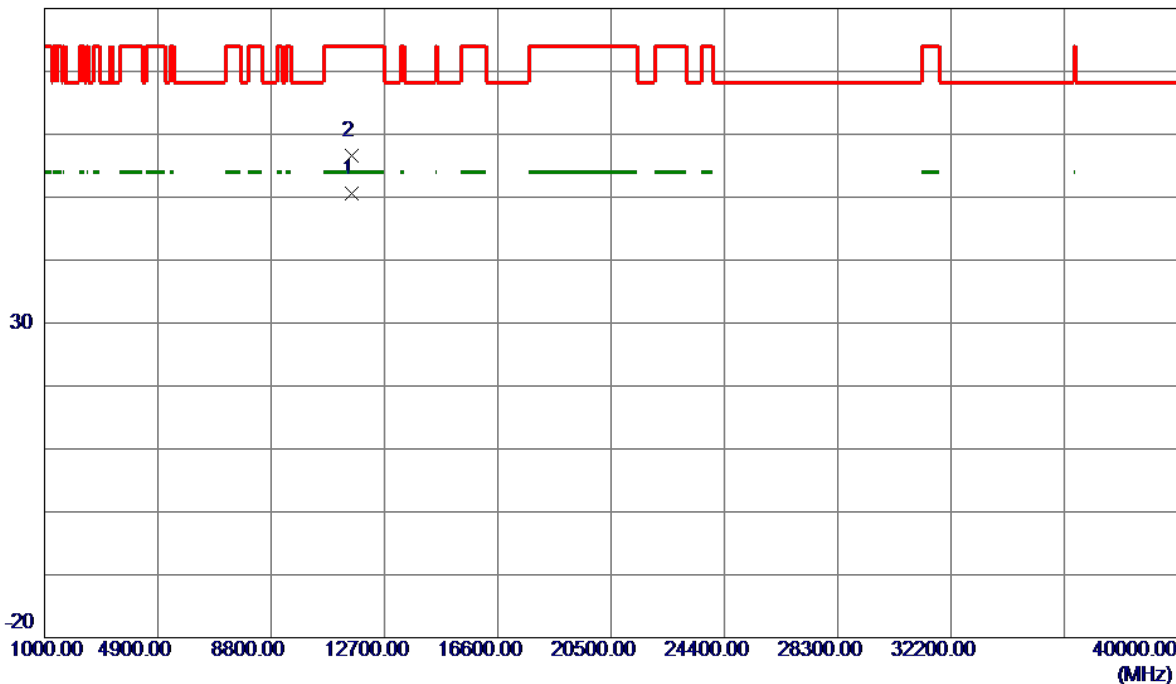


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11567.9950	48.33	2.27	50.60	54.00	-3.40	AVG	
2	11576.8000	54.37	2.28	56.65	74.00	-17.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

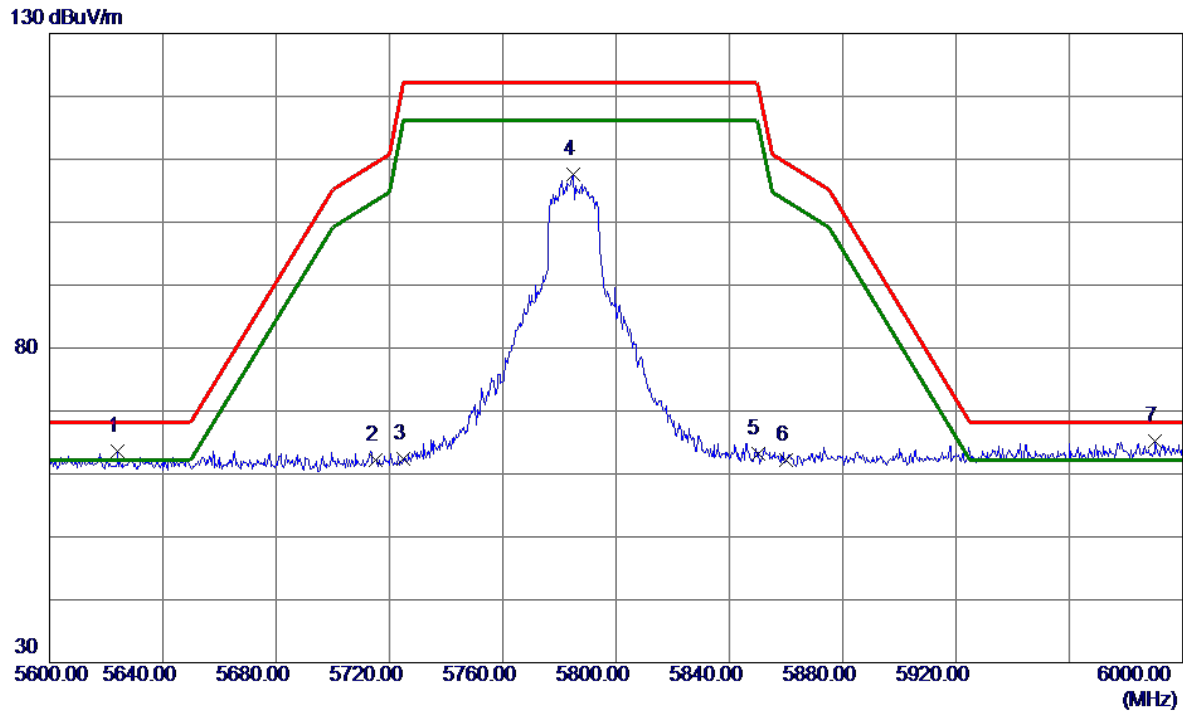


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5624.0000	25.21	38.36	63.57	68.20	-4.63	Peak	
2	5715.0000	23.67	38.46	62.13	109.40	-47.27	Peak	
3	5725.0000	23.87	38.50	62.37	122.20	-59.83	Peak	
4	5784.8000	68.86	38.72	107.58	122.20	-14.62	Peak	
5	5850.0000	24.34	38.91	63.25	122.20	-58.95	Peak	
6	5860.0000	23.35	38.94	62.29	109.40	-47.11	Peak	
7 *	5990.4000	25.93	39.23	65.16	68.20	-3.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

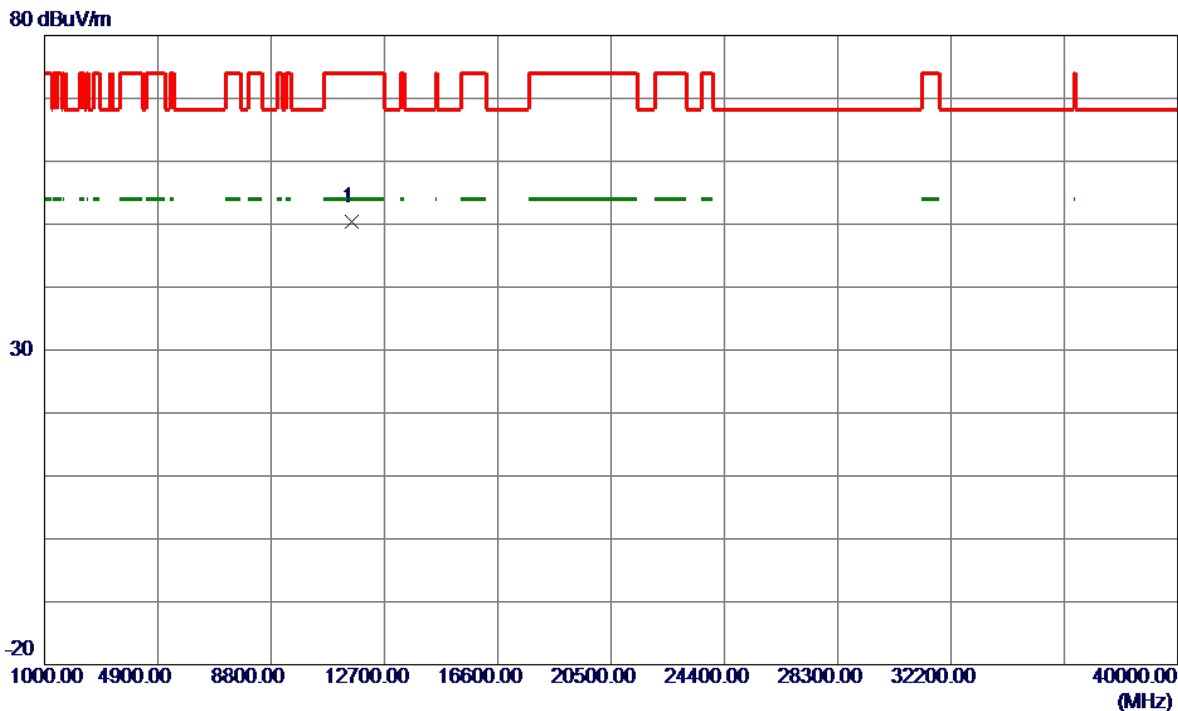


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11565.1000	48.19	2.27	50.46	74.00	-23.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

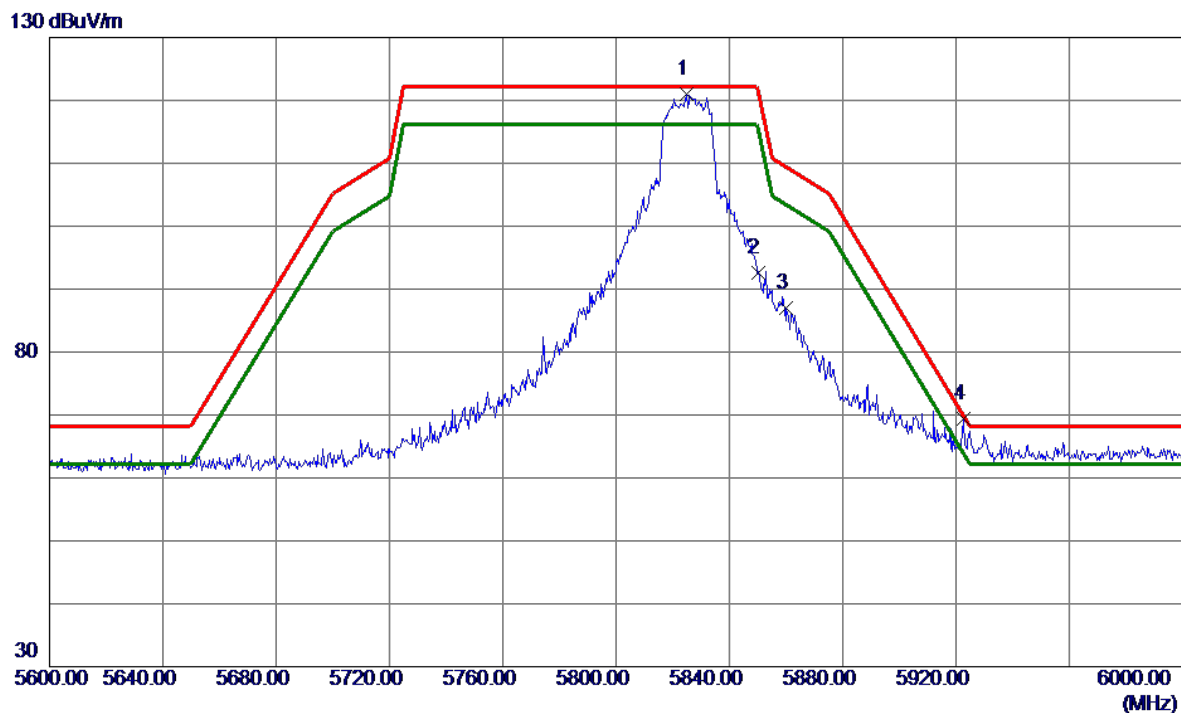


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5824.8000	82.10	38.85	120.95	122.20	-1.25	Peak	
2	5850.0000	53.75	38.91	92.66	122.20	-29.54	Peak	
3	5860.0000	48.09	38.94	87.03	109.40	-22.37	Peak	
4 *	5922.6000	30.24	39.10	69.34	69.98	-0.64	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

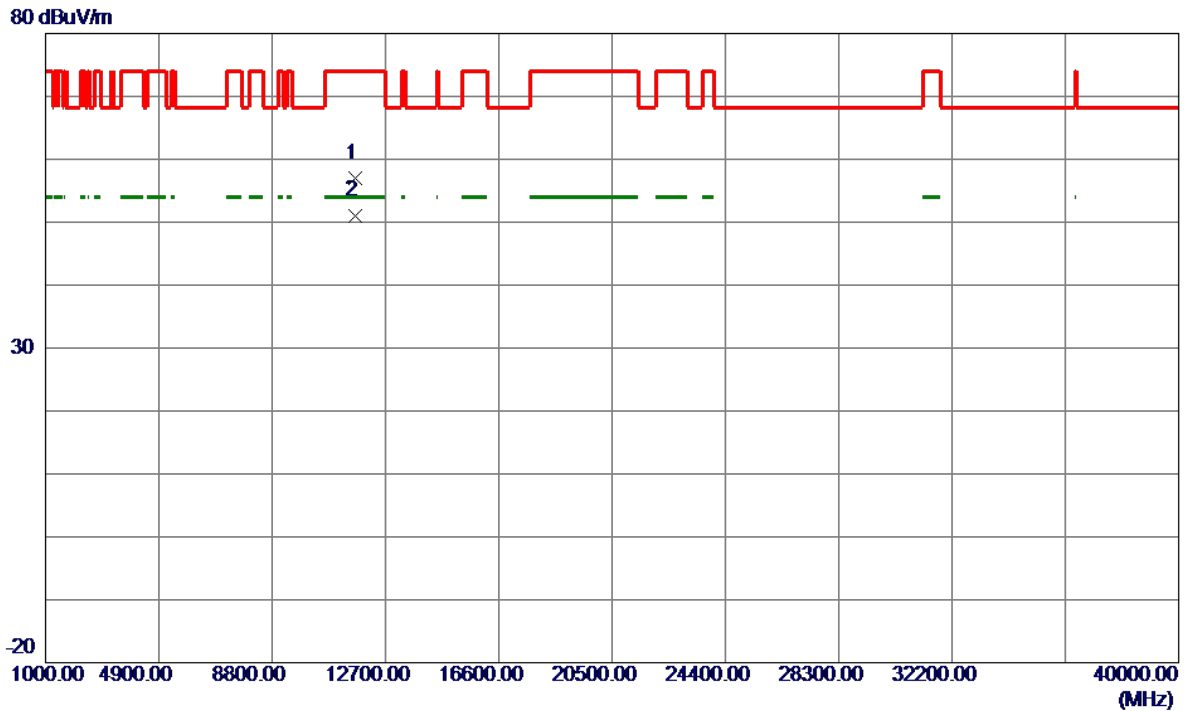


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.9500	54.96	2.11	57.07	74.00	-16.93	Peak	
2 *	11650.8920	49.00	2.10	51.10	54.00	-2.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

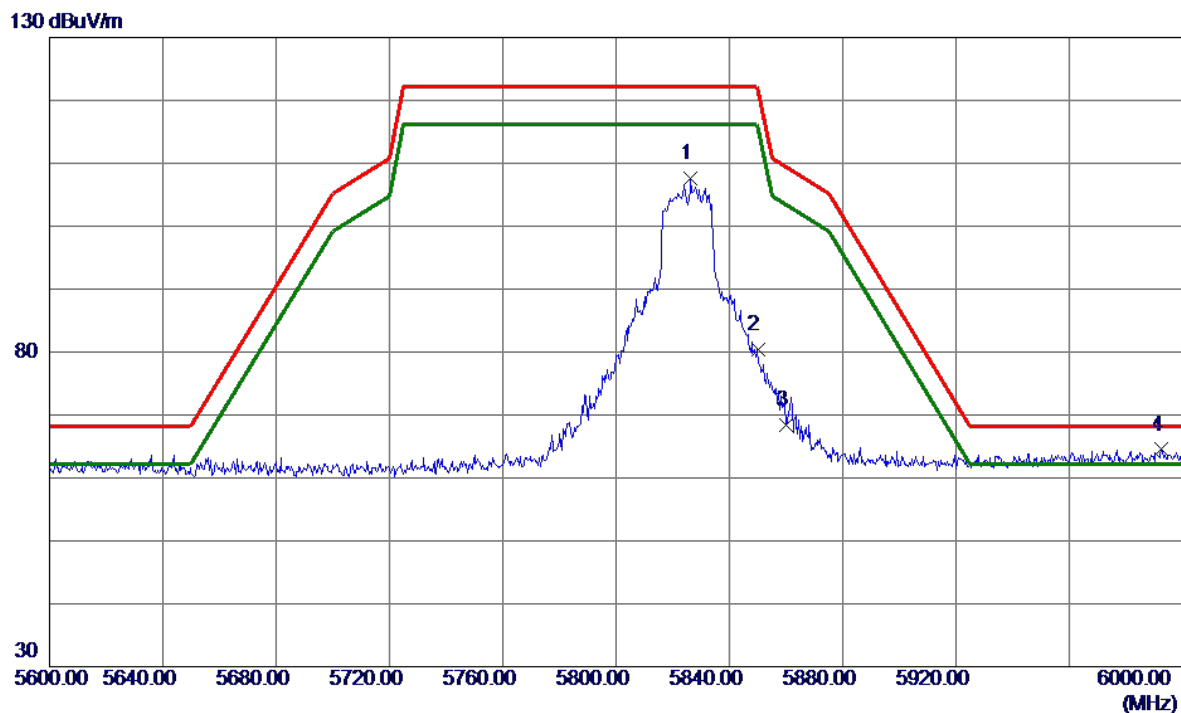


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5826.4000	68.70	38.85	107.55	122.20	-14.65	Peak	
2	5850.0000	41.48	38.91	80.39	122.20	-41.81	Peak	
3	5860.0000	29.39	38.94	68.33	109.40	-41.07	Peak	
4 *	5992.6000	25.26	39.24	64.50	68.20	-3.70	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

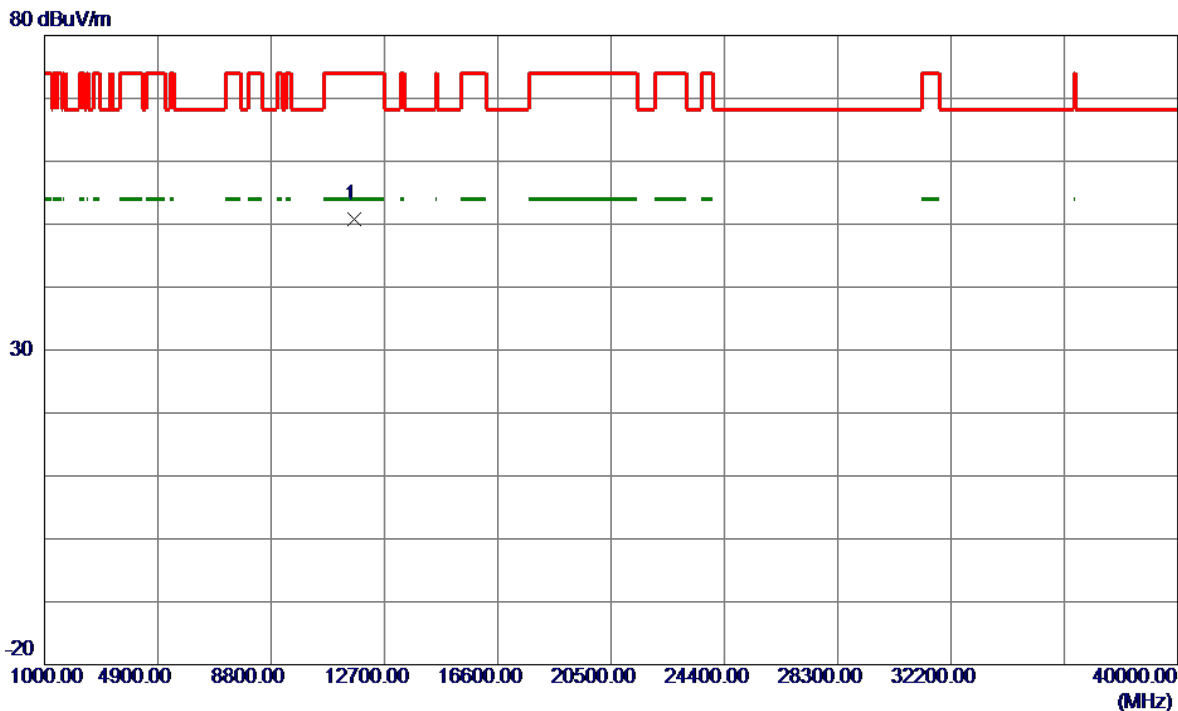


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11650.9000	48.70	2.10	50.80	74.00	-23.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

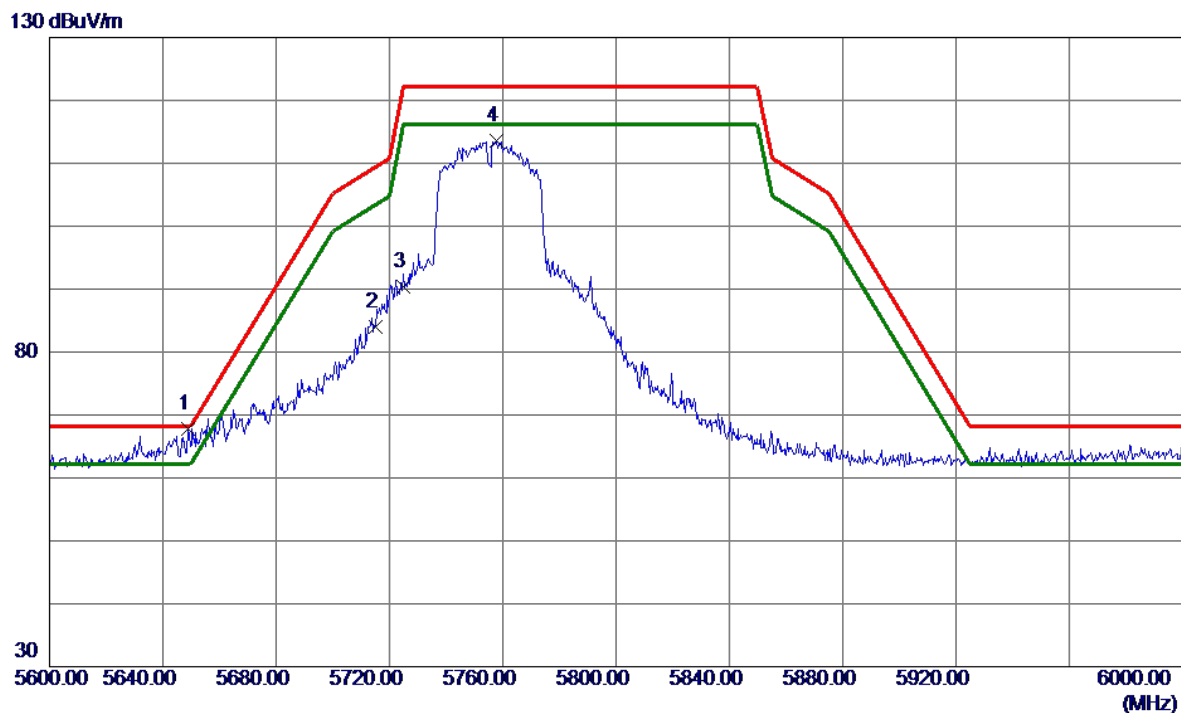


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5649.0000	29.49	38.37	67.86	68.20	-0.34	Peak	
2	5715.0000	45.53	38.46	83.99	109.40	-25.41	Peak	
3	5725.0000	51.97	38.50	90.47	122.20	-31.73	Peak	
4	5757.8000	74.93	38.62	113.55	122.20	-8.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

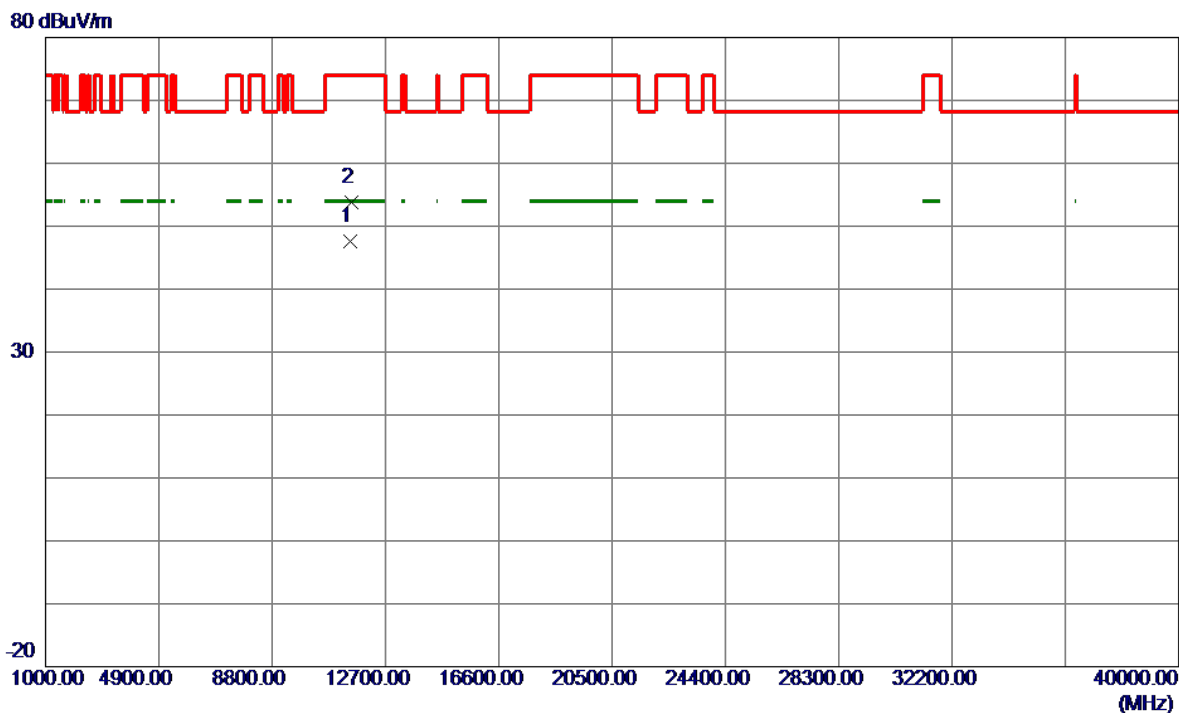


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11506.6560	45.40	2.22	47.62	54.00	-6.38	AVG	
2	11510.5000	51.58	2.22	53.80	74.00	-20.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

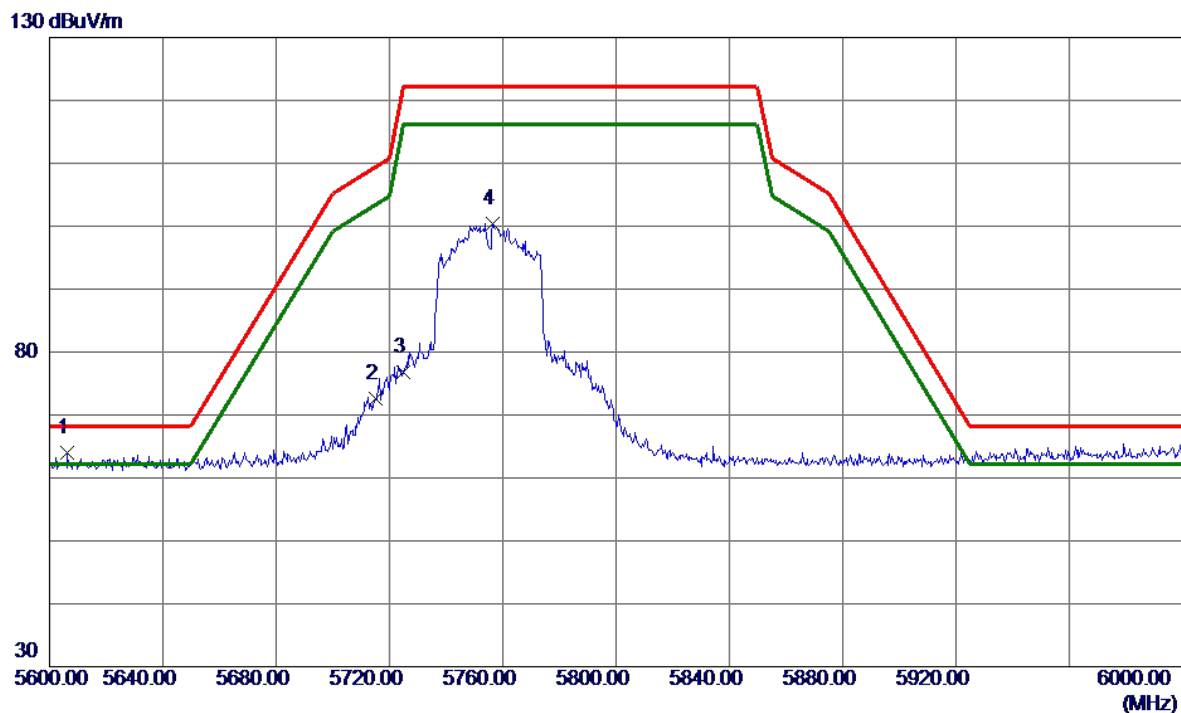


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5606.4000	25.58	38.34	63.92	68.20	-4.28	Peak	
2	5715.0000	34.10	38.46	72.56	109.40	-36.84	Peak	
3	5725.0000	38.31	38.50	76.81	122.20	-45.39	Peak	
4	5756.4000	61.77	38.62	100.39	122.20	-21.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

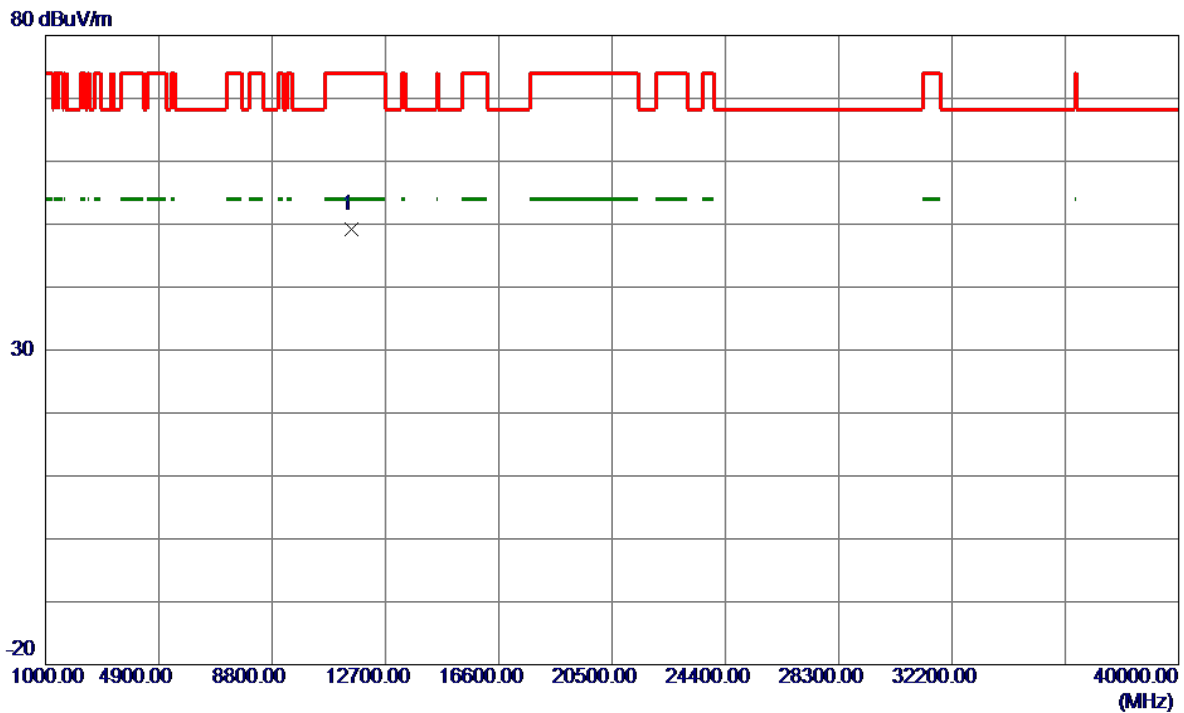


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11510.0000	46.96	2.22	49.18	74.00	-24.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

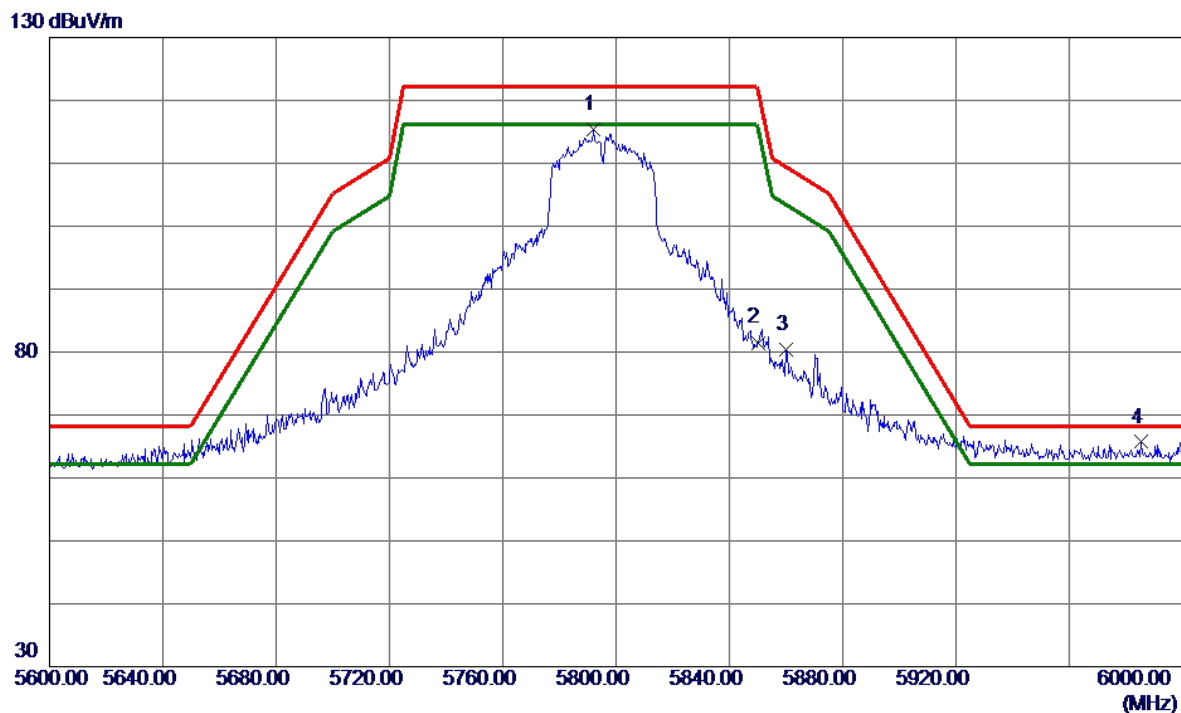


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5792.0000	76.70	38.75	115.45	122.20	-6.75	Peak	
2	5850.0000	42.59	38.91	81.50	122.20	-40.70	Peak	
3	5860.0000	41.46	38.94	80.40	109.40	-29.00	Peak	
4 *	5985.4000	26.48	39.22	65.70	68.20	-2.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

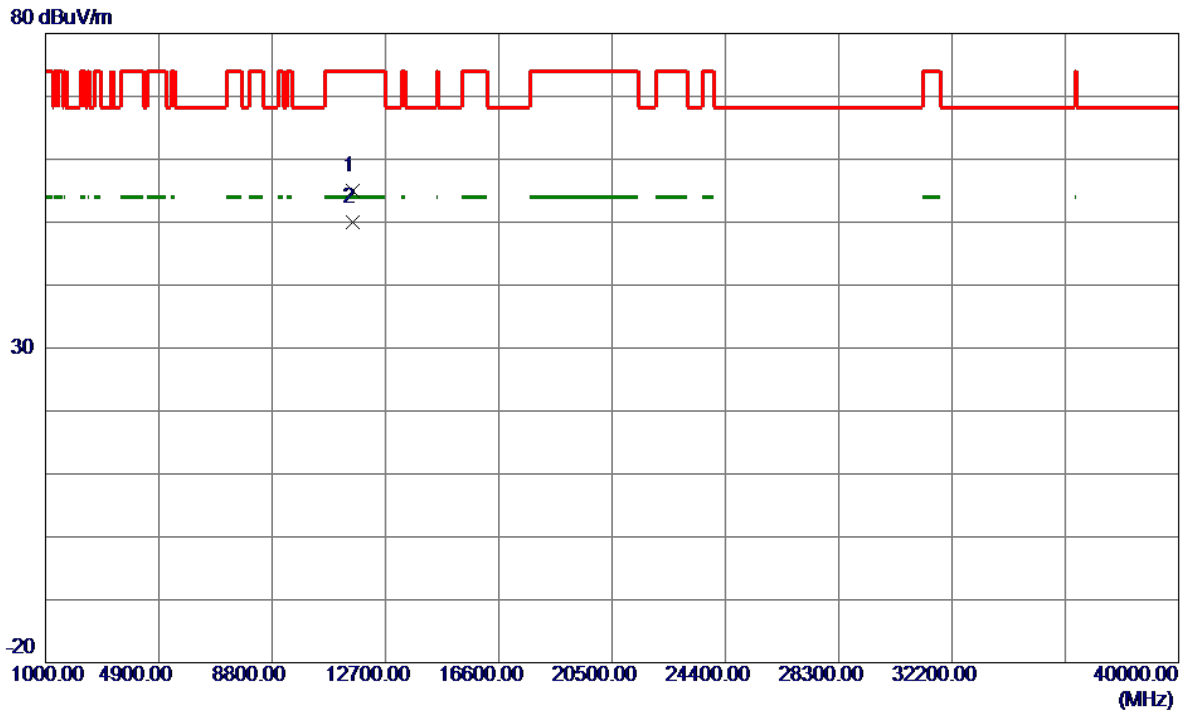


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.4500	52.79	2.29	55.08	74.00	-18.92	Peak	
2 *	11592.4460	47.68	2.29	49.97	54.00	-4.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

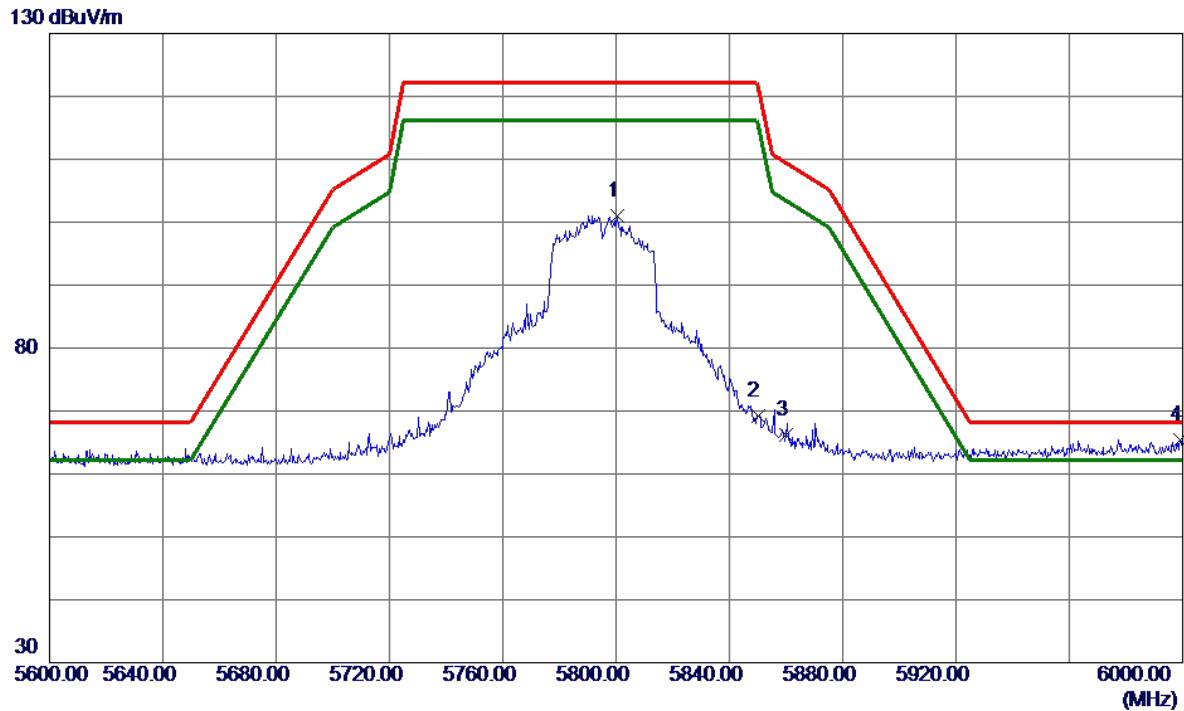


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5800.4000	62.23	38.78	101.01	122.20	-21.19	Peak	
2	5850.0000	30.35	38.91	69.26	122.20	-52.94	Peak	
3	5860.0000	27.24	38.94	66.18	109.40	-43.22	Peak	
4 *	5999.2000	26.15	39.25	65.40	68.20	-2.80	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

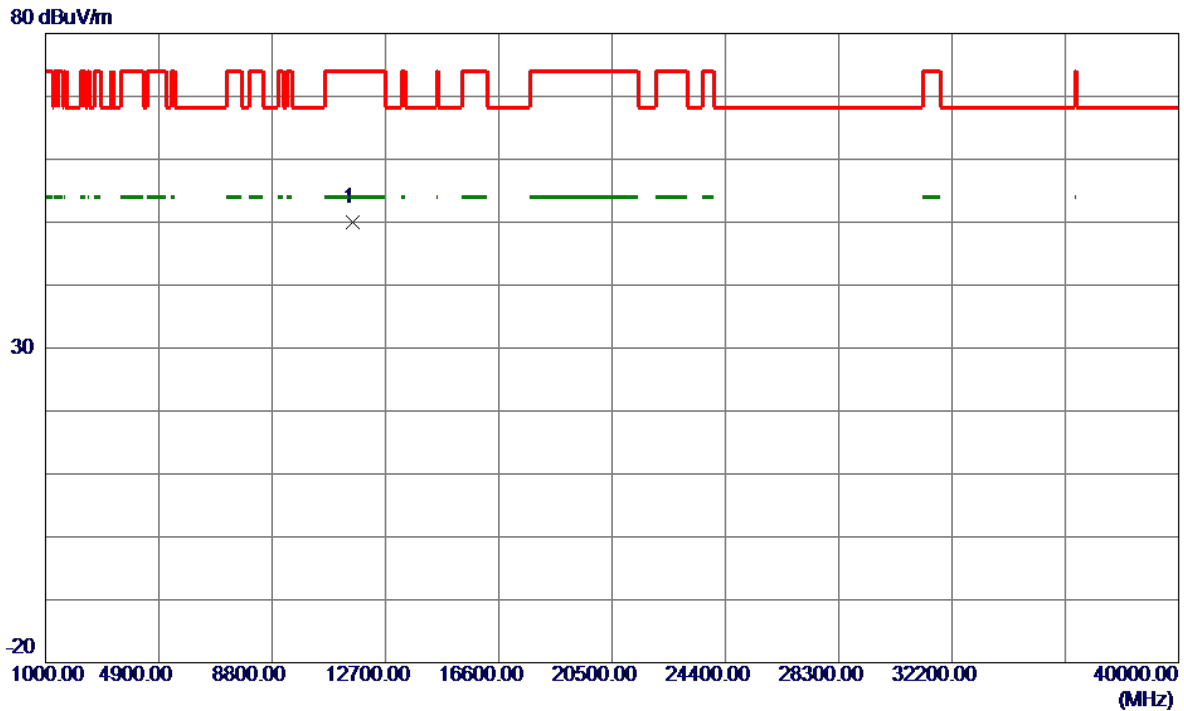


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.0000	47.78	2.29	50.07	74.00	-23.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

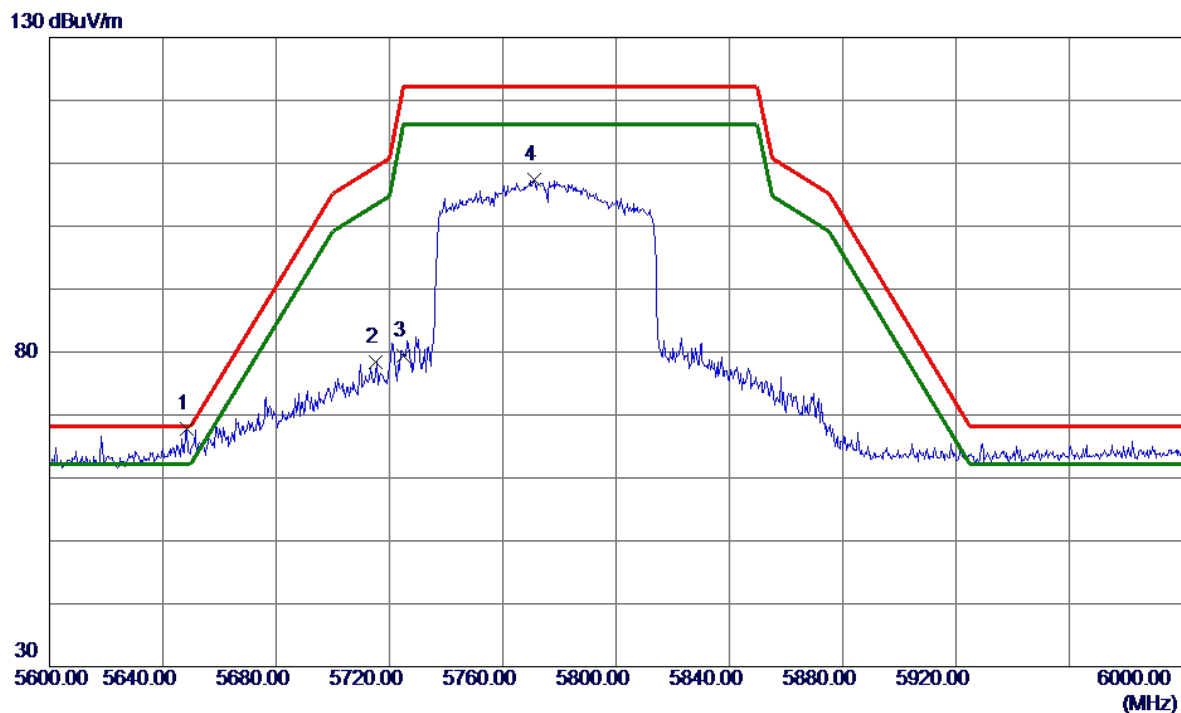


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5648.6000	29.49	38.37	67.86	68.20	-0.34	Peak	
2	5715.0000	39.90	38.46	78.36	109.40	-31.04	Peak	
3	5725.0000	40.86	38.50	79.36	122.20	-42.84	Peak	
4	5771.2000	68.76	38.67	107.43	122.20	-14.77	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

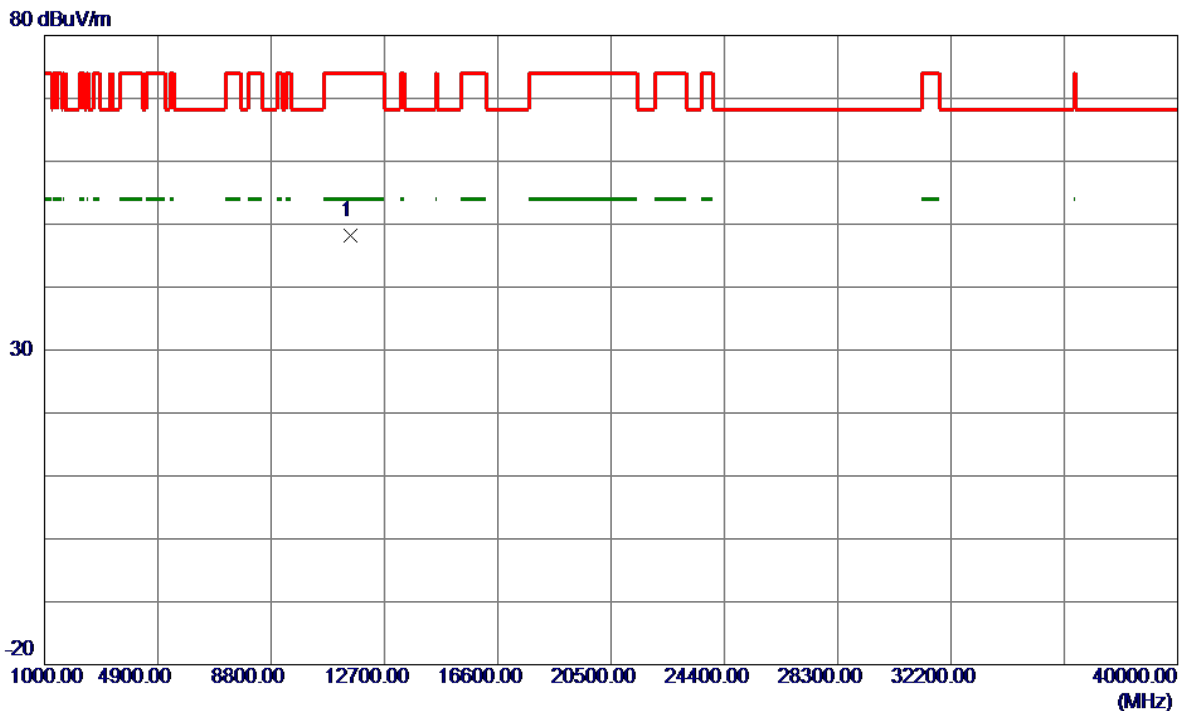


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11550.0000	45.99	2.26	48.25	74.00	-25.75	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

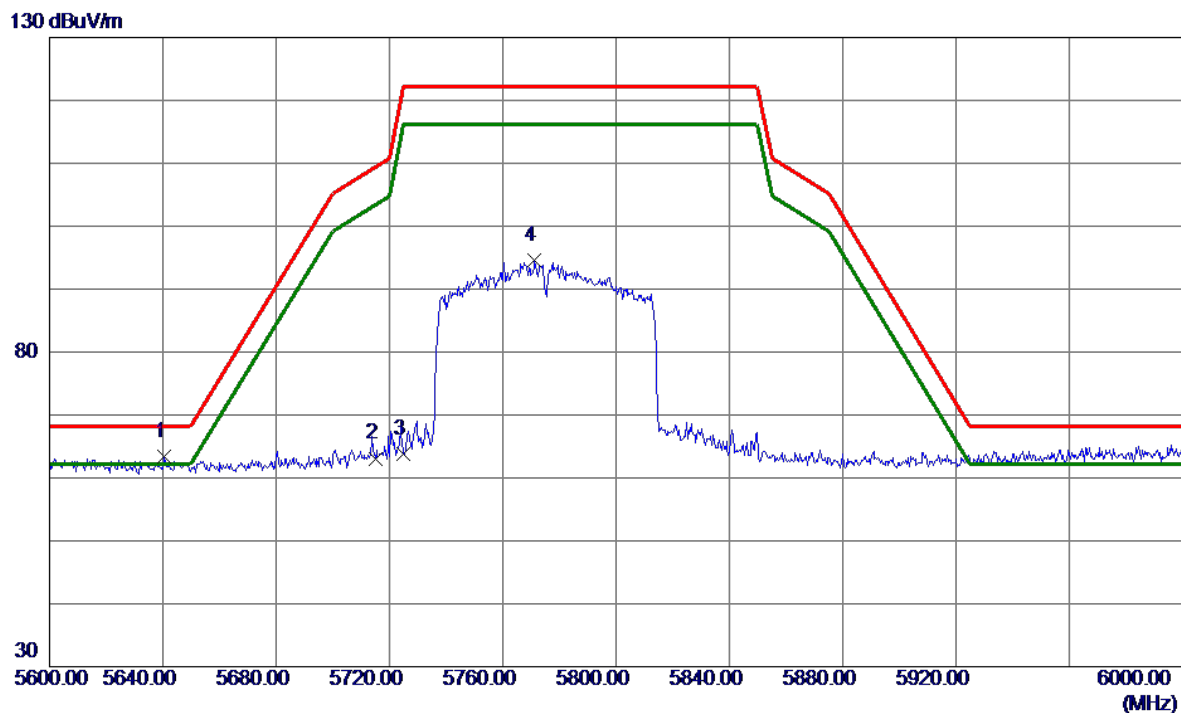


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5640.6000	25.03	38.37	63.40	68.20	-4.80	Peak	
2	5715.0000	24.64	38.46	63.10	109.40	-46.30	Peak	
3	5725.0000	25.30	38.50	63.80	122.20	-58.40	Peak	
4	5771.2000	55.99	38.67	94.66	122.20	-27.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

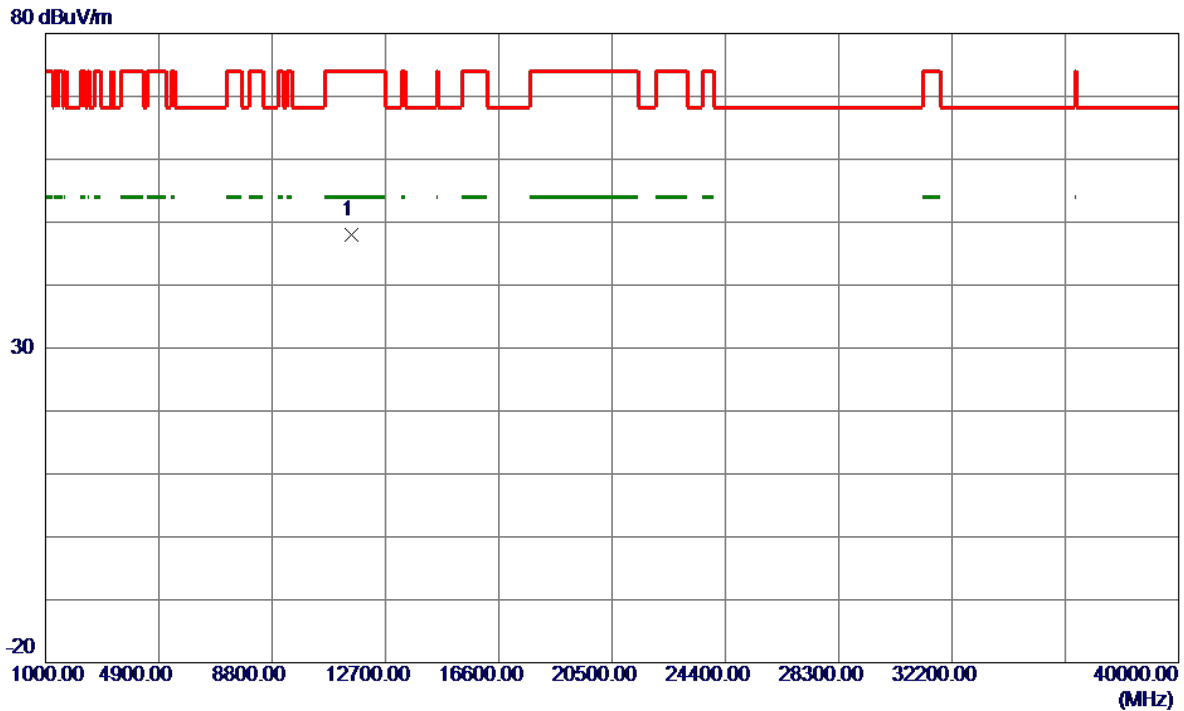


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11550.0000	45.78	2.26	48.04	74.00	-25.96	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

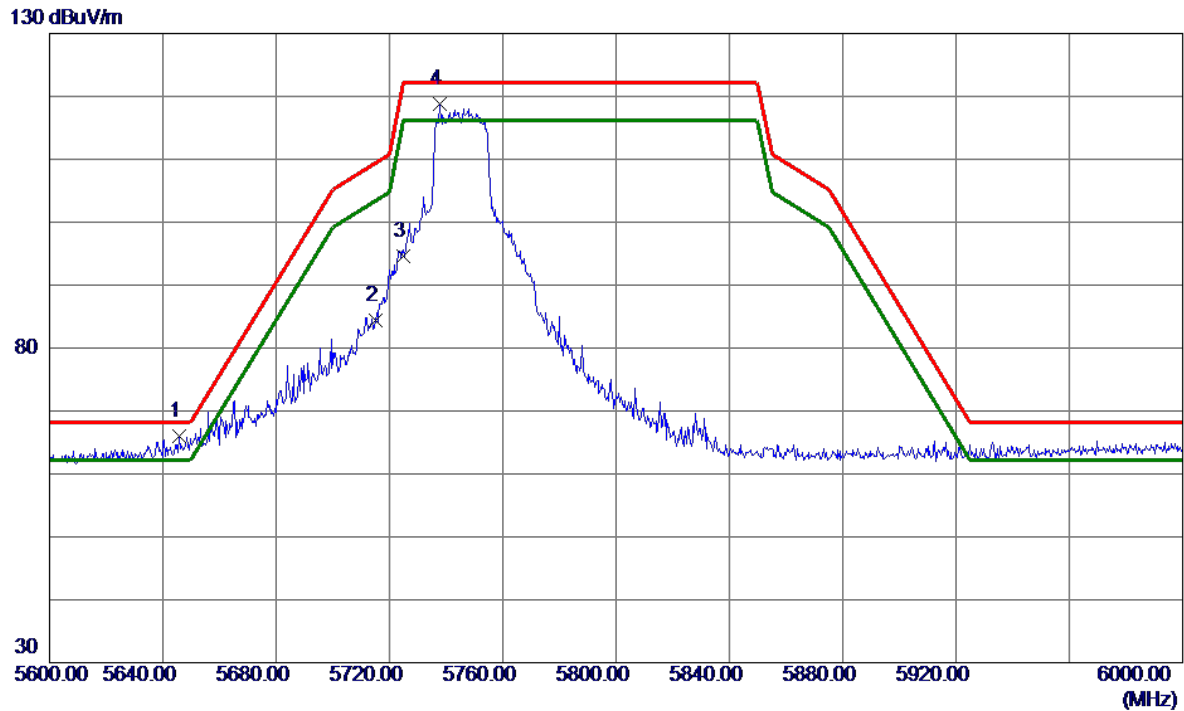


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5645.8000	27.67	38.37	66.04	68.20	-2.16	Peak	
2	5715.0000	45.97	38.46	84.43	109.40	-24.97	Peak	
3	5725.0000	56.14	38.50	94.64	122.20	-27.56	Peak	
4	5737.8000	80.33	38.55	118.88	122.20	-3.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

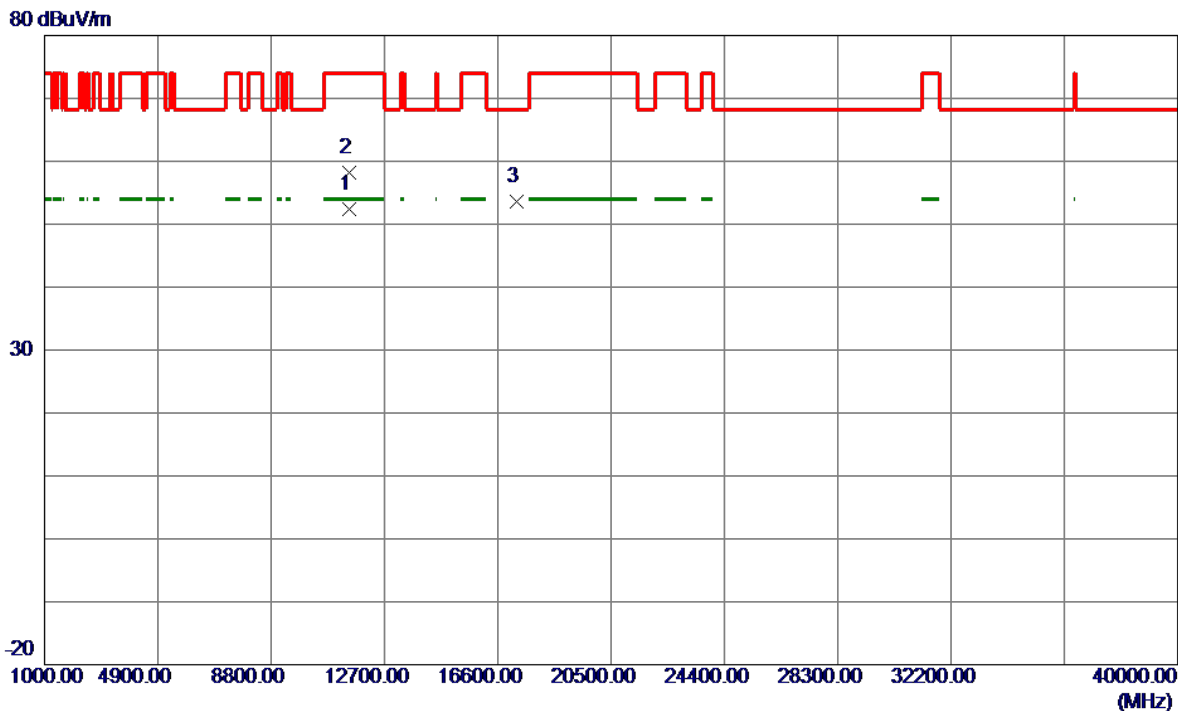


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.2720	50.15	2.21	52.36	54.00	-1.64	AVG	
2	11492.9500	56.02	2.21	58.23	74.00	-15.77	Peak	
3	17247.4000	46.81	6.71	53.52	68.20	-14.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

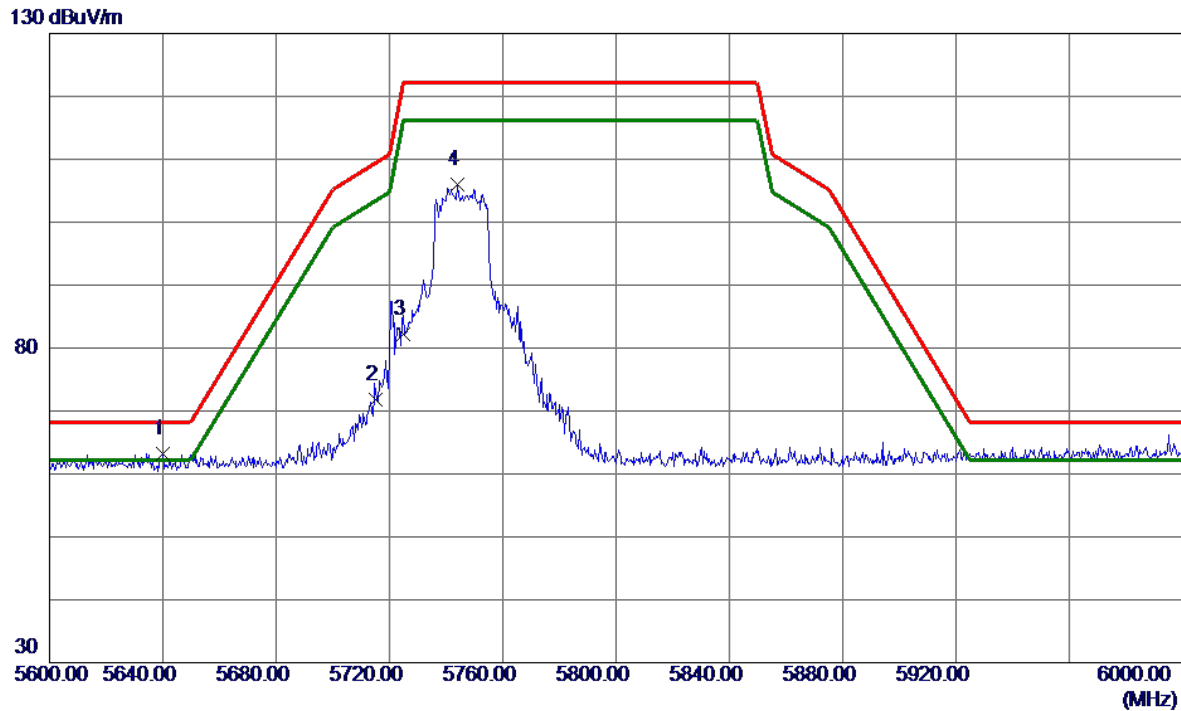


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5640.0000	24.86	38.37	63.23	68.20	-4.97	Peak	
2	5715.0000	33.38	38.46	71.84	109.40	-37.56	Peak	
3	5725.0000	43.79	38.50	82.29	122.20	-39.91	Peak	
4	5744.0000	67.49	38.57	106.06	122.20	-16.14	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

80 dBuV/m

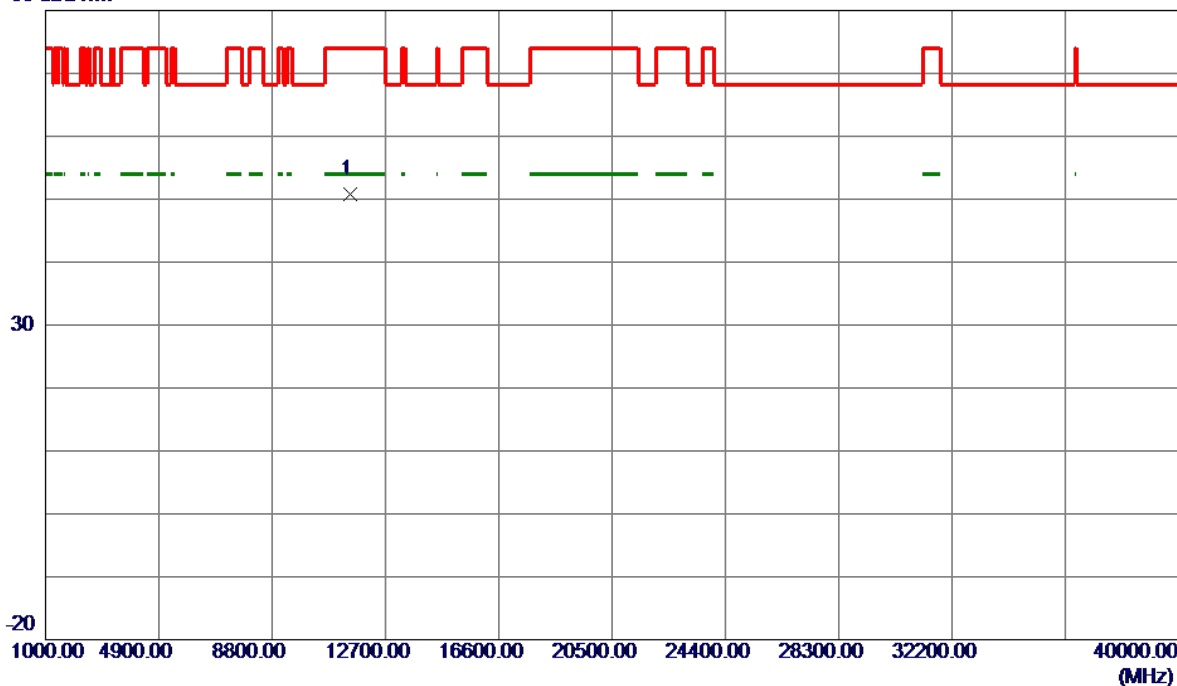


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	11485.1500	48.56	2.20	50.76	74.00	-23.24	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

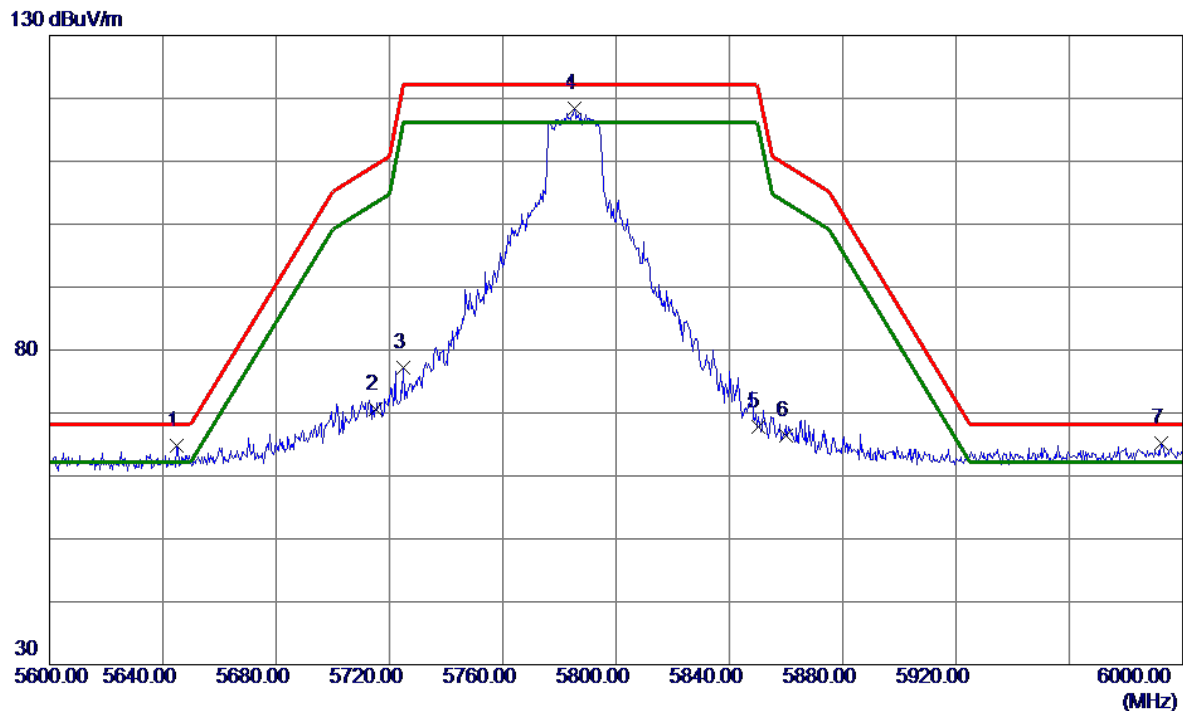


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5645.0000	26.37	38.37	64.74	68.20	-3.46	Peak	
2	5715.0000	32.13	38.46	70.59	109.40	-38.81	Peak	
3	5725.0000	38.79	38.50	77.29	122.20	-44.91	Peak	
4	5785.2000	79.68	38.72	118.40	122.20	-3.80	Peak	
5	5850.0000	28.87	38.91	67.78	122.20	-54.42	Peak	
6	5860.0000	27.42	38.94	66.36	109.40	-43.04	Peak	
7 *	5992.6000	26.00	39.24	65.24	68.20	-2.96	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

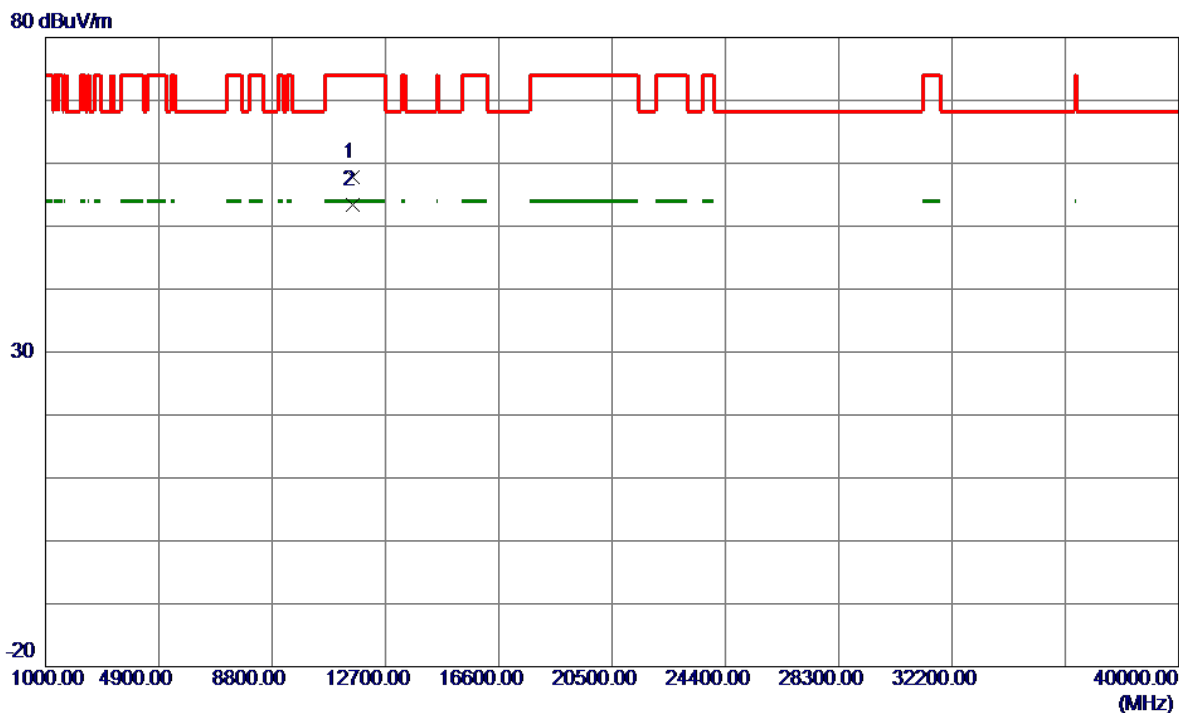


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11565.1000	55.56	2.27	57.83	74.00	-16.17	Peak	
2 *	11571.3300	51.12	2.28	53.40	54.00	-0.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

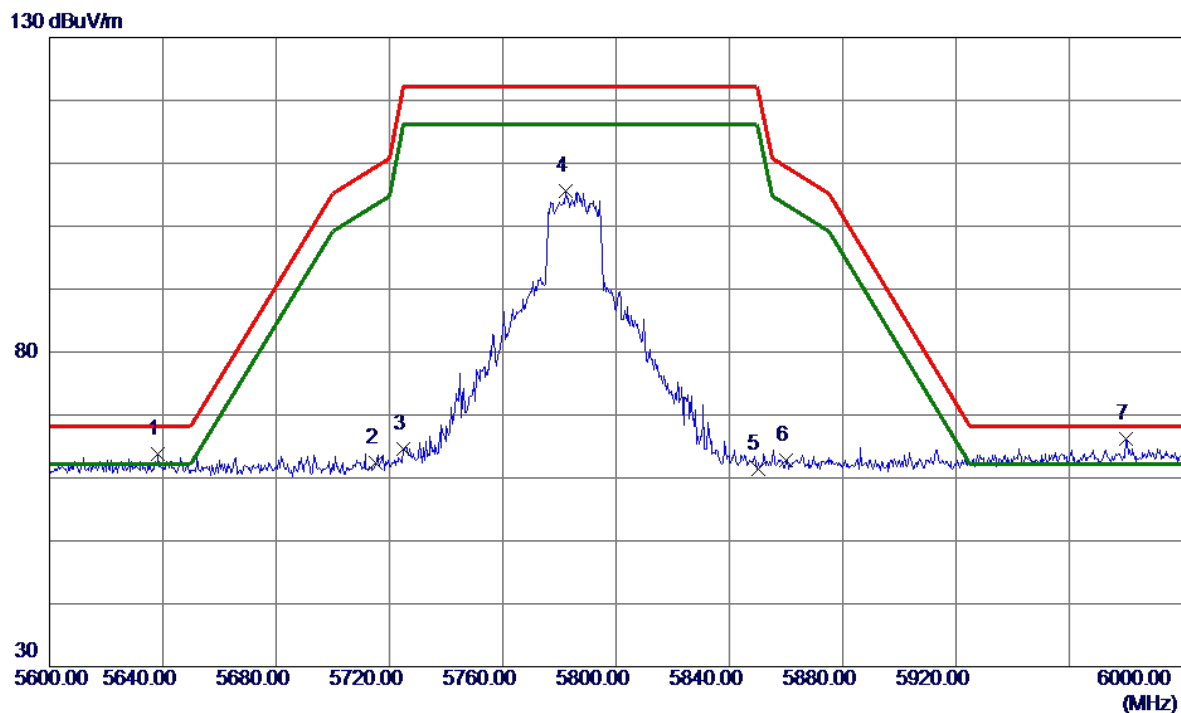


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5638.4000	25.44	38.36	63.80	68.20	-4.40	Peak	
2	5715.0000	24.02	38.46	62.48	109.40	-46.92	Peak	
3	5725.0000	26.11	38.50	64.61	122.20	-57.59	Peak	
4	5782.4000	66.81	38.71	105.52	122.20	-16.68	Peak	
5	5850.0000	22.55	38.91	61.46	122.20	-60.74	Peak	
6	5860.0000	23.78	38.94	62.72	109.40	-46.68	Peak	
7 *	5980.2000	26.91	39.21	66.12	68.20	-2.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

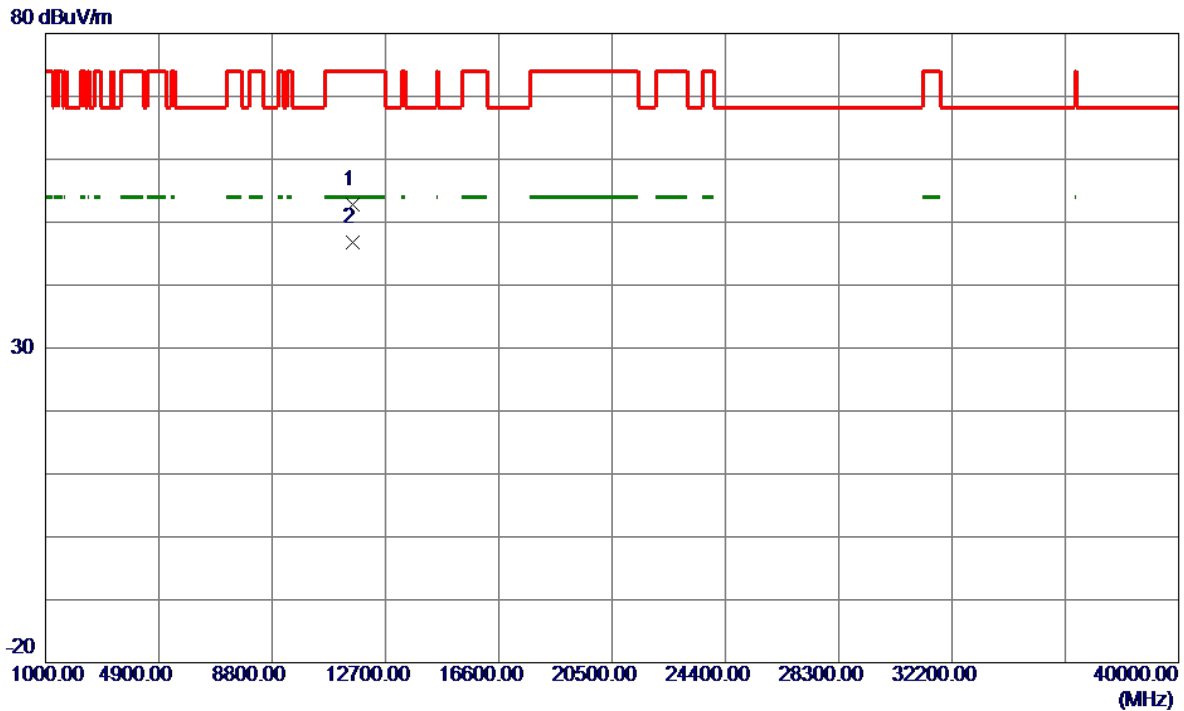


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.9500	50.61	2.28	52.89	74.00	-21.11	Peak	
2 *	11576.2670	44.52	2.28	46.80	54.00	-7.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

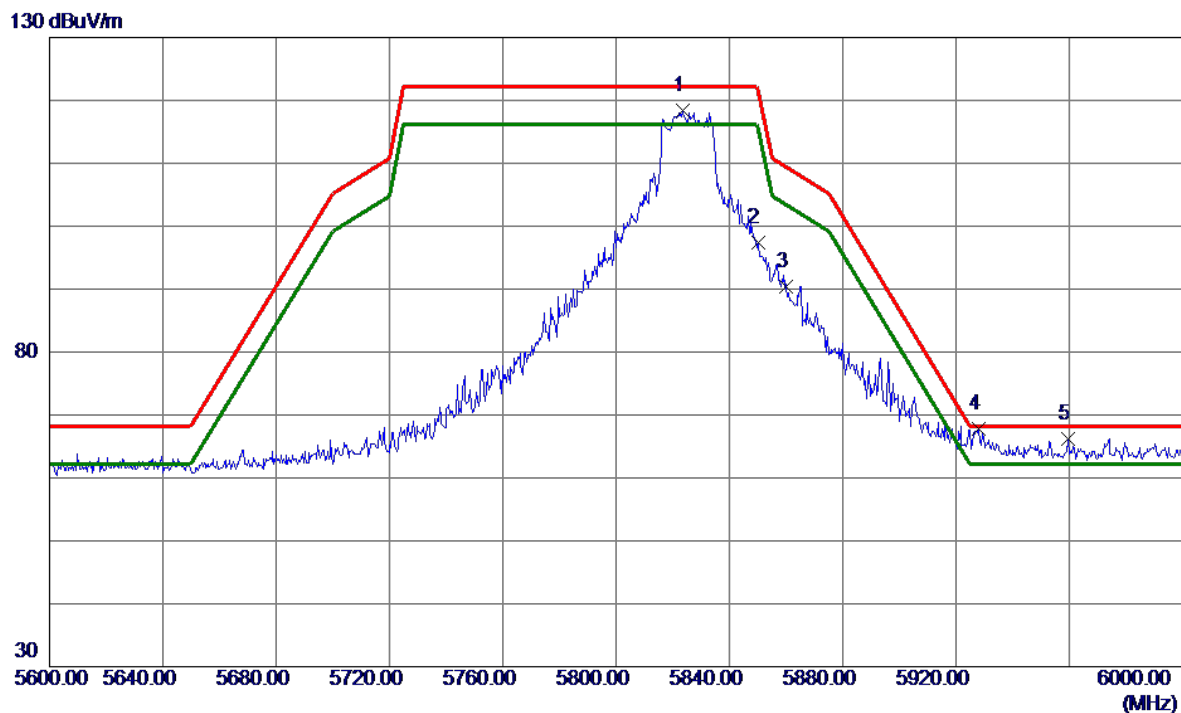


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5823.4000	79.52	38.84	118.36	122.20	-3.84	Peak	
2	5850.0000	58.57	38.91	97.48	122.20	-24.72	Peak	
3	5860.0000	51.37	38.94	90.31	109.40	-19.09	Peak	
4 *	5928.2000	28.78	39.11	67.89	68.20	-0.31	Peak	
5	5959.4000	27.03	39.17	66.20	68.20	-2.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

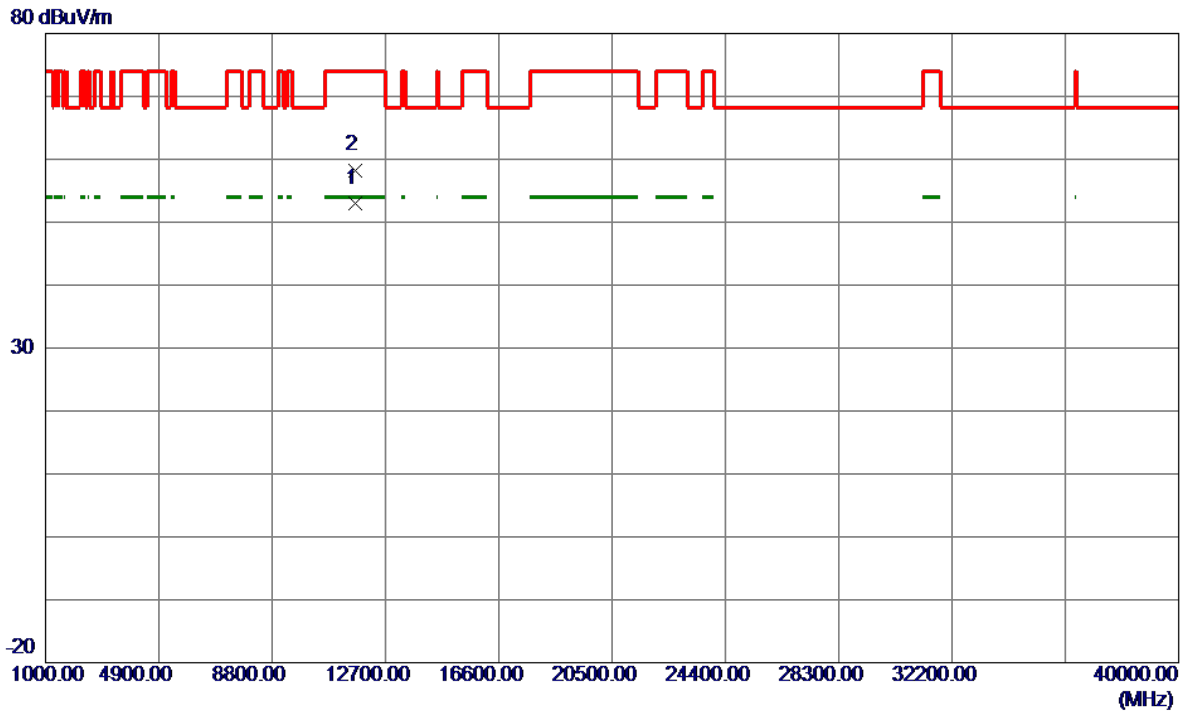


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.6950	50.83	2.10	52.93	54.00	-1.07	AVG	
2	11660.6500	56.24	2.06	58.30	74.00	-15.70	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

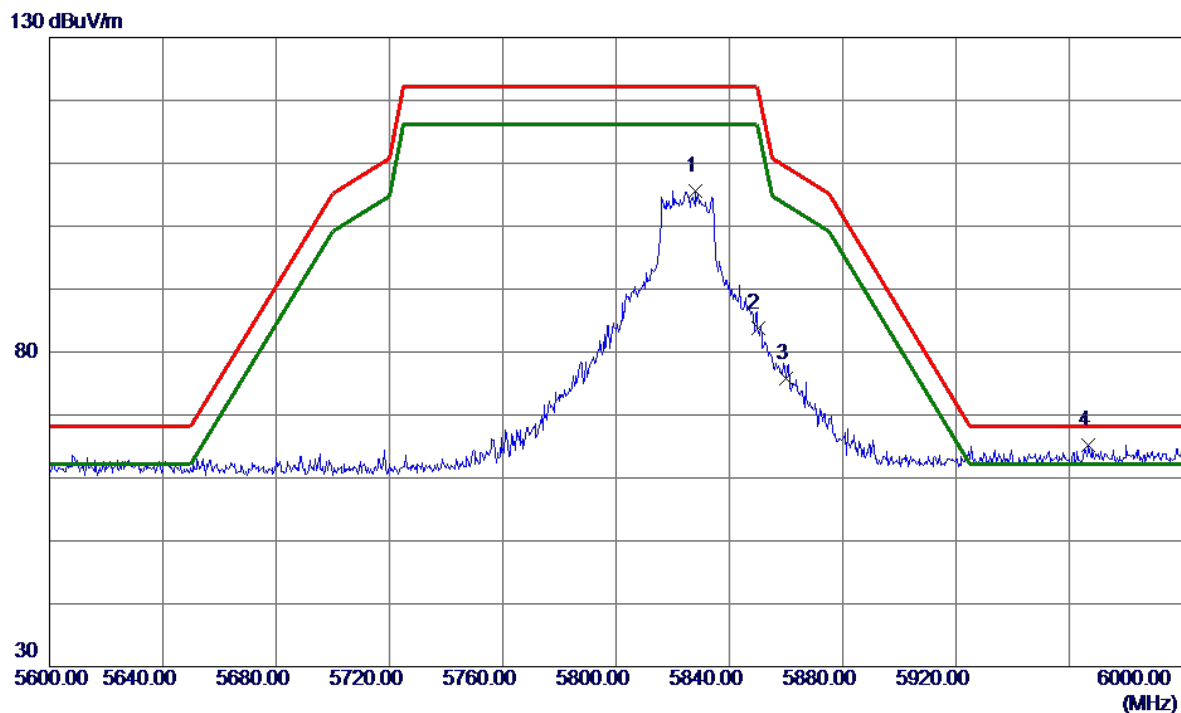

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5828.2000	66.67	38.86	105.53	122.20	-16.67	Peak	
2	5850.0000	44.90	38.91	83.81	122.20	-38.39	Peak	
3	5860.0000	36.79	38.94	75.73	109.40	-33.67	Peak	No limit
4 *	5966.8000	26.09	39.18	65.27	68.20	-2.93	Peak	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------




No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11654.8000	48.86	2.09	50.95	74.00	-23.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

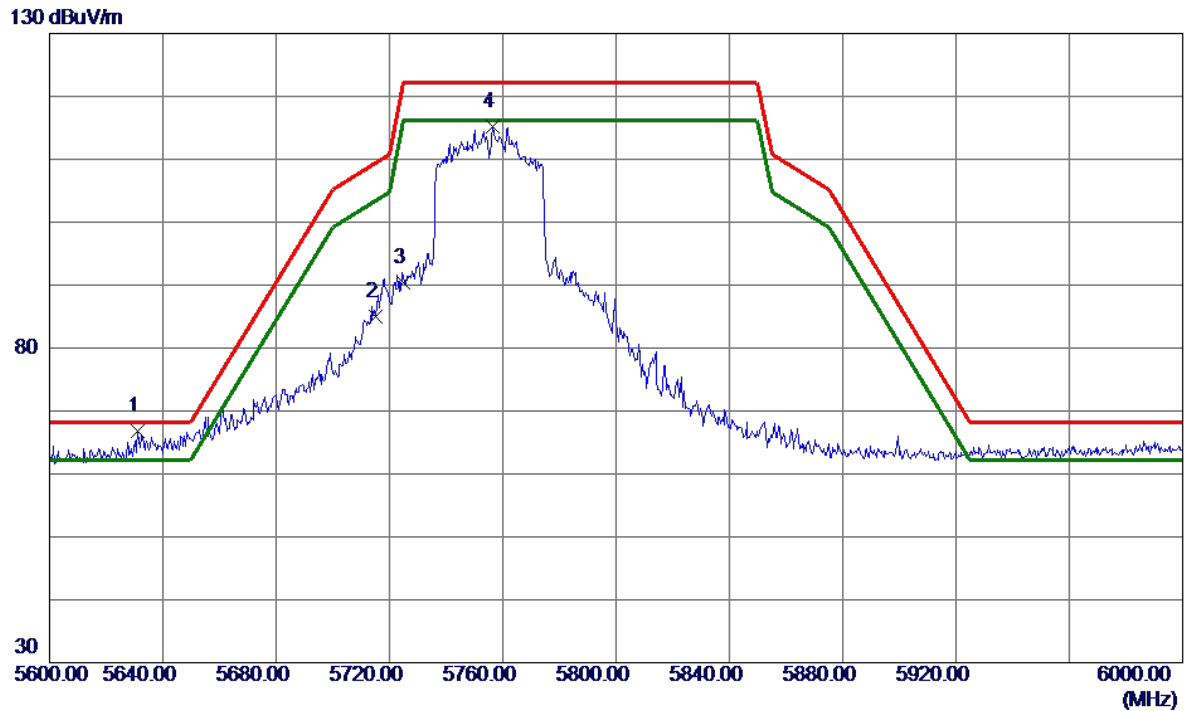


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5631.2000	28.43	38.36	66.79	68.20	-1.41	Peak	
2	5715.0000	46.47	38.46	84.93	109.40	-24.47	Peak	
3	5725.0000	51.82	38.50	90.32	122.20	-31.88	Peak	
4	5756.4000	76.54	38.62	115.16	122.20	-7.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

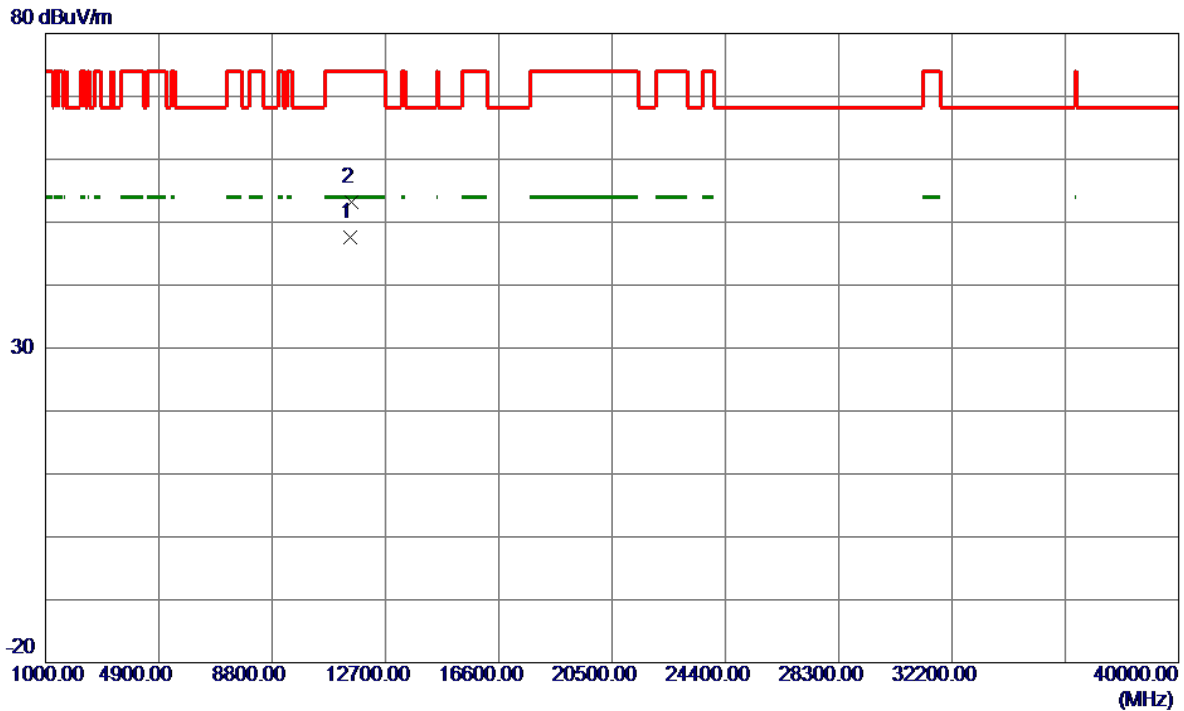


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11507.6060	45.40	2.22	47.62	54.00	-6.38	AVG	
2	11516.3500	50.90	2.23	53.13	74.00	-20.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

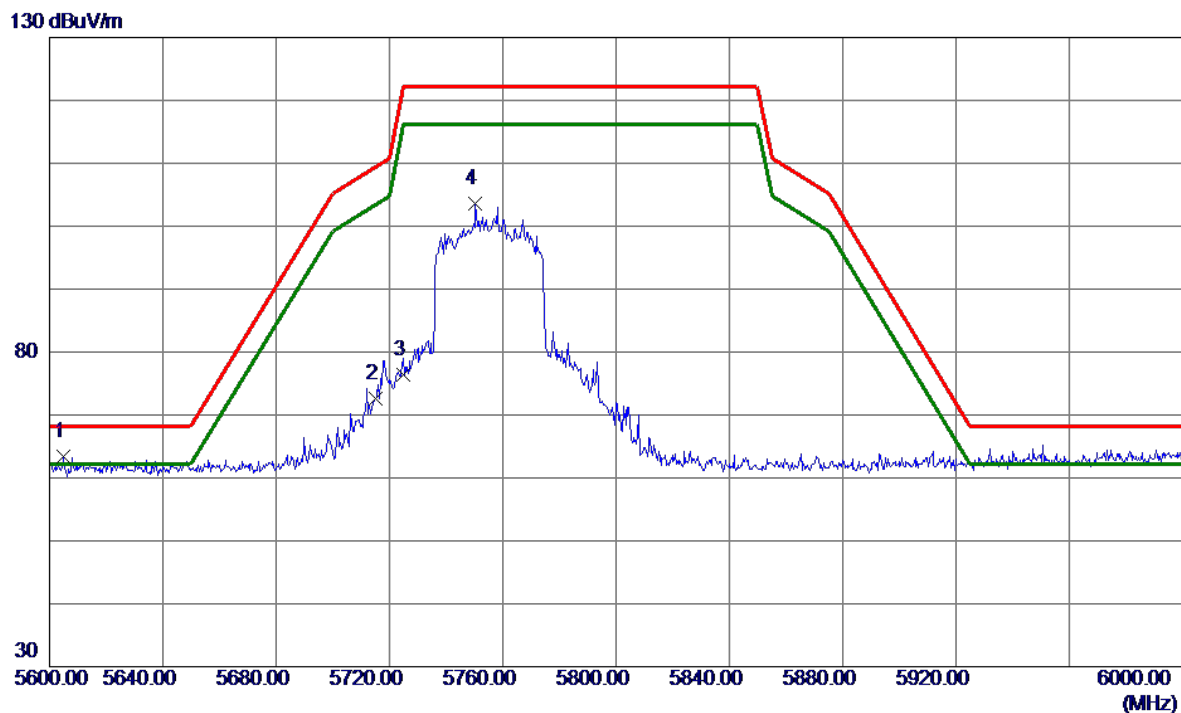


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5605.0000	25.03	38.34	63.37	68.20	-4.83	Peak	
2	5715.0000	34.12	38.46	72.58	109.40	-36.82	Peak	
3	5725.0000	37.85	38.50	76.35	122.20	-45.85	Peak	
4	5750.4000	65.00	38.59	103.59	122.20	-18.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

80 dBuV/m

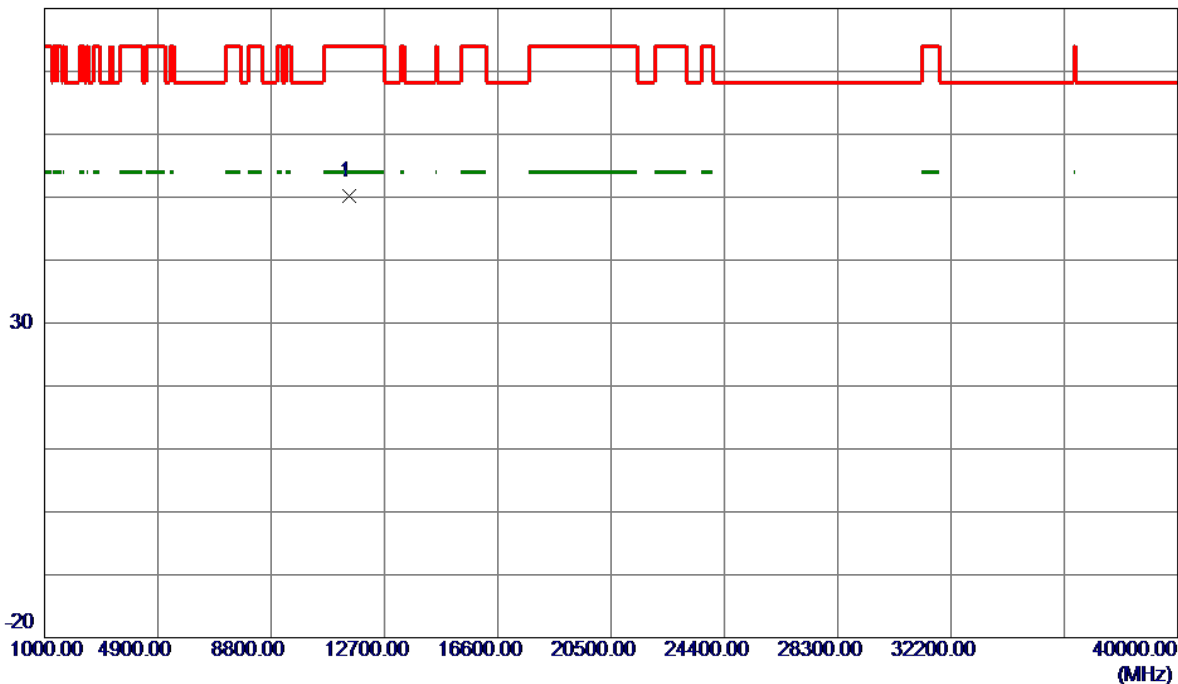


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11502.7000	47.96	2.22	50.18	74.00	-23.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

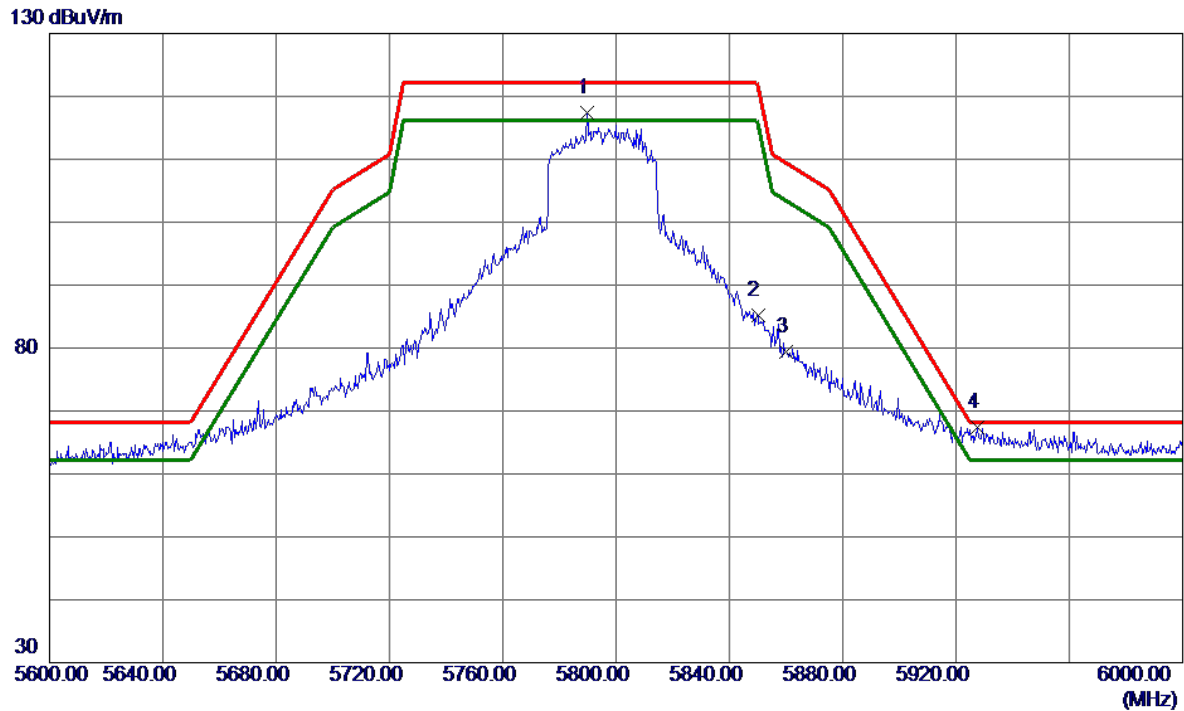


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5789.8000	78.58	38.74	117.32	122.20	-4.88	Peak	
2	5850.0000	46.20	38.91	85.11	122.20	-37.09	Peak	
3	5860.0000	40.40	38.94	79.34	109.40	-30.06	Peak	
4 *	5927.6000	28.38	39.11	67.49	68.20	-0.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

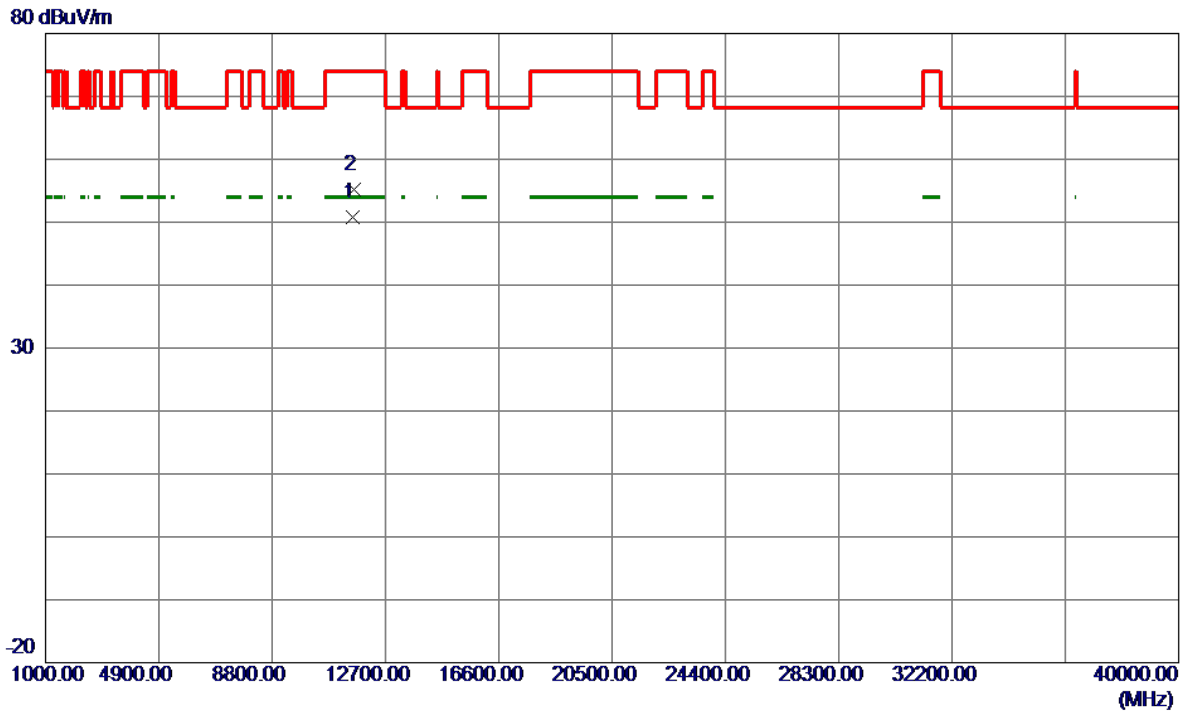


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11589.7900	48.53	2.29	50.82	54.00	-3.18	AVG	
2	11598.2500	52.97	2.30	55.27	74.00	-18.73	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

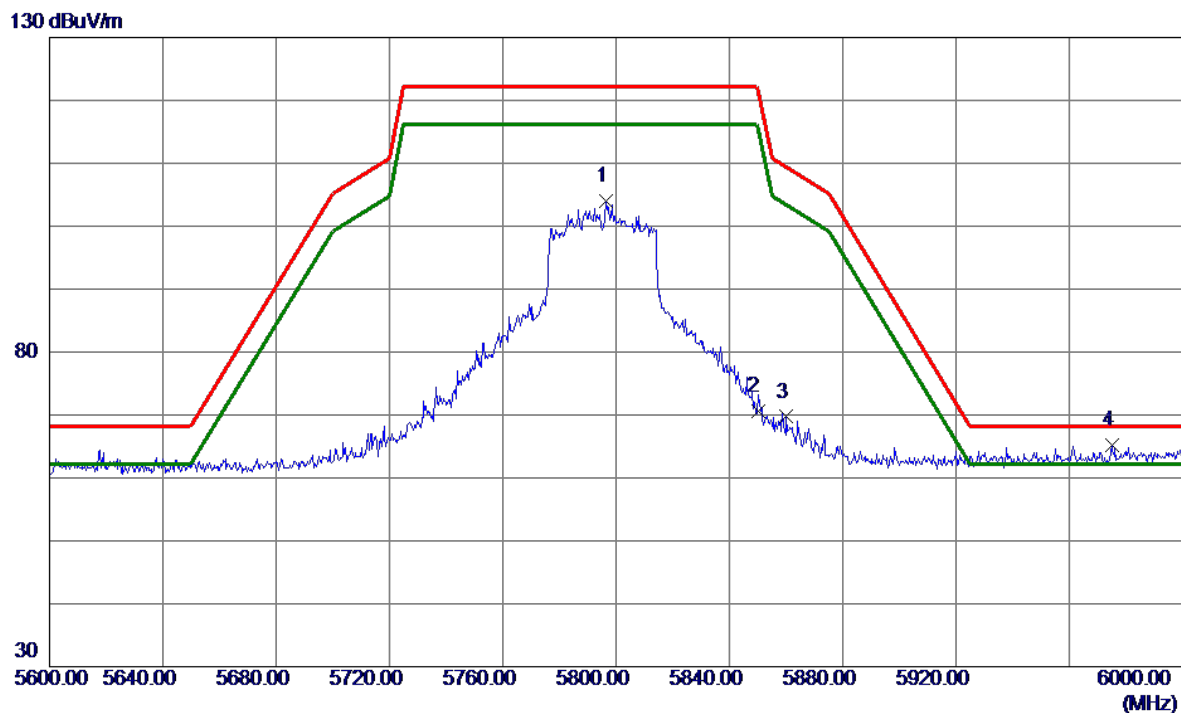


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5796.6000	65.15	38.77	103.92	122.20	-18.28	Peak	
2	5850.0000	31.63	38.91	70.54	122.20	-51.66	Peak	
3	5860.0000	30.76	38.94	69.70	109.40	-39.70	Peak	
4 *	5975.0000	26.00	39.20	65.20	68.20	-3.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

80 dBuV/m

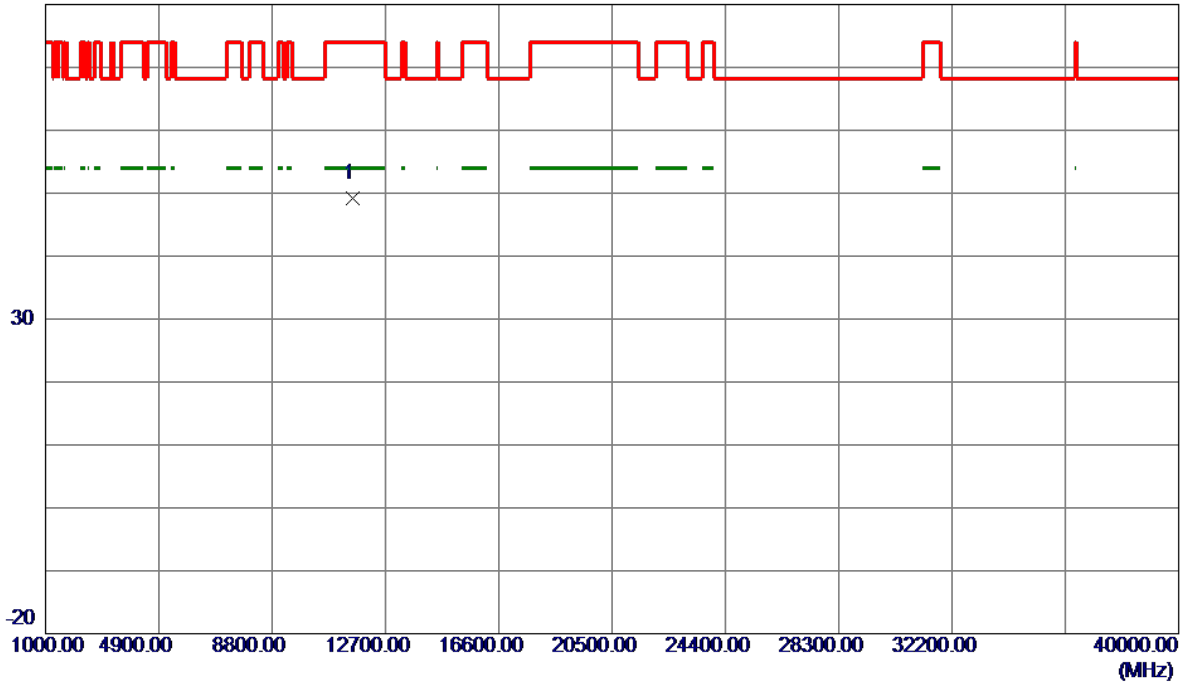


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.0000	46.91	2.29	49.20	74.00	-24.80	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

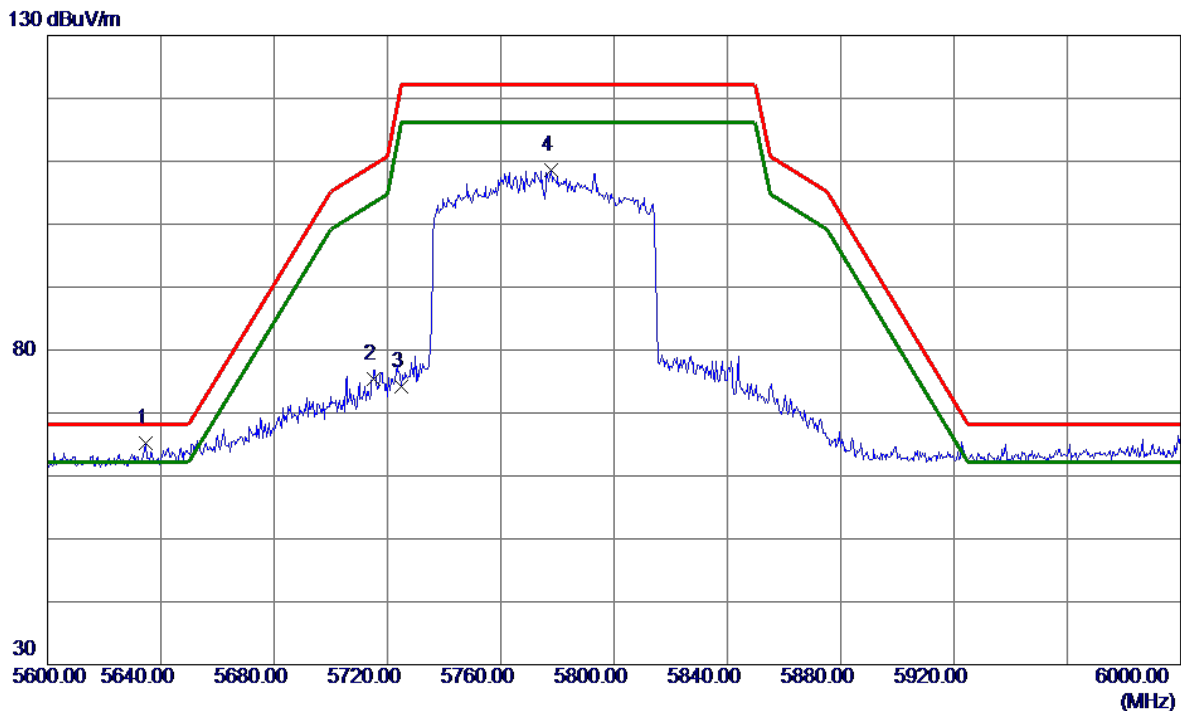


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5634.6000	26.92	38.36	65.28	68.20	-2.92	Peak	
2	5715.0000	36.86	38.46	75.32	109.40	-34.08	Peak	
3	5725.0000	35.76	38.50	74.26	122.20	-47.94	Peak	
4	5777.6000	69.85	38.70	108.55	122.20	-13.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

80 dBuV/m

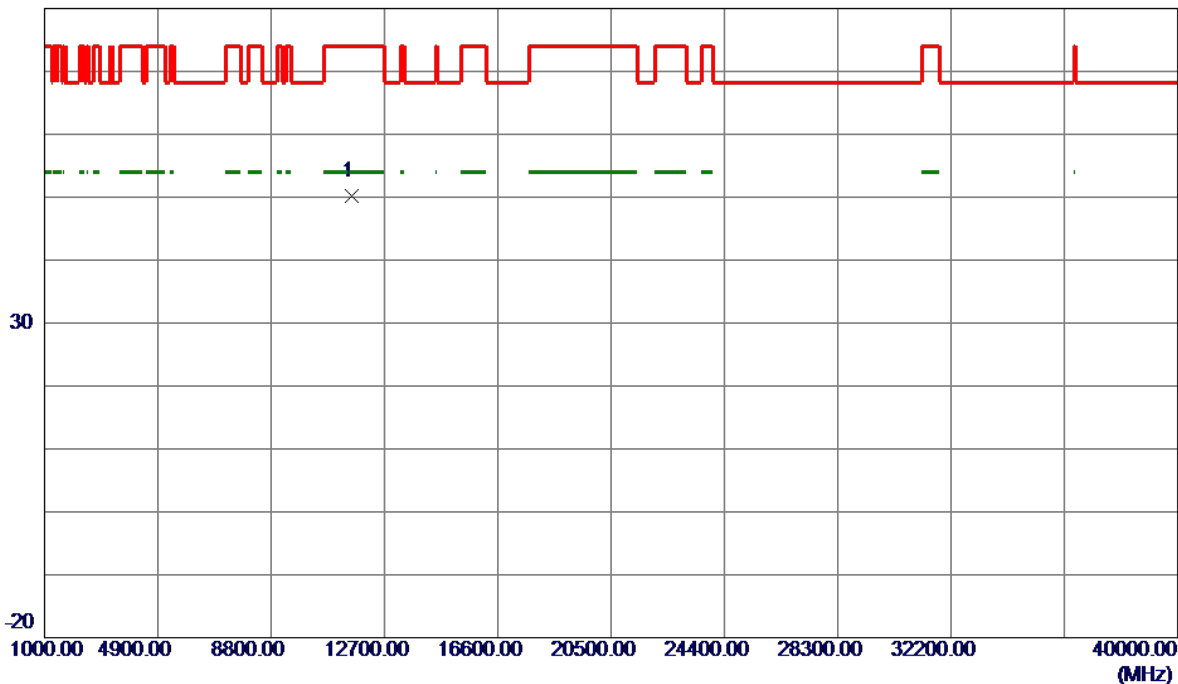


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11567.0500	47.95	2.27	50.22	74.00	-23.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

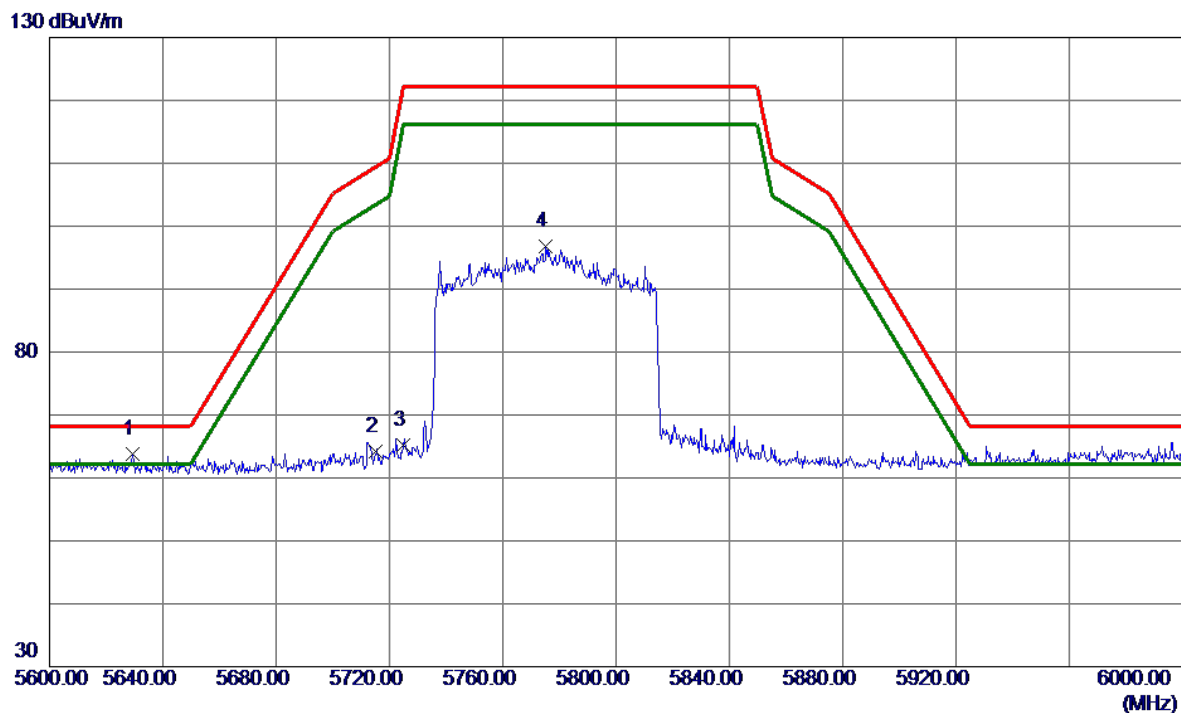


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5629.2000	25.47	38.36	63.83	68.20	-4.37	Peak	
2	5715.0000	25.67	38.46	64.13	109.40	-45.27	Peak	
3	5725.0000	26.69	38.50	65.19	122.20	-57.01	Peak	
4	5775.2000	25.82	38.69	96.71	122.20	-25.49	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

80 dBuV/m

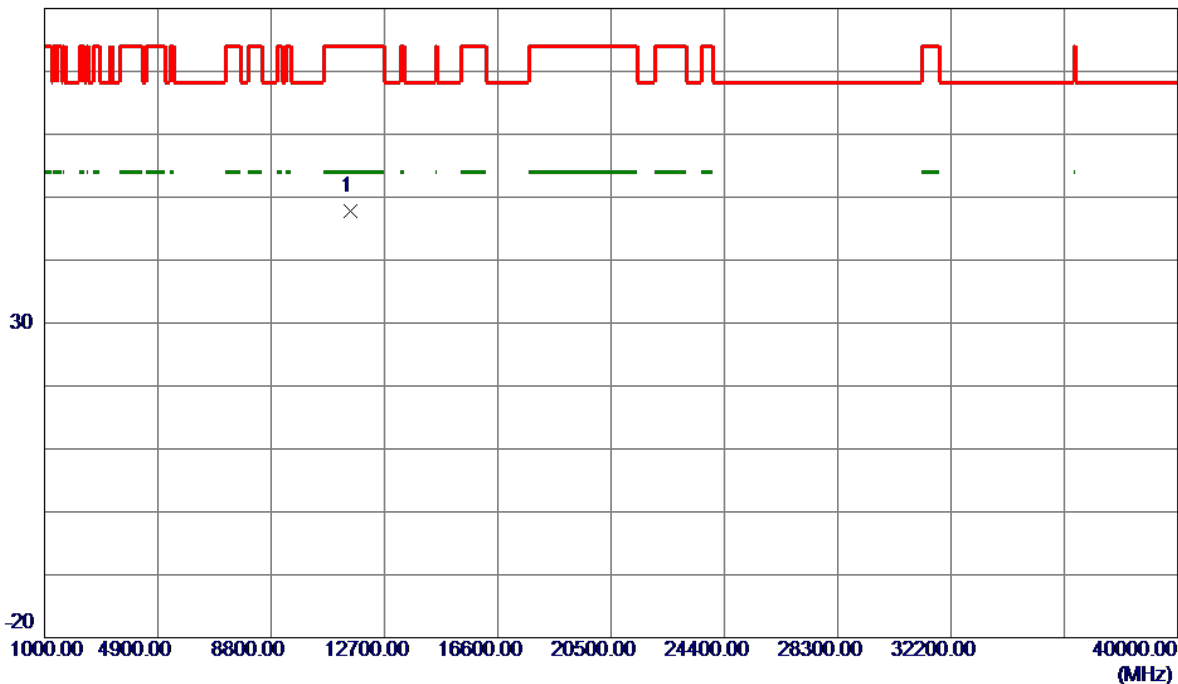

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11550.0000	45.54	2.26	47.80	74.00	-26.20	Peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	20.350	17.000
40	5200	27.199	17.100
48	5240	40.489	19.300

CH36

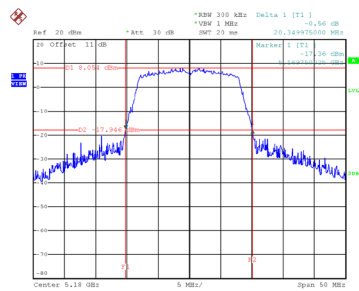


Date: 25.APR.2021 15:33:17

CH40
26 dB Bandwidth

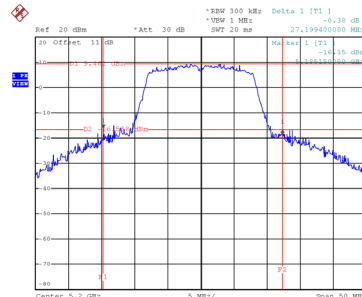


Date: 25.APR.2021 15:35:33

CH48

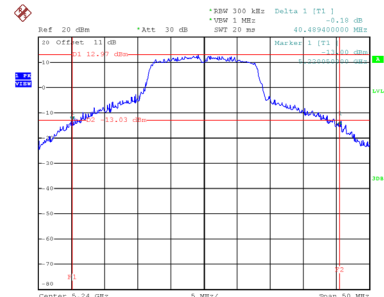


Date: 25.APR.2021 15:37:29


99 % Occupied Bandwidth

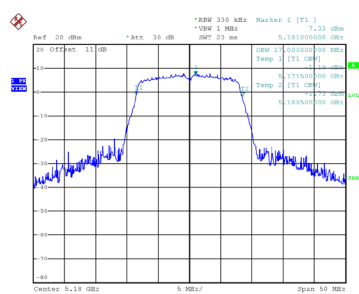

Date: 25.APR.2021 15:32:46

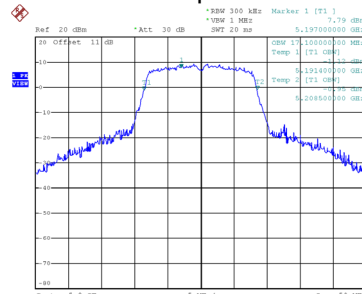

Date: 25.APR.2021 15:35:03

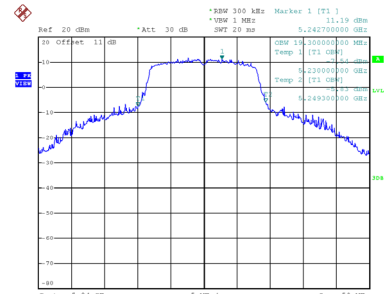


Date: 25.APR.2021 20:39:26

Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	20.650	17.900
40	5200	33.400	18.400
48	5240	53.554	19.500

CH36

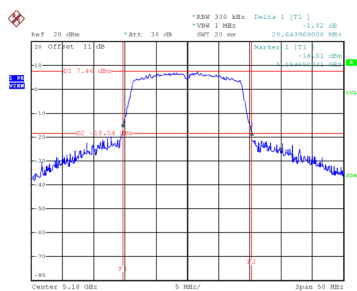


Date: 25.APR.2021 15:58:53

CH40
26 dB Bandwidth

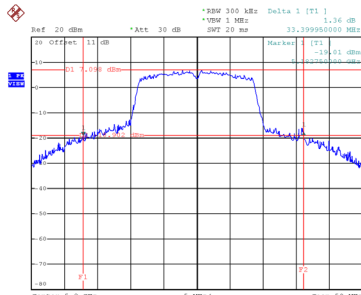


Date: 25.APR.2021 16:07:24

CH48

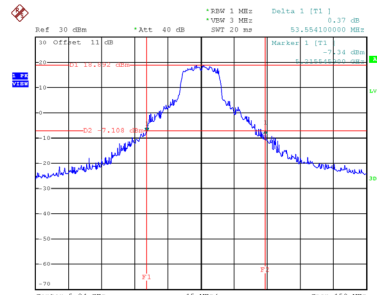


Date: 25.APR.2021 16:13:52


99 % Occupied Bandwidth

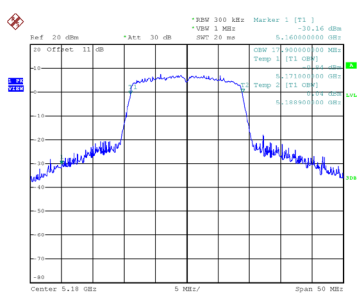

Date: 25.APR.2021 15:58:21

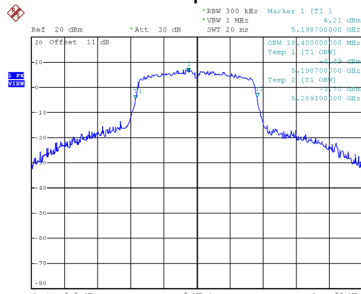

Date: 25.APR.2021 16:07:02

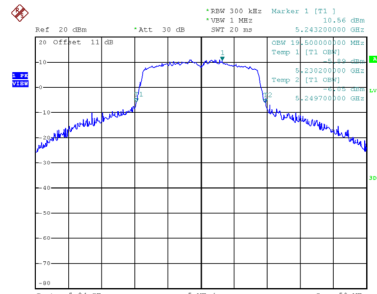


Date: 25.APR.2021 20:43:39

Test Mode	UNII-1_TX AX(HE20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	36.590	19.300
40	5200	32.890	19.400
48	5240	46.500	26.500

CH36

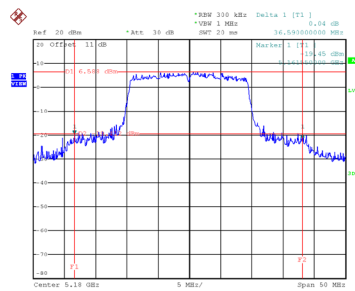


Date: 25.APR.2021 16:36:03

CH40
26 dB Bandwidth

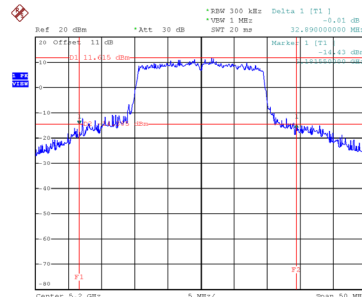


Date: 25.APR.2021 16:47:45

CH48

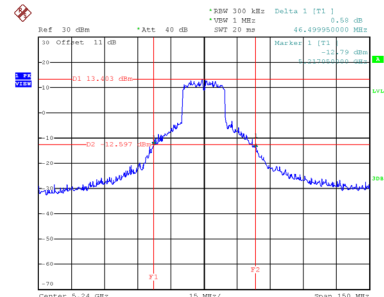


Date: 25.APR.2021 16:50:49


99 % Occupied Bandwidth

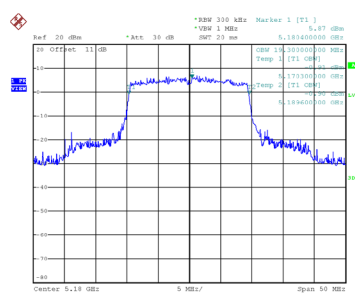

Date: 25.APR.2021 16:35:43

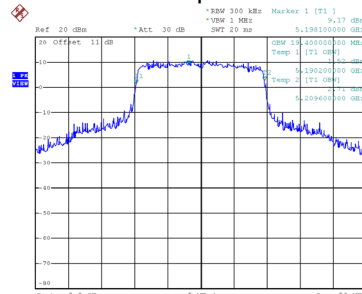

Date: 25.APR.2021 16:47:10

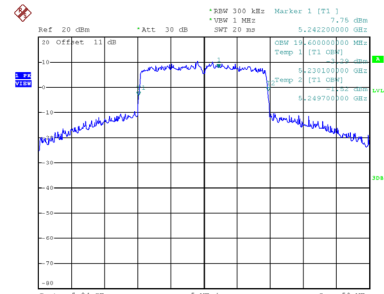


Date: 26.APR.2021 22:52:16


Test Mode	UNII-1_TX AX(HE40) Mode
-----------	-------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	39.300	37.800
46	5230	51.396	38.200



CH38

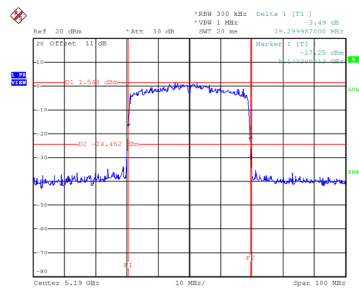

CH46
26 dB Bandwidth

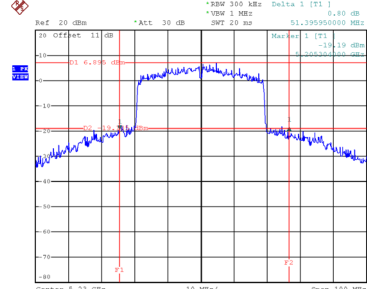


99 % Occupied Bandwidth

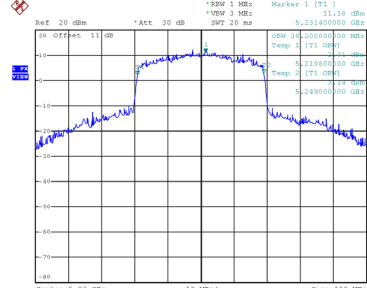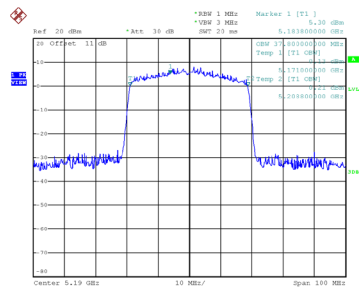

Test Mode	UNII-1_TX AX(HE80) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	81.200	77.200

CH42 26 dB Bandwidth

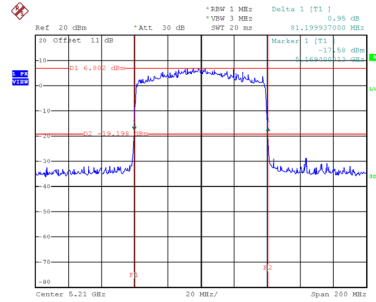

Date: 25.APR.2021 17:02:24

99 % Occupied Bandwidth

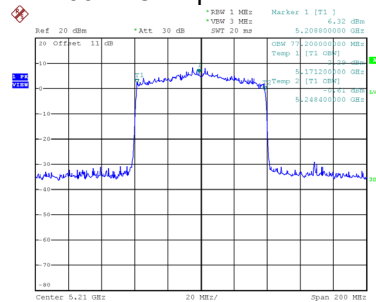

Date: 25.APR.2021 17:01:44