




## Appendix E:Maximum Power Spectral Density Level


Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	Ant1	-3.21	8	Pass
b	2437	Ant1	-3.37	8	Pass
b	2462	Ant1	-3.21	8	Pass
g	2412	Ant1	-12.49	8	Pass
g	2437	Ant1	-12.79	8	Pass
g	2462	Ant1	-12.99	8	Pass
n20	2412	Ant1	-12.57	8	Pass
n20	2437	Ant1	-12.61	8	Pass
n20	2462	Ant1	-12.86	8	Pass
ax20	2412	Ant1	-14.31	8	Pass
ax20	2437	Ant1	-14.96	8	Pass
ax20	2462	Ant1	-14.68	8	Pass

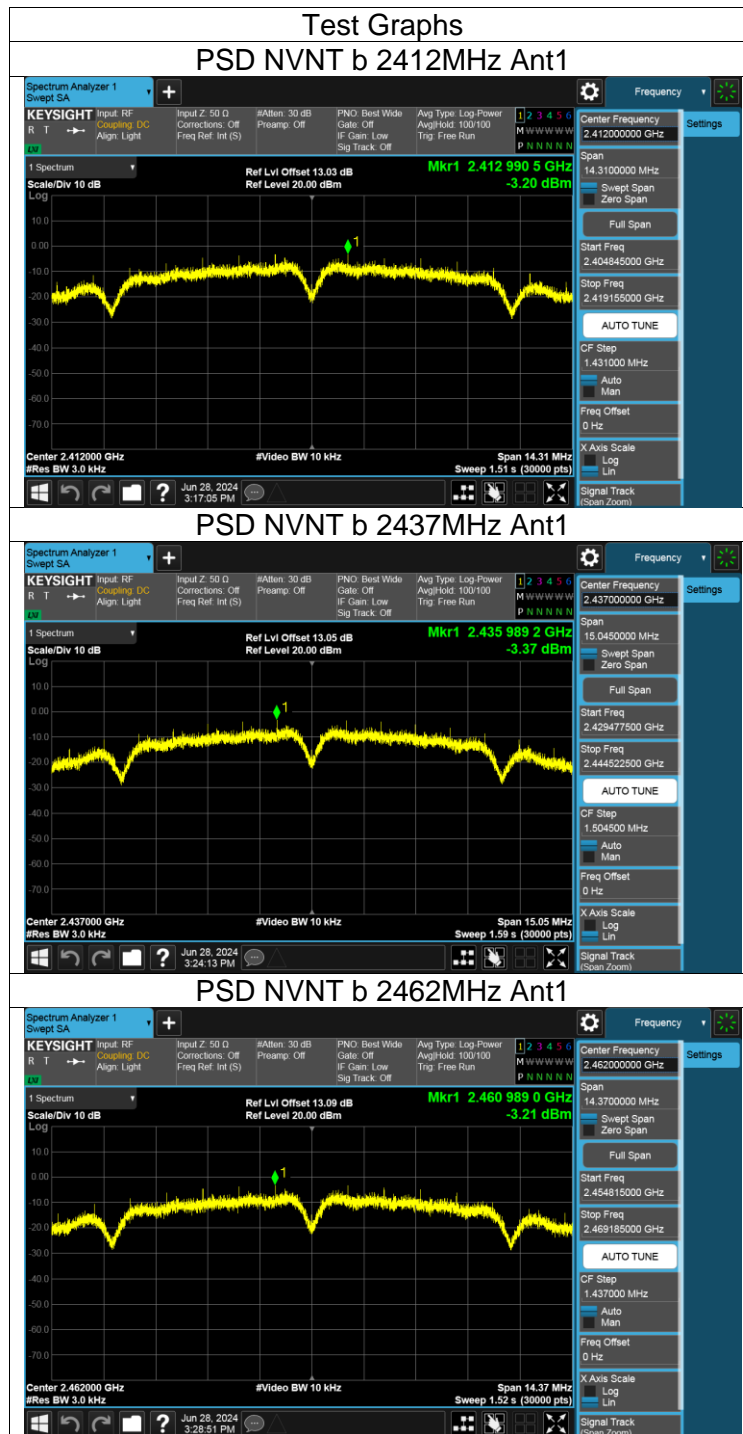

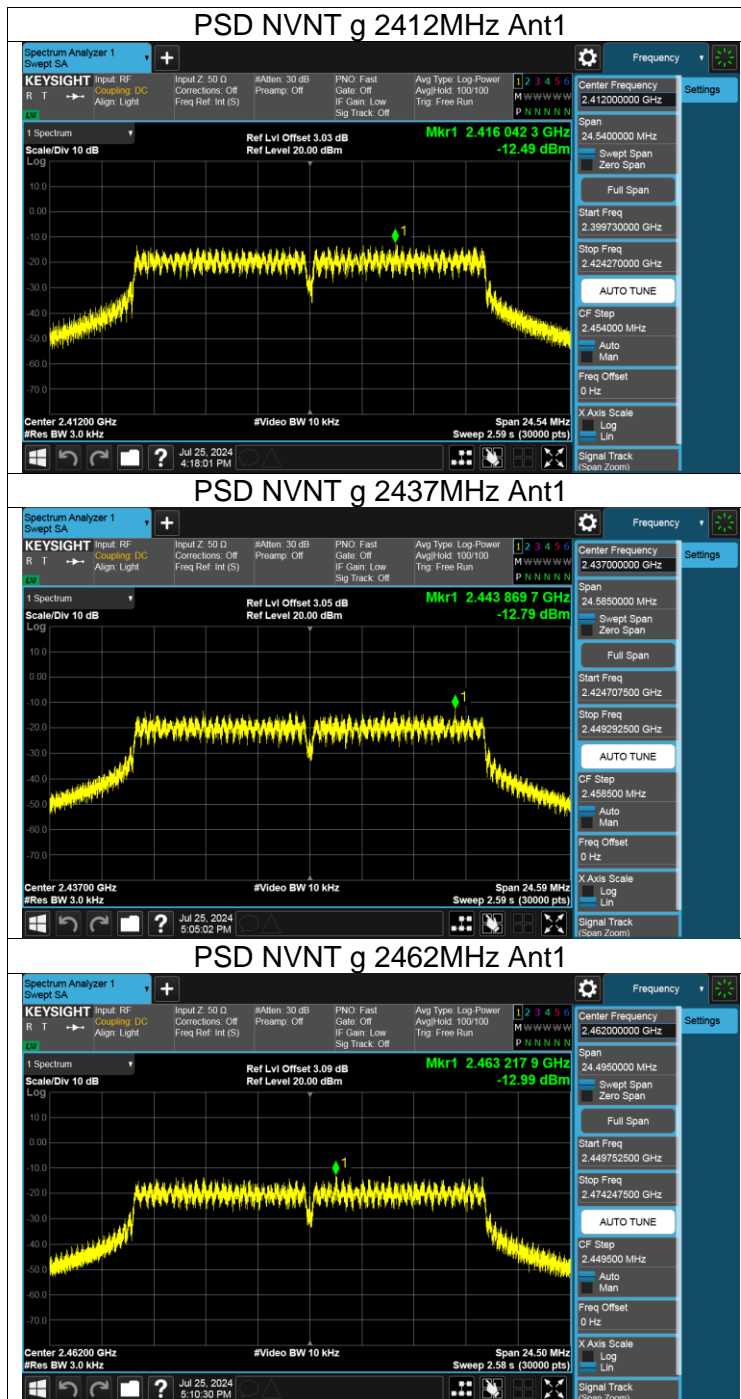

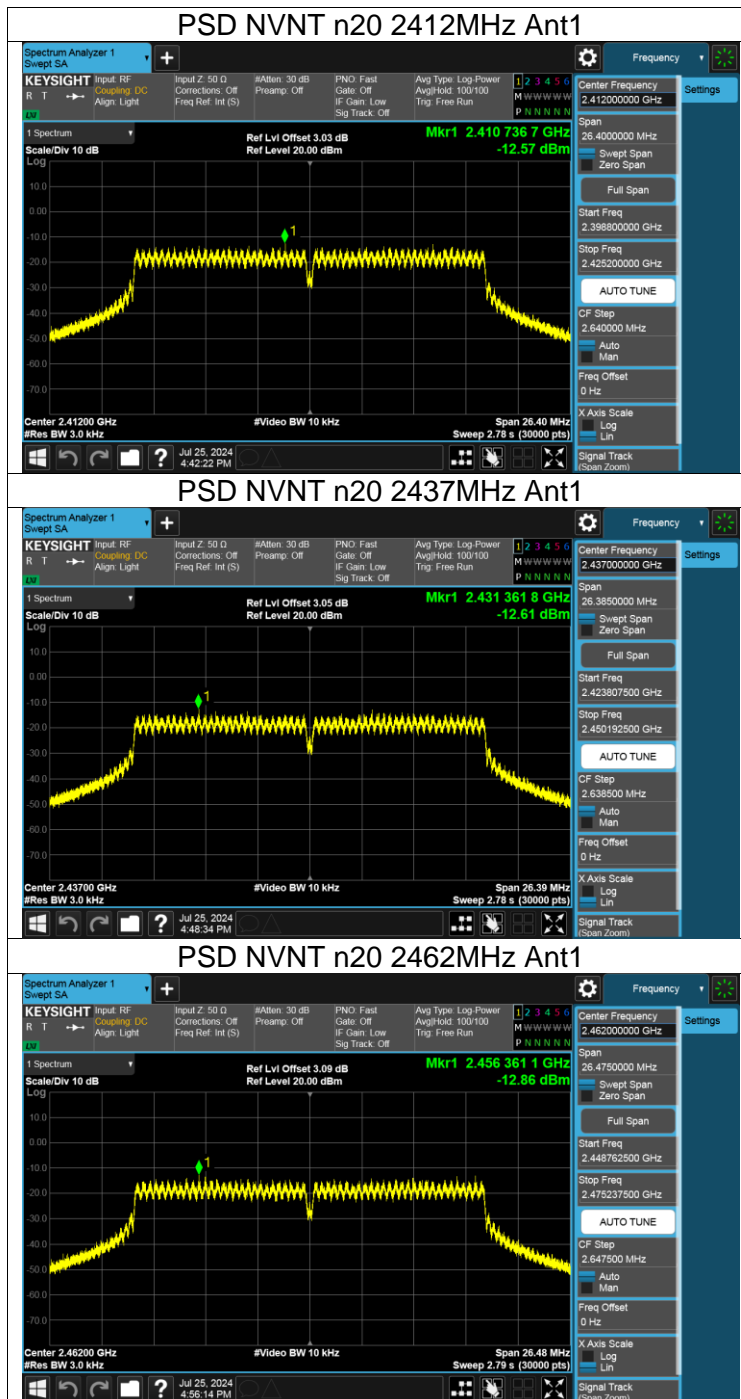





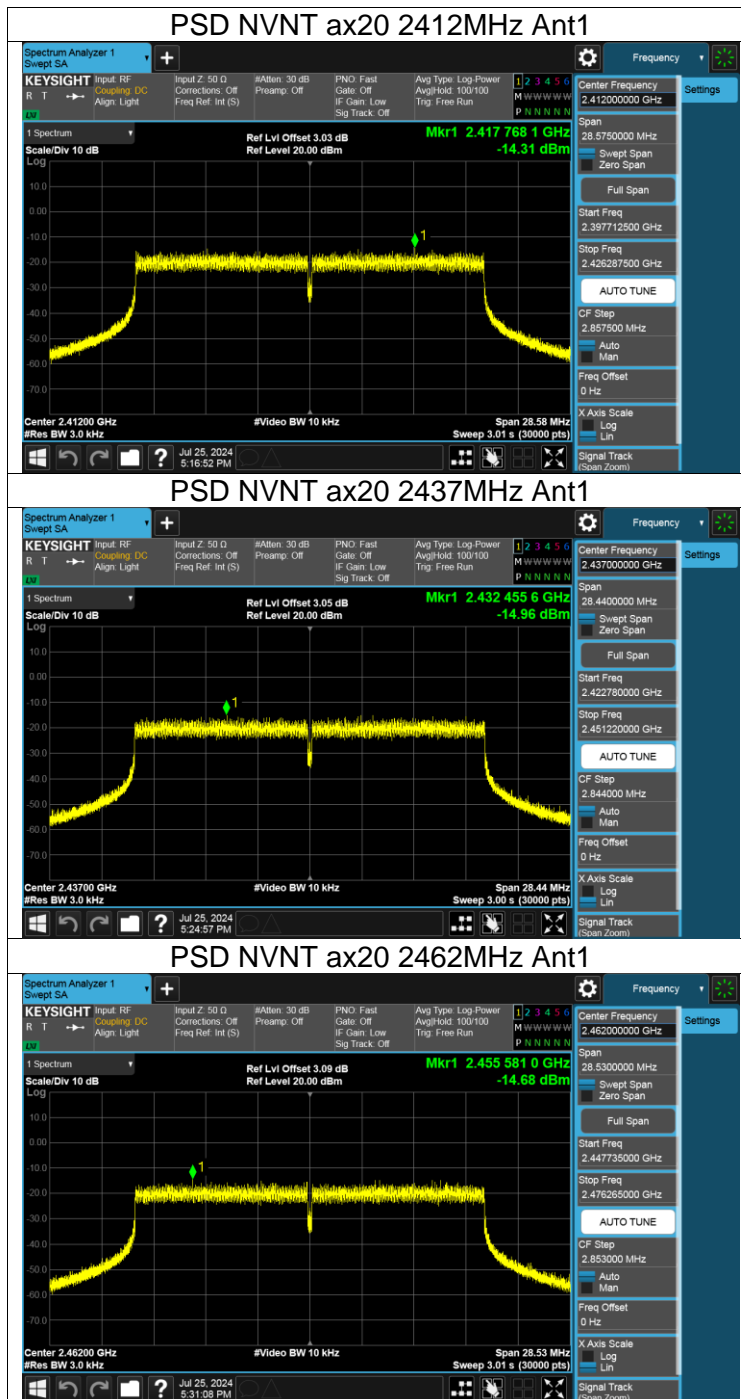



## Appendix F:Band Edge

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-35.81	-20	Pass
b	2462	Ant1	-52.08	-20	Pass
g	2412	Ant1	-31.92	-20	Pass
g	2462	Ant1	-47.77	-20	Pass
n20	2412	Ant1	-30	-20	Pass
n20	2462	Ant1	-43.64	-20	Pass
ax20	2412	Ant1	-28.1	-20	Pass
ax20	2462	Ant1	-44.47	-20	Pass

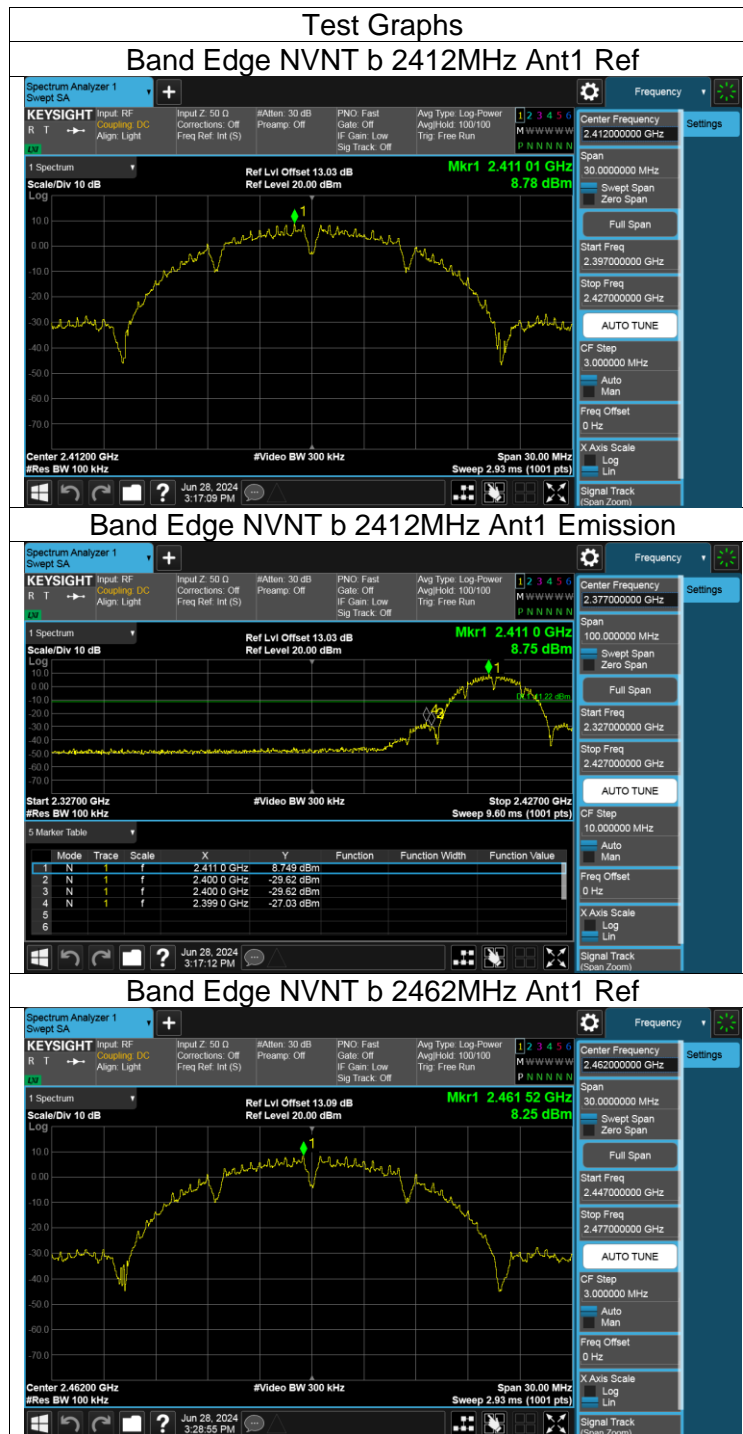


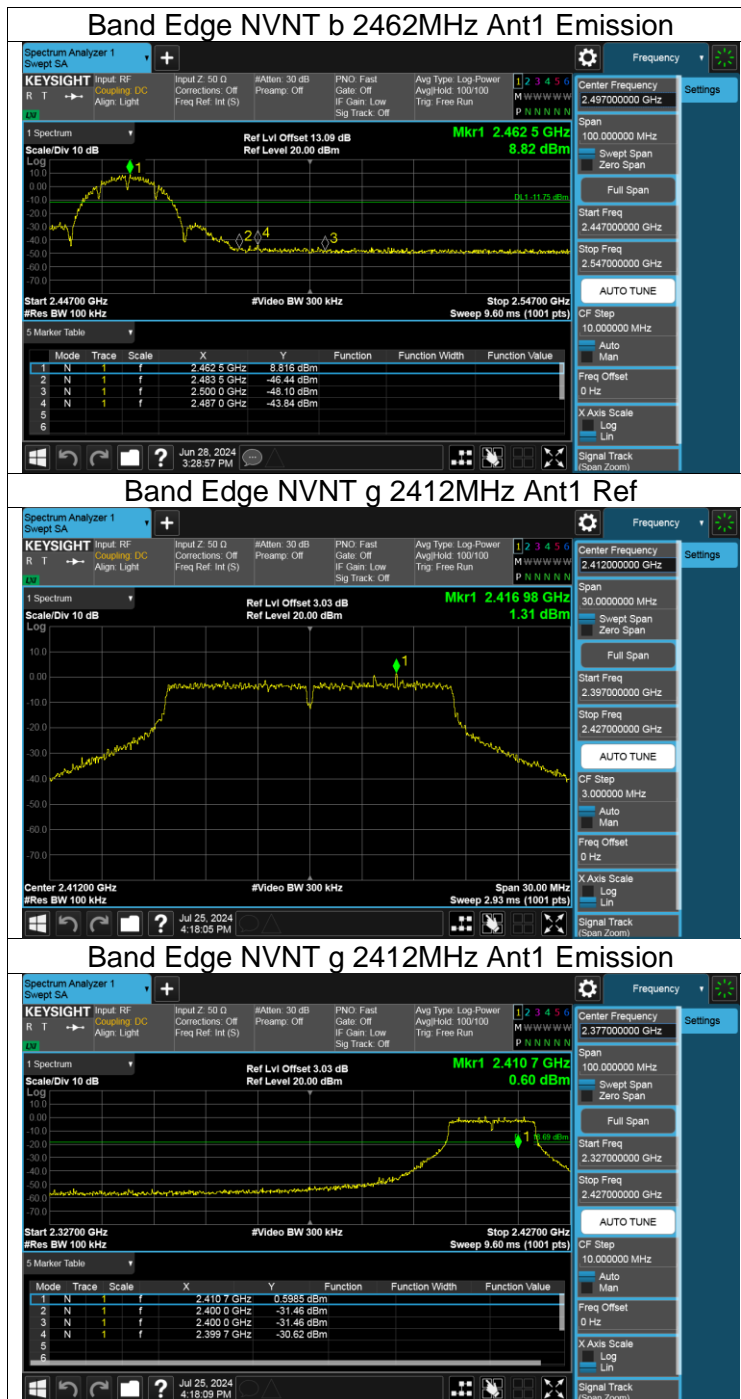

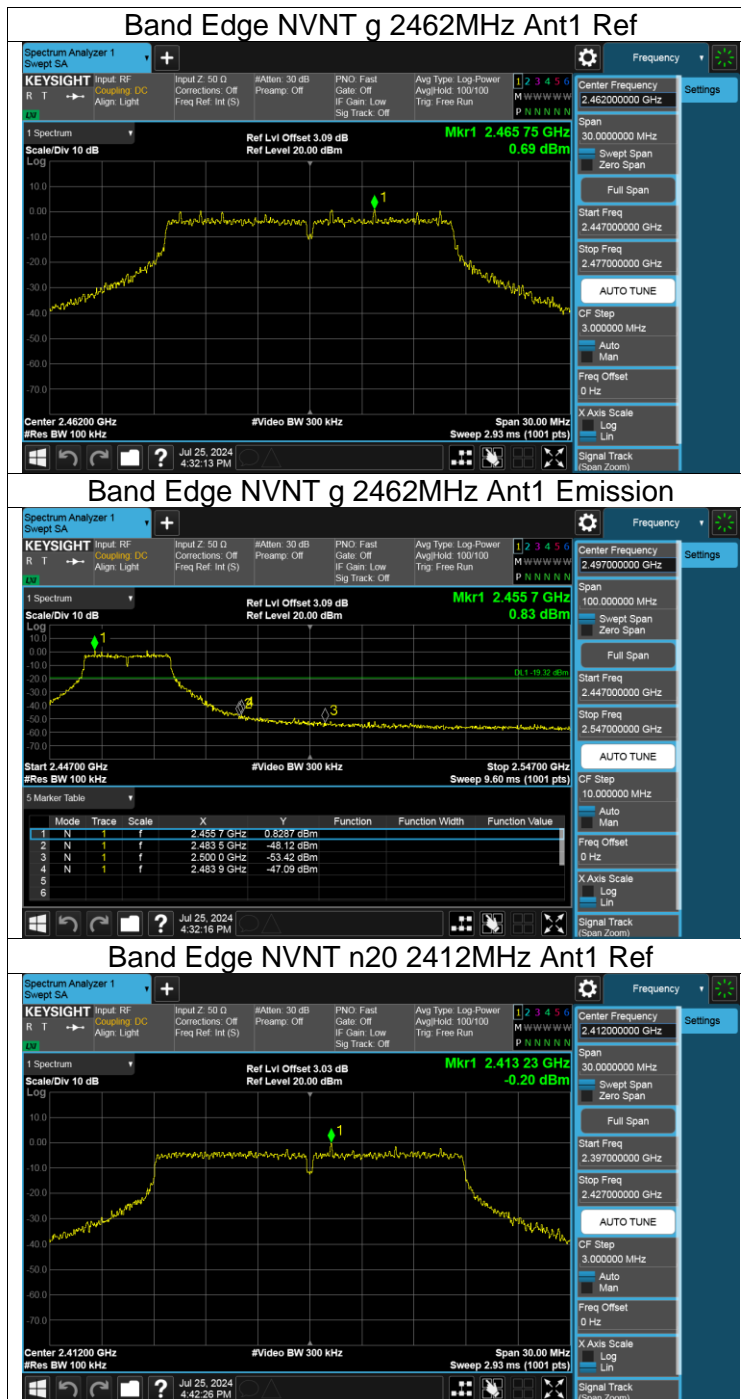

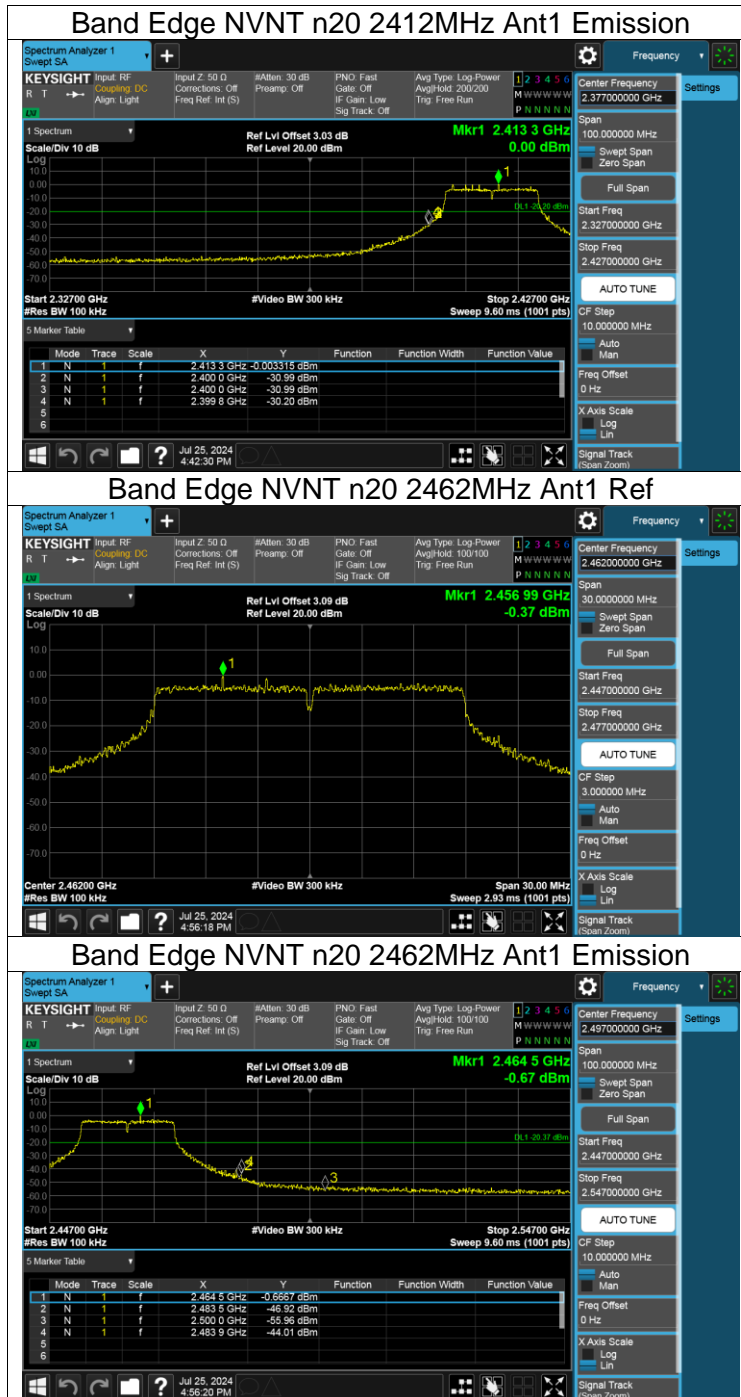



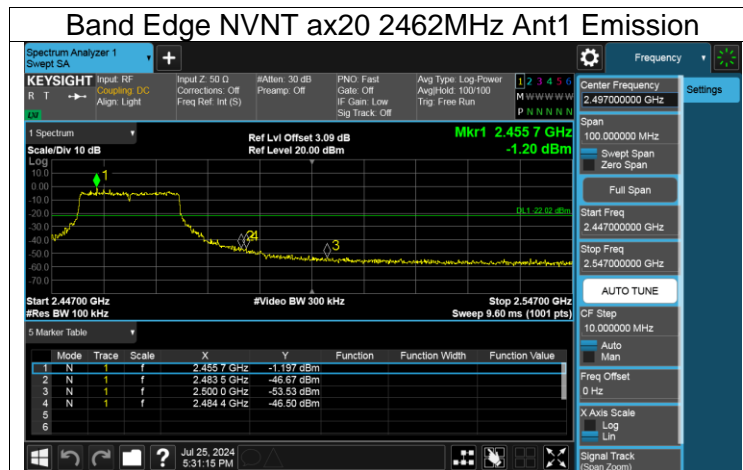



## Appendix G: Conducted RF Spurious Emission

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-48.03	-20	Pass
b	2437	Ant1	-47.28	-20	Pass
b	2462	Ant1	-48.16	-20	Pass
g	2412	Ant1	-49.61	-20	Pass
g	2437	Ant1	-50.16	-20	Pass
g	2462	Ant1	-49.64	-20	Pass
n20	2412	Ant1	-47.81	-20	Pass
n20	2437	Ant1	-47.66	-20	Pass
n20	2462	Ant1	-47.46	-20	Pass
ax20	2412	Ant1	-47.73	-20	Pass
ax20	2437	Ant1	-47.23	-20	Pass
ax20	2462	Ant1	-45.93	-20	Pass

