



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C.
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 1 of 65



RF TEST REPORT

Product Name : 802.11b/g Wireless Station Adapter / Access Point

Model Number : XG-580 ; XG-580 plus

FCC ID : M4Y-04-580

Applicant : Z-Com, Inc.

Address : 7F-2, No. 9, Prosperity Rd. I, Science-Based
Industrial Park, Hsin-chu, Taiwan, R.O.C.

Received Date : May 20, 2004

Tested Date : May 20 ~ June 10, 2004

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to testing, and be invalid as separately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the date issued.
5. The report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.



0240
ILAC MRA

NVLAP
NVLAP LAB CODE 289119-8



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 2 of 65

Test Report Certification

Product Name : 802.11b/g Wireless Station Adapter / Access Point
Model Number : XG-580 ; XG-580 plus
FCC ID : M4Y-04-580
Applicant : Z-Com, Inc.

Measurement Standard :

FCC 47 C.F.R. Part 15, Subpart B and Subpart C (Section 15.247),
ANSI C63.4-2001

Tested By : H.P. Wu, Date : June 10, 2004
(H. P. Wu)

Reviewed By : S. B. Lu, Date : June 10, 2004
(S. B. Lu)

Approved By : C. F. Wu, Date : June 10, 2004
(C.F.Wu, Manager)



WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



TABLE OF CONTENTS

TITLE	PAGE NO.
1. GENERAL INFORMATION	5
1.1 General Statement	5
1.2 General Description of EUT & Power	5
1.3 Description of Test Modes	6
1.4 Description of Peripherals	6
1.5 EUT & Peripherals Setup Diagram	6
1.6 EUT Operating Condition	7
1.7 Description of Test Site.....	7
1.8 Summary of Test Results	8
2. CONDUCTED POWERLINE TEST	9
2.1 Test Equipments.....	9
2.2 Test Setup.....	9
2.3 Conducted Power Line Emission Limit	10
2.4 Test Procedure.....	10
2.5 Uncertainty of Conducted Emission	10
2.6 Conducted RF Voltage Measurement	11-14
2.7 Photos of Conduction Test	15
3. RADIATED EMISSION TEST	16
3.1 Test Equipments.....	16
3.2 Test Setup.....	16
3.3 Radiation Limit	17
3.4 Test Procedures	18
3.5 Uncertainty of Radiated Emission	18
3.6 Radiated RF Noise Measurement.....	19-44
3.7 Photos of Open Site.....	45-46
4. 6dB BANDWIDTH MEASUREMENT	47
4.1 Test Equipments.....	47
4.2 Test Setup.....	47
4.3 Limits of 6dB Bandwidth Measurement	47
4.4 Test Procedure.....	47
4.5 Uncertainty of Conducted Emission	47
4.6 Test Results	48
4.7 Photo of 6db Bandwidth Measurement.....	49-50



TABLE OF CONTENTS

TITLE	PAGE NO.
5. MAXIMUM PEAK OUTPUT POWER	51
5.1 Test Equipments.....	51
5.2 Test Setup.....	51
5.3 Limits of Maximum Peak Output Power	51
5.4 Test Procedure.....	52
5.5 Uncertainty of Conducted Emission	52
5.6 Test Results	52
6. POWER SPECTRAL DENSITY MEASUREMENT	53
6.1 Test Equipments.....	53
6.2 Test Setup.....	53
6.3 Limits of Power Spectral Density Measurement.....	53
6.4 Test Procedure.....	54
6.5 Uncertainty of Conducted Emission	54
6.6 Test Results	54
6.7 Photo of Power Spectral Density Measurement.....	55
7. BAND EDGE MEASUREMENT	57
7.1 Test Equipments.....	57
7.2 Test Setup.....	57
7.3 Limits of Out of Band Emissions Measurement	57
7.4 Test Procedure.....	57
7.5 Uncertainty of Conducted Emission	57
7.6 Test Results	58
7.7 Photo of Band Edge Measurement.....	59-62
8. ANTENNA REQUIREMENT	63
8.1 Standard Applicable.....	63
8.2 Antenna Connected Construction	63
9. RF EXPOSURE EVALUATION	64
9.1 Friis Formula.....	64
9.2 EUT Operating Condition	64
9.3 Test Result of RF Exposure Evaluation	65
9.3.1 Antenna Gain	65
9.3.2 Output Power into Antenna & RF Exposure Evaluation Distance	65



1. GENERAL INFORMATION

1.1 General Statement

MEASUREMENT DEVIATION : Comply with standard in full

TRACEABILITY : This test result is traceable to National or International std.

1.2 General Description of EUT & Power

PRODUCT NAME : 802.11b/g Wireless Station Adapter / Access Point
MODEL NUMBER : XG-580 ; XG-580 plus
FREQUENCY RANGE : 2400MHz to 2483.5MHz
FREQUENCY CHANNEL : 2412MHz + 5×n (MHz), n=0, 1, 2,.....10
CHANNEL NUMBER : 11
CHANNEL SPACING : 5MHz
AIR DATA RATE : 802.11b Mode : 1, 2, 5.5, 11 Mbps
 802.11g Mode : 6, 9, 12, 18, 24, 36, 48, 54 Mbps
TYPE OF MODULATION : 802.11b : DSSS(CCK, DQPSK, DBPSK)
 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK)
FEQUENCY SELECTION : by software / firmware
EUT Description : 2.4GHz (Direct Sequence Spread Spectrum and
 Orthogonal Frequency Division Multiplex)
 Data Transceiver for WLAN application
ANTENNA TYPE : Dipole Antenna, Antenna gain : 2dBi
I/O PORT : LAN Port × 1
POWER SOURCE : 5VDC (From Power Adapter)

Power Adapter	Manufacturer	Model No.	Power Input	Power Output
1	Bothhand Enterprise Inc.	M1-10S05	100~120VAC, 47~63Hz, 0.5A	5VDC, 2A

MULTIPLE-LIST :

Company	Address	Product Name	Model Number
CASTLENET TECHNOLOGY INC	16F, No. 957 Chung-cheng Road, Chung-Ho City, Taipei, Taiwan, R.O.C.	802.11b/g Wireless Station Adapter	WE9241
2Wire, Inc.	1704 Automation Parkway, San Jose, CA 95131, USA	2Wire 802.11g Gaming Wireless Adapter	XG-580

1.3 Description of Test Modes

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		


Note:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.

1.4 Description of Peripherals

No.	Product	Manufacturer	Model No.	Serial No.	FCC ID
1	Notebook PC	COMPAQ	N 800V	5Y33KSQZMOXV 1YR	DOC
2	802.11g ProSafe Wireless Access Point	NETGEAR	WG302	-----	PY3WG302

1.5 EUT & Peripherals Setup Diagram

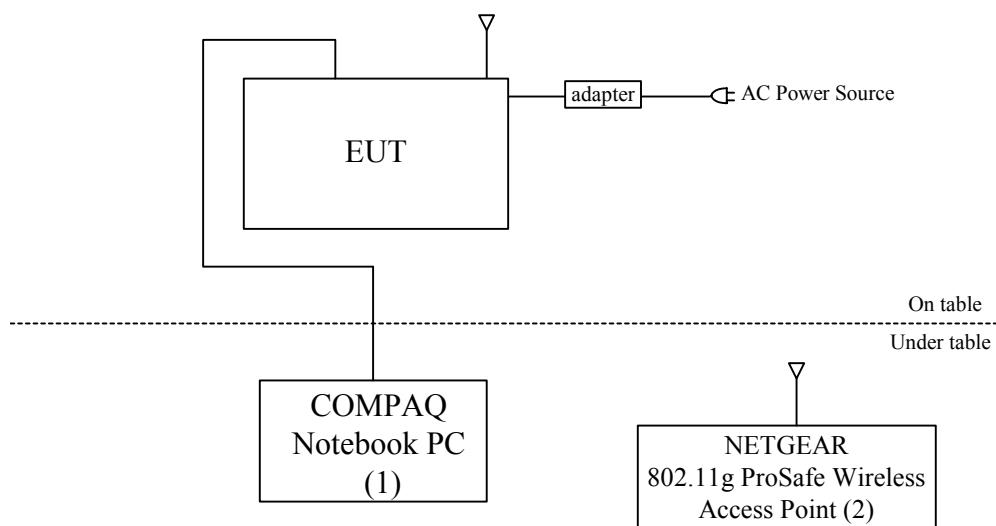

The indicated numbers (1)(2)..., please refer to item 1.3



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 7 of 65

1.6 EUT Operating Condition

1. Setup all computers like the setup diagram.
2. Notebook(1) set ip:192.168.0.1
3. Notebook(1) run test program XG-580 ; XG-580 plus test v2.1\ DutApi_AP_G.EXE.
4. key in 65 26 53 - set power.
5. key in 78 1 - set test mode 、 25 1 4 - set 802.11b mode 、 12 1 - set channel 1
6. Start test.

1.7 Description of Test Site

SITE DESCRIPTION :

FCC Certificate NO. : 90585
BSMI Certificate NO. : SL2-IN-E-0002
NVLAP Lab code : 200118-0
CNLA Certificate NO. : CNLA-ZL97018
VCCI Certificate NO. : R-1229, C-1250
TÜV Rheinland Certificate NO. : 10008375

NAME OF SITE : Ecom Sertech Corp. Hsin-Chu Lab.
(Spin-off from ITRI / ERSO on Apr. 01, 2003)

SITE LOCATION : Rm.258, Bldg.17, NO.195 , Sec. 4, Chung Hsing Rd.,
Chu-Tung Chen. Hsin-Chu, Taiwan 310 R.O.C.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 8 of 65

1.8 Summary of Test Results

The EUT has been tested according to the following specifications :

APPLIED STANDARD : FCC 47 C.F.R. Part 15, Subpart B and Subpart C			
Standard Section	Test Item and Limit	Result	REMARK
15.107 15.207	AC Power Conducted Emission Limit : 15.107	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Orthogonal Frequency Division Multiplex System Limit : 6dB bandwidth > 500KHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit : max. 30dBm	PASS	Meet the requirement of limit
15.109 15.205 15.209	Transmitter Radiated Emissions Limit : Table 15.209	PASS	Meet the requirement of limit
15.247(d)	Power Spectral Density Limit : max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Out of Band Emission and Restricted Band Radiation Limit:20dB less than peak value of fundamental frequency Restricted band Limit:Table 15.209	PASS	Meet the requirement of limit


2. CONDUCTED POWERLINE TEST

2.1 Test Equipments

The following test equipments are used during the conducted powerline tests :

Manufacturer or Type	Model No.	Serial No.	Date of Calibration	Calibration Period	Remark
HP SPECTRUM ANALYZER & DISPLAY	8568A	2235A02320	November 01, 2003	1 Year	PRETEST
HP QUASI-PEAK ADAPTER	85650 A	2341A00672	November 01, 2003	1 Year	PRETEST
SOLAR ISOLATION TRANSFORMER	7032-1	N/A	N/A	N/A	FINAL
EMCO L.I.S.N.	3850/2	9311-1025 9401-1028	January 08, 2004 For Characteristic impedance	1 Year	FINAL
			May 18, 2004 For Insertion loss		
R & S TEST RECEIVER	ESHS30	838550/003	February 11, 2004	1 Year	FINAL
KEENE SHIELDED ROOM	5983	No.1	July 10~12, 2003	N/A	FINAL
R & S PULSE LIMIT	EHS3Z2	357.8810.52	July 10, 2003	1 Year	FINAL
N TYPE COAXIAL CABLE	-----	-----	July 10, 2003	1 Year	FINAL
50Ω TERMINATOR	-----	-----	July 10, 2003	1 Year	FINAL

2.2 Test Setup

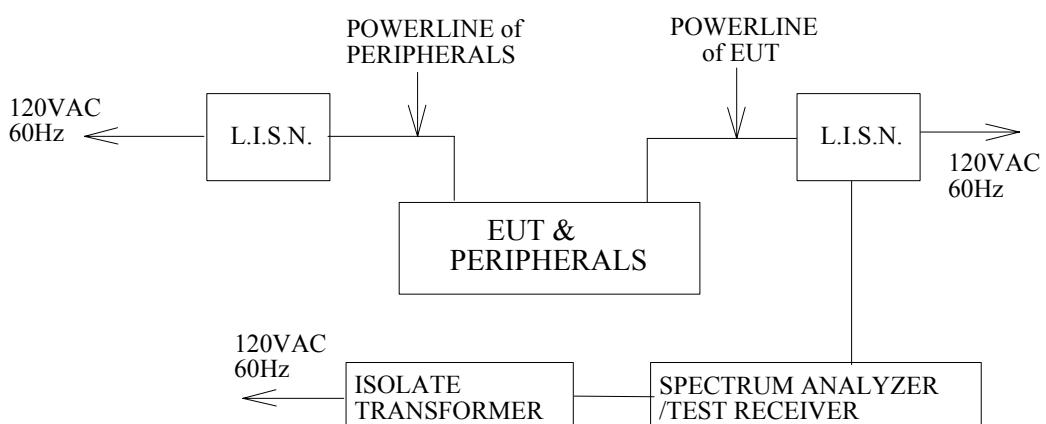



2.3 Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56	56-46
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

For intentional device, according to § 15.207(a) Line Conducted Emission Limit is same as above table.

2.4 Test Procedure

The test procedure is performed in a 12ft×12ft×8ft(L×W×H) shielded room. The EUT along with its peripherals were placed on a 1.0m(W)× 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.36dB.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720


FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 11 of 65

2.6 Conducted RF Voltage Measurement

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company:	Z-Com, Inc.	Test Date:	2004/05/14
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	25°C, 60%

LINE

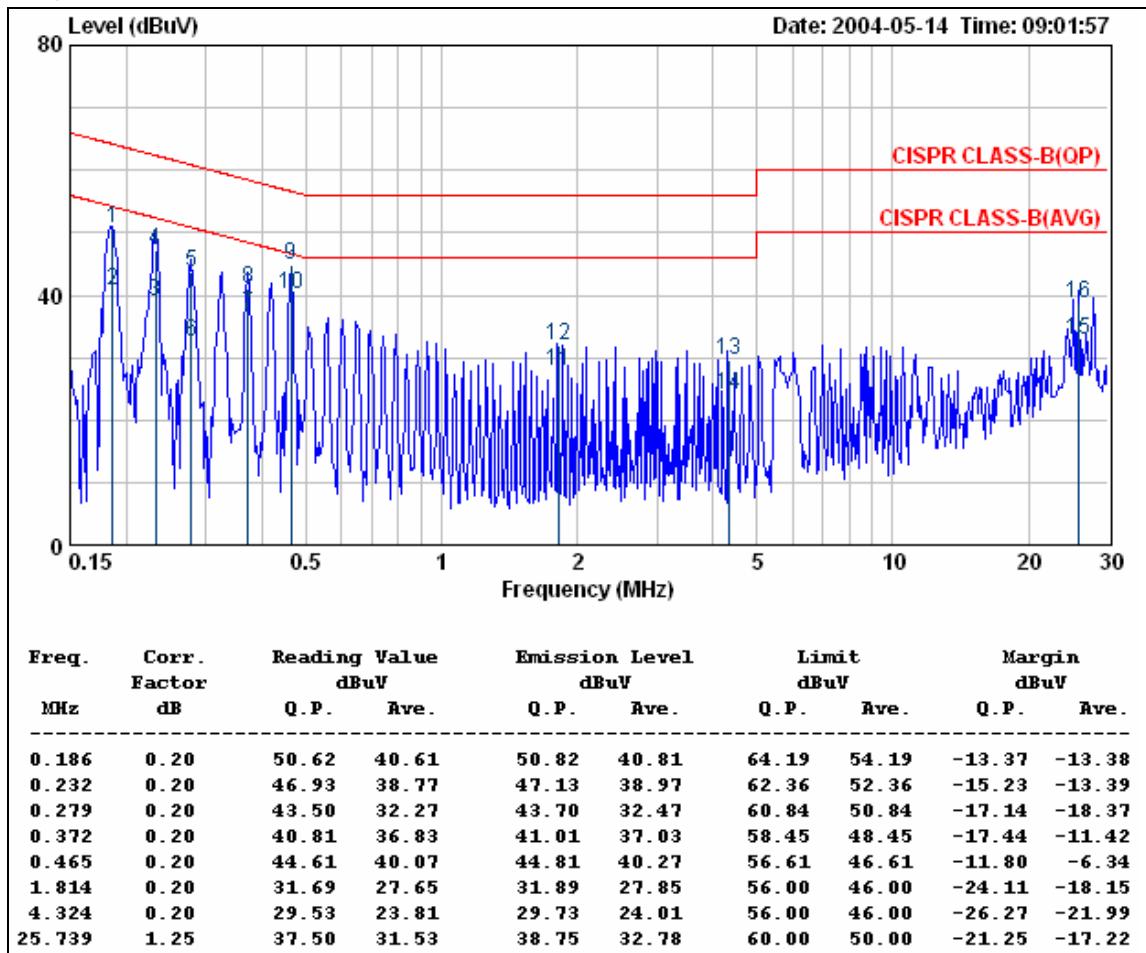

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. Mode : 802.11b mode.
4. The EUT can be operated in transmitting, stand-by and receiving mode.
After preliminary scan, EUT in transmitting mode has highest emission.
The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom SerTech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 12 of 65

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company:	Z-Com, Inc.	Test Date:	2004/05/14
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	25°C, 60%

NEUTRAL

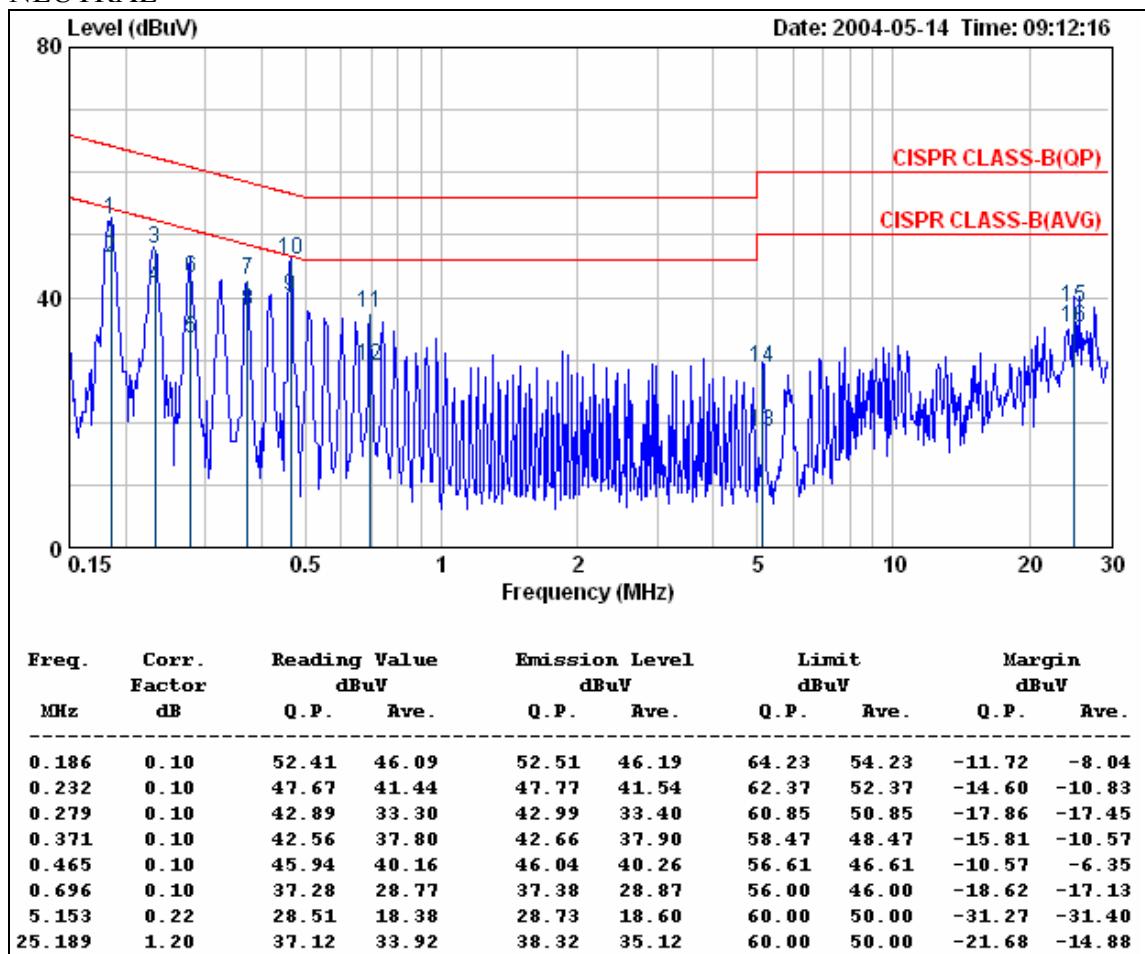

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. Mode : 802.11b mode.
4. The EUT can be operated in transmitting, stand-by and receiving mode.
After preliminary scan, EUT in transmitting mode has highest emission.
The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom SerTech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 13 of 65

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company:	Z-Com, Inc.	Test Date:	2004/05/14
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	25°C , 60%

LINE

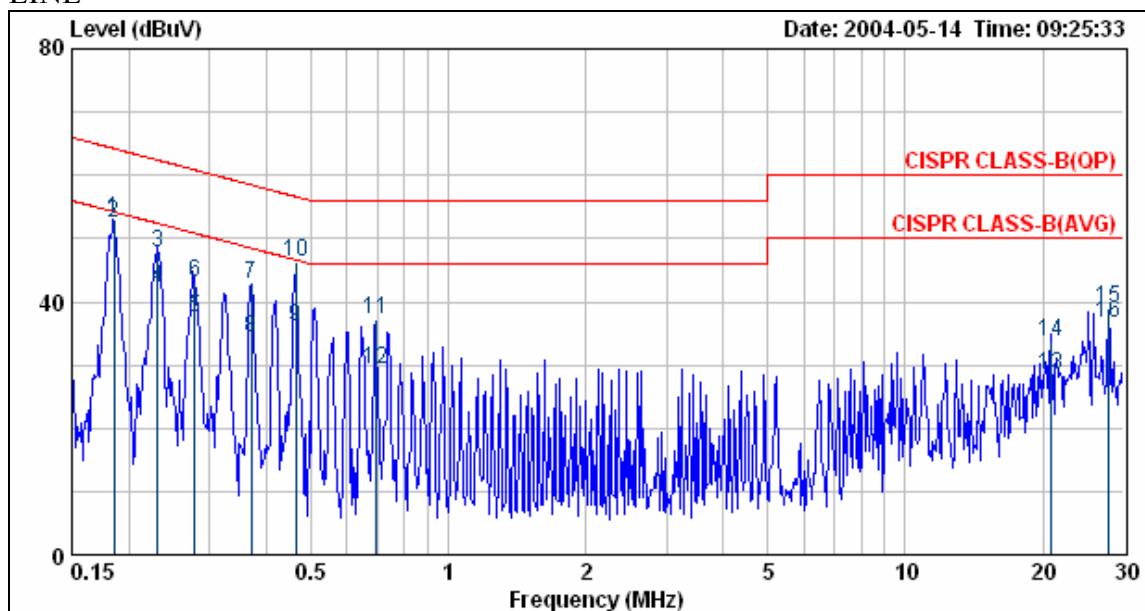

Freq. MHz	Corr. Factor dB	Reading Value dBuV		Emission Level dBuV		Limit dBuV		Margin dBuV	
		Q. P.	Ave.	Q. P.	Ave.	Q. P.	Ave.	Q. P.	Ave.
0.186	0.10	52.39	52.95	52.49	53.05	64.22	54.22	-11.73	-1.17
0.232	0.10	47.76	42.05	47.86	42.15	62.39	52.39	-14.53	-10.24
0.278	0.10	42.93	37.49	43.03	37.59	60.87	50.87	-17.84	-13.28
0.371	0.10	42.65	34.16	42.75	34.26	58.47	48.47	-15.72	-14.21
0.464	0.10	46.10	35.91	46.20	36.01	56.63	46.63	-10.43	-10.62
0.696	0.10	37.18	29.35	37.28	29.45	56.00	46.00	-18.72	-16.55
20.807	0.90	32.68	27.56	33.58	28.46	60.00	50.00	-26.42	-21.54
27.876	1.39	37.51	35.38	38.90	36.77	60.00	50.00	-21.10	-13.23

- REMARKS :
1. Correction Factor = Insertion loss + cable loss
 2. Margin value = Emission level – Limit value
 3. Mode : 802.11g mode.
 4. The EUT can be operated in transmitting, stand-by and receiving mode.
After preliminary scan, EUT in transmitting mode has highest emission.
The EUT was set in transmitting mode at finial test to get the worst case test results.



Ecom SerTech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 14 of 65

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company:	Z-Com, Inc.	Test Date:	2004/05/14
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	25°C, 60%

NEUTRAL

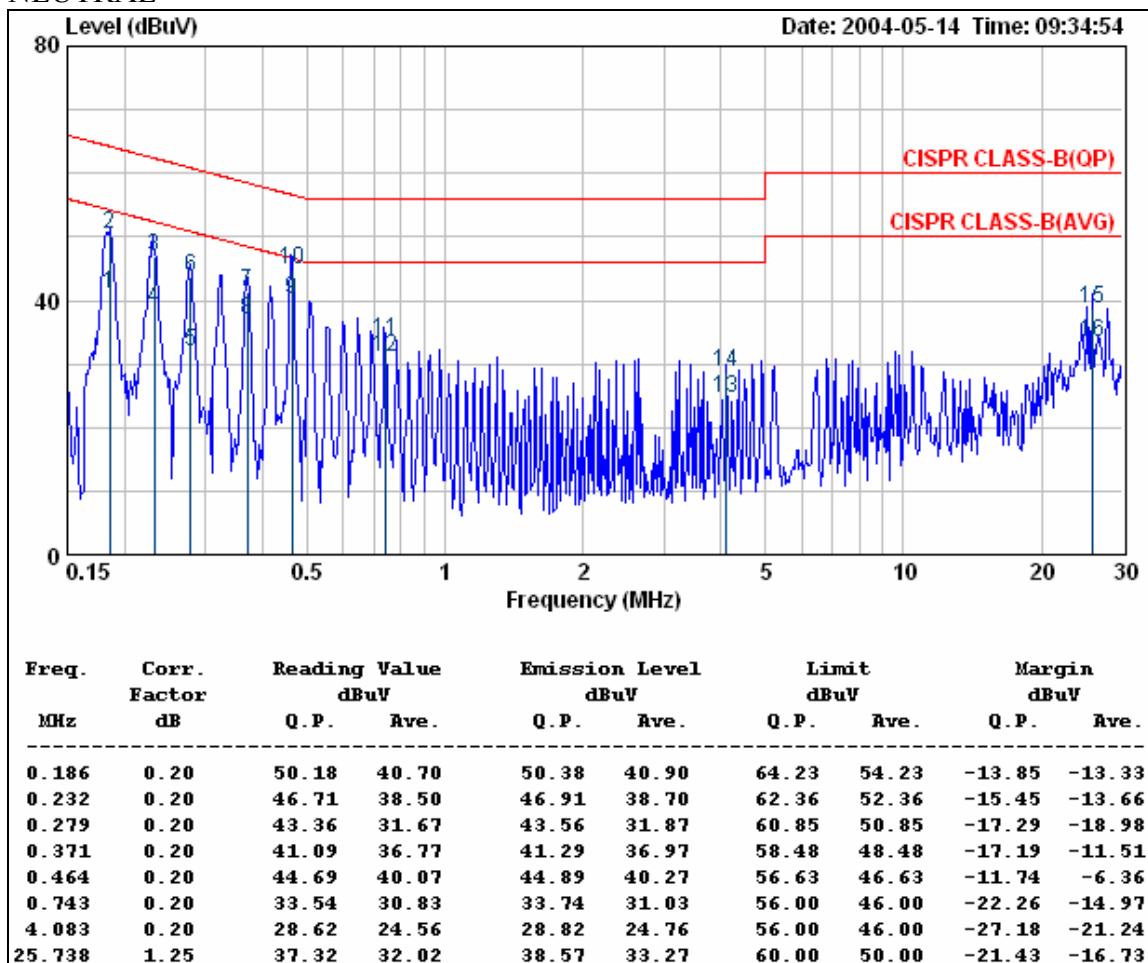

- REMARKS :
1. Correction Factor = Insertion loss + cable loss
 2. Margin value = Emission level – Limit value
 3. Mode : 802.11g mode.
 4. The EUT can be operated in transmitting, stand-by and receiving mode.
After preliminary scan, EUT in transmitting mode has highest emission.
The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 15 of 65

2.7 Photos of Conduction Test



3. RADIATED EMISSION TEST


3.1 Test Equipments

The following test equipments are utilized in making the measurements contained in this report.


Manufacturer or Type	Model No.	Serial No.	Date of Calibration	Calibration Period	Remark
CHASE BI-LOG ANTENNA	CBL6112B	2562	May 20, 2004	1 Year	FINAL
OPEN SITE	-----	No.1	May 06, 2004	1 Year	FINAL
N TYPE COAXIAL CABLE	CHA9525	015	July 13, 2003	1 Year	FINAL
Horn Antenna	AH-118	10089	February 25, 2004	1 Year	FINAL
HP Pre-amplifier	8449B	3008A01471	November 07, 2003	1 Year	FINAL
HP High pass filter	84300/80038	011	cal. on use	1 Year	FINAL
Horn Antenna	AH-840	03077	February 25, 2004	1 Year	FINAL

3.2 Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

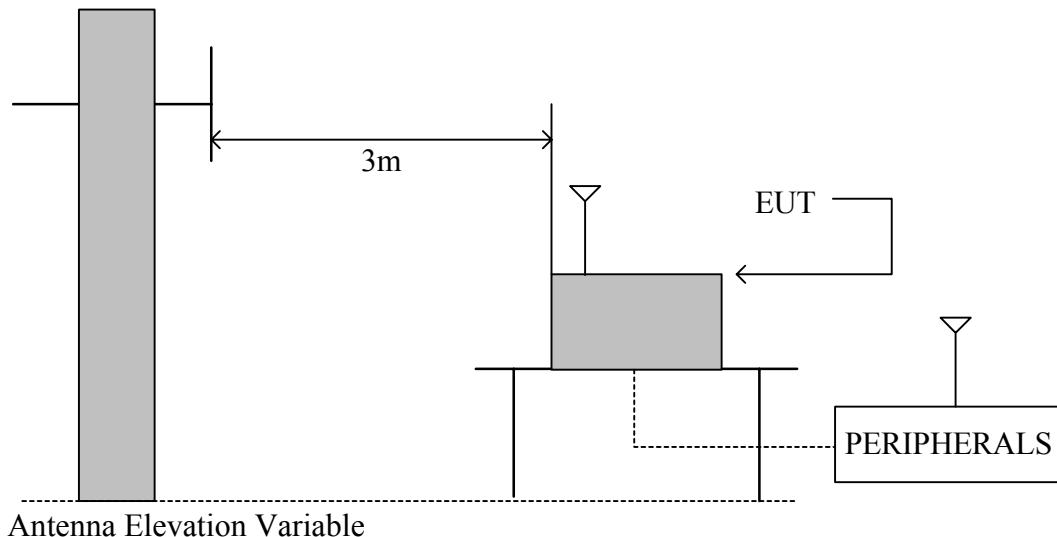

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

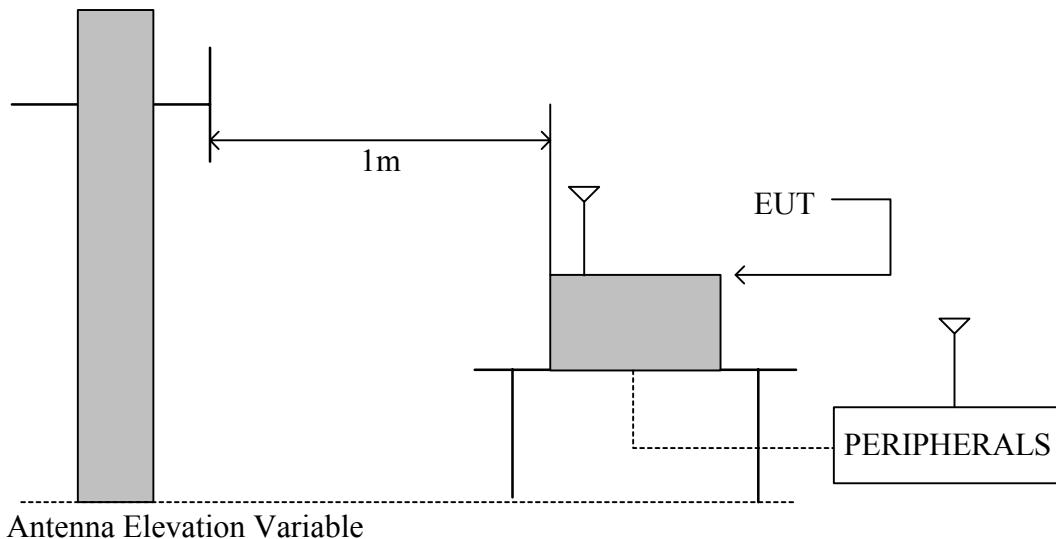

3.3 Radiation Limit

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.



3.4 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Note :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

3.5 Uncertainty of Radiated Emission

The uncertainty of radiated emission is $\pm 2.72\text{dB}$.



3.6 Radiated RF Noise Measurement

Test Requirement: 15.109, 15.209

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

All readings are quasi-peak values.

Company:	Z-Com, Inc.		Test Date:	2004/06/08
Product Name:	802.11b/g Wireless Station Adapter / Access Point		Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus		TEMP&Humidity:	30°C, 52%

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading at 3m(dB μ V)		Limits (dB μ V/m)	Emission Level at 3m(dB μ V/m)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	18.96	0.90	*	*	40.00	*	*
160.00	11.68	2.50	21.00	26.80	43.50	35.18	40.98
250.00	13.22	3.10	24.10	26.70	46.00	40.42	43.02
320.00	14.65	3.42	17.50	19.40	46.00	35.57	37.47
400.00	17.41	3.90	19.40	22.10	46.00	40.71	43.41
440.00	17.88	4.06	16.30	18.40	46.00	38.24	40.34
480.00	18.35	4.22	19.70	16.30	46.00	42.27	38.87
500.00	18.58	4.30	10.30	9.40	46.00	33.18	32.28
640.00	19.45	4.86	13.70	12.70	46.00	38.01	37.01
800.00	20.12	5.50	12.60	11.30	46.00	38.22	36.92
1000.00	21.79	6.40	*	*	54.00	*	*

REMARKS : 1. *Undetectable

2. Emission level (dB μ V/M) = Antenna Factor (dB/m) + Cable loss (dB)
+ Meter Reading (dB μ V).

3. Mode : 802.11b mode.

4. The EUT can be operated in transmitting, stand-by and receiving mode.
After preliminary scan, EUT in transmitting mode has highest emission.

The EUT was set in transmitting mode at final test to get the worst case test results.

5. The test data marked in gray background means the EUT emission data is located in
the margin uncertainty range of emission limits.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 20 of 65

Test Requirement: 15.109, 15.209

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

All readings are quasi-peak values.

Company:	Z-Com, Inc.			Test Date:	2004/06/08	
Product Name:	802.11b/g Wireless Station Adapter / Access Point			Test By:	H. P. Wu	
Model Name:	XG-580 ; XG-580 plus			TEMP&Humidity:	30°C , 52%	

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading at 3m(dB μ V)		Limits (dB μ V/m)	Emission Level at 3m(dB μ V/m)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	18.96	0.90	*	*	40.00	*	*
160.00	11.68	2.50	20.80	25.90	43.50	34.98	40.08
250.00	13.22	3.10	24.80	26.40	46.00	41.12	42.72
320.00	14.65	3.42	18.40	19.00	46.00	36.47	37.07
400.00	17.41	3.90	20.20	18.70	46.00	41.51	40.01
440.00	17.88	4.06	17.00	17.40	46.00	38.94	39.34
480.00	18.35	4.22	19.20	15.50	46.00	41.77	38.07
500.00	18.58	4.30	8.90	7.80	46.00	31.78	30.68
640.00	19.45	4.86	12.80	11.10	46.00	37.11	35.41
800.00	20.12	5.50	12.50	8.60	46.00	38.12	34.22
1000.00	21.79	6.40	*	*	54.00	*	*

- REMARKS :
1. *Undetectable
 2. Emission level (dB μ V/M) =Antenna Factor (dB/m) + Cable loss (dB)
+ Meter Reading (dB μ V).
 3. Mode : 802.11g mode.
 4. The EUT can be operated in transmitting, stand-by and receiving mode.
After preliminary scan, EUT in transmitting mode has highest emission.
The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 21 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH1 RX				Measurement Distance at 1m				Horizontal polarity			
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4076.04	53.50	32.55	4.84	34.90	9.50	0.00	46.50	74	-27.50	P	1.0
4076.04	49.10	32.55	4.84	34.90	9.50	0.00	42.10	54	-11.90	A	1.0
6114.23	46.44	37.33	6.42	34.30	9.50	0.00	46.39	74	-27.61	P	1.0
6114.23	35.55	37.33	6.42	34.30	9.50	0.00	35.50	54	-18.50	A	1.0
8152.07	46.64	39.45	7.37	35.94	9.50	0.00	48.02	74	-25.98	P	1.0
8152.07	35.63	39.45	7.37	35.94	9.50	0.00	37.01	54	-16.99	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. For Wireless 802.11b mode at 11Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 22 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH1 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4076.04	53.36	32.55	4.84	34.90	9.50	0.00	46.36	74	-27.64	P	1.0
4076.04	49.29	32.55	4.84	34.90	9.50	0.00	42.29	54	-11.71	A	1.0
6114.23	46.25	37.33	6.42	34.30	9.50	0.00	46.20	74	-27.80	P	1.0
6114.23	35.69	37.33	6.42	34.30	9.50	0.00	35.64	54	-18.36	A	1.0
8152.07	45.62	39.45	7.37	35.94	9.50	0.00	47.00	74	-27.00	P	1.0
8152.07	36.23	39.45	7.37	35.94	9.50	0.00	37.61	54	-16.39	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. For Wireless 802.11b mode at 11Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 23 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.				Test Date:		2004/06/07			
Product Name:	802.11b/g Wireless Station Adapter / Access Point				Test By:		H. P. Wu			
Model Name:	XG-580 ; XG-580 plus				TEMP&Humidity:		33.7°C, 49%			

CH6 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4126.02	54.13	32.52	4.86	34.90	9.50	0.00	47.11	74	-26.89	P	1.0
4126.02	50.50	32.52	4.86	34.90	9.50	0.00	43.48	54	-10.52	A	1.0
6189.30	45.10	37.48	6.43	34.30	9.50	0.00	45.21	74	-28.79	P	1.0
6189.30	34.87	37.48	6.43	34.30	9.50	0.00	34.98	54	-19.02	A	1.0
8252.14	46.97	39.35	7.45	35.18	9.50	0.00	49.09	74	-24.91	P	1.0
8252.14	65.21	39.35	7.45	35.18	9.50	0.00	67.33	54	13.33	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. For Wireless 802.11b mode at 11Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 24 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH6 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4126.02	54.00	32.52	4.86	34.90	9.50	0.00	46.98	74	-27.02	P	1.0
4126.02	50.59	32.52	4.86	34.90	9.50	0.00	43.57	54	-10.43	A	1.0
6189.30	45.21	37.48	6.43	34.30	9.50	0.00	45.32	74	-28.68	P	1.0
6189.30	35.64	37.48	6.43	34.30	9.50	0.00	35.75	54	-18.25	A	1.0
8252.14	46.20	39.35	7.45	35.18	9.50	0.00	48.32	74	-25.68	P	1.0
8252.14	34.57	39.35	7.45	35.18	9.50	0.00	36.69	54	-17.31	A	1.0

- 1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- 2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- 3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- 4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
- 5. The test limit is 3M limit.
- 6. The frequency was searched to 18GHz.
- 7. The other emission levels were very low against the limit.
- 8. For Wireless 802.11b mode at 11Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 25 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH11 RX				Measurement Distance at 1m				Horizontal polarity			
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4176.04	54.86	32.49	4.88	34.90	9.50	0.00	47.83	74	-26.17	P	1.0
4176.04	51.61	32.49	4.88	34.90	9.50	0.00	44.58	54	-9.42	A	1.0
6264.21	45.21	37.63	6.45	34.30	9.50	0.00	45.49	74	-28.51	P	1.0
6264.21	34.58	37.63	6.45	34.30	9.50	0.00	34.86	54	-19.14	A	1.0
8352.98	16.34	39.25	7.53	34.42	9.50	0.00	19.20	74	-54.80	P	1.0
8352.98	36.52	39.25	7.53	34.42	9.50	0.00	39.38	54	-14.62	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. For Wireless 802.11b mode at 11Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 26 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH11 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4176.04	54.21	32.49	4.88	34.90	9.50	0.00	47.18	74	-26.82	P	1.0
4176.04	52.54	32.49	4.88	34.90	9.50	0.00	45.51	54	-8.49	A	1.0
6264.21	46.25	37.63	6.45	34.30	9.50	0.00	46.53	74	-27.47	P	1.0
6264.21	36.54	37.63	6.45	34.30	9.50	0.00	36.82	54	-17.18	A	1.0
8352.98	45.67	39.25	7.53	34.42	9.50	0.00	48.53	74	-25.47	P	1.0
8352.98	34.87	39.25	7.53	34.42	9.50	0.00	37.73	54	-16.27	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. For Wireless 802.11b mode at 11Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 27 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH1 RX				Measurement Distance at 1m				Horizontal polarity			
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4076.14	53.47	32.55	4.84	34.90	9.50	0.00	46.47	74	-27.53	P	1.0
4076.14	49.01	32.55	4.84	34.90	9.50	0.00	42.01	54	-11.99	A	1.0
6114.32	45.90	37.33	6.42	34.30	9.50	0.00	45.85	74	-28.15	P	1.0
6114.32	35.32	37.33	6.42	34.30	9.50	0.00	35.27	54	-18.73	A	1.0
8152.34	45.91	39.45	7.37	35.94	9.50	0.00	47.29	74	-26.71	P	1.0
8152.34	35.36	39.45	7.37	35.94	9.50	0.00	36.74	54	-17.26	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. For Wireless 802.11g mode at 6Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 28 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH1 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4076.00	53.16	32.55	4.84	34.90	9.50	0.00	46.16	74	-27.84	P	1.0
4076.00	49.45	32.55	4.84	34.90	9.50	0.00	42.45	54	-11.55	A	1.0
6114.00	46.35	37.33	6.42	34.30	9.50	0.00	46.30	74	-27.70	P	1.0
6114.00	35.98	37.33	6.42	34.30	9.50	0.00	35.93	54	-18.07	A	1.0
8152.00	44.68	39.45	7.37	35.94	9.50	0.00	46.05	74	-27.95	P	1.0
8152.00	35.69	39.45	7.37	35.94	9.50	0.00	37.06	54	-16.94	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. For Wireless 802.11g mode at 6Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 29 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH6 RX				Measurement Distance at 1m				Horizontal polarity			
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4126.06	53.97	32.52	4.86	34.90	9.50	0.00	46.95	74	-27.05	P	1.0
4126.06	50.38	32.52	4.86	34.90	9.50	0.00	43.36	54	-10.64	A	1.0
6189.24	46.21	37.48	6.43	34.30	9.50	0.00	46.32	74	-27.68	P	1.0
6189.24	36.74	37.48	6.43	34.30	9.50	0.00	36.85	54	-17.15	A	1.0
8252.47	45.27	39.35	7.45	35.18	9.50	0.00	47.39	74	-26.61	P	1.0
8252.47	35.69	39.35	7.45	35.18	9.50	0.00	37.81	54	-16.19	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. For Wireless 802.11g mode at 6Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 30 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH6 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4126.02	54.61	32.52	4.86	34.90	9.50	0.00	47.59	74	-26.41	P	1.0
4126.02	50.70	32.52	4.86	34.90	9.50	0.00	43.68	54	-10.32	A	1.0
6189.30	44.36	37.48	6.43	34.30	9.50	0.00	44.47	74	-29.53	P	1.0
6189.30	34.25	37.48	6.43	34.30	9.50	0.00	34.36	54	-19.64	A	1.0
8252.14	46.87	39.35	7.45	35.18	9.50	0.00	48.99	74	-25.01	P	1.0
8252.14	36.57	39.35	7.45	35.18	9.50	0.00	38.69	54	-15.31	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. For Wireless 802.11g mode at 6Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 31 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH11 RX				Measurement Distance at 1m				Horizontal polarity			
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4176.08	54.97	32.49	4.88	34.90	9.50	0.00	47.94	74	-26.06	P	1.0
4176.08	51.75	32.49	4.88	34.90	9.50	0.00	44.72	54	-9.28	A	1.0
6264.53	44.85	37.63	6.45	34.30	9.50	0.00	45.13	74	-28.87	P	1.0
6264.53	34.36	37.63	6.45	34.30	9.50	0.00	34.64	54	-19.36	A	1.0
8352.15	44.76	39.25	7.53	34.42	9.50	0.00	47.62	74	-26.38	P	1.0
8352.15	34.86	39.25	7.53	34.42	9.50	0.00	37.72	54	-16.28	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. For Wireless 802.11g mode at 6Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 32 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH11 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4176.04	55.83	32.49	4.88	34.90	9.50	0.00	48.80	74	-25.20	P	1.0
4176.04	52.99	32.49	4.88	34.90	9.50	0.00	45.96	54	-8.04	A	1.0
6264.21	45.21	37.63	6.45	34.30	9.50	0.00	45.49	74	-28.51	P	1.0
6264.21	35.24	37.63	6.45	34.30	9.50	0.00	35.52	54	-18.48	A	1.0
8352.98	36.57	39.25	7.53	34.42	9.50	0.00	39.43	74	-34.57	P	1.0
8352.98	36.74	39.25	7.53	34.42	9.50	0.00	39.60	54	-14.40	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. For Wireless 802.11g mode at 6Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 33 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/04
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	23.9°C, 65%

CH1 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2360.20	25.80	31.84	3.56	0.00	9.50	0.00	51.70	74	-22.30	P	1.00
* 2360.20	14.70	31.84	3.56	0.00	9.50	0.00	40.60	54	-13.40	A	1.00
* 2386.40	21.70	31.81	3.57	0.00	9.50	0.00	47.58	74	-26.42	P	1.00
* 2386.40	9.70	31.81	3.57	0.00	9.50	0.00	35.58	54	-18.42	A	1.00
* 2389.90	22.60	31.81	3.57	0.00	9.50	0.00	48.48	74	-25.52	P	1.00
* 2389.90	10.20	31.81	3.57	0.00	9.50	0.00	36.08	54	-17.92	A	1.00
2399.90	37.26	31.80	3.58	0.00	9.50	0.00	63.14	86.30	-23.16	P	1.00
2399.90	28.15	31.80	3.58	0.00	9.50	0.00	54.03	79.24	-25.21	A	1.00
2413.40	80.43	31.79	3.58	0.00	9.50	0.00	106.30	Fundamental Frequency	P	1.00	
2413.40	73.37	31.79	3.58	0.00	9.50	0.00	99.24		A	1.00	
* 4824.30	44.75	34.44	5.08	35.16	9.50	2.00	41.62	74	-32.38	P	1.00
* 4824.30	36.24	34.44	5.08	35.16	9.50	2.00	33.11	54	-20.89	A	1.00
7236.00	46.30	39.81	6.74	35.65	9.50	2.00	49.69	74	-24.31	P	1.00
7236.00	37.59	39.81	6.74	35.65	9.50	2.00	40.98	54	-13.02	A	1.00
9648.00	41.04	38.54	8.29	36.44	9.50	0.61	42.54	74	-31.46	P	1.00
9648.00	30.21	38.54	8.29	36.44	9.50	0.61	31.71	54	-22.29	A	1.00
* 12067.00	---	---	---	---	9.50	0.80	---	---	---	---	1.00
* 14480.40	---	---	---	---	0.00	0.68	---	---	---	---	1.00
16893.80	---	---	---	---	0.00	0.44	---	---	---	---	1.00
* 19307.20	---	---	---	---	0.00	1.97	---	---	---	---	1.00
21720.60	---	---	---	---	0.00	0.81	---	---	---	---	1.00
24134.00	---	---	---	---	0.00	2.89	---	---	---	---	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level=Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11b mode at 11Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 34 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/04
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	23.9°C, 65%

CH1 TX				Measurement Distance at 1m				Vertical polarity			
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2360.20	34.60	31.84	3.56	0.00	9.50	0.00	60.50	74	-13.50	P	1.00
* 2360.20	24.50	31.84	3.56	0.00	9.50	0.00	50.40	54	-3.60	A	1.00
* 2386.40	31.70	31.81	3.57	0.00	9.50	0.00	57.58	74	-16.42	P	1.00
* 2386.40	17.30	31.81	3.57	0.00	9.50	0.00	43.18	54	-10.82	A	1.00
* 2389.90	30.60	31.81	3.57	0.00	9.50	0.00	56.48	74	-17.52	P	1.00
* 2389.90	18.50	31.81	3.57	0.00	9.50	0.00	44.38	54	-9.62	A	1.00
2399.90	46.37	31.80	3.58	0.00	9.50	0.00	72.25	96.56	-24.31	P	1.00
2399.90	36.64	31.80	3.58	0.00	9.50	0.00	62.52	89.35	-26.83	A	1.00
2413.40	90.69	31.79	3.58	0.00	9.50	0.00	116.56	Fundamental Frequency	P	1.00	
2413.40	83.48	31.79	3.58	0.00	9.50	0.00	109.35				
* 4823.91	54.85	34.44	5.08	35.16	9.50	2.00	51.72	74	-22.28	P	1.00
* 4823.91	51.20	34.44	5.08	35.16	9.50	2.00	48.07	54	-5.93	A	1.00
7235.30	51.68	39.81	6.74	35.65	9.50	2.00	55.07	74	-18.93	P	1.00
7235.30	44.84	39.81	6.74	35.65	9.50	2.00	48.23	54	-5.77	A	1.00
9648.00	48.28	38.54	8.29	36.44	9.50	0.61	49.78	74	-24.22	P	1.00
9648.00	34.89	38.54	8.29	36.44	9.50	0.61	36.39	54	-17.61	A	1.00
* 12067.00	---	---	---	---	9.50	0.80	---	---	---	---	1.00
* 14480.40	---	---	---	---	0.00	0.68	---	---	---	---	1.00
16893.80	---	---	---	---	0.00	0.44	---	---	---	---	1.00
* 19307.20	---	---	---	---	0.00	1.97	---	---	---	---	1.00
21720.60	---	---	---	---	0.00	0.81	---	---	---	---	1.00
24134.00	---	---	---	---	0.00	2.89	---	---	---	---	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11b mode at 11Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 35 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/04
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	23.9°C, 65%

CH6 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2438.40	78.23	31.76	3.59	0.00	9.50	0.00	104.08	Fundamental Frequency	P	1.00	
2438.40	71.30	31.76	3.59	0.00	9.50	0.00	97.15		A	1.00	
* 4874.08	45.58	34.77	5.10	35.20	9.50	1.80	42.55	74	-31.45	P	1.00
* 4874.08	35.26	34.77	5.10	35.20	9.50	1.80	32.23	54	-21.77	A	1.00
* 7311.05	45.68	39.78	6.79	35.64	9.50	2.00	49.11	74	-24.89	P	1.00
* 7311.05	34.69	39.78	6.79	35.64	9.50	2.00	38.12	54	-15.88	A	1.00
9747.89	45.68	38.53	8.33	36.60	9.50	0.55	46.99	74	-27.01	P	1.00
9747.89	35.89	38.53	8.33	36.60	9.50	0.55	37.20	54	-16.80	A	1.00
* 12192.00	---	---	---	---	9.50	0.80	---	---	---	---	1.00
14630.40	---	---	---	---	0.00	0.60	---	---	---	---	1.00
17068.80	---	---	---	---	0.00	0.53	---	---	---	---	1.00
* 19507.20	---	---	---	---	0.00	2.21	---	---	---	---	1.00
21945.60	---	---	---	---	0.00	0.72	---	---	---	---	1.00
24384.00	---	---	---	---	0.00	2.49	---	---	---	---	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11b mode at 11Mbps.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 36 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/04
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	23.9°C, 65%

CH6 TX				Measurement Distance at 1m				Vertical polarity			
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2435.70	89.14	31.76	3.59	0.00	9.50	0.00	115.00	Fundamental Frequency	P	1.00	
2435.70	82.37	31.76	3.59	0.00	9.50	0.00	108.23		A	1.00	
* 4874.07	46.73	34.77	5.10	35.20	9.50	1.80	43.70	74	-30.30	P	1.00
* 4874.07	38.67	34.77	5.10	35.20	9.50	1.80	35.64	54	-18.36	A	1.00
* 7311.01	46.27	39.78	6.79	35.64	9.50	2.00	49.70	74	-24.30	P	1.00
* 7311.01	38.10	39.78	6.79	35.64	9.50	2.00	41.53	54	-12.47	A	1.00
9747.98	45.23	38.53	8.33	36.60	9.50	0.55	46.54	74	-27.46	P	1.00
9747.98	35.74	38.53	8.33	36.60	9.50	0.55	37.05	54	-16.95	A	1.00
* 12178.50	---	---	---	---	9.50	0.80	---	---	---	---	1.00
14614.20	---	---	---	---	0.00	0.61	---	---	---	---	1.00
17049.90	---	---	---	---	0.00	0.52	---	---	---	---	1.00
* 19485.60	---	---	---	---	0.00	2.18	---	---	---	---	1.00
21921.30	---	---	---	---	0.00	0.73	---	---	---	---	1.00
24357.00	---	---	---	---	0.00	2.53	---	---	---	---	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11b mode at 11Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 37 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/04
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	23.9°C, 65%

CH11 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2461.00	77.25	31.74	3.60	0.00	9.50	0.00	103.09	Fundamental Frequency	P	1.00	
2461.00	70.37	31.74	3.60	0.00	9.50	0.00	96.21		A	1.00	
* 2483.50	32.59	31.72	3.61	0.00	9.50	0.00	58.42	74	-15.58	P	1.00
* 2483.50	24.02	31.72	3.61	0.00	9.50	0.00	49.85	54	-4.15	A	1.00
* 2483.60	18.30	31.72	3.61	0.00	9.50	0.00	44.13	74	-29.87	P	1.00
* 2483.60	8.30	31.72	3.61	0.00	9.50	0.00	34.13	54	-19.87	A	1.00
* 2488.00	19.90	31.71	3.61	0.00	9.50	0.00	45.73	74	-28.27	P	1.00
* 2488.00	9.90	31.71	3.61	0.00	9.50	0.00	35.73	54	-18.27	A	1.00
* 2500.00	24.10	31.70	3.62	0.00	9.50	0.00	49.92	74	-24.08	P	1.00
* 2500.00	13.00	31.70	3.62	0.00	9.50	0.00	38.82	54	-15.18	A	1.00
2511.40	23.90	31.70	3.63	0.00	9.50	0.00	49.73	74	-24.27	P	1.00
2511.40	13.20	31.70	3.63	0.00	9.50	0.00	39.03	54	-14.97	A	1.00
* 4924.19	44.96	35.10	5.12	35.24	9.50	1.60	42.04	74	-31.96	P	1.00
* 4924.19	34.35	35.10	5.12	35.24	9.50	1.60	31.43	54	-22.57	A	1.00
* 7386.33	44.32	39.75	6.84	35.62	9.50	2.00	47.79	74	-26.21	P	1.00
* 7386.33	34.73	39.75	6.84	35.62	9.50	2.00	38.20	54	-15.80	A	1.00
9847.90	45.77	38.52	8.37	36.76	9.50	0.49	46.89	74	-27.11	P	1.00
9847.90	35.96	38.52	8.37	36.76	9.50	0.49	37.08	54	-16.92	A	1.00
* 12305.00	---	---	---	---	9.50	0.80	---	---	---	---	1.00
14766.00	---	---	---	---	0.00	0.49	---	---	---	---	1.00
17227.00	---	---	---	---	0.00	0.59	---	---	---	---	1.00
* 19688.00	---	---	---	---	0.00	2.39	---	---	---	---	1.00
* 22149.00	---	---	---	---	0.00	0.70	---	---	---	---	1.00
24610.00	---	---	---	---	0.00	2.15	---	---	---	---	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11b mode at 11Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 38 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/04
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name	XG-580 ; XG-580 plus	TEMP&Humidity:	23.9°C , 65%

CH11 TX				Measurement Distance at 1m				Vertical polarity			
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2463.40	88.71	31.74	3.60	0.00	9.50	0.00	114.55	Fundamental Frequency	P	1.00	
2463.40	81.68	31.74	3.60	0.00	9.50	0.00	107.52		A	1.00	
*	2483.50	35.45	31.72	3.61	0.00	9.50	0.00	61.28	74	-12.72	P
*	2483.50	24.83	31.72	3.61	0.00	9.50	0.00	50.66	54	-3.34	A
*	2483.60	25.70	31.72	3.61	0.00	9.50	0.00	51.53	74	-22.47	P
*	2483.60	12.90	31.72	3.61	0.00	9.50	0.00	38.73	54	-15.27	A
*	2488.00	28.90	31.71	3.61	0.00	9.50	0.00	54.73	74	-19.27	P
*	2488.00	18.80	31.71	3.61	0.00	9.50	0.00	44.63	54	-9.37	A
*	2500.00	35.30	31.70	3.62	0.00	9.50	0.00	61.12	74	-12.88	P
*	2500.00	24.10	31.70	3.62	0.00	9.50	0.00	49.92	54	-4.08	A
	2511.40	36.40	31.70	3.63	0.00	9.50	0.00	62.23	74	-11.77	P
	2511.40	27.10	31.70	3.63	0.00	9.50	0.00	52.93	54	-1.07	A
*	4923.78	45.93	35.10	5.12	35.24	9.50	1.60	43.01	74	-30.99	P
*	4923.78	37.35	35.10	5.12	35.24	9.50	1.60	34.43	54	-19.57	A
*	7386.05	47.48	39.75	6.84	35.62	9.50	2.00	50.95	74	-23.05	P
*	7386.05	38.21	39.75	6.84	35.62	9.50	2.00	41.68	54	-12.32	A
	9847.85	46.24	38.52	8.37	36.76	9.50	0.49	47.36	74	-26.64	P
	9847.85	35.67	38.52	8.37	36.76	9.50	0.49	36.79	54	-17.21	A
*	12317.00	---	---	---	---	9.50	0.80	---	---	---	1.00
	14780.40	---	---	---	---	0.00	0.48	---	---	---	1.00
	17243.80	---	---	---	---	0.00	0.60	---	---	---	1.00
*	19707.20	---	---	---	---	0.00	2.41	---	---	---	1.00
*	22170.60	---	---	---	---	0.00	0.70	---	---	---	1.00
	24634.00	---	---	---	---	0.00	2.11	---	---	---	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11b mode at 11Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 39 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH1 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2360.20	21.50	31.84	3.56	0.00	9.50	0.00	47.40	74	-26.60	P	1.00
* 2360.20	10.80	31.84	3.56	0.00	9.50	0.00	36.70	54	-17.30	A	1.00
* 2386.40	20.00	31.81	3.57	0.00	9.50	0.00	45.88	74	-28.12	P	1.00
* 2386.40	8.50	31.81	3.57	0.00	9.50	0.00	34.38	54	-19.62	A	1.00
* 2389.90	21.10	31.81	3.57	0.00	9.50	0.00	46.98	74	-27.02	P	1.00
* 2389.90	9.20	31.81	3.57	0.00	9.50	0.00	35.08	54	-18.92	A	1.00
2399.90	46.69	31.80	3.58	0.00	9.50	0.00	72.57	78.86	-6.30	P	1.00
2399.90	30.13	31.80	3.58	0.00	9.50	0.00	56.01	70.30	-14.30	A	1.00
2408.40	72.99	31.79	3.58	0.00	9.50	0.00	98.86	Fundamental Frequency	P	1.00	
2408.40	64.43	31.79	3.58	0.00	9.50	0.00	90.30		A	1.00	
* 4823.87	45.49	34.44	5.08	35.16	9.50	2.00	42.36	74	-31.64	P	1.00
* 4823.87	35.04	34.44	5.08	35.16	9.50	2.00	31.91	54	-22.09	A	1.00
7236.00	45.22	39.81	6.74	35.65	9.50	2.00	48.61	74	-25.39	P	1.00
7236.00	35.19	39.81	6.74	35.65	9.50	2.00	38.58	54	-15.42	A	1.00
9648.00	46.17	38.54	8.29	36.44	9.50	0.61	47.67	74	-26.33	P	1.00
9648.00	35.33	38.54	8.29	36.44	9.50	0.61	36.83	54	-17.17	A	1.00
* 12042.00	---	---	---	---	9.50	0.80	---	---	---	---	1.00
14450.40	---	---	---	---	0.00	0.64	---	---	---	---	1.00
16858.80	---	---	---	---	0.00	0.42	---	---	---	---	1.00
* 19267.20	---	---	---	---	0.00	1.92	---	---	---	---	1.00
21675.60	---	---	---	---	0.00	0.83	---	---	---	---	1.00
24084.00	---	---	---	---	0.00	2.97	---	---	---	---	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level=Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11g mode at 6Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 40 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH1 TX				Measurement Distance at 1m				Vertical polarity			
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
*	2360.20	30.80	31.84	3.56	0.00	9.50	0.00	56.70	74	-17.30	P 1.00
*	2360.20	20.10	31.84	3.56	0.00	9.50	0.00	46.00	54	-8.00	A 1.00
*	2386.40	25.50	31.81	3.57	0.00	9.50	0.00	51.38	74	-22.62	P 1.00
*	2386.40	13.40	31.81	3.57	0.00	9.50	0.00	39.28	54	-14.72	A 1.00
*	2389.90	31.80	31.81	3.57	0.00	9.50	0.00	57.68	74	-16.32	P 1.00
*	2389.90	15.50	31.81	3.57	0.00	9.50	0.00	41.38	54	-12.62	A 1.00
	2399.90	56.95	31.80	3.58	0.00	9.50	0.00	82.83	89.00	-6.17	P 1.00
	2399.90	38.31	31.80	3.58	0.00	9.50	0.00	64.19	80.21	-16.02	A 1.00
	2409.40	83.13	31.79	3.58	0.00	9.50	0.00	109.00	Fundamental Frequency	P 1.00	
	2409.40	74.34	31.79	3.58	0.00	9.50	0.00	100.21		A 1.00	
*	4823.83	46.12	34.44	5.08	35.16	9.50	2.00	42.99	74	-31.01	P 1.00
*	4823.83	34.14	34.44	5.08	35.16	9.50	2.00	31.01	54	-22.99	A 1.00
	7235.72	45.53	39.81	6.74	35.65	9.50	2.00	48.92	74	-25.08	P 1.00
	7235.72	34.41	39.81	6.74	35.65	9.50	2.00	37.80	54	-16.20	A 1.00
	9647.85	45.27	38.54	8.29	36.44	9.50	0.61	46.77	74	-27.23	P 1.00
	9647.85	34.35	38.54	8.29	36.44	9.50	0.61	35.85	54	-18.15	A 1.00
*	12047.00	---	---	---	---	9.50	0.80	---	---	---	---
	14456.40	---	---	---	---	0.00	0.65	---	---	---	1.00
	16865.80	---	---	---	---	0.00	0.42	---	---	---	1.00
*	19275.20	---	---	---	---	0.00	1.93	---	---	---	1.00
	21684.60	---	---	---	---	0.00	0.83	---	---	---	1.00
	24094.00	---	---	---	---	0.00	2.95	---	---	---	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11g mode at 6Mbps.
10. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 41 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH6 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2436.89	70.01	31.76	3.59	0.00	9.50	0.00	95.87	Fundamental Frequency	P	1.00	
2436.89	62.07	31.76	3.59	0.00	9.50	0.00	87.93		A	1.00	
* 4874.08	44.56	34.77	5.10	35.20	9.50	1.80	41.53	74	-32.47	P	1.00
* 4874.08	34.93	34.77	5.10	35.20	9.50	1.80	31.90	54	-22.10	A	1.00
* 7311.77	44.98	39.78	6.79	35.64	9.50	2.00	48.41	74	-25.59	P	1.00
* 7311.77	34.39	39.78	6.79	35.64	9.50	2.00	37.82	54	-16.18	A	1.00
9747.61	47.07	38.53	8.33	36.60	9.50	0.55	48.38	74	-25.62	P	1.00
9747.61	35.74	38.53	8.33	36.60	9.50	0.55	37.05	54	-16.95	A	1.00
* 12184.45	---	---	---	---	9.50	0.80	---	---	---	---	1.00
14621.34	---	---	---	---	0.00	0.60	---	---	---	---	1.00
17058.23	---	---	---	---	0.00	0.52	---	---	---	---	1.00
* 19495.12	---	---	---	---	0.00	2.19	---	---	---	---	1.00
21932.01	---	---	---	---	0.00	0.73	---	---	---	---	1.00
24368.90	---	---	---	---	0.00	2.51	---	---	---	---	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11g mode at 6Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 42 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH6 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2433.00	81.66	31.77	3.59	0.00	9.50	0.00	107.52	Fundamental Frequency	P	1.00	
2433.00	72.93	31.77	3.59	0.00	9.50	0.00	98.79		A	1.00	
* 4873.95	44.90	34.77	5.10	35.20	9.50	1.80	41.87	74	-32.13	P	1.00
* 4873.95	33.27	34.77	5.10	35.20	9.50	1.80	30.24	54	-23.76	A	1.00
* 7310.97	44.11	39.78	6.79	35.64	9.50	2.00	47.54	74	-26.46	P	1.00
* 7310.97	33.32	39.78	6.79	35.64	9.50	2.00	36.75	54	-17.25	A	1.00
9747.69	44.61	38.53	8.33	36.60	9.50	0.55	45.92	74	-28.08	P	1.00
9747.69	34.91	38.53	8.33	36.60	9.50	0.55	36.22	54	-17.78	A	1.00
* 12165.00	---	---	---	---	9.50	0.80	---	---	---	---	1.00
14598.00	---	---	---	---	0.00	0.62	---	---	---	---	1.00
17031.00	---	---	---	---	0.00	0.51	---	---	---	---	1.00
* 19464.00	---	---	---	---	0.00	2.16	---	---	---	---	1.00
21897.00	---	---	---	---	0.00	0.74	---	---	---	---	1.00
24330.00	---	---	---	---	0.00	2.57	---	---	---	---	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11g mode at 6Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 43 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH11 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2457.90	70.99	31.74	3.60	0.00	9.50	0.00	96.83	Fundamental Frequency	P	1.00	
2457.90	61.78	31.74	3.60	0.00	9.50	0.00	87.62		A	1.00	
* 2483.50	33.91	31.72	3.61	0.00	9.50	0.00	59.74	74	-14.26	P	1.00
* 2483.50	23.97	31.72	3.61	0.00	9.50	0.00	49.80	54	-4.20	A	1.00
* 2483.60	19.40	31.72	3.61	0.00	9.50	0.00	45.23	74	-28.77	P	1.00
* 2483.60	8.30	31.72	3.61	0.00	9.50	0.00	34.13	54	-19.87	A	1.00
* 2488.00	19.70	31.71	3.61	0.00	9.50	0.00	45.53	74	-28.47	P	1.00
* 2488.00	10.40	31.71	3.61	0.00	9.50	0.00	36.23	54	-17.77	A	1.00
* 2500.00	21.20	31.70	3.62	0.00	9.50	0.00	47.02	74	-26.98	P	1.00
* 2500.00	12.10	31.70	3.62	0.00	9.50	0.00	37.92	54	-16.08	A	1.00
2511.40	18.80	31.70	3.63	0.00	9.50	0.00	44.63	74	-29.37	P	1.00
2511.40	9.30	31.70	3.63	0.00	9.50	0.00	35.13	54	-18.87	A	1.00
* 4923.46	45.15	35.09	5.12	35.24	9.50	1.61	42.23	74	-31.77	P	1.00
* 4923.46	34.21	35.09	5.12	35.24	9.50	1.61	31.29	54	-22.71	A	1.00
* 7386.02	45.41	39.75	6.84	35.62	9.50	2.00	48.88	74	-25.12	P	1.00
* 7386.02	34.73	39.75	6.84	35.62	9.50	2.00	38.20	54	-15.80	A	1.00
9847.78	46.10	38.52	8.37	36.76	9.50	0.49	47.22	74	-26.78	P	1.00
9847.78	36.06	38.52	8.37	36.76	9.50	0.49	37.18	54	-16.82	A	1.00
* 12289.50	---	---	---	---	9.50	0.80	---	---	---	---	1.00
14747.40	---	---	---	---	0.00	0.50	---	---	---	---	1.00
17205.30	---	---	---	---	0.00	0.58	---	---	---	---	1.00
* 19663.20	---	---	---	---	0.00	2.36	---	---	---	---	1.00
* 22121.10	---	---	---	---	0.00	0.70	---	---	---	---	1.00
24579.00	---	---	---	---	0.00	2.19	---	---	---	---	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11g mode at 6Mbps.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 44 of 65

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company:	Z-Com, Inc.	Test Date:	2004/06/07
Product Name:	802.11b/g Wireless Station Adapter / Access Point	Test By:	H. P. Wu
Model Name:	XG-580 ; XG-580 plus	TEMP&Humidity:	33.7°C, 49%

CH11 TX				Measurement Distance at 1m					Vertical polarity		
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2458.00	80.03	31.74	3.60	0.00	9.50	0.00	105.87	Fundamental Frequency	P	1.00	
2458.00	72.14	31.74	3.60	0.00	9.50	0.00	97.98		A	1.00	
*	2483.50	34.34	31.72	3.61	0.00	9.50	0.00	60.17	74	-13.83	P
*	2483.50	24.72	31.72	3.61	0.00	9.50	0.00	50.55	54	-3.45	A
*	2483.60	25.80	31.72	3.61	0.00	9.50	0.00	51.63	74	-22.37	P
*	2483.60	12.90	31.72	3.61	0.00	9.50	0.00	38.73	54	-15.27	A
*	2488.00	30.00	31.71	3.61	0.00	9.50	0.00	55.83	74	-18.17	P
*	2488.00	20.90	31.71	3.61	0.00	9.50	0.00	46.73	54	-7.27	A
*	2500.00	30.80	31.70	3.62	0.00	9.50	0.00	56.62	74	-17.38	P
*	2500.00	22.90	31.70	3.62	0.00	9.50	0.00	48.72	54	-5.28	A
	2511.40	28.80	31.70	3.63	0.00	9.50	0.00	54.63	74	-19.37	P
	2511.40	18.80	31.70	3.63	0.00	9.50	0.00	44.63	54	-9.37	A
*	4924.73	43.38	35.10	5.12	35.24	9.50	1.60	40.46	74	-33.54	P
*	4924.73	33.55	35.10	5.12	35.24	9.50	1.60	30.63	54	-23.37	A
*	7386.11	45.23	39.75	6.84	35.62	9.50	2.00	48.70	74	-25.30	P
*	7386.11	34.01	39.75	6.84	35.62	9.50	2.00	37.48	54	-16.52	A
	9847.66	46.83	38.52	8.37	36.76	9.50	0.49	47.95	74	-26.05	P
	9847.66	35.19	38.52	8.37	36.76	9.50	0.49	36.31	54	-17.69	A
*	12290.00	---	---	---	9.50	0.80	---	---	---	---	1.00
	14748.00	---	---	---	0.00	0.50	---	---	---	---	1.00
	17206.00	---	---	---	0.00	0.58	---	---	---	---	1.00
*	19664.00	---	---	---	0.00	2.36	---	---	---	---	1.00
*	22122.00	---	---	---	0.00	0.70	---	---	---	---	1.00
	24580.00	---	---	---	0.00	2.19	---	---	---	---	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For Wireless 802.11g mode at 6Mbps.




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 45 of 65

3.7 Photos of Open Site

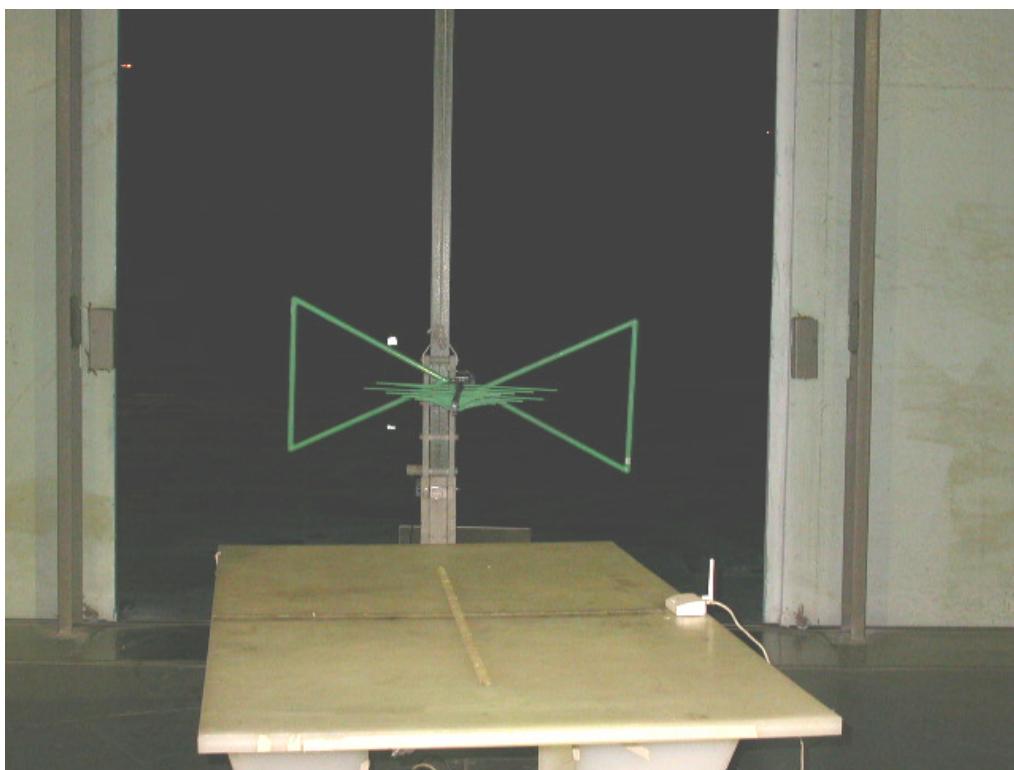




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 46 of 65

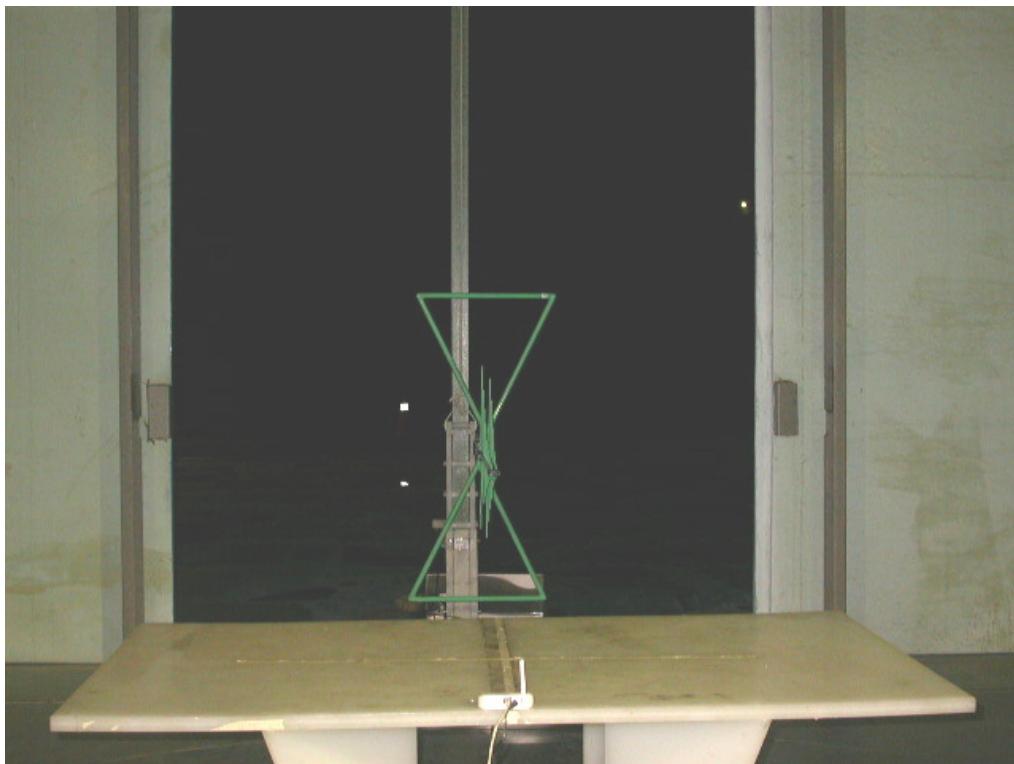



4. 6dB BANDWIDTH MEASUREMENT


4.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2003
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7750A	725A 852141	N/A

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2 Test Setup

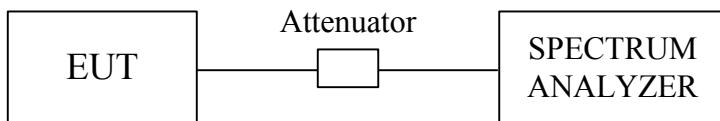

4.3 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500KHz

4.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 1000 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 200KHz.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 48 of 65

4.6 Test Results

Input Power (System)	5VDC (From Power Adapter)	Environmental Conditions	26°C, 48%RH
Tested By	H. P. Wu		




Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	9.96	0.5	PASS
6	2437	9.92	0.5	PASS
11	2462	9.96	0.5	PASS

Note : 1. For 802.11b Mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	15.76	0.5	PASS
6	2437	15.76	0.5	PASS
11	2462	15.76	0.5	PASS

Note : 1. For 802.11g Mode

4.7 Photo of 6db Bandwidth Measurement

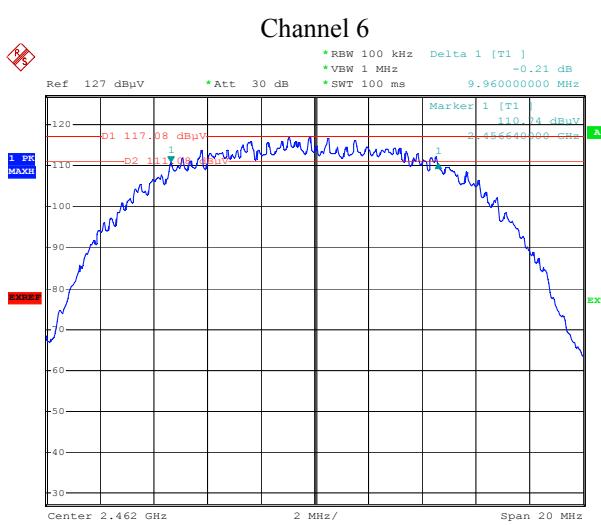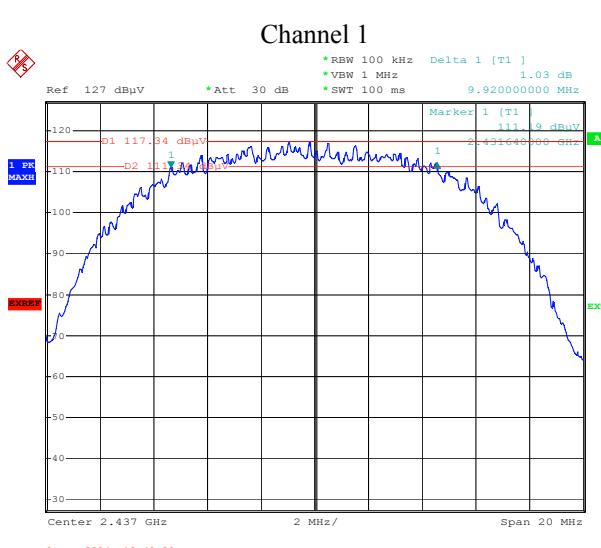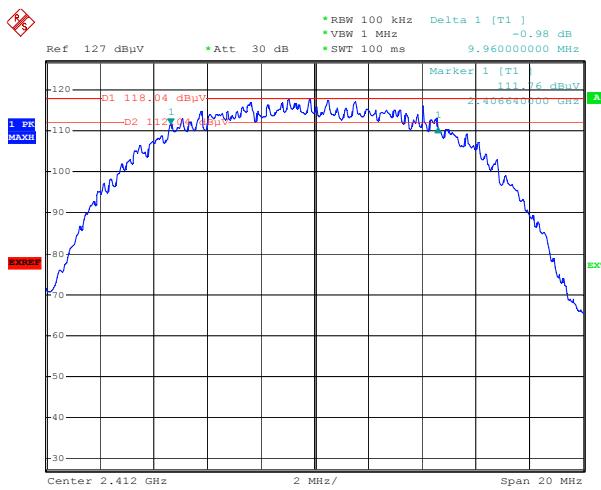




Channel 11
Note : For 802.11b Mode



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C.
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 50 of 65

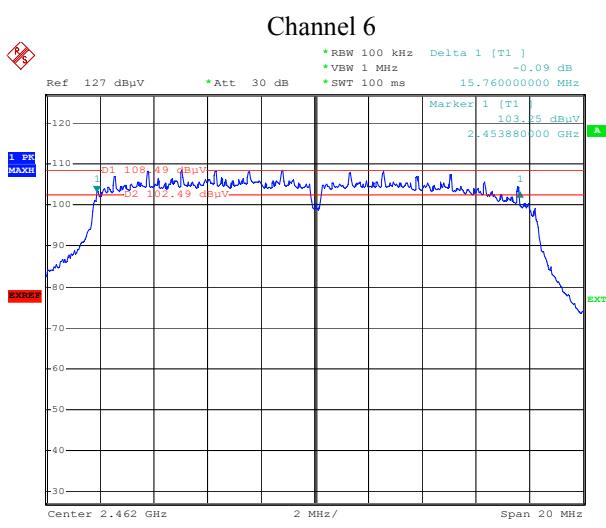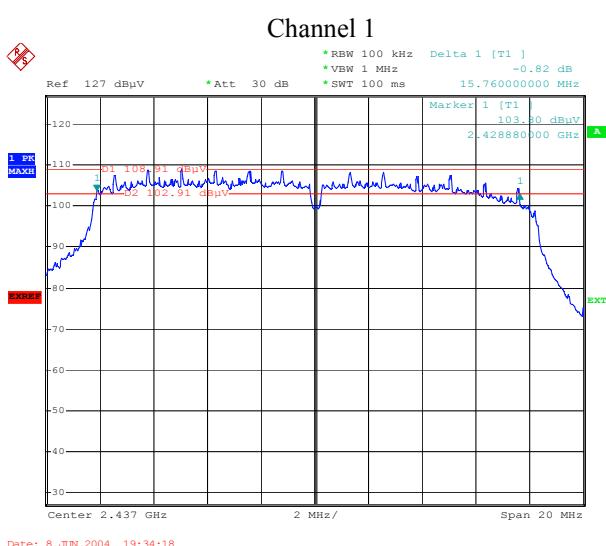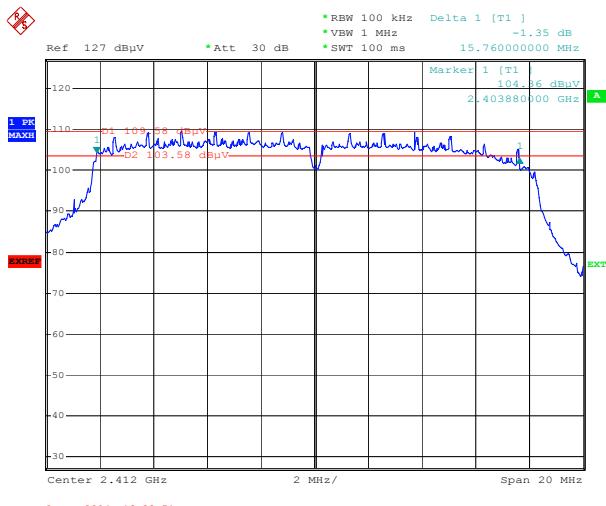

Channel 11
Note : For 802.11g Mode



5. MAXIMUM PEAK OUTPUT POWER


5.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2003
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7750A	725A 852141	N/A
GIGASTRONICS POWER METER	8542	1828329	September 19, 2003

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.2 Test Setup



5.3 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.



5.4 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency.

5.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

5.6 Test Results

Input Power (System)	5VDC (From Power Adapter)	Environmental Conditions	26°C , 48%RH
Tested By	H. P. Wu		

Channel	Channel Frequency (MHz)	Average Power Output (dBm)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
1	2412	21.44	23.24	30	PASS
6	2437	21.85	23.65	30	PASS
11	2462	21.88	23.48	30	PASS

Note :
1. For 802.11b Mode
2. At final test to get the worst-case emission at 11Mbps.
3. The result basic equation calculation as follow :
 $\text{Peak Power Output} = \text{Peak Power Reading} + \text{Cable loss} + \text{Attenuator}$

Channel	Channel Frequency (MHz)	Average Power Output (dBm)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
1	2412	17.27	19.27	30	PASS
6	2437	16.32	18.12	30	PASS
11	2462	15.94	17.84	30	PASS

Note :
1. For 802.11g Mode
2. At final test to get the worst-case emission at 6Mbps.
3. The result basic equation calculation as follow :
 $\text{Peak Power Output} = \text{Peak Power Reading} + \text{Cable loss} + \text{Attenuator}$



6. POWER SPECTRAL DENSITY MEASUREMENT


6.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2003
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7750A	725A 852141	N/A

NOTE :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

6.2 Test Setup



6.3 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3KHz.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 54 of 65

6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3KHz RBW and 30KHz VBW, set sweep time=span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

6.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

6.6 Test Results

Input Power (System)	5VDC (From Power Adapter)	Environmental Conditions	26°C, 48%RH
Tested By	H. P. Wu		

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maxmum Limit (dBm)	Pass / Fail
1	2412	-3.20	8	PASS
6	2437	-3.73	8	PASS
11	2462	-4.05	8	PASS

Note: 1. For 802.11b mode at finial test to get the worst-case emission at 11Mbps.

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maxmum Limit (dBm)	Pass / Fail
1	2412	-14.13	8	PASS
6	2437	-14.72	8	PASS
11	2462	-15.04	8	PASS

Note: 1. For 802.11g mode at finial test to get the worst-case emission at 6Mbps






Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C.
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 55 of 65

6.7 Photo of Power Spectral Density Measurement

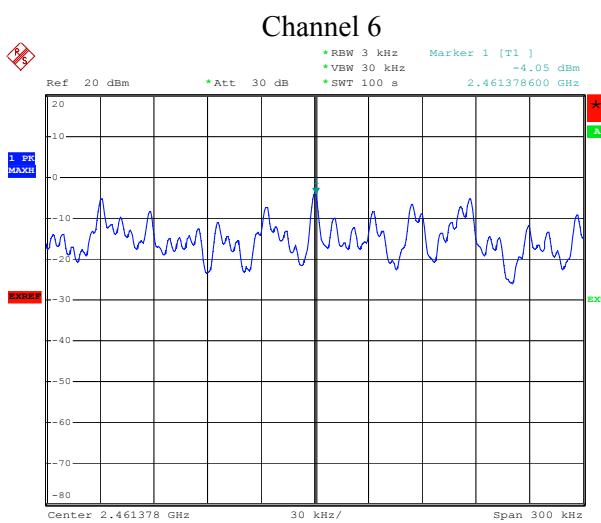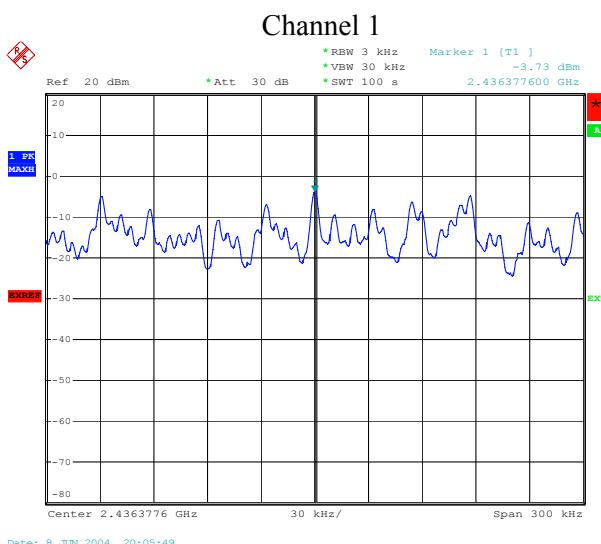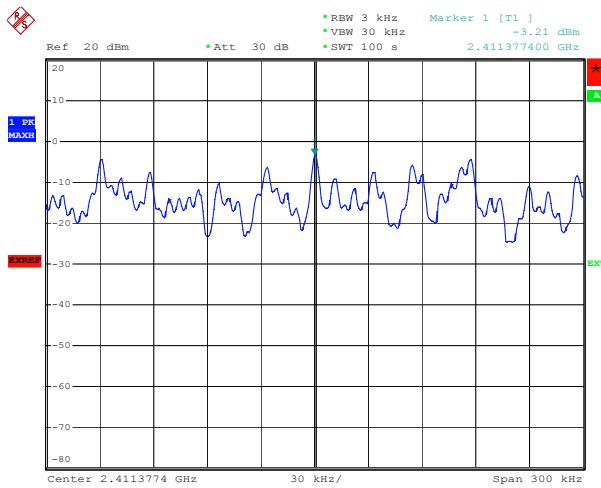




Channel 11
Note: 802.11b Mode (11Mbps)



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 56 of 65

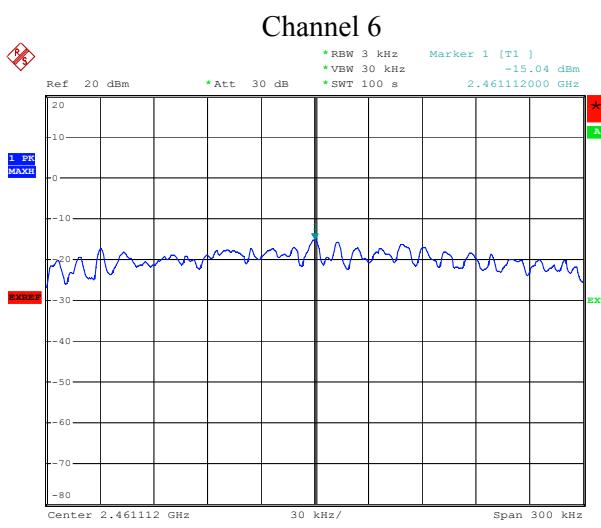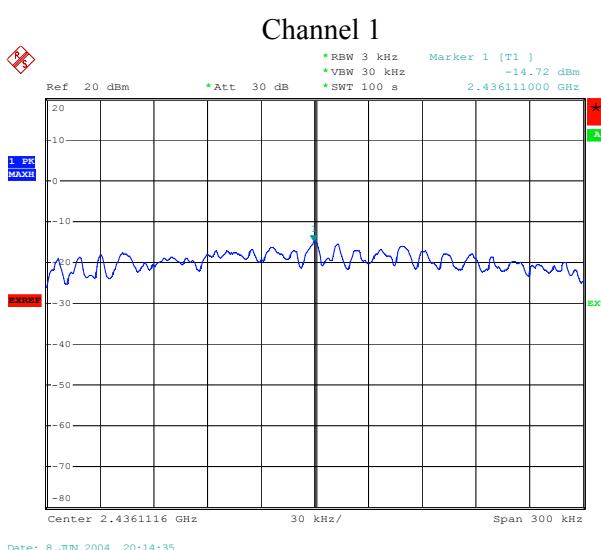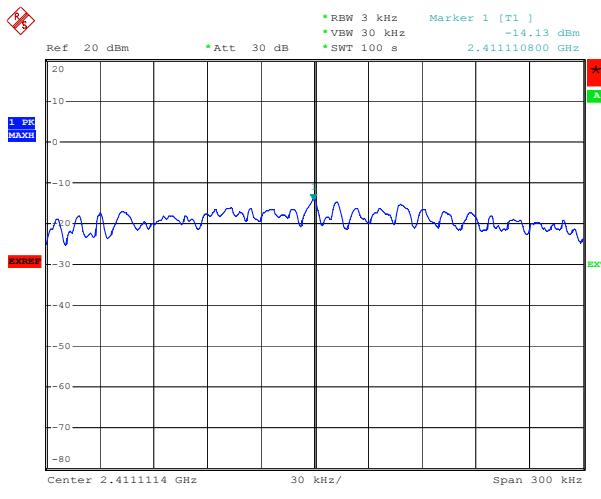

Channel 11
Note: 802.11g Mode (6Mbps)



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 57 of 65

7. BAND EDGE MEASUREMENT


7.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2003
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7750A	725A 852141	N/A

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

7.2 Test Setup

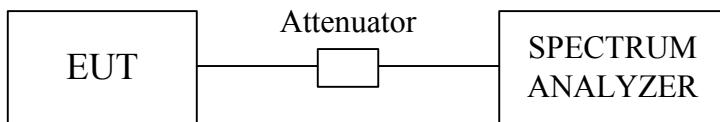

7.3 Limits of Out of Band Emissions Measurement

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.4 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to with suitable frequency span including 100KHz bandwidth from band edge. The band edges was measured and recorded.

7.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.



Ecom SerTech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 58 of 65

7.6 Test Results

A. Conducted

Refer to 7.7 photo of out band Emission measurement

B. Radiated

For 802.11b mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

Input Power (System)	5VDC (From Power Adapter)	Environmental Conditions		26°C , 48%RH
Tested By	H. P. Wu			

Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	63.14	72.25	86.30	96.56	PASS
	AV	54.03	62.52	79.24	89.35	
2483.50	PK	58.42	61.28	74.00	74.00	PASS
	AV	49.85	50.66	54.00	54.00	


For 802.11g mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :


Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	72.57	82.83	78.86	89.00	PASS
	AV	56.01	64.19	70.30	80.21	
2483.50	PK	59.74	60.17	74.00	74.00	PASS
	AV	49.80	50.55	54.00	54.00	

- Note :
1. Radiated band edge field strength is measured with FCC recommended mark-delta method.
 2. Measured radiated band edge field strength Test Results = Radiated fundamental emission field strength - DELTA.
 3. DELTA = Relative measurement between conducted measured peak level of fundamental emission and relevant band edge emission. Please refer to 7.7 photo of Band Edge Measurement.


7.7 Photo of Band Edge Measurement

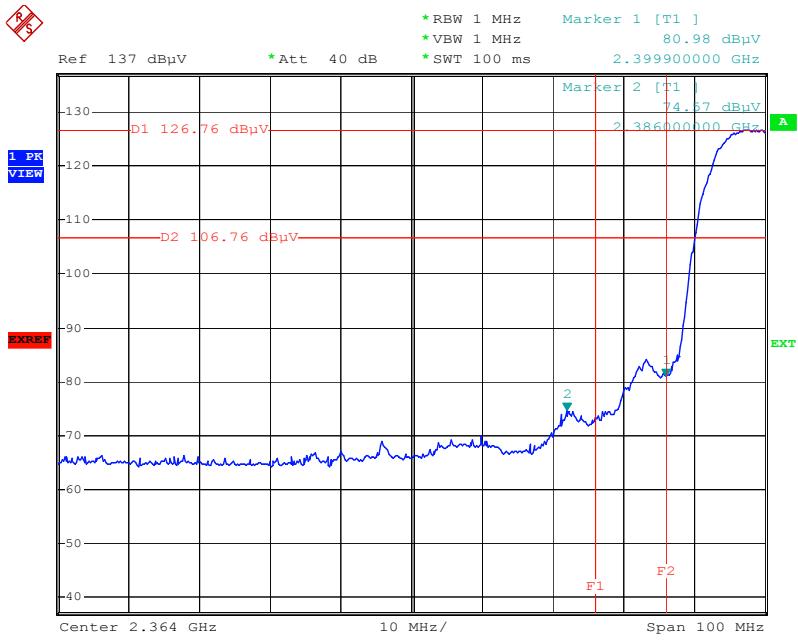

Lower Band Edge (Peak)

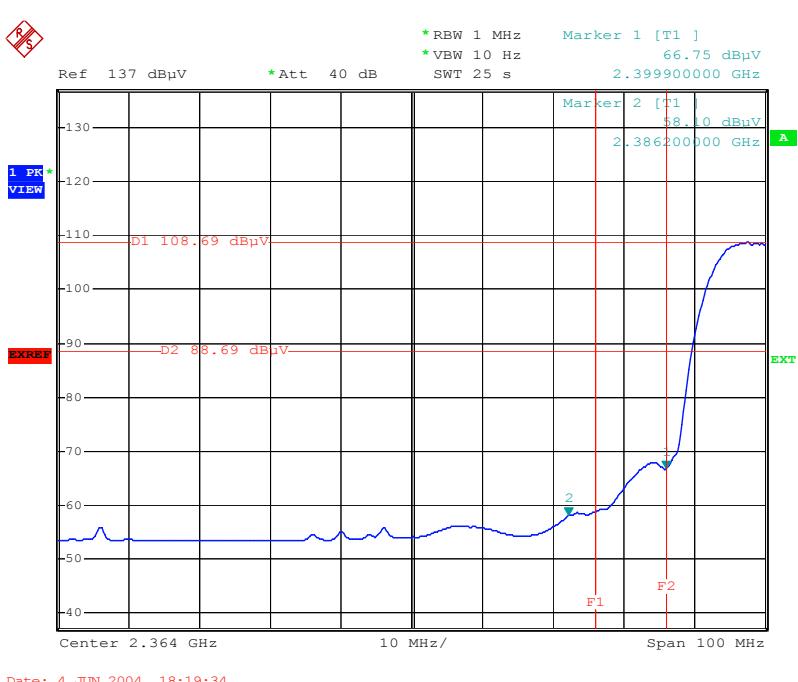


Lower Band Edge (Average)
Note : For 802.11b Mode

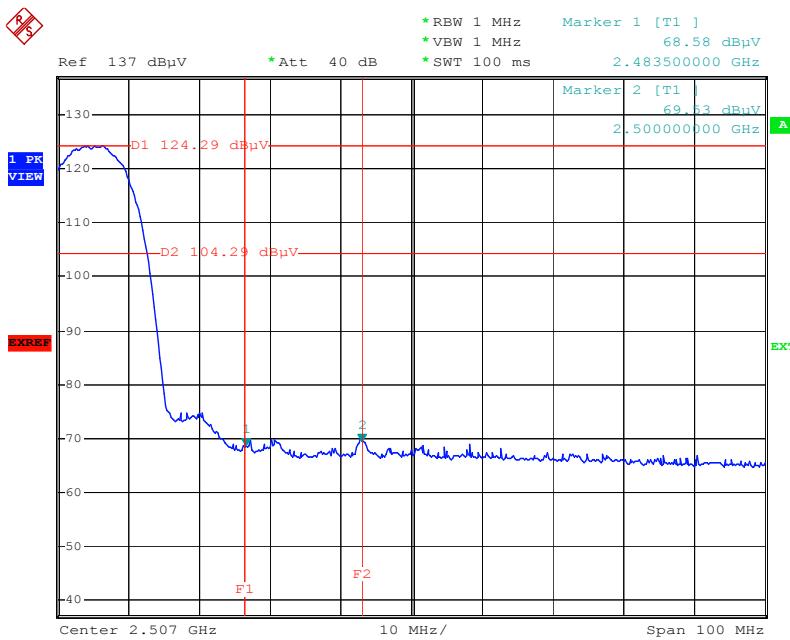

Date: 8.JUN.2004 18:55:11



Higher Band Edge (Peak)


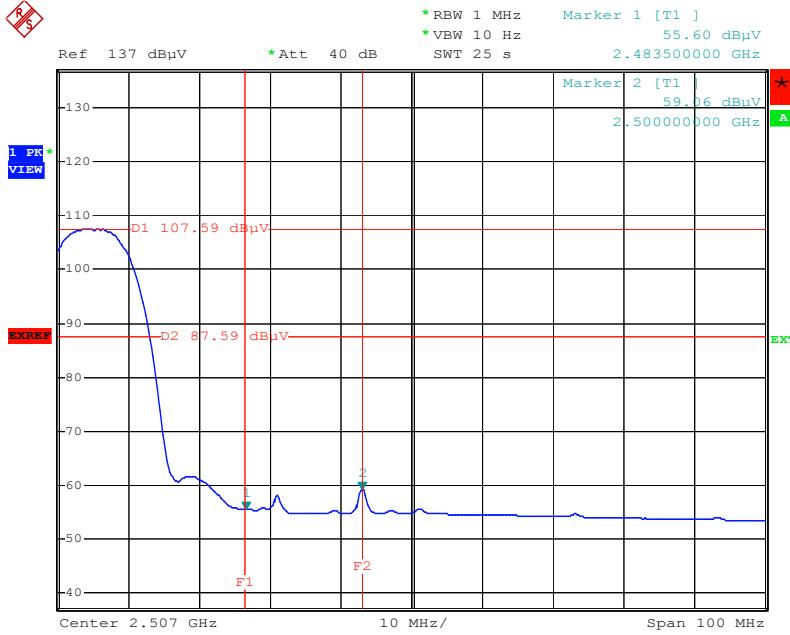


Date: 8.JUN.2004 18:58:16

Higher Band Edge (Average)

Note : For 802.11b Mode

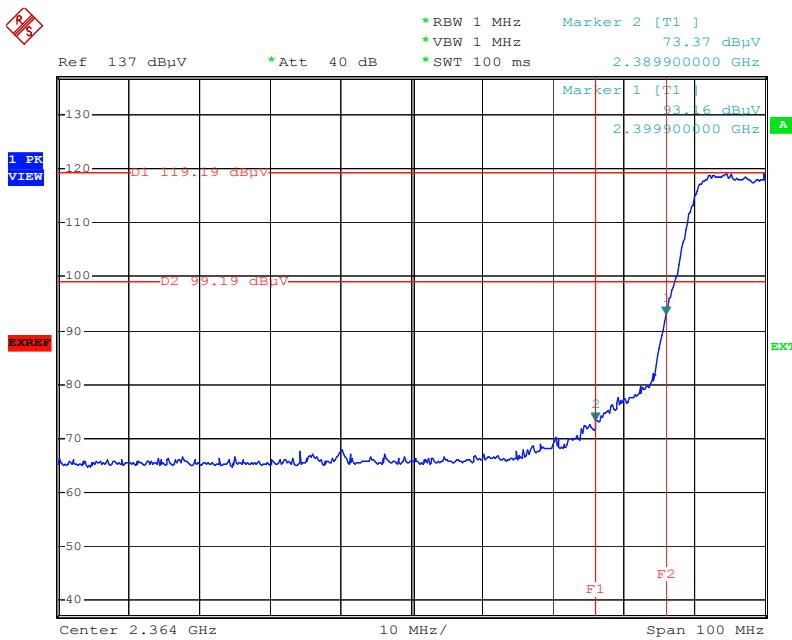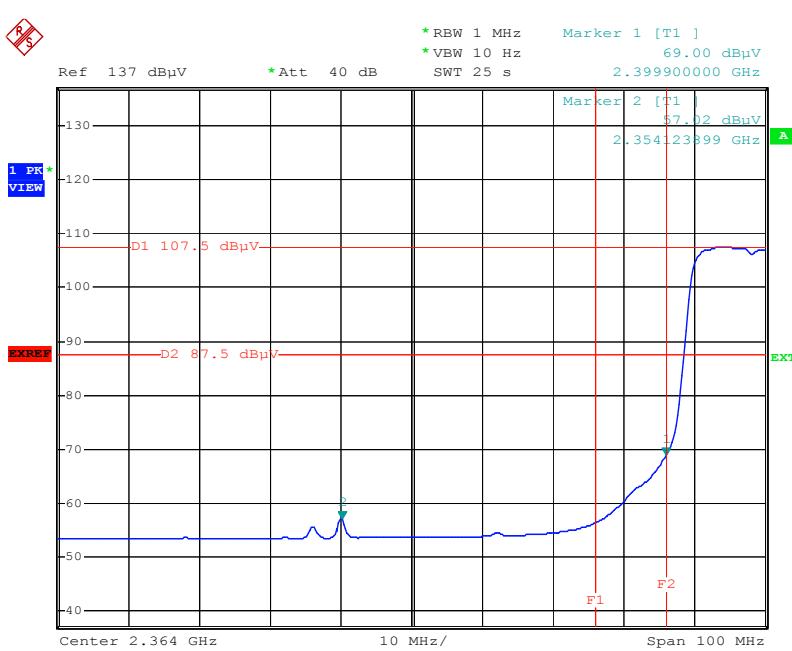
Lower Band Edge (Peak)

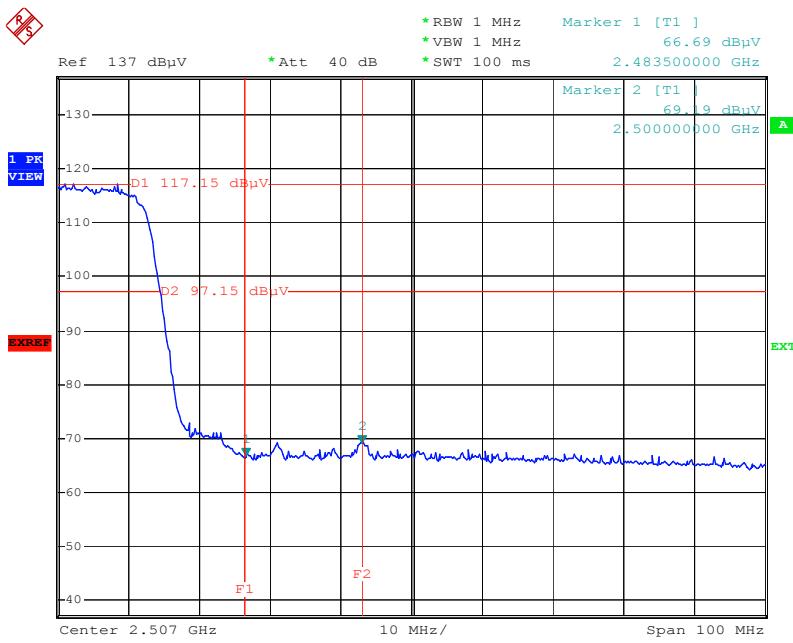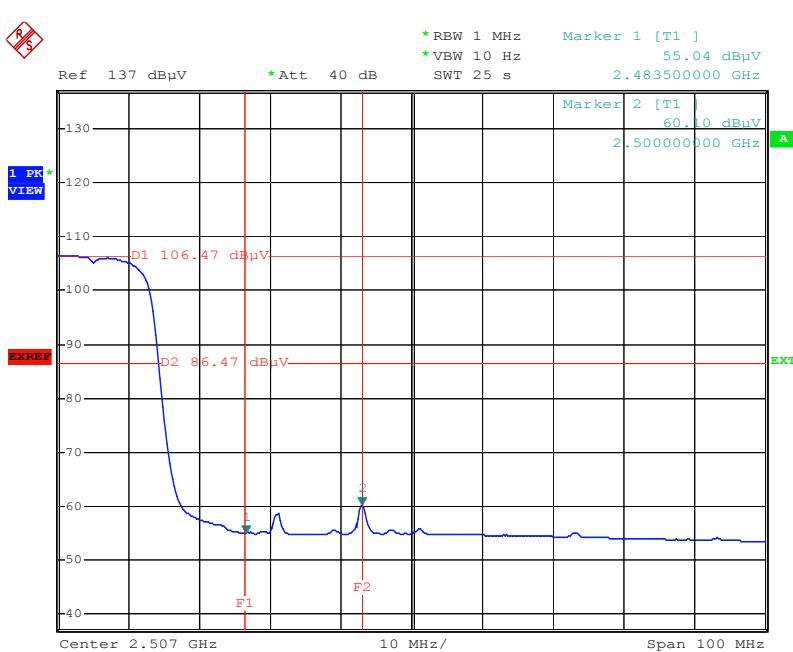Lower Band Edge (Average)
Note : For 802.11g Mode


Higher Band Edge (Peak)

Higher Band Edge (Average)
Note : For 802.11g Mode



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : M4Y-04-580
Report No. : EC04-05-048FRF
Page 63 of 65

8. ANTENNA REQUIREMENT

8.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.2 Antenna Connected Construction

The antenna used in this product is Dipole antenna. The maximum Gain of the antenna only 2dBi



9. RF EXPOSURE EVALUATION

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)
LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational / Control Exposures				
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300-1,500	--	--	F/1500	6
1,500-100,000	--	--	1	30

9.1 Friis Formula

$$\text{Friis transmission formula : } P_d = (P_{out} * G) / (4 * \pi * r^2)$$

Where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

Pi = 3.1416

R = distance between observation point and center of the radiator in cm

P_d is the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance r where the MPE limit is reached.

9.2 EUT Operating Condition

A software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.



9.3 Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

9.3.1 Antenna Gain

Antenna Gain : The maximum Gain measured in fully anechoic chamber is 2dBi linear scale.

9.3.2 Output Power into Antenna & RF Exposure Evaluation Distance

Channel	Channel Frequency (MHz)	Output Power to Antenna (dBm)	Power Density at 20cm (mW/cm ²)	LIMITS (mW/cm ²)
CH1	2412.00	23.24	0.066486	1
CH6	2437.00	23.65	0.073068	1
CH11	2462.00	23.48	0.070264	1

Note : 1. For 802.11b Mode (11Mbps)

2. The power density Pd (4th column) at a distance of 20cm calculated from the Friis transmission formula is far below the limit of 1 mW/cm². The EUT is classified as mobile product. So, RF exposure limit warning or SAR test are not required.

Channel	Channel Frequency (MHz)	Output Power to Antenna (dBm)	Power Density at 20cm (mW/cm ²)	LIMITS (mW/cm ²)
CH1	2412.00	19.27	0.026652	1
CH6	2437.00	18.12	0.020452	1
CH11	2462.00	17.84	0.019175	1

Note : 1. For 802.11g Mode (6Mbps).

2. The power density Pd (4th column) at a distance of 20cm calculated from the Friis transmission formula is far below the limit of 1 mW/cm². The EUT is classified as mobile product. So, RF exposure limit warning or SAR test are not required.