

FCC SAR Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : 23090RA98G
FCC ID : 2AFZZRA98G
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Shenzhen)
1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	6
3. Guidance Applied	6
4. Equipment Under Test (EUT) Information	7
4.1 General Information	7
4.2 General LTE SAR Test and Reporting Considerations	9
4.3 General 5G NR SAR Test and Reporting Considerations	13
5. Proximity Sensor Triggering Test	17
6. RF Exposure Limits	19
6.1 Uncontrolled Environment	19
6.2 Controlled Environment	19
7. Specific Absorption Rate (SAR)	20
7.1 Introduction	20
7.2 SAR Definition	20
8. System Description and Setup	21
8.1 E-Field Probe	22
8.2 Data Acquisition Electronics (DAE)	22
8.3 Phantom	23
8.4 Device Holder	24
9. Measurement Procedures	25
9.1 Spatial Peak SAR Evaluation	25
9.2 Power Reference Measurement	26
9.3 Area Scan	26
9.4 Zoom Scan	27
9.5 Volume Scan Procedures	27
9.6 Power Drift Monitoring	27
10. Test Equipment List	28
11. System Verification	29
11.1 Tissue Simulating Liquids	29
11.2 Tissue Verification	29
11.3 System Performance Check Results	31
12. RF Exposure Positions	33
12.1 Ear and handset reference point	33
12.2 Definition of the cheek position	34
12.3 Definition of the tilt position	35
12.4 Body Worn Accessory	36
12.5 Product Specific 10g SAR Exposure	37
12.6 Wireless Router	37
13. Conducted RF Output Power (Unit: dBm)	38
14. Antenna Location	54
15. SAR Test Results	55
15.1 Head SAR	58
15.2 Hotspot SAR	76
15.3 Body Worn Accessory SAR	91
15.4 Product specific 10g SAR	100
15.5 Repeated SAR Measurement	105
15.6 NR Linearity Data Analysis	106
16. Simultaneous Transmission Analysis	111
16.1 Head Exposure Conditions	112
16.2 Hotspot Exposure Conditions	117
16.3 Body-Worn Accessory Exposure Conditions	124
16.4 Product specific 10g SAR Exposure Conditions	127
17. Uncertainty Assessment	131
18. References	132
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	
Appendix E. Conducted RF Output Power Table	
Appendix F. Power reduction mechanism verification	

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA380206	Rev. 01	Initial issue of report.	Sep. 15, 2023

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Xiaomi Communications Co., Ltd., Mobile Phone, 23090RA98G**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 15mm)	Highest Simultaneous Transmission
			1g SAR (W/kg)			1g SAR (W/kg)
Licensed	GSM	GSM850	1.01	1.00	0.46	1.57
		GSM1900	1.04	0.81	0.43	
	WCDMA	WCDMA V	0.99	0.79	0.34	
		WCDMA IV	1.01	0.75	0.64	
		WCDMA II	0.88	0.72	0.68	
	LTE	LTE Band 12/17	0.37	0.42	0.17	
		LTE Band 13	1.03	1.01	0.35	
		LTE Band 26/5	1.02	1.00	0.43	
		LTE Band 66/4	1.08	0.86	0.82	
		LTE Band 2	0.89	0.94	0.83	
		LTE Band 7	0.79	0.35	0.71	
		LTE Band 41/38	0.99	0.51	0.48	
	5G NR	FR1 n5	1.09	1.09	0.35	
		FR1 n66	1.07	0.79	0.82	
		FR1 n7	1.03	0.48	0.73	
		FR1 n41/n38	0.93	0.62	0.85	
		FR1 n77/n78	0.94	0.42	0.53	
DTS	WLAN	2.4GHz WLAN	1.09	0.55	0.22	1.57
NII		5GHz WLAN	1.04	0.29	0.25	1.56
DSS	Bluetooth	2.4GHz Bluetooth	0.55	0.13	<0.10	1.57
Highest 10g SAR Summary						
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)			Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM850	2.32			3.92
	WCDMA	WCDMA IV	2.05			
		WCDMA II	2.42			
		LTE	LTE Band 13	1.11		
	LTE Band 26/5		1.46			
	LTE Band 66/4		2.55			
	LTE Band 2		2.52			
	LTE Band 7		1.83			
	LTE Band 41/38		1.95			
	5G NR	FR1 n5	1.00			
		FR1 n66	2.29			
		FR1 n7	2.27			
FR1 n41/n38		2.07				
FR1 n77/n78		1.05				
NII	WLAN	5GHz WLAN	2.00			3.92
Date of Testing:			2023/8/7~ 2023/8/29			

Remark:

1. This device supports LTE B5 / B17 / B38 and B26 / B12 / B41. Since the supported frequency span for LTE B5 / B17 / B38 falls completely within the supports frequency span for LTE B26 / B12 / B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B26 / B12 / B41.
2. This device supports 5GNR n38/n78 and n41/77. Since the supported frequency span for 5GNR n38/n78 falls completely within the supports frequency span for n41/n77, both 5GNR bands have the same target power, and both 5GNR bands share the same transmission path; therefore, SAR was only assessed for n41/n77.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Testing Laboratory			
Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR01-SZ SAR03-SZ	CN1256	421272

Applicant	
Company Name	Xiaomi Communications Co., Ltd.
Address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

Manufacturer	
Company Name	Xiaomi Communications Co., Ltd.
Address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	Redmi
Model Name	23090RA98G
FCC ID	2AFZZRA98G
IMEI Code	IMEI 1: 864595060036120 IMEI 2: 864595060036138
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41: 2496 MHz ~ 2690 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is supported) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: CP-OFDM / DFT-s-OFDM, PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM WLAN 2.4GHz 802.11b/g/n HT20 WLAN 2.4GHz 802.11ax HE20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac/ax VHT20/VHT40/VHT80/HE20/HE40/HE80 Bluetooth BR/EDR/LE NFC: ASK
HW Version	1351N16UM0A01
SW Version	MIUI 14
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype

Remark:

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
3. This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
4. The 2.4GHz/5GHz WLAN can transmit in SISO and MIMO antenna mode.
5. This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 12.
6. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.
7. The device implements Proximity sensors/receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table.
8. For WLAN/BT when transmit simultaneous with WWAN, power reduction will be activated to head, Body and extremity exposure conditions.
9. 5GNR n77/n78 supports HPUE mode, HPUE power and SAR testing performed separately.
10. 5GNR n77/n78 HPUE with higher power. For HPUE power is higher than power class 3 but with lower duty cycle, the maximum average power for class 2 and class 3 is almost the same, so we chose power class 3 full SAR testing and power class 2 verify the worst case of power class 3 SAR.
11. For 5GNR n77/n78 HPUE, 5GNR n77/n78 PC2 Maximum Duty Cycle is 50%, using FTM (Factory Test Mode) with 50% duty cycle is considered during SAR testing. For 5G NR other bands, using FTM to perform SAR with default 100% transmission.
12. For 5GNR EN-DC mode, standalone SAR performed for 5GNR NSA band with the maximum power, EN-DC SAR summed EN-DC mode 5GNR standalone SAR and LTE standalone SAR, the result of EN-DC SAR is more conservatively.
13. There are three samples under test, sample 1 is 12+512G memory & Battery 2, sample 2 is 12+256G memory & Battery 1, sample 3 is 8+256G memory & Battery 1. According to the difference, so sample 2 was chosen to perform full test.
14. This device has NFC function and the NFC SAR report will be separately submitted.
15. This device supports 5GNR FR1 bands as following table, including NSA mode and SA mode. NSA and SA mode performed SAR separately.

<5G NR>

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 40, 50
	n66	FDD	15	5, 10, 15, 20, 30, 40
	n38	TDD	30	20, 30, 40
	n41	TDD	30	20, 30, 40, 50, 60, 80, 90, 100
	n78	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100
SA	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 40, 50
	n66	FDD	15	5, 10, 15, 20, 30, 40
	n38	TDD	30	20, 30, 40
	n41	TDD	30	20, 30, 40, 50, 60, 80, 90, 100
	n77	TDD	30	20, 40, 50, 60, 80, 90, 100
	n78	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																													
FCC ID	2AFZZRA98G																																																																												
Equipment Name	Mobile Phone																																																																												
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz																																																																												
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																																												
uplink modulations used	QPSK / 16QAM / 64QAM / 256QAM																																																																												
LTE Voice / Data requirements	Voice and Data																																																																												
LTE Release Version	R15, Cat18																																																																												
CA Support	Supported, Uplink and Downlink																																																																												
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>							Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																													
Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)																																																																						
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																							
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																						
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																						
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																						
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																						
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																						
256 QAM	≥ 1						≤ 5																																																																						
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																												
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																												
Power reduction applied to satisfy SAR compliance	Yes, when operating in Proximity sensors/receiver/hotspot detect mechanism, head/body-worn /hotspot/extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 13.																																																																												
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 13.																																																																												
LTE Carrier Aggregation Additional Information	1. This device supports LTE Carrier Aggregation (CA) in the uplink for intra-band and inter-band with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 3 carriers in the downlink and 2 carriers in the uplink.																																																																												

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711
LTE Band 13												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz	
	Channel #	Freq.(MHz)	Channel #	Freq.(MHz)	Channel #	Freq.(MHz)	Channel #	Freq.(MHz)	Channel #	Freq.(MHz)	Channel #	Freq.(MHz)
L	23205	779.5	23230	782	23230	782	23230	782	23230	782	23230	782
M	23230	782	23230	782	23230	782	23230	782	23230	782	23230	782
H	23255	784.5	23255	784.5	23255	784.5	23255	784.5	23255	784.5	23255	784.5
LTE Band 17												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz	
	Channel #	Freq.(MHz)	Channel #	Freq.(MHz)	Channel #	Freq.(MHz)	Channel #	Freq.(MHz)	Channel #	Freq.(MHz)	Channel #	Freq.(MHz)
L	23755	706.5	23780	709	23780	709	23780	709	23780	709	23780	709
M	23790	710	23790	710	23790	710	23790	710	23790	710	23790	710
H	23825	713.5	23800	711	23800	711	23800	711	23800	711	23800	711
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5	26790	824
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5	26940	838
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37850	2580	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38150	2610	38150	2610

	LTE Band 41											
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

<For LTE Overlap Bands Description>
1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 66	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 5	Yes	Yes	Yes	Yes		
LTE Band 26	Yes	Yes	Yes	Yes	Yes	
LTE Band 12	Yes	Yes	Yes	Yes		
LTE Band 17			Yes	Yes		
LTE Band 38			Yes	Yes	Yes	Yes
LTE Band 41			Yes	Yes	Yes	Yes

2) LTE Bands tune up

Band	Antenna	Default	DSI 0	DSI 1	DSI 3	DSI 4
		Tune-up Limit	Receiver on Tune-up Limit	Sensor on Tune-up Limit	Sensor off Tune-up Limit	Hotspot on Tune-up Limit
LTE Band 5	Ant 0	25.5	25.5	25.5	25.5	25.5
LTE Band 26		25.5	25.5	25.5	25.5	25.5
LTE Band 5	Ant 1	25.5	24.0	24.5	24.5	24.0
LTE Band 26		25.5	24.5	25.5	25.5	24.5
LTE Band 12	Ant 0	24.5	24.5	24.5	24.5	24.5
LTE Band 17		24.5	24.5	24.5	24.5	24.5
LTE Band 12	Ant 1	24.5	24.5	24.5	24.5	24.5
LTE Band 17		24.5	24.5	24.5	24.5	24.5
LTE Band 4	Ant 2	21.5	21.5	21.5	21.5	21.5
LTE Band 66		21.5	21.5	21.5	21.5	21.5
LTE Band 4	Ant 3	25.5	18.0	21.5	25.5	18.0
LTE Band 66		25.5	18.5	22.0	25.5	18.5
LTE Band 4	Ant 4	24.2	24.2	21.7	24.2	21.7
LTE Band 66		24.2	24.2	22.2	24.2	22.2
LTE Band 4	Ant 5	24.2	23.7	24.2	24.2	23.7
LTE Band 66		24.2	22.7	22.2	22.2	22.2
LTE Band 38	Ant 2	21.5	21.5	21.5	21.5	21.5
LTE Band 41		21.5	21.5	21.5	21.5	21.5
LTE Band 38	Ant 3	25.5	20.5	23.0	25.5	20.5
LTE Band 41		25.5	19.5	23.0	25.5	19.5
LTE Band 38	Ant 4	24.0	24.0	23.0	24.0	23.0
LTE Band 41		24.0	24.0	23.0	24.0	23.0
LTE Band 38	Ant 5	24.0	19.0	21.5	21.5	19.0
LTE Band 41		24.0	19.0	21.5	21.5	19.0

Note: For some bands/antennas at some exposure conditions which cannot be covered were fully tested for RF exposure compliance.

3) ENDC LTE Bands Tune up:

Band	Antenna	Default	DSI 0	DSI 1	DSI 3	DSI 4
		Receiver on	Sensor on	Sensor off	Hotspot on	
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
LTE Band 5	Ant 0	25.0	25.0	25.0	25.0	25.0
LTE Band 26		25.0	25.0	25.0	25.0	25.0
LTE Band 5	Ant 1	25.0	22.0	24.0	24.0	22.0
LTE Band 26		25.0	22.0	25.0	25.0	22.0
LTE Band 38	Ant 2	22.3	22.3	22.3	22.3	22.3
LTE Band 41		22.3	22.3	22.3	22.3	22.3
LTE Band 38	Ant 3	24.0	18.0	21.5	24.0	18.0
LTE Band 41		24.0	18.0	21.5	24.0	18.0
LTE Band 38	Ant 4	22.9	22.9	21.9	22.9	21.9
LTE Band 41		22.9	22.9	21.9	22.9	21.9
LTE Band 38	Ant 5	25.0	18.5	22.5	22.5	18.5
LTE Band 41		25.0	18.5	22.5	22.5	18.5

Note: For some bands/antennas at some exposure conditions which cannot be covered were fully tested for RF exposure compliance.

4.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information	
Operating Frequency Range of each 5G NR transmission band	5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz
Channel Bandwidth	The detail please refers to section 4.1 5GNR FR1 bands table.
SCS	FDD: SCS15KHz, TDD: SCS30KHz
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM
A-MPR (Additional MPR) disabled for SAR Testing?	Yes
LTE Anchor Bands for n5	LTE B7
LTE Anchor Bands for n7	LTE B5/7/66
LTE Anchor Bands for n66	LTE B2/5/7/12/66
LTE Anchor Bands for n38	LTE B66
LTE Anchor Bands for n41	LTE B41/66
LTE Anchor Bands for n78	LTE B2/5/7/26/38/41/66

Transmission (H, M, L) channel numbers and frequencies in each 5G NR band								
NR Band 5								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 7																
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500500	2502.5	501000	2505	501500	2507.5	502000	2510	502500	2512.5	503000	2515	504000	2520	505000	2525
M	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535
H	513500	2567.5	513000	2565	512500	2562.5	512000	2560	511500	2557.5	511000	2555	510000	2550	509000	2545

NR Band 66												
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	342500	1712.5	343000	1715	343500	1717.5	344000	1720	345000	1725	346000	1730
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745
H	355500	1777.5	355000	1775	354500	1772.5	354000	1770	353000	1765	352000	1760

NR Band 38						
	Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	516000	2580	517002	2585.01	518004	2590.02
M	519000	2595	519000	2595	519000	2595
H	522000	2610	520998	2604.99	519996	2599.98

NR Band 41															
Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L 501204	2506.02	502200	2511	503202	2516.01	504204	2521.02	505200	2526	507204	2536.02	508200	2541	509202	2546.01
M 518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99
H 535998	2679.99	534996	2674.98	534000	2670	532998	2664.99	531996	2659.98	529998	2649.99	528996	2644.98	528000	2640

NR Band 77 SCS30KHz														
	Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	647334	3710.01	648000	3720	648334	3725.01	648668	3730.02	649334	3740.01	649668	3745.02	650000	3750
M	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840
H	664666	3969.99	664000	3960	663666	3954.99	663332	3949.98	662666	3939.99	662332	3934.98	662000	3930

NR Band 78 SCS30KHz															
Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L 647334	3710.01	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02
M 650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750
H 652666	3789.99	652332	3784.98	652000	3780	651666	3774.99	651332	3769.98	651000	3765	650666	3759.99	650332	3754.98

For <3450 MHz ~ 3550 MHz >

NR Band 77 SCS30KHz														
Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	630668	3460.02	631334	3470.01	631668	3475.02	632000	3480	632668	3490.02	633000	3495		
M	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98
H	636000	3540	635332	3529.98	635000	3525	634666	3519.99	634000	3510	633666	3504.99		

NR Band 78 SCS30KHz															
Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L 630668	3460.02	631000	3465	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495
M 633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98
H 636000	3540	635666	3534.99	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99

<For NR Overlap Bands Description>
4) NR Bands BW

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
SA	n38	TDD	30	20,30,40
	n41	TDD	30	20,30,40,50,60,80,90,100
	n77	TDD	30	20,40,50,60,80,90,100
	n78	TDD	30	20,30,40,50,60,70,80,90,100

5) NR Bands Tune up:

Band	Antenna	Default	DSI 0	DSI 1	DSI 3	DSI 4
		Tune-up Limit	Receiver on Tune-up Limit	Sensor on Tune-up Limit	Sensor off Tune-up Limit	Hotspot on Tune-up Limit
FR1 n38	Ant 2	21.5	21.5	21.5	21.5	21.5
FR1 n41		21.5	21.5	21.5	21.5	21.5
FR1 n38	Ant 3	25.5	18.0	20.5	25.0	18.0
FR1 n41		25.5	17.5	20.5	25.5	17.5
FR1 n38	Ant 4	24.0	24.0	20.5	24.0	20.5
FR1 n41		24.0	24.0	21.0	24.0	21.0
FR1 n38	Ant 5	24.0	19.5	21.5	21.5	19.5
FR1 n41		24.0	19.0	21.0	21.0	19.0
FR1 n77_PC3	Ant 1	24.5	20.5	17.5	17.5	17.5
FR1 n78_PC3		24.5	17.5	18.0	18.0	17.5
FR1 n77_PC2		27.5	23.5	20.5	20.5	20.5
FR1 n78_PC2		27.5	20.5	21.0	21.0	20.5
FR1 n77_PC3	Ant 6	25.5	14.5	16.0	16.0	14.5
FR1 n78_PC3		25.5	12.0	15.0	15.0	12.0
FR1 n77_PC2		28.5	17.5	19.0	19.0	17.5
FR1 n78_PC2		28.5	15.0	18.0	18.0	15.0
FR1 n77_PC3	Ant 7	22.3	13.8	17.3	22.3	13.8
FR1 n78_PC3		22.3	13.3	16.3	22.3	13.3
FR1 n77_PC2		25.3	16.8	20.3	25.3	16.8
FR1 n78_PC2		25.3	16.3	19.3	25.3	16.3
FR1 n77_PC3	Ant 8	21.0	16.0	17.0	17.0	16.0
FR1 n78_PC3		21.0	15.0	17.0	17.0	15.0
FR1 n77_PC2		24.0	19.0	20.0	20.0	19.0
FR1 n78_PC2		24.0	18.0	20.0	20.0	18.0

6) ENDC NR Bands Tune up:


Band	Antenna	Default	DSI 0	DSI 1	DSI 3	DSI 4
			Receiver on	Sensor on	Sensor off	Hotspot on
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
FR1 n38	Ant 2	21.5	21.5	21.5	21.5	21.5
FR1 n41		21.5	21.5	21.5	21.5	21.5
FR1 n38	Ant 3	25.5	16.5	18.0	23.5	16.5
FR1 n41		25.5	16.5	18.5	23.5	16.5
FR1 n38	Ant 4	24.0	24.0	20.5	24.0	20.5
FR1 n41		24.0	24.0	21.0	24.0	21.0
FR1 n38	Ant 5	24.0	17.0	21.5	21.5	17.0
FR1 n41		24.0	17.0	21.0	21.0	17.0

Note: For some bands/antennas at some exposure conditions which cannot be covered were fully tested for RF exposure compliance.

5. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance>:

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (3980MHz) and lowest (1750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensors placed coincident with antenna elements at the top and bottom ends of the phone are utilized to determine when the device comes in proximity of the user's body or finger or hand at the front or back or bottom or right or top side of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. The sensors can use to detect the proximity of the user's body or handheld states at the front or back or bottom or right or top side of the device use a detection threshold distance. When front/back/right/top/bottom sides of body or handheld condition is detected reduced power will be active. The trigger distance shown in the sections below.
4. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance -1mm was performed:

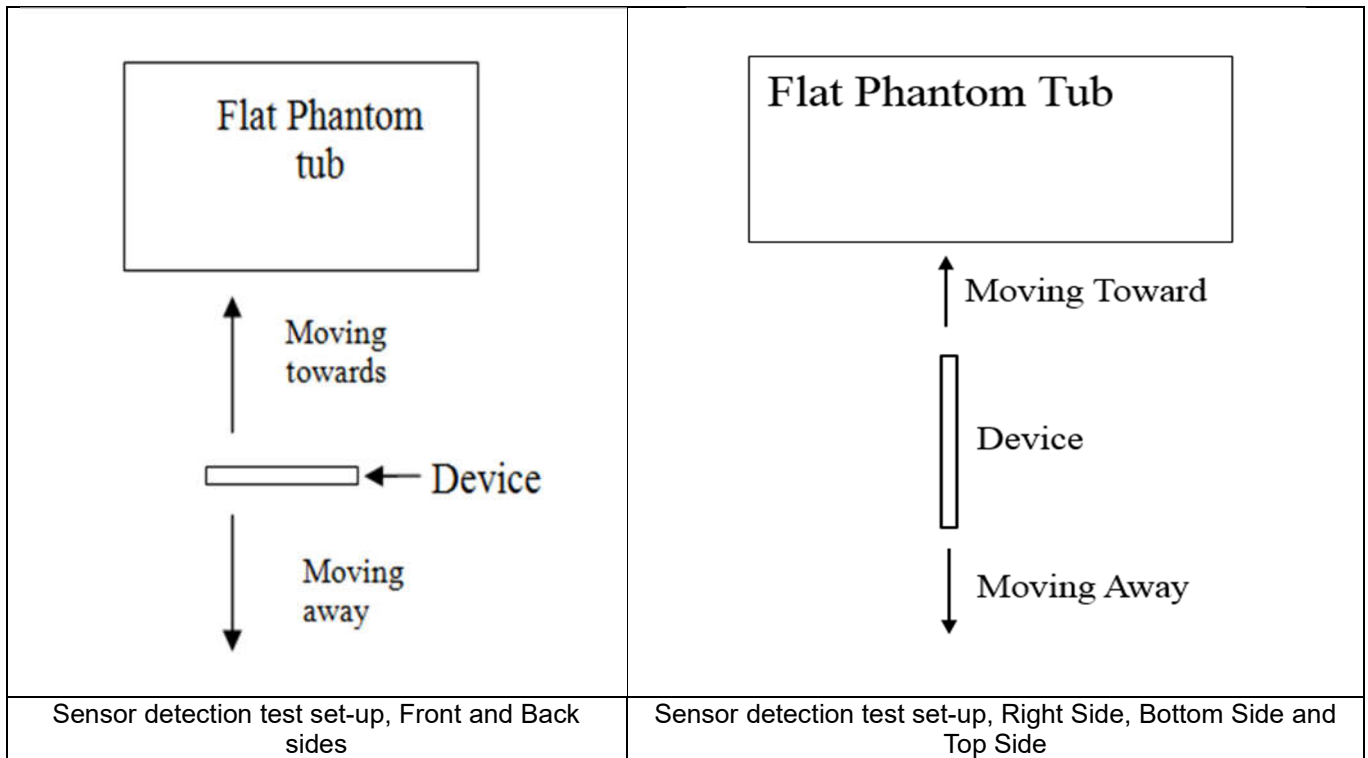

<P-Sensor>

< Sensor for Ant0/4 >

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	16	16	16	16	16	16	16	16

< Sensor for Ant3/7 >

Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	6	6	6	6	6	6

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

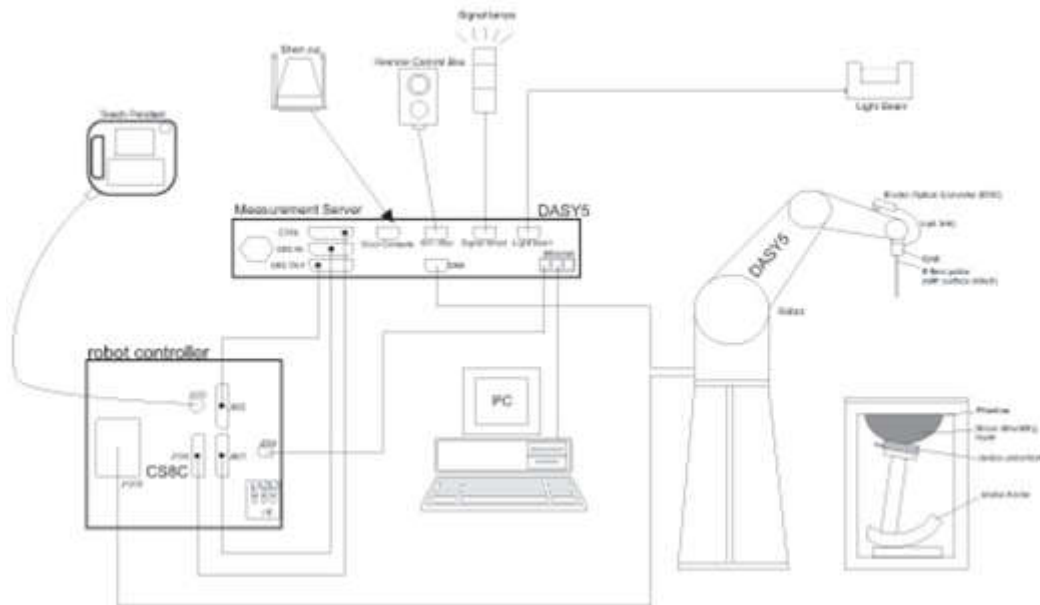

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win10 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1099	Dec. 15, 2021	Dec. 14, 2024
SPEAG	835MHz System Validation Kit	D835V2	4d162	Dec. 17, 2021	Dec. 16, 2024
SPEAG	1750MHz System Validation Kit	D1750V2	1137	Oct. 19, 2021	Oct. 18, 2024
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	Dec. 20, 2021	Dec. 19, 2024
SPEAG	2450MHz System Validation Kit	D2450V2	924	Sep. 02, 2020	Aug. 31, 2023
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Dec. 20, 2021	Dec. 19, 2024
SPEAG	3500MHz System Validation Kit	D3500V2	1037	Nov. 25, 2020	Nov. 23, 2023
SPEAG	3700MHz System Validation Kit	D3700V2	1008	Nov. 25, 2020	Nov. 23, 2023
SPEAG	3900MHz System Validation Kit	D3900V2	1048	Mar. 09, 2023	Mar. 08, 2026
SPEAG	5000MHz System Validation Kit	D5GHzV2	1341	Dec. 13, 2021	Dec. 12, 2024
SPEAG	Data Acquisition Electronics	DAE4	1311	Aug. 25, 2022	Aug. 24, 2023
SPEAG	Data Acquisition Electronics	DAE4	1437	Nov. 23, 2022	Nov. 22, 2023
SPEAG	Dosimetric E-Field Probe	ES3DV3	3191	Feb. 17, 2023	Feb. 16, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7577	Nov. 23, 2022	Nov. 22, 2023
SPEAG	SAM Twin Phantom	QD 000 P40 CD	1671	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	1795	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201300653	Jul. 05, 2023	Jul. 04, 2024
Anritsu	Radio communication analyzer	MT8820C	6201341952	Dec. 27, 2022	Dec. 26, 2023
Anritsu	Radio communication analyzer	MT8821C	6272416846	Apr. 06, 2023	Apr. 05, 2024
Anritsu	Radio communication analyzer	MT8821C	6272416863	Apr. 03, 2023	Apr. 02, 2024
Agilent	Wireless Communication Test Set	E5515C	MY50267224	Jul. 05, 2023	Jul. 04, 2024
Keysight	Network Analyzer	E5071C	MY46523671	Oct. 17, 2022	Oct. 16, 2023
Speag	Dielectric Assessment KIT	DAK-3.5	1071	Feb. 20, 2023	Feb. 19, 2024
Agilent	Signal Generator	N5181A	MY50145381	Dec. 27, 2022	Dec. 26, 2023
Anritsu	Power Sensor	MA2411B	1306099	Oct. 17, 2022	Oct. 16, 2023
Anritsu	Power Meter	ML2495A	1349001	Oct. 17, 2022	Oct. 16, 2023
Anritsu	Power Sensor	MA2411B	1542004	Dec. 27, 2022	Dec. 26, 2023
Anritsu	Power Meter	ML2495A	1339473	Dec. 27, 2022	Dec. 26, 2023
R&S	CBT BLUETOOTH TESTER	CBT	100963	Dec. 27, 2022	Dec. 26, 2023
R&S	Spectrum Analyzer	FSP7	100818	Jul. 05, 2023	Jul. 04, 2024
TES	Hygrometer	1310	200505600	Jul. 08, 2023	Jul. 07, 2024
Anymetre	Thermo-Hygrometer	JR593	2015030904	Jul. 08, 2023	Jul. 07, 2024
Anymetre	Thermo-Hygrometer	JR593	2015030903	Dec. 30, 2022	Dec. 29, 2023
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Weinschel	Attenuator 1	3M-10	N/A	Note 1	
Weinschel	Attenuator 2	3M-20	N/A	Note 1	
ARRA	Power Divider	A3200-2	N/A	Note 1	
ET Industries	Dual Directional Coupler	C-058-10	N/A	Note 1	
AR	Amplifier	5S1G4	0333096	Note 1	
Mini-Circuits	Amplifier	ZVE-3W-83+	599201528	Note 1	

Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check.
- Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

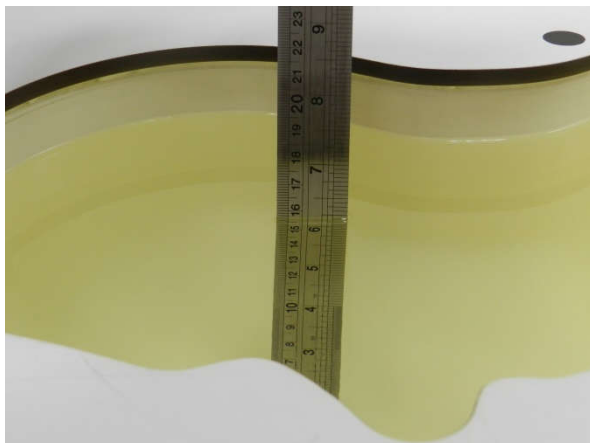


Fig 11.1 Photo of Liquid Height for Head SAR



Fig 11.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	Head	22.4	0.904	43.607	0.89	41.90	1.57	4.07	±5	2023/8/8
750	Head	22.3	0.918	43.137	0.89	41.90	3.15	2.95	±5	2023/8/11
835	Head	22.5	0.934	43.353	0.90	41.50	3.78	4.47	±5	2023/8/10
835	Head	22.4	0.941	42.864	0.90	41.50	4.56	3.29	±5	2023/8/13
1750	Head	22.6	1.358	41.624	1.37	40.10	-0.88	3.80	±5	2023/8/7
1750	Head	22.6	1.363	41.115	1.37	40.10	-0.51	2.53	±5	2023/8/12
1900	Head	22.3	1.412	39.311	1.40	40.00	0.86	-1.72	±5	2023/8/9
1900	Head	22.5	1.444	40.926	1.40	40.00	3.14	2.32	±5	2023/8/14
2450	Head	22.3	1.776	38.497	1.80	39.20	-1.33	-1.79	±5	2023/8/17
2450	Head	22.2	1.815	40.186	1.80	39.20	0.83	2.52	±5	2023/8/22
2600	Head	22.5	1.937	37.939	1.96	39.00	-1.17	-2.72	±5	2023/8/15
2600	Head	22.3	1.933	39.957	1.96	39.00	-1.38	2.45	±5	2023/8/16
3500	Head	22.4	2.981	39.224	2.91	37.90	2.44	3.49	±5	2023/8/19
3500	Head	22.5	2.919	37.847	2.91	37.90	0.31	-0.14	±5	2023/8/25
3700	Head	22.4	3.140	38.966	3.12	37.70	0.64	3.36	±5	2023/8/21
3700	Head	22.6	3.075	37.607	3.12	37.70	-1.44	-0.25	±5	2023/8/27
3900	Head	22.5	3.313	38.759	3.33	37.51	-0.51	3.33	±5	2023/8/24
3900	Head	22.7	3.245	37.410	3.33	37.51	-2.55	-0.27	±5	2023/8/29
5250	Head	22.6	4.668	36.853	4.71	35.95	-0.89	2.51	±5	2023/8/18
5250	Head	22.3	4.547	35.371	4.71	35.95	-3.46	-1.61	±5	2023/8/25
5600	Head	22.4	5.035	36.346	5.07	35.50	-0.69	2.38	±5	2023/8/20
5600	Head	22.6	4.892	34.894	5.07	35.50	-3.51	-1.71	±5	2023/8/26
5750	Head	22.5	5.197	36.137	5.22	35.35	-0.44	2.23	±5	2023/8/23
5750	Head	22.5	5.039	34.631	5.22	35.35	-3.47	-2.03	±5	2023/8/28

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2023/8/8	750	Head	250	1099	3191	1311	2.250	8.540	9	5.39
2023/8/11	750	Head	250	1099	3191	1311	2.300	8.540	9.2	7.73
2023/8/10	835	Head	250	4d162	3191	1311	2.530	9.640	10.12	4.98
2023/8/13	835	Head	250	4d162	3191	1311	2.440	9.640	9.76	1.24
2023/8/7	1750	Head	250	1137	3191	1311	8.770	36.500	35.08	-3.89
2023/8/12	1750	Head	250	1137	3191	1311	8.570	36.500	34.28	-6.08
2023/8/9	1900	Head	250	5d182	3191	1311	9.610	39.600	38.44	-2.93
2023/8/14	1900	Head	250	5d182	3191	1311	9.510	39.600	38.04	-3.94
2023/8/17	2450	Head	250	924	3191	1311	13.500	51.400	54	5.06
2023/8/22	2450	Head	250	924	3191	1311	12.100	51.400	48.4	-5.84
2023/8/15	2600	Head	250	1070	3191	1311	14.800	56.200	59.2	5.34
2023/8/16	2600	Head	250	1070	3191	1311	13.100	56.200	52.4	-6.76
2023/8/19	3500	Head	100	1037	7577	1437	6.910	68.000	69.1	1.62
2023/8/25	3500	Head	100	1037	7577	1437	6.500	68.000	65	-4.41
2023/8/21	3700	Head	100	1008	7577	1437	6.690	67.600	66.9	-1.04
2023/8/27	3700	Head	100	1008	7577	1437	6.580	67.600	65.8	-2.66
2023/8/24	3900	Head	100	1048	7577	1437	6.560	69.100	65.6	-5.07
2023/8/29	3900	Head	100	1048	7577	1437	6.600	69.100	66	-4.49
2023/8/18	5250	Head	100	1341	7577	1437	7.760	80.700	77.6	-3.84
2023/8/25	5250	Head	100	1341	7577	1437	7.650	80.700	76.5	-5.20
2023/8/20	5600	Head	100	1341	7577	1437	8.700	84.500	87	2.96
2023/8/26	5600	Head	100	1341	7577	1437	8.830	84.500	88.3	4.50
2023/8/23	5750	Head	100	1341	7577	1437	8.590	80.600	85.9	6.58
2023/8/28	5750	Head	100	1341	7577	1437	8.670	80.600	86.7	7.57

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2023/8/8	750	Head	250	1099	3191	1311	1.480	5.650	5.92	4.78
2023/8/11	750	Head	250	1099	3191	1311	1.450	5.650	5.8	2.65
2023/8/10	835	Head	250	4d162	3191	1311	1.660	6.260	6.64	6.07
2023/8/13	835	Head	250	4d162	3191	1311	1.450	6.260	5.8	-7.35
2023/8/7	1750	Head	250	1137	3191	1311	4.660	19.200	18.64	-2.92
2023/8/12	1750	Head	250	1137	3191	1311	4.460	19.200	17.84	-7.08
2023/8/9	1900	Head	250	5d182	3191	1311	4.990	20.200	19.96	-1.19
2023/8/14	1900	Head	250	5d182	3191	1311	4.660	20.200	18.64	-7.72
2023/8/17	2450	Head	250	924	3191	1311	6.370	24.000	25.48	6.17
2023/8/22	2450	Head	250	924	3191	1311	6.240	24.000	24.96	4.00
2023/8/15	2600	Head	250	1070	3191	1311	6.620	24.600	26.48	7.64
2023/8/16	2600	Head	250	1070	3191	1311	6.460	24.600	25.84	5.04
2023/8/19	3500	Head	100	1037	7577	1437	2.590	25.400	25.9	1.97
2023/8/25	3500	Head	100	1037	7577	1437	2.500	25.400	25	-1.57
2023/8/21	3700	Head	100	1008	7577	1437	2.430	24.400	24.3	-0.41
2023/8/27	3700	Head	100	1008	7577	1437	2.450	24.400	24.5	0.41
2023/8/24	3900	Head	100	1048	7577	1437	2.280	24.100	22.8	-5.39
2023/8/29	3900	Head	100	1048	7577	1437	2.240	24.100	22.4	-7.05
2023/8/18	5250	Head	100	1341	7577	1437	2.210	23.100	22.1	-4.33
2023/8/25	5250	Head	100	1341	7577	1437	2.200	23.100	22	-4.76
2023/8/20	5600	Head	100	1341	7577	1437	2.470	24.000	24.7	2.92
2023/8/26	5600	Head	100	1341	7577	1437	2.490	24.000	24.9	3.75
2023/8/23	5750	Head	100	1341	7577	1437	2.390	22.700	23.9	5.29
2023/8/28	5750	Head	100	1341	7577	1437	2.310	22.700	23.1	1.76

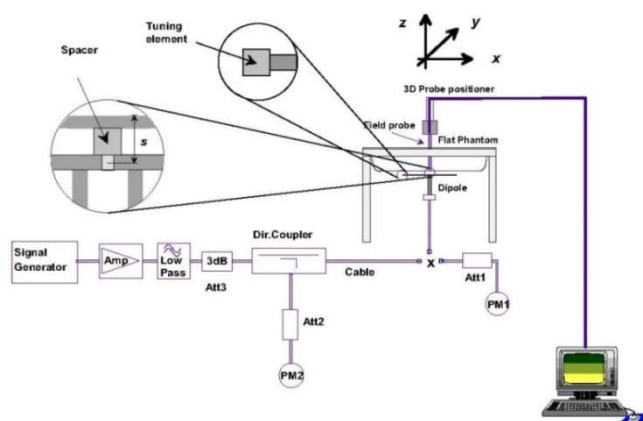


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

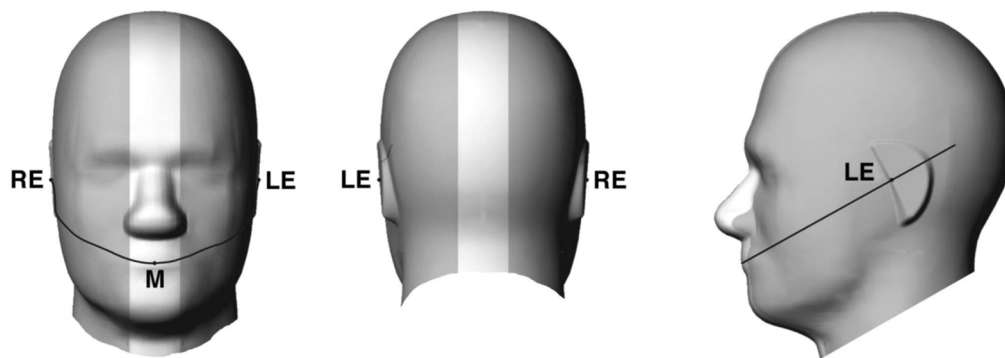


Fig 12.1.1 Front, back, and side views of SAM twin phantom

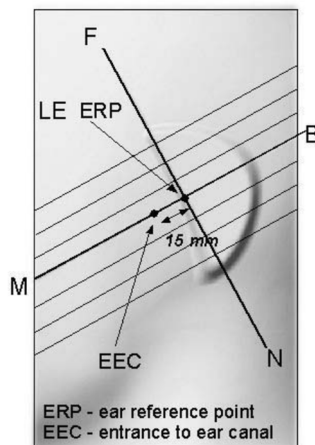


Fig 12.1.2 Close-up side view of phantom showing the ear region.

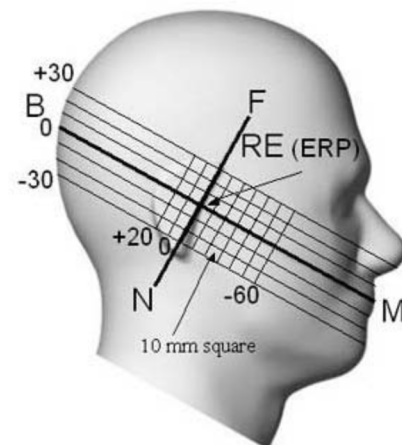


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the handset. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

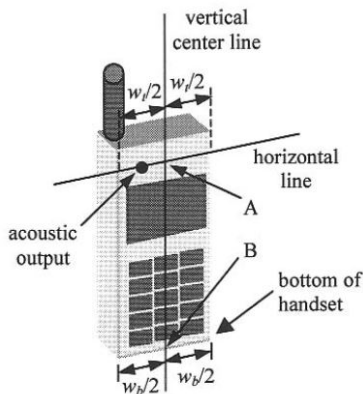


Fig 12.2.1 Handset vertical and horizontal reference lines—"fixed case"

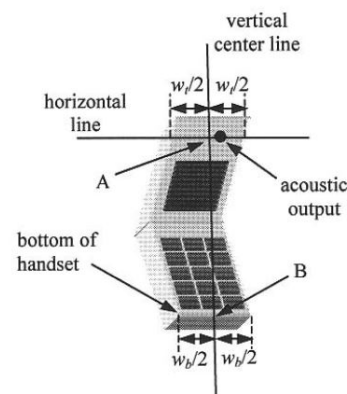


Fig 12.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

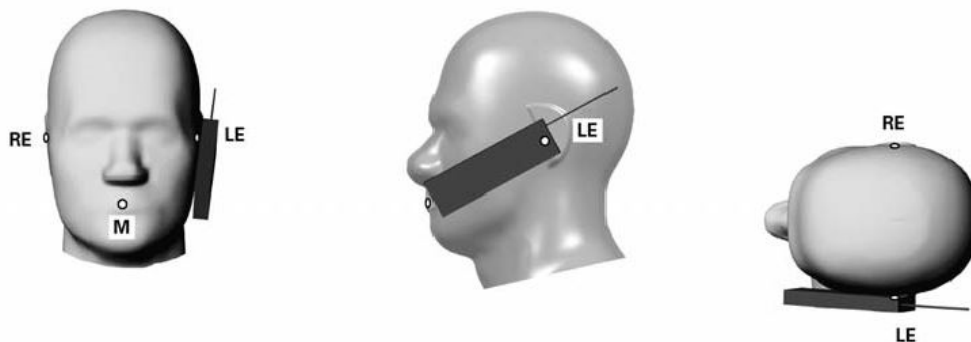


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

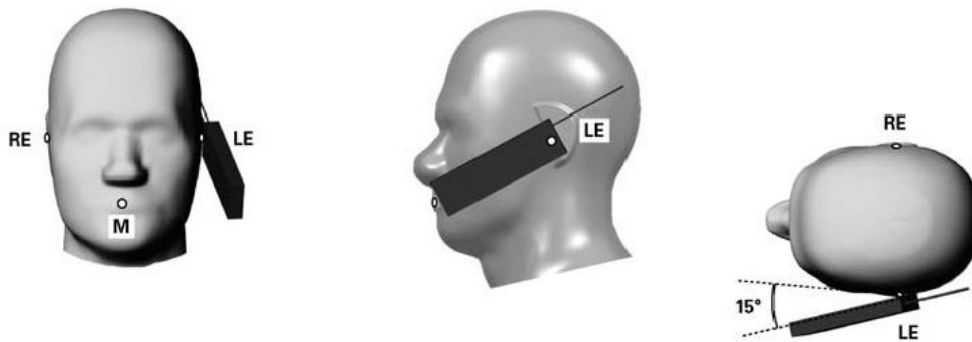


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

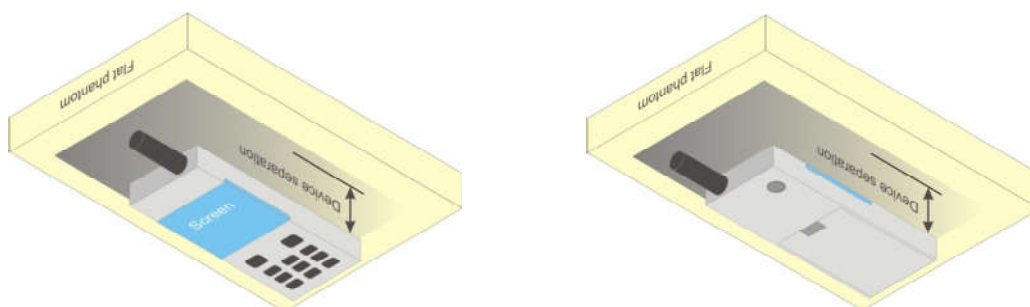


Fig 12.4 Body Worn Position

12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_o/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_o/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_o/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

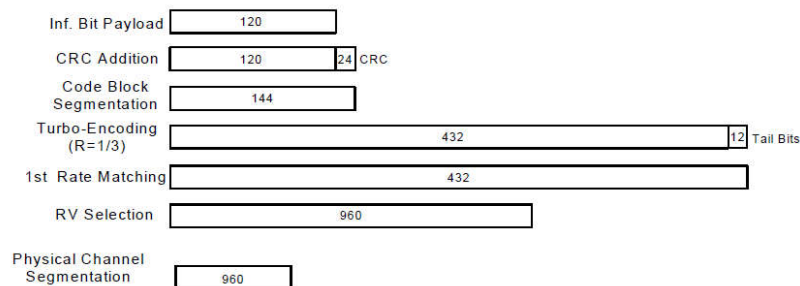


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

1. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
2. The RF path losses were compensated into the measurements.
3. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Params
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power = 21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
4. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{fs} = 30/15 * \beta_c$.
 Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).
 Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.
 Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.
 Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration
<WCDMA Conducted Power>
General Note:


1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $1/4$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B4 / B5 / B17 / B38 SAR test was covered by B66 / B26 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to May 2017 TCB workshop, for 16QAM and 64QAM, 256QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 256QAM, 64QAM and 16QAM signal modulation are correct.


16QAM

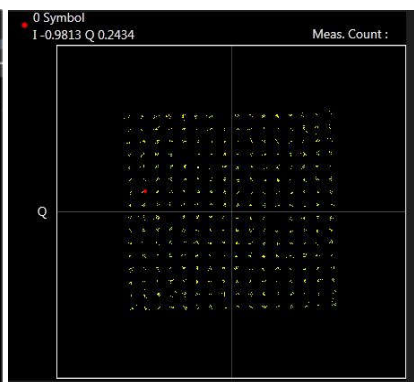64QAM

256QAM

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

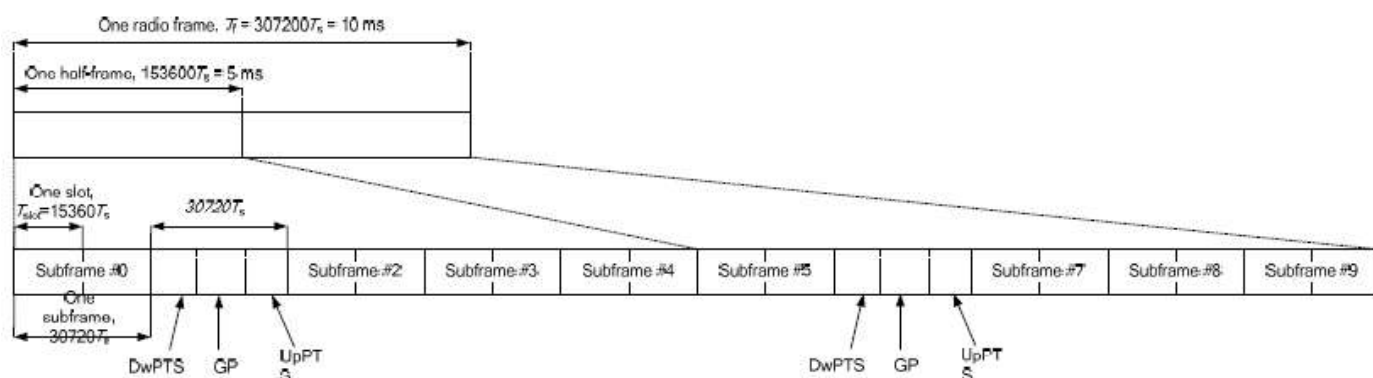


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<LTE Carrier Aggregation>
General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. All permutations exist. No restrictions on Pcell & Scell combinations.
4. The gray color table is covered by other combinations and no need to verify power

2CC Downlink Carrier Aggregation					3CC Downlink Carrier Aggregation				
Number	Combination	4X4 MIMO	Restriction	Covered by Measurement Superset	Number	Combination	4X4 MIMO	Restriction	Covered by Measurement Superset
1	CA_2A-4A	4A		3CC-1	1	CA_2A-4A-5A	4A		
2	CA_12A-66A	66A			2	CA_2A-7A-66A			
3	CA_2A-2A				3	CA_2A-7A-7A	7A		
4	CA_2A-5A			3CC-1	4	CA_2A-7C	7C		
5	CA_2A-7A	7A		3CC-2	5	CA_41A-41A-41A	41A-41A-41A		
6	CA_2C				6	CA_41D	41D		
7	CA_38C	38C			7	CA_4A-7C	4A-7C		
8	CA_41A-41A	41A-41A		3CC-5	8	CA_5A-7C	7C		
9	CA_41C	41C			9	CA_7A-66A-66A			
10	CA_4A-5A	4A		3CC-1	10	CA_5A-7A-7A	7A-7A		
11	CA_4A-7A	4A-7A		3CC-11	11	CA_2A-4A-7A	4A		
12	CA_5A-7A	7A		3CC-10	12	CA_2A-5A-66A	66A		
13	CA_66A-66A	66A		3CC-9	13	CA_2A-5A-7A	7A		
14	CA_7A-7A	7A-7A		3CC-3	14	CA_5A-66A-66A	66A		
15	CA_7C	7C		3CC-4	15				
16	CA_66C	66C			16				
17	CA_66B	66B			17				
18	CA_2A-66A	66A		3CC-2	18				
19	CA_4A-4A	4A			19				
20	CA_5A-66A	66A		3CC-12	20				
21	CA_7A-26A	7A			21				
22	CA_7A-66A	66A		3CC-2	22				
23	CA_26A-38A	38A			23				
24	CA_26A-41A	41A			24				
25	CA_2A-26A				25				
26	CA_2A-38A	38A			26				
27					27				
28					28				
29					29				

LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink three carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

LTE 4x4 MIMO (Downlink)

This device supports downlink 4x4 MIMO operations for LTE Band 4/7/66/38/41 only. Uplink transmission is limited to a single output stream. Power measurements were performed with downlink 4x4 MIMO active for the configuration with highest measured maximum conducted power with 4x4 downlink MIMO inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

Per FCC Guidance, SAR for downlink 4x4 MIMO was not needed since the maximum average output power in 4x4 downlink MIMO mode was not > 0.25 dB higher than the maximum output power with downlink 4x4 MIMO inactive. When carrier aggregation is applicable, power measurements were performed with the downlink carrier aggregation and 4x4 DL MIMO active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

4X4 MIMO	Band
	LTE Band 4/7/66/38/41

LTE Carrier Aggregation Conducted Power (Uplink)

LTE Uplink CA	2CC Uplink Carrier Aggregation
Intra-band	Antenna Tx
CA_7C	Ant2/3/4/5
CA_38C	Ant2/3/4/5

<Intra-band>
General Note:

- The device supports intra-band uplink carrier aggregation for LTE B7/38 with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- The device supports uplink carrier aggregation with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- According Nov. 2017 TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- Additional SAR measurement for LTE UL CA with other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

<Inter-band uplink carrier aggregation consideration>

LTE Uplink CA	2CC Uplink Carrier Aggregation	
Inter-band	Antenna Tx	Antenna Tx
CA_2A-4A	B2: Ant2/5	B4: Ant3/4
CA_4A-7A	B4: Ant3/4	B7: Ant2/5

General Note:

- In inter-band UL CA operation, the each PCC TX power level will be less than or same as the standalone LTE operation. For Inter-band CA co-located SAR analysis is performed using standalone SAR summed together and they are more conservatively for inter band CA.

5G NR Output Power (Unit: dBm)

General Note:

1. 5G NR n5/n7/n66/n38/n41/n78 is NSA mode.
2. 5G NR n5/n7/n66/n38/n41/n77/n78 is SA mode.
3. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-s QPSK and the reported SAR for the DFT-s QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, for 16QAM/64QAM/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the 16QAM/64QAM/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel
 - d. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested
 - f. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
4. For 5G NR n77/n78 HPUE, 5G NR n77/n78 PC2 Maximum Duty Cycle is 50%, using FTM (Factory Test Mode) with 50% duty cycle is considered during SAR testing. For 5G NR other bands, using FTM to perform SAR with default 100% transmission.
5. For 5G NR, the simultaneous transmission analysis is used standalone SAR at total power level to show compliance.
6. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
7. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
8. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
9. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
10. 5G NR n77/n78 supports HPUE, HPUE power and SAR testing performed separately.
11. For 5G NR EN-DC mode, standalone SAR performed for 5G NR NSA band with the maximum power, EN-DC SAR summed EN-DC mode 5G NR standalone SAR and LTE standalone SAR, the result of EN-DC SAR is more conservatively.

<3GPP 38.101 MPR for EN-DC>
Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0 ²
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM	≤ 2.5		
CP-OFDM	256 QAM	≤ 4.5		
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5	≤ 2.5	
	256 QAM	≤ 4.5		
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

<EN-DC combination>

ENDC	LTE TX				FR1 NR TX			
DC_2A_n66A	Ant 5	Ant 2			Ant 3	Ant 4		
DC_2A_n78A	Ant 5	Ant 2			Ant 6	Ant 7	Ant 1	Ant 8
DC_5A_n66A	Ant 0	Ant 1			Ant 3	Ant 4	Ant 5	Ant 2
DC_5A_n78A	Ant 0	Ant 1			Ant 6	Ant 7	Ant 1	Ant 8
DC_7A_n5A	Ant 5	Ant 2	Ant 3	Ant 4	Ant 0	Ant 1		
DC_7A_n7A	Ant 5	Ant 2			Ant 3	Ant 4		
DC_7A_n66A	Ant 5	Ant 2			Ant 3	Ant 4	Ant 5	Ant 2
DC_7A_n78A	Ant 5	Ant 2	Ant 3	Ant 4	Ant 6	Ant 7	Ant 1	Ant 8
DC_12A_n66A	Ant 0	Ant 1			Ant 3	Ant 4	Ant 5	Ant 2
DC_26A_n78A	Ant 0	Ant 1			Ant 6	Ant 7	Ant 1	Ant 8
DC_38A_n78A	Ant 5	Ant 2	Ant 3	Ant 4	Ant 6	Ant 7	Ant 1	Ant 8
DC_41A_n41A	Ant 5	Ant 2			Ant 3	Ant 4		
DC_41A_n78A	Ant 5	Ant 2	Ant 3	Ant 4	Ant 6	Ant 7	Ant 1	Ant 8
DC_66A_n7A	Ant 5	Ant 2			Ant 3	Ant 4	Ant 5	Ant 2
DC_66A_n38A	Ant 5	Ant 2			Ant 3	Ant 4	Ant 5	Ant 2
DC_66A_n41A	Ant 5	Ant 2			Ant 3	Ant 4	Ant 5	Ant 2
DC_66A_n66A	Ant 5	Ant 2			Ant 3	Ant 4		
DC_66A_n78A	Ant 5	Ant 2	Ant 3	Ant 4	Ant 6	Ant 7	Ant 1	Ant 8
DC_5A_n7A	Ant 0	Ant 1			Ant 3	Ant 4	Ant 5	Ant 2

<WLAN Conducted Power>


General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration. Additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
6. 802.11 ax supports both full tone size mode and partial tone size mode, after verification on partial tone size mode that partial size tone mode power will not be higher than full tone size mode, therefore, full tone mode power was chosen to be measured in this report.
7. SISO and MIMO all supported by WLAN2.4GHz/WLAN5GHz, for SISO mode power is less than per chain power of MIMO mode. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power, so only chose MIMO mode to perform SAR testing. However, in order to do SISO simultaneous transmission, so tested the WLAN 2.4G SISO antenna 8.
8. For the conducted power measurement is MIMO chains transmitting simultaneously and measured the separately conducted power for both chains and then based on the conducted power of two antennas respectively to calculate sum of the power for MIMO mode.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 76.6 % as following figure, according to Oct. 2016 TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation.

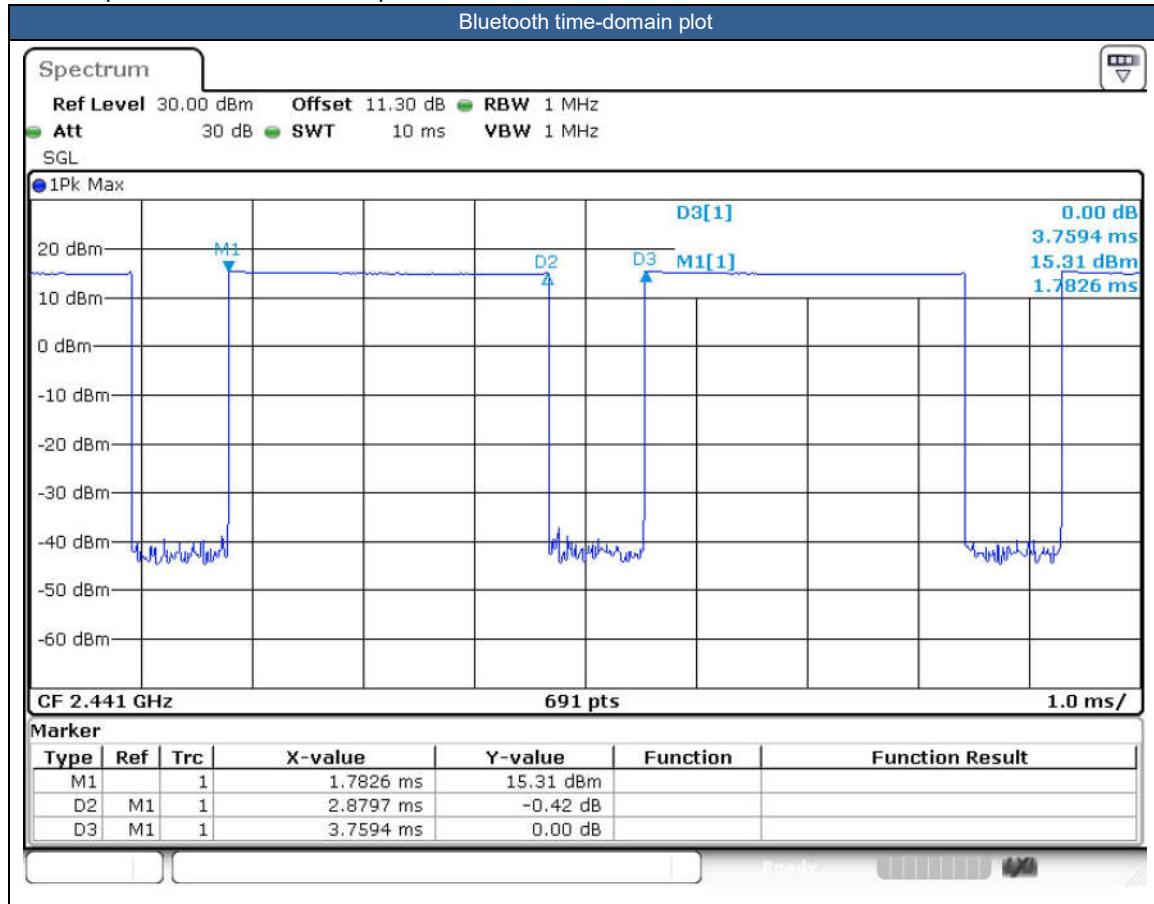



14. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For SAR testing of Bluetooth signal with 83.3% theoretical duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle) *83.3%".
 - d. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - e. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - f. For TDD LTE SAR measurement of power class 3, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The reported TDD LTE SAR (W/kg) = Measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The device implements Proximity sensors/receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table.
5. For WLAN/BT when transmit simultaneous with WWAN, power reduction will be activated to head, Body and extremity exposure conditions.
6. 5G NR n77/n78 supports HPUE mode, HPUE power and SAR testing performed separately.
7. For 5G NR n77/n78 HPUE, 5G NR n77/n78 PC2 Maximum Duty Cycle is 50%, using FTM (Factory Test Mode) with 50% duty cycle is considered during SAR testing. For 5G NR other bands, using FTM to perform SAR with default 100% transmission.
8. 5G NR n77/n78 HPUE with higher power. For HPUE power is higher than power class 3 but with lower duty cycle, the maximum average power for class 2 and class 3 is almost the same, so we chose power class 3 full SAR testing and power class 2 verify the worst case of power class 3 SAR.
9. For 5G NR EN-DC mode, standalone SAR performed for 5G NR NSA band with the maximum power, EN-DC SAR summed EN-DC mode 5G NR standalone SAR and LTE standalone SAR, the result of EN-DC SAR is more conservatively.
10. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power (for handheld on state, the maximum full power means reduced power), including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN/WLAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than 1.2W/kg of GSM850, WCDMA Band II/IV, LTE Band 2/4/5/7/13/26/66/38/41, 5G NR n5/n7/n38/n66/n41/n77/n78, therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
11. For distance SAR and non-distance SAR, always chose higher SAR to do co-located analysis.
12. According to Nov. 2017 TCB workshop, when the reported 1gSAR for UL CA configuration is <1.2 W/kg, UL CA 1gSAR is

not required for all required test channels (PCC based).

13. LTE B5/12/26 at ant0/1, LTE B2 at ant2/5 and LTE B7/38/41/66 at ant2/5/3/4 support different PAs for some antennas. In addition, LTE bands support Main PA for SA standalone Mode, LTE bands support Other PA only under ENDC combinations and LTE bands (except LTE B7 at ant2/5) support Other PA only under ULCA combinations. For RF exposure, main PA and other PA was chosen to perform full SAR testing to ensure the RF exposure is compliance separately.
14. The following table "n/a" in the result means the SAR cube is too small to be detected.

UL duty cycle detection mechanism specification:

The device supports the UL duty cycle detection mechanism for LTE TDD B41 & 5GNR n41/78 (including FR1 SA and FR1 ENDC). The mechanism is that the output power (maximum burst power) is different at different UL duty cycle levels, but maintaining the maximum average power is matched to the SAR is compliant. When at low duty cycle, the transmit power is compensated but does not exceed the upper range defined by the 3GPP standard, thus improving the OTA performance

Note:

1. SAR is not required because the average output power is not higher than the Max UL duty cycle configuration.
2. For each band, the SAR evaluation uses the highest Time-average power configuration.
3. The detail results please referred to KDB inquiry with the FCC and Duty cycle_OD.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B4 / B5 / B17 / B38 SAR test was covered by B66 / B26 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if

- a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
- b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

5G NR Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - b. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - c. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - d. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not $\frac{1}{2}$ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - e. Smaller bandwidth output power for each RB allocation configuration for this device will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
 - f. For 5G FR1 n5 /n7/n66/n38/n41/n77 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
6. The 2.4GHz/5GHz WLAN can transmit in SISO and MIMO antenna mode.
7. SISO and MIMO all supported by WLAN2.4GHz/WLAN5GHz, for SISO mode power is less than per chain power of MIMO mode. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power, so only chose MIMO mode to perform SAR testing. However, in order to do SISO simultaneous transmission, so tested the WLAN 2.4G SISO antenna 8.
8. For the conducted power measurement is MIMO chains transmitting simultaneously and measured the separately conducted power for both chains and then based on the conducted power of two antennas respectively to calculate sum of the power for MIMO mode.

DSI status description:

The device has the following DSI state which used at different exposure condition.

Exposure Condition	DSI	Trigger conditions
Head SAR	DSI 0	Earpiece On
Hotspot Mode SAR	DSI 4	Hotspot On
Body worn/ Extremity Mode SAR	DSI 3	Sensor Off/ receiver off
Body worn/ Extremity Mode SAR	DSI 1	Sensor On



15.1 Head SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																				
	LTE Band 12	10M	QPSK	1	25	-	Right Cheek	0mm	Ant 0	DSI 0	23095	707.5	23.69	24.50	1.205	-	-	0.17	0.060	0.072
	LTE Band 12	10M	QPSK	1	25	-	Right Tilted	0mm	Ant 0	DSI 0	23095	707.5	23.69	24.50	1.205	-	-	-	n/a	n/a
	LTE Band 12	10M	QPSK	1	25	-	Left Cheek	0mm	Ant 0	DSI 0	23095	707.5	23.69	24.50	1.205	-	-	0.19	0.069	0.083
	LTE Band 12	10M	QPSK	1	25	-	Left Tilted	0mm	Ant 0	DSI 0	23095	707.5	23.69	24.50	1.205	-	-	-	n/a	n/a
	LTE Band 12	10M	QPSK	25	12	-	Right Cheek	0mm	Ant 0	DSI 0	23095	707.5	22.71	23.50	1.199	-	-	-0.11	0.054	0.065
	LTE Band 12	10M	QPSK	25	12	-	Right Tilted	0mm	Ant 0	DSI 0	23095	707.5	22.71	23.50	1.199	-	-	-	n/a	n/a
	LTE Band 12	10M	QPSK	25	12	-	Left Cheek	0mm	Ant 0	DSI 0	23095	707.5	22.71	23.50	1.199	-	-	-0.17	0.062	0.074
	LTE Band 12	10M	QPSK	25	12	-	Left Tilted	0mm	Ant 0	DSI 0	23095	707.5	22.71	23.50	1.199	-	-	-	n/a	n/a
	LTE Band 12	10M	QPSK	1	25	-	Right Cheek	0mm	Ant 1	DSI 0	23095	707.5	23.95	24.50	1.135	-	-	0.12	0.164	0.186
	LTE Band 12	10M	QPSK	1	25	-	Right Tilted	0mm	Ant 1	DSI 0	23095	707.5	23.95	24.50	1.135	-	-	-	n/a	n/a
01	LTE Band 12	10M	QPSK	1	25	-	Left Cheek	0mm	Ant 1	DSI 0	23095	707.5	23.95	24.50	1.135	-	-	0.04	0.323	0.367
	LTE Band 12	10M	QPSK	1	25	-	Left Tilted	0mm	Ant 1	DSI 0	23095	707.5	23.95	24.50	1.135	-	-	-	n/a	n/a
	LTE Band 12	10M	QPSK	25	12	-	Right Cheek	0mm	Ant 1	DSI 0	23095	707.5	22.93	23.50	1.140	-	-	0.08	0.140	0.160
	LTE Band 12	10M	QPSK	25	12	-	Right Tilted	0mm	Ant 1	DSI 0	23095	707.5	22.93	23.50	1.140	-	-	-	n/a	n/a
	LTE Band 12	10M	QPSK	25	12	-	Left Cheek	0mm	Ant 1	DSI 0	23095	707.5	22.93	23.50	1.140	-	-	0.07	0.269	0.307
	LTE Band 12	10M	QPSK	25	12	-	Left Tilted	0mm	Ant 1	DSI 0	23095	707.5	22.93	23.50	1.140	-	-	-	n/a	n/a
	LTE Band 13	10M	QPSK	1	25	-	Right Cheek	0mm	Ant 0	DSI 0	23230	782	24.61	25.50	1.227	-	-	0.11	0.086	0.106
	LTE Band 13	10M	QPSK	1	25	-	Right Tilted	0mm	Ant 0	DSI 0	23230	782	24.61	25.50	1.227	-	-	-	n/a	n/a
	LTE Band 13	10M	QPSK	1	25	-	Left Cheek	0mm	Ant 0	DSI 0	23230	782	24.61	25.50	1.227	-	-	0.15	0.097	0.119
	LTE Band 13	10M	QPSK	1	25	-	Left Tilted	0mm	Ant 0	DSI 0	23230	782	24.61	25.50	1.227	-	-	-	n/a	n/a
	LTE Band 13	10M	QPSK	25	12	-	Right Cheek	0mm	Ant 0	DSI 0	23230	782	23.46	24.50	1.271	-	-	-0.13	0.069	0.088
	LTE Band 13	10M	QPSK	25	12	-	Right Tilted	0mm	Ant 0	DSI 0	23230	782	23.46	24.50	1.271	-	-	-	n/a	n/a
	LTE Band 13	10M	QPSK	25	12	-	Left Cheek	0mm	Ant 0	DSI 0	23230	782	23.46	24.50	1.271	-	-	0.14	0.073	0.093
	LTE Band 13	10M	QPSK	25	12	-	Left Tilted	0mm	Ant 0	DSI 0	23230	782	23.46	24.50	1.271	-	-	-	n/a	n/a
	LTE Band 13	10M	QPSK	1	25	-	Right Cheek	0mm	Ant 1	DSI 0	23230	782	24.72	25.50	1.197	-	-	0.11	0.436	0.522
	LTE Band 13	10M	QPSK	1	25	-	Right Tilted	0mm	Ant 1	DSI 0	23230	782	24.72	25.50	1.197	-	-	0.18	0.092	0.110
02	LTE Band 13	10M	QPSK	1	25	-	Left Cheek	0mm	Ant 1	DSI 0	23230	782	24.72	25.50	1.197	-	-	0.03	0.862	1.032
	LTE Band 13	10M	QPSK	1	25	-	Left Tilted	0mm	Ant 1	DSI 0	23230	782	24.72	25.50	1.197	-	-	0.03	0.115	0.138
	LTE Band 13	10M	QPSK	25	12	-	Right Cheek	0mm	Ant 1	DSI 0	23230	782	23.58	24.50	1.236	-	-	-0.17	0.343	0.424
	LTE Band 13	10M	QPSK	25	12	-	Right Tilted	0mm	Ant 1	DSI 0	23230	782	23.58	24.50	1.236	-	-	-0.18	0.073	0.090
	LTE Band 13	10M	QPSK	25	12	-	Left Cheek	0mm	Ant 1	DSI 0	23230	782	23.58	24.50	1.236	-	-	0.13	0.692	0.855
	LTE Band 13	10M	QPSK	25	12	-	Left Tilted	0mm	Ant 1	DSI 0	23230	782	23.58	24.50	1.236	-	-	-0.17	0.092	0.114
	LTE Band 13	10M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 0	23230	782	23.55	24.50	1.245	-	-	0.17	0.726	0.904
835MHz																				
	GSM850	-	-	-	-	GPRS(4Tx slots)	Right Cheek	0mm	Ant 0	DSI 0	189	836.4	28.65	29.50	1.216	-	-	-0.02	0.241	0.293
	GSM850	-	-	-	-	GPRS(4Tx slots)	Right Tilted	0mm	Ant 0	DSI 0	189	836.4	28.65	29.50	1.216	-	-	0.18	0.140	0.170
	GSM850	-	-	-	-	GPRS(4Tx slots)	Left Cheek	0mm	Ant 0	DSI 0	189	836.4	28.65	29.50	1.216	-	-	-0.08	0.238	0.289
	GSM850	-	-	-	-	GPRS(4Tx slots)	Left Tilted	0mm	Ant 0	DSI 0	189	836.4	28.65	29.50	1.216	-	-	-0.06	0.108	0.131
	GSM850	-	-	-	-	GPRS(4Tx slots)	Right Cheek	0mm	Ant 1	DSI 0	189	836.4	26.57	27.00	1.104	-	-	-0.12	0.290	0.320
	GSM850	-	-	-	-	GPRS(4Tx slots)	Right Tilted	0mm	Ant 1	DSI 0	189	836.4	26.57	27.00	1.104	-	-	0.13	0.052	0.057
	GSM850	-	-	-	-	GPRS(4Tx slots)	Left Cheek	0mm	Ant 1	DSI 0	189	836.4	26.57	27.00	1.104	-	-	0.15	0.774	0.855
	GSM850	-	-	-	-	GPRS(4Tx slots)	Left Tilted	0mm	Ant 1	DSI 0	189	836.4	26.57	27.00	1.104	-	-	0.18	0.071	0.078
	GSM850	-	-	-	-	GPRS(4Tx slots)	Left Cheek	0mm	Ant 1	DSI 0	128	824.2	26.55	27.00	1.109	-	-	-0.12	0.790	0.876
03	GSM850	-	-	-	-	GPRS(4Tx slots)	Left Cheek	0mm	Ant 1	DSI 0	251	848.8	26.41	27.00	1.146	-	-	0.09	0.885	1.014
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 0	4182	836.4	23.91	25.00	1.285	-	-	-0.14	0.210	0.270
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 0	4182	836.4	23.91	25.00	1.285	-	-	-0.03	0.113	0.145
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 0	4182	836.4	23.91	25.00	1.285	-	-	0.02	0.207	0.266
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 0	4182	836.4	23.91	25.00	1.285	-	-	0.04	0.088	0.113
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	DSI 0	4182	836.4	22.12	23.00	1.225	-	-	0.12	0.305	0.374
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 1	DSI 0	4182	836.4	22.12	23.00	1.225	-	-	0.11	0.054	0.066



FCC SAR Test Report

Report No. : FA380206

	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI 0	4182	836.4	22.12	23.00	1.225	-	-	0.09	0.679	0.832
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 1	DSI 0	4182	836.4	22.12	23.00	1.225	-	-	-0.06	0.077	0.094
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI 0	4132	826.4	22.08	23.00	1.236	-	-	-0.09	0.608	0.751
04	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI 0	4233	846.6	22.11	23.00	1.227	-	-	0.19	0.804	0.987
	LTE Band 26	15M	QPSK	1	37	-	Right Cheek	0mm	Ant 0	DSI 0	26865	831.5	24.65	25.50	1.216	-	-	-0.15	0.104	0.126
	LTE Band 26	15M	QPSK	1	37	-	Right Tilted	0mm	Ant 0	DSI 0	26865	831.5	24.65	25.50	1.216	-	-	0.01	0.058	0.071
	LTE Band 26	15M	QPSK	1	37	-	Left Cheek	0mm	Ant 0	DSI 0	26865	831.5	24.65	25.50	1.216	-	-	0.19	0.100	0.122
	LTE Band 26	15M	QPSK	1	37	-	Left Tilted	0mm	Ant 0	DSI 0	26865	831.5	24.65	25.50	1.216	-	-	-0.02	0.049	0.060
	LTE Band 26	15M	QPSK	36	20	-	Right Cheek	0mm	Ant 0	DSI 0	26865	831.5	23.66	24.50	1.213	-	-	0.13	0.083	0.101
	LTE Band 26	15M	QPSK	36	20	-	Right Tilted	0mm	Ant 0	DSI 0	26865	831.5	23.66	24.50	1.213	-	-	0.04	0.050	0.061
	LTE Band 26	15M	QPSK	36	20	-	Left Cheek	0mm	Ant 0	DSI 0	26865	831.5	23.66	24.50	1.213	-	-	-0.16	0.086	0.104
	LTE Band 26	15M	QPSK	36	20	-	Left Tilted	0mm	Ant 0	DSI 0	26865	831.5	23.66	24.50	1.213	-	-	-	n/a	n/a
	LTE Band 26	15M	QPSK	1	37	-	Right Cheek	0mm	Ant 1	DSI 0	26865	831.5	23.79	24.50	1.178	-	-	0.04	0.461	0.543
	LTE Band 26	15M	QPSK	1	37	-	Right Tilted	0mm	Ant 1	DSI 0	26865	831.5	23.79	24.50	1.178	-	-	0.06	0.077	0.091
05	LTE Band 26	15M	QPSK	1	37	-	Left Cheek	0mm	Ant 1	DSI 0	26865	831.5	23.79	24.50	1.178	-	-	0.01	0.866	1.020
	LTE Band 26	15M	QPSK	1	37	-	Left Tilted	0mm	Ant 1	DSI 0	26865	831.5	23.79	24.50	1.178	-	-	-0.11	0.109	0.128
	LTE Band 26	15M	QPSK	36	20	-	Right Cheek	0mm	Ant 1	DSI 0	26865	831.5	23.77	24.50	1.183	-	-	-0.06	0.397	0.470
	LTE Band 26	15M	QPSK	36	20	-	Right Tilted	0mm	Ant 1	DSI 0	26865	831.5	23.77	24.50	1.183	-	-	0.08	0.067	0.079
	LTE Band 26	15M	QPSK	36	20	-	Left Cheek	0mm	Ant 1	DSI 0	26865	831.5	23.77	24.50	1.183	-	-	0.15	0.835	0.988
	LTE Band 26	15M	QPSK	36	20	-	Left Tilted	0mm	Ant 1	DSI 0	26865	831.5	23.77	24.50	1.183	-	-	0.18	0.095	0.112
	LTE Band 26	15M	QPSK	75	0	-	Left Cheek	0mm	Ant 1	DSI 0	26865	831.5	23.65	24.50	1.216	-	-	0.11	0.819	0.996
	FR1 n5	20M	QPSK	1	53	DFT-15	Right Cheek	0mm	Ant 0	DSI 0	167300	836.5	24.83	25.50	1.167	-	-	0.12	0.186	0.217
	FR1 n5	20M	QPSK	1	53	DFT-15	Right Tilted	0mm	Ant 0	DSI 0	167300	836.5	24.83	25.50	1.167	-	-	-0.13	0.134	0.156
	FR1 n5	20M	QPSK	1	53	DFT-15	Left Cheek	0mm	Ant 0	DSI 0	167300	836.5	24.83	25.50	1.167	-	-	0.15	0.141	0.165
	FR1 n5	20M	QPSK	1	53	DFT-15	Left Tilted	0mm	Ant 0	DSI 0	167300	836.5	24.83	25.50	1.167	-	-	0.1	0.086	0.100
	FR1 n5	20M	QPSK	50	28	DFT-15	Right Cheek	0mm	Ant 0	DSI 0	167300	836.5	24.82	25.50	1.169	-	-	0.1	0.197	0.230
	FR1 n5	20M	QPSK	50	28	DFT-15	Right Tilted	0mm	Ant 0	DSI 0	167300	836.5	24.82	25.50	1.169	-	-	-0.1	0.143	0.167
	FR1 n5	20M	QPSK	50	28	DFT-15	Left Cheek	0mm	Ant 0	DSI 0	167300	836.5	24.82	25.50	1.169	-	-	0.12	0.150	0.175
	FR1 n5	20M	QPSK	50	28	DFT-15	Left Tilted	0mm	Ant 0	DSI 0	167300	836.5	24.82	25.50	1.169	-	-	0.16	0.094	0.110
	FR1 n5	20M	QPSK	1	53	DFT-15	Right Cheek	0mm	Ant 1	DSI 0	167300	836.5	23.35	24.00	1.161	-	-	-0.07	0.461	0.535
	FR1 n5	20M	QPSK	1	53	DFT-15	Right Tilted	0mm	Ant 1	DSI 0	167300	836.5	23.35	24.00	1.161	-	-	0.08	0.083	0.096
	FR1 n5	20M	QPSK	1	53	DFT-15	Left Cheek	0mm	Ant 1	DSI 0	167300	836.5	23.35	24.00	1.161	-	-	-0.04	0.907	1.053
	FR1 n5	20M	QPSK	1	53	DFT-15	Left Tilted	0mm	Ant 1	DSI 0	167300	836.5	23.35	24.00	1.161	-	-	-0.17	0.102	0.118
	FR1 n5	20M	QPSK	50	28	DFT-15	Right Cheek	0mm	Ant 1	DSI 0	167300	836.5	23.33	24.00	1.167	-	-	-0.19	0.514	0.600
	FR1 n5	20M	QPSK	50	28	DFT-15	Right Tilted	0mm	Ant 1	DSI 0	167300	836.5	23.33	24.00	1.167	-	-	-0.18	0.097	0.113
06	FR1 n5	20M	QPSK	50	28	DFT-15	Left Cheek	0mm	Ant 1	DSI 0	167300	836.5	23.33	24.00	1.167	-	-	0.16	0.937	1.093
	FR1 n5	20M	QPSK	50	28	DFT-15	Left Tilted	0mm	Ant 1	DSI 0	167300	836.5	23.33	24.00	1.167	-	-	0.04	0.114	0.133
	FR1 n5	20M	QPSK	100	0	DFT-15	Left Cheek	0mm	Ant 1	DSI 0	167300	836.5	23.28	24.00	1.180	-	-	0.18	0.924	1.091
1750MHz																				
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 3	DSI 0	1413	1732.6	17.83	18.50	1.167	-	-	0.15	0.794	0.926
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 3	DSI 0	1413	1732.6	17.83	18.50	1.167	-	-	-0.19	0.700	0.817
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 3	DSI 0	1413	1732.6	17.83	18.50	1.167	-	-	0.09	0.466	0.544
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 3	DSI 0	1413	1732.6	17.83	18.50	1.167	-	-	-0.07	0.516	0.602
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 3	DSI 0	1312	1712.4	17.81	18.50	1.172	-	-	-0.03	0.789	0.925
07	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 3	DSI 0	1513	1752.6	17.82	18.50	1.169	-	-	0.05	0.863	1.009
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 3	DSI 0	1312	1712.4	17.81	18.50	1.172	-	-	-0.03	0.679	0.796
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 3	DSI 0	1513	1752.6	17.82	18.50	1.169	-	-	0.05	0.718	0.840
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 4	DSI 0	1413	1732.6	23.44	23.70	1.062	-	-	0.06	0.159	0.169
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 0	1413	1732.6	23.44	23.70	1.062	-	-	0.06	0.091	0.097
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 4	DSI 0	1413	1732.6	23.44	23.70	1.062	-	-	0.05	0.118	0.125
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 4	DSI 0	1413	1732.6	23.44	23.70	1.062	-	-	-0.01	0.086	0.091
08	LTE Band 4	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 5	DSI 0	20175	1732.5	22.46	23.70	1.330	-	-	0.09	0.623	0.829
	LTE Band 4	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 5	DSI 0	20175	1732.5	22.46	23.70	1.330	-	-	0.08	0.178	0.237
	LTE Band 4	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 5	DSI 0	20175	1732.5	22.46	23.70	1.330	-	-	0.01	0.148	0.197
	LTE Band 4	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 5	DSI 0	20175	1732.5	22.46	23.70	1.330	-	-	0.09	0.069	0.092
	LTE Band 4	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 5	DSI 0	20175	1732.5	22.11	23.20	1.285	-	-	-0.15	0.579	0.744



FCC SAR Test Report

Report No. : FA380206

	LTE Band 4	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 5	DSI 0	20175	1732.5	22.11	23.20	1.285	-	-	0.13	0.168	0.216
	LTE Band 4	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 5	DSI 0	20175	1732.5	22.11	23.20	1.285	-	-	0.06	0.138	0.177
	LTE Band 4	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 5	DSI 0	20175	1732.5	22.11	23.20	1.285	-	-	0.04	0.066	0.085
	LTE Band 4	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 5	DSI 0	20175	1732.5	22.03	23.20	1.309	-	-	0.05	0.556	0.728
	LTE Band 66	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 2	DSI 0	132322	1745	20.43	21.50	1.279	-	-	0.17	0.339	0.434
	LTE Band 66	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 2	DSI 0	132322	1745	20.43	21.50	1.279	-	-	-0.04	0.076	0.097
	LTE Band 66	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 2	DSI 0	132322	1745	20.43	21.50	1.279	-	-	-0.14	0.419	0.536
	LTE Band 66	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 2	DSI 0	132322	1745	20.43	21.50	1.279	-	-	-0.11	0.094	0.120
	LTE Band 66	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 2	DSI 0	132322	1745	19.41	20.50	1.285	-	-	-0.16	0.270	0.347
	LTE Band 66	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 2	DSI 0	132322	1745	19.41	20.50	1.285	-	-	-0.13	0.061	0.078
	LTE Band 66	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 2	DSI 0	132322	1745	19.41	20.50	1.285	-	-	0.12	0.332	0.427
	LTE Band 66	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 2	DSI 0	132322	1745	19.41	20.50	1.285	-	-	-0.09	0.075	0.096
	LTE Band 66	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	132322	1745	17.45	18.50	1.274	-	-	0.14	0.737	0.939
	LTE Band 66	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	DSI 0	132322	1745	17.45	18.50	1.274	-	-	-0.11	0.622	0.792
	LTE Band 66	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 3	DSI 0	132322	1745	17.45	18.50	1.274	-	-	0.1	0.399	0.508
	LTE Band 66	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 3	DSI 0	132322	1745	17.45	18.50	1.274	-	-	0.09	0.428	0.545
	LTE Band 66	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	132072	1720	17.24	18.50	1.337	-	-	-0.08	0.726	0.970
	LTE Band 66	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	132572	1770	17.33	18.50	1.309	-	-	-0.12	0.752	0.985
	LTE Band 66	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	132322	1745	17.42	18.50	1.282	-	-	-0.11	0.700	0.898
	LTE Band 66	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 3	DSI 0	132322	1745	17.42	18.50	1.282	-	-	0.16	0.611	0.784
	LTE Band 66	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 3	DSI 0	132322	1745	17.42	18.50	1.282	-	-	-0.17	0.395	0.507
	LTE Band 66	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 3	DSI 0	132322	1745	17.42	18.50	1.282	-	-	-0.17	0.420	0.539
	LTE Band 66	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	132072	1720	17.41	18.50	1.285	-	-	-0.11	0.711	0.914
	LTE Band 66	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	132572	1770	17.38	18.50	1.294	-	-	0.13	0.727	0.941
	LTE Band 66	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	DSI 0	132322	1745	17.39	18.50	1.291	-	-	-0.14	0.680	0.878
	LTE Band 66	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 4	DSI 0	132322	1745	23.50	24.20	1.175	-	-	0.06	0.174	0.204
	LTE Band 66	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 4	DSI 0	132322	1745	23.50	24.20	1.175	-	-	-0.04	0.099	0.116
	LTE Band 66	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 4	DSI 0	132322	1745	23.50	24.20	1.175	-	-	0.03	0.139	0.163
	LTE Band 66	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 4	DSI 0	132322	1745	23.50	24.20	1.175	-	-	-0.16	0.096	0.113
	LTE Band 66	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 4	DSI 0	132322	1745	22.51	23.20	1.172	-	-	-0.15	0.139	0.163
	LTE Band 66	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 4	DSI 0	132322	1745	22.51	23.20	1.172	-	-	-0.08	0.082	0.096
	LTE Band 66	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 4	DSI 0	132322	1745	22.51	23.20	1.172	-	-	-0.19	0.116	0.136
	LTE Band 66	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 4	DSI 0	132322	1745	22.51	23.20	1.172	-	-	-0.11	0.080	0.094
	LTE Band 66	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 5	DSI 0	132322	1745	21.39	22.70	1.352	-	-	-0.07	0.688	0.930
	LTE Band 66	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 5	DSI 0	132322	1745	21.39	22.70	1.352	-	-	0.16	0.146	0.197
	LTE Band 66	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 5	DSI 0	132322	1745	21.39	22.70	1.352	-	-	-0.08	0.128	0.173
	LTE Band 66	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 5	DSI 0	132322	1745	21.39	22.70	1.352	-	-	0.02	0.056	0.076
	LTE Band 66	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 5	DSI 0	132072	1720	21.29	22.70	1.384	-	-	-0.17	0.649	0.898
	LTE Band 66	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 5	DSI 0	132572	1770	21.32	22.70	1.374	-	-	-0.16	0.694	0.954
	LTE Band 66	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 5	DSI 0	132322	1745	21.34	22.70	1.368	-	-	-0.09	0.695	0.951
	LTE Band 66	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 5	DSI 0	132322	1745	21.34	22.70	1.368	-	-	-0.16	0.160	0.219
	LTE Band 66	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 5	DSI 0	132322	1745	21.34	22.70	1.368	-	-	-0.17	0.143	0.196
	LTE Band 66	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 5	DSI 0	132322	1745	21.34	22.70	1.368	-	-	-0.01	0.062	0.085
	LTE Band 66	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 5	DSI 0	132072	1720	21.32	22.70	1.374	-	-	0.03	0.719	0.988
09	LTE Band 66	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 5	DSI 0	132572	1770	21.32	22.70	1.374	-	-	0.01	0.784	1.077
	LTE Band 66	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 5	DSI 0	132322	1745	21.28	22.70	1.387	-	-	-0.05	0.662	0.918
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Cheek	0mm	Ant 2	DSI 0	349000	1745	21.22	22.00	1.197	-	-	-0.12	0.327	0.391
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Tilted	0mm	Ant 2	DSI 0	349000	1745	21.22	22.00	1.197	-	-	-0.18	0.064	0.077
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Cheek	0mm	Ant 2	DSI 0	349000	1745	21.22	22.00	1.197	-	-	0.03	0.430	0.515
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Tilted	0mm	Ant 2	DSI 0	349000	1745	21.22	22.00	1.197	-	-	-0.1	0.105	0.126
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 2	DSI 0	349000	1745	21.12	22.00	1.225	-	-	-0.05	0.324	0.397
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 2	DSI 0	349000	1745	21.12	22.00	1.225	-	-	0.06	0.072	0.088
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 2	DSI 0	349000	1745	21.12	22.00	1.225	-	-	0.05	0.448	0.549
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 2	DSI 0	349000	1745	21.12	22.00	1.225	-	-	0.01	0.119	0.146
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Cheek	0mm	Ant 3	DSI 0	349000	1745	17.70	18.50	1.202	-	-	0.1	0.772	0.928
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Tilted	0mm	Ant 3	DSI 0	349000	1745	17.70	18.50	1.202	-	-	0.09	0.684	0.822



FCC SAR Test Report

Report No. : FA380206

	FR1 n66	40M	QPSK	1	108	DFT-15	Left Cheek	0mm	Ant 3	DSI 0	349000	1745	17.70	18.50	1.202	-	-	0.05	0.471	0.566
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Tilted	0mm	Ant 3	DSI 0	349000	1745	17.70	18.50	1.202	-	-	-0.12	0.511	0.614
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 3	DSI 0	349000	1745	17.68	18.50	1.208	-	-	0.02	0.757	0.914
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 3	DSI 0	349000	1745	17.68	18.50	1.208	-	-	0.03	0.678	0.819
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 3	DSI 0	349000	1745	17.68	18.50	1.208	-	-	0.04	0.442	0.534
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 3	DSI 0	349000	1745	17.68	18.50	1.208	-	-	-0.06	0.505	0.610
	FR1 n66	40M	QPSK	216	0	DFT-15	Right Cheek	0mm	Ant 3	DSI 0	349000	1745	17.64	18.50	1.219	-	-	-0.17	0.732	0.892
	FR1 n66	40M	QPSK	216	0	DFT-15	Right Tilted	0mm	Ant 3	DSI 0	349000	1745	17.64	18.50	1.219	-	-	0.02	0.657	0.801
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Cheek	0mm	Ant 4	DSI 0	349000	1745	23.81	24.20	1.094	-	-	0.03	0.200	0.219
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Tilted	0mm	Ant 4	DSI 0	349000	1745	23.81	24.20	1.094	-	-	0.02	0.091	0.100
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Cheek	0mm	Ant 4	DSI 0	349000	1745	23.81	24.20	1.094	-	-	0.09	0.130	0.142
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Tilted	0mm	Ant 4	DSI 0	349000	1745	23.81	24.20	1.094	-	-	0.1	0.066	0.072
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 4	DSI 0	349000	1745	23.76	24.20	1.107	-	-	-0.08	0.208	0.230
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 4	DSI 0	349000	1745	23.76	24.20	1.107	-	-	0.13	0.105	0.116
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 4	DSI 0	349000	1745	23.76	24.20	1.107	-	-	0.15	0.134	0.148
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 4	DSI 0	349000	1745	23.76	24.20	1.107	-	-	0.12	0.068	0.075
10	FR1 n66	40M	QPSK	1	108	DFT-15	Right Cheek	0mm	Ant 5	DSI 0	349000	1745	22.21	23.20	1.256	-	-	0.02	0.853	1.071
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Tilted	0mm	Ant 5	DSI 0	349000	1745	22.21	23.20	1.256	-	-	-0.17	0.242	0.304
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Cheek	0mm	Ant 5	DSI 0	349000	1745	22.21	23.20	1.256	-	-	-0.16	0.226	0.284
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Tilted	0mm	Ant 5	DSI 0	349000	1745	22.21	23.20	1.256	-	-	0.1	0.098	0.123
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 5	DSI 0	349000	1745	22.16	23.20	1.271	-	-	0.03	0.806	1.024
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 5	DSI 0	349000	1745	22.16	23.20	1.271	-	-	-0.19	0.226	0.287
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 5	DSI 0	349000	1745	22.16	23.20	1.271	-	-	-0.16	0.211	0.268
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 5	DSI 0	349000	1745	22.16	23.20	1.271	-	-	0.07	0.085	0.108
	FR1 n66	40M	QPSK	216	0	DFT-15	Right Cheek	0mm	Ant 5	DSI 0	349000	1745	21.85	23.20	1.365	-	-	0.01	0.757	1.033
1900MHz																				
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Right Cheek	0mm	Ant 3	DSI 0	661	1880	20.61	21.50	1.227	-	-	0.06	0.764	0.938
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Right Tilted	0mm	Ant 3	DSI 0	661	1880	20.61	21.50	1.227	-	-	0.13	0.624	0.766
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Left Cheek	0mm	Ant 3	DSI 0	661	1880	20.61	21.50	1.227	-	-	0.19	0.355	0.436
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Left Tilted	0mm	Ant 3	DSI 0	661	1880	20.61	21.50	1.227	-	-	-0.18	0.405	0.497
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Right Cheek	0mm	Ant 3	DSI 0	512	1850.2	20.57	21.50	1.239	-	-	-0.19	0.758	0.939
11	GSM1900	-	-	-	-	GPRS(4Tx slots)	Right Cheek	0mm	Ant 3	DSI 0	810	1909.8	20.59	21.50	1.233	-	-	-0.13	0.844	1.041
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Right Cheek	0mm	Ant 4	DSI 0	661	1880	25.55	25.70	1.035	-	-	0.1	0.093	0.096
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Right Tilted	0mm	Ant 4	DSI 0	661	1880	25.55	25.70	1.035	-	-	0.07	0.046	0.048
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Left Cheek	0mm	Ant 4	DSI 0	661	1880	25.55	25.70	1.035	-	-	-0.17	0.099	0.102
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Left Tilted	0mm	Ant 4	DSI 0	661	1880	25.55	25.70	1.035	-	-	0.06	0.057	0.059
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 3	DSI 0	9400	1880	17.57	18.00	1.104	-	-	0.06	0.746	0.824
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 3	DSI 0	9400	1880	17.57	18.00	1.104	-	-	-0.05	0.675	0.745
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 3	DSI 0	9400	1880	17.57	18.00	1.104	-	-	0.01	0.374	0.413
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 3	DSI 0	9400	1880	17.57	18.00	1.104	-	-	0.14	0.425	0.469
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 3	DSI 0	9262	1852.4	17.51	18.00	1.119	-	-	0.07	0.720	0.806
12	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 3	DSI 0	9538	1907.6	17.44	18.00	1.138	-	-	-0.09	0.775	0.882
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 4	DSI 0	9400	1880	23.49	23.70	1.050	-	-	0.13	0.139	0.146
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	DSI 0	9400	1880	23.49	23.70	1.050	-	-	-0.03	0.092	0.097
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 4	DSI 0	9400	1880	23.49	23.70	1.050	-	-	-0.1	0.148	0.155
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 4	DSI 0	9400	1880	23.49	23.70	1.050	-	-	-0.03	0.096	0.101
	LTE Band 2	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	18900	1880	16.85	18.00	1.303	-	-	-0.14	0.620	0.808
	LTE Band 2	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	DSI 0	18900	1880	16.85	18.00	1.303	-	-	-0.19	0.514	0.670
	LTE Band 2	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 3	DSI 0	18900	1880	16.85	18.00	1.303	-	-	0.12	0.264	0.344
	LTE Band 2	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 3	DSI 0	18900	1880	16.85	18.00	1.303	-	-	-0.1	0.288	0.375
	LTE Band 2	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	18700	1860	16.77	18.00	1.327	-	-	-0.03	0.578	0.767
13	LTE Band 2	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	19100	1900	16.75	18.00	1.334	-	-	0.02	0.667	0.889
	LTE Band 2	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	18900	1880	16.83	18.00	1.309	-	-	-0.12	0.610	0.799
	LTE Band 2	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 3	DSI 0	18900	1880	16.83	18.00	1.309	-	-	0.05	0.462	0.605
	LTE Band 2	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 3	DSI 0	18900	1880	16.83	18.00	1.309	-	-	0.11	0.257	0.336
	LTE Band 2	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 3	DSI 0	18900	1880	16.83	18.00	1.309	-	-	-0.03	0.284	0.372



FCC SAR Test Report

Report No. : FA380206

	LTE Band 2	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	DSI 0	18900	1880	16.81	18.00	1.315	-	-	0.18	0.600	0.789
	LTE Band 2	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 4	DSI 0	18900	1880	23.23	24.20	1.250	-	-	-0.09	0.136	0.170
	LTE Band 2	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 4	DSI 0	18900	1880	23.23	24.20	1.250	-	-	-0.18	0.086	0.108
	LTE Band 2	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 4	DSI 0	18900	1880	23.23	24.20	1.250	-	-	-0.08	0.149	0.186
	LTE Band 2	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 4	DSI 0	18900	1880	23.23	24.20	1.250	-	-	-0.04	0.089	0.111
	LTE Band 2	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 4	DSI 0	18900	1880	22.25	23.20	1.245	-	-	0.15	0.105	0.131
	LTE Band 2	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 4	DSI 0	18900	1880	22.25	23.20	1.245	-	-	0.08	0.072	0.090
	LTE Band 2	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 4	DSI 0	18900	1880	22.25	23.20	1.245	-	-	-0.08	0.115	0.143
	LTE Band 2	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 4	DSI 0	18900	1880	22.25	23.20	1.245	-	-	-0.14	0.070	0.087
2600MHz																				
	LTE Band 7	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 2	DSI 0	21100	2535	20.77	21.50	1.183	-	-	-0.17	0.332	0.393
	LTE Band 7C	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 2	DSI 0	21100+21298	2535+2554.8	20.58	21.50	1.236	-	-	0.05	0.101	0.125
	LTE Band 7	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 2	DSI 0	21100	2535	20.77	21.50	1.183	-	-	0.14	0.070	0.083
	LTE Band 7	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 2	DSI 0	21100	2535	20.77	21.50	1.183	-	-	0.01	0.274	0.324
	LTE Band 7	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 2	DSI 0	21100	2535	20.77	21.50	1.183	-	-	0.03	0.095	0.112
	LTE Band 7	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 2	DSI 0	21100	2535	19.69	20.50	1.205	-	-	-0.15	0.270	0.325
	LTE Band 7	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 2	DSI 0	21100	2535	19.69	20.50	1.205	-	-	0.13	0.049	0.059
	LTE Band 7	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 2	DSI 0	21100	2535	19.69	20.50	1.205	-	-	0.17	0.222	0.268
	LTE Band 7	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 2	DSI 0	21100	2535	19.69	20.50	1.205	-	-	0.03	0.076	0.092
	LTE Band 7	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	21100	2535	16.42	17.00	1.143	-	-	0.18	0.673	0.769
	LTE Band 7	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	DSI 0	21100	2535	16.42	17.00	1.143	-	-	0.07	0.572	0.654
	LTE Band 7	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 3	DSI 0	21100	2535	16.42	17.00	1.143	-	-	-0.01	0.323	0.369
	LTE Band 7	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 3	DSI 0	21100	2535	16.42	17.00	1.143	-	-	-0.13	0.344	0.393
14	LTE Band 7	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	21100	2535	16.37	17.00	1.156	-	-	0.12	0.682	0.788
	LTE Band 7C	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	21100+21298	2535+2554.8	16.17	17.00	1.211	-	-	0.01	0.613	0.742
	LTE Band 7	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 3	DSI 0	21100	2535	16.37	17.00	1.156	-	-	-0.14	0.587	0.679
	LTE Band 7	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 3	DSI 0	21100	2535	16.37	17.00	1.156	-	-	-0.06	0.332	0.384
	LTE Band 7	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 3	DSI 0	21100	2535	16.37	17.00	1.156	-	-	0.07	0.352	0.407
	LTE Band 7	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 4	DSI 0	21100	2535	23.58	24.00	1.102	-	-	-0.03	0.180	0.198
	LTE Band 7	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 4	DSI 0	21100	2535	23.58	24.00	1.102	-	-	-0.14	0.118	0.130
	LTE Band 7	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 4	DSI 0	21100	2535	23.58	24.00	1.102	-	-	-0.07	0.250	0.275
	LTE Band 7C	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 4	DSI 0	21100+21298	2535+2554.8	23.13	24.00	1.222	-	-	0.06	0.120	0.147
	LTE Band 7	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 4	DSI 0	21100	2535	23.58	24.00	1.102	-	-	0.07	0.082	0.090
	LTE Band 7	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 4	DSI 0	21100	2535	22.59	23.00	1.099	-	-	-0.09	0.147	0.162
	LTE Band 7	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 4	DSI 0	21100	2535	22.59	23.00	1.099	-	-	-0.03	0.092	0.101
	LTE Band 7	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 4	DSI 0	21100	2535	22.59	23.00	1.099	-	-	0.13	0.208	0.229
	LTE Band 7	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 4	DSI 0	21100	2535	22.59	23.00	1.099	-	-	-0.13	0.068	0.075
	LTE Band 7	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 5	DSI 0	21100	2535	16.37	17.00	1.156	-	-	-0.09	0.547	0.632
	LTE Band 7C	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 5	DSI 0	21100+21298	2535+2554.8	16.10	17.00	1.230	-	-	0.09	0.509	0.626
	LTE Band 7	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 5	DSI 0	21100	2535	16.37	17.00	1.156	-	-	0.08	0.194	0.224
	LTE Band 7	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 5	DSI 0	21100	2535	16.37	17.00	1.156	-	-	0.14	0.134	0.155
	LTE Band 7	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 5	DSI 0	21100	2535	16.37	17.00	1.156	-	-	0.18	0.073	0.084
	LTE Band 7	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 5	DSI 0	21100	2535	16.36	17.00	1.159	-	-	-0.02	0.518	0.600
	LTE Band 7	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 5	DSI 0	21100	2535	16.36	17.00	1.159	-	-	-0.02	0.190	0.220
	LTE Band 7	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 5	DSI 0	21100	2535	16.36	17.00	1.159	-	-	0.07	0.131	0.152
	LTE Band 7	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 5	DSI 0	21100	2535	16.36	17.00	1.159	-	-	-0.18	0.071	0.082
15	LTE Band 38	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	38000	2595	19.98	20.50	1.127	62.9	1.006	0.09	0.869	0.985
	LTE Band 38C	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	37901+38099	2585.1+2604.9	19.42	20.50	1.282	62.9	1.006	0.08	0.634	0.818
	LTE Band 38	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	DSI 0	38000	2595	19.98	20.50	1.127	62.9	1.006	-0.09	0.736	0.835
	LTE Band 38	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 3	DSI 0	38000	2595	19.98	20.50	1.127	62.9	1.006	-0.18	0.380	0.431
	LTE Band 38	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 3	DSI 0	38000	2595	19.98	20.50	1.127	62.9	1.006	0.05	0.409	0.464
	LTE Band 38	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	38000	2595	19.96	20.50	1.132	62.9	1.006	0.01	0.827	0.942
	LTE Band 38	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 3	DSI 0	38000	2595	19.96	20.50	1.132	62.9	1.006	0.04	0.715	0.815
	LTE Band 38	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 3	DSI 0	38000	2595	19.96	20.50	1.132	62.9	1.006	0.14	0.375	0.427
	LTE Band 38	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 3	DSI 0	38000	2595	19.96	20.50	1.132	62.9	1.006	-0.07	0.403	0.459



FCC SAR Test Report

Report No. : FA380206

	LTE Band 38	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	DSI 0	38000	2595	19.87	20.50	1.156	62.9	1.006	-0.11	0.800	0.930
	LTE Band 38	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 3	DSI 0	38000	2595	19.87	20.50	1.156	62.9	1.006	-0.15	0.693	0.806
	LTE Band 41	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 2	DSI 0	40620	2593	20.66	21.50	1.213	62.9	1.006	0.06	0.237	0.289
	LTE Band 38C	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 2	DSI 0	37901+38099	2585.1+2604.9	20.26	21.50	1.330	62.9	1.006	-0.01	0.080	0.107
	LTE Band 41	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 2	DSI 0	40620	2593	20.66	21.50	1.213	62.9	1.006	-0.07	0.045	0.055
	LTE Band 41	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 2	DSI 0	40620	2593	20.66	21.50	1.213	62.9	1.006	0.09	0.176	0.215
	LTE Band 41	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 2	DSI 0	40620	2593	20.66	21.50	1.213	62.9	1.006	-0.03	0.061	0.074
	LTE Band 41	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 2	DSI 0	40620	2593	19.63	20.50	1.222	62.9	1.006	0.16	0.198	0.243
	LTE Band 41	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 2	DSI 0	40620	2593	19.63	20.50	1.222	62.9	1.006	0.06	0.034	0.042
	LTE Band 41	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 2	DSI 0	40620	2593	19.63	20.50	1.222	62.9	1.006	0.17	0.143	0.176
	LTE Band 41	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 2	DSI 0	40620	2593	19.63	20.50	1.222	62.9	1.006	-0.08	0.050	0.061
	LTE Band 41	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	40620	2593	18.99	19.50	1.125	62.9	1.006	-0.13	0.672	0.760
	LTE Band 41	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	DSI 0	40620	2593	18.99	19.50	1.125	62.9	1.006	0.06	0.653	0.739
	LTE Band 41	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 3	DSI 0	40620	2593	18.99	19.50	1.125	62.9	1.006	-0.15	0.367	0.415
	LTE Band 41	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 3	DSI 0	40620	2593	18.99	19.50	1.125	62.9	1.006	-0.14	0.373	0.422
16	LTE Band 41	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	39750	2506	18.70	19.50	1.202	62.9	1.006	-0.05	0.721	0.872
	LTE Band 41	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	40185	2549.5	18.61	19.50	1.227	62.9	1.006	0.17	0.662	0.817
	LTE Band 41	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	41055	2636.5	18.73	19.50	1.194	62.9	1.006	0.05	0.585	0.703
	LTE Band 41	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	41490	2680	18.93	19.50	1.140	62.9	1.006	0.09	0.588	0.674
	LTE Band 41	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	DSI 0	39750	2506	18.70	19.50	1.202	62.9	1.006	-0.06	0.694	0.839
	LTE Band 41	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	DSI 0	40185	2549.5	18.61	19.50	1.227	62.9	1.006	-0.03	0.653	0.806
	LTE Band 41	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	DSI 0	41055	2636.5	18.73	19.50	1.194	62.9	1.006	0.03	0.536	0.644
	LTE Band 41	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	DSI 0	41490	2680	18.93	19.50	1.140	62.9	1.006	0.04	0.507	0.582
	LTE Band 41	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	40620	2593	18.95	19.50	1.135	62.9	1.006	-0.05	0.627	0.716
	LTE Band 41	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 3	DSI 0	40620	2593	18.95	19.50	1.135	62.9	1.006	0.13	0.613	0.700
	LTE Band 41	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 3	DSI 0	40620	2593	18.95	19.50	1.135	62.9	1.006	0.08	0.362	0.413
	LTE Band 41	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 3	DSI 0	40620	2593	18.95	19.50	1.135	62.9	1.006	0.03	0.369	0.421
	LTE Band 41	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	39750	2506	18.67	19.50	1.211	62.9	1.006	0.02	0.707	0.861
	LTE Band 41	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	40185	2549.5	18.63	19.50	1.222	62.9	1.006	-0.07	0.638	0.784
	LTE Band 41	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	41055	2636.5	18.73	19.50	1.194	62.9	1.006	0.1	0.580	0.697
	LTE Band 41	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	41490	2680	18.94	19.50	1.138	62.9	1.006	-0.08	0.560	0.641
	LTE Band 41	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 3	DSI 0	39750	2506	18.67	19.50	1.211	62.9	1.006	-0.01	0.684	0.833
	LTE Band 41	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 3	DSI 0	40185	2549.5	18.63	19.50	1.222	62.9	1.006	0.02	0.603	0.741
	LTE Band 41	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 3	DSI 0	41055	2636.5	18.73	19.50	1.194	62.9	1.006	0.08	0.526	0.632
	LTE Band 41	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 3	DSI 0	41490	2680	18.94	19.50	1.138	62.9	1.006	-0.12	0.502	0.575
	LTE Band 41	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	DSI 0	40620	2593	18.85	19.50	1.161	62.9	1.006	-0.04	0.648	0.757
	LTE Band 41	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 3	DSI 0	40620	2593	18.85	19.50	1.161	62.9	1.006	-0.02	0.618	0.722
	LTE Band 41	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 4	DSI 0	40620	2593	23.68	24.00	1.076	62.9	1.006	-0.01	0.086	0.093
	LTE Band 41	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 4	DSI 0	40620	2593	23.68	24.00	1.076	62.9	1.006	0.11	0.081	0.088
	LTE Band 41	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 4	DSI 0	40620	2593	23.68	24.00	1.076	62.9	1.006	-0.14	0.146	0.158
	LTE Band 38C	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 4	DSI 0	37901+38099	2585.1+2604.9	23.08	24.00	1.236	62.9	1.006	0.05	0.039	0.048
	LTE Band 41	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 4	DSI 0	40620	2593	23.68	24.00	1.076	62.9	1.006	-0.03	0.040	0.043
	LTE Band 41	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 4	DSI 0	40620	2593	22.66	23.00	1.081	62.9	1.006	0.15	0.071	0.077
	LTE Band 41	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 4	DSI 0	40620	2593	22.66	23.00	1.081	62.9	1.006	-0.05	0.065	0.071
	LTE Band 41	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 4	DSI 0	40620	2593	22.66	23.00	1.081	62.9	1.006	-0.08	0.105	0.114
	LTE Band 41	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 4	DSI 0	40620	2593	22.66	23.00	1.081	62.9	1.006	0.01	0.028	0.030
	LTE Band 41	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 5	DSI 0	40620	2593	18.67	19.00	1.079	62.9	1.006	0.04	0.352	0.382
	LTE Band 38C	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 5	DSI 0	37901+38099	2585.1+2604.9	17.89	19.00	1.291	62.9	1.006	0.06	0.340	0.442
	LTE Band 41	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 5	DSI 0	40620	2593	18.67	19.00	1.079	62.9	1.006	0.11	0.148	0.161
	LTE Band 41	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 5	DSI 0	40620	2593	18.67	19.00	1.079	62.9	1.006	0.17	0.103	0.112
	LTE Band 41	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 5	DSI 0	40620	2593	18.67	19.00	1.079	62.9	1.006	-0.02	0.063	0.068
	LTE Band 41	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 5	DSI 0	40620	2593	18.61	19.00	1.094	62.9	1.006	-0.08	0.344	0.379
	LTE Band 41	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 5	DSI 0	40620	2593	18.61	19.00	1.094	62.9	1.006	-0.15	0.145	0.160
	LTE Band 41	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 5	DSI 0	40620	2593	18.61	19.00	1.094	62.9	1.006	-0.05	0.101	0.111
	LTE Band 41	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 5	DSI 0	40620	2593	18.61	19.00	1.094	62.9	1.006	0.15	0.059	0.065



FCC SAR Test Report

Report No. : FA380206

	FR1 n7	50M	QPSK	1	135	DFT-15	Right Cheek	0mm	Ant 2	DSI 0	507000	2535	20.73	21.50	1.194	-	-	-0.14	0.329	0.393
	FR1 n7	50M	QPSK	1	135	DFT-15	Right Tilted	0mm	Ant 2	DSI 0	507000	2535	20.73	21.50	1.194	-	-	-0.07	0.084	0.100
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Cheek	0mm	Ant 2	DSI 0	507000	2535	20.73	21.50	1.194	-	-	0.13	0.324	0.387
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Tilted	0mm	Ant 2	DSI 0	507000	2535	20.73	21.50	1.194	-	-	-0.06	0.121	0.144
	FR1 n7	50M	QPSK	135	68	DFT-15	Right Cheek	0mm	Ant 2	DSI 0	507000	2535	20.71	21.50	1.199	-	-	-0.19	0.314	0.377
	FR1 n7	50M	QPSK	135	68	DFT-15	Right Tilted	0mm	Ant 2	DSI 0	507000	2535	20.71	21.50	1.199	-	-	-0.16	0.079	0.095
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Cheek	0mm	Ant 2	DSI 0	507000	2535	20.71	21.50	1.199	-	-	-0.06	0.305	0.366
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Tilted	0mm	Ant 2	DSI 0	507000	2535	20.71	21.50	1.199	-	-	0.01	0.108	0.130
	FR1 n7	50M	QPSK	1	135	DFT-15	Right Cheek	0mm	Ant 3	DSI 0	507000	2535	16.69	17.50	1.205	-	-	-0.14	0.811	0.977
	FR1 n7	50M	QPSK	1	135	DFT-15	Right Tilted	0mm	Ant 3	DSI 0	507000	2535	16.69	17.50	1.205	-	-	0.14	0.674	0.812
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Cheek	0mm	Ant 3	DSI 0	507000	2535	16.69	17.50	1.205	-	-	0.14	0.345	0.416
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Tilted	0mm	Ant 3	DSI 0	507000	2535	16.69	17.50	1.205	-	-	0.09	0.393	0.474
17	FR1 n7	50M	QPSK	135	68	DFT-15	Right Cheek	0mm	Ant 3	DSI 0	507000	2535	16.64	17.50	1.219	-	-	-0.11	0.844	1.029
	FR1 n7	50M	QPSK	135	68	DFT-15	Right Tilted	0mm	Ant 3	DSI 0	507000	2535	16.64	17.50	1.219	-	-	0.01	0.688	0.839
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Cheek	0mm	Ant 3	DSI 0	507000	2535	16.64	17.50	1.219	-	-	0.11	0.350	0.427
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Tilted	0mm	Ant 3	DSI 0	507000	2535	16.64	17.50	1.219	-	-	-0.18	0.397	0.484
	FR1 n7	50M	QPSK	270	0	DFT-15	Right Cheek	0mm	Ant 3	DSI 0	507000	2535	16.62	17.50	1.225	-	-	0.11	0.774	0.948
	FR1 n7	50M	QPSK	270	0	DFT-15	Right Tilted	0mm	Ant 3	DSI 0	507000	2535	16.62	17.50	1.225	-	-	0.1	0.661	0.809
	FR1 n7	50M	QPSK	1	135	DFT-15	Right Cheek	0mm	Ant 4	DSI 0	507000	2535	23.45	24.00	1.135	-	-	0.05	0.118	0.134
	FR1 n7	50M	QPSK	1	135	DFT-15	Right Tilted	0mm	Ant 4	DSI 0	507000	2535	23.45	24.00	1.135	-	-	-0.09	0.115	0.131
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Cheek	0mm	Ant 4	DSI 0	507000	2535	23.45	24.00	1.135	-	-	-0.13	0.275	0.312
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Tilted	0mm	Ant 4	DSI 0	507000	2535	23.45	24.00	1.135	-	-	-0.18	0.077	0.087
	FR1 n7	50M	QPSK	135	68	DFT-15	Right Cheek	0mm	Ant 4	DSI 0	507000	2535	23.43	24.00	1.140	-	-	-0.08	0.116	0.132
	FR1 n7	50M	QPSK	135	68	DFT-15	Right Tilted	0mm	Ant 4	DSI 0	507000	2535	23.43	24.00	1.140	-	-	0.1	0.113	0.129
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Cheek	0mm	Ant 4	DSI 0	507000	2535	23.43	24.00	1.140	-	-	-0.13	0.266	0.303
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Tilted	0mm	Ant 4	DSI 0	507000	2535	23.43	24.00	1.140	-	-	-0.16	0.075	0.086
	FR1 n7	50M	QPSK	1	135	DFT-15	Right Cheek	0mm	Ant 5	DSI 0	507000	2535	17.40	18.00	1.148	-	-	-0.03	0.692	0.795
	FR1 n7	50M	QPSK	1	135	DFT-15	Right Tilted	0mm	Ant 5	DSI 0	507000	2535	17.40	18.00	1.148	-	-	-0.09	0.361	0.414
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Cheek	0mm	Ant 5	DSI 0	507000	2535	17.40	18.00	1.148	-	-	0.12	0.181	0.208
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Tilted	0mm	Ant 5	DSI 0	507000	2535	17.40	18.00	1.148	-	-	-0.08	0.105	0.121
	FR1 n7	50M	QPSK	135	68	DFT-15	Right Cheek	0mm	Ant 5	DSI 0	507000	2535	17.38	18.00	1.153	-	-	-0.12	0.673	0.776
	FR1 n7	50M	QPSK	135	68	DFT-15	Right Tilted	0mm	Ant 5	DSI 0	507000	2535	17.38	18.00	1.153	-	-	-0.04	0.342	0.394
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Cheek	0mm	Ant 5	DSI 0	507000	2535	17.38	18.00	1.153	-	-	-0.04	0.167	0.193
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Tilted	0mm	Ant 5	DSI 0	507000	2535	17.38	18.00	1.153	-	-	-0.01	0.096	0.111
	FR1 n38	40M	QPSK	1	53	DFT-30	Right Cheek	0mm	Ant 3	DSI 0	519000	2595	17.28	18.00	1.180	-	-	-0.07	0.752	0.888
	FR1 n38	40M	QPSK	1	53	DFT-30	Right Tilted	0mm	Ant 3	DSI 0	519000	2595	17.28	18.00	1.180	-	-	0.16	0.610	0.720
	FR1 n38	40M	QPSK	1	53	DFT-30	Left Cheek	0mm	Ant 3	DSI 0	519000	2595	17.28	18.00	1.180	-	-	-0.17	0.343	0.405
	FR1 n38	40M	QPSK	1	53	DFT-30	Left Tilted	0mm	Ant 3	DSI 0	519000	2595	17.28	18.00	1.180	-	-	0.18	0.381	0.450
	FR1 n38	40M	QPSK	50	28	DFT-30	Right Cheek	0mm	Ant 3	DSI 0	519000	2595	17.25	18.00	1.189	-	-	-0.01	0.767	0.912
	FR1 n38	40M	QPSK	50	28	DFT-30	Right Tilted	0mm	Ant 3	DSI 0	519000	2595	17.25	18.00	1.189	-	-	0.1	0.619	0.736
	FR1 n38	40M	QPSK	50	28	DFT-30	Left Cheek	0mm	Ant 3	DSI 0	519000	2595	17.25	18.00	1.189	-	-	-0.1	0.351	0.417
	FR1 n38	40M	QPSK	50	28	DFT-30	Left Tilted	0mm	Ant 3	DSI 0	519000	2595	17.25	18.00	1.189	-	-	0.15	0.382	0.454
	FR1 n38	40M	QPSK	100	0	DFT-30	Right Cheek	0mm	Ant 3	DSI 0	519000	2595	17.22	18.00	1.197	-	-	0.1	0.713	0.853
	FR1 n38	40M	QPSK	1	53	DFT-30	Right Cheek	0mm	Ant 5	DSI 0	519000	2595	18.89	19.50	1.151	-	-	-0.18	0.790	0.909
	FR1 n38	40M	QPSK	1	53	DFT-30	Right Tilted	0mm	Ant 5	DSI 0	519000	2595	18.89	19.50	1.151	-	-	-0.09	0.257	0.296
	FR1 n38	40M	QPSK	1	53	DFT-30	Left Cheek	0mm	Ant 5	DSI 0	519000	2595	18.89	19.50	1.151	-	-	-0.16	0.209	0.241
	FR1 n38	40M	QPSK	1	53	DFT-30	Left Tilted	0mm	Ant 5	DSI 0	519000	2595	18.89	19.50	1.151	-	-	-0.1	0.114	0.131
18	FR1 n38	40M	QPSK	50	28	DFT-30	Right Cheek	0mm	Ant 5	DSI 0	519000	2595	18.86	19.50	1.159	-	-	0.05	0.804	0.932
	FR1 n38	40M	QPSK	50	28	DFT-30	Right Tilted	0mm	Ant 5	DSI 0	519000	2595	18.86	19.50	1.159	-	-	-0.01	0.265	0.307
	FR1 n38	40M	QPSK	50	28	DFT-30	Left Cheek	0mm	Ant 5	DSI 0	519000	2595	18.86	19.50	1.159	-	-	-0.07	0.217	0.251
	FR1 n38	40M	QPSK	50	28	DFT-30	Left Tilted	0mm	Ant 5	DSI 0	519000	2595	18.86	19.50	1.159	-	-	-0.06	0.123	0.143
	FR1 n38	40M	QPSK	100	0	DFT-30	Right Cheek	0mm	Ant 5	DSI 0	519000	2595	18.83	19.50	1.167	-	-	-0.13	0.777	0.907
	FR1 n41	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 2	DSI 0	518598	2592.99	21.00	21.50	1.122	-	-	-0.01	0.337	0.378
	FR1 n41	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 2	DSI 0	518598	2592.99	21.00	21.50	1.122	-	-	0.09	0.084	0.094
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 2	DSI 0	518598	2592.99	21.00	21.50	1.122	-	-	-0.13	0.315	0.353
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 2	DSI 0	518598	2592.99	21.00	21.50	1.122	-	-	0.13	0.124	0.139



FCC SAR Test Report

Report No. : FA380206

	FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 2	DSI 0	518598	2592.99	20.66	21.50	1.213	-	-	0.19	0.329	0.399
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 2	DSI 0	518598	2592.99	20.66	21.50	1.213	-	-	-0.19	0.080	0.097
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 2	DSI 0	518598	2592.99	20.66	21.50	1.213	-	-	0.05	0.309	0.375
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 2	DSI 0	518598	2592.99	20.66	21.50	1.213	-	-	0.06	0.119	0.144
	FR1 n41	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 3	DSI 0	518598	2592.99	16.83	17.50	1.167	-	-	-0.15	0.615	0.718
	FR1 n41	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 3	DSI 0	518598	2592.99	16.83	17.50	1.167	-	-	0.14	0.594	0.693
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 3	DSI 0	518598	2592.99	16.83	17.50	1.167	-	-	-0.02	0.315	0.368
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 3	DSI 0	518598	2592.99	16.83	17.50	1.167	-	-	0.11	0.344	0.401
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 3	DSI 0	518598	2592.99	16.82	17.50	1.169	-	-	-0.12	0.608	0.711
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 3	DSI 0	518598	2592.99	16.82	17.50	1.169	-	-	-0.18	0.590	0.690
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 3	DSI 0	518598	2592.99	16.82	17.50	1.169	-	-	0.02	0.307	0.359
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 3	DSI 0	518598	2592.99	16.82	17.50	1.169	-	-	-0.01	0.350	0.409
	FR1 n41	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 3	DSI 0	518598	2592.99	16.78	17.50	1.180	-	-	-0.12	0.578	0.682
	FR1 n41	100M	QPSK	270	0	DFT-30	Right Tilted	0mm	Ant 3	DSI 0	518598	2592.99	16.78	17.50	1.180	-	-	0.13	0.574	0.678
	FR1 n41	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 4	DSI 0	518598	2592.99	23.54	24.00	1.112	-	-	-0.16	0.100	0.111
	FR1 n41	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 4	DSI 0	518598	2592.99	23.54	24.00	1.112	-	-	0.14	0.071	0.079
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 4	DSI 0	518598	2592.99	23.54	24.00	1.112	-	-	0.17	0.163	0.181
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 4	DSI 0	518598	2592.99	23.54	24.00	1.112	-	-	0.17	0.050	0.056
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 4	DSI 0	518598	2592.99	23.46	24.00	1.132	-	-	0.1	0.103	0.117
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 4	DSI 0	518598	2592.99	23.46	24.00	1.132	-	-	0.16	0.072	0.082
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 4	DSI 0	518598	2592.99	23.46	24.00	1.132	-	-	0.14	0.161	0.182
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 4	DSI 0	518598	2592.99	23.46	24.00	1.132	-	-	-0.09	0.048	0.054
19	FR1 n41	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 5	DSI 0	518598	2592.99	18.38	19.00	1.153	-	-	0.03	0.740	0.854
	FR1 n41	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 5	DSI 0	518598	2592.99	18.38	19.00	1.153	-	-	-0.09	0.236	0.272
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 5	DSI 0	518598	2592.99	18.38	19.00	1.153	-	-	-0.05	0.126	0.145
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 5	DSI 0	518598	2592.99	18.38	19.00	1.153	-	-	-0.1	0.094	0.108
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 5	DSI 0	518598	2592.99	18.33	19.00	1.167	-	-	0.04	0.728	0.849
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 5	DSI 0	518598	2592.99	18.33	19.00	1.167	-	-	-0.07	0.225	0.263
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 5	DSI 0	518598	2592.99	18.33	19.00	1.167	-	-	-0.09	0.115	0.134
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 5	DSI 0	518598	2592.99	18.33	19.00	1.167	-	-	0.09	0.091	0.106
	FR1 n41	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 5	DSI 0	518598	2592.99	18.27	19.00	1.183	-	-	-0.17	0.716	0.847
3500MHz																				
	FR1 n77 Part27Q	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 1	DSI 0	633332	3499.98	19.81	20.50	1.172	-	-	-0.07	0.794	0.931
	FR1 n77 Part27Q	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 1	DSI 0	633332	3499.98	19.81	20.50	1.172	-	-	0.16	0.138	0.162
20	FR1 n77 Part27Q	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 1	DSI 0	633332	3499.98	19.81	20.50	1.172	-	-	-0.05	0.802	0.940
	FR1 n77 Part27Q	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 1	DSI 0	633332	3499.98	19.81	20.50	1.172	-	-	-0.05	0.095	0.111
	FR1 n77 Part27Q PC2	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 1	DSI 0	633332	3499.98	23.39	23.50	1.026	50	1.000	0.13	0.883	0.906
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 1	DSI 0	633332	3499.98	19.75	20.50	1.189	-	-	-0.16	0.776	0.922
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 1	DSI 0	633332	3499.98	19.75	20.50	1.189	-	-	-0.02	0.135	0.160
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 1	DSI 0	633332	3499.98	19.75	20.50	1.189	-	-	-0.12	0.778	0.925
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 1	DSI 0	633332	3499.98	19.75	20.50	1.189	-	-	0.06	0.088	0.105
	FR1 n77 Part27Q	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 1	DSI 0	633332	3499.98	19.71	20.50	1.199	-	-	0.08	0.771	0.925
	FR1 n77 Part27Q	100M	QPSK	270	0	DFT-30	Left Cheek	0mm	Ant 1	DSI 0	633332	3499.98	19.71	20.50	1.199	-	-	-0.05	0.782	0.938
	FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 1	DSI 0	656000	3840	19.44	20.50	1.276	-	-	-	n/a	n/a
	FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 1	DSI 0	656000	3840	19.44	20.50	1.276	-	-	-	n/a	n/a
	FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 1	DSI 0	656000	3840	19.44	20.50	1.276	-	-	0.03	0.049	0.063
	FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 1	DSI 0	656000	3840	19.44	20.50	1.276	-	-	-	n/a	n/a
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 1	DSI 0	656000	3840	19.33	20.50	1.309	-	-	-	n/a	n/a
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 1	DSI 0	656000	3840	19.33	20.50	1.309	-	-	-	n/a	n/a
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 1	DSI 0	656000	3840	19.33	20.50	1.309	-	-	-0.15	0.045	0.059
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 1	DSI 0	656000	3840	19.33	20.50	1.309	-	-	-	n/a	n/a
	FR1 n77 Part27Q	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 6	DSI 0	633332	3499.98	13.60	14.50	1.230	-	-	0.11	0.612	0.753
	FR1 n77 Part27Q	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 6	DSI 0	633332	3499.98	13.60	14.50	1.230	-	-	-0.09	0.597	0.734
	FR1 n77 Part27Q	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 6	DSI 0	633332	3499.98	13.60	14.50	1.230	-	-	-0.09	0.185	0.228
	FR1 n77 Part27Q	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 6	DSI 0	633332	3499.98	13.60	14.50	1.230	-	-	-0.02	0.196	0.241
	FR1 n77 Part27Q PC2	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 6	DSI 0	633332	3499.98	17.46	17.50	1.009	50	1.000	0.02	0.693	0.699



FCC SAR Test Report

Report No. : FA380206

FR1 n77 Part27Q	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 6	DSI 0	633332	3499.98	13.55	14.50	1.245	-	-	-0.12	0.596	0.742
FR1 n77 Part27Q	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 6	DSI 0	633332	3499.98	13.55	14.50	1.245	-	-	0.11	0.587	0.731
FR1 n77 Part27Q	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 6	DSI 0	633332	3499.98	13.55	14.50	1.245	-	-	-0.15	0.182	0.227
FR1 n77 Part27Q	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 6	DSI 0	633332	3499.98	13.55	14.50	1.245	-	-	-0.19	0.192	0.239
FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 6	DSI 0	656000	3840	13.51	14.50	1.256	-	-	-0.13	0.401	0.504
FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 6	DSI 0	656000	3840	13.51	14.50	1.256	-	-	0.03	0.352	0.442
FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 6	DSI 0	656000	3840	13.51	14.50	1.256	-	-	0.01	0.111	0.139
FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 6	DSI 0	656000	3840	13.51	14.50	1.256	-	-	0.04	0.113	0.142
FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 6	DSI 0	656000	3840	13.48	14.50	1.265	-	-	-0.12	0.392	0.496
FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 6	DSI 0	656000	3840	13.48	14.50	1.265	-	-	-0.12	0.344	0.435
FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 6	DSI 0	656000	3840	13.48	14.50	1.265	-	-	-0.19	0.107	0.135
FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 6	DSI 0	656000	3840	13.48	14.50	1.265	-	-	0.18	0.110	0.139
FR1 n77 Part27O	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 6	DSI 0	656000	3840	13.44	14.50	1.276	-	-	-0.03	0.388	0.495
FR1 n77 Part27O	100M	QPSK	270	0	DFT-30	Right Tilted	0mm	Ant 6	DSI 0	656000	3840	13.44	14.50	1.276	-	-	0.06	0.332	0.424
FR1 n77 Part27Q	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 7	DSI 0	633332	3499.98	13.01	13.80	1.199	-	-	-0.19	0.207	0.248
FR1 n77 Part27Q	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 7	DSI 0	633332	3499.98	13.01	13.80	1.199	-	-	-0.12	0.261	0.313
FR1 n77 Part27Q	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 7	DSI 0	633332	3499.98	13.01	13.80	1.199	-	-	-0.15	0.264	0.317
FR1 n77 Part27Q	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 7	DSI 0	633332	3499.98	13.01	13.80	1.199	-	-	-0.08	0.304	0.365
FR1 n77 Part27Q PC2	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 7	DSI 0	633332	3499.98	16.30	16.80	1.122	50	1.000	0.01	0.325	0.365
FR1 n77 Part27Q	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 7	DSI 0	633332	3499.98	12.92	13.80	1.225	-	-	0.02	0.196	0.240
FR1 n77 Part27Q	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 7	DSI 0	633332	3499.98	12.92	13.80	1.225	-	-	-0.07	0.247	0.302
FR1 n77 Part27Q	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 7	DSI 0	633332	3499.98	12.92	13.80	1.225	-	-	0.19	0.252	0.309
FR1 n77 Part27Q	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 7	DSI 0	633332	3499.98	12.92	13.80	1.225	-	-	0.02	0.288	0.353
FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 7	DSI 0	656000	3840	12.95	13.80	1.216	-	-	0.01	0.197	0.240
FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 7	DSI 0	656000	3840	12.95	13.80	1.216	-	-	0.1	0.254	0.309
FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 7	DSI 0	656000	3840	12.95	13.80	1.216	-	-	-0.01	0.257	0.313
FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 7	DSI 0	656000	3840	12.95	13.80	1.216	-	-	0.01	0.295	0.359
FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 7	DSI 0	656000	3840	12.87	13.80	1.239	-	-	0.14	0.184	0.228
FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 7	DSI 0	656000	3840	12.87	13.80	1.239	-	-	0.05	0.245	0.304
FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 7	DSI 0	656000	3840	12.87	13.80	1.239	-	-	0.04	0.250	0.310
FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 7	DSI 0	656000	3840	12.87	13.80	1.239	-	-	0.05	0.282	0.349
FR1 n77Part27Q	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 8	DSI 0	633332	3499.98	15.35	16.00	1.161	-	-	-0.11	0.121	0.141
FR1 n77Part27Q	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 8	DSI 0	633332	3499.98	15.35	16.00	1.161	-	-	-0.16	0.091	0.106
FR1 n77Part27Q	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 8	DSI 0	633332	3499.98	15.35	16.00	1.161	-	-	0	0.401	0.466
FR1 n77Part27Q	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 8	DSI 0	633332	3499.98	15.35	16.00	1.161	-	-	-0.08	0.185	0.215
FR1 n77 Part27Q PC2	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 8	DSI 0	633332	3499.98	18.82	19.00	1.042	50	1.000	0.07	0.478	0.498
FR1 n77Part27Q	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 8	DSI 0	633332	3499.98	15.30	16.00	1.175	-	-	0.02	0.117	0.137
FR1 n77Part27Q	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 8	DSI 0	633332	3499.98	15.30	16.00	1.175	-	-	0.03	0.087	0.102
FR1 n77Part27Q	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 8	DSI 0	633332	3499.98	15.30	16.00	1.175	-	-	0.16	0.396	0.465
FR1 n77Part27Q	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 8	DSI 0	633332	3499.98	15.30	16.00	1.175	-	-	0.02	0.179	0.210
FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 8	DSI 0	656000	3840	15.25	16.00	1.189	-	-	0.08	0.050	0.059
FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 8	DSI 0	656000	3840	15.25	16.00	1.189	-	-	-0.05	0.043	0.051
FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 8	DSI 0	656000	3840	15.25	16.00	1.189	-	-	-0.05	0.142	0.169
FR1 n77 Part27O	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 8	DSI 0	656000	3840	15.25	16.00	1.189	-	-	0.09	0.056	0.067
FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 8	DSI 0	656000	3840	15.21	16.00	1.199	-	-	-0.11	0.049	0.059
FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 8	DSI 0	656000	3840	15.21	16.00	1.199	-	-	-0.09	0.046	0.055
FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 8	DSI 0	656000	3840	15.21	16.00	1.199	-	-	0.13	0.133	0.160
FR1 n77 Part27O	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 8	DSI 0	656000	3840	15.21	16.00	1.199	-	-	-0.14	0.052	0.062



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																
21	Bluetooth	DH5 1Mbps	Right Cheek	0mm	Ant 9	Standalone	0	2402	15.20	16.00	1.202	76.60	1.305	0.06	0.213	0.334
	Bluetooth	DH5 1Mbps	Right Tilted	0mm	Ant 9	Standalone	0	2402	15.20	16.00	1.202	76.60	1.305	-0.11	0.229	0.359
	Bluetooth	DH5 1Mbps	Left Cheek	0mm	Ant 9	Standalone	0	2402	15.20	16.00	1.202	76.60	1.305	0.05	0.352	0.552
	Bluetooth	DH5 1Mbps	Left Tilted	0mm	Ant 9	Standalone	0	2402	15.20	16.00	1.202	76.60	1.305	0.1	0.347	0.544
	Bluetooth	DH5 1Mbps	Right Cheek	0mm	Ant 9	Simultaneous	0	2402	11.94	12.50	1.138	76.60	1.305	0.07	0.087	0.129
	Bluetooth	DH5 1Mbps	Right Tilted	0mm	Ant 9	Simultaneous	0	2402	11.94	12.50	1.138	76.60	1.305	-0.04	0.099	0.147
	Bluetooth	DH5 1Mbps	Left Cheek	0mm	Ant 9	Simultaneous	0	2402	11.94	12.50	1.138	76.60	1.305	-0.06	0.149	0.221
	Bluetooth	DH5 1Mbps	Left Tilted	0mm	Ant 9	Simultaneous	0	2402	11.94	12.50	1.138	76.60	1.305	0.16	0.146	0.217
22	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 9+8	Standalone	6	2437	18.46	19.00	1.132	99.47	1.005	0.02	0.301	0.342
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 9+8	Standalone	6	2437	18.46	19.00	1.132	99.47	1.005	0.14	0.315	0.358
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 9+8	Standalone	6	2437	18.46	19.00	1.132	99.47	1.005	-0.01	0.960	1.092
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 9+8	Standalone	6	2437	18.46	19.00	1.132	99.47	1.005	-0.11	0.750	0.853
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 9+8	Standalone	11	2462	18.21	19.00	1.199	99.47	1.005	0.16	0.900	1.085
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 9+8	Standalone	11	2462	18.21	19.00	1.199	99.47	1.005	0.13	0.782	0.942
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 9+8	Simultaneous	6	2437	14.36	15.00	1.158	99.47	1.005	-0.09	0.096	0.112
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 9+8	Simultaneous	6	2437	14.36	15.00	1.158	99.47	1.005	0.11	0.101	0.118
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 9+8	Simultaneous	6	2437	14.36	15.00	1.158	99.47	1.005	0.19	0.311	0.362
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 9+8	Simultaneous	6	2437	14.36	15.00	1.158	99.47	1.005	-0.1	0.239	0.278
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 8	Simultaneous	6	2437	11.20	12.00	1.202	99.47	1.005	0.08	0.042	0.051
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 8	Simultaneous	6	2437	11.20	12.00	1.202	99.47	1.005	0.14	0.031	0.037
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 8	Simultaneous	6	2437	11.20	12.00	1.202	99.47	1.005	0.12	0.214	0.259
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 8	Simultaneous	6	2437	11.20	12.00	1.202	99.47	1.005	-0.07	0.086	0.104
5000MHz																
23	WLAN5.3GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 10+11	Standalone	62	5310	17.46	18.50	1.271	95.52	1.047	-0.04	0.313	0.416
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 10+11	Standalone	62	5310	17.46	18.50	1.271	95.52	1.047	0.1	0.364	0.484
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 10+11	Standalone	62	5310	17.46	18.50	1.271	95.52	1.047	-0.07	0.784	1.043
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 10+11	Standalone	62	5310	17.46	18.50	1.271	95.52	1.047	0.04	0.762	1.014
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 10+11	Standalone	54	5270	17.46	18.50	1.271	95.52	1.047	0.16	0.767	1.020
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 10+11	Standalone	54	5270	17.46	18.50	1.271	95.52	1.047	-0.05	0.751	0.999
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 10+11	Simultaneous	58	5290	10.57	11.50	1.238	86.9	1.151	0.09	0.071	0.101
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 10+11	Simultaneous	58	5290	10.57	11.50	1.238	86.9	1.151	-0.08	0.083	0.118
24	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 10+11	Simultaneous	58	5290	10.57	11.50	1.238	86.9	1.151	0.01	0.169	0.241
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 10+11	Simultaneous	58	5290	10.57	11.50	1.238	86.9	1.151	-0.01	0.147	0.209
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 10+11	Standalone	144	5720	13.52	14.50	1.253	96.98	1.031	0.19	0.177	0.229
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 10+11	Standalone	144	5720	13.52	14.50	1.253	96.98	1.031	0.09	0.247	0.319
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 10+11	Standalone	144	5720	13.52	14.50	1.253	96.98	1.031	-0.05	0.373	0.482
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 10+11	Standalone	144	5720	13.52	14.50	1.253	96.98	1.031	0.09	0.375	0.484
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 10+11	Simultaneous	138	5690	9.97	10.50	1.130	86.9	1.151	-0.14	0.070	0.091
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 10+11	Simultaneous	138	5690	9.97	10.50	1.130	86.9	1.151	0.19	0.098	0.127
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 10+11	Simultaneous	138	5690	9.97	10.50	1.130	86.9	1.151	0.06	0.135	0.176
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 10+11	Simultaneous	138	5690	9.97	10.50	1.130	86.9	1.151	0.16	0.157	0.204
	WLAN5.8GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 10+11	Standalone	159	5795	15.02	16.00	1.253	95.52	1.047	0.08	0.214	0.281
	WLAN5.8GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 10+11	Standalone	159	5795	15.02	16.00	1.253	95.52	1.047	0.06	0.272	0.357
	WLAN5.8GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 10+11	Standalone	159	5795	15.02	16.00	1.253	95.52	1.047	0.19	0.458	0.601
	WLAN5.8GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 10+11	Standalone	159	5795	15.02	16.00	1.253	95.52	1.047	-0.19	0.582	0.764
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 10+11	Simultaneous	155	5775	10.92	11.50	1.143	86.9	1.151	0.17	0.076	0.100
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 10+11	Simultaneous	155	5775	10.92	11.50	1.143	86.9	1.151	-0.05	0.097	0.128
25	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 10+11	Simultaneous	155	5775	10.92	11.50	1.143	86.9	1.151	0.16	0.163	0.214
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 10+11	Simultaneous	155	5775	10.92	11.50	1.143	86.9	1.151	-0.16	0.205	0.270



<ENDC/ULCA>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																				
	LTE Band 12 Other PA	10M	QPSK	1	25	-	Right Cheek	0mm	Ant 0	DSI 0	23095	707.5	23.69	24.50	1.205	-	-	-0.12	0.066	0.080
	LTE Band 12 Other PA	10M	QPSK	1	25	-	Right Tilted	0mm	Ant 0	DSI 0	23095	707.5	23.69	24.50	1.205	-	-	0.07	0.046	0.055
	LTE Band 12 Other PA	10M	QPSK	1	25	-	Left Cheek	0mm	Ant 0	DSI 0	23095	707.5	23.69	24.50	1.205	-	-	0.05	0.071	0.086
	LTE Band 12 Other PA	10M	QPSK	1	25	-	Left Tilted	0mm	Ant 0	DSI 0	23095	707.5	23.69	24.50	1.205	-	-	-	n/a	n/a
	LTE Band 12 Other PA	10M	QPSK	25	12	-	Right Cheek	0mm	Ant 0	DSI 0	23095	707.5	22.71	23.50	1.199	-	-	-0.12	0.052	0.062
	LTE Band 12 Other PA	10M	QPSK	25	12	-	Right Tilted	0mm	Ant 0	DSI 0	23095	707.5	22.71	23.50	1.199	-	-	-0.02	0.031	0.037
	LTE Band 12 Other PA	10M	QPSK	25	12	-	Left Cheek	0mm	Ant 0	DSI 0	23095	707.5	22.71	23.50	1.199	-	-	-0.14	0.056	0.067
	LTE Band 12 Other PA	10M	QPSK	25	12	-	Left Tilted	0mm	Ant 0	DSI 0	23095	707.5	22.71	23.50	1.199	-	-	-	n/a	n/a
	LTE Band 12 Other PA	10M	QPSK	1	25	-	Right Cheek	0mm	Ant 1	DSI 0	23095	707.5	23.95	24.50	1.135	-	-	-0.15	0.233	0.264
	LTE Band 12 Other PA	10M	QPSK	1	25	-	Right Tilted	0mm	Ant 1	DSI 0	23095	707.5	23.95	24.50	1.135	-	-	-	n/a	n/a
	LTE Band 12 Other PA	10M	QPSK	1	25	-	Left Cheek	0mm	Ant 1	DSI 0	23095	707.5	23.95	24.50	1.135	-	-	0.16	0.474	0.538
	LTE Band 12 Other PA	10M	QPSK	1	25	-	Left Tilted	0mm	Ant 1	DSI 0	23095	707.5	23.95	24.50	1.135	-	-	-	n/a	n/a
	LTE Band 12 Other PA	10M	QPSK	25	12	-	Right Cheek	0mm	Ant 1	DSI 0	23095	707.5	22.93	23.50	1.140	-	-	0.16	0.177	0.202
	LTE Band 12 Other PA	10M	QPSK	25	12	-	Right Tilted	0mm	Ant 1	DSI 0	23095	707.5	22.93	23.50	1.140	-	-	-	n/a	n/a
	LTE Band 12 Other PA	10M	QPSK	25	12	-	Left Cheek	0mm	Ant 1	DSI 0	23095	707.5	22.93	23.50	1.140	-	-	-0.08	0.367	0.418
	LTE Band 12 Other PA	10M	QPSK	25	12	-	Left Tilted	0mm	Ant 1	DSI 0	23095	707.5	22.93	23.50	1.140	-	-	-	n/a	n/a
835MHz																				
	LTE Band 26 Other PA	15M	QPSK	1	37	-	Right Cheek	0mm	Ant 0	DSI 0	26865	831.5	24.14	25.00	1.219	-	-	0	0.193	0.235
	LTE Band 26 Other PA	15M	QPSK	1	37	-	Right Tilted	0mm	Ant 0	DSI 0	26865	831.5	24.14	25.00	1.219	-	-	-0.09	0.120	0.146
	LTE Band 26 Other PA	15M	QPSK	1	37	-	Left Cheek	0mm	Ant 0	DSI 0	26865	831.5	24.14	25.00	1.219	-	-	-0.11	0.202	0.246
	LTE Band 26 Other PA	15M	QPSK	1	37	-	Left Tilted	0mm	Ant 0	DSI 0	26865	831.5	24.14	25.00	1.219	-	-	0.08	0.091	0.111
	LTE Band 26 Other PA	15M	QPSK	36	20	-	Right Cheek	0mm	Ant 0	DSI 0	26865	831.5	23.08	24.00	1.236	-	-	-0.05	0.149	0.184
	LTE Band 26 Other PA	15M	QPSK	36	20	-	Right Tilted	0mm	Ant 0	DSI 0	26865	831.5	23.08	24.00	1.236	-	-	0	0.093	0.115
	LTE Band 26 Other PA	15M	QPSK	36	20	-	Left Cheek	0mm	Ant 0	DSI 0	26865	831.5	23.08	24.00	1.236	-	-	-0.09	0.155	0.192
	LTE Band 26 Other PA	15M	QPSK	36	20	-	Left Tilted	0mm	Ant 0	DSI 0	26865	831.5	23.08	24.00	1.236	-	-	0.07	0.070	0.087
	LTE Band 26 Other PA	15M	QPSK	1	37	-	Right Cheek	0mm	Ant 1	DSI 0	26865	831.5	21.38	22.00	1.153	-	-	-0.07	0.208	0.240
	LTE Band 26 Other PA	15M	QPSK	1	37	-	Right Tilted	0mm	Ant 1	DSI 0	26865	831.5	21.38	22.00	1.153	-	-	0.07	0.036	0.042
	LTE Band 26 Other PA	15M	QPSK	1	37	-	Left Cheek	0mm	Ant 1	DSI 0	26865	831.5	21.38	22.00	1.153	-	-	0.19	0.464	0.535
	LTE Band 26 Other PA	15M	QPSK	1	37	-	Left Tilted	0mm	Ant 1	DSI 0	26865	831.5	21.38	22.00	1.153	-	-	-0.17	0.051	0.059
	LTE Band 26 Other PA	15M	QPSK	36	20	-	Right Cheek	0mm	Ant 1	DSI 0	26865	831.5	21.37	22.00	1.156	-	-	0.11	0.205	0.237
	LTE Band 26 Other PA	15M	QPSK	36	20	-	Right Tilted	0mm	Ant 1	DSI 0	26865	831.5	21.37	22.00	1.156	-	-	0.19	0.035	0.040
	LTE Band 26 Other PA	15M	QPSK	36	20	-	Left Cheek	0mm	Ant 1	DSI 0	26865	831.5	21.37	22.00	1.156	-	-	-0.08	0.460	0.532
	LTE Band 26 Other PA	15M	QPSK	36	20	-	Left Tilted	0mm	Ant 1	DSI 0	26865	831.5	21.37	22.00	1.156	-	-	-0.17	0.050	0.058
	FR1 n5	20M	QPSK	1	53	DFT-15	Right Cheek	0mm	Ant 0	DSI 0	167300	836.5	24.83	25.50	1.167	-	-	0.12	0.186	0.217
	FR1 n5	20M	QPSK	1	53	DFT-15	Right Tilted	0mm	Ant 0	DSI 0	167300	836.5	24.83	25.50	1.167	-	-	-0.13	0.134	0.156
	FR1 n5	20M	QPSK	1	53	DFT-15	Left Cheek	0mm	Ant 0	DSI 0	167300	836.5	24.83	25.50	1.167	-	-	0.15	0.141	0.165
	FR1 n5	20M	QPSK	1	53	DFT-15	Left Tilted	0mm	Ant 0	DSI 0	167300	836.5	24.83	25.50	1.167	-	-	0.1	0.086	0.100
	FR1 n5	20M	QPSK	50	28	DFT-15	Right Cheek	0mm	Ant 0	DSI 0	167300	836.5	24.82	25.50	1.169	-	-	0.1	0.197	0.230
	FR1 n5	20M	QPSK	50	28	DFT-15	Right Tilted	0mm	Ant 0	DSI 0	167300	836.5	24.82	25.50	1.169	-	-	-0.1	0.143	0.167
	FR1 n5	20M	QPSK	50	28	DFT-15	Left Cheek	0mm	Ant 0	DSI 0	167300	836.5	24.82	25.50	1.169	-	-	0.12	0.150	0.175
	FR1 n5	20M	QPSK	50	28	DFT-15	Left Tilted	0mm	Ant 0	DSI 0	167300	836.5	24.82	25.50	1.169	-	-	0.16	0.094	0.110



FCC SAR Test Report

Report No. : FA380206

FR1 n5	20M	QPSK	1	53	DFT-15	Right Cheek	0mm	Ant 1	DSI 0	167300	836.5	20.46	21.00	1.132	-	-	-0.03	0.231	0.262
FR1 n5	20M	QPSK	1	53	DFT-15	Right Tilted	0mm	Ant 1	DSI 0	167300	836.5	20.46	21.00	1.132	-	-	0.08	0.042	0.048
FR1 n5	20M	QPSK	1	53	DFT-15	Left Cheek	0mm	Ant 1	DSI 0	167300	836.5	20.46	21.00	1.132	-	-	-0.01	0.455	0.515
FR1 n5	20M	QPSK	1	53	DFT-15	Left Tilted	0mm	Ant 1	DSI 0	167300	836.5	20.46	21.00	1.132	-	-	-0.07	0.051	0.058
FR1 n5	20M	QPSK	50	28	DFT-15	Right Cheek	0mm	Ant 1	DSI 0	167300	836.5	20.42	21.00	1.143	-	-	0.09	0.258	0.295
FR1 n5	20M	QPSK	50	28	DFT-15	Right Tilted	0mm	Ant 1	DSI 0	167300	836.5	20.42	21.00	1.143	-	-	0.12	0.049	0.056
FR1 n5	20M	QPSK	50	28	DFT-15	Left Cheek	0mm	Ant 1	DSI 0	167300	836.5	20.42	21.00	1.143	-	-	-0.02	0.470	0.537
FR1 n5	20M	QPSK	50	28	DFT-15	Left Tilted	0mm	Ant 1	DSI 0	167300	836.5	20.42	21.00	1.143	-	-	0.16	0.057	0.065
1750MHz																			
LTE Band 4 Inter CA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	20175	1732.5	16.25	17.00	1.189	-	-	0.14	0.460	0.547
LTE Band 4 Inter CA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	DSI 0	20175	1732.5	16.25	17.00	1.189	-	-	-0.11	0.397	0.472
LTE Band 4 Inter CA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 3	DSI 0	20175	1732.5	16.25	17.00	1.189	-	-	0.1	0.252	0.300
LTE Band 4 Inter CA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 3	DSI 0	20175	1732.5	16.25	17.00	1.189	-	-	0.09	0.270	0.321
LTE Band 4 Inter CA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	20175	1732.5	16.22	17.00	1.197	-	-	-0.11	0.442	0.529
LTE Band 4 Inter CA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 3	DSI 0	20175	1732.5	16.22	17.00	1.197	-	-	0.16	0.386	0.462
LTE Band 4 Inter CA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 3	DSI 0	20175	1732.5	16.22	17.00	1.197	-	-	-0.17	0.249	0.298
LTE Band 4 Inter CA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 3	DSI 0	20175	1732.5	16.22	17.00	1.197	-	-	-0.17	0.265	0.317
LTE Band 4 Inter CA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 4	DSI 0	20175	1732.5	23.82	24.20	1.091	-	-	0.06	0.174	0.190
LTE Band 4 Inter CA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 4	DSI 0	20175	1732.5	23.82	24.20	1.091	-	-	-0.04	0.099	0.108
LTE Band 4 Inter CA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 4	DSI 0	20175	1732.5	23.82	24.20	1.091	-	-	0.03	0.139	0.152
LTE Band 4 Inter CA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 4	DSI 0	20175	1732.5	23.82	24.20	1.091	-	-	-0.16	0.096	0.105
LTE Band 4 Inter CA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 4	DSI 0	20175	1732.5	22.91	23.20	1.069	-	-	-0.15	0.139	0.149
LTE Band 4 Inter CA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 4	DSI 0	20175	1732.5	22.91	23.20	1.069	-	-	-0.08	0.080	0.086
LTE Band 4 Inter CA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 4	DSI 0	20175	1732.5	22.91	23.20	1.069	-	-	-0.19	0.116	0.124
LTE Band 4 Inter CA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 4	DSI 0	20175	1732.5	22.91	23.20	1.069	-	-	-0.11	0.080	0.086
LTE Band 66 Other PA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 2	DSI 0	132322	1745	21.70	22.30	1.148	-	-	-	n/a	n/a
LTE Band 66 Other PA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 2	DSI 0	132322	1745	21.70	22.30	1.148	-	-	-	n/a	n/a
LTE Band 66 Other PA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 2	DSI 0	132322	1745	21.70	22.30	1.148	-	-	-	n/a	n/a
LTE Band 66 Other PA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 2	DSI 0	132322	1745	21.70	22.30	1.148	-	-	-	n/a	n/a
LTE Band 66 Other PA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 2	DSI 0	132322	1745	20.70	21.30	1.148	-	-	-	n/a	n/a
LTE Band 66 Other PA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 2	DSI 0	132322	1745	20.70	21.30	1.148	-	-	-	n/a	n/a
LTE Band 66 Other PA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 2	DSI 0	132322	1745	20.70	21.30	1.148	-	-	-	n/a	n/a
LTE Band 66 Other PA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 2	DSI 0	132322	1745	20.70	21.30	1.148	-	-	-	n/a	n/a
LTE Band 66 Other PA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	132322	1745	15.37	16.80	1.390	-	-	0.15	0.415	0.577
LTE Band 66 Other PA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	DSI 0	132322	1745	15.37	16.80	1.390	-	-	0.15	0.404	0.562
LTE Band 66 Other PA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 3	DSI 0	132322	1745	15.37	16.80	1.390	-	-	0.17	0.244	0.339
LTE Band 66 Other PA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 3	DSI 0	132322	1745	15.37	16.80	1.390	-	-	0.16	0.273	0.379
LTE Band 66 Other PA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	132322	1745	15.22	16.80	1.439	-	-	0.08	0.409	0.588
LTE Band 66 Other PA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 3	DSI 0	132322	1745	15.22	16.80	1.439	-	-	0.1	0.407	0.586
LTE Band 66 Other PA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 3	DSI 0	132322	1745	15.22	16.80	1.439	-	-	0.1	0.246	0.354
LTE Band 66 Other PA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 3	DSI 0	132322	1745	15.22	16.80	1.439	-	-	-0.03	0.277	0.399
LTE Band 66 Other PA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 4	DSI 0	132322	1745	21.50	22.90	1.380	-	-	-0.02	0.120	0.166
LTE Band 66 Other PA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 4	DSI 0	132322	1745	21.50	22.90	1.380	-	-	-0.01	0.074	0.102
LTE Band 66 Other PA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 4	DSI 0	132322	1745	21.50	22.90	1.380	-	-	0.19	0.137	0.189
LTE Band 66 Other PA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 4	DSI 0	132322	1745	21.50	22.90	1.380	-	-	0.1	0.067	0.092



FCC SAR Test Report

Report No. : FA380206

	LTE Band 66 Other PA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 4	DSI 0	132322	1745	20.53	21.90	1.371	-	-	-0.11	0.095	0.130
	LTE Band 66 Other PA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 4	DSI 0	132322	1745	20.53	21.90	1.371	-	-	0.16	0.061	0.084
	LTE Band 66 Other PA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 4	DSI 0	132322	1745	20.53	21.90	1.371	-	-	0.14	0.116	0.159
	LTE Band 66 Other PA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 4	DSI 0	132322	1745	20.53	21.90	1.371	-	-	-0.12	0.053	0.073
	LTE Band 66 Other PA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 5	DSI 0	132322	1745	21.93	23.50	1.435	-	-	0.04	0.045	0.065
	LTE Band 66 Other PA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 5	DSI 0	132322	1745	21.93	23.50	1.435	-	-	-	n/a	n/a
	LTE Band 66 Other PA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 5	DSI 0	132322	1745	21.93	23.50	1.435	-	-	-	n/a	n/a
	LTE Band 66 Other PA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 5	DSI 0	132322	1745	21.93	23.50	1.435	-	-	-	n/a	n/a
	LTE Band 66 Other PA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 5	DSI 0	132322	1745	21.92	23.50	1.439	-	-	-0.14	0.045	0.065
	LTE Band 66 Other PA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 5	DSI 0	132322	1745	21.92	23.50	1.439	-	-	-	n/a	n/a
	LTE Band 66 Other PA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 5	DSI 0	132322	1745	21.92	23.50	1.439	-	-	-	n/a	n/a
	LTE Band 66 Other PA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 5	DSI 0	132322	1745	21.92	23.50	1.439	-	-	-	n/a	n/a
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Cheek	0mm	Ant 2	DSI 0	349000	1745	21.22	22.00	1.197	-	-	-0.12	0.327	0.391
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Tilted	0mm	Ant 2	DSI 0	349000	1745	21.22	22.00	1.197	-	-	-0.18	0.064	0.077
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Cheek	0mm	Ant 2	DSI 0	349000	1745	21.22	22.00	1.197	-	-	0.03	0.430	0.515
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Tilted	0mm	Ant 2	DSI 0	349000	1745	21.22	22.00	1.197	-	-	-0.1	0.105	0.126
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 2	DSI 0	349000	1745	21.12	22.00	1.225	-	-	-0.05	0.324	0.397
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 2	DSI 0	349000	1745	21.12	22.00	1.225	-	-	0.06	0.072	0.088
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 2	DSI 0	349000	1745	21.12	22.00	1.225	-	-	0.05	0.448	0.549
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 2	DSI 0	349000	1745	21.12	22.00	1.225	-	-	0.01	0.119	0.146
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Cheek	0mm	Ant 3	DSI 0	349000	1745	15.68	16.50	1.208	-	-	0.02	0.487	0.588
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Tilted	0mm	Ant 3	DSI 0	349000	1745	15.68	16.50	1.208	-	-	0.1	0.432	0.522
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Cheek	0mm	Ant 3	DSI 0	349000	1745	15.68	16.50	1.208	-	-	-0.1	0.297	0.359
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Tilted	0mm	Ant 3	DSI 0	349000	1745	15.68	16.50	1.208	-	-	-0.19	0.322	0.389
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 3	DSI 0	349000	1745	15.63	16.50	1.222	-	-	0.1	0.446	0.545
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 3	DSI 0	349000	1745	15.63	16.50	1.222	-	-	-0.13	0.428	0.523
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 3	DSI 0	349000	1745	15.63	16.50	1.222	-	-	-0.15	0.279	0.341
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 3	DSI 0	349000	1745	15.63	16.50	1.222	-	-	-0.11	0.319	0.390
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Cheek	0mm	Ant 4	DSI 0	349000	1745	23.81	24.20	1.094	-	-	0.03	0.200	0.219
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Tilted	0mm	Ant 4	DSI 0	349000	1745	23.81	24.20	1.094	-	-	0.02	0.091	0.100
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Cheek	0mm	Ant 4	DSI 0	349000	1745	23.81	24.20	1.094	-	-	0.09	0.130	0.142
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Tilted	0mm	Ant 4	DSI 0	349000	1745	23.81	24.20	1.094	-	-	0.1	0.066	0.072
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 4	DSI 0	349000	1745	23.76	24.20	1.107	-	-	-0.08	0.208	0.230
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 4	DSI 0	349000	1745	23.76	24.20	1.107	-	-	0.13	0.105	0.116
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 4	DSI 0	349000	1745	23.76	24.20	1.107	-	-	0.15	0.134	0.148
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 4	DSI 0	349000	1745	23.76	24.20	1.107	-	-	0.12	0.068	0.075
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Cheek	0mm	Ant 5	DSI 0	349000	1745	19.60	20.70	1.288	-	-	0.16	0.460	0.593
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Tilted	0mm	Ant 5	DSI 0	349000	1745	19.60	20.70	1.288	-	-	0.12	0.136	0.175
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Cheek	0mm	Ant 5	DSI 0	349000	1745	19.60	20.70	1.288	-	-	-0.19	0.127	0.164
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Tilted	0mm	Ant 5	DSI 0	349000	1745	19.60	20.70	1.288	-	-	0.09	0.055	0.071
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 5	DSI 0	349000	1745	19.57	20.70	1.297	-	-	-0.18	0.443	0.575
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 5	DSI 0	349000	1745	19.57	20.70	1.297	-	-	0.03	0.127	0.165
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 5	DSI 0	349000	1745	19.57	20.70	1.297	-	-	0.16	0.119	0.154
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 5	DSI 0	349000	1745	19.57	20.70	1.297	-	-	-0.06	0.048	0.062
1900MHz																				
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 2	DSI 0	18900	1880	22.61	23.00	1.094	-	-	-	n/a	n/a
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 2	DSI 0	18900	1880	22.61	23.00	1.094	-	-	-	n/a	n/a
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 2	DSI 0	18900	1880	22.61	23.00	1.094	-	-	-	n/a	n/a
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 2	DSI 0	18900	1880	22.61	23.00	1.094	-	-	-	n/a	n/a



FCC SAR Test Report

Report No. : FA380206

	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 2	DSI 0	18900	1880	21.52	22.00	1.117	-	-	-	n/a	n/a
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 2	DSI 0	18900	1880	21.52	22.00	1.117	-	-	-	n/a	n/a
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 2	DSI 0	18900	1880	21.52	22.00	1.117	-	-	-	n/a	n/a
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 2	DSI 0	18900	1880	21.52	22.00	1.117	-	-	-	n/a	n/a
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 5	DSI 0	18900	1880	15.97	16.50	1.130	-	-	0.05	0.502	0.567
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 5	DSI 0	18900	1880	15.97	16.50	1.130	-	-	-0.09	0.172	0.194
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 5	DSI 0	18900	1880	15.97	16.50	1.130	-	-	-0.05	0.147	0.166
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 5	DSI 0	18900	1880	15.97	16.50	1.130	-	-	-0.01	0.065	0.073
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 5	DSI 0	18900	1880	15.93	16.50	1.140	-	-	0.12	0.489	0.558
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 5	DSI 0	18900	1880	15.93	16.50	1.140	-	-	0.08	0.168	0.192
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 5	DSI 0	18900	1880	15.93	16.50	1.140	-	-	-0.12	0.143	0.163
	LTE Band 2 ENDC & Inter CA Other PA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 5	DSI 0	18900	1880	15.93	16.50	1.140	-	-	-0.19	0.063	0.072
2600MHz																				
	LTE Band 7 Inter CA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 2	DSI 0	21100	2535	20.77	21.50	1.183	-	-	-0.17	0.332	0.393
	LTE Band 7 Inter CA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 2	DSI 0	21100	2535	20.77	21.50	1.183	-	-	0.14	0.070	0.083
	LTE Band 7 Inter CA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 2	DSI 0	21100	2535	20.77	21.50	1.183	-	-	0.01	0.274	0.324
	LTE Band 7 Inter CA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 2	DSI 0	21100	2535	20.77	21.50	1.183	-	-	0.03	0.095	0.112
	LTE Band 7 Inter CA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 2	DSI 0	21100	2535	19.69	20.50	1.205	-	-	-0.15	0.270	0.325
	LTE Band 7 Inter CA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 2	DSI 0	21100	2535	19.69	20.50	1.205	-	-	0.13	0.049	0.059
	LTE Band 7 Inter CA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 2	DSI 0	21100	2535	19.69	20.50	1.205	-	-	0.17	0.222	0.268
	LTE Band 7 Inter CA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 2	DSI 0	21100	2535	19.69	20.50	1.205	-	-	0.03	0.076	0.092
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 2	DSI 0	21100	2535	21.58	22.30	1.180	-	-	-0.09	0.238	0.281
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 2	DSI 0	21100	2535	21.58	22.30	1.180	-	-	-0.18	0.058	0.068
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 2	DSI 0	21100	2535	21.58	22.30	1.180	-	-	0.05	0.211	0.249
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 2	DSI 0	21100	2535	21.58	22.30	1.180	-	-	-0.13	0.082	0.097
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 2	DSI 0	21100	2535	20.52	21.30	1.197	-	-	-0.12	0.189	0.226
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 2	DSI 0	21100	2535	20.52	21.30	1.197	-	-	-0.02	0.043	0.051
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 2	DSI 0	21100	2535	20.52	21.30	1.197	-	-	0.11	0.165	0.197
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 2	DSI 0	21100	2535	20.52	21.30	1.197	-	-	0.08	0.064	0.077
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	21100	2535	14.58	15.50	1.236	-	-	0.01	0.445	0.550
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	DSI 0	21100	2535	14.58	15.50	1.236	-	-	0.12	0.416	0.514
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 3	DSI 0	21100	2535	14.58	15.50	1.236	-	-	0.12	0.240	0.297
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 3	DSI 0	21100	2535	14.58	15.50	1.236	-	-	-0.08	0.250	0.309
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	21100	2535	14.55	15.50	1.245	-	-	0.02	0.428	0.533
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 3	DSI 0	21100	2535	14.55	15.50	1.245	-	-	0.13	0.404	0.503
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 3	DSI 0	21100	2535	14.55	15.50	1.245	-	-	-0.11	0.229	0.285
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 3	DSI 0	21100	2535	14.55	15.50	1.245	-	-	-0.02	0.241	0.300
	LTE Band 7	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 4	DSI 0	21100	2535	21.61	22.90	1.346	-	-	0.15	0.106	0.143



FCC SAR Test Report

Report No. : FA380206

	Other PA																			
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 4	DSI 0	21100	2535	21.61	22.90	1.346	-	-	0.1	0.093	0.125
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 4	DSI 0	21100	2535	21.61	22.90	1.346	-	-	0.02	0.146	0.196
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 4	DSI 0	21100	2535	21.61	22.90	1.346	-	-	-0.12	0.058	0.078
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 4	DSI 0	21100	2535	20.52	21.90	1.374	-	-	-0.11	0.103	0.142
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 4	DSI 0	21100	2535	20.52	21.90	1.374	-	-	-0.09	0.083	0.114
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 4	DSI 0	21100	2535	20.52	21.90	1.374	-	-	-0.16	0.135	0.185
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 4	DSI 0	21100	2535	20.52	21.90	1.374	-	-	0.06	0.055	0.076
	LTE Band 7 Inter CA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 5	DSI 0	21100	2535	15.87	16.50	1.156	-	-	-0.09	0.489	0.565
	LTE Band 7 Inter CA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 5	DSI 0	21100	2535	15.87	16.50	1.156	-	-	0.08	0.173	0.200
	LTE Band 7 Inter CA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 5	DSI 0	21100	2535	15.87	16.50	1.156	-	-	0.14	0.119	0.138
	LTE Band 7 Inter CA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 5	DSI 0	21100	2535	15.87	16.50	1.156	-	-	0.18	0.065	0.075
	LTE Band 7 Inter CA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 5	DSI 0	21100	2535	15.82	16.50	1.169	-	-	-0.02	0.426	0.498
	LTE Band 7 Inter CA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 5	DSI 0	21100	2535	15.82	16.50	1.169	-	-	-0.02	0.172	0.201
	LTE Band 7 Inter CA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 5	DSI 0	21100	2535	15.82	16.50	1.169	-	-	0.07	0.120	0.140
	LTE Band 7 Inter CA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 5	DSI 0	21100	2535	15.82	16.50	1.169	-	-	-0.18	0.066	0.077
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 5	DSI 0	21100	2535	15.18	16.00	1.208	-	-	0.14	0.465	0.562
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 5	DSI 0	21100	2535	15.18	16.00	1.208	-	-	-0.11	0.191	0.231
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 5	DSI 0	21100	2535	15.18	16.00	1.208	-	-	0.11	0.138	0.167
	LTE Band 7 Other PA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 5	DSI 0	21100	2535	15.18	16.00	1.208	-	-	-0.02	0.078	0.094
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 5	DSI 0	21100	2535	15.11	16.00	1.227	-	-	-0.04	0.464	0.570
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 5	DSI 0	21100	2535	15.11	16.00	1.227	-	-	0.19	0.187	0.230
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 5	DSI 0	21100	2535	15.11	16.00	1.227	-	-	0.15	0.136	0.167
	LTE Band 7 Other PA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 5	DSI 0	21100	2535	15.11	16.00	1.227	-	-	0.14	0.076	0.093
	LTE Band 41 Other PA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 2	DSI 0	40620	2593	21.41	22.30	1.227	62.9	1.006	0.18	0.357	0.441
	LTE Band 41 Other PA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 2	DSI 0	40620	2593	21.41	22.30	1.227	62.9	1.006	-0.17	0.067	0.083
	LTE Band 41 Other PA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 2	DSI 0	40620	2593	21.41	22.30	1.227	62.9	1.006	0.14	0.279	0.345
	LTE Band 41 Other PA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 2	DSI 0	40620	2593	21.41	22.30	1.227	62.9	1.006	-0.17	0.101	0.125
	LTE Band 41 Other PA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 2	DSI 0	40620	2593	20.36	21.30	1.242	62.9	1.006	-0.04	0.369	0.461
	LTE Band 41 Other PA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 2	DSI 0	40620	2593	20.36	21.30	1.242	62.9	1.006	-0.02	0.059	0.074
	LTE Band 41 Other PA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 2	DSI 0	40620	2593	20.36	21.30	1.242	62.9	1.006	0.03	0.281	0.351
	LTE Band 41 Other PA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 2	DSI 0	40620	2593	20.36	21.30	1.242	62.9	1.006	-0.1	0.100	0.125
	LTE Band 41 Other PA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	DSI 0	40620	2593	17.02	18.00	1.253	62.9	1.006	0	0.460	0.580
	LTE Band 41 Other PA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	DSI 0	40620	2593	17.02	18.00	1.253	62.9	1.006	0	0.450	0.567
	LTE Band 41 Other PA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 3	DSI 0	40620	2593	17.02	18.00	1.253	62.9	1.006	0.19	0.258	0.325
	LTE Band 41 Other PA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 3	DSI 0	40620	2593	17.02	18.00	1.253	62.9	1.006	-0.14	0.306	0.386
	LTE Band 41 Other PA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 3	DSI 0	40620	2593	17.00	18.00	1.259	62.9	1.006	-0.16	0.451	0.571
	LTE Band 41 Other PA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 3	DSI 0	40620	2593	17.00	18.00	1.259	62.9	1.006	-0.07	0.445	0.564
	LTE Band 41 Other PA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 3	DSI 0	40620	2593	17.00	18.00	1.259	62.9	1.006	0.02	0.254	0.322
	LTE Band 41 Other PA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 3	DSI 0	40620	2593	17.00	18.00	1.259	62.9	1.006	-0.06	0.298	0.377
	LTE Band 41 Other PA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 4	DSI 0	40620	2593	21.46	22.90	1.393	62.9	1.006	-0.12	0.063	0.088
	LTE Band 41 Other PA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 4	DSI 0	40620	2593	21.46	22.90	1.393	62.9	1.006	-0.03	0.059	0.083
	LTE Band 41 Other PA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 4	DSI 0	40620	2593	21.46	22.90	1.393	62.9	1.006	-0.16	0.108	0.151



FCC SAR Test Report

Report No. : FA380206

LTE Band 41 Other PA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 4	DSI 0	40620	2593	21.46	22.90	1.393	62.9	1.006	-	n/a	n/a
LTE Band 41 Other PA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 4	DSI 0	40620	2593	20.44	21.90	1.400	62.9	1.006	-0.07	0.062	0.087
LTE Band 41 Other PA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 4	DSI 0	40620	2593	20.44	21.90	1.400	62.9	1.006	0.12	0.060	0.084
LTE Band 41 Other PA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 4	DSI 0	40620	2593	20.44	21.90	1.400	62.9	1.006	0.05	0.105	0.148
LTE Band 41 Other PA	20M	QPSK	50	24	-	Left Tilted	0mm	@Si 4	DSI 0	40620	2593	20.44	21.90	1.400	62.9	1.006	-	n/a	n/a
LTE Band 41 Other PA	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 5	DSI 0	40620	2593	17.70	18.50	1.202	62.9	1.006	0.15	0.451	0.545
LTE Band 41 Other PA	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 5	DSI 0	40620	2593	17.70	18.50	1.202	62.9	1.006	-0.08	0.193	0.233
LTE Band 41 Other PA	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 5	DSI 0	40620	2593	17.70	18.50	1.202	62.9	1.006	-0.01	0.141	0.171
LTE Band 41 Other PA	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 5	DSI 0	40620	2593	17.70	18.50	1.202	62.9	1.006	-0.04	0.081	0.098
LTE Band 41 Other PA	20M	QPSK	50	24	-	Right Cheek	0mm	Ant 5	DSI 0	40620	2593	17.69	18.50	1.205	62.9	1.006	-0.02	0.445	0.539
LTE Band 41 Other PA	20M	QPSK	50	24	-	Right Tilted	0mm	Ant 5	DSI 0	40620	2593	17.69	18.50	1.205	62.9	1.006	0.17	0.189	0.229
LTE Band 41 Other PA	20M	QPSK	50	24	-	Left Cheek	0mm	Ant 5	DSI 0	40620	2593	17.69	18.50	1.205	62.9	1.006	0.01	0.139	0.169
LTE Band 41 Other PA	20M	QPSK	50	24	-	Left Tilted	0mm	Ant 5	DSI 0	40620	2593	17.69	18.50	1.205	62.9	1.006	0.16	0.079	0.096
FR1 n7	50M	QPSK	1	135	DFT-15	Right Cheek	0mm	Ant 2	DSI 0	507000	2535	20.73	21.50	1.194	-	-	-0.14	0.329	0.393
FR1 n7	50M	QPSK	1	135	DFT-15	Right Tilted	0mm	Ant 2	DSI 0	507000	2535	20.73	21.50	1.194	-	-	-0.07	0.084	0.100
FR1 n7	50M	QPSK	1	135	DFT-15	Left Cheek	0mm	Ant 2	DSI 0	507000	2535	20.73	21.50	1.194	-	-	0.13	0.324	0.387
FR1 n7	50M	QPSK	1	135	DFT-15	Left Tilted	0mm	Ant 2	DSI 0	507000	2535	20.73	21.50	1.194	-	-	-0.06	0.121	0.144
FR1 n7	50M	QPSK	135	68	DFT-15	Right Cheek	0mm	Ant 2	DSI 0	507000	2535	20.71	21.50	1.199	-	-	-0.19	0.314	0.377
FR1 n7	50M	QPSK	135	68	DFT-15	Right Tilted	0mm	Ant 2	DSI 0	507000	2535	20.71	21.50	1.199	-	-	-0.16	0.079	0.095
FR1 n7	50M	QPSK	135	68	DFT-15	Left Cheek	0mm	Ant 2	DSI 0	507000	2535	20.71	21.50	1.199	-	-	-0.06	0.305	0.366
FR1 n7	50M	QPSK	135	68	DFT-15	Left Tilted	0mm	Ant 2	DSI 0	507000	2535	20.71	21.50	1.199	-	-	0.01	0.108	0.130
FR1 n7	50M	QPSK	1	135	DFT-15	Right Cheek	0mm	Ant 3	DSI 0	507000	2535	14.24	15.00	1.191	-	-	0.11	0.475	0.566
FR1 n7	50M	QPSK	1	135	DFT-15	Right Tilted	0mm	Ant 3	DSI 0	507000	2535	14.24	15.00	1.191	-	-	0.03	0.387	0.461
FR1 n7	50M	QPSK	1	135	DFT-15	Left Cheek	0mm	Ant 3	DSI 0	507000	2535	14.24	15.00	1.191	-	-	-0.08	0.197	0.235
FR1 n7	50M	QPSK	1	135	DFT-15	Left Tilted	0mm	Ant 3	DSI 0	507000	2535	14.24	15.00	1.191	-	-	0.05	0.223	0.266
FR1 n7	50M	QPSK	135	68	DFT-15	Right Cheek	0mm	Ant 3	DSI 0	507000	2535	14.20	15.00	1.202	-	-	-0.14	0.456	0.548
FR1 n7	50M	QPSK	135	68	DFT-15	Right Tilted	0mm	Ant 3	DSI 0	507000	2535	14.20	15.00	1.202	-	-	-0.12	0.379	0.456
FR1 n7	50M	QPSK	135	68	DFT-15	Left Cheek	0mm	Ant 3	DSI 0	507000	2535	14.20	15.00	1.202	-	-	-0.07	0.194	0.233
FR1 n7	50M	QPSK	135	68	DFT-15	Left Tilted	0mm	Ant 3	DSI 0	507000	2535	14.20	15.00	1.202	-	-	-0.15	0.220	0.264
FR1 n7	50M	QPSK	1	135	DFT-15	Right Cheek	0mm	Ant 4	DSI 0	507000	2535	23.45	24.00	1.135	-	-	0.05	0.118	0.134
FR1 n7	50M	QPSK	1	135	DFT-15	Right Tilted	0mm	Ant 4	DSI 0	507000	2535	23.45	24.00	1.135	-	-	-0.09	0.115	0.131
FR1 n7	50M	QPSK	1	135	DFT-15	Left Cheek	0mm	Ant 4	DSI 0	507000	2535	23.45	24.00	1.135	-	-	-0.13	0.275	0.312
FR1 n7	50M	QPSK	1	135	DFT-15	Left Tilted	0mm	Ant 4	DSI 0	507000	2535	23.45	24.00	1.135	-	-	-0.18	0.077	0.087
FR1 n7	50M	QPSK	135	68	DFT-15	Right Cheek	0mm	Ant 4	DSI 0	507000	2535	23.43	24.00	1.140	-	-	-0.08	0.116	0.132
FR1 n7	50M	QPSK	135	68	DFT-15	Right Tilted	0mm	Ant 4	DSI 0	507000	2535	23.43	24.00	1.140	-	-	0.1	0.113	0.129
FR1 n7	50M	QPSK	135	68	DFT-15	Left Cheek	0mm	Ant 4	DSI 0	507000	2535	23.43	24.00	1.140	-	-	-0.13	0.266	0.303
FR1 n7	50M	QPSK	135	68	DFT-15	Left Tilted	0mm	Ant 4	DSI 0	507000	2535	23.43	24.00	1.140	-	-	-0.16	0.075	0.086
FR1 n7	50M	QPSK	1	135	DFT-15	Right Cheek	0mm	Ant 5	DSI 0	507000	2535	15.78	16.50	1.180	-	-	0.02	0.496	0.585
FR1 n7	50M	QPSK	1	135	DFT-15	Right Tilted	0mm	Ant 5	DSI 0	507000	2535	15.78	16.50	1.180	-	-	-0.08	0.256	0.302
FR1 n7	50M	QPSK	1	135	DFT-15	Left Cheek	0mm	Ant 5	DSI 0	507000	2535	15.78	16.50	1.180	-	-	0	0.114	0.135
FR1 n7	50M	QPSK	1	135	DFT-15	Left Tilted	0mm	Ant 5	DSI 0	507000	2535	15.78	16.50	1.180	-	-	-0.18	0.067	0.079
FR1 n7	50M	QPSK	135	68	DFT-15	Right Cheek	0mm	Ant 5	DSI 0	507000	2535	15.68	16.50	1.208	-	-	-0.11	0.491	0.593
FR1 n7	50M	QPSK	135	68	DFT-15	Right Tilted	0mm	Ant 5	DSI 0	507000	2535	15.68	16.50	1.208	-	-	0.18	0.242	0.292
FR1 n7	50M	QPSK	135	68	DFT-15	Left Cheek	0mm	Ant 5	DSI 0	507000	2535	15.68	16.50	1.208	-	-	-0.15	0.118	0.143
FR1 n7	50M	QPSK	135	68	DFT-15	Left Tilted	0mm	Ant 5	DSI 0	507000	2535	15.68	16.50	1.208	-	-	-0.09	0.068	0.082
FR1 n41	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 2	DSI 0	518598	2592.99	21.00	21.50	1.122	-	-	-0.01	0.337	0.378
FR1 n41	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 2	DSI 0	518598	2592.99	21.00	21.50	1.122	-	-	0.09	0.084	0.094
FR1 n41	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 2	DSI 0	518598	2592.99	21.00	21.50	1.122	-	-	-0.13	0.315	0.353
FR1 n41	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 2	DSI 0	518598	2592.99	21.00	21.50	1.122	-	-	0.13	0.124	0.139
FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 2	DSI 0	518598	2592.99	20.66	21.50	1.213	-	-	0.19	0.329	0.399
FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 2	DSI 0	518598	2592.99	20.66	21.50	1.213	-	-	-0.19	0.080	0.097
FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 2	DSI 0	518598	2592.99	20.66	21.50	1.213	-	-	0.05	0.309	0.375



FCC SAR Test Report

Report No. : FA380206

FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 2	DSI 0	518598	2592.99	20.66	21.50	1.213	-	-	0.06	0.119	0.144
FR1 n41	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 3	DSI 0	518598	2592.99	15.97	16.50	1.130	-	-	-0.17	0.489	0.552
FR1 n41	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 3	DSI 0	518598	2592.99	15.97	16.50	1.130	-	-	0.15	0.472	0.533
FR1 n41	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 3	DSI 0	518598	2592.99	15.97	16.50	1.130	-	-	0.11	0.242	0.273
FR1 n41	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 3	DSI 0	518598	2592.99	15.97	16.50	1.130	-	-	-0.16	0.283	0.320
FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 3	DSI 0	518598	2592.99	15.95	16.50	1.135	-	-	-0.04	0.483	0.548
FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 3	DSI 0	518598	2592.99	15.95	16.50	1.135	-	-	-0.06	0.469	0.532
FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 3	DSI 0	518598	2592.99	15.95	16.50	1.135	-	-	-0.01	0.244	0.277
FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 3	DSI 0	518598	2592.99	15.95	16.50	1.135	-	-	0.19	0.278	0.316
FR1 n41	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 4	DSI 0	518598	2592.99	23.54	24.00	1.112	-	-	-0.16	0.100	0.111
FR1 n41	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 4	DSI 0	518598	2592.99	23.54	24.00	1.112	-	-	0.14	0.071	0.079
FR1 n41	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 4	DSI 0	518598	2592.99	23.54	24.00	1.112	-	-	0.17	0.163	0.181
FR1 n41	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 4	DSI 0	518598	2592.99	23.54	24.00	1.112	-	-	0.17	0.050	0.056
FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 4	DSI 0	518598	2592.99	23.46	24.00	1.132	-	-	0.1	0.103	0.117
FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 4	DSI 0	518598	2592.99	23.46	24.00	1.132	-	-	0.16	0.072	0.082
FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 4	DSI 0	518598	2592.99	23.46	24.00	1.132	-	-	0.14	0.161	0.182
FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 4	DSI 0	518598	2592.99	23.46	24.00	1.132	-	-	-0.09	0.048	0.054
FR1 n41	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 5	DSI 0	518598	2592.99	16.46	17.00	1.132	-	-	-0.07	0.467	0.529
FR1 n41	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 5	DSI 0	518598	2592.99	16.46	17.00	1.132	-	-	0.04	0.149	0.169
FR1 n41	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 5	DSI 0	518598	2592.99	16.46	17.00	1.132	-	-	-0.18	0.073	0.083
FR1 n41	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 5	DSI 0	518598	2592.99	16.46	17.00	1.132	-	-	-0.11	0.059	0.067
FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 5	DSI 0	518598	2592.99	16.40	17.00	1.148	-	-	-0.08	0.459	0.527
FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 5	DSI 0	518598	2592.99	16.40	17.00	1.148	-	-	-0.18	0.142	0.163
FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 5	DSI 0	518598	2592.99	16.40	17.00	1.148	-	-	0.1	0.073	0.084
FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 5	DSI 0	518598	2592.99	16.40	17.00	1.148	-	-	0.05	0.057	0.065

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
3500MHz																				
	FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 1	DSI 0	633332	3499.98	16.94	17.50	1.138	-	-	0.08	0.416	0.473
	FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 1	DSI 0	633332	3499.98	16.94	17.50	1.138	-	-	0.15	0.078	0.089
	FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 1	DSI 0	633332	3499.98	16.94	17.50	1.138	-	-	-0.15	0.431	0.490
	FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 1	DSI 0	633332	3499.98	16.94	17.50	1.138	-	-	0.05	0.053	0.060
	FR1 n78 Part27Q PC2	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 1	DSI 0	633332	3499.98	20.36	20.50	1.033	50	1.000	-0.01	0.464	0.479
	FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 1	DSI 0	633332	3499.98	16.89	17.50	1.151	-	-	-0.15	0.406	0.467
	FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 1	DSI 0	633332	3499.98	16.89	17.50	1.151	-	-	0.11	0.076	0.087
	FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 1	DSI 0	633332	3499.98	16.89	17.50	1.151	-	-	0.02	0.421	0.484
	FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 1	DSI 0	633332	3499.98	16.89	17.50	1.151	-	-	0.06	0.049	0.056
	FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 1	DSI 0	650000	3750	16.52	17.50	1.253	-	-	-	n/a	n/a
	FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 1	DSI 0	650000	3750	16.52	17.50	1.253	-	-	-	n/a	n/a
	FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 1	DSI 0	650000	3750	16.52	17.50	1.253	-	-	-0.03	0.028	0.035
	FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 1	DSI 0	650000	3750	16.52	17.50	1.253	-	-	-	n/a	n/a
	FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 1	DSI 0	650000	3750	16.47	17.50	1.268	-	-	-	n/a	n/a
	FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 1	DSI 0	650000	3750	16.47	17.50	1.268	-	-	-	n/a	n/a
	FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 1	DSI 0	650000	3750	16.47	17.50	1.268	-	-	-0.13	0.025	0.032
	FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 1	DSI 0	650000	3750	16.47	17.50	1.268	-	-	-	n/a	n/a
	FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 6	DSI 0	633332	3499.98	11.09	12.00	1.233	-	-	0.11	0.486	0.599
	FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 6	DSI 0	633332	3499.98	11.09	12.00	1.233	-	-	-0.09	0.474	0.584
	FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 6	DSI 0	633332	3499.98	11.09	12.00	1.233	-	-	-0.09	0.147	0.181
	FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 6	DSI 0	633332	3499.98	11.09	12.00	1.233	-	-	-0.02	0.156	0.192
	FR1 n78 Part27Q PC2	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 6	DSI 0	633332	3499.98	14.95	15.00	1.012	50	1.000	0.02	0.537	0.543
	FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 6	DSI 0	633332	3499.98	11.03	12.00	1.250	-	-	-0.12	0.462	0.578
	FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 6	DSI 0	633332	3499.98	11.03	12.00	1.250	-	-	0.11	0.466	0.583
	FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 6	DSI 0	633332	3499.98	11.03	12.00	1.250	-	-	-0.15	0.145	0.181
	FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 6	DSI 0	633332	3499.98	11.03	12.00	1.250	-	-	-0.19	0.153	0.191



FCC SAR Test Report

Report No. : FA380206

FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 6	DSI 0	650000	3750	11.03	12.00	1.250	-	-	-0.13	0.319	0.399
FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 6	DSI 0	650000	3750	11.03	12.00	1.250	-	-	0.03	0.280	0.350
FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 6	DSI 0	650000	3750	11.03	12.00	1.250	-	-	0.01	0.088	0.110
FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 6	DSI 0	650000	3750	11.03	12.00	1.250	-	-	0.04	0.090	0.113
FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 6	DSI 0	650000	3750	10.97	12.00	1.268	-	-	-0.12	0.311	0.394
FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 6	DSI 0	650000	3750	10.97	12.00	1.268	-	-	-0.12	0.273	0.346
FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 6	DSI 0	650000	3750	10.97	12.00	1.268	-	-	-0.19	0.085	0.108
FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 6	DSI 0	650000	3750	10.97	12.00	1.268	-	-	0.18	0.087	0.110
FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 7	DSI 0	633332	3499.98	12.34	13.30	1.247	-	-	-0.19	0.207	0.258
FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 7	DSI 0	633332	3499.98	12.34	13.30	1.247	-	-	-0.12	0.261	0.326
FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 7	DSI 0	633332	3499.98	12.34	13.30	1.247	-	-	-0.15	0.264	0.329
FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 7	DSI 0	633332	3499.98	12.34	13.30	1.247	-	-	-0.08	0.304	0.379
FR1 n78 Part27Q PC2	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 7	DSI 0	633332	3499.98	15.35	16.30	1.245	50	1.000	0.01	0.325	0.404
FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 7	DSI 0	633332	3499.98	12.28	13.30	1.265	-	-	0.02	0.196	0.248
FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 7	DSI 0	633332	3499.98	12.28	13.30	1.265	-	-	-0.07	0.247	0.312
FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 7	DSI 0	633332	3499.98	12.28	13.30	1.265	-	-	0.19	0.252	0.319
FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 7	DSI 0	633332	3499.98	12.28	13.30	1.265	-	-	0.02	0.288	0.364
FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 7	DSI 0	650000	3750	12.32	13.30	1.253	-	-	0.01	0.197	0.247
FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 7	DSI 0	650000	3750	12.32	13.30	1.253	-	-	0.1	0.254	0.318
FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 7	DSI 0	650000	3750	12.32	13.30	1.253	-	-	-0.01	0.257	0.322
FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 7	DSI 0	650000	3750	12.32	13.30	1.253	-	-	0.01	0.295	0.370
FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 7	DSI 0	650000	3750	12.28	13.30	1.265	-	-	0.14	0.184	0.233
FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 7	DSI 0	650000	3750	12.28	13.30	1.265	-	-	0.05	0.245	0.310
FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 7	DSI 0	650000	3750	12.28	13.30	1.265	-	-	0.04	0.250	0.316
FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 7	DSI 0	650000	3750	12.28	13.30	1.265	-	-	0.05	0.282	0.357
FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 8	DSI 0	633332	3499.98	14.25	15.00	1.189	-	-	-0.11	0.121	0.144
FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 8	DSI 0	633332	3499.98	14.25	15.00	1.189	-	-	-0.16	0.091	0.108
FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 8	DSI 0	633332	3499.98	14.25	15.00	1.189	-	-	0	0.401	0.477
FR1 n78 Part27Q	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 8	DSI 0	633332	3499.98	14.25	15.00	1.189	-	-	-0.08	0.185	0.220
FR1 n78 Part27Q PC2	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 8	DSI 0	633332	3499.98	17.72	18.00	1.067	50	1.000	0.07	0.478	0.510
FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 8	DSI 0	633332	3499.98	14.22	15.00	1.197	-	-	0.02	0.117	0.140
FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 8	DSI 0	633332	3499.98	14.22	15.00	1.197	-	-	0.03	0.087	0.104
FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 8	DSI 0	633332	3499.98	14.22	15.00	1.197	-	-	0.16	0.396	0.474
FR1 n78 Part27Q	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 8	DSI 0	633332	3499.98	14.22	15.00	1.197	-	-	0.02	0.179	0.214
FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 8	DSI 0	650000	3750	14.05	15.00	1.245	-	-	0.08	0.050	0.062
FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 8	DSI 0	650000	3750	14.05	15.00	1.245	-	-	-0.05	0.043	0.054
FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 8	DSI 0	650000	3750	14.05	15.00	1.245	-	-	-0.05	0.142	0.177
FR1 n78 Part27O	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 8	DSI 0	650000	3750	14.05	15.00	1.245	-	-	0.09	0.056	0.070
FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 8	DSI 0	650000	3750	13.97	15.00	1.268	-	-	-0.11	0.049	0.062
FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 8	DSI 0	650000	3750	13.97	15.00	1.268	-	-	-0.09	0.046	0.058
FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 8	DSI 0	650000	3750	13.97	15.00	1.268	-	-	0.13	0.133	0.169
FR1 n78 Part27O	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 8	DSI 0	650000	3750	13.97	15.00	1.268	-	-	-0.14	0.052	0.066



15.2 Hotspot SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																				
	LTE Band 12	10M	QPSK	1	25	-	Front	10mm	Ant 0	DSI 4	23095	707.5	23.69	24.50	1.205	-	-	0.01	0.150	0.181
	LTE Band 12	10M	QPSK	1	25	-	Back	10mm	Ant 0	DSI 4	23095	707.5	23.69	24.50	1.205	-	-	0.18	0.180	0.217
	LTE Band 12	10M	QPSK	1	25	-	Right Side	10mm	Ant 0	DSI 4	23095	707.5	23.69	24.50	1.205	-	-	-0.05	0.141	0.170
	LTE Band 12	10M	QPSK	1	25	-	Bottom Side	10mm	Ant 0	DSI 4	23095	707.5	23.69	24.50	1.205	-	-	-0.11	0.084	0.101
	LTE Band 12	10M	QPSK	25	12	-	Front	10mm	Ant 0	DSI 4	23095	707.5	22.71	23.50	1.199	-	-	-0.18	0.120	0.144
	LTE Band 12	10M	QPSK	25	12	-	Back	10mm	Ant 0	DSI 4	23095	707.5	22.71	23.50	1.199	-	-	-0.13	0.144	0.173
	LTE Band 12	10M	QPSK	25	12	-	Right Side	10mm	Ant 0	DSI 4	23095	707.5	22.71	23.50	1.199	-	-	0.01	0.108	0.130
	LTE Band 12	10M	QPSK	25	12	-	Bottom Side	10mm	Ant 0	DSI 4	23095	707.5	22.71	23.50	1.199	-	-	-0.05	0.072	0.086
	LTE Band 12	10M	QPSK	1	25	-	Front	10mm	Ant 1	DSI 4	23095	707.5	23.95	24.50	1.135	-	-	-0.02	0.163	0.185
	LTE Band 12	10M	QPSK	1	25	-	Back	10mm	Ant 1	DSI 4	23095	707.5	23.95	24.50	1.135	-	-	-0.18	0.179	0.203
26	LTE Band 12	10M	QPSK	1	25	-	Left Side	10mm	Ant 1	DSI 4	23095	707.5	23.95	24.50	1.135	-	-	0.07	0.373	0.423
	LTE Band 12	10M	QPSK	1	25	-	Top Side	10mm	Ant 1	DSI 4	23095	707.5	23.95	24.50	1.135	-	-	-	n/a	n/a
	LTE Band 12	10M	QPSK	25	12	-	Front	10mm	Ant 1	DSI 4	23095	707.5	22.93	23.50	1.140	-	-	0.14	0.126	0.144
	LTE Band 12	10M	QPSK	25	12	-	Back	10mm	Ant 1	DSI 4	23095	707.5	22.93	23.50	1.140	-	-	-0.08	0.153	0.174
	LTE Band 12	10M	QPSK	25	12	-	Left Side	10mm	Ant 1	DSI 4	23095	707.5	22.93	23.50	1.140	-	-	0.16	0.299	0.341
	LTE Band 12	10M	QPSK	25	12	-	Top Side	10mm	Ant 1	DSI 4	23095	707.5	22.93	23.50	1.140	-	-	-	n/a	n/a
	LTE Band 13	10M	QPSK	1	25	-	Front	10mm	Ant 0	DSI 4	23230	782	24.61	25.50	1.227	-	-	0.14	0.194	0.238
	LTE Band 13	10M	QPSK	1	25	-	Back	10mm	Ant 0	DSI 4	23230	782	24.61	25.50	1.227	-	-	-0.19	0.212	0.260
	LTE Band 13	10M	QPSK	1	25	-	Right Side	10mm	Ant 0	DSI 4	23230	782	24.61	25.50	1.227	-	-	0.08	0.135	0.166
	LTE Band 13	10M	QPSK	1	25	-	Bottom Side	10mm	Ant 0	DSI 4	23230	782	24.61	25.50	1.227	-	-	0.13	0.101	0.124
	LTE Band 13	10M	QPSK	25	12	-	Front	10mm	Ant 0	DSI 4	23230	782	23.46	24.50	1.271	-	-	0.17	0.144	0.183
	LTE Band 13	10M	QPSK	25	12	-	Back	10mm	Ant 0	DSI 4	23230	782	23.46	24.50	1.271	-	-	-0.05	0.161	0.205
	LTE Band 13	10M	QPSK	25	12	-	Right Side	10mm	Ant 0	DSI 4	23230	782	23.46	24.50	1.271	-	-	0.18	0.101	0.128
	LTE Band 13	10M	QPSK	25	12	-	Bottom Side	10mm	Ant 0	DSI 4	23230	782	23.46	24.50	1.271	-	-	-0.19	0.075	0.095
	LTE Band 13	10M	QPSK	1	25	-	Front	10mm	Ant 1	DSI 4	23230	782	23.44	24.50	1.276	-	-	0.01	0.321	0.410
	LTE Band 13	10M	QPSK	1	25	-	Back	10mm	Ant 1	DSI 4	23230	782	23.44	24.50	1.276	-	-	-0.11	0.394	0.503
27	LTE Band 13	10M	QPSK	1	25	-	Left Side	10mm	Ant 1	DSI 4	23230	782	23.44	24.50	1.276	-	-	-0.04	0.789	1.007
	LTE Band 13	10M	QPSK	1	25	-	Top Side	10mm	Ant 1	DSI 4	23230	782	23.44	24.50	1.276	-	-	-	n/a	n/a
	LTE Band 13	10M	QPSK	25	12	-	Front	10mm	Ant 1	DSI 4	23230	782	23.40	24.50	1.288	-	-	0.04	0.307	0.395
	LTE Band 13	10M	QPSK	25	12	-	Back	10mm	Ant 1	DSI 4	23230	782	23.40	24.50	1.288	-	-	-0.15	0.372	0.479
	LTE Band 13	10M	QPSK	25	12	-	Left Side	10mm	Ant 1	DSI 4	23230	782	23.40	24.50	1.288	-	-	-0.09	0.739	0.952
	LTE Band 13	10M	QPSK	25	12	-	Top Side	10mm	Ant 1	DSI 4	23230	782	23.40	24.50	1.288	-	-	-	n/a	n/a
	LTE Band 13	10M	QPSK	50	0	-	Left Side	10mm	Ant 1	DSI 4	23230	782	23.34	24.50	1.306	-	-	-0.04	0.715	0.934
835MHz																				
	GSM850	-	-	-	-	GPRS(4Tx slots)	Front	10mm	Ant 0	DSI 4	189	836.4	28.65	29.50	1.216	-	-	0.17	0.364	0.443
	GSM850	-	-	-	-	GPRS(4Tx slots)	Back	10mm	Ant 0	DSI 4	189	836.4	28.65	29.50	1.216	-	-	0.08	0.488	0.593
	GSM850	-	-	-	-	GPRS(4Tx slots)	Right Side	10mm	Ant 0	DSI 4	189	836.4	28.65	29.50	1.216	-	-	-0.07	0.261	0.317
	GSM850	-	-	-	-	GPRS(4Tx slots)	Bottom Side	10mm	Ant 0	DSI 4	189	836.4	28.65	29.50	1.216	-	-	-0.1	0.241	0.293
	GSM850	-	-	-	-	GPRS(4Tx slots)	Front	10mm	Ant 1	DSI 4	189	836.4	26.57	27.00	1.104	-	-	-0.17	0.296	0.327
	GSM850	-	-	-	-	GPRS(4Tx slots)	Back	10mm	Ant 1	DSI 4	189	836.4	26.57	27.00	1.104	-	-	0.08	0.357	0.394
	GSM850	-	-	-	-	GPRS(4Tx slots)	Left Side	10mm	Ant 1	DSI 4	189	836.4	26.57	27.00	1.104	-	-	-0.18	0.781	0.862
	GSM850	-	-	-	-	GPRS(4Tx slots)	Top Side	10mm	Ant 1	DSI 4	189	836.4	26.57	27.00	1.104	-	-	-	n/a	n/a
	GSM850	-	-	-	-	GPRS(4Tx slots)	Left Side	10mm	Ant 1	DSI 4	128	824.2	26.55	27.00	1.109	-	-	0.08	0.849	0.942
28	GSM850	-	-	-	-	GPRS(4Tx slots)	Left Side	10mm	Ant 1	DSI 4	251	848.8	26.41	27.00	1.146	-	-	0.09	0.876	1.003
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 0	DSI 4	4182	836.4	23.91	25.00	1.285	-	-	-0.01	0.237	0.305
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 0	DSI 4	4182	836.4	23.91	25.00	1.285	-	-	-0.13	0.290	0.373
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Side	10mm	Ant 0	DSI 4	4182	836.4	23.91	25.00	1.285	-	-	0.18	0.206	0.265
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 0	DSI 4	4182	836.4	23.91	25.00	1.285	-	-	-0.17	0.183	0.235
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 1	DSI 4	4182	836.4	22.12	23.00	1.225	-	-	0.12	0.266	0.326
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	4182	836.4	22.12	23.00	1.225	-	-	-0.09	0.313	0.383



FCC SAR Test Report

Report No. : FA380206

29	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 1	DSI 4	4182	836.4	22.12	23.00	1.225	-	-	0.09	0.643	0.787
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 1	DSI 4	4182	836.4	22.12	23.00	1.225	-	-	-	n/a	n/a
	LTE Band 26	15M	QPSK	1	37	-	Front	10mm	Ant 0	DSI 4	26865	831.5	24.65	25.50	1.216	-	-	-0.11	0.291	0.354
	LTE Band 26	15M	QPSK	1	37	-	Back	10mm	Ant 0	DSI 4	26865	831.5	24.65	25.50	1.216	-	-	-0.17	0.302	0.367
	LTE Band 26	15M	QPSK	1	37	-	Right Side	10mm	Ant 0	DSI 4	26865	831.5	24.65	25.50	1.216	-	-	0.06	0.259	0.315
	LTE Band 26	15M	QPSK	1	37	-	Bottom Side	10mm	Ant 0	DSI 4	26865	831.5	24.65	25.50	1.216	-	-	-0.12	0.222	0.270
	LTE Band 26	15M	QPSK	36	20	-	Front	10mm	Ant 0	DSI 4	26865	831.5	23.66	24.50	1.213	-	-	0.05	0.235	0.285
	LTE Band 26	15M	QPSK	36	20	-	Back	10mm	Ant 0	DSI 4	26865	831.5	23.66	24.50	1.213	-	-	0.07	0.242	0.294
	LTE Band 26	15M	QPSK	36	20	-	Right Side	10mm	Ant 0	DSI 4	26865	831.5	23.66	24.50	1.213	-	-	0.16	0.203	0.246
	LTE Band 26	15M	QPSK	36	20	-	Bottom Side	10mm	Ant 0	DSI 4	26865	831.5	23.66	24.50	1.213	-	-	0.1	0.187	0.227
	LTE Band 26	15M	QPSK	1	37	-	Front	10mm	Ant 1	DSI 4	26865	831.5	23.79	24.50	1.178	-	-	0.14	0.317	0.373
	LTE Band 26	15M	QPSK	1	37	-	Back	10mm	Ant 1	DSI 4	26865	831.5	23.79	24.50	1.178	-	-	-0.01	0.365	0.430
	LTE Band 26	15M	QPSK	1	37	-	Left Side	10mm	Ant 1	DSI 4	26865	831.5	23.79	24.50	1.178	-	-	-0.14	0.800	0.942
	LTE Band 26	15M	QPSK	1	37	-	Top Side	10mm	Ant 1	DSI 4	26865	831.5	23.79	24.50	1.178	-	-	-	n/a	n/a
	LTE Band 26	15M	QPSK	36	20	-	Front	10mm	Ant 1	DSI 4	26865	831.5	23.77	24.50	1.183	-	-	0.06	0.339	0.401
	LTE Band 26	15M	QPSK	36	20	-	Back	10mm	Ant 1	DSI 4	26865	831.5	23.77	24.50	1.183	-	-	0.07	0.394	0.466
30	LTE Band 26	15M	QPSK	36	20	-	Left Side	10mm	Ant 1	DSI 4	26865	831.5	23.77	24.50	1.183	-	-	-0.05	0.846	1.001
	LTE Band 26	15M	QPSK	36	20	-	Top Side	10mm	Ant 1	DSI 4	26865	831.5	23.77	24.50	1.183	-	-	-	n/a	n/a
	LTE Band 26	15M	QPSK	75	0	-	Left Side	10mm	Ant 1	DSI 4	26865	831.5	23.65	24.50	1.216	-	-	0.03	0.760	0.924
	FR1 n5	20M	QPSK	1	53	DFT-15	Front	10mm	Ant 0	DSI 4	167300	836.5	24.83	25.50	1.167	-	-	-0.18	0.290	0.338
	FR1 n5	20M	QPSK	1	53	DFT-15	Back	10mm	Ant 0	DSI 4	167300	836.5	24.83	25.50	1.167	-	-	-0.08	0.351	0.410
	FR1 n5	20M	QPSK	1	53	DFT-15	Right Side	10mm	Ant 0	DSI 4	167300	836.5	24.83	25.50	1.167	-	-	-0.11	0.245	0.286
	FR1 n5	20M	QPSK	1	53	DFT-15	Bottom Side	10mm	Ant 0	DSI 4	167300	836.5	24.83	25.50	1.167	-	-	-0.14	0.230	0.268
	FR1 n5	20M	QPSK	50	28	DFT-15	Front	10mm	Ant 0	DSI 4	167300	836.5	24.82	25.50	1.169	-	-	-0.04	0.302	0.353
	FR1 n5	20M	QPSK	50	28	DFT-15	Back	10mm	Ant 0	DSI 4	167300	836.5	24.82	25.50	1.169	-	-	-0.1	0.359	0.420
	FR1 n5	20M	QPSK	50	28	DFT-15	Right Side	10mm	Ant 0	DSI 4	167300	836.5	24.82	25.50	1.169	-	-	0.14	0.253	0.296
	FR1 n5	20M	QPSK	50	28	DFT-15	Bottom Side	10mm	Ant 0	DSI 4	167300	836.5	24.82	25.50	1.169	-	-	0.04	0.249	0.291
	FR1 n5	20M	QPSK	1	53	DFT-15	Front	10mm	Ant 1	DSI 4	167300	836.5	23.35	24.00	1.161	-	-	-0.1	0.331	0.384
	FR1 n5	20M	QPSK	1	53	DFT-15	Back	10mm	Ant 1	DSI 4	167300	836.5	23.35	24.00	1.161	-	-	0.08	0.401	0.466
	FR1 n5	20M	QPSK	1	53	DFT-15	Left Side	10mm	Ant 1	DSI 4	167300	836.5	23.35	24.00	1.161	-	-	0.13	0.837	0.972
	FR1 n5	20M	QPSK	1	53	DFT-15	Top Side	10mm	Ant 1	DSI 4	167300	836.5	23.35	24.00	1.161	-	-	-	n/a	n/a
	FR1 n5	20M	QPSK	50	28	DFT-15	Front	10mm	Ant 1	DSI 4	167300	836.5	23.33	24.00	1.167	-	-	0.06	0.343	0.400
	FR1 n5	20M	QPSK	50	28	DFT-15	Back	10mm	Ant 1	DSI 4	167300	836.5	23.33	24.00	1.167	-	-	-0.19	0.414	0.483
31	FR1 n5	20M	QPSK	50	28	DFT-15	Left Side	10mm	Ant 1	DSI 4	167300	836.5	23.33	24.00	1.167	-	-	0.05	0.930	1.085
	FR1 n5	20M	QPSK	50	28	DFT-15	Top Side	10mm	Ant 1	DSI 4	167300	836.5	23.33	24.00	1.167	-	-	-	n/a	n/a
	FR1 n5	20M	QPSK	100	0	DFT-15	Left Side	10mm	Ant 1	DSI 4	167300	836.5	23.28	24.00	1.180	-	-	0.11	0.817	0.964
1750MHz																				
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 3	DSI 4	1413	1732.6	17.83	18.50	1.167	-	-	-0.13	0.147	0.172
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 3	DSI 4	1413	1732.6	17.83	18.50	1.167	-	-	-0.02	0.223	0.260
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 3	DSI 4	1413	1732.6	17.83	18.50	1.167	-	-	-0.19	0.054	0.063
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 3	DSI 4	1413	1732.6	17.83	18.50	1.167	-	-	-0.19	0.345	0.403
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 4	1413	1732.6	20.95	21.20	1.059	-	-	0.08	0.338	0.358
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	1413	1732.6	20.95	21.20	1.059	-	-	0.11	0.443	0.469
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 4	DSI 4	1413	1732.6	20.95	21.20	1.059	-	-	-0.04	0.123	0.130
32	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 4	DSI 4	1413	1732.6	20.95	21.20	1.059	-	-	0.11	0.707	0.749
	LTE Band 4	20M	QPSK	1	49	-	Front	10mm	Ant 5	DSI 4	20175	1732.5	22.46	23.70	1.330	-	-	0.03	0.103	0.137
	LTE Band 4	20M	QPSK	1	49	-	Back	10mm	Ant 5	DSI 4	20175	1732.5	22.46	23.70	1.330	-	-	-0.03	0.141	0.188
33	LTE Band 4	20M	QPSK	1	49	-	Left Side	10mm	Ant 5	DSI 4	20175	1732.5	22.46	23.70	1.330	-	-	-0.01	0.309	0.411
	LTE Band 4	20M	QPSK	1	49	-	Top Side	10mm	Ant 5	DSI 4	20175	1732.5	22.46	23.70	1.330	-	-	-	n/a	n/a
	LTE Band 4	20M	QPSK	50	24	-	Front	10mm	Ant 5	DSI 4	20175	1732.5	22.11	23.20	1.285	-	-	-0.1	0.097	0.125
	LTE Band 4	20M	QPSK	50	24	-	Back	10mm	Ant 5	DSI 4	20175	1732.5	22.11	23.20	1.285	-	-	0.04	0.134	0.172
	LTE Band 4	20M	QPSK	50	24	-	Left Side	10mm	Ant 5	DSI 4	20175	1732.5	22.11	23.20	1.285	-	-	0.01	0.280	0.360
	LTE Band 4	20M	QPSK	50	24	-	Top Side	10mm	Ant 5	DSI 4	20175	1732.5	22.11	23.20	1.285	-	-	-	n/a	n/a
	LTE Band 66	20M	QPSK	1	49	-	Front	10mm	Ant 2	DSI 4	132322	1745	20.43	21.50	1.279	-	-	0.16	0.134	0.171
	LTE Band 66	20M	QPSK	1	49	-	Back	10mm	Ant 2	DSI 4	132322	1745	20.43	21.50	1.279	-	-	0.13	0.230	0.294
	LTE Band 66	20M	QPSK	1	49	-	Right Side	10mm	Ant 2	DSI 4	132322	1745	20.43	21.50	1.279	-	-	-0.02	0.285	0.365



FCC SAR Test Report

Report No. : FA380206

	LTE Band 66	20M	QPSK	50	24	-	Front	10mm	Ant 2	DSI 4	132322	1745	19.41	20.50	1.285	-	-	0.1	0.105	0.135
	LTE Band 66	20M	QPSK	50	24	-	Back	10mm	Ant 2	DSI 4	132322	1745	19.41	20.50	1.285	-	-	0.08	0.187	0.240
	LTE Band 66	20M	QPSK	50	24	-	Right Side	10mm	Ant 2	DSI 4	132322	1745	19.41	20.50	1.285	-	-	0.02	0.255	0.328
	LTE Band 66	20M	QPSK	1	49	-	Front	10mm	Ant 3	DSI 4	132322	1745	17.45	18.50	1.274	-	-	-0.11	0.135	0.172
	LTE Band 66	20M	QPSK	1	49	-	Back	10mm	Ant 3	DSI 4	132322	1745	17.45	18.50	1.274	-	-	0.17	0.189	0.241
	LTE Band 66	20M	QPSK	1	49	-	Left Side	10mm	Ant 3	DSI 4	132322	1745	17.45	18.50	1.274	-	-	0.1	0.053	0.067
	LTE Band 66	20M	QPSK	1	49	-	Top Side	10mm	Ant 3	DSI 4	132322	1745	17.45	18.50	1.274	-	-	0.12	0.296	0.377
	LTE Band 66	20M	QPSK	50	24	-	Front	10mm	Ant 3	DSI 4	132322	1745	17.42	18.50	1.282	-	-	-0.03	0.132	0.169
	LTE Band 66	20M	QPSK	50	24	-	Back	10mm	Ant 3	DSI 4	132322	1745	17.42	18.50	1.282	-	-	0.19	0.185	0.237
	LTE Band 66	20M	QPSK	50	24	-	Left Side	10mm	Ant 3	DSI 4	132322	1745	17.42	18.50	1.282	-	-	0.18	0.051	0.065
	LTE Band 66	20M	QPSK	50	24	-	Top Side	10mm	Ant 3	DSI 4	132322	1745	17.42	18.50	1.282	-	-	0.01	0.289	0.371
	LTE Band 66	20M	QPSK	1	49	-	Front	10mm	Ant 4	DSI 4	132322	1745	21.39	22.20	1.205	-	-	-0.16	0.370	0.446
	LTE Band 66	20M	QPSK	1	49	-	Back	10mm	Ant 4	DSI 4	132322	1745	21.39	22.20	1.205	-	-	0.17	0.496	0.598
	LTE Band 66	20M	QPSK	1	49	-	Left Side	10mm	Ant 4	DSI 4	132322	1745	21.39	22.20	1.205	-	-	0.19	0.136	0.164
34	LTE Band 66	20M	QPSK	1	49	-	Bottom Side	10mm	Ant 4	DSI 4	132322	1745	21.39	22.20	1.205	-	-	-0.01	0.716	0.863
	LTE Band 66	20M	QPSK	1	49	-	Bottom Side	10mm	Ant 4	DSI 4	132072	1720	21.28	22.20	1.236	-	-	0.12	0.687	0.849
	LTE Band 66	20M	QPSK	1	49	-	Bottom Side	10mm	Ant 4	DSI 4	132572	1770	21.36	22.20	1.213	-	-	0.01	0.709	0.860
	LTE Band 66	20M	QPSK	50	24	-	Front	10mm	Ant 4	DSI 4	132322	1745	21.35	22.20	1.216	-	-	-0.14	0.361	0.439
	LTE Band 66	20M	QPSK	50	24	-	Back	10mm	Ant 4	DSI 4	132322	1745	21.35	22.20	1.216	-	-	0.12	0.485	0.590
	LTE Band 66	20M	QPSK	50	24	-	Right Side	10mm	Ant 4	DSI 4	132322	1745	21.35	22.20	1.216	-	-	-0.03	0.131	0.159
	LTE Band 66	20M	QPSK	50	24	-	Bottom Side	10mm	Ant 4	DSI 4	132322	1745	21.35	22.20	1.216	-	-	0.11	0.692	0.842
	LTE Band 66	20M	QPSK	50	24	-	Bottom Side	10mm	Ant 4	DSI 4	132072	1720	21.17	22.20	1.268	-	-	0.08	0.654	0.829
	LTE Band 66	20M	QPSK	50	24	-	Bottom Side	10mm	Ant 4	DSI 4	132572	1770	21.34	22.20	1.219	-	-	0.1	0.681	0.830
	LTE Band 66	20M	QPSK	100	0	-	Bottom Side	10mm	Ant 4	DSI 4	132322	1745	21.29	22.20	1.233	-	-	0.08	0.698	0.861
	LTE Band 66	20M	QPSK	1	49	-	Front	10mm	Ant 5	DSI 4	132322	1745	20.57	22.20	1.455	-	-	0.12	0.083	0.121
	LTE Band 66	20M	QPSK	1	49	-	Back	10mm	Ant 5	DSI 4	132322	1745	20.57	22.20	1.455	-	-	0.12	0.107	0.156
	LTE Band 66	20M	QPSK	1	49	-	Left Side	10mm	Ant 5	DSI 4	132322	1745	20.57	22.20	1.455	-	-	-0.01	0.213	0.310
	LTE Band 66	20M	QPSK	1	49	-	Top Side	10mm	Ant 5	DSI 4	132322	1745	20.57	22.20	1.455	-	-	-	n/a	n/a
	LTE Band 66	20M	QPSK	50	24	-	Front	10mm	Ant 5	DSI 4	132322	1745	20.52	22.20	1.472	-	-	0.08	0.079	0.116
	LTE Band 66	20M	QPSK	50	24	-	Back	10mm	Ant 5	DSI 4	132322	1745	20.52	22.20	1.472	-	-	-0.01	0.103	0.152
	LTE Band 66	20M	QPSK	50	24	-	Left Side	10mm	Ant 5	DSI 4	132322	1745	20.52	22.20	1.472	-	-	-0.04	0.204	0.300
	LTE Band 66	20M	QPSK	50	24	-	Top Side	10mm	Ant 5	DSI 4	132322	1745	20.52	22.20	1.472	-	-	-	n/a	n/a
	FR1 n66	40M	QPSK	1	108	DFT-15	Front	10mm	Ant 2	DSI 4	349000	1745	21.22	22.00	1.197	-	-	-0.08	0.153	0.183
	FR1 n66	40M	QPSK	1	108	DFT-15	Back	10mm	Ant 2	DSI 4	349000	1745	21.22	22.00	1.197	-	-	0.03	0.276	0.330
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Side	10mm	Ant 2	DSI 4	349000	1745	21.22	22.00	1.197	-	-	0.06	0.418	0.500
	FR1 n66	40M	QPSK	108	54	DFT-15	Front	10mm	Ant 2	DSI 4	349000	1745	21.12	22.00	1.225	-	-	-0.18	0.148	0.181
	FR1 n66	40M	QPSK	108	54	DFT-15	Back	10mm	Ant 2	DSI 4	349000	1745	21.12	22.00	1.225	-	-	-0.18	0.267	0.327
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Side	10mm	Ant 2	DSI 4	349000	1745	21.12	22.00	1.225	-	-	0.11	0.405	0.496
	FR1 n66	40M	QPSK	1	108	DFT-15	Front	10mm	Ant 3	DSI 4	349000	1745	17.70	18.50	1.202	-	-	0.01	0.146	0.176
	FR1 n66	40M	QPSK	1	108	DFT-15	Back	10mm	Ant 3	DSI 4	349000	1745	17.70	18.50	1.202	-	-	-0.12	0.215	0.258
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Side	10mm	Ant 3	DSI 4	349000	1745	17.70	18.50	1.202	-	-	-0.04	0.063	0.076
	FR1 n66	40M	QPSK	1	108	DFT-15	Top Side	10mm	Ant 3	DSI 4	349000	1745	17.70	18.50	1.202	-	-	-0.05	0.345	0.415
	FR1 n66	40M	QPSK	108	54	DFT-15	Front	10mm	Ant 3	DSI 4	349000	1745	17.68	18.50	1.208	-	-	0.16	0.159	0.192
	FR1 n66	40M	QPSK	108	54	DFT-15	Back	10mm	Ant 3	DSI 4	349000	1745	17.68	18.50	1.208	-	-	-0.16	0.229	0.277
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Side	10mm	Ant 3	DSI 4	349000	1745	17.68	18.50	1.208	-	-	-0.07	0.072	0.087
	FR1 n66	40M	QPSK	108	54	DFT-15	Top Side	10mm	Ant 3	DSI 4	349000	1745	17.68	18.50	1.208	-	-	-0.19	0.359	0.434
	FR1 n66	40M	QPSK	1	108	DFT-15	Front	10mm	Ant 4	DSI 4	349000	1745	20.88	21.20	1.076	-	-	-0.12	0.343	0.369
	FR1 n66	40M	QPSK	1	108	DFT-15	Back	10mm	Ant 4	DSI 4	349000	1745	20.88	21.20	1.076	-	-	-0.02	0.453	0.488
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Side	10mm	Ant 4	DSI 4	349000	1745	20.88	21.20	1.076	-	-	-0.06	0.136	0.146
	FR1 n66	40M	QPSK	1	108	DFT-15	Bottom Side	10mm	Ant 4	DSI 4	349000	1745	20.88	21.20	1.076	-	-	0.09	0.691	0.744
	FR1 n66	40M	QPSK	108	54	DFT-15	Front	10mm	Ant 4	DSI 4	349000	1745	20.83	21.20	1.089	-	-	-0.01	0.374	0.407
	FR1 n66	40M	QPSK	108	54	DFT-15	Back	10mm	Ant 4	DSI 4	349000	1745	20.83	21.20	1.089	-	-	0.07	0.478	0.521
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Side	10mm	Ant 4	DSI 4	349000	1745	20.83	21.20	1.089	-	-	0.09	0.140	0.152
35	FR1 n66	40M	QPSK	108	54	DFT-15	Bottom Side	10mm	Ant 4	DSI 4	349000	1745	20.83	21.20	1.089	-	-	0.16	0.724	0.788
	FR1 n66	40M	QPSK	1	108	DFT-15	Front	10mm	Ant 5	DSI 4	349000	1745	21.69	22.70	1.262	-	-	-0.05	0.112	0.141
	FR1 n66	40M	QPSK	1	108	DFT-15	Back	10mm	Ant 5	DSI 4	349000	1745	21.69	22.70	1.262	-	-	0.06	0.147	0.185



FCC SAR Test Report

Report No. : FA380206

	FR1 n66	40M	QPSK	1	108	DFT-15	Left Side	10mm	Ant 5	DSI 4	349000	1745	21.69	22.70	1.262	-	-	0.05	0.246	0.310
	FR1 n66	40M	QPSK	1	108	DFT-15	Top Side	10mm	Ant 5	DSI 4	349000	1745	21.69	22.70	1.262	-	-	-	n/a	n/a
	FR1 n66	40M	QPSK	108	54	DFT-15	Front	10mm	Ant 5	DSI 4	349000	1745	21.66	22.70	1.271	-	-	0.1	0.118	0.150
	FR1 n66	40M	QPSK	108	54	DFT-15	Back	10mm	Ant 5	DSI 4	349000	1745	21.66	22.70	1.271	-	-	0.17	0.155	0.197
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Side	10mm	Ant 5	DSI 4	349000	1745	21.66	22.70	1.271	-	-	-0.04	0.254	0.323
	FR1 n66	40M	QPSK	108	54	DFT-15	Top Side	10mm	Ant 5	DSI 4	349000	1745	21.66	22.70	1.271	-	-	-	n/a	n/a
1900MHz																				
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Front	10mm	Ant 3	DSI 4	661	1880	20.61	21.50	1.227	-	-	-0.11	0.137	0.168
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Back	10mm	Ant 3	DSI 4	661	1880	20.61	21.50	1.227	-	-	-0.19	0.203	0.249
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Left Side	10mm	Ant 3	DSI 4	661	1880	20.61	21.50	1.227	-	-	0.01	0.087	0.107
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Top Side	10mm	Ant 3	DSI 4	661	1880	20.61	21.50	1.227	-	-	-0.12	0.266	0.326
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Front	10mm	Ant 4	DSI 4	661	1880	23.63	24.20	1.140	-	-	-0.02	0.280	0.319
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Back	10mm	Ant 4	DSI 4	661	1880	23.63	24.20	1.140	-	-	0.12	0.420	0.479
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Left Side	10mm	Ant 4	DSI 4	661	1880	23.63	24.20	1.140	-	-	-0.02	0.137	0.156
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Bottom Side	10mm	Ant 4	DSI 4	661	1880	23.63	24.20	1.140	-	-	-0.13	0.702	0.800
36	GSM1900	-	-	-	-	GPRS(4Tx slots)	Bottom Side	10mm	Ant 4	DSI 4	512	1850.2	23.60	24.20	1.148	-	-	-0.05	0.704	0.808
	GSM1900	-	-	-	-	GPRS(4Tx slots)	Bottom Side	10mm	Ant 4	DSI 4	810	1909.8	23.59	24.20	1.151	-	-	0.11	0.676	0.778
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 3	DSI 4	9400	1880	17.57	18.00	1.104	-	-	0.06	0.139	0.153
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 3	DSI 4	9400	1880	17.57	18.00	1.104	-	-	0.13	0.221	0.244
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 3	DSI 4	9400	1880	17.57	18.00	1.104	-	-	0.12	0.099	0.109
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 3	DSI 4	9400	1880	17.57	18.00	1.104	-	-	-0.06	0.301	0.332
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	DSI 4	9400	1880	20.56	20.70	1.033	-	-	0.07	0.299	0.309
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	DSI 4	9400	1880	20.56	20.70	1.033	-	-	-0.12	0.428	0.442
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 4	DSI 4	9400	1880	20.56	20.70	1.033	-	-	-0.05	0.147	0.152
37	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 4	DSI 4	9400	1880	20.56	20.70	1.033	-	-	0.03	0.697	0.720
	LTE Band 2	20M	QPSK	1	49	-	Front	10mm	Ant 3	DSI 4	18900	1880	16.85	18.00	1.303	-	-	-0.06	0.121	0.158
	LTE Band 2	20M	QPSK	1	49	-	Back	10mm	Ant 3	DSI 4	18900	1880	16.85	18.00	1.303	-	-	0.05	0.177	0.231
	LTE Band 2	20M	QPSK	1	49	-	Left Side	10mm	Ant 3	DSI 4	18900	1880	16.85	18.00	1.303	-	-	0.19	0.106	0.138
	LTE Band 2	20M	QPSK	1	49	-	Top Side	10mm	Ant 3	DSI 4	18900	1880	16.85	18.00	1.303	-	-	-0.15	0.266	0.347
	LTE Band 2	20M	QPSK	50	24	-	Front	10mm	Ant 3	DSI 4	18900	1880	16.83	18.00	1.309	-	-	-0.08	0.119	0.156
	LTE Band 2	20M	QPSK	50	24	-	Back	10mm	Ant 3	DSI 4	18900	1880	16.83	18.00	1.309	-	-	-0.14	0.173	0.226
	LTE Band 2	20M	QPSK	50	24	-	Left Side	10mm	Ant 3	DSI 4	18900	1880	16.83	18.00	1.309	-	-	0.14	0.103	0.135
	LTE Band 2	20M	QPSK	50	24	-	Top Side	10mm	Ant 3	DSI 4	18900	1880	16.83	18.00	1.309	-	-	0.17	0.261	0.342
	LTE Band 2	20M	QPSK	1	49	-	Front	10mm	Ant 4	DSI 4	18900	1880	20.71	21.70	1.256	-	-	0.15	0.312	0.392
	LTE Band 2	20M	QPSK	1	49	-	Back	10mm	Ant 4	DSI 4	18900	1880	20.71	21.70	1.256	-	-	-0.14	0.451	0.566
	LTE Band 2	20M	QPSK	1	49	-	Left Side	10mm	Ant 4	DSI 4	18900	1880	20.71	21.70	1.256	-	-	0.06	0.174	0.219
	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	10mm	Ant 4	DSI 4	18900	1880	20.71	21.70	1.256	-	-	0.17	0.718	0.902
	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	10mm	Ant 4	DSI 4	18700	1860	20.68	21.70	1.265	-	-	0.14	0.721	0.912
	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	10mm	Ant 4	DSI 4	19100	1900	20.67	21.70	1.268	-	-	0.07	0.703	0.891
	LTE Band 2	20M	QPSK	50	24	-	Front	10mm	Ant 4	DSI 4	18900	1880	20.70	21.70	1.259	-	-	0.18	0.320	0.403
	LTE Band 2	20M	QPSK	50	24	-	Back	10mm	Ant 4	DSI 4	18900	1880	20.70	21.70	1.259	-	-	-0.03	0.463	0.583
	LTE Band 2	20M	QPSK	50	24	-	Left Side	10mm	Ant 4	DSI 4	18900	1880	20.70	21.70	1.259	-	-	-0.14	0.178	0.224
	LTE Band 2	20M	QPSK	50	24	-	Bottom Side	10mm	Ant 4	DSI 4	18900	1880	20.70	21.70	1.259	-	-	-0.1	0.736	0.927
38	LTE Band 2	20M	QPSK	50	24	-	Bottom Side	10mm	Ant 4	DSI 4	18700	1860	20.66	21.70	1.271	-	-	0.01	0.739	0.939
	LTE Band 2	20M	QPSK	50	24	-	Bottom Side	10mm	Ant 4	DSI 4	19100	1900	20.64	21.70	1.276	-	-	0.04	0.721	0.920
	LTE Band 2	20M	QPSK	100	0	-	Bottom Side	10mm	Ant 4	DSI 4	18900	1880	20.65	21.70	1.274	-	-	0.18	0.733	0.933
2600MHz																				
	LTE Band 7	20M	QPSK	1	49	-	Front	10mm	Ant 2	DSI 4	21100	2535	20.77	21.50	1.183	-	-	-0.11	0.097	0.115
	LTE Band 7	20M	QPSK	1	49	-	Back	10mm	Ant 2	DSI 4	21100	2535	20.77	21.50	1.183	-	-	-0.16	0.160	0.189
	LTE Band 7	20M	QPSK	1	49	-	Right Side	10mm	Ant 2	DSI 4	21100	2535	20.77	21.50	1.183	-	-	0.08	0.284	0.336
	LTE Band 7C	20M	QPSK	1	49	-	Right Side	10mm	Ant 2	DSI 4	21100+ 21298	2535+ 2554.8	20.58	21.50	1.236	-	-	0.02	0.233	0.288
	LTE Band 7	20M	QPSK	50	24	-	Front	10mm	Ant 2	DSI 4	21100	2535	19.69	20.50	1.205	-	-	-0.07	0.078	0.094
	LTE Band 7	20M	QPSK	50	24	-	Back	10mm	Ant 2	DSI 4	21100	2535	19.69	20.50	1.205	-	-	0.07	0.134	0.161
	LTE Band 7	20M	QPSK	50	24	-	Right Side	10mm	Ant 2	DSI 4	21100	2535	19.69	20.50	1.205	-	-	-0.08	0.227	0.274
	LTE Band 7	20M	QPSK	1	49	-	Front	10mm	Ant 3	DSI 4	21100	2535	16.42	17.00	1.143	-	-	-0.05	0.127	0.145
	LTE Band 7	20M	QPSK	1	49	-	Back	10mm	Ant 3	DSI 4	21100	2535	16.42	17.00	1.143	-	-	-0.15	0.211	0.241