

TEST REPORT

| Report No.: | BCTC2503843931-3E | | | | | |
|----------------------|----------------------------------|--|--|--|--|--|
| Applicant: | Anhui Hikeen Technology Co.,LTD. | | | | | |
| Product Name: | WiFi/BT Module | | | | | |
| Test Model: | SH-RT8822CU-01 | | | | | |
| Tested Date: | 2025-03-12 to 2025-03-27 | | | | | |
| Issued Date: | 2025-03-27 | | | | | |
| | | | | | | |
| She | enzhen BCTC Testing Co., Ltd. | | | | | |
| | | | | | | |
| No.: BCTC/RF-EMC-005 | Page: 1 of 81 | | | | | |



FCC ID: 2BOB7-SHRTL8822

| Product Name: | WiFi/BT Module |
|-----------------------|---|
| Trademark: | Hikeen |
| Model/Type reference: | SH-RT8822CU-01 SH-RT8822EU-01 |
| Prepared For: | Anhui Hikeen Technology Co.,LTD. |
| Address: | 1#3# Workshop Of Jiangqiao Road Intelligent Industrial Park, Bengshan District, Bengbu City, Anhui Province, China |
| Manufacturer: | Anhui Hikeen Technology Co.,LTD. |
| Address: | 1#3# Workshop Of Jiangqiao Road Intelligent Industrial Park, Bengshan District, Bengbu City, Anhui Province, China |
| Prepared By: | Shenzhen BCTC Testing Co., Ltd. |
| Address: | 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China |
| Sample Received Date: | 2025-03-12 |
| Sample tested Date: | 2025-03-12 to 2025-03-27 |
| Issue Date: | 2025-03-27 |
| Report No.: | BCTC2503843931-3E |
| Test Standards: | FCC Part15.247 ANSI C63.10-2013 |
| Test Results: | PASS |
| Remark: | This is WIFI-2.4GHz band radio test report. |

Tested by:

Chen

Lei Chen/Project Handler

Approved by:

Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.



Table Of Content

| Test | Report Declaration | Page |
|------|--|------|
| 1. | Version | 5 |
| 2. | Test Summary | |
| 3. | Measurement Uncertainty | |
| 4. | Product Information And Test Setup | |
| 4.1 | Product Information | |
| 4.2 | Test Setup Configuration | |
| 4.3 | Support Equipment | |
| 4.4 | Channel List | |
| 4.5 | Test Mode | 10 |
| 4.6 | Table Of Parameters Of Text Software Setting | 10 |
| 4.7 | Antenna | |
| 5. | Test Facility And Test Instrument Used | 12 |
| 5.1 | Test Facility | |
| 5.2 | Test Instrument Used | 12 |
| 6. | Conducted Emissions | |
| 6.1 | Block Diagram Of Test Setup | 14 |
| 6.2 | Limit | |
| 6.3 | Test procedure | |
| 6.4 | EUT operating Conditions | 14 |
| 6.5 | Test Result | |
| 7. | Radiated Emissions | 17 |
| 7.1 | Block Diagram Of Test Setup | 17 |
| 7.2 | Limit | |
| 7.3 | Test procedure | |
| 7.4 | EUT Operating Conditions | |
| 7.5 | Test Result | |
| 8. | Radiated Band Emission Measurement And Restricted Bands Of Operation | |
| 8.1 | Block Diagram Of Test Setup | |
| 8.2 | Limit | |
| 8.3 | Test procedure | 28 |
| 8.4 | EUT Operating Conditions | |
| 8.5 | lest Result | 29 |
| 9. | Power Spectral Density Test | |
| 9.1 | Block Diagram Of Test Setup | 31 |
| 9.2 | Limit Test procedure EUT Operating Conditions | |
| 9.3 | lest procedure | |
| 9.4 | EUT Operating Conditions | |
| 9.5 | Test Result | |
| 10. | Test Result Bandwidth Test Block Diagram Of Test Setup | |
| 10.1 | BIOCK Diagram Of Test Setup | |
| 10.2 | | |
| 10.3 | I est procedure | |
| 10.4 | | |
| 10.5 | Test Result | 40 |



| 11. Peak Output Power Test | 47 |
|--|----|
| 11.1 Block Diagram Of Test Setup | 47 |
| 11.2 Limit | |
| 11.3 Test Procedure | 47 |
| 11.4 EUT Operating Conditions | 47 |
| 11.5 Test Result | 48 |
| 12. 100 kHz Bandwidth Of Frequency Band Edge | 49 |
| 12.1 Block Diagram Of Test Setup | 49 |
| 12.2 Limit | 49 |
| 12.3 Test Procedure | 49 |
| 12.4 EUT Operating Conditions | 49 |
| 12.5 Test Result | |
| 13. Duty Cycle Of Test Signal | 70 |
| 13.1 Standard Requirement | 70 |
| 13.2 Formula | 70 |
| 13.3 Test Procedure | 70 |
| 13.4 Test Result | 70 |
| 14. Antenna Requirement | 76 |
| 14.1 Limit | 76 |
| 14.1 Test Result | 76 |
| 15. EUT Photographs | 77 |
| 16. EUT Test Setup Photographs | 78 |
| | |

(Note: N/A Means Not Applicable)


No.: BCTC/RF-EMC-005

Page: 4 of 81



1. Version

| Report No. | Issue Date | Description | Approved |
|-------------------|------------|-------------|----------|
| BCTC2503843931-3E | 2025-03-27 | Original | Valid |
| | | | |

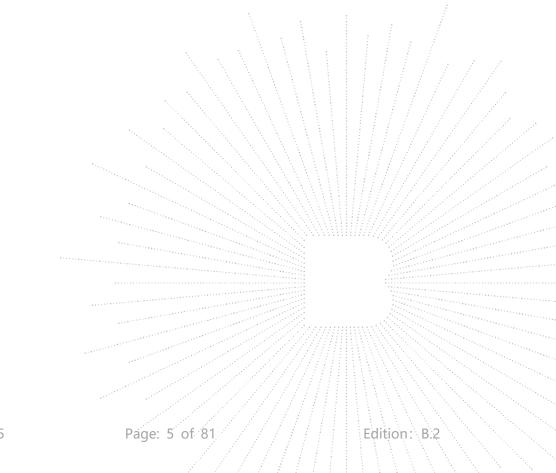

No.: BCTC/RF-EMC-005



2. Test Summary

The Product has been tested according to the following specifications:

| No. | Test Parameter | Clause No. | Results |
|-----|-----------------------------------|---------------|---------|
| 1 | Conducted Emission | 15.207 | PASS |
| 2 | 6dB Bandwidth | 15.247 (a)(2) | PASS |
| 3 | Peak Output Power | 15.247 (b) | PASS |
| 4 | Radiated Spurious Emission | 15.247 (d) | PASS |
| 5 | Power Spectral Density | 15.247 (e) | PASS |
| 6 | Restricted Band of Operation | 15.205 | PASS |
| 7 | Band Edge (Out of Band Emissions) | 15.247 (d) | PASS |
| 8 | Antenna Requirement | 15.203 | PASS |



3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| No. | Item | Uncertainty |
|-----|---|-----------------|
| 1 | 3m chamber Radiated spurious emission(30MHz-1GHz) | U=4.3dB |
| 2 | 3m chamber Radiated spurious emission(9KHz-30MHz) | U=3.7dB |
| 3 | 3m chamber Radiated spurious emission(1GHz-18GHz) | U=4.5dB |
| 4 | 3m chamber Radiated spurious emission(18GHz-40GHz) | U=3.34dB |
| 5 | Conducted Emission (150kHz-30MHz) | U=3.20dB |
| 6 | Conducted Adjacent channel power | U=1.38dB |
| 7 | Conducted output power uncertainty Above 1G | U=1.576dB |
| 8 | Conducted output power uncertainty below 1G | U=1.28dB |
| 9 | humidity uncertainty | U=5.3% |
| 10 | Temperature uncertainty | U=0.59 ℃ |

No.: BCTC/RF-EMC-005

Page: 7 of 81



4. Product Information And Test Setup

4.1 Product Information

| Model/Type reference: | SH-RT8822CU-01 SH-RT8822EU-01 |
|--------------------------|--|
| Model differences: | All the model are the same circuit and RF module, except model names. |
| Hardware Version: | N/A |
| Software Version: | N/A |
| Operation Frequency: | 802.11b/g/n20 MHz:2412~2462 MHz 802.11n40 MHz:2422~2452 MHz |
| Bit Rate of Transmitter: | 802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps |
| Type of Modulation: | OFDM/DSSS |
| Number Of Channel: | 802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH |
| Antenna installation: | Metal antenna*2 |
| Antenna Gain: | Antenna A: 1.2 dBi, Antenna B: 1.76 dBi |
| | Remark: The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. The antenna gain of the product is provided by the customer, and the test data is affected by the customer information. |
| Ratings: | DC 3.3V |

Page: 8 of 81



4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

4.3 Support Equipment

| No. | Device Type | Brand | Model | Series No. | Note |
|-----|----------------|--------|----------------------|------------|-----------|
| E-1 | WiFi/BT Module | Hikeen | SH-RT8822CU-01 | N/A | EUT |
| E-2 | Adapter | N/A | CD289 | N/A | Auxiliary |
| E-3 | PC | N/A | ThinkPad E15 Gen2 | N/A | Auxiliary |

| ltem | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|----------------------|
| C-1 | NO | NO | 0.5M | USB cable unshielded |
| C-2 | NO | NO | 0.5M | DC cable unshielded |

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

| Channel List for 802.11b/g/n(20) | | | | | | |
|----------------------------------|--------------------|---------|--------------------|---------|--------------------|--|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | |
| 01 | 2412 | 02 | 2417 | 03 | 2422 | |
| 04 | 2427 | 05 | 2432 | 06 | 2437 | |
| 07 | 2442 | 08 | 2447 | 09 | 2452 | |
| 10 | 2457 | 11 | 2462 | | | |

| Channel List for 802.11n(40) | | | | | |
|------------------------------|--------------------|---------|--------------------|---------|--------------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 03 | 2422 | | 2427 | 05 | 2432 |
| 06 | 2437 | 07 | 2442 | 08 | 2447 |
| 09 | 2452 | | | | |



4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| For All Mode | Description | Modulation Type | | |
|--------------|--------------|-----------------|--|--|
| Mode 1 | CH 01 | | | |
| Mode 2 | CH 06 | 802.11b | | |
| Mode 3 | CH 11 | | | |
| Mode 4 | CH 01 | | | |
| Mode 5 | CH 06 | 802.11g | | |
| Mode 6 | CH 11 | | | |
| Mode 7 | CH 01 | | | |
| Mode 8 | CH 06 | 802.11n20 | | |
| Mode 9 | CH 11 | | | |
| Mode 10 | CH 03 | | | |
| Mode 11 | CH 06 | 802.11n40 | | |
| Mode 12 | CH 09 | | | |
| Mode 13 | Linking Mode | | | |

Notes:

1. The measurements are performed at the highest, middle, lowest available channels.

2. The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

3. According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup"

11Mbps for 802.11b,6Mbps for 802.11g,13Mbps for 802.11n(H20), 54Mbps for 802.11n(H40)

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

| Test software Version | MP_Kit_RTL11ac_8822CU_USB_v13.00 | | | | | |
|-----------------------|----------------------------------|----------|----------|--|--|--|
| Frequency | 2412 MHz | 2437 MHz | 2462 MHz | | | |
| Parameters | DEF | DEF | DEF | | | |
| Frequency | 2422MHz | 2437MHz | 2452MHz | | | |
| Parameters | DEF | DEF | DEF | | | |



4.7 Antenna

Table for Internal antenna

| Ant. | Brand | Model Name | Antenna Type | Gain (dBi) | NOTE |
|------|-------|------------|---------------|------------|------|
| Α | N/A | N/A | Metal antenna | 1.2 | N/A |
| В | N/A | N/A | Metal antenna | 1.76 | N/A |

EUT has two Internal antennas with Max gain GANT 1.76 dBi on every antenna, CDD device with one spatial streams, also can operat with one spatial streams according to KDB662911 D01 v02r01, Directional gain= GANT + Array Gain, where Array Gain is as follows.

1)For power spectral density(PSD) measurements, Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB, So the directional gain for PSD is 4.77 dBi

2)For power measurements, The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1.76 dBi

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain.

No.: BCTC/RF-EMC-005

Page: 11 of 81



5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards. FCC Test Firm Registration Number: 712850 A2LA certificate registration number is: CN1212 ISED Registered No.: 23583 ISED CAB identifier: CN0017

5.2 Test Instrument Used

| Conducted Emissions Test | | | | | | | | |
|--------------------------|---|------------|-------------|--------------|--------------|--|--|--|
| Equipment | Equipment Manufacturer Model# Serial# Last Cal. Next Cal. | | | | | | | |
| Receiver | R&S | ESR3 | 102075 | May 16, 2024 | May 15, 2025 | | | |
| LISN | R&S | ENV216 | 101375 | May 16, 2024 | May 15, 2025 | | | |
| Software | Frad | EZ-EMC | EMC-CON 3A1 | ١ | / | | | |
| Pulse limiter | Schwarzbeck | VTSD9561-F | 01323 | May 16, 2024 | May 15, 2025 | | | |

| RF Conducted Test | | | | | | | |
|-------------------------------------|--------------|----------------|--|--------------|--------------|--|--|
| Equipment | Manufacturer | Model# Serial# | | Last Cal. | Next Cal. | | |
| Power meter | Keysight | E4419 | 1 | May 16, 2024 | May 15, 2025 | | |
| Power Sensor (AV) | Keysight | E9300A | I i | May 16, 2024 | May 15, 2025 | | |
| Signal Analyzer20kH z-26.5GHz | Keysight | N9020A | MY49100060 | May 16, 2024 | May 15, 2025 | | |
| Spectrum Analyzer9kHz- 40GHz | R&S | FSP40 | 100363 | May 16, 2024 | May 15, 2025 | | |
| Radio frequency control box | MAIWEI | MW100-RFC | an a | | | | |
| Software | MAIWEI | MTS 8310 | F | I | λ | | |



| | Radiated Emissions Test (966 Chamber01) | | | | | | | |
|------------------------------------|---|----------------------|------------------|--------------|--------------|--|--|--|
| Equipment | Manufacturer | Model# | Serial# | Last Cal. | Next Cal. | | | |
| 966 chamber | ChengYu | 966 Room | 966 | May 16, 2024 | May 15, 2025 | | | |
| Receiver | R&S | ESR3 | 102075 | May 16, 2024 | May 15, 2025 | | | |
| Receiver | R&S | ESRP | 101154 | May 16, 2024 | May 15, 2025 | | | |
| Amplifier | Schwarzbeck | BBV9744 | 9744-0037 | May 16, 2024 | May 15, 2025 | | | |
| TRILOG Broadband Antenna | Schwarzbeck | VULB9163 | 942 | May 21, 2024 | May 20, 2025 | | | |
| Loop Antenna(9KHz -30MHz) | Schwarzbeck | FMZB1519B | 00014 | May 21, 2024 | May 20, 2025 | | | |
| Amplifier | SKET | LAPA_01G18 G-45dB | SK202104090 1 | May 16, 2024 | May 15, 2025 | | | |
| Horn Antenna | Schwarzbeck | BBHA9120D | 1541 | May 21, 2024 | May 20, 2025 | | | |
| Amplifier(18G Hz-40GHz) | MITEQ | TTA1840-35- HG | 2034381 | May 16, 2024 | May 15, 2025 | | | |
| Horn Antenna(18G Hz-40GHz) | Schwarzbeck | BBHA9170 | 00822 | May 21, 2024 | May 20, 2025 | | | |
| Spectrum Analyzer9kHz- 40GHz | R&S | FSP40 | 100363 | May 16, 2024 | May 15, 2025 | | | |
| Software | Frad | EZ-EMC | FA-03A2 RE | \ | \ | | | |


No.: BCTC/RF-EMC-005

Page: 13 of 81



6. Conducted Emissions

6.1 Block Diagram Of Test Setup

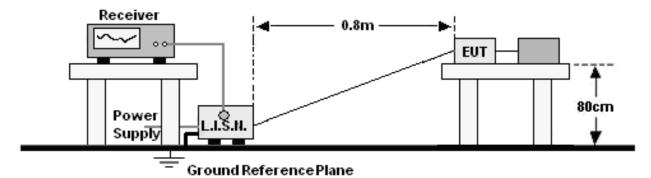

6.2 Limit

| | Limit (| dBuV) |
|-----------------|-----------|-----------|
| Frequency (MHz) | Quas-peak | Average |
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * |
| 0.50 -5.0 | 56.00 | 46.00 |
| 5.0 -30.0 | 60.00 | 50.00 |

Notes:

1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

6.3 Test procedure

| Receiver Parameters | Setting | |
|---------------------|----------|--|
| Attenuation | 10 dB | |
| Start Frequency | 0.15 MHz | |
| Stop Frequency | 30 MHz | |
| IF Bandwidth | 9 kHz | |

a. The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).

b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.

c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



6.5 Test Result

| Temperature: | 24.3 ℃ | Relative Humidity: | 52% |
|--------------|---------------|--------------------|--------------|
| Pressure: | 101KPa | Phase : | L |
| Test Mode: | Mode 13 | Test Voltage : | AC 120V/60Hz |

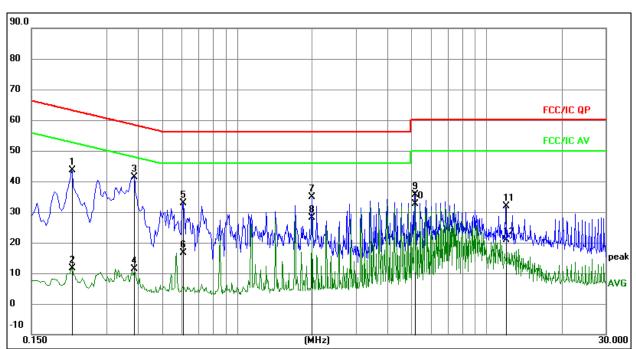


Remark:

All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.

| | | tion Loss + C | | | | | | 1 |
|---------|---------|---------------|------------------|-------------------|------------------|-------|--------|----------|
| 3. Meas | urement | = Reading L | evel + Correc. | t Factor | | | | 1 |
| 4. Over | = Measu | rement - Lim | nit | | | | | |
| No | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | |
| | IVIIX. | | Level | | | | | |
| | | MHz | | dB | dBuV | dBuV | dB | Detector |
| 1 | | 0.2174 | 23.44 | 20.07 | 43.51 | 62.92 | -19.41 | QP |
| 2 | | 0.2174 | -8.37 | 20.07 | 11.70 | 52.92 | -41.22 | AVG |
| 3 | * | 0.3871 | 21.33 | 20.08 | 41.41 | 58.13 | -16.72 | QP |
| 4 | | 0.3871 | -8.63 | 20.08 | 11.45 | 48.13 | -36.68 | AVG |
| 5 | | 0.6075 | 12.89 | 20.09 | 32.98 | 56.00 | -23.02 | QP |
| 6 | | 0.6075 | -3.53 | 20.09 | 16.56 | 46.00 | -29.44 | AVG |
| 7 | | 1.9906 | 14.68 | 20.10 | 34.78 | 56.00 | -21.22 | QP |
| 8 | | 1.9906 | 8.08 | 20.10 | 28.18 | 46.00 | -17.82 | AVG |
| 9 | | 5.1390 | 15.46 | 20.15 | 35.61 | 60.00 | -24.39 | QP |
| 10 | | 5.1390 | 12.53 | 20.15 | 32.68 | 50.00 | -17.32 | AVG |
| 11 | | 11.9328 | 11.64 | 20.22 | 31.86 | 60.00 | -28.14 | QP |
| 12 | | 11.9328 | 0.66 | 20.22 | 20.88 | 50.00 | -29.12 | AVG |



| Temperature: | 24.3 ℃ | Relative Humidity: | 52% |
|--------------|---------------|--------------------|--------------|
| Pressure: | 101KPa | Phase : | Ν |
| Test Mode: | Mode 13 | Test Voltage : | AC 120V/60Hz |

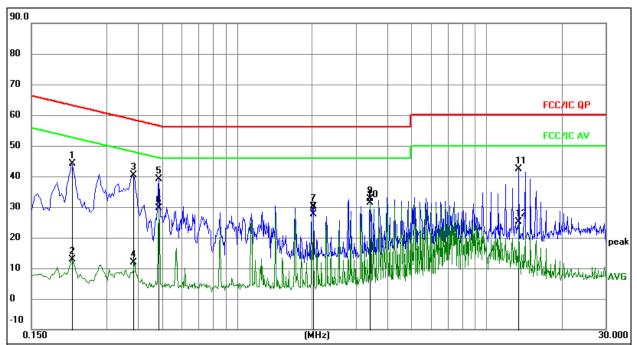

Remark:

All readings are Quasi-Peak and Average values.
 Factor = Insertion Loss + Cable Loss.
 Measurement = Reading Level + Correct Factor
 Over = Measurement - Limit


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | |
|-----|-----|---------|------------------|-------------------|------------------|-------|--------|----------|
| | | MHz | | dB | dBuV | dBuV | dB | Detector |
| 1 | | 0.2174 | 23.98 | 20.07 | 44.05 | 62.92 | -18.87 | QP |
| 2 | | 0.2174 | -7.22 | 20.07 | 12.85 | 52.92 | -40.07 | AVG |
| 3 | | 0.3832 | 20.29 | 20.08 | 40.37 | 58.21 | -17.84 | QP |
| 4 | | 0.3832 | -8.32 | 20.08 | 11.76 | 48.21 | -36.45 | AVG |
| 5 | | 0.4863 | 19.03 | 20.08 | 39.11 | 56.23 | -17.12 | QP |
| 6 | | 0.4863 | 9.61 | 20.08 | 29.69 | 46.23 | -16.54 | AVG |
| 7 | | 2.0225 | 9.95 | 20.10 | 30.05 | 56.00 | -25.95 | QP |
| 8 | | 2.0225 | 7.55 | 20.10 | 27.65 | 46.00 | -18.35 | AVG |
| 9 | | 3.4174 | 12.55 | 20.13 | 32.68 | 56.00 | -23.32 | QP |
| 10 | * | 3.4174 | 11.22 | 20.13 | 31.35 | 46.00 | -14.65 | AVG |
| 11 | | 13.4792 | 22.01 | 20.27 | 42.28 | 60.00 | -17.72 | QP |
| 12 | | 13.4792 | 4.76 | 20.27 | 25.03 | 50.00 | -24.97 | AVG |




7. Radiated Emissions

7.1 Block Diagram Of Test Setup

(A) Radiated Emission Test-Up Frequency Below 30MHz

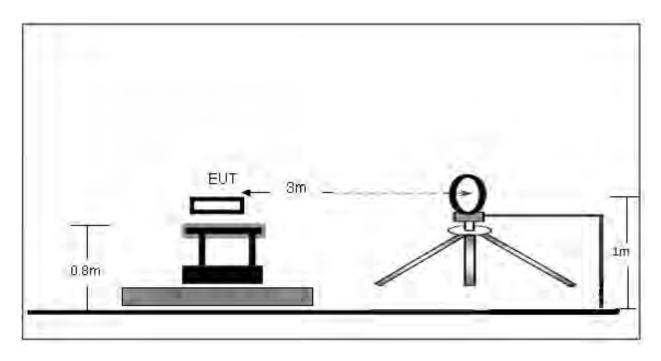




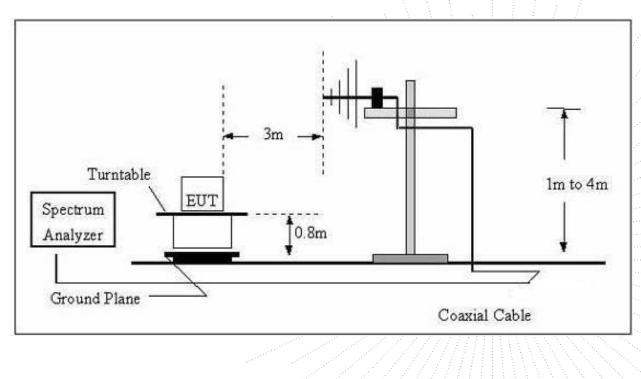



(C) Radiated Emission Test-Up Frequency Above 1GHz

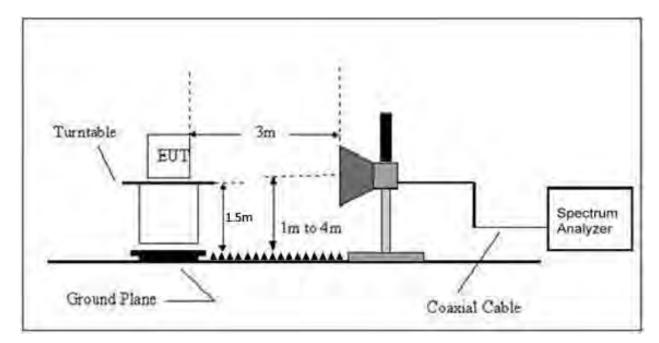

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequency | Field Strength | Distance | Field Strength Lir | nit at 3m Distance |
|---------------|----------------|----------|---------------------|--------------------------------------|
| (MHz) | uV/m | (m) | uV/m | dBuV/m |
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 | 10000 * 2400/F(kHz) | 20log ^{(2400/F(kHz))} + 80 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 | 100 * 24000/F(kHz) | 20log ^{(24000/F(kHz))} + 40 |
| 1.705 ~ 30 | 30 | 30 | 100 * 30 | 20log ⁽³⁰⁾ + 40 |
| 30 ~ 88 | 100 | 3 | 100 | 20log ⁽¹⁰⁰⁾ |
| 88 ~ 216 | 150 | 3 | 150 | 20log ⁽¹⁵⁰⁾ |
| 216 ~ 960 | 200 | 3 | 200 | 20log ⁽²⁰⁰⁾ |
| Above 960 | 500 | 3 | 500 | 20log ⁽⁵⁰⁰⁾ |

Limits Of Radiated Emission Measurement (Above 1000MHz)

| | Limit (dBuV/m) (at 3M) | | |
|-----------------|------------------------|---------|--|
| Frequency (MHz) | Peak | Average | |
| Above 1000 | | 54 | |

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).



Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1)through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

7.3 Test procedure

| Receiver Parameter | Setting |
|--------------------|-------------------|
| Attenuation | Auto |
| 9kHz~150kHz | RBW 200Hz for QP |
| 150kHz~30MHz | RBW 9kHz for QP |
| 30MHz~1000MHz | RBW 120kHz for QP |

| Spectrum Parameter | Setting |
|--------------------|--|
| 1-25GHz | RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average |

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.



Above 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the middlest channel, the Highest channel. Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

| Temperature: | 25.8 ℃ | Relative Humidity: | 54% |
|--------------|---------------|--------------------|---|
| Pressure: | 101KPa | Test Voltage : | AC 120V/60Hz |
| Test Mode: | Mode 13 | Polarization : | NH-NI <i>II//////////////////////////////////</i> |

| Freq. | Reading | Limit | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB) | P/F |
| | | | | PASS |
| | | | | PASS |
| | | | | |

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



| Temperature: | 25.8℃ | Relative Humidity: | 54% |
|--------------|--------------|--------------------|--------------|
| Pressure: | 101KPa | Phase : | Horizontal |
| Test Mode: | Mode 13 | Test Voltage : | AC 120V/60Hz |



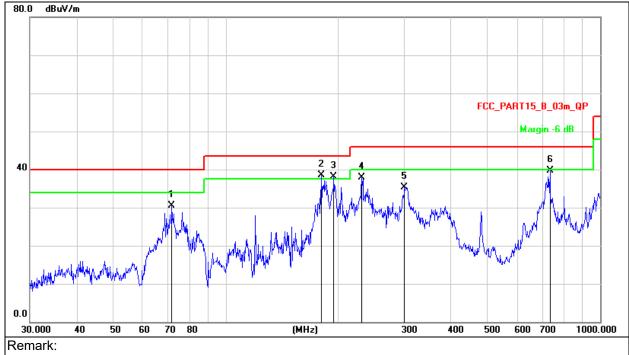


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| 10 | 2. Measurement = Reading Level + Correct Factor | |
|----|---|--|
| I | V = V = 0 | |
| 12 | | |
| | | |

| | 2. Measurement = Reading Level + Correct Factor 3. Over = Measurement - Limit | | | | | | | | |
|---|--|----|----------|------------------|-------------------|------------------|-------|--------|----------|
| N | lo. | Mk | . Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | |
| | | | MHz | dBuV | dB | dBuV/m | dB/m | dB | Detector |
| | 1 | | 71.8320 | 48.78 | -18.32 | 30.46 | 40.00 | -9.54 | QP |
| | 2 | * | 180.0165 | 55.74 | -17.20 | 38.54 | 43.50 | -4.96 | QP |
| | 3 | İ | 194.4534 | 54.33 | -16.13 | 38.20 | 43.50 | -5.30 | QP |
| | 4 | | 230.9068 | 52.84 | -14.84 | 38.00 | 46.00 | -8.00 | QP |
| | 5 | | 300.3672 | 48.61 | -13.23 | 35.38 | 46.00 | -10.62 | QP |
| | 6 | | 734.4913 | 44.96 | -5.21 | 39.75 | 46.00 | -6.25 | QP |



| Temperature: | 25.8℃ | Relative Humidity: | 54% |
|--------------|--------------|--------------------|--------------|
| Pressure: | 101KPa | Phase : | Vertical |
| Test Mode: | Mode 13 | Test Voltage : | AC 120V/60Hz |

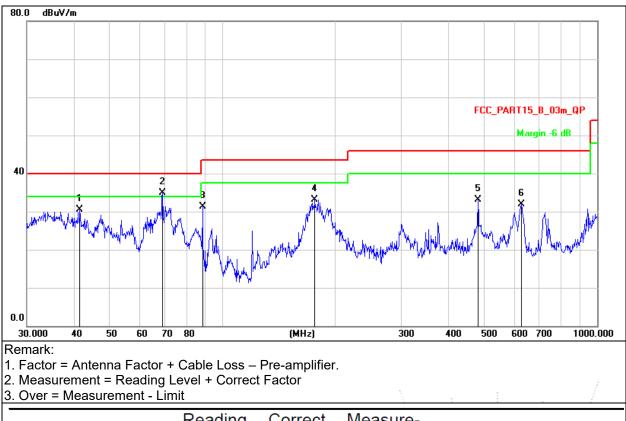

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Over | |
|-----|-----|----------|------------------|-------------------|------------------|-------|--------|----------|
| | | MHz | dBuV | dB | dBuV/m | dB/m | dB | Detector |
| 1 | | 41.5670 | 45.14 | -14.59 | 30.55 | 40.00 | -9.45 | QP |
| 2 | * | 69.1141 | 52.76 | -17.76 | 35.00 | 40.00 | -5.00 | QP |
| 3 | | 88.3421 | 49.18 | -17.79 | 31.39 | 43.50 | -12.11 | QP |
| 4 | | 176.2686 | 50.56 | -17.48 | 33.08 | 43.50 | -10.42 | QP |
| 5 | 4 | 480.5276 | 42.15 | -9.10 | 33.05 | 46.00 | -12.95 | QP |
| 6 | | 627.2738 | 38.53 | -6.55 | 31.98 | 46.00 | -14.02 | QP |
| | | | | | | | | |



| Polar | Fre- quency | Reading Level | Correct Factor | Measure- ment | Limits | Over | Detector |
|-------|----------------|------------------|-------------------|------------------|----------|--------|----------|
| (H/V) | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | Туре |
| | | | Low channe | el:2412MHz | | | |
| V | 4824.00 | 64.87 | -19.95 | 44.92 | 74.00 | -29.08 | PK |
| V | 4824.00 | 56.34 | -19.95 | 36.39 | 54.00 | -17.61 | AV |
| V | 7236.00 | 68.86 | -14.14 | 54.72 | 74.00 | -19.28 | PK |
| V | 7236.00 | 57.47 | -14.14 | 43.33 | 54.00 | -10.67 | AV |
| Н | 4824.00 | 66.06 | -19.95 | 46.11 | 74.00 | -27.89 | PK |
| Н | 4824.00 | 55.80 | -19.95 | 35.85 | 54.00 | -18.15 | AV |
| Н | 7236.00 | 68.15 | -14.14 | 54.01 | 74.00 | -19.99 | PK |
| Н | 7236.00 | 56.72 | -14.14 | 42.58 | 54.00 | -11.42 | AV |
| | | | Middle chani | nel:2437MHz | | | |
| V | 4874.00 | 69.31 | -19.85 | 49.46 | 74.00 | -24.54 | PK |
| V | 4874.00 | 57.97 | -19.85 | 38.12 | 54.00 | -15.88 | AV |
| V | 7311.00 | 67.69 | -13.93 | 53.76 | 74.00 | -20.24 | PK |
| V | 7311.00 | 58.15 | -13.93 | 44.22 | 54.00 | -9.78 | AV |
| Н | 4874.00 | 66.69 | -19.85 | 46.84 | 74.00 | -27.16 | PK |
| Н | 4874.00 | 54.95 | -19.85 | 35.10 | 54.00 | -18.90 | AV |
| Н | 7311.00 | 67.62 | -13.93 | 53.69 | 74.00 | -20.31 | PK |
| Н | 7311.00 | 57.58 | -13.93 | 43.65 | 54.00 | -10.35 | AV |
| | | | High chann | el:2462MHz | | | |
| V | 4924.00 | 64.21 | -19.75 | 44.46 | 74.00 | -29.54 | PK |
| V | 4924.00 | 57.88 | -19.75 | 38.13 | 54.00 | -15.87 | AV |
| V | 7386.00 | 68.82 | -13.72 | 55.10 | 74.00 | -18.90 | PK |
| V | 7386.00 | 59.14 | -13.72 | 45.42 | 54.00 | -8.58 | AV |
| Н | 4924.00 | 68.07 | -19.75 | 48.32 | 74.00 | -25.68 | PK |
| Н | 4924.00 | 56.35 | -19.75 | 36.60 | 54.00 | -17.40 | AV |
| Н | 7386.00 | 65.33 | -13.72 | 51.61 | 74.00 | -22.39 | PK |
| Н | 7386.00 | 54.56 | -13.72 | 40.84 | 54.00 | -13.16 | AV |

Between 1GHz – 25GHz **802.11b**

Remark:

1. Measurement = Reading Level + Correct Factor,

Correct Factor = Antenna Factor + Cable Loss - Pre-amplifier,

Over= Measurement – Limit

2.If peak below the average limit, the average emission was no test.

In restricted bands of operation, The spurious emission was no test.
 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
 The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. The worst case is Antenna A.



802.11g

| Polar | Fre- quency | Reading Level | Correct Factor | Measure- ment | Limits | Over | Detector |
|-------|----------------|------------------|-------------------|------------------|----------|--------|----------|
| (H/V) | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | Туре |
| | | | Low channe | el:2412MHz | | | |
| V | 4824.00 | 67.36 | -19.95 | 47.41 | 74.00 | -26.59 | PK |
| V | 4824.00 | 54.72 | -19.95 | 34.77 | 54.00 | -19.23 | AV |
| V | 7236.00 | 64.44 | -14.14 | 50.30 | 74.00 | -23.70 | PK |
| V | 7236.00 | 55.96 | -14.14 | 41.82 | 54.00 | -12.18 | AV |
| Н | 4824.00 | 66.79 | -19.95 | 46.84 | 74.00 | -27.16 | PK |
| Н | 4824.00 | 57.45 | -19.95 | 37.50 | 54.00 | -16.50 | AV |
| Н | 7236.00 | 65.98 | -14.14 | 51.84 | 74.00 | -22.16 | PK |
| Н | 7236.00 | 59.20 | -14.14 | 45.06 | 54.00 | -8.94 | AV |
| | | | Middle chan | nel:2437MHz | | | |
| V | 4874.00 | 68.69 | -19.85 | 48.84 | 74.00 | -25.16 | PK |
| V | 4874.00 | 57.80 | -19.85 | 37.95 | 54.00 | -16.05 | AV |
| V | 7311.00 | 64.04 | -13.93 | 50.11 | 74.00 | -23.89 | PK |
| V | 7311.00 | 59.09 | -13.93 | 45.16 | 54.00 | -8.84 | AV |
| Н | 4874.00 | 66.10 | -19.85 | 46.25 | 74.00 | -27.75 | PK |
| Н | 4874.00 | 59.27 | -19.85 | 39.42 | 54.00 | -14.58 | AV |
| Н | 7311.00 | 66.63 | -13.93 | 52.70 | 74.00 | -21.30 | PK |
| Н | 7311.00 | 58.28 | -13.93 | 44.35 | 54.00 | -9.65 | AV |
| | | | High chann | el:2462MHz | | | |
| V | 4924.00 | 64.23 | -19.75 | 44.48 | 74.00 | -29.52 | PK |
| V | 4924.00 | 54.95 | -19.75 | 35.20 | 54.00 | -18.80 | AV |
| V | 7386.00 | 67.51 | -13.72 | 53.79 | 74.00 | -20.21 | PK |
| V | 7386.00 | 57.11 | -13.72 | 43.39 | 54.00 | -10.61 | AV |
| Н | 4924.00 | 67.94 | -19.75 | 48.19 | 74.00 | -25.81 | PK |
| Н | 4924.00 | 54.11 | -19.75 | 34.36 | 54.00 | -19.64 | AV |
| Н | 7386.00 | 64.41 | -13.72 | 50.69 | 74.00 | -23.31 | PK |
| Н | 7386.00 | 59.16 | -13.72 | 45.44 | 54.00 | -8.56 | AV |

Remark:

1. Measurement = Reading Level + Correct Factor,

Correct Factor = Antenna Factor + Cable Loss - Pre-amplifier,

Over= Measurement – Limit

2.If peak below the average limit, the average emission was no test.

In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
 The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. The worst case is Antenna A.



802.11n20

| Polar | Fre- quency | Reading Level | Correct Factor | Measure- ment | Limits | Over | Detector |
|-------|----------------|------------------|-------------------|------------------|----------|--------|----------|
| (H/V) | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | Туре |
| | | | Low channe | el:2412MHz | | | |
| V | 4824.00 | 65.02 | -19.95 | 45.07 | 74.00 | -28.93 | PK |
| V | 4824.00 | 54.83 | -19.95 | 34.88 | 54.00 | -19.12 | AV |
| V | 7236.00 | 65.01 | -14.14 | 50.87 | 74.00 | -23.13 | PK |
| V | 7236.00 | 56.06 | -14.14 | 41.92 | 54.00 | -12.08 | AV |
| Н | 4824.00 | 69.21 | -19.95 | 49.26 | 74.00 | -24.74 | PK |
| Н | 4824.00 | 56.67 | -19.95 | 36.72 | 54.00 | -17.28 | AV |
| Н | 7236.00 | 70.00 | -14.14 | 55.86 | 74.00 | -18.14 | PK |
| Н | 7236.00 | 59.35 | -14.14 | 45.21 | 54.00 | -8.79 | AV |
| | | | Middle chan | nel:2437MHz | | | |
| V | 4874.00 | 67.52 | -19.85 | 47.67 | 74.00 | -26.33 | PK |
| V | 4874.00 | 57.58 | -19.85 | 37.73 | 54.00 | -16.27 | AV |
| V | 7311.00 | 67.76 | -13.93 | 53.83 | 74.00 | -20.17 | PK |
| V | 7311.00 | 58.28 | -13.93 | 44.35 | 54.00 | -9.65 | AV |
| Н | 4874.00 | 68.22 | -19.85 | 48.37 | 74.00 | -25.63 | PK |
| Н | 4874.00 | 57.36 | -19.85 | 37.51 | 54.00 | -16.49 | AV |
| Н | 7311.00 | 69.52 | -13.93 | 55.59 | 74.00 | -18.41 | PK |
| Н | 7311.00 | 59.58 | -13.93 | 45.65 | 54.00 | -8.35 | AV |
| | | | High chann | el:2462MHz | | | |
| V | 4924.00 | 64.80 | -19.75 | 45.05 | 74.00 | -28.95 | PK |
| V | 4924.00 | 56.78 | -19.75 | 37.03 | 54.00 | -16.97 | AV |
| V | 7386.00 | 67.37 | -13.72 | 53.65 | 74.00 | -20.35 | PK |
| V | 7386.00 | 59.90 | -13.72 | 46.18 | 54.00 | -7.82 | AV |
| Н | 4924.00 | 65.66 | -19.75 | 45.91 | 74.00 | -28.09 | PK |
| Н | 4924.00 | 58.26 | -19.75 | 38.51 | 54.00 | -15.49 | AV |
| Н | 7386.00 | 66.74 | -13.72 | 53.02 | 74.00 | -20.98 | PK |
| Н | 7386.00 | 55.60 | -13.72 | 41.88 | 54.00 | -12.12 | AV |

Remark:

1. Measurement = Reading Level + Correct Factor,

Correct Factor = Antenna Factor + Cable Loss - Pre-amplifier,

Over= Measurement – Limit

2.If peak below the average limit, the average emission was no test.

3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. Test Mode is MIMO Mode.



802.11n40

| Polar | Fre- quency | Reading Level | Correct Factor | Measure- ment | Limits | Over | Detector |
|-------|----------------|------------------|-------------------|------------------|----------|--------|----------|
| (H/V) | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | Туре |
| | | | Low channe | el:2422MHz | | | |
| V | 4844.00 | 67.37 | -19.91 | 47.46 | 74.00 | -26.54 | PK |
| V | 4844.00 | 59.94 | -19.91 | 40.03 | 54.00 | -13.97 | AV |
| V | 7266.00 | 65.62 | -14.06 | 51.56 | 74.00 | -22.44 | PK |
| V | 7266.00 | 56.50 | -14.06 | 42.44 | 54.00 | -11.56 | AV |
| Н | 4844.00 | 64.82 | -19.91 | 44.91 | 74.00 | -29.09 | PK |
| Н | 4844.00 | 58.94 | -19.91 | 39.03 | 54.00 | -14.97 | AV |
| Н | 7266.00 | 64.61 | -14.06 | 50.55 | 74.00 | -23.45 | PK |
| Н | 7266.00 | 57.62 | -14.06 | 43.56 | 54.00 | -10.44 | AV |
| | | | Middle chan | nel:2437MHz | | | |
| V | 4874.00 | 65.05 | -19.85 | 45.20 | 74.00 | -28.80 | PK |
| V | 4874.00 | 59.76 | -19.85 | 39.91 | 54.00 | -14.09 | AV |
| V | 7311.00 | 67.66 | -13.93 | 53.73 | 74.00 | -20.27 | PK |
| V | 7311.00 | 56.15 | -13.93 | 42.22 | 54.00 | -11.78 | AV |
| Н | 4874.00 | 66.14 | -19.85 | 46.29 | 74.00 | -27.71 | PK |
| Н | 4874.00 | 56.34 | -19.85 | 36.49 | 54.00 | -17.51 | AV |
| Н | 7311.00 | 65.47 | -13.93 | 51.54 | 74.00 | -22.46 | PK |
| Н | 7311.00 | 56.58 | -13.93 | 42.65 | 54.00 | -11.35 | AV |
| | | | High chann | el:2452MHz | | | |
| V | 4904.00 | 69.23 | -19.79 | 49.44 | 74.00 | -24.56 | PK |
| V | 4904.00 | 59.79 | -19.79 | 40.00 | 54.00 | -14.00 | AV |
| V | 7356.00 | 67.40 | -13.80 | 53.60 | 74.00 | -20.40 | PK |
| V | 7356.00 | 55.35 | -13.80 | 41.55 | 54.00 | -12.45 | AV |
| Н | 4904.00 | 66.70 | -19.79 | 46.91 | 74.00 | -27.09 | PK |
| Н | 4904.00 | 57.55 | -19.79 | 37.76 | 54.00 | -16.24 | AV |
| Н | 7356.00 | 65.67 | -13.80 | 51.87 | 74.00 | -22.13 | PK |
| Н | 7356.00 | 54.64 | -13.80 | 40.84 | 54.00 | -13.16 | AV |

Remark:

1. Measurement = Reading Level + Correct Factor,

Correct Factor = Antenna Factor + Cable Loss - Pre-amplifier,

Over= Measurement – Limit

2.If peak below the average limit, the average emission was no test.

3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


5. Test Mode is MIMO Mode.



8. Radiated Band Emission Measurement And Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

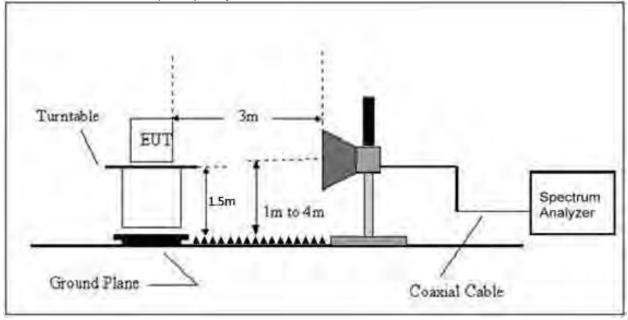

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|--------------------------|---------------------|---------------|------------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| ¹ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (²) |
| 13.36-13.41 | | | |



Limits Of Radiated Emission Measurement (Above 1000MHz)

| | Limit (dBu\ | //m) (at 3M) |
|-----------------|-------------|--------------|
| Frequency (MHz) | Peak | Average |
| Above 1000 | 74 | 54 |

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test procedure

| Receiver Parameter | Setting |
|---------------------------------------|--|
| Attenuation | Auto |
| Start Frequency | 2300MHz |
| Stop Frequency | 2520 |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

Above 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the middlest channel, the Highest channel. Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



8.5 Test Result

| | Polar (H/V) | Fre- quency | Reading Level | Correct Factor | Measure- ment (dBuV/m) | Meas ment (d | sure- BuV/m) | Over | Result |
|---------|----------------|----------------|------------------|-------------------|------------------------------|-----------------|-----------------|--------|--------|
| | . , | (MHz) | (dBuV/m) | (dB) | PK | PK | AV | PK | |
| | | | | Low Cha | annel 2412M | Hz | | | |
| | Н | 2390.00 | 74.56 | -25.43 | 49.13 | 74.00 | 54.00 | -24.87 | PASS |
| | Н | 2400.00 | 70.96 | -25.40 | 45.56 | 74.00 | 54.00 | -28.44 | PASS |
| | V | 2390.00 | 75.94 | -25.43 | 50.51 | 74.00 | 54.00 | -23.49 | PASS |
| 802.11b | V | 2400.00 | 74.38 | -25.40 | 48.98 | 74.00 | 54.00 | -25.02 | PASS |
| 002.110 | | - | | High Cha | annel 2462M | Hz | | | |
| | Н | 2483.50 | 75.22 | -25.15 | 50.07 | 74.00 | 54.00 | -23.93 | PASS |
| | Н | 2500.00 | 74.67 | -25.10 | 49.57 | 74.00 | 54.00 | -24.43 | PASS |
| | V | 2483.50 | 75.44 | -25.15 | 50.29 | 74.00 | 54.00 | -23.71 | PASS |
| | V | 2500.00 | 72.03 | -25.10 | 46.93 | 74.00 | 54.00 | -27.07 | PASS |
| | | | | Low Cha | annel 2412M | Hz | | | |
| | Н | 2390.00 | 71.29 | -25.43 | 45.86 | 74.00 | 54.00 | -28.14 | PASS |
| | Н | 2400.00 | 73.30 | -25.40 | 47.90 | 74.00 | 54.00 | -26.10 | PASS |
| | V | 2390.00 | 75.68 | -25.43 | 50.25 | 74.00 | 54.00 | -23.75 | PASS |
| 802.11g | V | 2400.00 | 76.53 | -25.40 | 51.13 | 74.00 | 54.00 | -22.87 | PASS |
| 002.11Y | | | | High Cha | annel 2462M | Hz | | | |
| | Н | 2483.50 | 77.70 | -25.15 | 52.55 | 74.00 | 54.00 | -21.45 | PASS |
| | Н | 2500.00 | 74.85 | -25.10 | 49.75 | 74.00 | 54.00 | -24.25 | PASS |
| | V | 2483.50 | 75.04 | -25.15 | 49.89 | 74.00 | 54.00 | -24.11 | PASS |
| | V | 2500.00 | 69.24 | -25.10 | 44.14 | 74.00 | 54.00 | -29.86 | PASS |

Remark:

1. Measurement = Reading Level + Correct Factor,

Correct Factor = Antenna Factor + Cable Loss - Pre-amplifier,

Over= Measurement - Limit

2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. The worst case is Antenna A.



| | Polar (H/V) | Fre- quency | Reading Level | Correct Factor | Measure- ment (dBuV/m) | Meas ment (d | | Over | Result | | | | |
|--------|----------------|---------------------|------------------|-------------------|------------------------------|-----------------|-------|--------|--------|--|--|--|--|
| | 、 | (MHz) | (dBuV/m) | (dB) | PK | PK | AV | PK | | | | | |
| | | Low Channel 2412MHz | | | | | | | | | | | |
| | Н | 2390.00 | 74.19 | -25.43 | 48.76 | 74.00 | 54.00 | -25.24 | PASS | | | | |
| | Н | 2400.00 | 70.20 | -25.40 | 44.80 | 74.00 | 54.00 | -29.20 | PASS | | | | |
| | V | 2390.00 | 71.71 | -25.43 | 46.28 | 74.00 | 54.00 | -27.72 | PASS | | | | |
| 802.11 | V | 2400.00 | 76.01 | -25.40 | 50.61 | 74.00 | 54.00 | -23.39 | PASS | | | | |
| n20 | | | | High Ch | annel 2462M | lHz | | | | | | | |
| | Н | 2483.50 | 75.47 | -25.15 | 50.32 | 74.00 | 54.00 | -23.68 | PASS | | | | |
| | Н | 2500.00 | 74.49 | -25.10 | 49.39 | 74.00 | 54.00 | -24.61 | PASS | | | | |
| | V | 2483.50 | 73.72 | -25.15 | 48.57 | 74.00 | 54.00 | -25.43 | PASS | | | | |
| | V | 2500.00 | 73.85 | -25.10 | 48.75 | 74.00 | 54.00 | -25.25 | PASS | | | | |
| | | | | Low Cha | annel 2422M | Hz | | | | | | | |
| | Н | 2390.00 | 72.10 | -25.43 | 46.67 | 74.00 | 54.00 | -27.33 | PASS | | | | |
| | Н | 2400.00 | 70.18 | -25.40 | 44.78 | 74.00 | 54.00 | -29.22 | PASS | | | | |
| | V | 2390.00 | 71.54 | -25.43 | 46.11 | 74.00 | 54.00 | -27.89 | PASS | | | | |
| 802.11 | V | 2400.00 | 72.96 | -25.40 | 47.56 | 74.00 | 54.00 | -26.44 | PASS | | | | |
| n40 | | | | High Ch | annel 2452M | lHz | | | | | | | |
| | Н | 2483.50 | 74.66 | -25.15 | 49.51 | 74.00 | 54.00 | -24.49 | PASS | | | | |
| | Н | 2500.00 | 72.95 | -25.10 | 47.85 | 74.00 | 54.00 | -26.15 | PASS | | | | |
| | V | 2483.50 | 72.97 | -25.15 | 47.82 | 74.00 | 54.00 | -26.18 | PASS | | | | |
| | V | 2500.00 | 69.82 | -25.10 | 44.72 | 74.00 | 54.00 | -29.28 | PASS | | | | |

Remark:

1. Measurement = Reading Level + Correct Factor,

Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,

Over= Measurement – Limit

2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. Test Mode is MIMO Mode.



9. Power Spectral Density Test

9.1 Block Diagram Of Test Setup



9.2 Limit

| | FCC Part15 (15.247) , Subpart C | | | | | | | | | |
|---------|---------------------------------|------------------------|--------------------------|--------|--|--|--|--|--|--|
| Section | Test Item | Limit | Frequency Range (MHz) | Result | | | | | | |
| 15.247 | Power Spectral Density | 8 dBm (in any 3KHz) | 2400-2483.5 | PASS | | | | | | |

Limits Of Radiated Emission Measurement (Above 1000MHz)

9.3 Test procedure

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS bandwidth.
- 3. Set the RBW to: 3 kHz
- 4. Set the VBW \geq 3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level within the RBW.

10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing. Note: Power Spectral Density(dBm)=Reading+Cable Loss

No.: BCTC/RF-EMC-005



9.5 Test Result

| Temperature | : 2 | 6 °C | | | Relative Hu | midity: | 54% | 54% | | |
|--------------|------|-------------|-----------------|-------------------|-------------|----------|-----------|-------|---------|--|
| Test Voltage | : D | C 3.3V | | | Remark: | | N/A | | | |
| Condition | Mode | Frequency | Conduc (dBm/ | ted PSD 10kHz) | Cond | ducted P | 6D (dBm/3 | skHz) | Verdict | |
| | | (MHz) | ANT A | ANT B | ANT A | ANT B | Total | Limit | | |
| NVNT | b | 2412 | -8.46 | -10.92 | -13.69 | -16.15 | / | 8 | Pass | |
| NVNT | b | 2437 | -8.12 | -10.75 | -13.35 | -15.98 | / | 8 | Pass | |
| NVNT | b | 2462 | -7.81 | -10.89 | -13.04 | -16.12 | / | 8 | Pass | |
| NVNT | g | 2412 | -12.24 | -14.42 | -17.47 | -19.65 | / | 8 | Pass | |
| NVNT | g | 2437 | -11.97 | -14.47 | -17.2 | -19.7 | / | 8 | Pass | |
| NVNT | g | 2462 | -11.64 | -14.59 | -16.87 | -19.82 | / | 8 | Pass | |
| NVNT | n20 | 2412 | -12.36 | -14.43 | -17.59 | -19.66 | -15.49 | 8 | Pass | |
| NVNT | n20 | 2437 | -12.15 | -14.41 | -17.38 | -19.64 | -15.35 | 8 | Pass | |
| NVNT | n20 | 2462 | -12.18 | -14.58 | -17.41 | -19.81 | -15.44 | 8 | Pass | |
| NVNT | n40 | 2422 | -15.66 | -18.61 | -20.89 | -23.84 | -19.11 | 8 | Pass | |
| NVNT | n40 | 2437 | -16.1 | -18.2 | -21.33 | -23.43 | -19.24 | 8 | Pass | |
| NVNT | n40 | 2452 | -15.52 | -17.68 | -20.75 | -22.91 | -18.69 | 8 | Pass | |

Note: Correction Factor = 10log(3KHz/RBW in measurement) =-5.23

No.: BCTC/RF-EMC-005

Page: 32 of 81



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.









No.: BCTC/RF-EMC-005




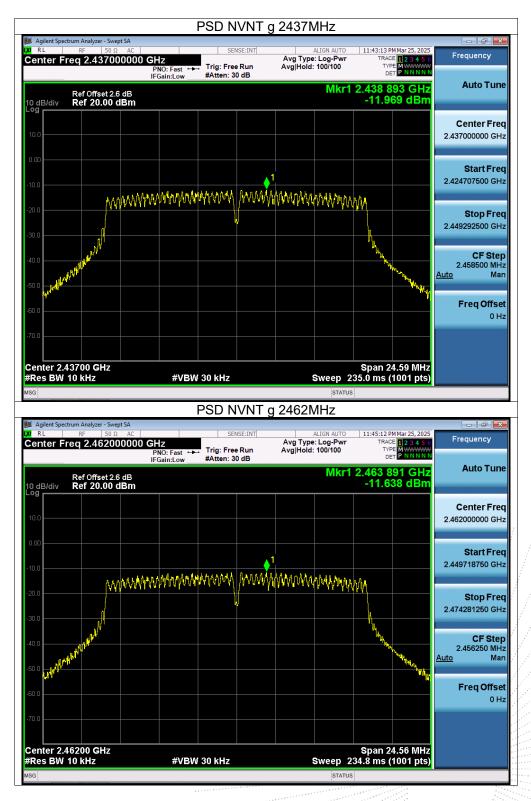




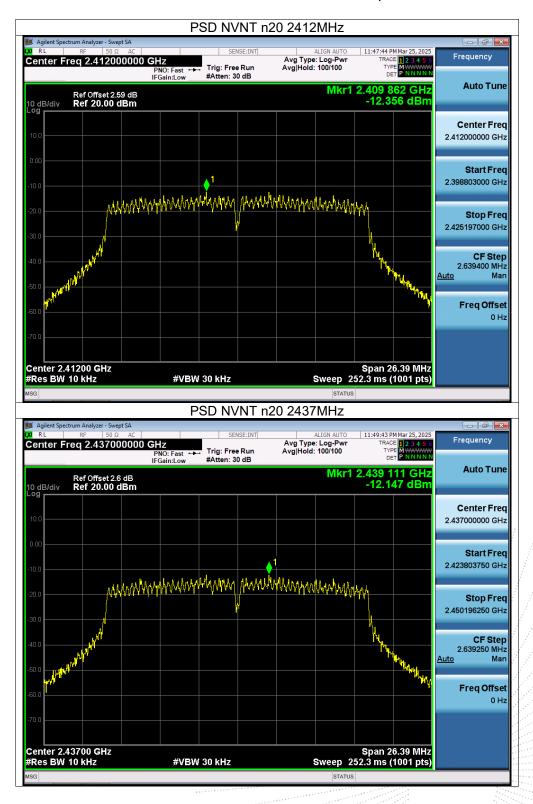



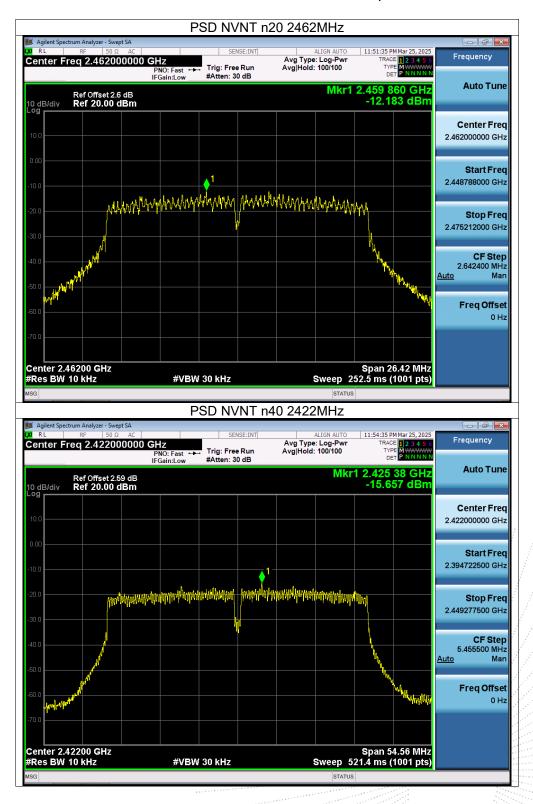



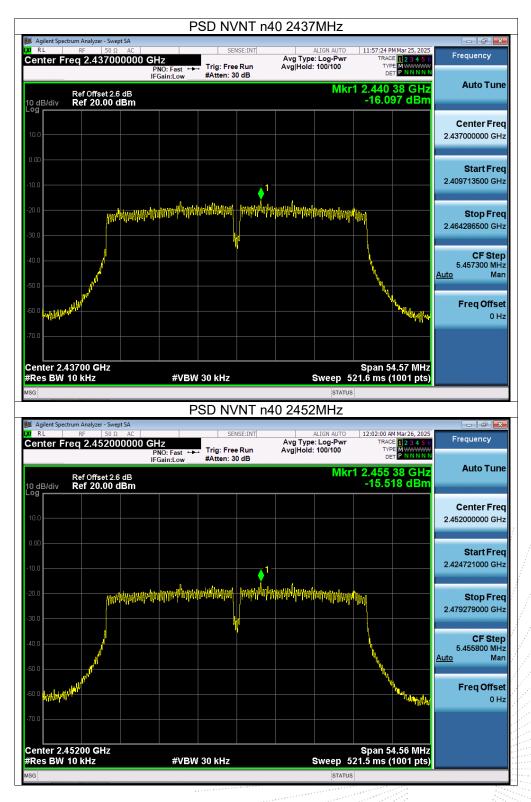



10. Bandwidth Test

10.1 Block Diagram Of Test Setup



10.2 Limit

| | | FCC Part15 (15.247) |) , Subpart C | |
|--------------|-----------|-------------------------------|--------------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.247(a)(2) | Bandwidth | >= 500KHz (-6dB bandwidth) | 2400-2483.5 | PASS |

10.3 Test procedure

- 1. Set RBW = 100 kHz.
- 2. Set the video bandwidth (VBW) \ge 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.

7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing. Note: Power Spectral Density(dBm)=Reading+Cable Loss

No.: BCTC/RF-EMC-005

Page: 39 of 81



10.5 Test Result

| Temperature: | 26 ℃ | Relative Humidity: | 54% |
|---------------|-------------|--------------------|-----|
| Test Voltage: | DC 3.3V | Remark: | N/A |


| Condition | Test Mode | Frequency | -6dB bandy | vidth (MHz) | | Result |
|-----------|-----------|-----------|------------|-------------|-------------|--------|
| Condition | Test Mode | (MHz) | Ant. A | Ant. B | Limit (MHz) | Result |
| NVNT | b | 2412 | 10.111 | 10.127 | 0.5 | Pass |
| NVNT | b | 2437 | 10.119 | 10.092 | 0.5 | Pass |
| NVNT | b | 2462 | 10.093 | 10.122 | 0.5 | Pass |
| NVNT | g | 2412 | 16.398 | 16.411 | 0.5 | Pass |
| NVNT | g | 2437 | 16.39 | 16.388 | 0.5 | Pass |
| NVNT | g | 2462 | 16.375 | 16.402 | 0.5 | Pass |
| NVNT | n20 | 2412 | 17.596 | 17.614 | 0.5 | Pass |
| NVNT | n20 | 2437 | 17.595 | 17.577 | 0.5 | Pass |
| NVNT | n20 | 2462 | 17.616 | 17.595 | 0.5 | Pass |
| NVNT | n40 | 2422 | 36.37 | 36.37 | 0.5 | Pass |
| NVNT | n40 | 2437 | 36.382 | 36.357 | 0.5 | Pass |
| NVNT | n40 | 2452 | 36.372 | 36.376 | 0.5 | Pass |

No.: BCTC/RF-EMC-005


Page: 40 of 81




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

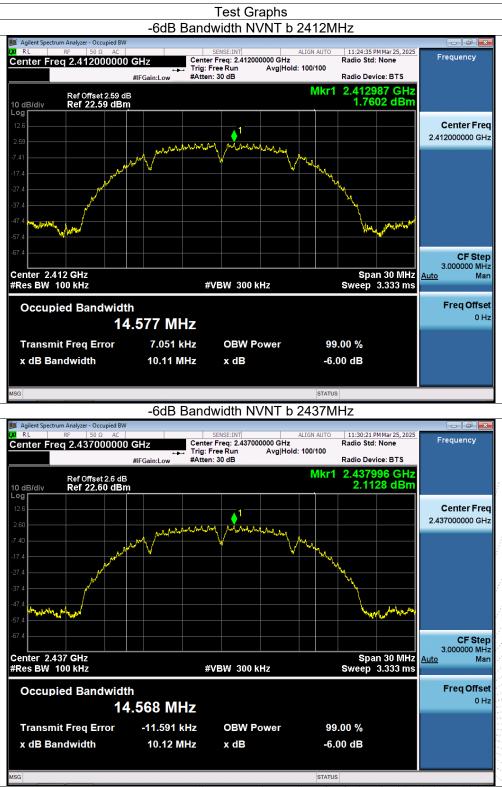




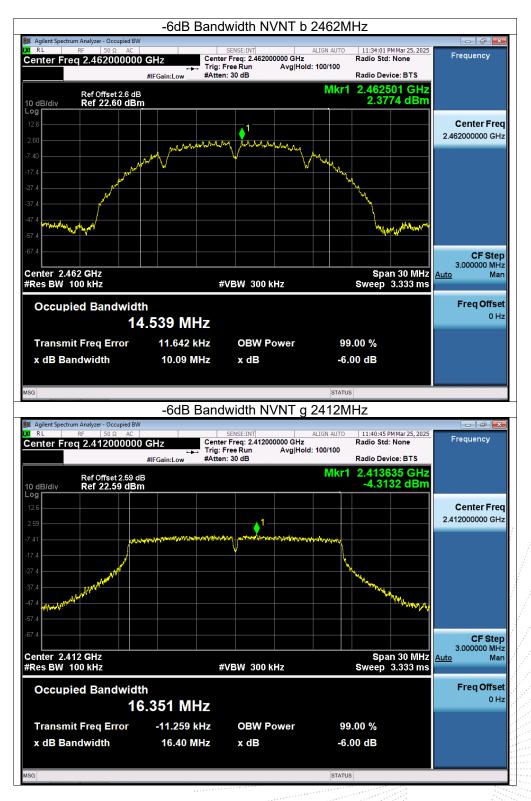




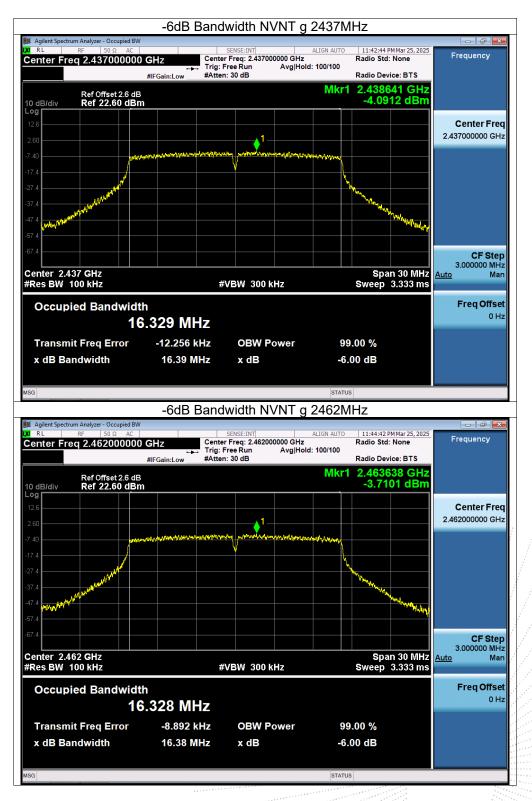




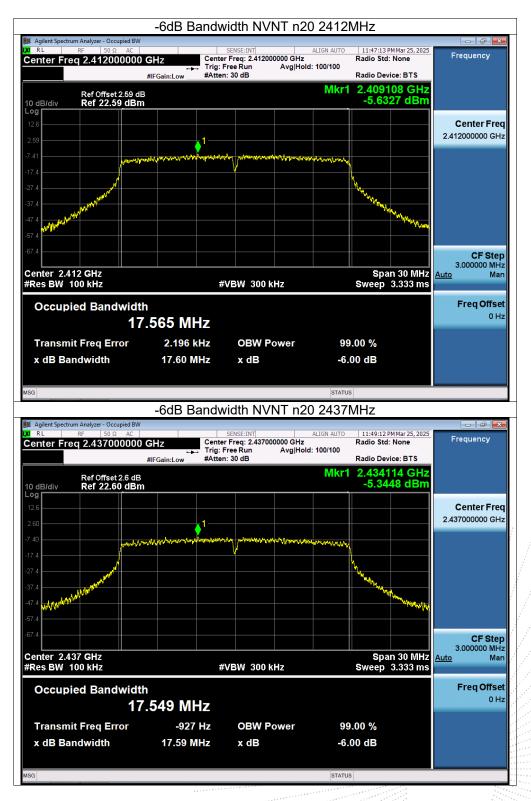



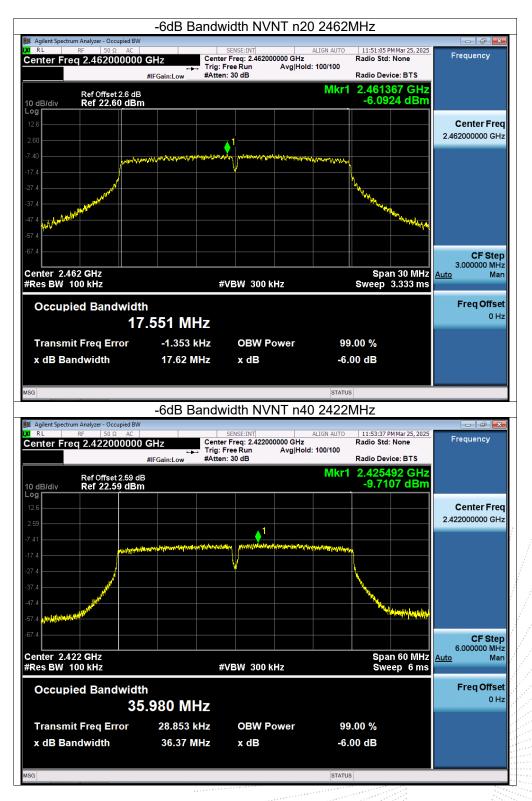



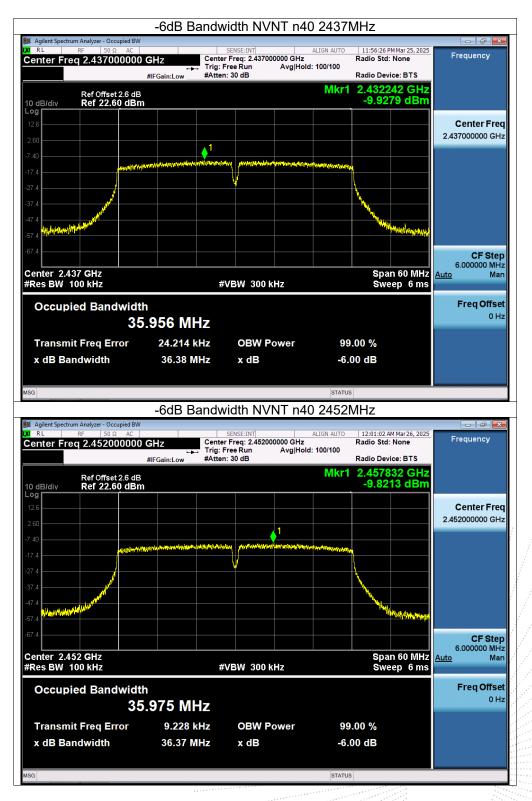



11. Peak Output Power Test

11.1 Block Diagram Of Test Setup



11.2 Limit

| | | FCC Part15 (15.247) , | Subpart C | |
|--------------|----------------------|-----------------------|--------------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.247(b)(3) | Peak Output Power | 1 watt or 30dBm | 2400-2483.5 | PASS |

11.3 Test Procedure

a. The EUT was directly connected to the Power meter

11.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing. Note: Power Spectral Density(dBm)=Reading+Cable Loss

No.: BCTC/RF-EMC-005

Page: 47 of 81



11.5 Test Result

| Temperature: | 26 ℃ | Relative Humidity: | 54% |
|---------------|-------------|--------------------|-----|
| Test Voltage: | DC 3.3V | Remark: | N/A |

| Condition | Mode | Frequency | Maximum Co | onducted Outp (dBm) | ut Power(PK) | Limit (dBm) |
|-----------|------|-----------|------------|------------------------|--------------|-------------|
| | | (MHz) | Ant A | Ant B | Total | |
| NVNT | b | 2412 | 14.74 | 12.34 | / | 30 |
| NVNT | b | 2437 | 15.07 | 12.43 | / | 30 |
| NVNT | b | 2462 | 15.38 | 12.32 | / | 30 |
| NVNT | g | 2412 | 12.32 | 10.26 | / | 30 |
| NVNT | g | 2437 | 12.62 | 10.14 | / | 30 |
| NVNT | g | 2462 | 12.95 | 10.02 | / | 30 |
| NVNT | n20 | 2412 | 10.86 | 8.77 | 12.95 | 30 |
| NVNT | n20 | 2437 | 11.07 | 8.65 | 13.04 | 30 |
| NVNT | n20 | 2462 | 10.96 | 8.58 | 12.94 | 30 |
| NVNT | n40 | 2422 | 10.18 | 7.66 | 12.11 | 30 |
| NVNT | n40 | 2437 | 10.02 | 7.41 | 11.92 | 30 |
| NVNT | n40 | 2452 | 10.08 | 8.56 | 12.40 | 30 |


No.: BCTC/RF-EMC-005

Page: 48 of 81



12. 100 kHz Bandwidth Of Frequency Band Edge

12.1 Block Diagram Of Test Setup



12.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

12.3 Test Procedure

Using the following spectrum analyzer setting:

a) Set the RBW = 100KHz.

b) Set the VBW = 300KHz.

c) Sweep time = auto couple.

d) Detector function = peak.

e) Trace mode = max hold.

f) Allow trace to fully stabilize.


12.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing. Note: Power Spectral Density(dBm)=Reading+Cable Loss



12.5 Test Result


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

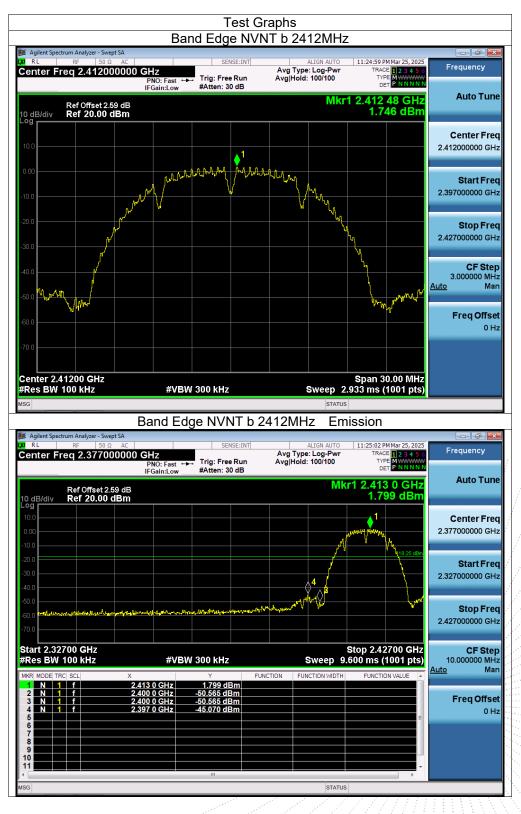








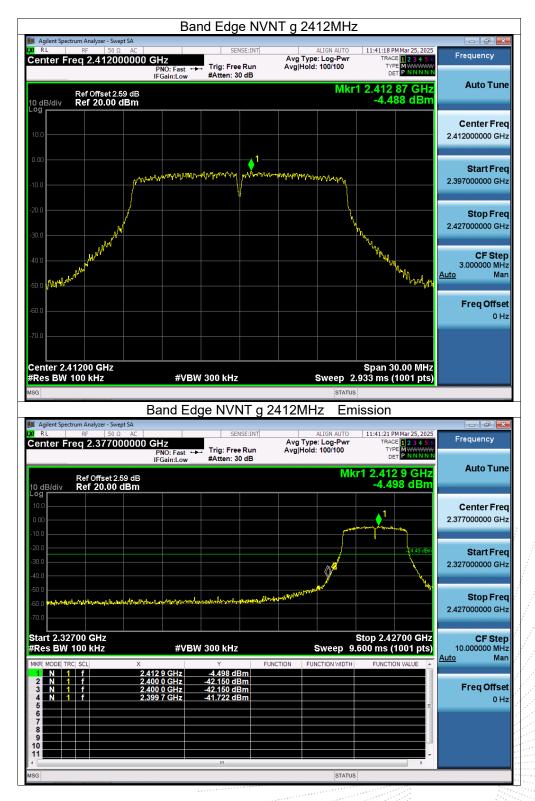









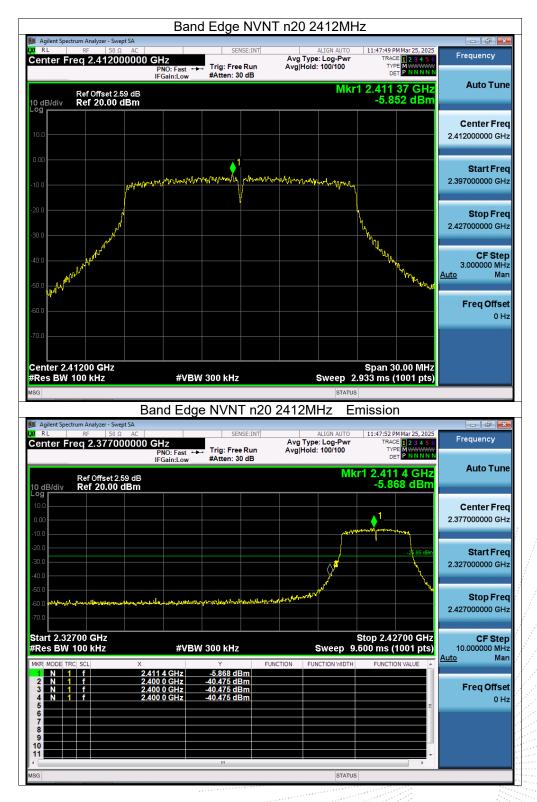




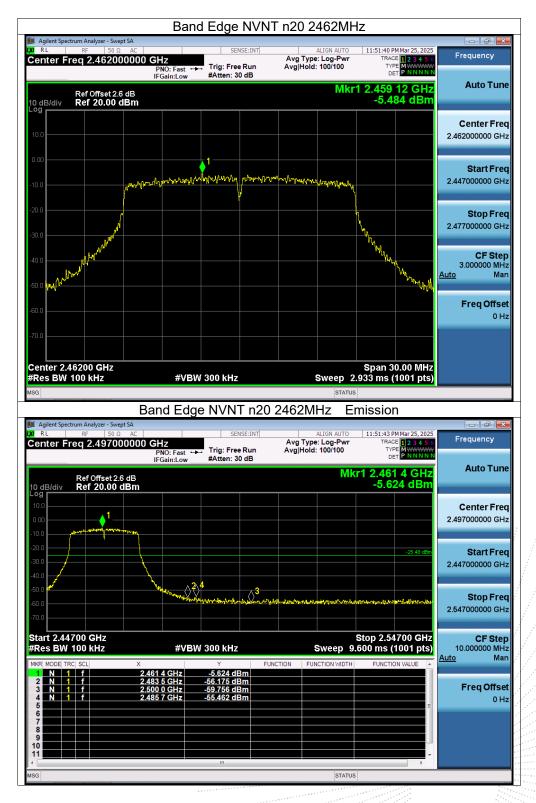



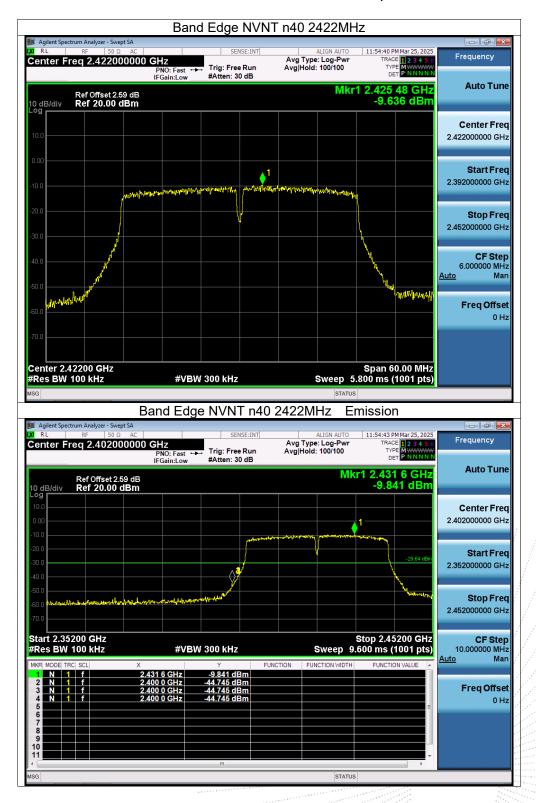




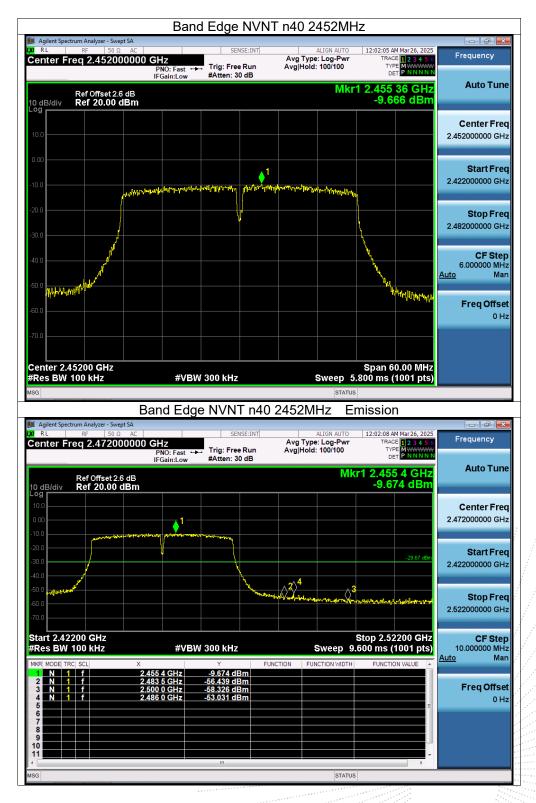



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

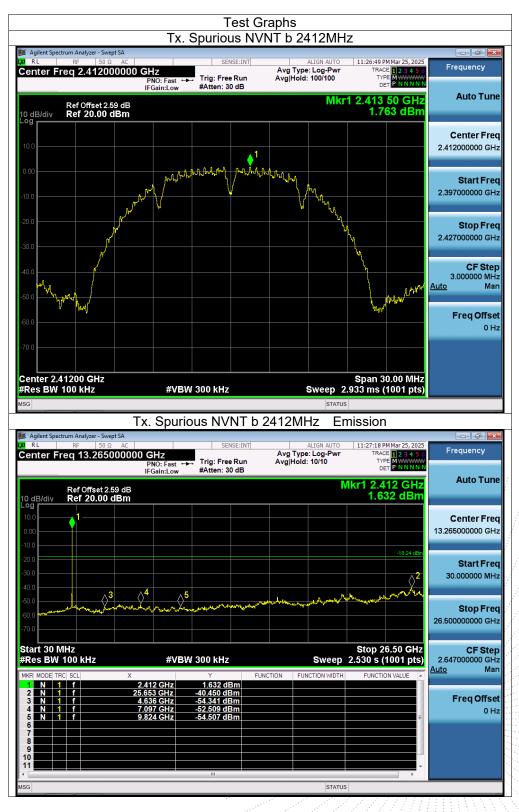














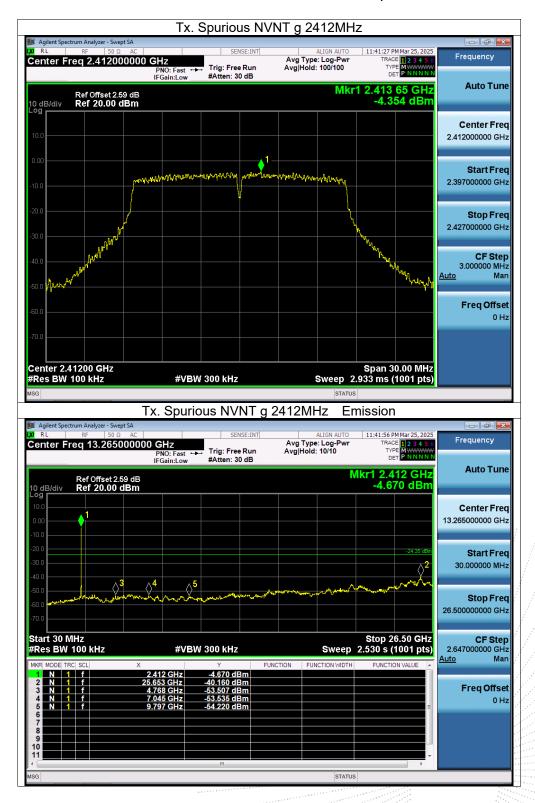




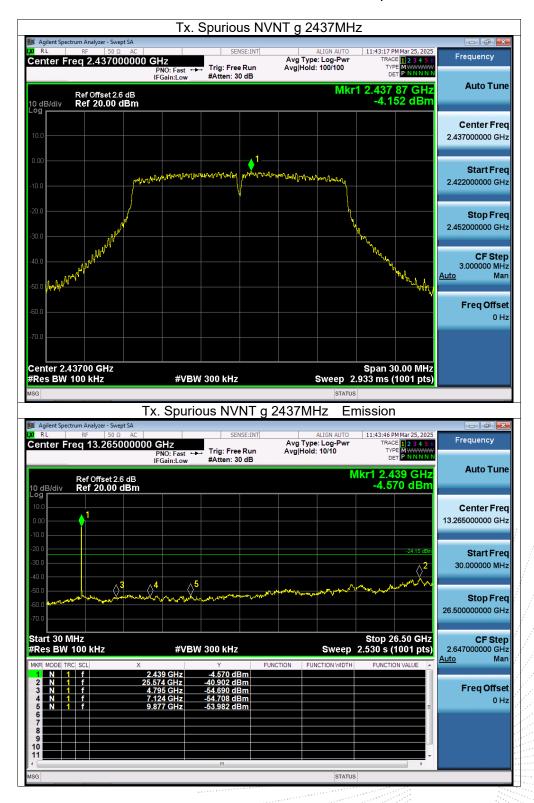




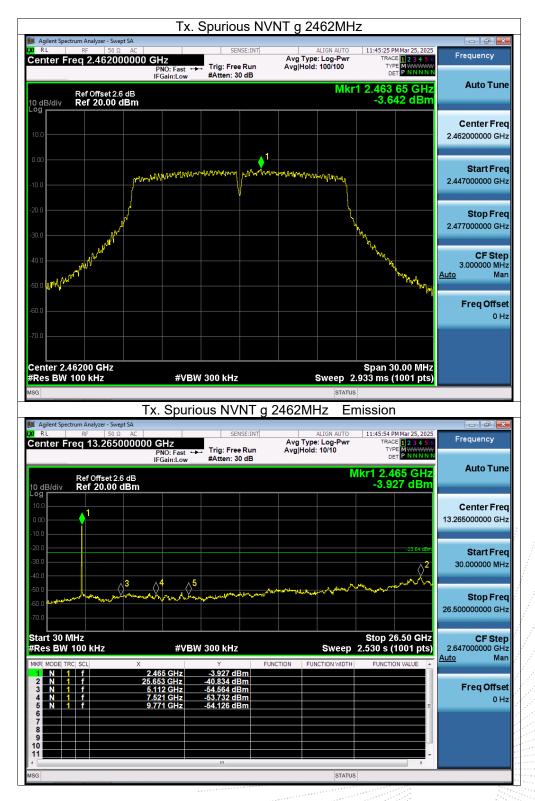




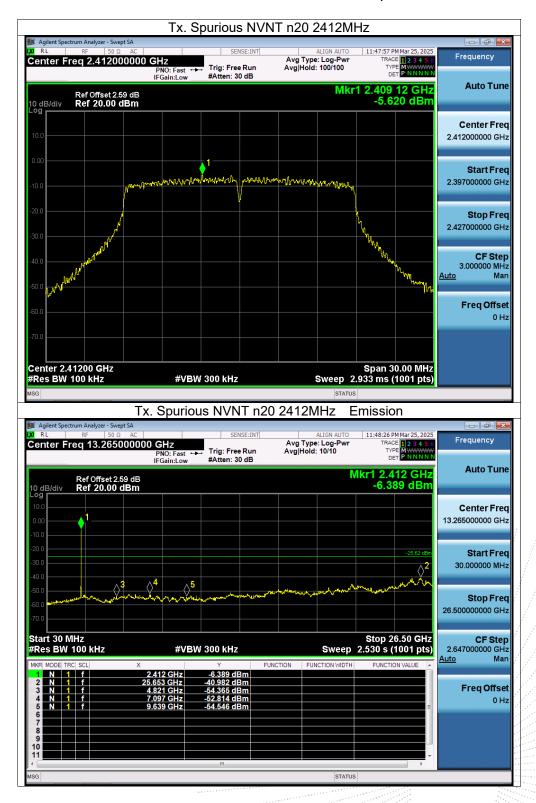




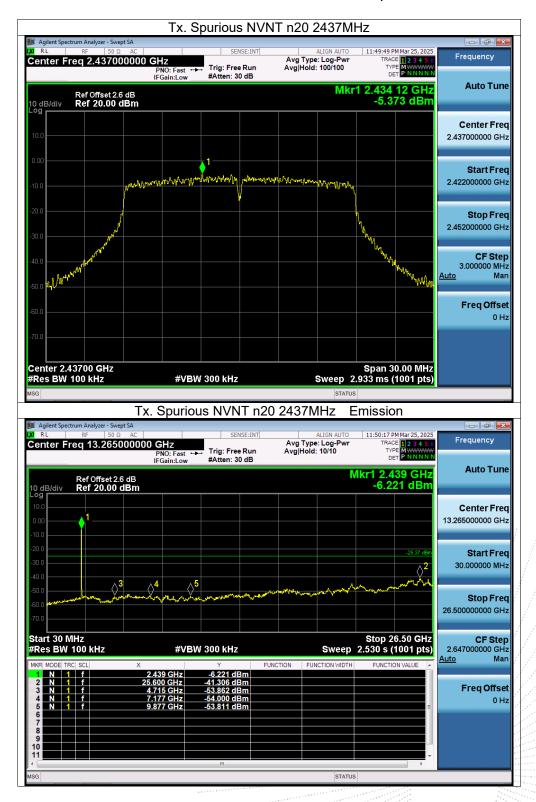




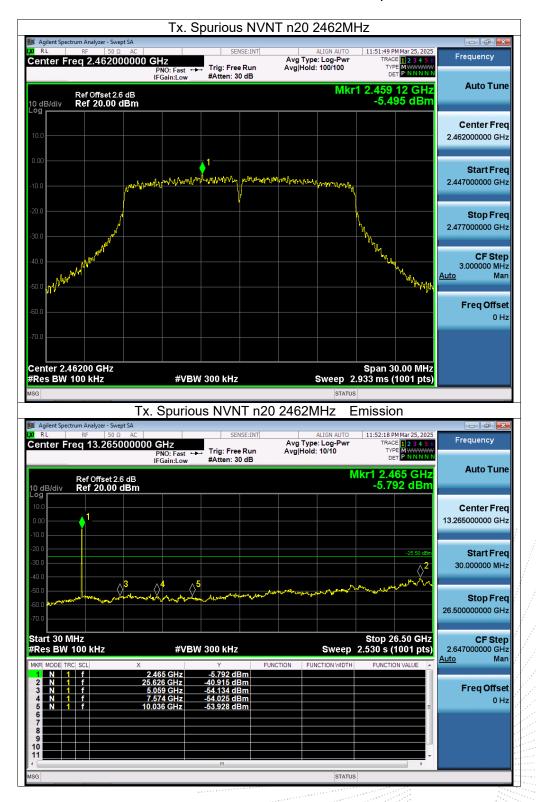




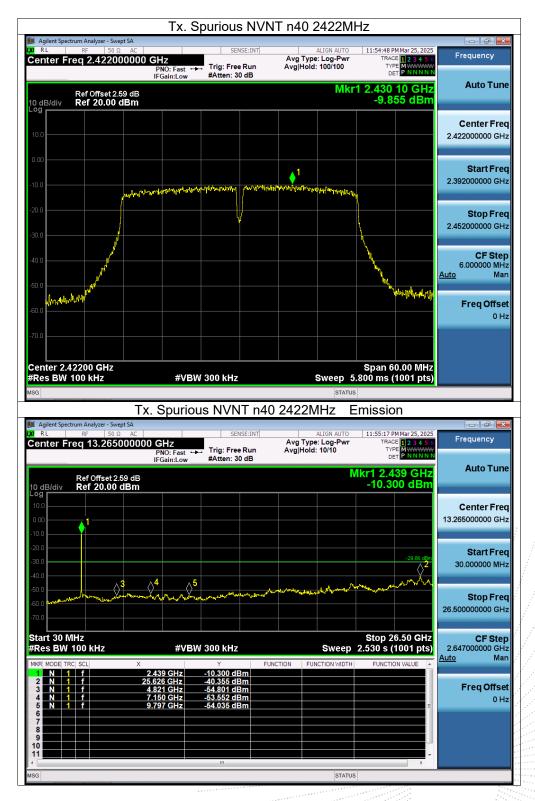



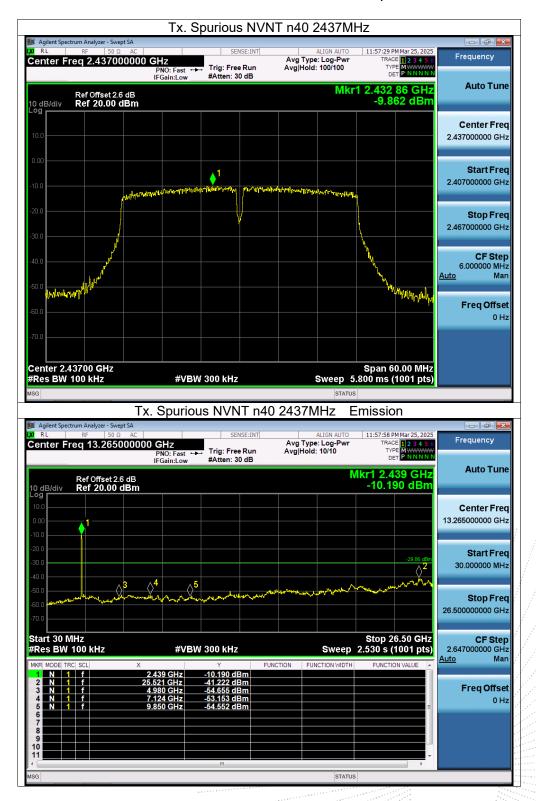



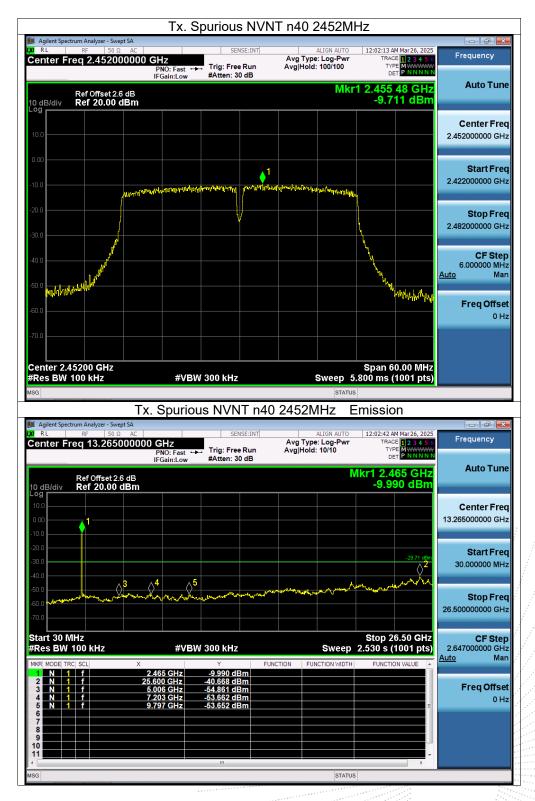



13. Duty Cycle Of Test Signal

13.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

13.2 Formula

Duty Cycle = Ton / (Ton+Toff)

13.3 Test Procedure

- 1.Set span = Zero 2. RBW = 8MHz
- 3. VBW = 8MHz,
- 4. Detector = Peak
- 13.4 Test Result

ANT A

| Condition | Mode | Frequency (MHz) | Duty Cycle (%) |
|-----------|------|-----------------|----------------|
| NVNT | b | 2412 | 100 |
| NVNT | g | 2412 | 100 |
| NVNT | n20 | 2412 | 100 |
| NVNT | n40 | 2422 | 100 |





| Agilent Spectrum Analyzer - Swept S | | | NT b 2412MHz | | |
|---|--|--|---|---|--|
| enter Freq 2.412000 | AC DOOGHZ PNO:Fast ← IFGain:Low | SENSE:INT Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:06:18 AM Mar26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWW DET P NNNNN | Frequency |
| Ref Offset 2.59 | dB | | | Mkr1 50.00 ms | Auto Tu |
| dB/div Ref 22.59 dB | m | 1 | | 13.96 dBm | |
| 2.6 | | | | | Center Fr |
| 2.59 | | | | | 2.412000000 G |
| 7.4 | | | | | Start Fr |
| 7.4 | | | | | 2.412000000 G |
| 7.4 | | | | | |
| 7.4 | | | | | Stop Fr |
| 7.4 | | | | | 2.412000000 G |
| enter 2.412000000 GH | | | | Span 0 Hz | CF St |
| es BW 8 MHz | | W 8.0 MHz | | 0.0 ms (10001 pts) | 8.000000 M <u>Auto</u> M |
| R MODE TRC SCL | × 50.00 ms | Y FU 13.96 dBm | INCTION FUNCTION WIDTH | FUNCTION VALUE | |
| 3 4 | | | | | Freq Offs 0 |
| 5 6 | | | | = | U |
| 8 | | | | | |
| 9 0 | | | | | |
| 1 | | m | | - | |
| | | | | | |
| G | | | STATUS | | |
| - | | ity Cycle NVI | status NT g 2412MHz | | المح الم |
| Agilent Spectrum Analyzer - Swept Si RL RF 50 Ω | A AC | | NT g 2412MHz | 12:05:10 AM Mar 26, 2025 | Frequency |
| Agilent Spectrum Analyzer - Swept Si RL RF 50 Ω | A AC DOO GHz PNO: Fast ← | SENSE:INT | NT g 2412MHz | - | |
| Agilent Spectrum Analyzer - Swept S RL RF 50 Ω enter Freq 2.412000 | A AC DOO GHz PNO: Fast ← IFGain:Low | SENSE:INT | NT g 2412MHz ALIGN AUTO Avg Type: Log-Pwr | 12:05:10 AM Mar26, 2025 TRACE 12 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency |
| Agilent Spectrum Analyzer - Swept S RL RF 50.Ω enter Freq 2.4120000 Ref Offset 2.59 dB dB/div Ref 22.59 dB | A AC DOO GHz PNO: Fast ← IFGain:Low | SENSE:INT | NT g 2412MHz ALIGN AUTO Avg Type: Log-Pwr | 12:05:10 AM Mar 26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWW DET P NNNNN | Frequency |
| Agilent Spectrum Analyzer - Swept S RL RF 50 Ω enter Freq 2.412000 Ref Offset 2.59 dB/div Ref 22.59 dB | A AC DOO GHz PNO: Fast ← IFGain:Low | SENSE:INT | NT g 2412MHz ALIGN AUTO Avg Type: Log-Pwr | 12:05:10 AM Mar26, 2025 TRACE 12 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tu Center Fr |
| Agilent Spectrum Analyzer - Swept S RL RF 50 Ω enter Freq 2.4120000 Ref Offset 2.59 dB/div Ref 22.59 dB 29 20 59 | A AC DOO GHz PNO: Fast ← IFGain:Low | SENSE:INT | NT g 2412MHz ALIGN AUTO Avg Type: Log-Pwr | 12:05:10 AM Mar26, 2025 TRACE 12 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tu Center Fr |
| Agilent Spectrum Analyzer - Swept S RL RF 50.Ω enter Freq 2.4120000 Ref Offset 2.59 Ref Offset 2.59 dB/div Ref 22.59 dB 29 Computer State State 41 Computer State State | A AC DOO GHz PNO: Fast ← IFGain:Low | SENSE:INT | NT g 2412MHz ALIGN AUTO Avg Type: Log-Pwr | 12:05:10 AM Mar26, 2025 TRACE 12 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tu Center Fr 2.412000000 G |
| Agilent Spectrum Analyzer - Swept S RL RF 50.Ω enter Freq 2.412000i Set Offset 2.59 GB/div Ref Offset 2.59 dB 26 cmutHilling turg up to the set of set 0.59 41 | A AC DOO GHz PNO: Fast ← IFGain:Low | SENSE:INT | NT g 2412MHz ALIGN AUTO Avg Type: Log-Pwr | 12:05:10 AM Mar26, 2025 TRACE 12 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tu Center Fr 2.412000000 G Start Fr |
| Agilent Spectrum Analyzer - Swept S RL RF 50.Ω enter Freq 2.4120000 Set Offset 2.59 BJ/div Ref Offset 2.59 dB 29 Commutative and the set of the | A AC DOO GHz PNO: Fast ← IFGain:Low | SENSE:INT | NT g 2412MHz ALIGN AUTO Avg Type: Log-Pwr | 12:05:10 AM Mar26, 2025 TRACE 12 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tu Center Fr 2.412000000 G Start Fr |
| Ref Offset 2.59 Ref 22.59 dB 0 dB/div Ref 22.59 dB 0 d1/div Ref 22.59 dB 0 d2 c 7.4 c 7.4 c 7.4 c 7.4 c 7.4 c 7.4 c | A AC DOO GHz PNO: Fast ← IFGain:Low | SENSE:INT | NT g 2412MHz ALIGN AUTO Avg Type: Log-Pwr | 12:05:10 AM Mar26, 2025 TRACE 12 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tu Center Fr 2.41200000 G Start Fr 2.412000000 G |
| Agilent Spectrum Analyzer - Swept S RL PF 50.Ω enter Freq 2.412000i Ref Offset 2.59 D BL/dlv Ref 22.59 dB D G 9 dB/div Ref 22.59 dB D D G 7 4 | A AC DOO GHz PNO: Fast ← IFGain:Low | SENSE:INT | NT g 2412MHz ALIGN AUTO Avg Type: Log-Pwr | 12:05:10 AM Mar26, 2025 TRACE 12 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tu Center Fr 2.41200000 G Start Fr 2.41200000 G Stop Fr |
| Agilent Spectrum Analyzer - Swept S RL RF 50 Ω enter Freq 2.4120000 Ref Offset 2.59 Ref Offset 2.59 D dB/div Ref 22.59 dB Ref 22.59 dB 20 Genetitility Ref 22.59 dB 30 Ref 22.59 dB Ref 22.59 dB 41 Ref 22.59 dB Ref 22.59 dB 7.4 Ref 22.59 dB Ref 23.59 dB 7.4 Ref 22.59 dB Ref 23.59 dB 7.4 Ref 23.59 dB Ref 23.59 dB 7.4 Ref 34.50 dB Ref 35.50 dB 7.4 Ref 34.50 dB Ref 34.50 dB 7.4 Ref 34.50 dB Ref 34.50 dB | AC DOO GHZ PNO: Fast IFGain:Low dB m IHIBanuar Markense of an anti- Markense o | SENSE:INT | NT g 2412MHz ALIGN AUTO Avg Type: Log-Pwr | 12:05:10 AM Mar 26, 2025 TRACE 12:33 4 5 6 TYPE 12:34 5 7 TYPE 12:34 5 7 TYPE 12:34 5 7 TYPE 12:34 5 7 TYPE 12:34 5 | Frequency Auto Tu Center Fr 2.412000000 G Start Fr 2.412000000 G Stop Fr 2.412000000 G |
| Agilent Spectrum Analyzer - Swept S RL RF 50.Ω enter Freq 2.4120001 Set Offset 2.59 Set Offset 2.59 gB/div Ref Offset 2.59 dB Set Offset 2.59 Set Offset 2.59 29 GB/div Ref 22.59 dB Set Offset 2.59 Set Offset 2.59 29 GB/div Ref 24.59 Set Offset 2.59 Set Offset 2.59 Set Offset 2.59 29 GB/div Ref 24.59 Set Offset 2.59 Set Offset 2.59 Set Offset 2.59 29 GB/div Ref 24.59 Set Offset 2.59 Set Offset 2.59 Set Offset 2.59 Set Offset 2.59 29 GB/div Ref 24.59 Set Offset 2.59 Set Offset 2 | A AC AC AC AC AC AC AC AC AC A | SENSE:INT | NT g 2412MHz | 12:05:10 AM Mar26, 2025 TRACE 12 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tu Center Fr 2.412000000 G Start Fr 2.412000000 G Stop Fr 2.412000000 G |
| Agilent Spectrum Analyzer - Swept S RL RF 50.Ω enter Freq 2.4120000 Set Offset 2.59 GB/div Ref Offset 2.59 GB/div Ref 22.59 GB/div G | A AC AC AC AC AC AC PNO: Fast - IFGain:Low AC AC PNO: Fast - IFGain:Low AC AC AC AC PNO: Fast - IFGain:Low AC AC AC AC AC AC AC AC AC AC | SENSE:INT Trig: Free Run #Atten: 30 dB | NT g 2412MHz | 12:05:10 AM Mar 26, 2025 TRACE [] 2 3 4 5 G TYPE WWWWWDE P NNNN Mkr1 50:00 ms 10.62 dBm | Frequency Auto Tu Center Fr 2.412000000 G Start Fr 2.412000000 G Stop Fr 2.41200000 G |
| Agilent Spectrum Analyzer - Swept S RL RF S0 Ω enter Freq 2.4120000 B Ref Offset 2.59 B 29 B G Ref 0ffset 2.59 G 29 B G Ref 0ffset 2.59 G 29 C G Ref 22.59 G 29 G G G G 39 G G G G 30 G G G G 41 G G G G 7.4 G G G G 7.4 G G G G 7.4 G G G G 9.4 G G G G 7.4 G G G G 7.4 G G G G 9.4 G G G G 9.4 G G <td>AAC 0000 GHz PNO: Fast</td> <td>SENSE:INT Trig: Free Run #Atten: 30 dB</td> <td>NT g 2412MHz</td> <td>12:05:10 AM Mar 26, 2025 TRACE [] 23 4 5 G TVPE [] 23 4 5 G TVPE PININNN Mkr1 50:00 ms 10.62 dBm</td> <td>Auto Tu Center Fr 2.412000000 G Start Fr 2.412000000 G Stop Fr 2.412000000 G CF St 8.000000 M Auto M</td> | AAC 0000 GHz PNO: Fast | SENSE:INT Trig: Free Run #Atten: 30 dB | NT g 2412MHz | 12:05:10 AM Mar 26, 2025 TRACE [] 23 4 5 G TVPE [] 23 4 5 G TVPE PININNN Mkr1 50:00 ms 10.62 dBm | Auto Tu Center Fr 2.412000000 G Start Fr 2.412000000 G Stop Fr 2.412000000 G CF St 8.000000 M Auto M |
| Agilent Spectrum Analyzer - Swept S RL RF 50 Ω enter Freq 2.4120000 Ref Offset 2.59 0 dB/div Ref 22.59 dB 3 dB/div Ref 22.59 dB 4 dV Ref 22 | A AC AC AC AC AC AC PNO: Fast - IFGain:Low AC AC PNO: Fast - IFGain:Low AC AC AC AC PNO: Fast - IFGain:Low AC AC AC AC AC AC AC AC AC AC | SENSE:INT Trig: Free Run #Atten: 30 dB | NT g 2412MHz | 12:05:10 AM Mar 26, 2025 TRACE 12:33 4 5 G TVPC 12:33 4 5 G TVPC 12:33 4 5 G TVPC 12:33 4 5 G TVPC 12:33 4 5 G PINN NNN Mkr1 50:00 ms 10:62 dBm 4:40 4 5 G PINN 10:00 ms 5 pan 0 Hz 0.0 ms (10001 pts) FUNCTION VALUE | Frequency Auto Tu Center Fr 2.412000000 G Start Fr 2.412000000 G Stop Fr 2.41200000 G |
| Agilent Spectrum Analyzer - Swept S RL RF 50 Ω enter Freq 2.4120000 Ref Offset 2.59 dB/div Ref 22.59 dB 29 26 41 7.4 7.4 7.4 7.4 7.4 7.4 7.4 7.4 | A AC AC AC AC AC AC PNO: Fast - IFGain:Low AC AC PNO: Fast - IFGain:Low AC AC AC AC PNO: Fast - IFGain:Low AC AC AC AC AC AC AC AC AC AC | SENSE:INT Trig: Free Run #Atten: 30 dB | NT g 2412MHz | 12:05:10 AM Mar 26, 2025 TRACE [] 23 4 5 G TVPE [] 23 4 5 G TVPE PININNN Mkr1 50:00 ms 10.62 dBm | Start Fr 2.412000000 G Start Fr 2.412000000 G Start Fr 2.412000000 G Stop Fr 2.412000000 G Stop Fr 2.412000000 G Freq Offs 8.000000 M Auto M Freq Offs |
| Agilent Spectrum Analyzer - Swept S RL RF 50.Ω enter Freq 2.4120000 Ref Offset 2.59 GB/div Ref Offset 2.59 dB Ref 22.59 dB GB/div 20 GB/div Ref 22.59 dB GB/div 59 GB/div Ref 22.59 dB GB/div 50 GB/div Ref 22.59 dB GB/div 50 GB/div Ref 22.59 dB GB/div GB/div 50 GB/div GB/div GB/div GB/div GB/div 51 1 1 1 1 1 1 51 1 1 1 1 1 1 1 | A AC AC AC AC AC AC PNO: Fast - IFGain:Low AC AC PNO: Fast - IFGain:Low AC AC AC AC PNO: Fast - IFGain:Low AC AC AC AC AC AC AC AC AC AC | SENSE:INT Trig: Free Run #Atten: 30 dB | NT g 2412MHz | 12:05:10 AM Mar 26, 2025 TRACE 12:33 4 5 G TVPC 12:33 4 5 G TVPC 12:33 4 5 G TVPC 12:33 4 5 G TVPC 12:33 4 5 G PINN NNN Mkr1 50:00 ms 10:62 dBm 4:40 4 5 G PINN 10:00 ms 5 pan 0 Hz 0.0 ms (10001 pts) FUNCTION VALUE | Start Fr 2.412000000 G Start Fr 2.412000000 G Start Fr 2.412000000 G Stop Fr 2.412000000 G Stop Fr 2.412000000 G Freq Offs 8.000000 M Auto M Freq Offs |




| | Dui | y Cycle NVN | T n20 2412MH | Z | |
|--|---|---|--|---|--|
| Agilent Spectrum Analyzer - Swept S X RL RF 50 Ω | | SENSE:INT | ALIGN AUTO | 12:04:31 AM Mar 26, 2025 | |
| Center Freq 2.412000 | IOOO GHz PNO: Fast ← IFGain:Low | Trig: Free Run #Atten: 30 dB | Avg Type: Log-Pwr | TRACE 1 2 3 4 5 6 TYPE WWWWWW DET P NNNNN | Frequency |
| Ref Offset 2.59 10 dB/div Ref 22.59 dB | | | | Mkr1 50.00 ms 8.06 dBm | Auto Tune |
| 12.6 | وجاد الارد ومرويهم وراد المالية | | n jare Antipating transfering and Alexandra strangenet bits | i han ya manana an ha ji fan y jinang jinag king ji dan d | Center Freq |
| 2.59 | and the product of the second seco | 1997 - Andrea Marine, 1 | A ME IT LEADER AND A ME AND A | in an air ann an Air an A | 2.412000000 GHz |
| -7.41 | | | | | Start Freq |
| -27.4 | | | | | 2.412000000 GHz |
| -37.4 | | | | | |
| -57.4 | | | | | Stop Fred 2.412000000 GHz |
| -67.4 | | | | | |
| Center 2.412000000 GH Res BW 8 MHz | | W 8.0 MHz | Sweep 100 | Span 0 Hz 0.0 ms (10001 pts) | CF Step 8.000000 MHz Auto Mar |
| MKR MODE TRC SCL | × 50.00 ms | Y FI 8.06 dBm | UNCTION FUNCTION WIDTH | FUNCTION VALUE | |
| 2 3 4 | | | | | Freq Offset |
| 5 | | | | E | 0112 |
| 7 8 9 | | | | | |
| 10 | | | | - | |
| MSG | | III | STATUS | • | |
| | Dut | | T 40.040004 | | |
| | | | T n40 2422MH | Z | |
| | AC | | ALIGN AUTO | 12:03:48 AM Mar 26, 2025 | |
| LXI R.L R.F 50 Ω | AC | SENSE:INT | | | |
| X RL RF 50Ω Center Freq 2.422000 | AC IOOO CHZ PNO: Fast ← IFGain:Low | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar26, 2025 TRACE 2 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency |
| LXI R.L R.F 50 Ω | AC DOOD GHz PN0: Fast IFGain:Low dB | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar 26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWW DET P N N N N | Frequency |
| X RL RF 50.9 Center Freq 2.422000 Ref Offset 2.59 10 dB/div Ref 20.00 dB 10 og 10 og | AC DOOD GHz PN0: Fast IFGain:Low dB | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar26, 2025 TRACE 2 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tune Center Free |
| X RL RF 50.9 Center Freq 2.422000 Ref Offset 2.59 Ref Offset 2.59 10 dB/div Ref 20.00 dB Ref 20.00 dB | AC OOOO GHz PNO: Fast IFGain:Low dB | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar26, 2025 TRACE 2 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tune Center Frec |
| X RL RF 50.2 Center Freq 2.422000 Ref Offset 2.59 Ref 20.00 dE 10 dB/div Ref 20.00 dE Ref 20.00 dE 10.0 Andre State Ref 20.00 dE -10.0 | AC OOOO GHz PNO: Fast IFGain:Low dB | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar26, 2025 TRACE 2 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tune Center Free 2.42200000 GH Start Free |
| RL RF 50.0 Center Freq 2.422000 Ref Offset 2.59 10 dB/div Ref 20.00 dB | AC OOOO GHz PNO: Fast IFGain:Low dB | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar26, 2025 TRACE 2 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tune Center Free 2.42200000 GHz Start Free |
| RL RF 50.0 Center Freq 2.422000 Ref Offset 2.59 10 dB/div Ref 20.00 dB 10.0 Ref 20.00 dB | AC OOOO GHz PNO: Fast IFGain:Low dB | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar26, 2025 TRACE 2 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tune Center Frec 2.422000000 GHz Start Frec 2.422000000 GHz |
| XI RF 50.0 Center Freq 2.422000 Ref Offset 2.59 10 dB/div Ref 20.00 dE 10.0 | AC OOOO GHz PNO: Fast IFGain:Low dB | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar26, 2025 TRACE 2 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tune Center Frec 2.42200000 GHz Start Frec 2.42200000 GHz Stop Frec |
| RL RF 50.0 Center Freq 2.422000 Ref Offset 2.59 Ref Offset 2.59 Ref 20.00 dE 10.0 Ref 20.00 dE -10.0 | AC 1000 GHz PN0: Fast IFGain:Low dB 3m | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar26, 2025 TRACE 2 3 4 5 6 TYPE WWWWW DET PNNNN MKr1 50.00 ms | Frequency Auto Tune Center Frec 2.422000000 GHz Start Frec 2.422000000 GHz Stop Frec 2.422000000 GHz |
| X RL RF 50.0 Center Freq 2.422000 Ref Offset 2.59 Ref 20.00 dB 10 dB/div Ref 20.00 dB Ref 20.00 dB -10 0 | A AC 1000 GHz PN0: Fast IFGain:Low dB 3m 4 4 4 4 4 4 4 4 4 4 4 4 4 | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar26, 2025 TRACE 2 3 4 5 6 TYPE WWWWWW Mkr1 50.00 ms 7.33 dBm | Frequency Auto Tune Center Freq 2.422000000 GHz Start Freq 2.422000000 GHz Stop Freq 2.422000000 GHz CF Step 8.000000 MHz |
| Ref S0 D Center Freq 2.422000 Ref Offset 2.59 10 dB/div Ref 20.00 dB 20 dB/div Ref 20.00 dB -10 dB/div Ref 20.00 dB -20 dB/div Ref 20.00 dB -10 dB/div Ref 20.00 dB -20 dB/div Ref 20.00 dB -20 dB/div Ref 20.00 dB -30 dB/div Ref 20.00 dB -40 dB/div Ref 20.00 dB -70 dB/div Re | A AC 1000 GHz PN0: Fast IFGain:Low dB Bm IFGain:Low IZ | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar 26, 2025 TRACE 2 3 4 5 6 TYPE WWWWWW Mkr1 50.00 ms 7.33 dBm | Frequency Auto Tune Center Free 2.42200000 GHz Start Free 2.42200000 GHz Stop Free 2.42200000 GHz 2.42200000 GHz Auto Mar |
| RL RF 50.0 Center Freq 2.422000 Ref Offset 2.59 10 dB/div Ref 20.00 dB -00 | A AC DOO GHZ PNO: Fast - IFGain:Low dB 33m 44 45 45 45 45 45 45 45 45 45 | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar26, 2025 TRACE 2 3 4 5 6 TYPE WWWWWW Mkr1 50.00 ms 7.33 dBm | Frequency Auto Tune Center Frec 2.42200000 GH: 2.42200000 GH: 2.420000 GH: 2.4200000 GH: 2.4200000 GH: 2.4200 GH: 2.4200 GH: 2.4200000 GH: 2.4200 GH: 2.4200000 GH: 2.4200 GH: 2.4200 GH: 2.4200000 GH: 2.4200 GH: 2.4200000 GH: 2.420000 GH: 2.4200000 GH: 2.4200000 GH: 2.42000000 GH: 2.42000000 GH: 2.42000000 GH: 2.420000000 GH: 2.4200000000000000000000000000000000000 |
| Ref 50.0 Center Freq 2.422000 Ref Offset 2.59 O dB/div Ref 20.00 dB 0 dB/div Ref 20.00 dB -10 0 | A AC DOO GHZ PNO: Fast - IFGain:Low dB 33m 44 45 45 45 45 45 45 45 45 45 | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar26, 2025 TRACE 2 3 4 5 6 TYPE WWWWWW Mkr1 50.00 ms 7.33 dBm | Frequency Auto Tune Center Frec 2.42200000 GH2 Start Frec 2.42200000 GH2 Stop Frec 2.42200000 GH2 CF Step 8.00000 MH2 Auto Mar |
| N Ref 50.0 Center Freq 2.422000 Ref Offset 2.59 10 dB/div Ref 20.00 dB 10 0 | A AC DOO GHZ PNO: Fast - IFGain:Low dB 33m 44 45 45 45 45 45 45 45 45 45 | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar26, 2025 TRACE 2 3 4 5 6 TYPE WWWWWW Mkr1 50.00 ms 7.33 dBm | Auto Tune Center Freq 2.42200000 GHz 2.42200000 GHz |
| Ref 50.0 Center Freq 2.422000 Ref Offset 2.59 10 dB/div Ref 20.00 dB 100 dB/div Ref 20.00 dB -100 dB/div dB/div 20.00 dB -200 dB/div dB/div 20.00 dB -300 dB/div dB/div 20.00 dB -400 dB/div dB/div 20.00 dB -200 dB/div dB/div 20.00 dB -300 dB/div dB/div 40.00 dB </td <td>AAC DOOD GHZ PNO: Fast IFGain:Low dB 33m </td> <td>SENSE:INT</td> <td>ALIGN AUTO Avg Type: Log-Pwr</td> <td>12:03:48 AM Mar26, 2025 TRACE 2 3 4 5 6 TYPE WWWWWW Mkr1 50.00 ms 7.33 dBm</td> <td>Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq 2.42200000 GHz Stop Freq 2.42200000 GHz CF Step 8.00000 MHz</td> | AAC DOOD GHZ PNO: Fast IFGain:Low dB 33m | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:03:48 AM Mar26, 2025 TRACE 2 3 4 5 6 TYPE WWWWWW Mkr1 50.00 ms 7.33 dBm | Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq 2.42200000 GHz Stop Freq 2.42200000 GHz CF Step 8.00000 MHz |



ANT B

| Condition | Mode | Frequency (MHz) | Duty Cycle (%) |
|-----------|------|-----------------|----------------|
| NVNT | b | 2412 | 100 |
| NVNT | g | 2412 | 100 |
| NVNT | n20 | 2412 | 100 |
| NVNT | n40 | 2422 | 100 |







| | | Test G ty Cycle NVI | NT b 2412MHz | | | | |
|---|--|--|---|--|---|--|--|
| Agilent Spectrum Analyzer - Sw RL RF 50 9 enter Freq 2.4120 | Ω AC | _ Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:44:28 AM Mar 26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWW DET P N N N N | Frequency | | |
| Ref Offset 2 0 dB/div Ref 22.59 | 59 dB | | | Mkr1 50.00 ms 10.07 dBm | Auto Tui | | |
| og 12.6 2.59 7.41 | | 1 | | | Center Fre 2.412000000 Gi | | |
| 17.4 27.4 37.4 | | | | | Start Fre 2.412000000 GH | | |
| 47.4 57.4 67.4 | | | | | Stop Fre 2.412000000 GH | | |
| enter 2.412000000 tes BW 8 MHz | | √ 8.0 MHz | Sweep 100 | Span 0 Hz 0.0 ms (10001 pts) | CF Ste 8.000000 Mi | | |
| KKR MODE TRC SCL 1 N 1 t 2 3 - - 3 - - - 4 - - - 5 - - - | × 50.00 ms | Y F⊍ 10.07 dBm | NCTION FUNCTION WIDTH | FUNCTION VALUE | Auto Ma Freq Offs 0 F | | |
| 6 7 8 9 10 | | | | | | | |
| 1 | | | | - | | | |
| | | | | • • | | | |
| G Agilent Spectrum Analyzer - Sw | ept SA | | NT g 2412MHz | 12:43:37 AM Mar 26, 2025 | | | |
| G Agilent Spectrum Analyzer - Sw R L RF 50 f | ept SA Ω AC | | NT g 2412MHz | | Frequency | | |
| SG Agilent Spectrum Analyzer - Sw R.L RF 50.1 center Freq 2.4120 Ref Offset 2 Sector 2.59 Ref Offset 2 Sector 2.59 Sector 2.59 | ept SA Ω AC 000000 GHz PNO: Fast → IFGain:Low | | NT g 2412MHz Align Auto Avg Type: Log-Pwr | 12:43:37 AM Mar 26, 2025 | Frequency | | |
| Rg Agilent Spectrum Analyzer - Sw RL RF 501 enter Freq 2.4120 Ref Offset 2 0 dB/div Ref 22.59 99 92 92 12.6 12.6 auture and analyzer and and analyzer analyzer and analyzer and analyzer and analyzer analyzer and analyzer analy | ept SA Ω AC 000000 GHz PNO: Fast → IFGain:Low | ty Cycle NVN SENSE:INT Trig: Free Run #Atten: 30 dB | NT g 2412MHz | 12:43:37 AM Mar 26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWW DET P NNNNN Mkr1 50.00 ms | Frequency Auto Tur Center Fre | | |
| SG RL RF 50 RL RF 50 50 Ref Offset 2 0 dB/div Ref 22.59 25 7.41 17.4 17.4 | ept SA Ω AC PNO: Fast IFGain:Low .59 dB dBm | ty Cycle NVN SENSE:INT Trig: Free Run #Atten: 30 dB | NT g 2412MHz | 12:43:37 AM Mar26, 2025 TRACE 12 3 4 5 6 TYPE 2 3 4 5 6 TYPE P NNNN DET P NNNNN Mkr1 50.00 ms 7.92 dBm | Frequency Auto Tur Center Fre 2.41200000 Gl Start Fre 2.41200000 Gl | | |
| G Agilent Spectrum Analyzer - Sw Ref Offset 2 Ref Offset 2 Colspan="2">God B/dIv Ref Offset 2 O dB/dIv Ref Offset 2 Colspan="2">Colspan="2" Colspan="2">Colspan="2" Colspan="2" Colspan="2" <th <="" colspan="2" td=""><td>ept SA Q 00000 GHz PN0: Fast → IFGain:Low 159 dB dBm Hittp://www.engroup.etu/file IFGain:Low</td><td>ty Cycle NVN SENSE:INT Trig: Free Run #Atten: 30 dB</td><td>NT g 2412MHz</td><td>12:43:37 AM Mar26, 2025 TRACE 12 3 4 5 6 TYPE 2 3 4 5 6 TYPE P NNNN DET P NNNNN Mkr1 50.00 ms 7.92 dBm</td><td>Frequency Auto Tur Center Fre 2.412000000 Gi Start Fre 2.412000000 Gi Stop Fre</td></th> | <td>ept SA Q 00000 GHz PN0: Fast → IFGain:Low 159 dB dBm Hittp://www.engroup.etu/file IFGain:Low</td> <td>ty Cycle NVN SENSE:INT Trig: Free Run #Atten: 30 dB</td> <td>NT g 2412MHz</td> <td>12:43:37 AM Mar26, 2025 TRACE 12 3 4 5 6 TYPE 2 3 4 5 6 TYPE P NNNN DET P NNNNN Mkr1 50.00 ms 7.92 dBm</td> <td>Frequency Auto Tur Center Fre 2.412000000 Gi Start Fre 2.412000000 Gi Stop Fre</td> | | ept SA Q 00000 GHz PN0: Fast → IFGain:Low 159 dB dBm Hittp://www.engroup.etu/file IFGain:Low | ty Cycle NVN SENSE:INT Trig: Free Run #Atten: 30 dB | NT g 2412MHz | 12:43:37 AM Mar26, 2025 TRACE 12 3 4 5 6 TYPE 2 3 4 5 6 TYPE P NNNN DET P NNNNN Mkr1 50.00 ms 7.92 dBm | Frequency Auto Tur Center Fre 2.412000000 Gi Start Fre 2.412000000 Gi Stop Fre |
| G Agilent Spectrum Analyzer - Sw Ref Offset 2 enter Freq 2.4120 Ref Offset 2 o dB/div Ref 22.59 o dB/div Ref 22.59< | ept SA Q AC PN0: Fast → IFGain:Low 159 dB dBm 1000000000000000000000000000000000000 | ty Cycle NVN | NT g 2412MHz | 12:43:37 AM Mar 26, 2025 TRACE 12 3 4 5 6 Type With the formation of the f | Frequency Auto Tur Center Fre 2.412000000 GI Start Fre 2.412000000 GI Stop Fre 2.412000000 GI CF Ste 8.000000 MI | | |
| Ref Offset 2 0 dB/div Ref 22.59 | ept SA Q AC PN0: Fast → IFGain:Low 159 dB dBm 1000000000000000000000000000000000000 | ty Cycle NVN | NT g 2412MHz | 12:43:37 AM Mar26, 2025 TRACE 12 3 4 5 0 TYPE WWWWWW DET P NNNNN Mkr1 50.00 ms 7.92 dBm | Frequency Auto Tur Center Fre 2.412000000 Gi Start Fre | | |



| | Dut | y Cycle NVN | T n20 2412MH | Z | |
|---|--|--|---------------------------------|---|--|
| Agilent Spectrum Analyzer - Swe | ept SA | SENSE:INT | ALIGN AUTO | 12:42:27 AM Mar 26, 2025 | |
| Center Freq 2.4120 | | Trin Free Pres | Avg Type: Log-Pwr | TRACE 1 2 3 4 5 6 TYPE WWWWW DET P NNNN | Frequency |
| Ref Offset 2. 10 dB/div Ref 22.59 | .59 dB | | | Mkr1 50.00 ms 6.27 dBm | Auto Tune |
| Log 12.6 | | 11 | | | Center Freq |
| 2.59 And collection of the set of the set of the | | | | daa kiliking babananin bardan kara | 2.412000000 GHz |
| -7.41 | | | | | |
| -17.4 | | | | | Start Freq |
| -37.4 | | | | | 2.412000000 GHz |
| -47.4 | | | | | Stop Freq |
| -57.4 | | | | | 2.412000000 GHz |
| -67.4 | | | | | |
| Center 2.412000000 Res BW 8 MHz | | W 8.0 MHz | - | Span 0 Hz 0.0 ms (10001 pts) | CF Step 8.000000 MHz <u>Auto</u> Man |
| MKR MODE TRC SCL | × 50.00 ms | Y FU 6.27 dBm | INCTION FUNCTION WIDTH | FUNCTION VALUE | |
| 3 | | | | | Freq Offset |
| 4 5 6 | | | | E | 0 Hz |
| 7 | | | | | |
| 9 | | | | | |
| 11 | | m | | | |
| MSG | | | STATUS | | |
| | | | | | |
| | | y Cycle NVN | T n40 2422MH | Z | |
| Agilent Spectrum Analyzer - Swe XX RL RF 50 S | ept SA 2 AC | | ALIGN AUTO | 12:41:56 AM Mar 26, 2025 | Frequency |
| | ept SA 2 AC 000000 GHz PNO: Fast ← | SENSE:INT | | | Frequency |
| Center Freq 2.4220 | ept SA 2 AC 000000 GHz PNO: Fast ← IFGain:Low _ | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWWW DET PNNNNN | |
| RL RF 50 £ Center Freq 2.4220 Ref Offset 2. 10 dB/div Ref Offset 2. | ept SA 2 AC PNO: Fast ← IFGain:Low _ | SENSE:INT Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar 26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWW DET P NNNN | Frequency |
| RL RF S0 £ Center Freq 2.4220 Ref Offset2. 10 dB/div Ref 20.00 10 dD/div Ref 20.00 | ept SA 2 AC PNO: Fast ← IFGain:Low _ | Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWWW DET PNNNNN | Frequency Auto Tune Center Freq |
| Off RL RF S0 £ Center Freq 2.4220 Ref Offset 2. Ref Offset 2. 10 dB/div Ref 20.00 Ref 20.00 10 0 Ref 20.00 Ref 20.00 | ept SA 2 AC PNO: Fast IFGain:Low 59 dB dBm | Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWWW DET PNNNNN | Frequency Auto Tune |
| Off RL RF S0 5 Center Freq 2.4220 Ref Offset 2. 10 dB/div Ref Offset 2.0.00 10 dB/div Ref Offset 2.0.00 | ept SA 2 AC PNO: Fast IFGain:Low 59 dB dBm | Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWWW DET PNNNNN | Frequency Auto Tune Center Freq 2.422000000 GHz |
| Off RL RF S0 £ Center Freq 2.4220 Ref Offset 2. Ref Offset 2. 10 dB/div Ref 20.00 Ref 20.00 10 0 Ref 20.00 Ref 20.00 | ept SA 2 AC PNO: Fast IFGain:Low 59 dB dBm | Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWWW DET PNNNNN | Frequency Auto Tune Center Freq |
| RL RF S0 2 Center Freq 2.4220 Ref Offset 2 10 dB/div Ref 20.00 Log | ept SA 2 AC PNO: Fast IFGain:Low 59 dB dBm | Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWWW DET PNNNNN | Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq |
| RL RF S0 £ Center Freq 2.4220 Ref Offset2. 10 dB/div Ref 20.00 Log | ept SA 2 AC PNO: Fast IFGain:Low 59 dB dBm | Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWWW DET PNNNNN | Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq 2.42200000 GHz Stop Freq |
| RL RF S0 2 Center Freq 2.4220 Ref Offset 2 10 dB/div Ref 20.00 Log | ept SA 2 AC PNO: Fast IFGain:Low 59 dB dBm | Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWWW DET PNNNNN | Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq 2.422000000 GHz |
| OM RL RF S0 £ Center Freq 2.4220 Center Freq 2.4220 10 dB/dlv Ref Offset 2. 10 dB/dlv Ref 20.00 10.0 | ept SA 2 AC PNO: Fast IFGain:Low 59 dB dBm 4 A Market A Mark | Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar 26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWWWW DET P NNNNN MKr1 50.00 ms 5.05 dBm | Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq 2.42200000 GHz Stop Freq |
| M RL RF S0 C Center Freq 2.4220 Ref Offset 2. C 10 dB/div Ref 20.00 C | ept SA 2 AC DO0000 GHZ PNO: Fast IFGain:Low 59 dB dBm 4 4 4 4 4 4 4 4 4 4 4 4 4 | SENSE:INT Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar 26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWW WKr1 50.00 ms 5.05 dBm 444 Mar 26, 2025 WWWWWWW WKr1 50.00 ms 5.05 dBm 444 Mar 26, 2025 WWWWWWW WKr1 50.00 ms 5.05 dBm 444 Mar 26, 2025 WWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWW | Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq 2.42200000 GHz Stop Freq 2.42200000 GHz CF Step 8.00000 MHz |
| RL RF S0 C Center Freq 2.4220 Ref Offset 2. 10 dB/div Ref 20.00 | ept SA 2 AC PNO: Fast IFGain:Low 59 dB dBm Composition of the second seco | SENSE:INT Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar 26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWWWW DET P NNNNN MKr1 50.00 ms 5.05 dBm | Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq 2.42200000 GHz Stop Freq 2.42200000 GHz CF Step 8.00000 MHz |
| OM RL RF S0 £ Center Freq 2.4220 Ref Offset 2. 10 dB/dlv Ref 20.00 Log Ref 20.00 10.0 10.0 10.0 .000 | ept SA 2 AC PNO: Fast - IFGain:Low 69 dB dBm GHz #VB | SENSE:INT Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar 26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWW WKr1 50.00 ms 5.05 dBm 444 Mar 26, 2025 WWWWWWW WKr1 50.00 ms 5.05 dBm 444 Mar 26, 2025 WWWWWWW WKr1 50.00 ms 5.05 dBm 444 Mar 26, 2025 WWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWW | Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq 2.42200000 GHz Stop Freq 2.42200000 GHz CF Step 8.000000 MHz Auto Man |
| XI RL RF S0 C Center Freq 2.4220 Ref Offset 2. S0 C Log Ref Offset 2. S0 C 10 dB/div Ref 20.00 S0 C 10 dB/div Ref 20.00 S0 C 10 dB/div Ref 20.00 S0 C -0 0 | ept SA 2 AC PNO: Fast - IFGain:Low 69 dB dBm GHz #VB | SENSE:INT Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar 26, 2025 TRACE 1 2 3 4 5 6 TYPE WWWWWW WKr1 50.00 ms 5.05 dBm 444 Mar 26, 2025 WWWWWWW WKr1 50.00 ms 5.05 dBm 444 Mar 26, 2025 WWWWWWW WKr1 50.00 ms 5.05 dBm 444 Mar 26, 2025 WWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWW | Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq 2.42200000 GHz Stop Freq 2.42200000 GHz CF Step 8.000000 MHz Auto Man |
| W RL RF 50 f Center Freq 2.4220 Ref Offset 2. 10 dB/div Ref 20.00 Log | ept SA 2 AC PNO: Fast - IFGain:Low 69 dB dBm GHz #VB | SENSE:INT Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar 26, 2025 TRACE [] 2:3 4 5 6 TYPE WWWWW DET PINNIN MKr1 50.00 ms 5.05 dBm Span 0 Hz 1.0 ms (10001 pts) FUNCTION VALUE | Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq 2.42200000 GHz Stop Freq 2.42200000 GHz CF Step 8.000000 MHz Auto Man |
| XI RF S0 C Center Freq 2.4220 Ref Offset 2. 10 dB/div Ref 20.00 Log | ept SA 2 AC PNO: Fast - IFGain:Low 69 dB dBm GHz #VB | SENSE:INT Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar 26, 2025 TRACE [] 2:3 4 5 6 TYPE WWWWW DET PINNIN MKr1 50.00 ms 5.05 dBm Span 0 Hz 1.0 ms (10001 pts) FUNCTION VALUE | Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq 2.42200000 GHz Stop Freq 2.42200000 GHz CF Step 8.000000 MHz Auto Man |
| X RE SO C Center Freq 2.4220 Ref Offset 2. 10 dB/div Ref 20.00 -00 | ept SA 2 AC PNO: Fast - IFGain:Low 69 dB dBm GHz #VB | SENSE:INT Trig: Free Run #Atten: 30 dB | ALIGN AUTO Avg Type: Log-Pwr | 12:41:56 AM Mar 26, 2025 TRACE [] 2:3 4 5 6 TYPE WWWWW DET PINNIN MKr1 50.00 ms 5.05 dBm Span 0 Hz 1.0 ms (10001 pts) FUNCTION VALUE | Frequency Auto Tune Center Freq 2.422000000 GHz Start Freq 2.422000000 GHz Stop Freq 2.422000000 GHz 8.000000 MHz Auto Man Freq Offset |




14. Antenna Requirement

14.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

14.1 Test Result


The EUT antenna is metal antenna, fulfill the requirement of this section.

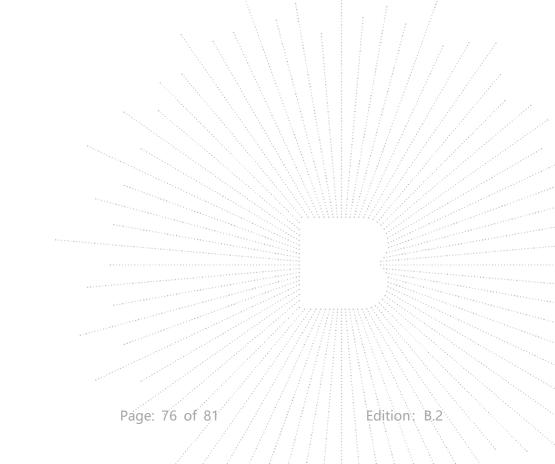




15. EUT Photographs

EUT Photo 1

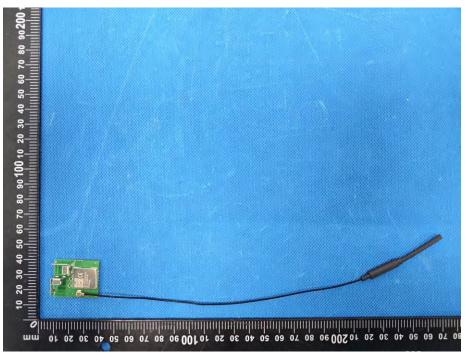

EUT Photo 2

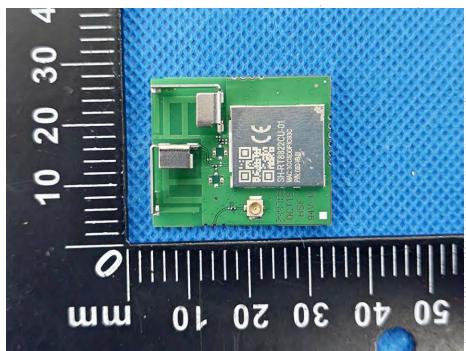



NOTE: Appendix-Photographs Of EUT Constructional Details.



16. EUT Test Setup Photographs

Conducted Emissions Photo

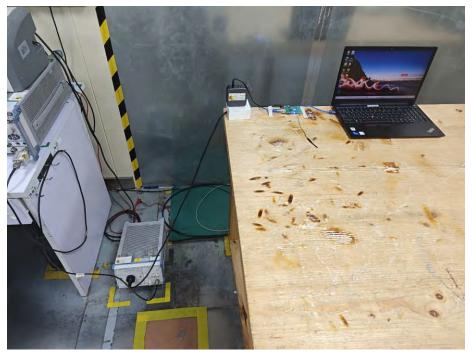

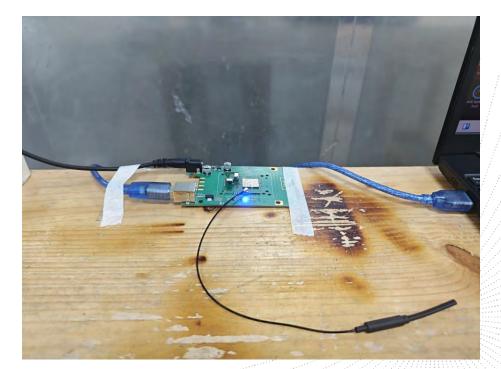


No.: BCTC/RF-EMC-005

Page: 78 of 81




Radiated Measurement Photos

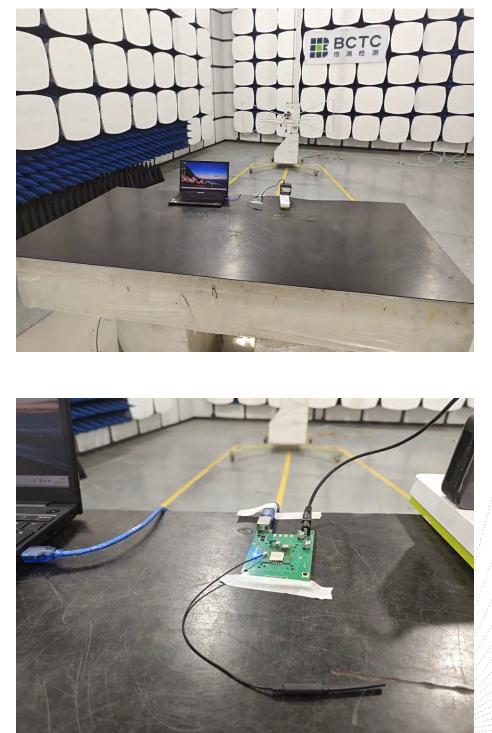

Page: 79 of 81



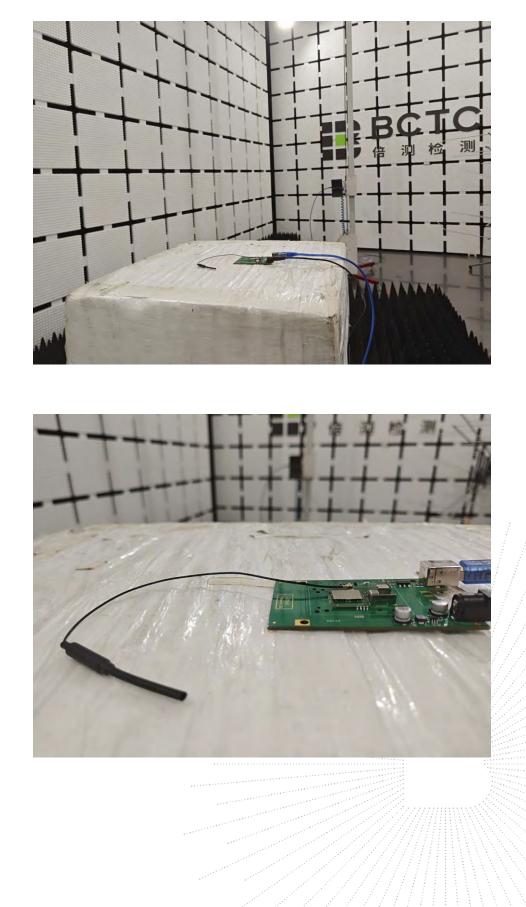

Page: 80 of 81



STATEMENT

- 1. The equipment lists are traceable to the national reference standards.
- 2. The test report can not be partially copied unless prior written approval is issued from our lab.
- 3. The test report is invalid without the "special seal for inspection and testing".
- 4. The test report is invalid without the signature of the approver.
- 5. The test process and test result is only related to the Unit Under Test.

6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.

7. The quality system of our laboratory is in accordance with ISO/IEC17025.

8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: http://www.chnbctc.com

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****

No.: BCTC/RF-EMC-005

Page: 81 of 81