



# **RADIO TEST REPORT**

**Test Report No. : 11170944S-B-R1**  
**(Original test report: 11014760S-B-R1)**

**Applicant** : Sony Corporation  
**Type of Equipment** : Wireless Transceiver Module  
**Model No.** : BNSY25  
**FCC ID** : AK8BNSY25  
**Test regulation** : FCC Part 15 Subpart C: 2015  
**Test item** : Radiated spurious emission  
**Test Result** : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. This report is a revised version of 11170944S-B. 11170944S-B is replaced with this report.

**Date of test:** March 3 to 30, 2016

**Representative test engineer:**

Yosuke Ishikawa

Engineer

Consumer Technology Division

**Approved by:**

Toyokazu Imamura

Leader

Consumer Technology Division



**JAB**  
Testing  
RTL02610

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.  
☒ There is no testing item of "Non-accreditation".

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

13-EM-F0429

## REVISION HISTORY

**Original Test Report No.: 11170944S-B**

[illegible]

| <b>CONTENTS</b>                                                     | <b>PAGE</b> |
|---------------------------------------------------------------------|-------------|
| <b>SECTION 1: Customer information.....</b>                         | <b>4</b>    |
| <b>SECTION 2: Equipment under test (E.U.T.).....</b>                | <b>4</b>    |
| <b>SECTION 3: Test specification, procedures &amp; results.....</b> | <b>5</b>    |
| <b>SECTION 4: Operation of E.U.T. during testing.....</b>           | <b>7</b>    |
| <b>SECTION 5: Radiated Spurious Emission .....</b>                  | <b>9</b>    |
| <b>APPENDIX 1: Test data .....</b>                                  | <b>11</b>   |
| Radiated Spurious Emission .....                                    | 11          |
| <b>APPENDIX 2: Test instruments .....</b>                           | <b>22</b>   |
| <b>APPENDIX 3: Photographs of test setup .....</b>                  | <b>23</b>   |
| Radiated Spurious Emission .....                                    | 23          |
| Pre-check of Worst Case Position.....                               | 24          |

## **SECTION 1: Customer information**

|                  |   |                                                    |
|------------------|---|----------------------------------------------------|
| Company Name     | : | Sony Global Manufacturing & Operations Corporation |
| Address          | : | 8-4 Shiomi Kisarazu-shi, Chiba, 292-0834 Japan     |
| Telephone Number | : | +81-438-37-3982                                    |
| Contact Person   | : | Kazuhiko Nagano                                    |

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

|                            |   |                                                                                           |
|----------------------------|---|-------------------------------------------------------------------------------------------|
| Type of Equipment          | : | Wireless Transceiver Module                                                               |
| Model No.                  | : | BNSY25                                                                                    |
| Serial No.                 | : | Refer to Section 4, Clause 4.2                                                            |
| Rating                     | : | DC 3.3 V, DC 2.8 V, DC 1.8 V                                                              |
| Receipt Date of Sample     | : | February 22, 2016                                                                         |
| Country of Mass-production | : | China, Taiwan                                                                             |
| Condition of EUT           | : | Production prototype<br>(Not for Sale: This sample is equivalent to mass-produced items.) |
| Modification of EUT        | : | No Modification by the test lab.                                                          |

### **2.2 Product Description**

Model: BNSY25 (referred to as the EUT in this report) is a Wireless Transceiver Module.

\* BNSY25 is Controller IC (MT8591, etc.) and RF front-end part (DHSR-SY25).

### **General Specification**

|                                    |   |        |
|------------------------------------|---|--------|
| Clock frequency(ies) in the system | : | 26 MHz |
|------------------------------------|---|--------|

### **Radio Specification**

|                        |   |                                                                                                                                                                                                                                                                                                                                     |
|------------------------|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Radio Type             | : | Transceiver                                                                                                                                                                                                                                                                                                                         |
| Frequency of Operation | : | Wireless LAN part:<br>2412-2462 MHz,<br>5180-5320 MHz, 5500-5700 MHz, 5745-5825 MHz<br>Bluetooth part:<br>2402-2480 MHz                                                                                                                                                                                                             |
| Modulation             | : | Wireless LAN part:<br>2.4 GHz bands: DBPSK, DQPSK, CCK, OFDM<br>5 GHz bands: OFDM<br>Bluetooth part:<br>BDR (Baisc Data Rate): GFSK<br>EDR (Enhanced Data Rate): $\pi/4$ -DQPSK, 8DPSK<br>LE (Low Energy mode): GFSK                                                                                                                |
| Antenna type           | : | Dipole                                                                                                                                                                                                                                                                                                                              |
| Antenna connector      | : | MHF4                                                                                                                                                                                                                                                                                                                                |
| Antenna Gain           | : | 2400 - 2483.5 MHz: +1.43 dBi max (include antenna cable 350 mm)<br>5150 - 5250 MHz: +0.59 dBi max (include antenna cable 350 mm)<br>5250 - 5350 MHz: -0.33 dBi max (include antenna cable 350 mm)<br>5470 - 5725 MHz: +0.08 dBi max (include antenna cable 350 mm)<br>5725 - 5850 MHz: +0.05 dBi max (include antenna cable 350 mm) |

Remarks: This Wireless Module consists of 1 chip each of 5 GHz band and 2.4 GHz band.

\* Refer to the test reports: 11014760S-A-R1 and 11170944S-A-R1 for FCC 15.247 (Wireless LAN part).

Refer to the test reports: 11014760S-C-R1, 11014760S-D and 11170944S-C-R1 for FCC 15.407.

---

## **UL Japan, Inc.**

### **Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart C: 2015, final revised on November 23, 2015  
 Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
 Section 15.207 Conducted limits  
 Section 15.247 Operation within the bands 902-928MHz,  
 2400-2483.5MHz, and 5725-5850MHz

\*Some parts are effective on and after December 17, 2015 or December 23, 2015. The revision does not affect the test specification applied to the EUT.

### **3.2 Procedures and results**

| Item                                                                                                                                                                                                            | Test Procedure                                                       | Specification                                                           | Worst Margin                                                 | Results  | Remarks                                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|-------------------------------------------------------------------------|--------------------------------------------------------------|----------|-----------------------------------------------------------------------|
| Conducted Emission                                                                                                                                                                                              | FCC: ANSI C63.10-2013<br>6. Standard test methods<br>IC: RSS-Gen 8.8 | FCC: Section 15.207<br>IC: RSS-Gen 8.8                                  | -                                                            | -        | *1)                                                                   |
| Carrier Frequency Separation                                                                                                                                                                                    | FCC: FCC Public Notice<br>DA 00-705<br>IC: -                         | FCC: Section15.247(a)(1)<br>IC: RSS-247 5.1 (2)                         |                                                              | -        | *1)                                                                   |
| 20dB Bandwidth                                                                                                                                                                                                  | FCC: FCC Public Notice<br>DA 00-705<br>IC: -                         | FCC: Section15.247(a)(1)<br>IC: RSS-247 5.1 (1)                         |                                                              | -        | *1)                                                                   |
| Number of Hopping Frequency                                                                                                                                                                                     | FCC: FCC Public Notice<br>DA 00-705<br>IC: -                         | FCC: Section15.247(a)(1)(iii)<br>IC: RSS-247 5.1 (4)                    |                                                              | -        | *1)                                                                   |
| Dwell time                                                                                                                                                                                                      | FCC: FCC Public Notice<br>DA 00-705<br>IC: -                         | FCC: Section15.247(a)(1)(iii)<br>IC: RSS-247 5.1 (4)                    |                                                              | -        | *1)                                                                   |
| Maximum Peak Output Power                                                                                                                                                                                       | FCC: FCC Public Notice<br>DA 00-705<br>IC: RSS-Gen 6.12              | FCC: Section15.247(a)(b)(1)<br>IC: RSS-247 5.4 (2)                      |                                                              | -        | *1)                                                                   |
| Spurious Emission & Band Edge Compliance                                                                                                                                                                        | FCC: FCC Public Notice<br>DA 00-705<br>IC: RSS-Gen 6.13              | FCC: Section15.247(d)<br>IC: RSS-247 5.5<br>RSS-Gen 8.9<br>RSS-Gen 8.10 | 8.1 dB<br>12400.00 MHz, AV, Vertical<br>(Tx, 3DH5, 2480 MHz) | Complied | Conducted<br>(below 30 MHz) *1)/<br>Radiated<br>(above 30 MHz)<br>*2) |
| Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.<br>*1) Refer to the original test report: 11014760S-B-R1.<br>*2) Radiated test was selected over 30 MHz based on section 15.247(d). |                                                                      |                                                                         |                                                              |          |                                                                       |

\* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

#### **FCC Part 15.31 (e)**

This EUT is provided the stable voltage (DC 3.3 V, DC 2.8 V, DC 1.8 V) constantly to RF unit regardless of input voltage from PMIC. Therefore, the equipment complies with the requirement.

#### **FCC Part 15.203 / 212**

The EUT has a unique coupling/antenna connector. Therefore, the equipment complies with the antenna requirement.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### 3.3 Addition to standard

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k = 2$ .  
Shonan EMC Lab.

| Item                                             | Frequency range | Uncertainty (+/-) |                |                |                |
|--------------------------------------------------|-----------------|-------------------|----------------|----------------|----------------|
|                                                  |                 | No. 1 SAC / SR    | No. 2 SAC / SR | No. 3 SAC / SR | No. 4 SAC / SR |
| Conducted emission (AC Mains) LISN               | 150 kHz-30 MHz  | 2.1 dB            | 2.1 dB         | 2.6 dB         | 2.2 dB         |
| Radiated emission<br>(Measurement distance: 3 m) | 9 kHz-30 MHz    | 2.7 dB            | 2.7 dB         | 3.1 dB         | -              |
|                                                  | 30 MHz-300 MHz  | 4.4 dB            | 4.4 dB         | 4.6 dB         | -              |
|                                                  | 300 MHz-1 GHz   | 5.6 dB            | 5.5 dB         | 5.3 dB         | -              |
|                                                  | 1 GHz-13 GHz    | 5.2 dB            | 5.2 dB         | 5.2 dB         | -              |
| Radiated emission<br>(Measurement distance: 1 m) | 13 GHz-18 GHz   | 4.9 dB            | 4.9 dB         | 4.9 dB         | -              |
|                                                  | 18 GHz-40 GHz   | 4.9 dB            | 4.9 dB         | 4.9 dB         | -              |

SAC=Semi-Anechoic Chamber

SR= Shielded Room is applied besides radiated emission

#### Radiated emission test

The data listed in this test report has enough margin, more than the site margin.

### 3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone: +81 463 50 6400, Facsimile: +81 463 50 6401

JAB Accreditation No. RTL02610

| Test site                  | IC Registration Number | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Maximum measurement distance |
|----------------------------|------------------------|----------------------------|------------------------------------------------------------------|------------------------------|
| No.1 Semi-anechoic chamber | 2973D-1                | 20.6 x 11.3 x 7.65         | 20.6 x 11.3                                                      | 10m                          |
| No.2 Semi-anechoic chamber | 2973D-2                | 20.6 x 11.3 x 7.65         | 20.6 x 11.3                                                      | 10m                          |
| No.3 Semi-anechoic chamber | 2973D-3                | 12.7 x 7.7 x 5.35          | 12.7 x 7.7                                                       | 5m                           |
| No.4 Semi-anechoic chamber | -                      | 8.1 x 5.1 x 3.55           | 8.1 x 5.1                                                        | -                            |
| No.1 Shielded room         | -                      | 6.8 x 4.1 x 2.7            | 6.8 x 4.1                                                        | -                            |
| No.2 Shielded room         | -                      | 6.8 x 4.1 x 2.7            | 6.8 x 4.1                                                        | -                            |
| No.3 Shielded room         | -                      | 6.3 x 4.7 x 2.7            | 6.3 x 4.7                                                        | -                            |
| No.4 Shielded room         | -                      | 4.4 x 4.7 x 2.7            | 4.4 x 4.7                                                        | -                            |
| No.5 Shielded room         | -                      | 7.8 x 6.4 x 2.7            | 7.8 x 6.4                                                        | -                            |
| No.6 Shielded room         | -                      | 7.8 x 6.4 x 2.7            | 7.8 x 6.4                                                        | -                            |
| No.8 shielded room         | -                      | 3.45 x 5.5 x 2.4           | 3.45 x 5.5                                                       | -                            |
| No.1 Measurement room      | -                      | 2.55 x 4.1 x 2.5           | -                                                                | -                            |

### 3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## **SECTION 4: Operation of E.U.T. during testing**


### **4.1 Operating Mode(s)**

Bluetooth (BT): Transmitting (Tx), Payload: PRBS9

Details of Operating Mode(s)

| Test Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Mode                       | Tested Antenna cable (length) | Tested frequency                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-------------------------------|----------------------------------|
| Spurious Emission (Radiated)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Tx (Hopping Off) DH5, 3DH5 | 350 mm                        | 2402 MHz<br>2441 MHz<br>2480 MHz |
| <p>*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test)</p> <p>*2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative.</p> <p>*EUT has the power settings by the software as follows;<br/>Power settings: Fixed<br/>Software: MT6625 BT Test Version 0.2</p> <p>*This setting of software is the worst case.<br/>Any conditions under the normal use do not exceed the condition of setting.<br/>In addition, end users cannot change the settings of the output power of the product.</p> |                            |                               |                                  |

## 4.2 Configuration and peripherals

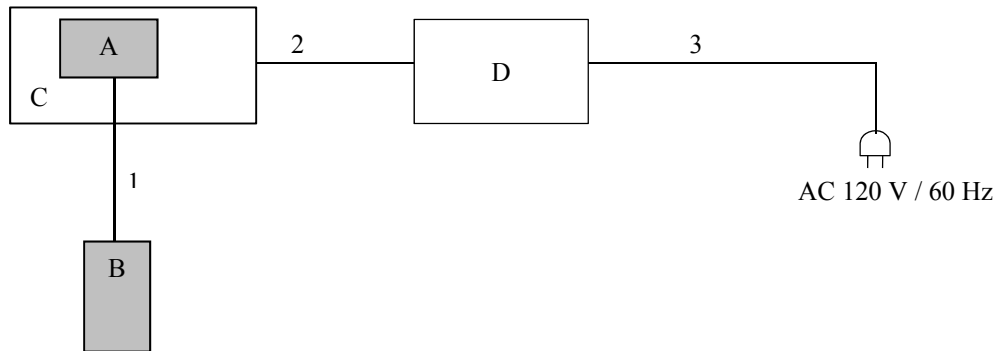

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

### Description of EUT

| No. | Item                        | Model number   | Serial number                            | Manufacturer                            | Remarks |
|-----|-----------------------------|----------------|------------------------------------------|-----------------------------------------|---------|
| A   | Wireless Transceiver Module | BNSY25         | 0F081530001703 *1)<br>0F08153000E603 *2) | Front-end: Wistron<br>NeWeb Corporation | EUT     |
|     |                             |                |                                          | Control IC:<br>MediaTek                 |         |
| B   | Antenna                     | Y121JT008A-X-S | -                                        | WIESON<br>TECHNOLOGIES<br>CO., LTD      | EUT     |
| C   | Jig board                   | -              | -                                        | Sony                                    | -       |
| D   | AC Adaptor                  | AC-M1208WW     | M1521540404                              | Sony                                    | -       |

\*1) Used in March 3, 5, 6 and 7

\*2) Used in March 24 and 30

### List of cables used

| No. | Name                     | Length (m) | Shield     |            | Remarks |
|-----|--------------------------|------------|------------|------------|---------|
|     |                          |            | Cable      | Connector  |         |
| 1   | Cable (Antenna)          | 0.35       | Shielded   | Shielded   | -       |
| 2   | Output cord (AC Adaptor) | 1.0        | Unshielded | Unshielded | -       |
| 3   | Power Supply Cord        | 0.7        | Unshielded | Unshielded | -       |

## **SECTION 5: Radiated Spurious Emission**

### **Test Procedure**

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength. The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer. The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

### **Test Antennas are used as below;**

|              |                   |                  |             |
|--------------|-------------------|------------------|-------------|
| Frequency    | 30 MHz to 300 MHz | 300 MHz to 1 GHz | Above 1 GHz |
| Antenna Type | Biconical         | Logperiodic      | Horn        |

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

### **20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (IC) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (IC).**

|                 |               |                                                                                                            |                              |                                                                                                            |
|-----------------|---------------|------------------------------------------------------------------------------------------------------------|------------------------------|------------------------------------------------------------------------------------------------------------|
| Frequency       | Below 1 GHz   | Above 1 GHz                                                                                                |                              | 20 dBc                                                                                                     |
| Instrument used | Test Receiver | Spectrum Analyzer                                                                                          |                              | Spectrum Analyzer                                                                                          |
| Detector        | QP            | PK                                                                                                         | AV                           | PK                                                                                                         |
| IF Bandwidth    | BW 120 kHz    | RBW: 1 MHz<br>VBW: 3 MHz                                                                                   | RBW: 1 MHz<br>VBW: 10 Hz *1) | RBW: 100 kHz<br>VBW: 300 kHz                                                                               |
| Test Distance   | 3 m           | 3.87 m *2) (below 13 GHz, SVSWR, 1AC),<br>4.37 m *2) (below 13 GHz, SVSWR, 3AC),<br>1 m *3) (above 13 GHz) |                              | 3.87 m *2) (below 13 GHz, SVSWR, 1AC),<br>4.37 m *2) (below 13 GHz, SVSWR, 3AC),<br>1 m *3) (above 13 GHz) |

\*1) Although DA 00-705 accepts VBW = 10 Hz for AV measurements, it was confirmed that superfluous smoothing was not performed.

\*2) Distance Factor:  $20 \times \log(3.87 \text{ m}/3 \text{ m}) = 2.2 \text{ dB}$  (for 1AC)

Distance Factor:  $20 \times \log(4.37 \text{ m}/3 \text{ m}) = 3.2 \text{ dB}$  (for 3AC)

\*3) Distance Factor:  $20 \times \log(1.0 \text{ m}/3.0 \text{ m}) = -9.5 \text{ dB}$

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

|         | Test<br>Antenna | Frequency<br>Carrier | Spurious     |          |           |           |
|---------|-----------------|----------------------|--------------|----------|-----------|-----------|
|         |                 |                      | 30 MHz-1 GHz | 1-13 GHz | 13-18 GHz | 18-26 GHz |
| Module  | Horizontal      | Z                    | X            | Z        | Y         | Z         |
|         | Vertical        | Z                    | Z            | Z        | X         | Z         |
| Antenna | Horizontal      | Y                    | X            | Y        | Y         | X         |
|         | Vertical        | Z                    | X            | Z        | Y         | X         |

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Measurement range** : 30 M – 26.5 GHz  
**Test data** : APPENDIX  
**Test result** : Pass

## APPENDIX 1: Test data

### Radiated Spurious Emission

Test place Shonan EMC Lab. No.1, 3 Semi Anechoic Chamber  
Report No. 11170944S-B-R1  
Date March 5, 2016 March 24, 2016 March 30, 2016 March 7, 2016 March 3, 2016  
Temperature / 27 deg. C / 25 deg. C / 25 deg. C / 25 deg. C / 20 deg. C /  
Humidity 31 % RH 45 % RH 37 % RH 45 % RH 28 % RH  
Engineer Hiroyuki Hiroyuki Yosuke Hiroyuki Hikaru  
Morikawa Morikawa Ishikawa Morikawa Shirasawa  
(1-2.8 GHz) (13-18 GHz) (18-26.5 GHz) (30-1000 MHz) (2.8-13 GHz)  
(3AC) (3AC) (3AC) (1AC) (1AC)  
Mode Tx, Hopping Off, DH5 2402 MHz

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|--------|
| Hori.    | 167.893         | QP       | 33.4           | 15.6            | 8.9       | 31.8      | 0.0                  | 26.1            | 43.5           | 17.4        | 175         | 259         |        |
| Hori.    | 225.792         | QP       | 35.3           | 16.7            | 9.4       | 31.7      | 0.0                  | 29.7            | 46.0           | 16.3        | 146         | 163         |        |
| Hori.    | 835.588         | QP       | 34.2           | 21.5            | 9.3       | 31.7      | 0.0                  | 33.3            | 46.0           | 12.7        | 100         | 341         |        |
| Hori.    | 2390.000        | PK       | 46.1           | 27.8            | 13.7      | 41.0      | 3.2                  | 49.8            | 73.9           | 24.1        | 145         | 197         |        |
| Hori.    | 4804.000        | PK       | 49.6           | 31.3            | 6.8       | 41.7      | 2.2                  | 48.2            | 73.9           | 25.7        | 100         | 6           |        |
| Hori.    | 7206.000        | PK       | 45.5           | 36.6            | 8.2       | 41.2      | 2.2                  | 51.3            | 73.9           | 22.6        | 150         | 0           |        |
| Hori.    | 9608.000        | PK       | 43.7           | 37.9            | 9.2       | 40.1      | 2.2                  | 52.9            | 73.9           | 21.0        | 150         | 0           |        |
| Hori.    | 12010.000       | PK       | 44.6           | 39.6            | 10.2      | 39.4      | 2.2                  | 57.2            | 73.9           | 16.7        | 150         | 0           |        |
| Hori.    | 2390.000        | AV       | 34.4           | 27.8            | 13.7      | 41.0      | 3.2                  | 38.1            | 53.9           | 15.8        | 145         | 197         |        |
| Hori.    | 4804.000        | AV       | 43.6           | 31.3            | 6.8       | 41.7      | 2.2                  | 42.2            | 53.9           | 11.7        | 100         | 6           |        |
| Hori.    | 7206.000        | AV       | 35.3           | 36.6            | 8.2       | 41.2      | 2.2                  | 41.1            | 53.9           | 12.8        | 150         | 0           |        |
| Hori.    | 9608.000        | AV       | 33.7           | 37.9            | 9.2       | 40.1      | 2.2                  | 42.9            | 53.9           | 11.0        | 150         | 0           |        |
| Hori.    | 12010.000       | AV       | 32.3           | 39.6            | 10.2      | 39.4      | 2.2                  | 44.9            | 53.9           | 9.0         | 150         | 0           |        |
| Vert.    | 67.493          | QP       | 48.9           | 6.3             | 7.3       | 31.8      | 0.0                  | 30.7            | 40.0           | 9.3         | 100         | 58          |        |
| Vert.    | 167.902         | QP       | 34.0           | 15.6            | 8.9       | 31.8      | 0.0                  | 26.7            | 43.5           | 16.8        | 100         | 281         |        |
| Vert.    | 225.794         | QP       | 34.7           | 16.7            | 9.4       | 31.7      | 0.0                  | 29.1            | 46.0           | 16.9        | 100         | 120         |        |
| Vert.    | 2390.000        | PK       | 46.2           | 27.8            | 13.7      | 41.0      | 3.2                  | 49.9            | 73.9           | 24.0        | 157         | 351         |        |
| Vert.    | 4804.000        | PK       | 49.2           | 31.3            | 6.8       | 41.7      | 2.2                  | 47.8            | 73.9           | 26.1        | 123         | 124         |        |
| Vert.    | 7206.000        | PK       | 44.2           | 36.6            | 8.2       | 41.2      | 2.2                  | 50.0            | 73.9           | 23.9        | 150         | 0           |        |
| Vert.    | 9608.000        | PK       | 43.6           | 37.9            | 9.2       | 40.1      | 2.2                  | 52.8            | 73.9           | 21.1        | 150         | 0           |        |
| Vert.    | 12010.000       | PK       | 42.9           | 39.6            | 10.2      | 39.4      | 2.2                  | 55.5            | 73.9           | 18.4        | 150         | 0           |        |
| Vert.    | 2390.000        | AV       | 34.3           | 27.8            | 13.7      | 41.0      | 3.2                  | 38.0            | 53.9           | 15.9        | 157         | 351         |        |
| Vert.    | 4804.000        | AV       | 43.9           | 31.3            | 6.8       | 41.7      | 2.2                  | 42.5            | 53.9           | 11.4        | 123         | 124         |        |
| Vert.    | 7206.000        | AV       | 33.6           | 36.6            | 8.2       | 41.2      | 2.2                  | 39.4            | 53.9           | 14.5        | 150         | 0           |        |
| Vert.    | 9608.000        | AV       | 32.0           | 37.9            | 9.2       | 40.1      | 2.2                  | 41.2            | 53.9           | 12.7        | 150         | 0           |        |
| Vert.    | 12010.000       | AV       | 32.2           | 39.6            | 10.2      | 39.4      | 2.2                  | 44.8            | 53.9           | 9.1         | 150         | 0           |        |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz :  $20\log(4.35 \text{ m} / 3.0 \text{ m}) = 3.2 \text{ dB (3AC)} / 20\log(3.85 \text{ m} / 3.0 \text{ m}) = 2.2 \text{ dB (1AC)}$

13 GHz - 40 GHz :  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

\* These results have sufficient margin without taking account Dwell time factor.

#### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark  |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|---------|
| Hori.    | 2402.000        | PK       | 101.8          | 27.8            | 13.7      | 41.0      | 3.2                  | 105.5           | -              | -           | Carrier |
| Hori.    | 2400.000        | PK       | 47.2           | 27.8            | 13.7      | 41.0      | 3.2                  | 50.9            | 85.5           | 34.6        |         |
| Vert.    | 2402.000        | PK       | 99.9           | 27.8            | 13.7      | 41.0      | 3.2                  | 103.6           | -              | -           | Carrier |
| Vert.    | 2400.000        | PK       | 44.3           | 27.8            | 13.7      | 41.0      | 3.2                  | 48.0            | 83.5           | 35.5        |         |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz :  $20\log(4.35 \text{ m} / 3.0 \text{ m}) = 3.2 \text{ dB (3AC)} / 20\log(3.85 \text{ m} / 3.0 \text{ m}) = 2.2 \text{ dB (1AC)}$

13 GHz - 40 GHz :  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission (Reference Plot for band-edge)

|                        |                                            |
|------------------------|--------------------------------------------|
| Test place             | Shonan EMC Lab. No.3 Semi Anechoic Chamber |
| Report No.             | 11170944S-B-R1                             |
| Date                   | March 5, 2016                              |
| Temperature / Humidity | 27 deg. C / 31 % RH                        |
| Engineer               | Hiroyuki Morikawa<br>(1-2.8 GHz)           |
| Mode                   | Tx, Hopping Off, DH5 2402 MHz              |

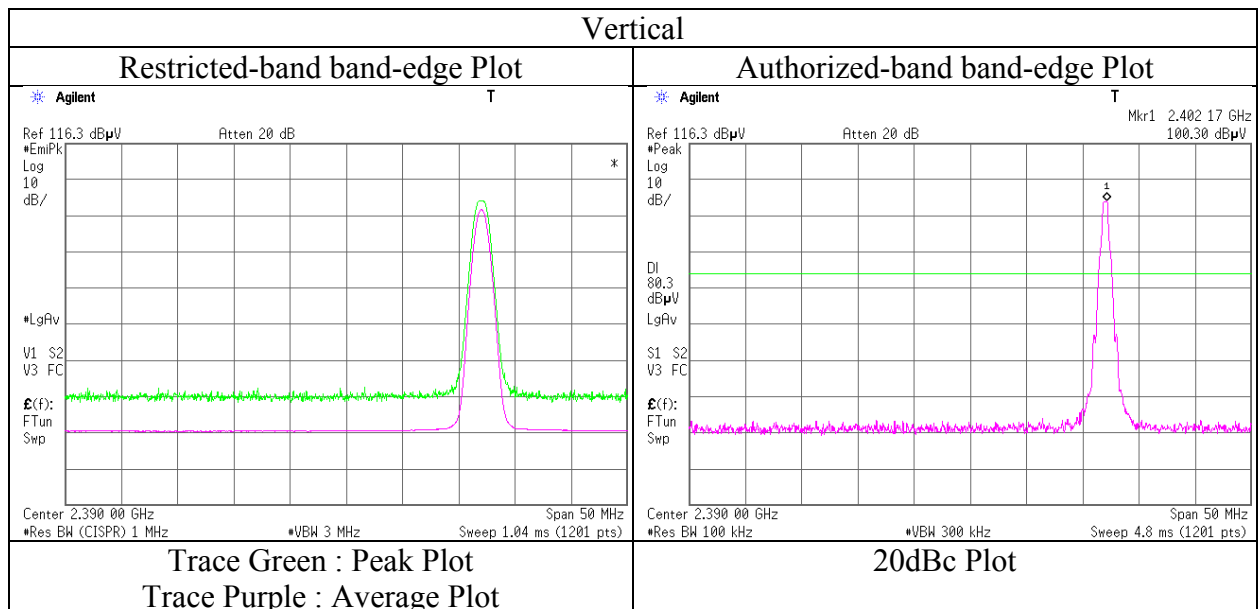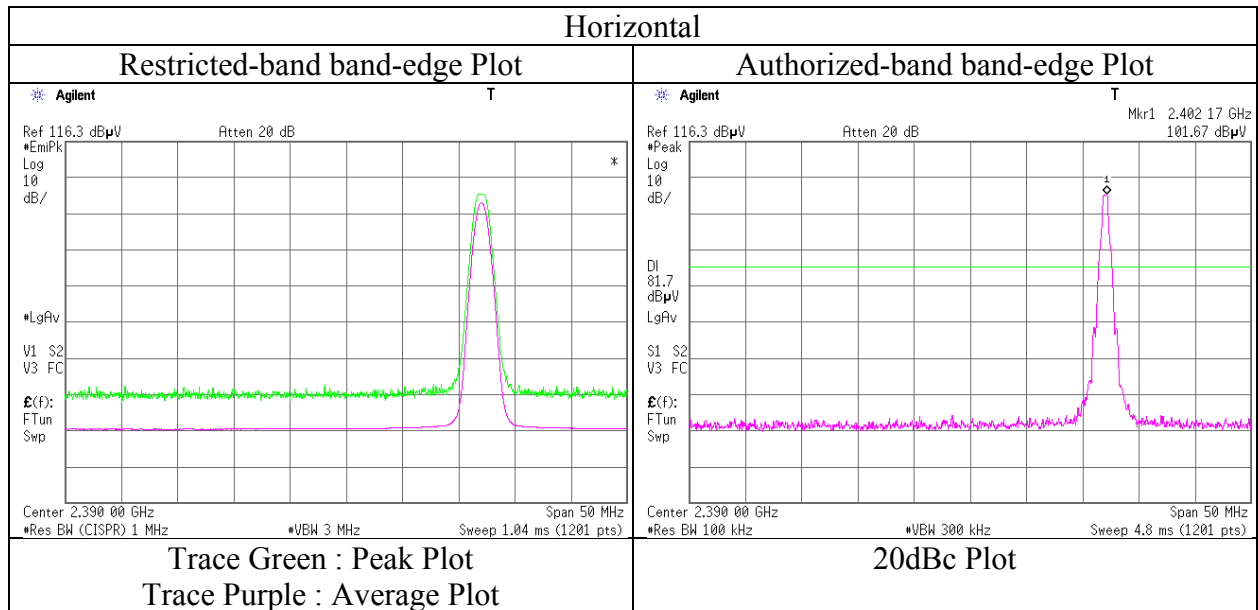

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

|               |                                               |                |                |               |               |
|---------------|-----------------------------------------------|----------------|----------------|---------------|---------------|
| Test place    | Shonan EMC Lab. No.1, 3 Semi Anechoic Chamber |                |                |               |               |
| Report No.    | 11170944S-B-R1                                |                |                |               |               |
| Date          | March 5, 2016                                 | March 24, 2016 | March 30, 2016 | March 7, 2016 | March 3, 2016 |
| Temperature / | 27 deg. C /                                   | 25 deg. C /    | 25 deg. C /    | 25 deg. C /   | 20 deg. C /   |
| Humidity      | 31 % RH                                       | 45 % RH        | 37 % RH        | 45 % RH       | 28 % RH       |
| Engineer      | Hiroyuki                                      | Hiroyuki       | Yosuke         | Hiroyuki      | Hikaru        |
|               | Morikawa                                      | Morikawa       | Ishikawa       | Morikawa      | Shirasawa     |
|               | (1-2.8 GHz)                                   | (13-18 GHz)    | (18-26.5 GHz)  | (30-1000 MHz) | (2.8-13 GHz)  |
|               | (3AC)                                         | (3AC)          | (3AC)          | (1AC)         | (1AC)         |
| Mode          | Tx, Hopping Off, DH5 2441 MHz                 |                |                |               |               |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|--------|
| Hori.    | 171.250         | QP       | 32.6           | 15.8            | 8.9       | 31.8      | 0.0                  | 25.5            | 43.5           | 18.0        | 174         | 275         |        |
| Hori.    | 225.789         | QP       | 35.3           | 16.7            | 9.4       | 31.7      | 0.0                  | 29.7            | 46.0           | 16.3        | 145         | 165         |        |
| Hori.    | 835.592         | QP       | 34.1           | 21.5            | 9.3       | 31.7      | 0.0                  | 33.2            | 46.0           | 12.8        | 100         | 341         |        |
| Hori.    | 4882.000        | PK       | 48.8           | 31.6            | 6.9       | 41.6      | 2.2                  | 47.9            | 73.9           | 26.0        | 145         | 184         |        |
| Hori.    | 7323.000        | PK       | 45.8           | 36.7            | 8.2       | 41.3      | 2.2                  | 51.6            | 73.9           | 22.3        | 150         | 0           |        |
| Hori.    | 9764.000        | PK       | 44.4           | 38.0            | 9.3       | 40.1      | 2.2                  | 53.8            | 73.9           | 20.1        | 150         | 0           |        |
| Hori.    | 12205.000       | PK       | 44.0           | 39.6            | 10.2      | 39.2      | 2.2                  | 56.8            | 73.9           | 17.1        | 150         | 0           |        |
| Hori.    | 4882.000        | AV       | 43.2           | 31.6            | 6.9       | 41.6      | 2.2                  | 42.3            | 53.9           | 11.6        | 145         | 184         |        |
| Hori.    | 7323.000        | AV       | 33.8           | 36.7            | 8.2       | 41.3      | 2.2                  | 39.6            | 53.9           | 14.3        | 150         | 0           |        |
| Hori.    | 9764.000        | AV       | 32.3           | 38.0            | 9.3       | 40.1      | 2.2                  | 41.7            | 53.9           | 12.2        | 150         | 0           |        |
| Hori.    | 12205.000       | AV       | 32.1           | 39.6            | 10.2      | 39.2      | 2.2                  | 44.9            | 53.9           | 9.0         | 150         | 0           |        |
| Vert.    | 67.493          | QP       | 48.9           | 6.3             | 7.3       | 31.8      | 0.0                  | 30.7            | 40.0           | 9.3         | 100         | 56          |        |
| Vert.    | 167.887         | QP       | 34.0           | 15.6            | 8.9       | 31.8      | 0.0                  | 26.7            | 43.5           | 16.8        | 100         | 283         |        |
| Vert.    | 225.791         | QP       | 34.6           | 16.7            | 9.4       | 31.7      | 0.0                  | 29.0            | 46.0           | 17.0        | 100         | 126         |        |
| Vert.    | 4882.000        | PK       | 48.6           | 31.6            | 6.9       | 41.6      | 2.2                  | 47.7            | 73.9           | 26.2        | 153         | 260         |        |
| Vert.    | 7323.000        | PK       | 46.0           | 36.7            | 8.2       | 41.3      | 2.2                  | 51.8            | 73.9           | 22.1        | 150         | 0           |        |
| Vert.    | 9764.000        | PK       | 45.6           | 38.0            | 9.3       | 40.1      | 2.2                  | 55.0            | 73.9           | 18.9        | 150         | 0           |        |
| Vert.    | 12205.000       | PK       | 43.4           | 39.6            | 10.2      | 39.2      | 2.2                  | 56.2            | 73.9           | 17.7        | 150         | 0           |        |
| Vert.    | 4882.000        | AV       | 42.9           | 31.6            | 6.9       | 41.6      | 2.2                  | 42.0            | 53.9           | 11.9        | 153         | 260         |        |
| Vert.    | 7323.000        | AV       | 33.9           | 36.7            | 8.2       | 41.3      | 2.2                  | 39.7            | 53.9           | 14.2        | 150         | 0           |        |
| Vert.    | 9764.000        | AV       | 32.5           | 38.0            | 9.3       | 40.1      | 2.2                  | 41.9            | 53.9           | 12.0        | 150         | 0           |        |
| Vert.    | 12205.000       | AV       | 32.1           | 39.6            | 10.2      | 39.2      | 2.2                  | 44.9            | 53.9           | 9.0         | 150         | 0           |        |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz :  $20\log(4.35 \text{ m} / 3.0 \text{ m}) = 3.2 \text{ dB (3AC)} / 20\log(3.85 \text{ m} / 3.0 \text{ m}) = 2.2 \text{ dB (1AC)}$

13 GHz - 40 GHz :  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

\* These results have sufficient margin without taking account Dwell time factor.

## Radiated Spurious Emission

|               |                                               |                   |                 |                   |                  |
|---------------|-----------------------------------------------|-------------------|-----------------|-------------------|------------------|
| Test place    | Shonan EMC Lab. No.1, 3 Semi Anechoic Chamber |                   |                 |                   |                  |
| Report No.    | 11170944S-B-R1                                |                   |                 |                   |                  |
| Date          | March 5, 2016                                 | March 24, 2016    | March 30, 2016  | March 7, 2016     | March 3, 2016    |
| Temperature / | 27 deg. C /                                   | 25 deg. C /       | 25 deg. C /     | 25 deg. C /       | 20 deg. C /      |
| Humidity      | 31 % RH                                       | 45 % RH           | 37 % RH         | 45 % RH           | 28 % RH          |
| Engineer      | Hiroyuki Morikawa                             | Hiroyuki Morikawa | Yosuke Ishikawa | Hiroyuki Morikawa | Hikaru Shirasawa |
|               | (1-2.8 GHz)                                   | (13-18 GHz)       | (18-26.5 GHz)   | (30-1000 MHz)     | (2.8-13 GHz)     |
|               | (3AC)                                         | (3AC)             | (3AC)           | (1AC)             | (1AC)            |
| Mode          | Tx, Hopping Off, DH5 2480 MHz                 |                   |                 |                   |                  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|--------|
| Hori.    | 167.971         | QP       | 33.7           | 15.6            | 8.9       | 31.8      | 0.0                  | 26.4            | 43.5           | 17.1        | 180         | 272         |        |
| Hori.    | 225.792         | QP       | 35.2           | 16.7            | 9.4       | 31.7      | 0.0                  | 29.6            | 46.0           | 16.4        | 144         | 159         |        |
| Hori.    | 835.587         | QP       | 34.2           | 21.5            | 9.3       | 31.7      | 0.0                  | 33.3            | 46.0           | 12.7        | 100         | 342         |        |
| Hori.    | 2483.500        | PK       | 48.1           | 27.9            | 13.8      | 41.0      | 3.2                  | 52.0            | 73.9           | 21.9        | 164         | 195         |        |
| Hori.    | 4960.000        | PK       | 47.8           | 31.9            | 6.9       | 41.6      | 2.2                  | 47.2            | 73.9           | 26.7        | 141         | 11          |        |
| Hori.    | 7440.000        | PK       | 45.7           | 36.7            | 8.2       | 41.3      | 2.2                  | 51.5            | 73.9           | 22.4        | 150         | 0           |        |
| Hori.    | 9920.000        | PK       | 44.6           | 38.1            | 9.4       | 40.0      | 2.2                  | 54.3            | 73.9           | 19.6        | 150         | 0           |        |
| Hori.    | 12400.000       | PK       | 43.0           | 39.6            | 10.2      | 39.0      | 2.2                  | 56.0            | 73.9           | 17.9        | 150         | 0           |        |
| Hori.    | 2483.500        | AV       | 35.6           | 27.9            | 13.8      | 41.0      | 2.2                  | 38.5            | 53.9           | 15.4        | 164         | 195         |        |
| Hori.    | 4960.000        | AV       | 42.1           | 31.9            | 6.9       | 41.6      | 2.2                  | 41.5            | 53.9           | 12.4        | 141         | 11          |        |
| Hori.    | 7440.000        | AV       | 34.3           | 36.7            | 8.2       | 41.3      | 2.2                  | 40.1            | 53.9           | 13.8        | 150         | 0           |        |
| Hori.    | 9920.000        | AV       | 33.3           | 38.1            | 9.4       | 40.0      | 2.2                  | 43.0            | 53.9           | 10.9        | 150         | 0           |        |
| Hori.    | 12400.000       | AV       | 32.2           | 39.6            | 10.2      | 39.0      | 2.2                  | 45.2            | 53.9           | 8.7         | 150         | 0           |        |
| Vert.    | 67.507          | QP       | 49.0           | 6.3             | 7.3       | 31.8      | 0.0                  | 30.8            | 40.0           | 9.2         | 100         | 47          |        |
| Vert.    | 167.933         | QP       | 34.0           | 15.6            | 8.9       | 31.8      | 0.0                  | 26.7            | 43.5           | 16.8        | 100         | 286         |        |
| Vert.    | 225.794         | QP       | 34.7           | 16.7            | 9.4       | 31.7      | 0.0                  | 29.1            | 46.0           | 16.9        | 100         | 124         |        |
| Vert.    | 2483.500        | PK       | 47.3           | 27.9            | 13.8      | 41.0      | 3.2                  | 51.2            | 73.9           | 22.7        | 197         | 237         |        |
| Vert.    | 4960.000        | PK       | 47.9           | 31.9            | 6.9       | 41.6      | 2.2                  | 47.3            | 73.9           | 26.6        | 144         | 347         |        |
| Vert.    | 7440.000        | PK       | 46.1           | 36.7            | 8.2       | 41.3      | 2.2                  | 51.9            | 73.9           | 22.0        | 150         | 0           |        |
| Vert.    | 9920.000        | PK       | 44.7           | 38.1            | 9.4       | 40.0      | 2.2                  | 54.4            | 73.9           | 19.5        | 150         | 0           |        |
| Vert.    | 12400.000       | PK       | 44.9           | 39.6            | 10.2      | 39.0      | 2.2                  | 57.9            | 73.9           | 16.0        | 150         | 0           |        |
| Vert.    | 2483.500        | AV       | 35.2           | 27.9            | 13.8      | 41.0      | 2.2                  | 38.1            | 53.9           | 15.8        | 197         | 237         |        |
| Vert.    | 4960.000        | AV       | 41.4           | 31.9            | 6.9       | 41.6      | 2.2                  | 40.8            | 53.9           | 13.1        | 144         | 347         |        |
| Vert.    | 7440.000        | AV       | 34.2           | 36.7            | 8.2       | 41.3      | 2.2                  | 40.0            | 53.9           | 13.9        | 150         | 0           |        |
| Vert.    | 9920.000        | AV       | 33.3           | 38.1            | 9.4       | 40.0      | 2.2                  | 43.0            | 53.9           | 10.9        | 150         | 0           |        |
| Vert.    | 12400.000       | AV       | 32.5           | 39.6            | 10.2      | 39.0      | 2.2                  | 45.5            | 53.9           | 8.4         | 150         | 0           |        |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



Distance factor : 1 GHz - 13 GHz :  $20\log(4.35 \text{ m} / 3.0 \text{ m}) = 3.2 \text{ dB (3AC)} / 20\log(3.85 \text{ m} / 3.0 \text{ m}) = 2.2 \text{ dB (1AC)}$

13 GHz - 40 GHz :  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

\* These results have sufficient margin without taking account Dwell time factor.

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

Test place Shonan EMC Lab. No.3 Semi Anechoic Chamber  
Report No. 11170944S-B-R1  
Date March 5, 2016  
Temperature / Humidity 27 deg. C / 31 % RH  
Engineer Hiroyuki Morikawa  
(1-2.8 GHz)  
Mode Tx, Hopping Off, DH5 2480 MHz

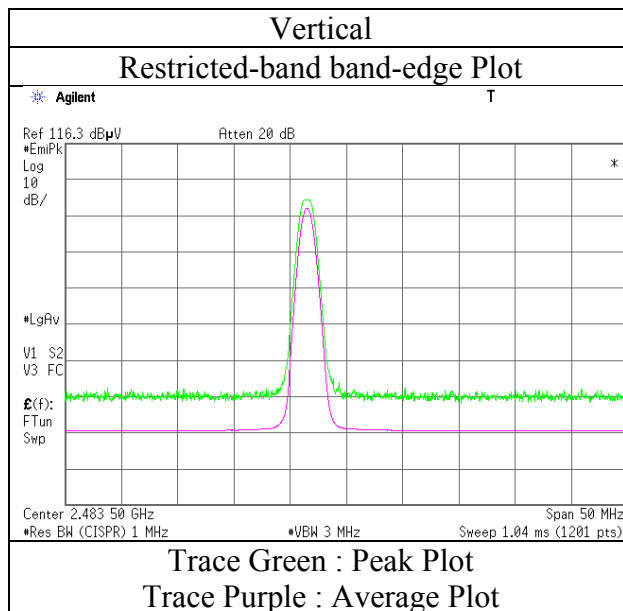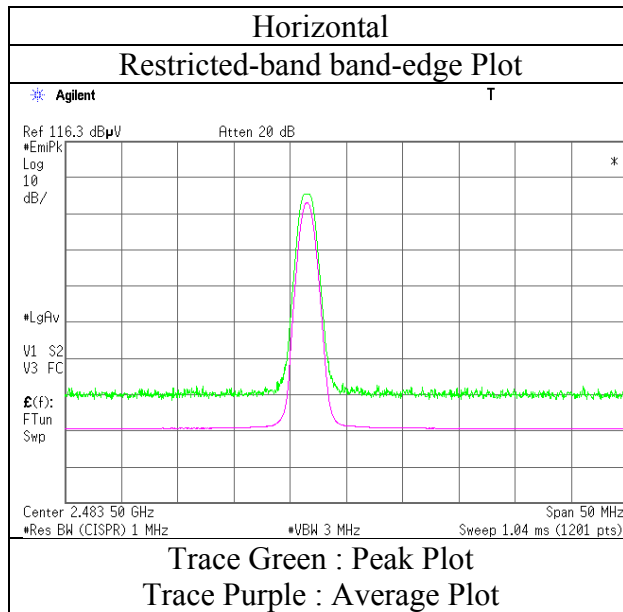

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

|               |                                               |                |                |               |               |  |
|---------------|-----------------------------------------------|----------------|----------------|---------------|---------------|--|
| Test place    | Shonan EMC Lab. No.1, 3 Semi Anechoic Chamber |                |                |               |               |  |
| Report No.    | 11170944S-B-R1                                |                |                |               |               |  |
| Date          | March 5, 2016                                 | March 24, 2016 | March 30, 2016 | March 7, 2016 | March 3, 2016 |  |
| Temperature / | 27 deg. C /                                   | 25 deg. C /    | 25 deg. C /    | 25 deg. C /   | 20 deg. C /   |  |
| Humidity      | 31 % RH                                       | 45 % RH        | 37 % RH        | 45 % RH       | 28 % RH       |  |
| Engineer      | Hiroyuki                                      | Hiroyuki       | Yosuke         | Hiroyuki      | Hikaru        |  |
|               | Morikawa                                      | Morikawa       | Ishikawa       | Morikawa      | Shirasawa     |  |
|               | (1-2.8 GHz)                                   | (13-18 GHz)    | (18-26.5 GHz)  | (30-1000 MHz) | (2.8-13 GHz)  |  |
|               | (3AC)                                         | (3AC)          | (3AC)          | (1AC)         | (1AC)         |  |
| Mode          | Tx, Hopping Off, 3DH5 2402 MHz                |                |                |               |               |  |

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|--------|
| Hori.    | 167.954         | QP       | 33.5           | 15.6            | 8.9       | 31.8      | 0.0                  | 26.2            | 43.5           | 17.3        | 178         | 274         |        |
| Hori.    | 225.790         | QP       | 35.2           | 16.7            | 9.4       | 31.7      | 0.0                  | 29.6            | 46.0           | 16.4        | 144         | 165         |        |
| Hori.    | 835.589         | QP       | 34.2           | 21.5            | 9.3       | 31.7      | 0.0                  | 33.3            | 46.0           | 12.7        | 100         | 341         |        |
| Hori.    | 2390.000        | PK       | 45.7           | 27.8            | 13.7      | 41.0      | 3.2                  | 49.4            | 73.9           | 24.5        | 149         | 198         |        |
| Hori.    | 4804.000        | PK       | 49.4           | 31.3            | 6.8       | 41.7      | 2.2                  | 48.0            | 73.9           | 25.9        | 142         | 8           |        |
| Hori.    | 7206.000        | PK       | 44.8           | 36.6            | 8.2       | 41.2      | 2.2                  | 50.5            | 73.9           | 23.4        | 150         | 0           |        |
| Hori.    | 9608.000        | PK       | 43.7           | 37.9            | 9.2       | 40.1      | 2.2                  | 52.9            | 73.9           | 21.0        | 150         | 0           |        |
| Hori.    | 12010.000       | PK       | 43.8           | 39.6            | 10.2      | 39.4      | 2.2                  | 56.3            | 73.9           | 17.6        | 150         | 0           |        |
| Hori.    | 2390.000        | AV       | 34.4           | 27.8            | 13.7      | 41.0      | 3.2                  | 38.1            | 53.9           | 15.8        | 149         | 198         |        |
| Hori.    | 4804.000        | AV       | 44.1           | 31.3            | 6.8       | 41.7      | 2.2                  | 42.7            | 53.9           | 11.2        | 142         | 8           |        |
| Hori.    | 7206.000        | AV       | 33.4           | 36.6            | 8.2       | 41.2      | 2.2                  | 39.1            | 53.9           | 14.8        | 150         | 0           |        |
| Hori.    | 9608.000        | AV       | 32.4           | 37.9            | 9.2       | 40.1      | 2.2                  | 41.6            | 53.9           | 12.3        | 150         | 0           |        |
| Hori.    | 12010.000       | AV       | 32.4           | 39.6            | 10.2      | 39.4      | 2.2                  | 45.0            | 53.9           | 8.9         | 150         | 0           |        |
| Vert.    | 67.498          | QP       | 48.9           | 6.3             | 7.3       | 31.8      | 0.0                  | 30.7            | 40.0           | 9.3         | 100         | 58          |        |
| Vert.    | 167.921         | QP       | 34.0           | 15.6            | 8.9       | 31.8      | 0.0                  | 26.7            | 43.5           | 16.8        | 100         | 288         |        |
| Vert.    | 225.794         | QP       | 34.6           | 16.7            | 9.4       | 31.7      | 0.0                  | 29.0            | 46.0           | 17.0        | 100         | 123         |        |
| Vert.    | 2390.000        | PK       | 46.7           | 27.8            | 13.7      | 41.0      | 3.2                  | 50.4            | 73.9           | 23.5        | 164         | 353         |        |
| Vert.    | 4804.000        | PK       | 49.8           | 31.3            | 6.8       | 41.7      | 2.2                  | 48.4            | 73.9           | 25.6        | 144         | 118         |        |
| Vert.    | 7206.000        | PK       | 44.6           | 36.6            | 8.2       | 41.2      | 2.2                  | 50.4            | 73.9           | 23.6        | 150         | 0           |        |
| Vert.    | 9608.000        | PK       | 43.9           | 37.9            | 9.2       | 40.1      | 2.2                  | 53.0            | 73.9           | 20.9        | 150         | 0           |        |
| Vert.    | 12010.000       | PK       | 45.0           | 39.6            | 10.2      | 39.4      | 2.2                  | 57.6            | 73.9           | 16.4        | 150         | 0           |        |
| Vert.    | 2390.000        | AV       | 34.2           | 27.8            | 13.7      | 41.0      | 3.2                  | 37.9            | 53.9           | 16.0        | 164         | 353         |        |
| Vert.    | 4804.000        | AV       | 44.6           | 31.3            | 6.8       | 41.7      | 2.2                  | 43.1            | 53.9           | 10.8        | 144         | 118         |        |
| Vert.    | 7206.000        | AV       | 33.5           | 36.6            | 8.2       | 41.2      | 2.2                  | 39.3            | 53.9           | 14.6        | 150         | 0           |        |
| Vert.    | 9608.000        | AV       | 32.5           | 37.9            | 9.2       | 40.1      | 2.2                  | 41.6            | 53.9           | 12.3        | 150         | 0           |        |
| Vert.    | 12010.000       | AV       | 32.4           | 39.6            | 10.2      | 39.4      | 2.2                  | 45.0            | 53.9           | 8.9         | 150         | 0           |        |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz :  $20\log(4.35\text{ m} / 3.0\text{ m}) = 3.2\text{ dB (3AC)} / 20\log(3.85\text{ m} / 3.0\text{ m}) = 2.2\text{ dB (1AC)}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

\* These results have sufficient margin without taking account Dwell time factor.

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark  |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|---------|
| Hori.    | 2402.000        | PK       | 99.8           | 27.8            | 13.7      | 41.0      | 3.2                  | 103.5           | -              | -           | Carrier |
| Hori.    | 2400.000        | PK       | 44.0           | 27.8            | 13.7      | 41.0      | 3.2                  | 47.7            | 83.5           | 35.8        |         |
| Vert.    | 2402.000        | PK       | 98.8           | 27.8            | 13.7      | 41.0      | 3.2                  | 102.5           | -              | -           | Carrier |
| Vert.    | 2400.000        | PK       | 42.1           | 27.8            | 13.7      | 41.0      | 3.2                  | 45.8            | 82.5           | 36.7        |         |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz :  $20\log(4.35\text{ m} / 3.0\text{ m}) = 3.2\text{ dB (3AC)} / 20\log(3.85\text{ m} / 3.0\text{ m}) = 2.2\text{ dB (1AC)}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission (Reference Plot for band-edge)

|                        |                                            |
|------------------------|--------------------------------------------|
| Test place             | Shonan EMC Lab. No.3 Semi Anechoic Chamber |
| Report No.             | 11170944S-B-R1                             |
| Date                   | March 5, 2016                              |
| Temperature / Humidity | 27 deg. C / 31 % RH                        |
| Engineer               | Hiroyuki Morikawa<br>(1-2.8 GHz)           |
| Mode                   | Tx, Hopping Off, 3DH5 2402 MHz             |

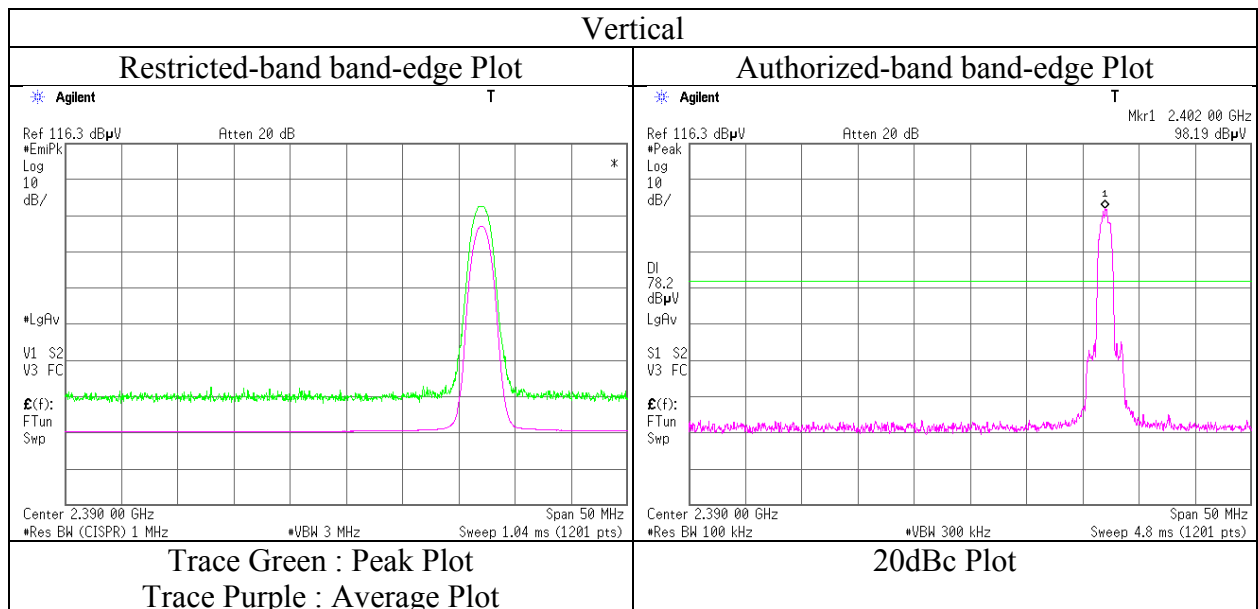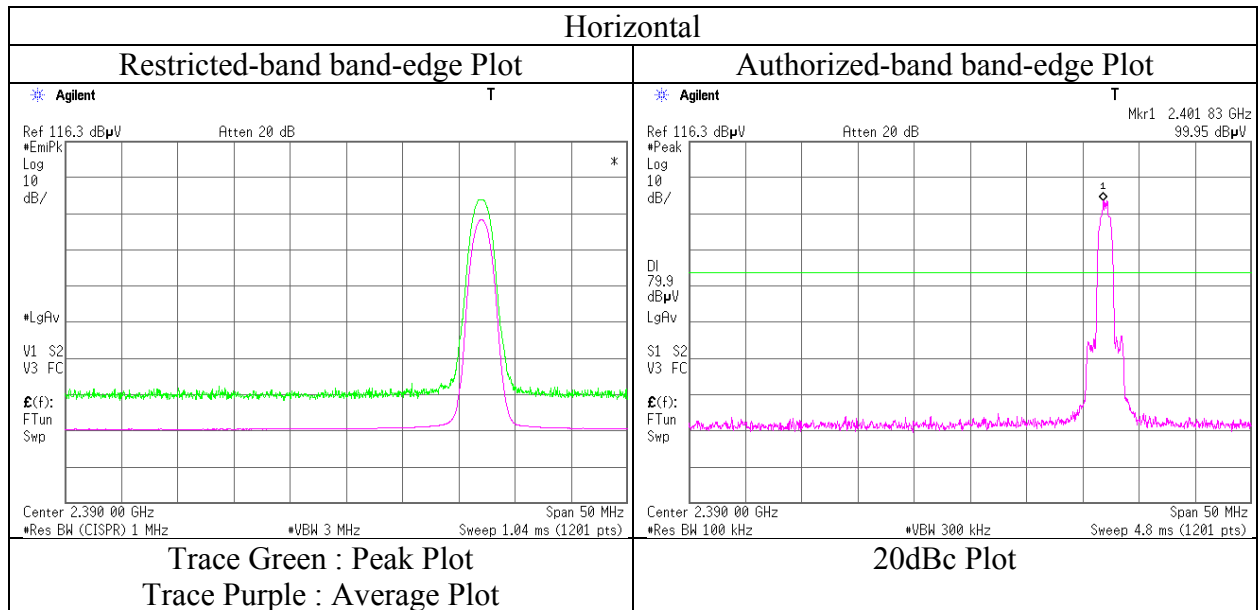

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place Shonan EMC Lab. No.1, 3 Semi Anechoic Chamber  
Report No. 11170944S-B-R1  
Date March 6, 2016 March 24, 2016 March 30, 2016 March 7, 2016 March 3, 2016  
Temperature / 26 deg. C / 25 deg. C / 25 deg. C / 25 deg. C / 20 deg. C /  
Humidity 28 % RH 45 % RH 37 % RH 45 % RH 28 % RH  
Engineer Kenichi Adachi Hiroyuki Yosuke Hiroyuki Hikaru  
(1-2.8 GHz) (13-18 GHz) (18-26.5 GHz) (30-1000 MHz) (2.8-13 GHz)  
(3AC) (3AC) (3AC) (1AC) (1AC)  
Mode Tx, Hopping Off, 3DH5 2441 MHz

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|--------|
| Hori.    | 167.971         | QP       | 33.4           | 15.6            | 8.9       | 31.8      | 0.0                  | 26.1            | 43.5           | 17.4        | 180         | 273         |        |
| Hori.    | 225.791         | QP       | 35.1           | 16.7            | 9.4       | 31.7      | 0.0                  | 29.5            | 46.0           | 16.5        | 145         | 161         |        |
| Hori.    | 835.588         | QP       | 34.2           | 21.5            | 9.3       | 31.7      | 0.0                  | 33.3            | 46.0           | 12.7        | 100         | 342         |        |
| Hori.    | 4882.000        | PK       | 48.5           | 31.6            | 6.9       | 41.6      | 2.2                  | 47.6            | 73.9           | 26.3        | 115         | 11          |        |
| Hori.    | 7323.000        | PK       | 45.9           | 36.7            | 8.2       | 41.3      | 2.2                  | 51.7            | 73.9           | 22.2        | 150         | 0           |        |
| Hori.    | 9764.000        | PK       | 44.1           | 38.0            | 9.3       | 40.1      | 2.2                  | 53.5            | 73.9           | 20.4        | 150         | 0           |        |
| Hori.    | 12205.000       | PK       | 42.8           | 39.6            | 10.2      | 39.2      | 2.2                  | 55.6            | 73.9           | 18.3        | 150         | 0           |        |
| Hori.    | 4882.000        | AV       | 43.6           | 31.6            | 6.9       | 41.6      | 2.2                  | 42.7            | 53.9           | 11.2        | 115         | 11          |        |
| Hori.    | 7323.000        | AV       | 34.1           | 36.7            | 8.2       | 41.3      | 2.2                  | 39.9            | 53.9           | 14.0        | 150         | 0           |        |
| Hori.    | 9764.000        | AV       | 32.8           | 38.0            | 9.3       | 40.1      | 2.2                  | 42.2            | 53.9           | 11.7        | 150         | 0           |        |
| Hori.    | 12205.000       | AV       | 32.1           | 39.6            | 10.2      | 39.2      | 2.2                  | 44.9            | 53.9           | 9.0         | 150         | 0           |        |
| Vert.    | 67.494          | QP       | 48.8           | 6.3             | 7.3       | 31.8      | 0.0                  | 30.6            | 40.0           | 9.4         | 100         | 57          |        |
| Vert.    | 167.911         | QP       | 34.0           | 15.6            | 8.9       | 31.8      | 0.0                  | 26.7            | 43.5           | 16.8        | 100         | 284         |        |
| Vert.    | 225.794         | QP       | 34.7           | 16.7            | 9.4       | 31.7      | 0.0                  | 29.1            | 46.0           | 16.9        | 100         | 125         |        |
| Vert.    | 4882.000        | PK       | 48.7           | 31.6            | 6.9       | 41.6      | 2.2                  | 47.8            | 73.9           | 26.1        | 149         | 308         |        |
| Vert.    | 7323.000        | PK       | 45.4           | 36.7            | 8.2       | 41.3      | 2.2                  | 51.2            | 73.9           | 22.7        | 150         | 0           |        |
| Vert.    | 9764.000        | PK       | 45.5           | 38.0            | 9.3       | 40.1      | 2.2                  | 54.9            | 73.9           | 19.0        | 150         | 0           |        |
| Vert.    | 12205.000       | PK       | 43.8           | 39.6            | 10.2      | 39.2      | 2.2                  | 56.6            | 73.9           | 17.3        | 150         | 0           |        |
| Vert.    | 4882.000        | AV       | 42.6           | 31.6            | 6.9       | 41.6      | 2.2                  | 41.7            | 53.9           | 12.2        | 149         | 308         |        |
| Vert.    | 7323.000        | AV       | 34.3           | 36.7            | 8.2       | 41.3      | 2.2                  | 40.1            | 53.9           | 13.8        | 150         | 0           |        |
| Vert.    | 9764.000        | AV       | 32.8           | 38.0            | 9.3       | 40.1      | 2.2                  | 42.2            | 53.9           | 11.7        | 150         | 0           |        |
| Vert.    | 12205.000       | AV       | 32.0           | 39.6            | 10.2      | 39.2      | 2.2                  | 44.8            | 53.9           | 9.1         | 150         | 0           |        |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz :  $20\log(4.35 \text{ m} / 3.0 \text{ m}) = 3.2 \text{ dB (3AC)} / 20\log(3.85 \text{ m} / 3.0 \text{ m}) = 2.2 \text{ dB (1AC)}$

13 GHz - 40 GHz :  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

\* These results have sufficient margin without taking account Dwell time factor.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Spurious Emission

Test place Shonan EMC Lab. No.1, 3 Semi Anechoic Chamber  
Report No. 11170944S-B-R1  
Date March 6, 2016 March 24, 2016 March 30, 2016 March 7, 2016 March 3, 2016  
Temperature / 26 deg. C / 25 deg. C / 25 deg. C / 25 deg. C / 20 deg. C /  
Humidity 28 % RH 45 % RH 37 % RH 45 % RH 28 % RH  
Engineer Kenichi Adachi Hiroyuki Yosuke Hiroyuki Hikaru  
(1-2.8 GHz) (13-18 GHz) (18-26.5 GHz) (30-1000 MHz) (2.8-13 GHz)  
(3AC) (3AC) (3AC) (1AC) (1AC)  
Mode Tx, Hopping Off, 3DH5 2480 MHz

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|--------|
| Hori.    | 167.972         | QP       | 33.5           | 15.6            | 8.9       | 31.8      | 0.0                  | 26.2            | 43.5           | 17.3        | 176         | 273         |        |
| Hori.    | 225.790         | QP       | 35.2           | 16.7            | 9.4       | 31.7      | 0.0                  | 29.6            | 46.0           | 16.4        | 144         | 162         |        |
| Hori.    | 835.587         | QP       | 34.2           | 21.5            | 9.3       | 31.7      | 0.0                  | 33.3            | 46.0           | 12.7        | 100         | 341         |        |
| Hori.    | 2483.500        | PK       | 48.6           | 27.9            | 13.8      | 41.0      | 3.2                  | 52.5            | 73.9           | 21.4        | 137         | 196         |        |
| Hori.    | 4960.000        | PK       | 48.5           | 31.9            | 6.9       | 41.6      | 2.2                  | 47.9            | 73.9           | 26.0        | 144         | 175         |        |
| Hori.    | 7440.000        | PK       | 45.8           | 36.7            | 8.2       | 41.3      | 2.2                  | 51.6            | 73.9           | 22.3        | 100         | 0           |        |
| Hori.    | 9920.000        | PK       | 44.7           | 38.1            | 9.4       | 40.0      | 2.2                  | 54.4            | 73.9           | 19.5        | 100         | 0           |        |
| Hori.    | 12400.000       | PK       | 43.6           | 39.6            | 10.2      | 39.0      | 2.2                  | 56.6            | 73.9           | 17.3        | 100         | 0           |        |
| Hori.    | 2483.500        | AV       | 35.8           | 27.9            | 13.8      | 41.0      | 3.2                  | 39.7            | 53.9           | 14.2        | 137         | 196         |        |
| Hori.    | 4960.000        | AV       | 42.7           | 31.9            | 6.9       | 41.6      | 2.2                  | 42.1            | 53.9           | 11.8        | 144         | 175         |        |
| Hori.    | 7440.000        | AV       | 34.3           | 36.7            | 8.2       | 41.3      | 2.2                  | 40.1            | 53.9           | 13.8        | 100         | 0           |        |
| Hori.    | 9920.000        | AV       | 33.7           | 38.1            | 9.4       | 40.0      | 2.2                  | 43.4            | 53.9           | 10.5        | 100         | 0           |        |
| Hori.    | 12400.000       | AV       | 32.7           | 39.6            | 10.2      | 39.0      | 2.2                  | 45.7            | 53.9           | 8.2         | 100         | 0           |        |
| Vert.    | 67.501          | QP       | 48.9           | 6.3             | 7.3       | 31.8      | 0.0                  | 30.7            | 40.0           | 9.3         | 100         | 58          |        |
| Vert.    | 167.935         | QP       | 34.0           | 15.6            | 8.9       | 31.8      | 0.0                  | 26.7            | 43.5           | 16.8        | 100         | 285         |        |
| Vert.    | 225.794         | QP       | 34.7           | 16.7            | 9.4       | 31.7      | 0.0                  | 29.1            | 46.0           | 16.9        | 100         | 124         |        |
| Vert.    | 2483.500        | PK       | 48.8           | 27.9            | 13.8      | 41.0      | 3.2                  | 52.7            | 73.9           | 21.2        | 281         | 353         |        |
| Vert.    | 4960.000        | PK       | 48.4           | 31.9            | 6.9       | 41.6      | 2.2                  | 47.8            | 73.9           | 26.1        | 147         | 311         |        |
| Vert.    | 7440.000        | PK       | 46.3           | 36.7            | 8.2       | 41.3      | 2.2                  | 52.1            | 73.9           | 21.8        | 100         | 0           |        |
| Vert.    | 9920.000        | PK       | 44.8           | 38.1            | 9.4       | 40.0      | 2.2                  | 54.5            | 73.9           | 19.4        | 100         | 0           |        |
| Vert.    | 12400.000       | PK       | 44.2           | 39.6            | 10.2      | 39.0      | 2.2                  | 57.2            | 73.9           | 16.7        | 100         | 0           |        |
| Vert.    | 2483.500        | AV       | 35.5           | 27.9            | 13.8      | 41.0      | 3.2                  | 39.4            | 53.9           | 14.5        | 281         | 353         |        |
| Vert.    | 4960.000        | AV       | 41.9           | 31.9            | 6.9       | 41.6      | 2.2                  | 41.3            | 53.9           | 12.6        | 147         | 311         |        |
| Vert.    | 7440.000        | AV       | 34.6           | 36.7            | 8.2       | 41.3      | 2.2                  | 40.4            | 53.9           | 13.5        | 100         | 0           |        |
| Vert.    | 9920.000        | AV       | 33.8           | 38.1            | 9.4       | 40.0      | 2.2                  | 43.5            | 53.9           | 10.4        | 100         | 0           |        |
| Vert.    | 12400.000       | AV       | 32.8           | 39.6            | 10.2      | 39.0      | 2.2                  | 45.8            | 53.9           | <b>8.1</b>  | 100         | 0           |        |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



Distance factor : 1 GHz - 13 GHz :  $20\log(4.35\text{ m} / 3.0\text{ m}) = 3.2\text{ dB (3AC)} / 20\log(3.85\text{ m} / 3.0\text{ m}) = 2.2\text{ dB (1AC)}$

13 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

\* These results have sufficient margin without taking account Dwell time factor.

## **Radiated Spurious Emission** **(Reference Plot for band-edge)**


|                        |                                            |
|------------------------|--------------------------------------------|
| Test place             | Shonan EMC Lab. No.3 Semi Anechoic Chamber |
| Report No.             | 11170944S-B-R1                             |
| Date                   | March 5, 2016                              |
| Temperature / Humidity | 27 deg. C / 31 % RH                        |
| Engineer               | Hiroyuki Morikawa<br>(1-2.8 GHz)           |
| Mode                   | Tx, Hopping Off, 3DH5 2480 MHz             |

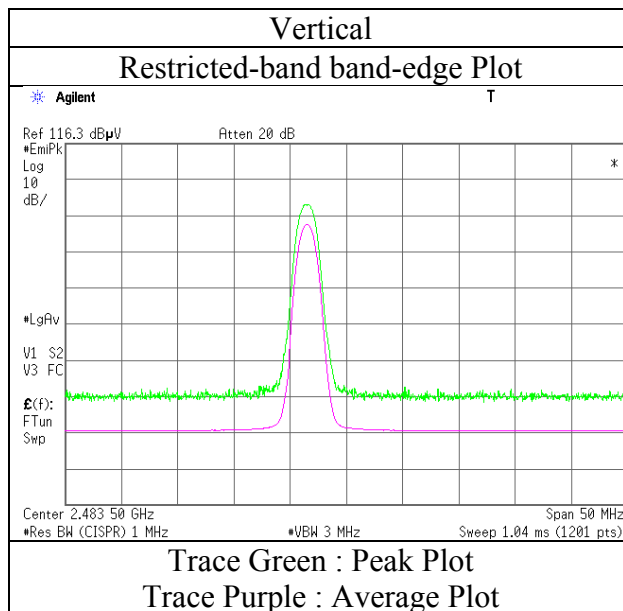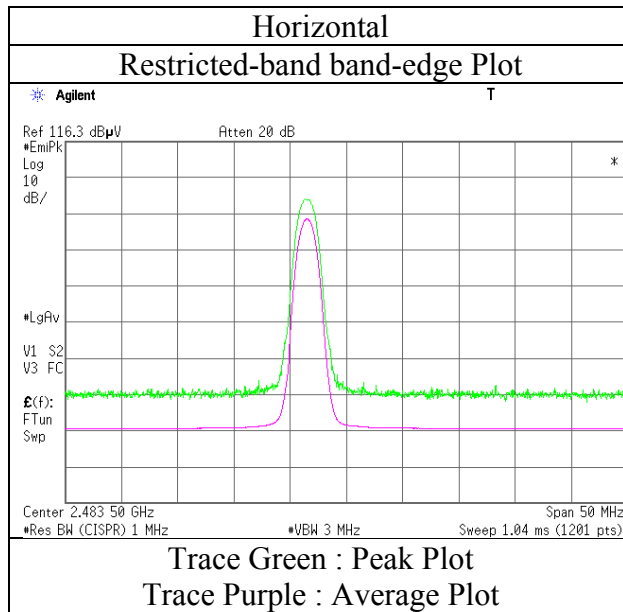

\* Final result of restricted band edge was shown in tabular data.

**Radiated Spurious Emission**  
**(Plot data, Worst case)**

|               |                                               |                |                |               |               |  |
|---------------|-----------------------------------------------|----------------|----------------|---------------|---------------|--|
| Test place    | Shonan EMC Lab. No.1, 3 Semi Anechoic Chamber |                |                |               |               |  |
| Report No.    | 11170944S-B-R1                                |                |                |               |               |  |
| Date          | March 6, 2016                                 | March 24, 2016 | March 30, 2016 | March 7, 2016 | March 3, 2016 |  |
| Temperature / | 26 deg. C /                                   | 25 deg. C /    | 25 deg. C /    | 25 deg. C /   | 20 deg. C /   |  |
| Humidity      | 28 % RH                                       | 45 % RH        | 37 % RH        | 45 % RH       | 28 % RH       |  |
| Engineer      | Kenichi Adachi                                | Hiroyuki       | Yosuke         | Hiroyuki      | Hikaru        |  |
|               |                                               | Morikawa       | Ishikawa       | Morikawa      | Shirasawa     |  |
|               | (1-2.8 GHz)                                   | (13-18 GHz)    | (18-26.5 GHz)  | (30-1000 MHz) | (2.8-13 GHz)  |  |
|               | (3AC)                                         | (3AC)          | (3AC)          | (1AC)         | (1AC)         |  |
| Mode          | Tx, Hopping Off, DH5 2441 MHz                 |                |                |               |               |  |

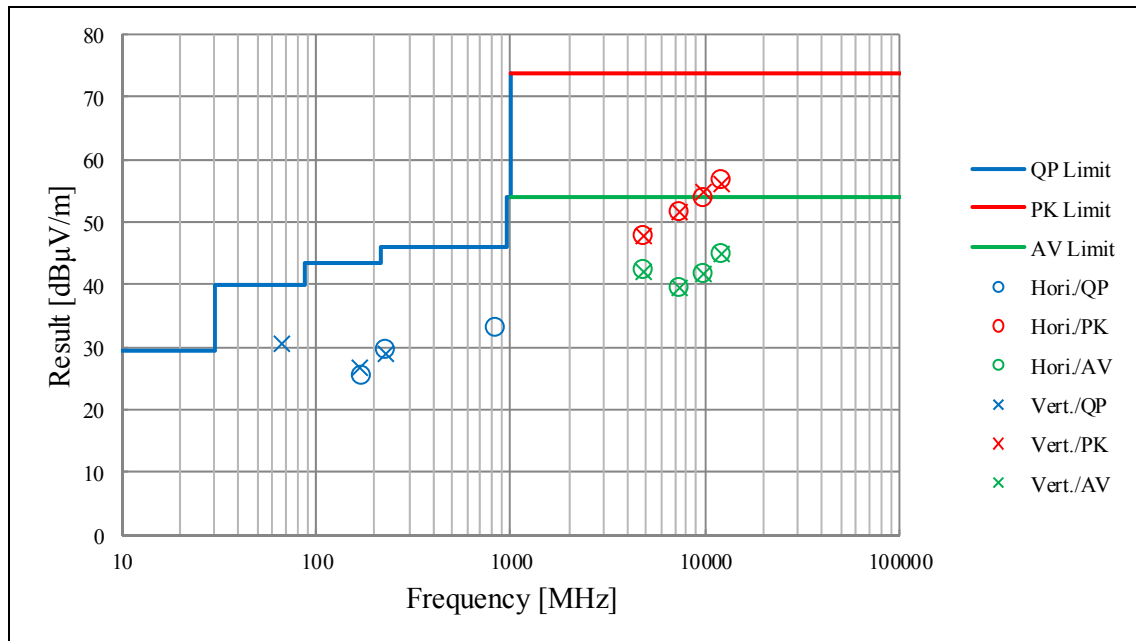

\*These plots data contains sufficient number to show the trend of characteristic features for EUT.

## APPENDIX 2: Test instruments

### Test equipment

| Control No.                            | Instrument                   | Manufacturer                                               | Model No                                               | Serial No                   | Test Item | Calibration Date *<br>Interval(month) |
|----------------------------------------|------------------------------|------------------------------------------------------------|--------------------------------------------------------|-----------------------------|-----------|---------------------------------------|
| SAF-04                                 | Pre Amplifier                | TOYO Corporation                                           | TPA0118-36                                             | 1440489                     | RE        | 2016/03/22 * 12                       |
| SCC-G01                                | Coaxial Cable                | Suhner                                                     | SUCOFLEX<br>104A                                       | 46497/4A                    | RE        | 2015/04/17 * 12                       |
| SCC-G21                                | Coaxial Cable                | Suhner                                                     | SUCOFLEX<br>104                                        | 296169/4                    | RE        | 2015/05/19 * 12                       |
| SHA-01                                 | Horn Antenna                 | Schwarzbeck                                                | BBHA9120D                                              | 9120D-725                   | RE        | 2015/08/10 * 12                       |
| SOS-01                                 | Humidity Indicator           | A&D                                                        | AD-5681                                                | 4062555                     | RE        | 2015/10/22 * 12                       |
| KSA-08                                 | Spectrum Analyzer            | Agilent                                                    | E4446A                                                 | MY46180525                  | RE        | 2016/03/28 * 12                       |
| SJM-02                                 | Measure                      | KOMELON                                                    | KMC-36                                                 | -                           | RE        | -                                     |
| SAEC-01(SVSW<br>R)                     | Semi-Anechoic Chamber        | TDK                                                        | SAEC-01(SVS<br>WR)                                     | 1                           | RE        | 2015/07/08 * 12                       |
| COTS-SEMI-1                            | EMI Software                 | TSJ                                                        | TEPTO-DV(RE<br>_CE,RFI,MF)                             | -                           | RE        | -                                     |
| STS-01                                 | Digital Hitester             | Hioki                                                      | 3805-50                                                | 080997812                   | RE        | 2015/11/18 * 12                       |
| SFL-02                                 | Highpass Filter              | MICRO-TRONICS                                              | HPM50111                                               | 051                         | RE        | 2015/11/16 * 12                       |
| SAF-06                                 | Pre Amplifier                | TOYO Corporation                                           | TPA0118-36                                             | 1440491                     | RE        | 2015/05/27 * 12                       |
| SCC-G04                                | Coaxial Cable                | Junkosha                                                   | J12J102207-00                                          | JUN-12-14-0<br>18           | RE        | 2015/06/08 * 12                       |
| SCC-G23                                | Coaxial Cable                | Suhner                                                     | SUCOFLEX<br>104                                        | 297342/4                    | RE        | 2015/05/19 * 12                       |
| SHA-03                                 | Horn Antenna                 | Schwarzbeck                                                | BBHA9120D                                              | 9120D-739                   | RE        | 2015/08/11 * 12                       |
| SOS-05                                 | Humidity Indicator           | A&D                                                        | AD-5681                                                | 4062518                     | RE        | 2015/10/22 * 12                       |
| SAEC-03(SVSW<br>R)                     | Semi-Anechoic Chamber        | TDK                                                        | SAEC-03(SVS<br>WR)                                     | 3                           | RE        | 2015/08/28 * 12                       |
| STS-03                                 | Digital Hitester             | Hioki                                                      | 3805-50                                                | 080997823                   | RE        | 2015/11/18 * 12                       |
| SAT10-05                               | Attenuator(above1GHz)        | Agilent                                                    | 8493C-010                                              | 74864                       | RE        | 2015/11/04 * 12                       |
| SAF-01                                 | Pre Amplifier                | SONOMA                                                     | 310N                                                   | 290211                      | RE        | 2016/02/19 * 12                       |
| KAT6-04                                | Attenuator                   | INMET                                                      | 18N-6dB                                                | -                           | RE        | 2015/12/18 * 12                       |
| SAT3-09                                | Attenuator                   | JFW                                                        | 50HF-003N                                              | -                           | RE        | 2015/08/31 * 12                       |
| SBA-01                                 | Biconical Antenna            | Schwarzbeck                                                | BBA9106                                                | 91032664                    | RE        | 2015/10/11 * 12                       |
| SCC-A1/A3/A5/<br>A7/A8/A13/SRS<br>E-01 | Coaxial Cable&RF<br>Selector | Fujikura/Fujikura/Suhner<br>/Suhner/Suhner/Suhner/T<br>OYO | 8D2W/12DSFA<br>/141PE/141PE/<br>141PE/141PE/<br>NS4906 | -/0901-269(R<br>F Selector) | RE        | 2015/04/17 * 12                       |
| SCC-A2/A4/A6/<br>A7/A8/A13/SRS<br>E-01 | Coaxial Cable&RF<br>Selector | Fujikura/Fujikura/Suhner<br>/Suhner/Suhner/Suhner/T<br>OYO | 8D2W/12DSFA<br>/141PE/141PE/<br>141PE/141PE/<br>NS4906 | -/0901-269(R<br>F Selector) | RE        | 2015/04/17 * 12                       |
| SLA-01                                 | Logperiodic Antenna          | Schwarzbeck                                                | UHALP9108A                                             | UHALP<br>9108-A 0888        | RE        | 2015/10/11 * 12                       |
| STR-01                                 | Test Receiver                | Rohde & Schwarz                                            | ESU40                                                  | 100093                      | RE        | 2015/11/06 * 12                       |
| SAEC-01(NSA)                           | Semi-Anechoic Chamber        | TDK                                                        | SAEC-01(NSA<br>)                                       | 1                           | RE        | 2015/07/13 * 12                       |
| SJM-16                                 | Measure                      | ASKUL                                                      | -                                                      | -                           | RE        | -                                     |
| SHA-05                                 | Horn Antenna                 | ETS LINDGREN                                               | 3160-09                                                | LM4210                      | RE        | 2015/03/17 * 12                       |
| SAF-09                                 | Pre Amplifier                | TOYO Corporation                                           | HAP18-26W                                              | 00000018                    | RE        | 2015/09/07 * 12                       |
| SCC-G20                                | Coaxial Cable                | Junkosha                                                   | J12J102518-00                                          | APR-15-15-0<br>03           | RE        | 2015/04/30 * 12                       |

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item: RE: Radiated Emission test

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401