Call

Answer a call

Press the Multifunction button or Volume "+" or Volume "-" once.

Reject a call

Press and hold the Multifunction button for about 2 seconds.

End a call

Press the Multifunction button once.

End current call and answer new call

- When a new call rings during a call, press the Multifunction button once to answer new call and end current call simultaneously.
- On hold current call and answer new call
- When a new call rings during a call, Double the Multifunction button to hold current call and answer new call.
- Reject the new call hold the current call
- During the call there is a new call, press the multifunction button to reject a new call, keeping the active call.

Mute on/off

- Press the Volume "--" for about 2 seconds to mute on/off.
- Switch between the earphone and phone
- Press the multifunction button for about 2 seconds during a call, the call will be switched to the mobile phone, redo this operation again, the call will be switched to the earphone.
- Redial the last call Double-press the Multifunction button in standby mode. The mobile phone will redial the last call number.
- Voice dial (Need phone support)
- In standby mode Press the Volume "+" and the Volume "-" button about once, wait for phone prompt and then tell the phone to dial the name of a stored contact.

Music-

Music play / pause

Press Multifunction button once to play / pause music. (Some phones may require you to start a media player first).

Track back/forward

Press the Volume "--" for 2 seconds once to skip track backward, press Volume "+" for 2 seconds once to skip track forward

Switch Music and Call

When a call rings during a music playing, the music automatically pauses to allow you to answer or ignore the call. Once the call is ignored or ends, the music is resumed.

Basic operation-

Status indicator

Instruction	LED status	Voice prompts
Power on	Stay blue about one second	Power on
Power off	Stay red about two second	Power off
Standby	Blink blue once every 8 seconds	/
Pairing	Flashes red and blue alternately	Pairing
Incoming call	Flashes blue quickly	Toot
Battery low	Blink red	Battery low
Charging	Stays on red while charging Stays on blue after fully charged	/


Volume up/down Press the volume "+" to turn volume up Press the volume "-" to turn volume down


Power on Switch the power button to On position to turn on the earphone.

The earphone says "power on" and the LED flashes blue once.

Power off

Switch the power button to Off position to turn off the earphone. The earphone says "power off" and the LED flashes red once.

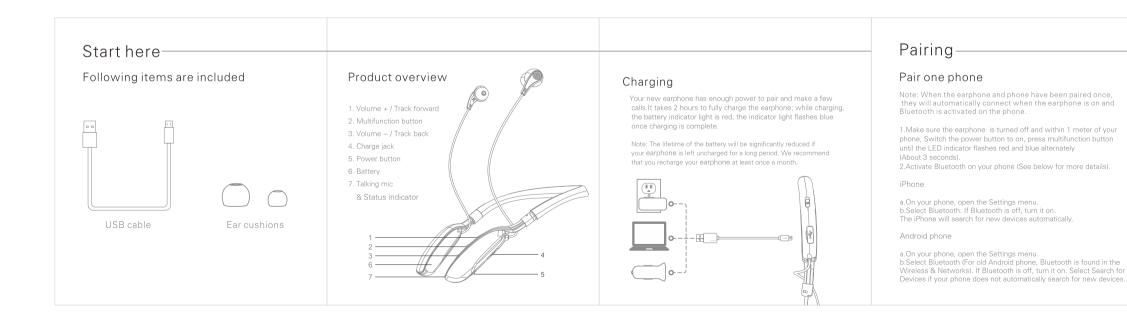

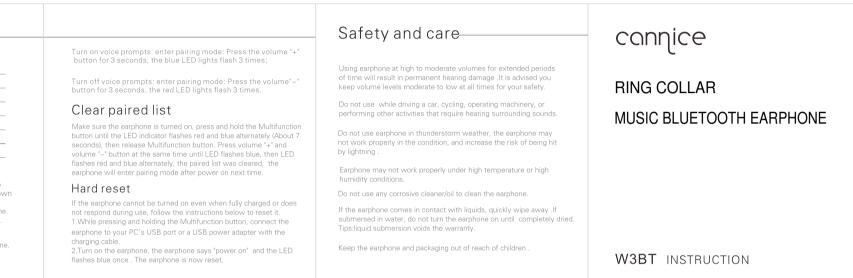







3. Select "W3BT". If your phone asks, enter 0000 (four zeros) for the Passcode or accept the connection. The LED indicator stops flashing red and blue once successfully paired, you hear "Connection succes Some phone list an option to "Play through earphone", select to use the earphones



Pair another phone

Multipoint technology enables you to pair headset to two phones at the same time and take calls from either:

Pair headset to first phone per usual pairing procedure, then switch off headset. Then switch on headset again and enter pairing mode, enable Bluetooth function in second phone, find headset's Pairing Name "W3" and pair to second phone per usual procedure. Switch off headset one more time. Then simply switch on headset, without entering pairing mode (a short press until blue light comes on). The headset should automatically re-connect to the last connected phone (which is the second phone). Then find headset "W3" in first phone's Bluetooth setting, select this to pair to first phone. Both phones should now be paired to the headset



Warning -

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference,
(2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one more of

the following measures:

-Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

ECC Badiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter