

深圳市亿圣邦科技有限公司

Shenzhen Yishengbang Technology Co., Ltd

深圳市宝安区西乡街道南昌社区深圳前湾硬科技产业园C栋101
101, Building C, Shenzhen Qianwan Hard Technology Industrial Park, Nanchang
Community, Xixiang Street, Bao'an District, Shenzhen, China

Antenna Test Report

Customer:一恒科

Project:L1

Product: WIFI/BT

Report date: 2024-09-24

Prepared by :刘顺

Checked by : 黄震

Approved by : 林美财

Purpose

This report is to measure the performance of SLK for Master Antenna on一恒科. All measure data are showed below.

Content

1. Product Overview

2. Test Result

2.1 WIFI Antenna VSWR/S11

2.2 WIFI Antenna Gain/Efficiency/3D DATA

2.3 BT Antenna VSWR/S11

2.4 BT Antenna Gain/Efficiency/3D DATA


2.5 WIFI Antenna TRP/TIS

3. Conclusions


1. Product Overview



1. Product Overview


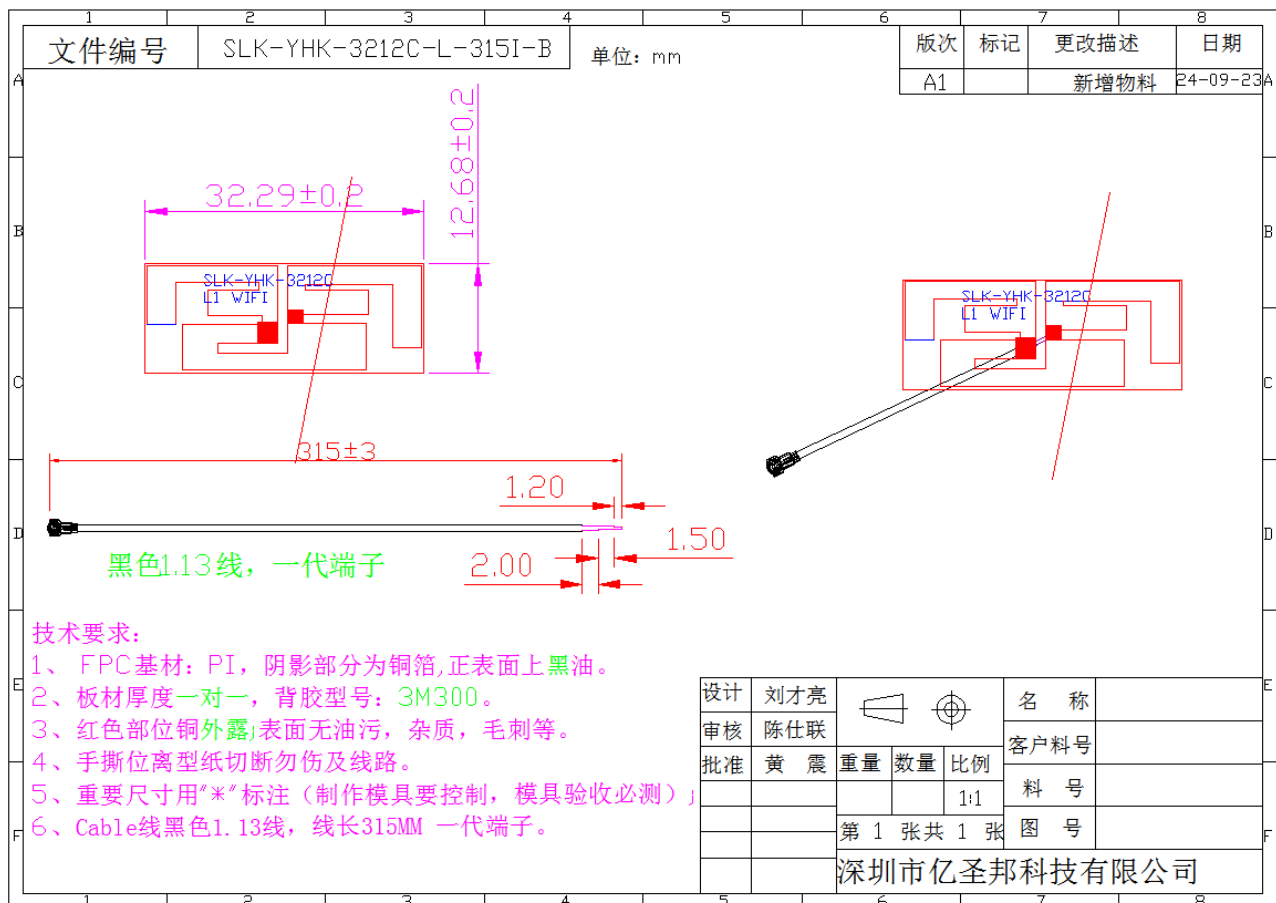


1. Product Overview

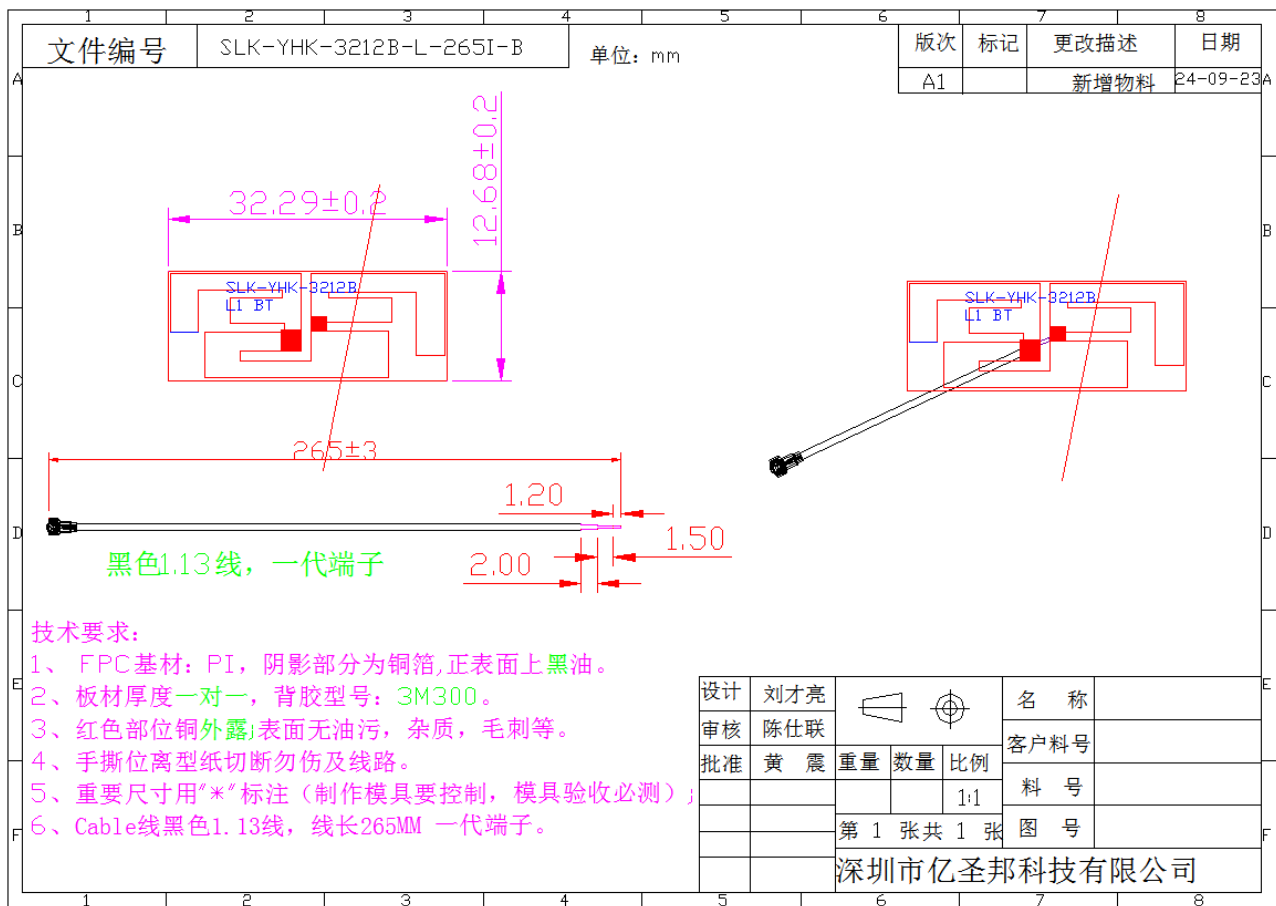

2. Test Result


2.1 WIFI Antenna VSWR/S11

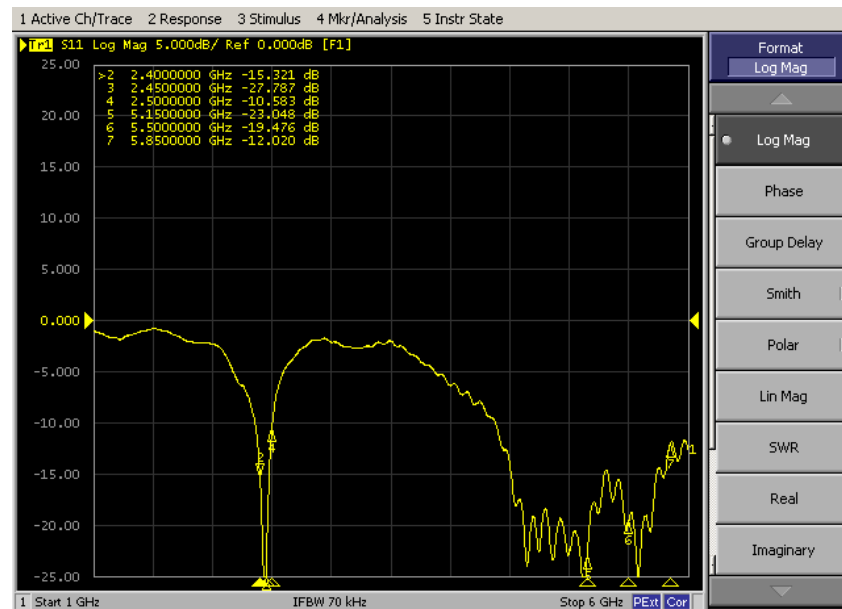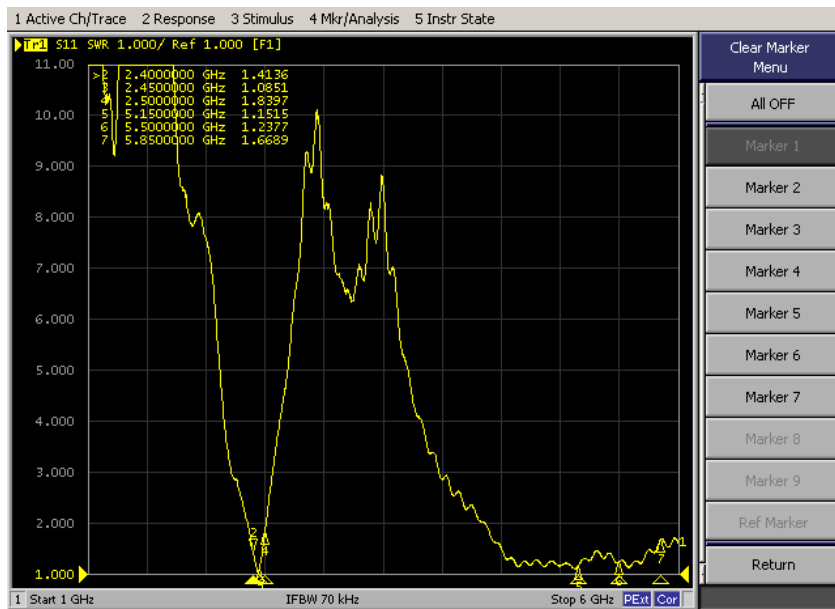

2. Test Result



2.2 WIFI Antenna Gain/Efficiency/3D DATA

Frequency (MHz)	Efficiency (dBi)	Gain (dBi)	Efficiency (%)
2400.0	-3.64	1.07	43.19
2410.0	-3.67	1.39	42.90
2420.0	-3.69	1.17	42.71
2430.0	-3.78	1.85	41.86
2440.0	-3.90	1.92	40.67
2450.0	-3.97	1.96	40.06
2460.0	-3.75	1.76	42.16
2470.0	-3.67	1.02	42.89
2480.0	-3.79	1.94	41.69
2490.0	-3.82	1.84	41.46
2500.0	-3.68	1.88	42.85
5150.0	-3.70	2.23	42.62
5250.0	-3.63	2.56	43.27
5450.0	-3.61	2.82	43.48
5850.0	-3.68	2.30	42.80

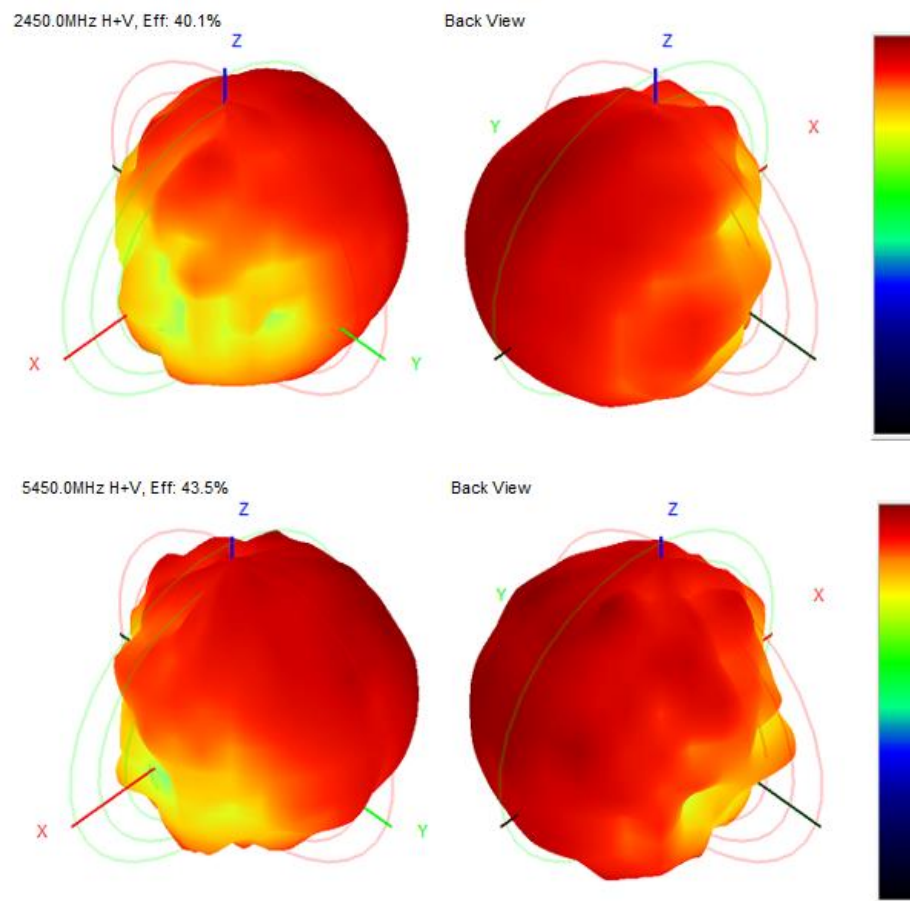

2. Test Result


2.3 BT Antenna VSWR/S11

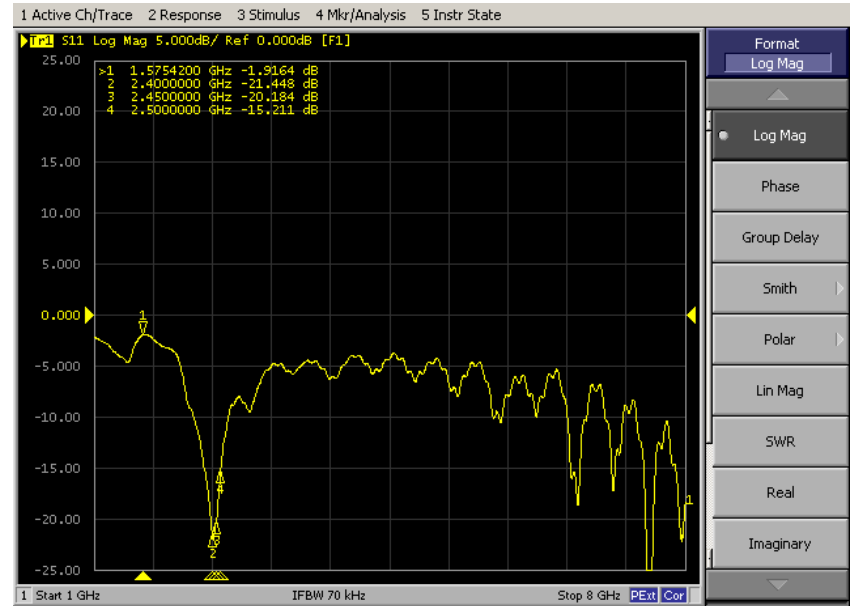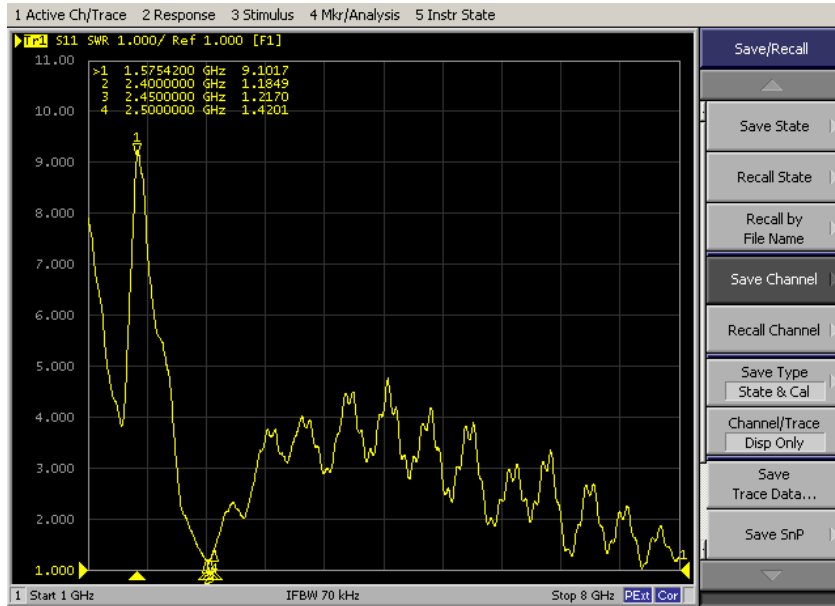

2. Test Result

2.4 BT Antenna Gain/Efficiency/3D DATA

Frequency (MHz)	Efficiency (dBi)	Gain (dBi)	Efficiency (%)
2400	-3.90	1.79	40.69
2410	-3.97	1.88	40.05
2420	-3.79	1.32	41.78
2430	-3.89	1.12	40.75
2440	-3.92	1.20	40.54
2450	-3.82	1.10	41.44
2460	-3.85	1.50	41.14
2470	-3.93	1.04	40.42
2480	-3.80	1.93	41.65
2490	-3.80	1.80	41.67
2500	-3.92	1.74	40.54

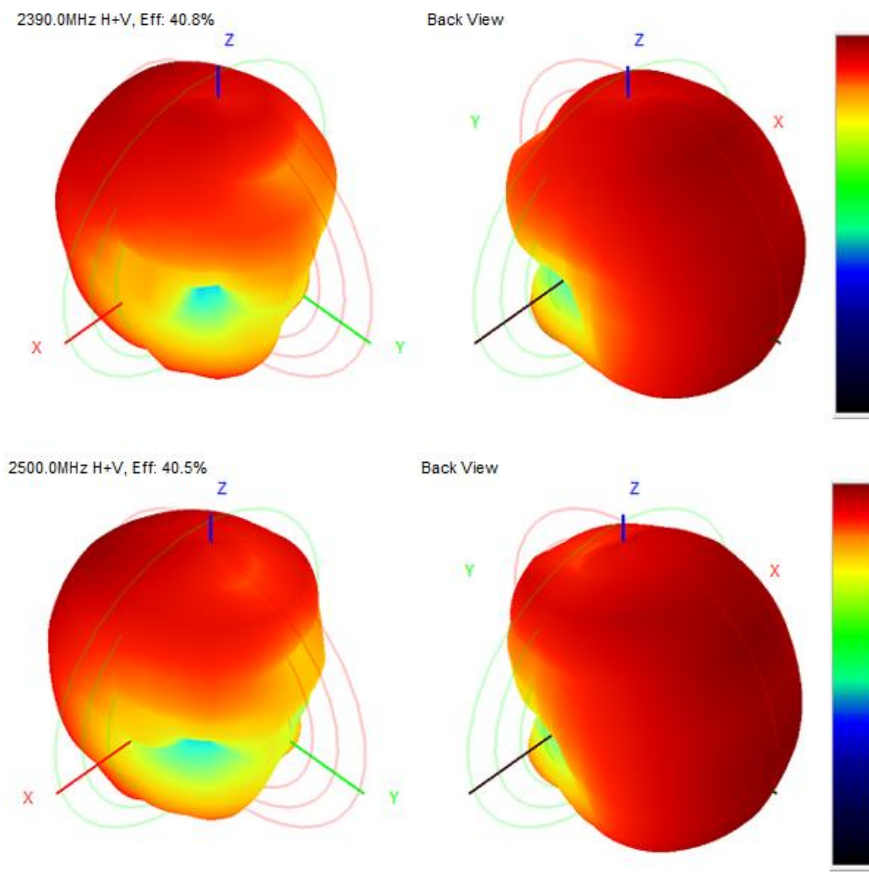

2. Test Result

2.5 WIFI Antenna TRP/TIS

WIFI有源测试			
频段	1	6	11
B-TRP-11MBps	15.45	15.38	15.14
B-TIS-11MBps	-76.63	-78.83	-78.49
频段	36	149	165
A-TRP-54MBps	10.16	9.81	9.84
A-TIS-54MBps	-71.78	-69.28	-69.37

3. Conclusions

谢谢！