

FCC REPORT (5.8GHz)

Applicant: Autel Robotics Co., Ltd

Address of Applicant: 9th Floor, Bldg.B1, Zhiyuan, 1001 Xueyuan Rd., Xili, Nanshan, Shenzhen, China

Equipment Under Test (EUT)

Product Name: Dragon Fish Remote Control

Model No.: DFRC-1

Trade Mark: AUTEL

FCC ID: 2AGNTDFRC2409A

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 24 Aug., 2020

Date of Test: 25 Aug., to 27 Oct., 2020

Date of report issued: 03 Dec., 2020

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	06 Nov., 2020	Original
01	03 Dec., 2020	Update page 5

Tested by:



Test Engineer

Date:

03 Dec., 2020

Reviewed by:



Project Engineer

Date:

03 Dec., 2020

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS.....	6
5.5 MEASUREMENT UNCERTAINTY.....	6
5.6 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD.....	6
5.7 LABORATORY FACILITY.....	6
5.8 LABORATORY LOCATION	7
5.9 TEST INSTRUMENTS LIST.....	7
6 TEST RESULTS AND MEASUREMENT DATA.....	8
6.1 ANTENNA REQUIREMENT:.....	8
6.2 CONDUCTED EMISSION	9
6.3 CONDUCTED OUTPUT POWER	12
6.4 OCCUPY BANDWIDTH	14
6.5 POWER SPECTRAL DENSITY	16
6.6 BAND EDGE	18
6.6.1 Conducted Emission Method.....	18
6.6.2 Radiated Emission Method.....	20
6.7 SPURIOUS EMISSION.....	23
6.7.1 Conducted Emission Method.....	23
6.7.2 Radiated Emission Method.....	25
7 TEST SETUP PHOTO	30
8 EUT CONSTRUCTIONAL DETAILS	32

4 Test Summary

Test Items	Section in CFR 47	Result
Antenna requirement	15.203 & 15.247 (b)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted averaging Output Power	15.247 (b)(3)	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247 (d)	Pass
Spurious Emission	15.205 & 15.209	Pass
Remark:		
1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. 3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).		
Test Method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02	

5 General Information

5.1 Client Information

Applicant:	Autel Robotics Co., Ltd
Address:	9th Floor, Bldg.B1, Zhiyuan, 1001 Xueyuan Rd., Xili, Nanshan, Shenzhen, China
Manufacturer:	Autel Robotics Co.,Ltd
Address:	9th Floor, Bldg.B1, Zhiyuan, 1001 Xueyuan Rd., Xili, Nanshan, Shenzhen, China
Factory:	Autel Robotics Co.,Ltd
Address:	9th Floor, Bldg.B1, Zhiyuan, 1001 Xueyuan Rd., Xili, Nanshan, Shenzhen, China

5.2 General Description of E.U.T.

Product Name:	Dragon Fish Remote Control
Model No.:	DFRC-1
Operation Frequency:	5729.68-5770.68 MHz
Channel numbers:	42
Channel separation:	1 MHz
Modulation technology:	GFSK
Antenna Type:	External Antenna (ANT 5)
Antenna gain:	4.6 dBi
Power supply:	Rechargeable Li-ion Battery DC11.4V-8.2Ah
AC adapter:	Model: DF_CHARGER Input: AC100-240V, 50/60Hz, 4.0A Output 1/2/3: DC 26.4V, 7.0A
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

Operation Frequency each of channel for 19 for 1.4MHz Bandwidth					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5729.68MHz
2	5730.68MHz	22	5750.68MHz	41	5769.68MHz
3	5731.68MHz	42	5770.68MHz

Note:
1. Channel 1, 22 & 42 selected as Lowest, Middle and Highest channel.

5.3 Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
Radiated Emission: The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. Duty cycle setting during the transmission is 100% with maximum power setting for all modulations.	

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.20 dB (k=2)

5.6 Additions to, deviations, or exclusions from the method

No

5.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.
Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282, Fax: +86-755-23116366
Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.9 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2020	07-21-2021
Loop Antenna	SCHWARZBECK	FMZB1519B	044	03-07-2020	03-06-2021
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2020	06-21-2021
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-18-2019	11-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-07-2020	03-06-2021
Pre-amplifier	CD	PAP-1G18	11804	03-07-2020	03-06-2021
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-05-2020	03-04-2021
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2019	11-17-2020
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-05-2020	03-04-2021
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2020	03-06-2021
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2020	03-06-2021
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2020	03-06-2021
RF Switch Unit	MWRFTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTEST	MTS8200	Version: 2.0.0.0		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-05-2020	03-04-2021
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-05-2020	03-04-2021
LISN	CHASE	MN2050D	1447	03-05-2020	03-04-2021
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2020	07-20-2021
Cable	HP	10503A	N/A	03-05-2020	03-04-2021
EMI Test Software	AUDIX	E3	Version: 6.110919b		

6 Test results and Measurement Data

6.1 Antenna requirement:


Standard requirement:	FCC Part 15 C Section 15.203 /247(b)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
E.U.T Antenna:	The Wi-Fi antenna cannot replace by end-user, the best case gain of the antenna is 4.6dBi

6.2 Conducted Emission

Test Requirement:	FCC Part 15 C Section 15.207		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9kHz, VBW=30kHz		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure:	<ol style="list-style-type: none"> The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.), which provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10(latest version) on conducted measurement. 		
Test setup:	<p style="text-align: center;">Reference Plane</p> <p><i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>		
Test Instruments:	Refer to section 5.9 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Passed		

Measurement Data:

Product name:	Dragon Fish Remote Control	Product model:	DFRC-1
Test by:	Mike	Test mode:	5.8G Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

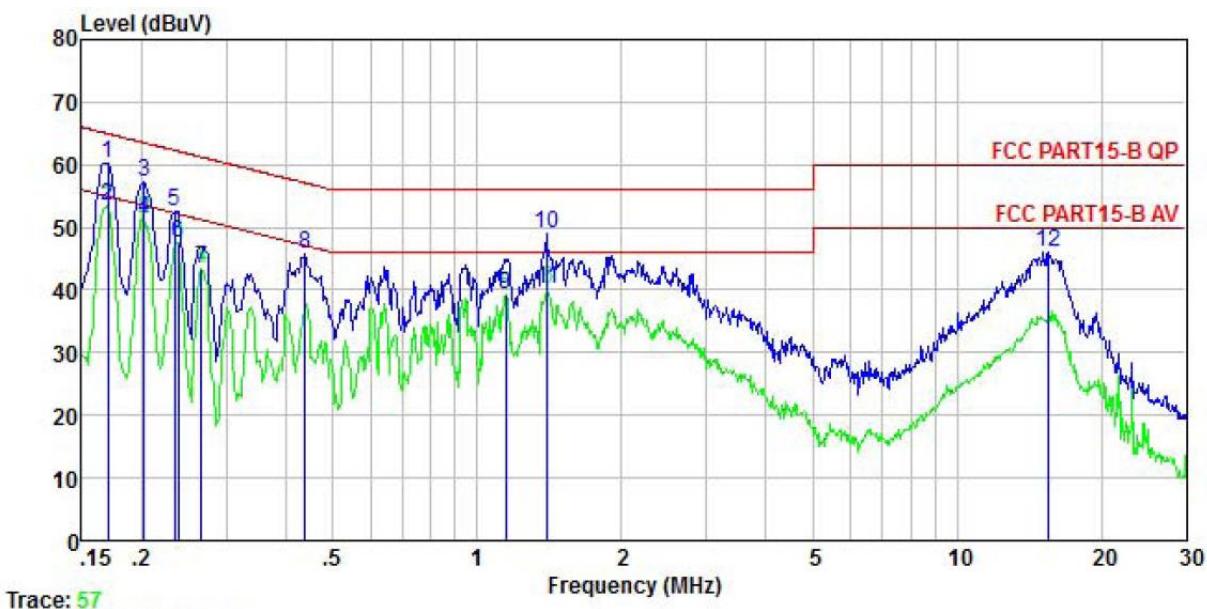


Freq MHz	Read Level dBuV	LISN Factor	Aux Factor	Cable Loss dB	Limit Line dBuV	Over Limit dB	Remark
	dB	dB	dB	dB			
1	0.170	50.26	-0.58	-0.10	10.77	60.35	64.94 -4.59 QP
2	0.170	43.43	-0.58	-0.10	10.77	53.52	54.94 -1.42 Average
3	0.202	47.34	-0.59	-0.16	10.76	57.35	63.54 -6.19 QP
4	0.202	41.44	-0.59	-0.16	10.76	51.45	53.54 -2.09 Average
5	0.234	42.59	-0.57	-0.20	10.75	52.57	62.30 -9.73 QP
6	0.238	37.61	-0.57	-0.20	10.75	47.59	52.17 -4.58 Average
7	0.266	33.50	-0.56	-0.23	10.75	43.46	51.25 -7.79 Average
8	0.437	35.23	-0.46	0.11	10.74	45.62	57.11 -11.49 QP
9	1.147	28.73	-0.60	0.30	10.89	39.32	46.00 -6.68 Average
10	1.396	38.61	-0.57	0.08	10.91	49.03	56.00 -6.97 QP
11	1.403	29.74	-0.57	0.08	10.91	40.16	46.00 -5.84 Average
12	15.470	32.62	-0.71	3.38	10.90	46.19	60.00 -13.81 QP

Notes:

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

Product name:	Dragon Fish Remote Control	Product model:	DFRC-1
Test by:	Mike	Test mode:	5.8G Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

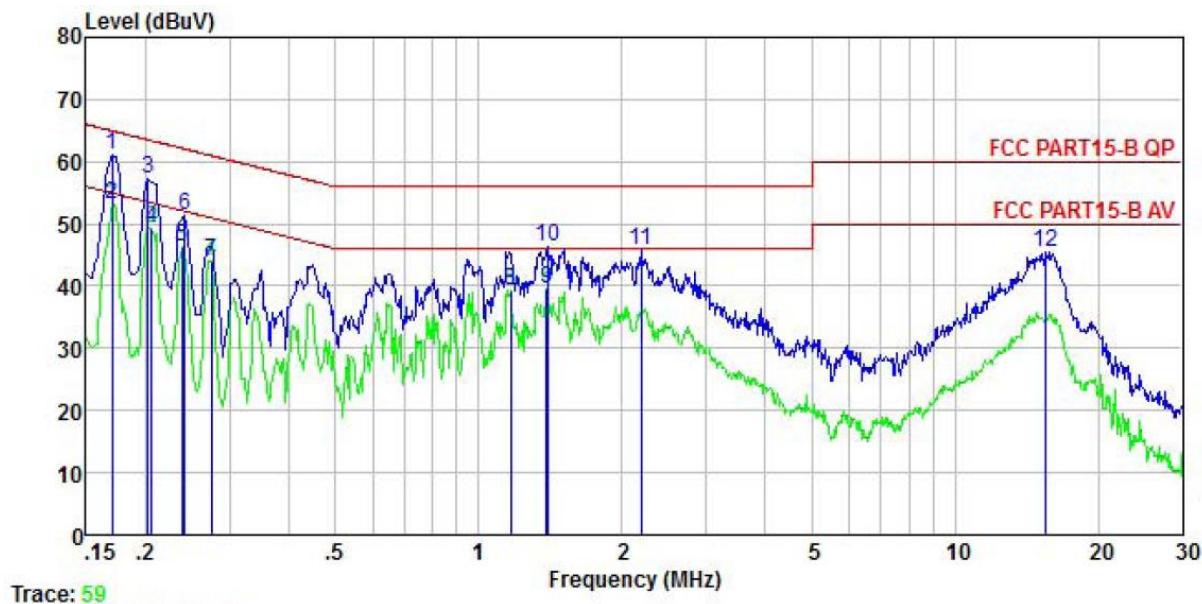


Freq MHz	Read Level dBuV	LISN Factor dB	Aux Factor dB	Cable Loss dB	Level dBuV	Limit Line dBuV	Over Limit dB	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.170	50.90	-0.68	0.01	10.77	61.00	64.94	-3.94 QP
2	0.170	43.08	-0.68	0.01	10.77	53.18	54.94	-1.76 Average
3	0.202	47.14	-0.67	0.00	10.76	57.23	63.54	-6.31 QP
4	0.206	39.33	-0.67	0.00	10.76	49.42	53.36	-3.94 Average
5	0.238	36.13	-0.67	0.00	10.75	46.21	52.17	-5.96 Average
6	0.242	41.29	-0.67	0.00	10.75	51.37	62.04	-10.67 QP
7	0.274	33.99	-0.67	0.01	10.74	44.07	50.98	-6.91 Average
8	1.166	28.93	-0.69	0.10	10.89	39.23	46.00	-6.77 Average
9	1.388	29.15	-0.69	0.12	10.91	39.49	46.00	-6.51 Average
10	1.396	35.88	-0.69	0.12	10.91	46.22	56.00	-9.78 QP
11	2.190	35.34	-0.70	0.20	10.95	45.79	56.00	-10.21 QP
12	15.552	32.71	-0.86	2.79	10.90	45.54	60.00	-14.46 QP

Notes:


- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

6.3 Conducted Output Power

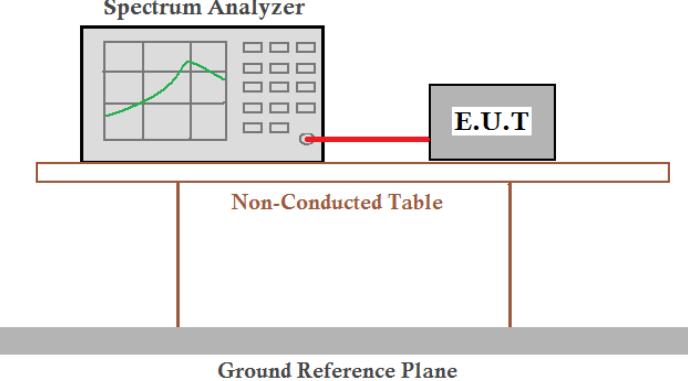
Test Requirement:	FCC Part 15 C Section 15.247 (b)(3)
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

Test CH	Maximum Conducted Output Power (dBm)	Limit(dBm)	Result
Lowest	22.04	30.00	Pass
Middle	21.88		
Highest	21.41		

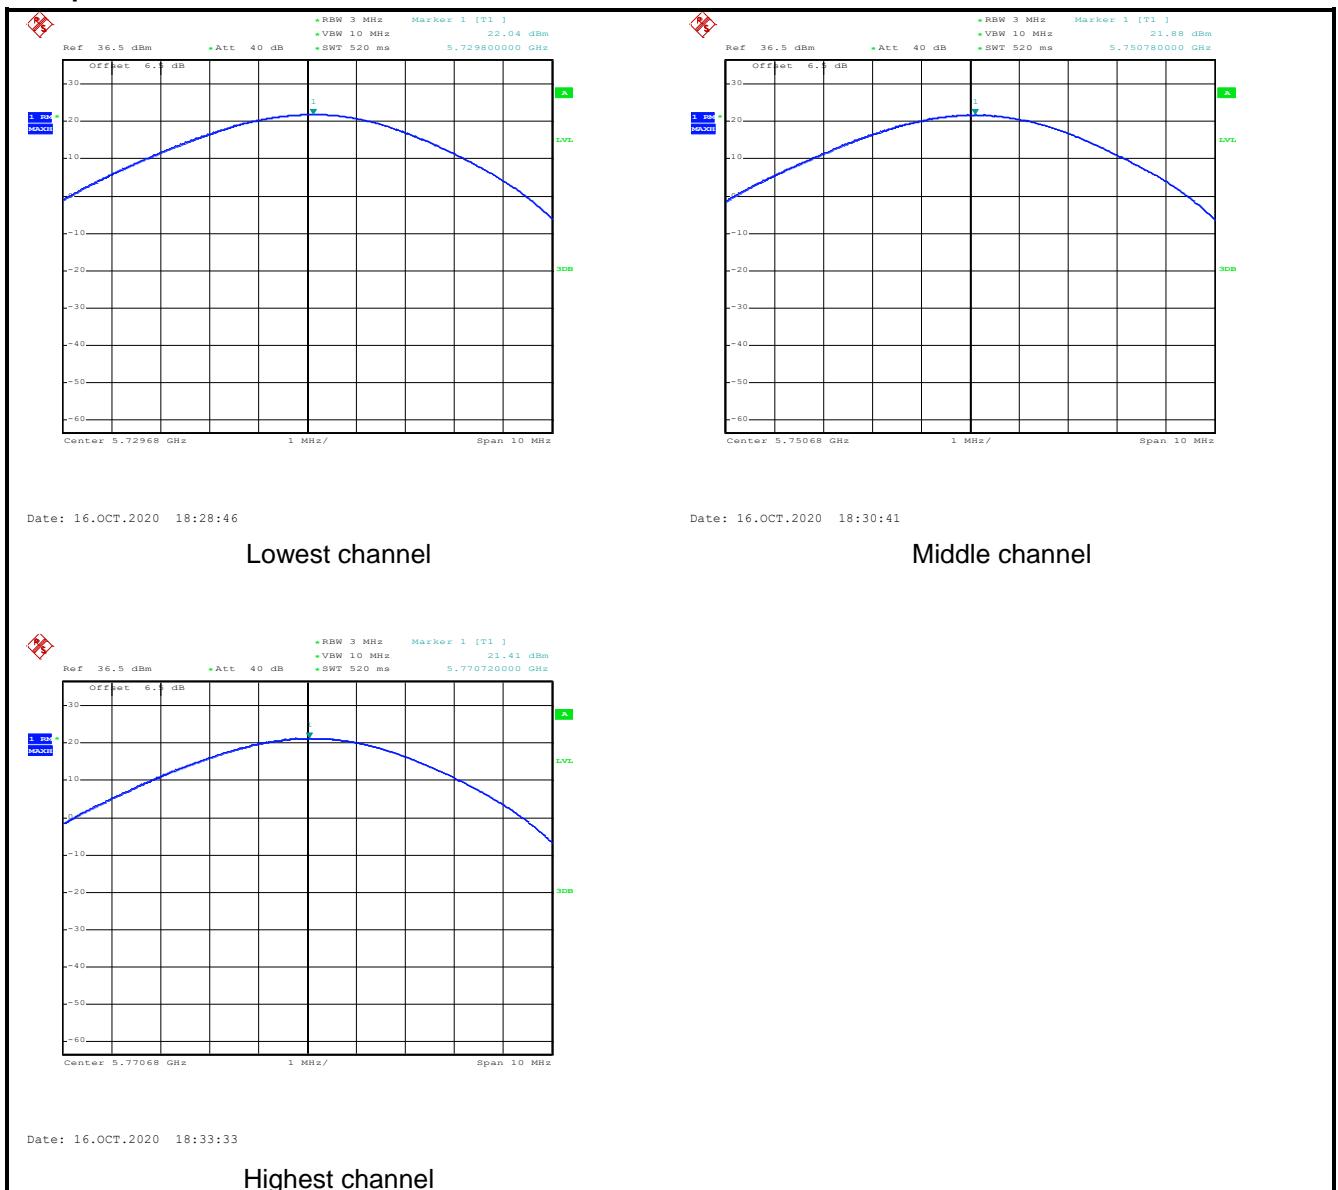Test plot as follows:


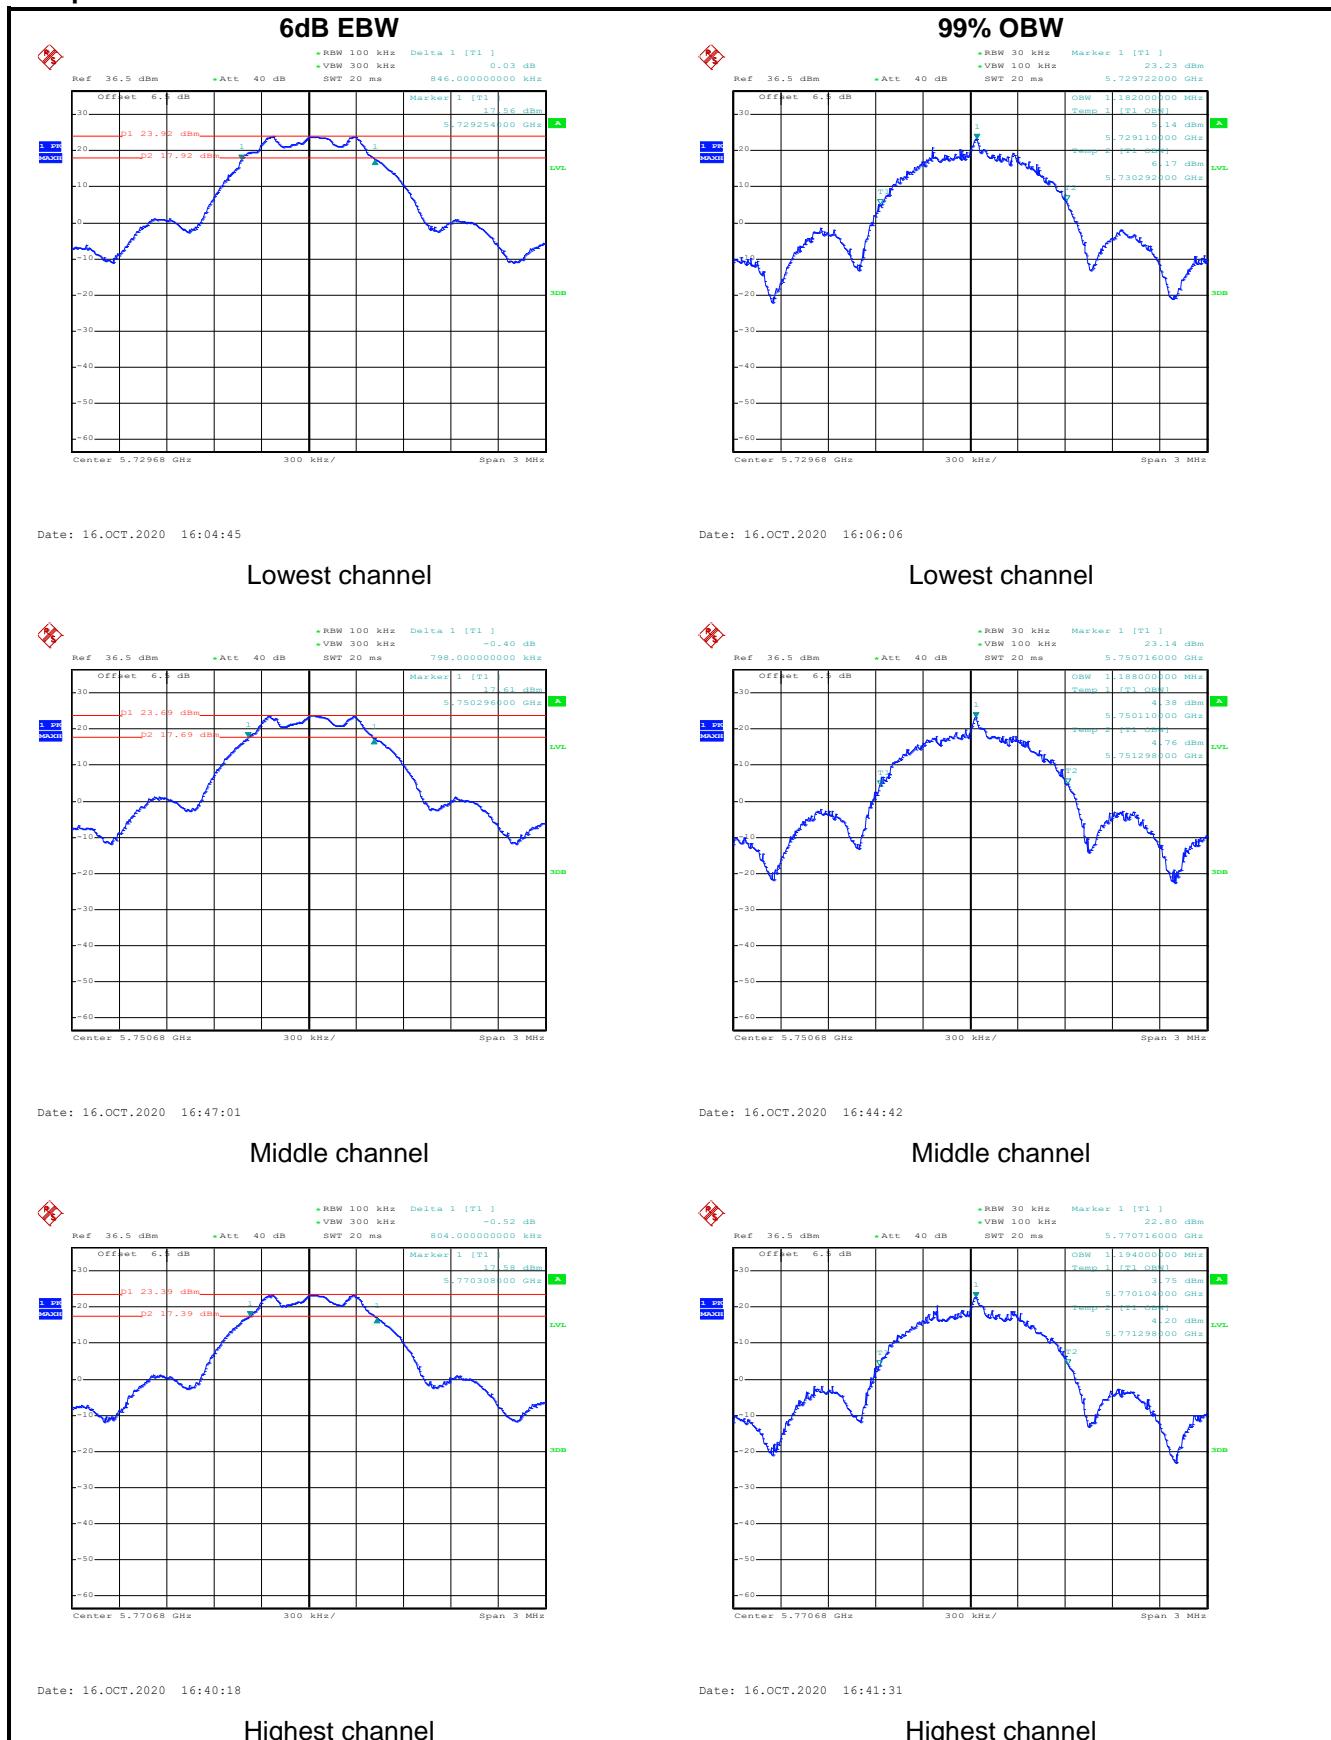
6.4 Occupy Bandwidth

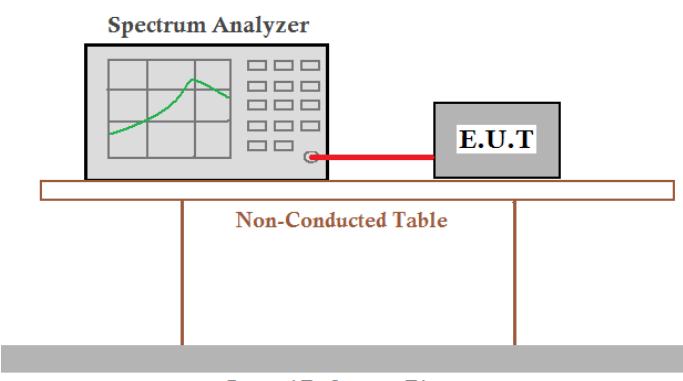Test Requirement:	FCC Part 15 C Section 15.247 (a)(2)
Limit:	>500kHz
Test setup:	 <p>The diagram illustrates the test setup for measuring occupy bandwidth. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire assembly sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data:

Test CH	6dB Emission Bandwidth (MHz)	Limit(kHz)	Result
Lowest	0.846	>500	Pass
Middle	0.798		
Highest	0.804		
Test CH	99% Occupy Bandwidth (MHz)	Limit(kHz)	Result
Lowest	1.182	N/A	N/A
Middle	1.188		
Highest	1.194		

Test plot as follows:




6.5 Power Spectral Density

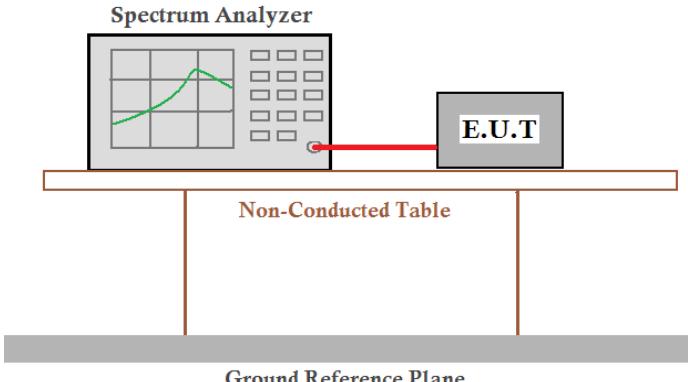Test Requirement:	FCC Part 15 C Section 15.247 (e)
Limit:	8 dBm/3kHz
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data:

Test CH	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	6.33	8.00	Pass
Middle	7.45		
Highest	6.67		

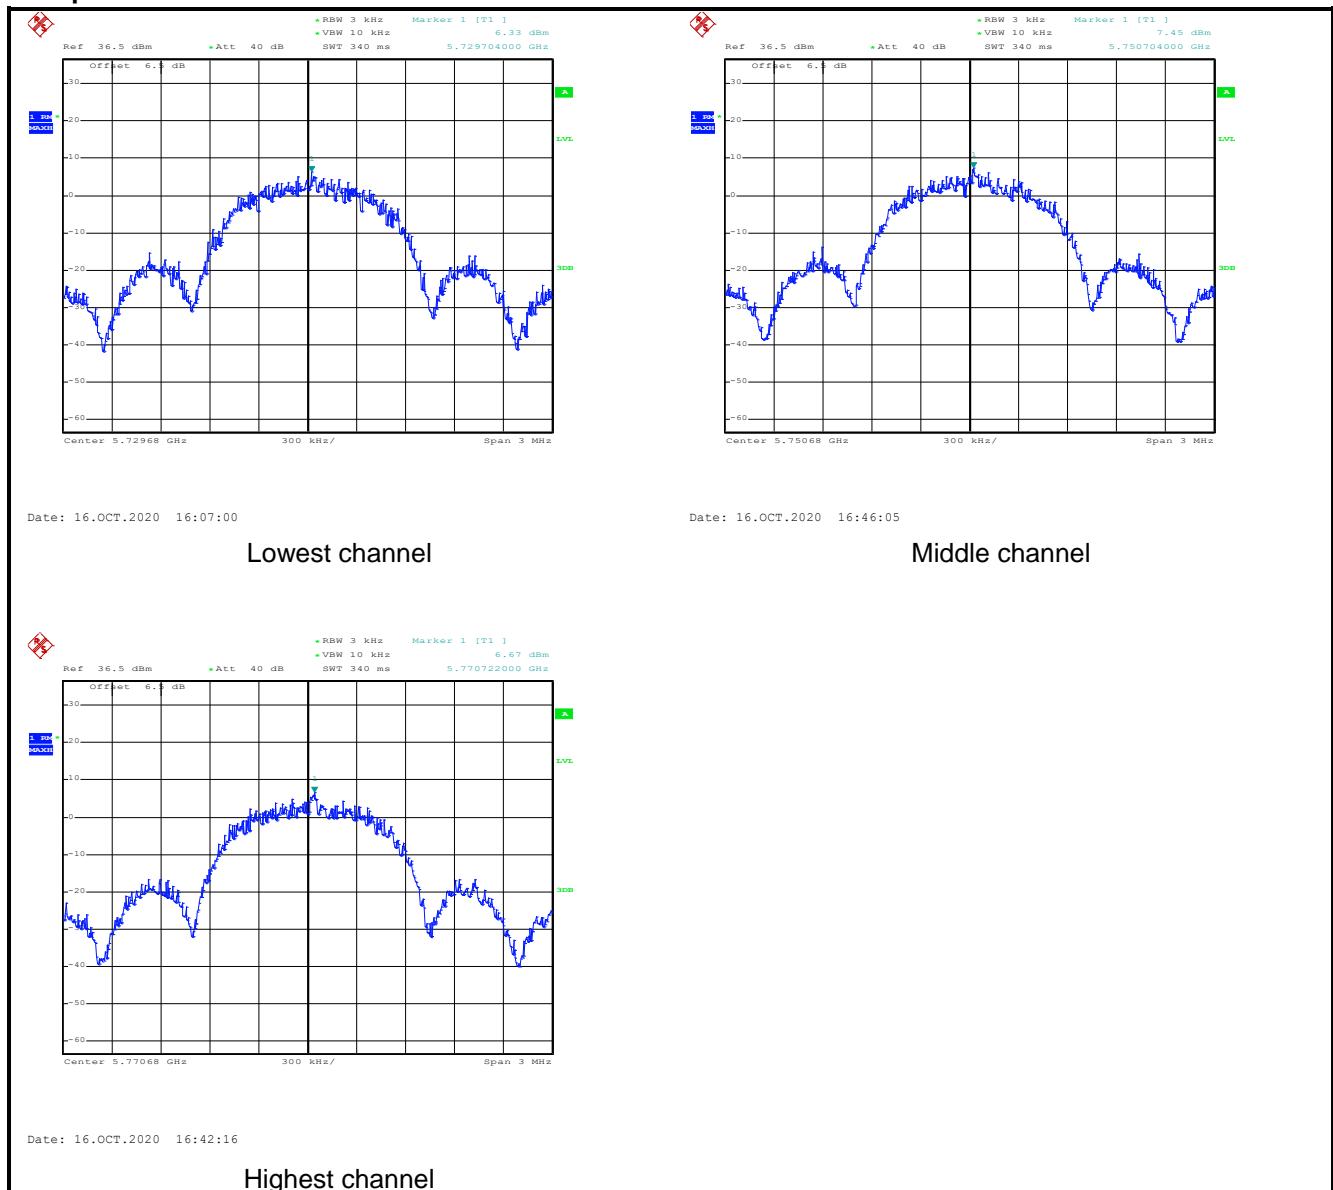
Test plots as follow:


6.6 Band Edge

6.6.1 Conducted Emission Method

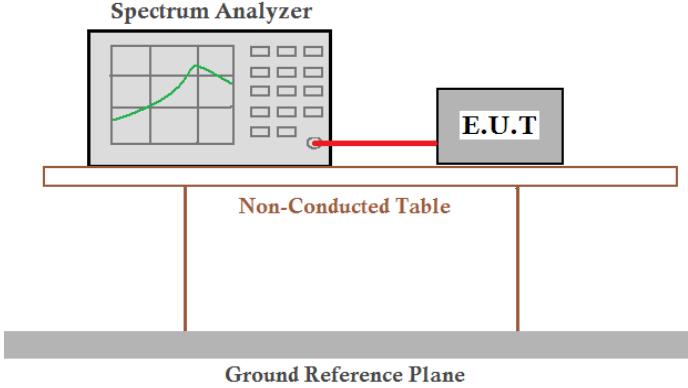
Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plots as follow:

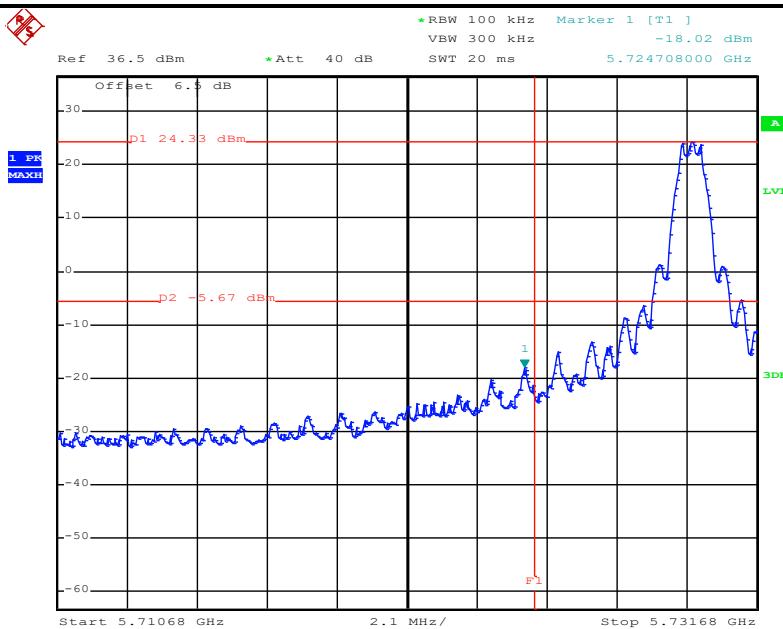

Date: 25.OCT.2020 14:19:26


Lowest channel

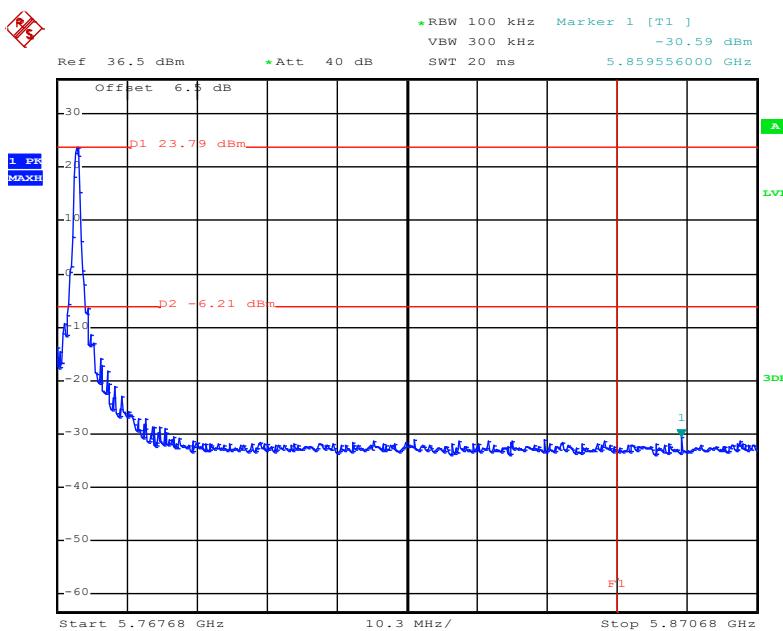


Date: 25.OCT.2020 14:23:44

Highest channel

6.6.2 Radiated Emission Method

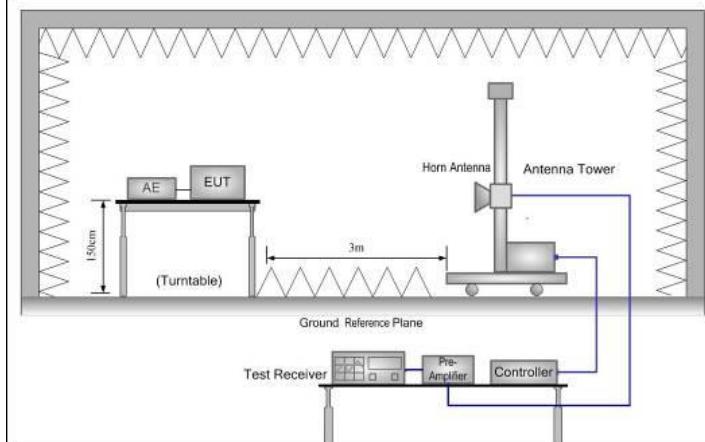Test Requirement:	FCC Part 15 C Section 15.205 and 15.209								
Test Frequency Range:	5535 MHz to 5460 MHz								
Test Distance:	3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark					
	Above 1GHz	54.00		Average Value					
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 								
Test setup:									
Test Instruments:	Refer to section 5.9 for details								
Test mode:	Refer to section 5.3 for details								
Test results:	Passed								

Product Name:	Dragon Fish Remote Control	Product Model:	DFRC-1
Test By:	Mike	Test mode:	5.8G Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

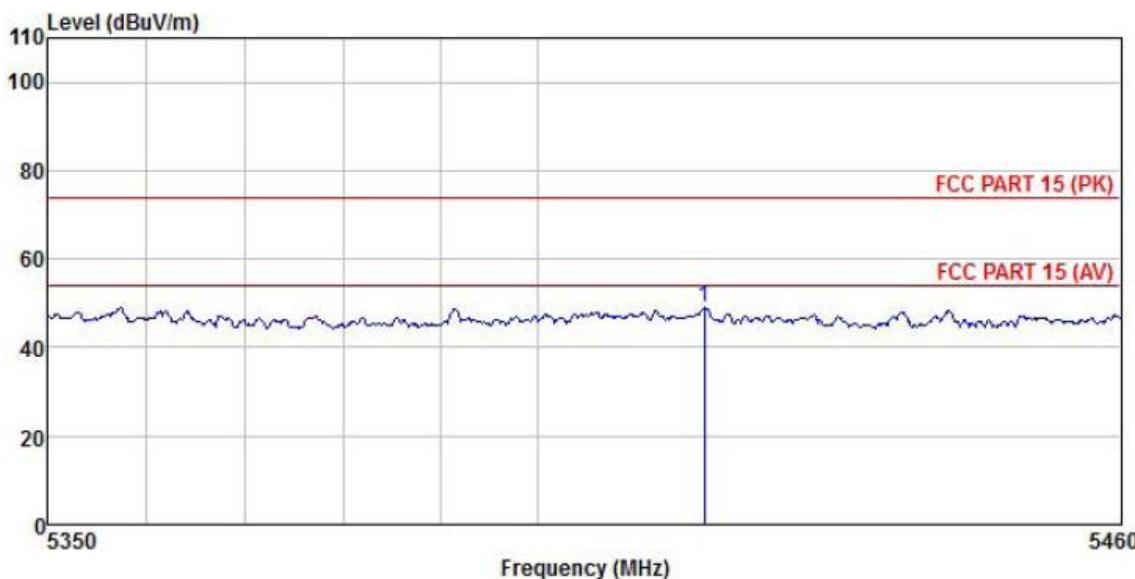


Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Limit Level	Line Limit	Over Line Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1 5417.054	48.98	32.13	7.15	2.62	41.86	49.02	74.00	-24.98	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Dragon Fish Remote Control	Product Model:	DFRC-1
Test By:	Mike	Test mode:	5.8G Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

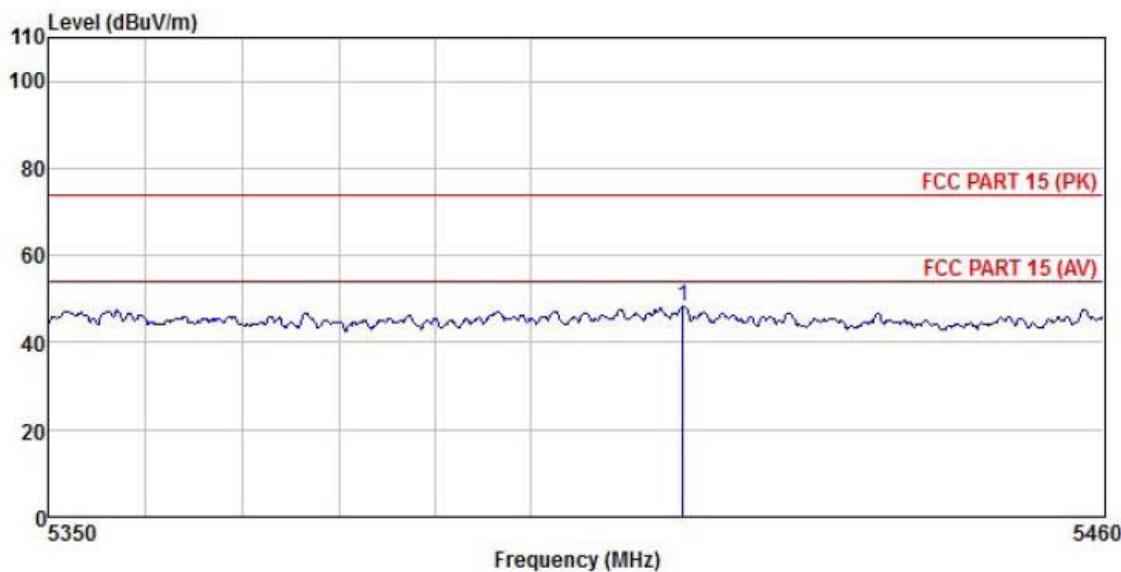


Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Limit Level	Line Limit	Over Line Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1 5415.841	48.47	32.10	7.13	2.62	41.86	48.46	74.00	-25.54	Peak

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

6.7 Spurious Emission

6.7.1 Conducted Emission Method

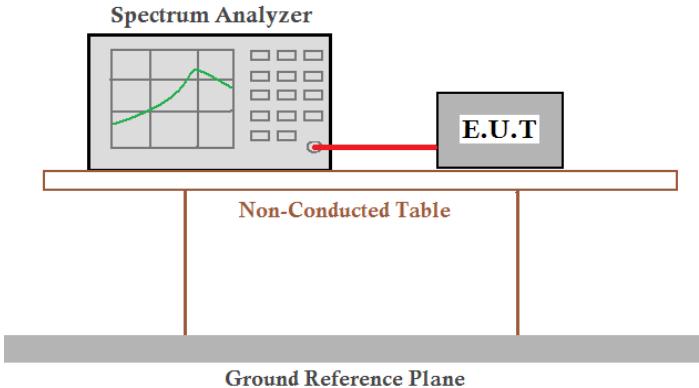
Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

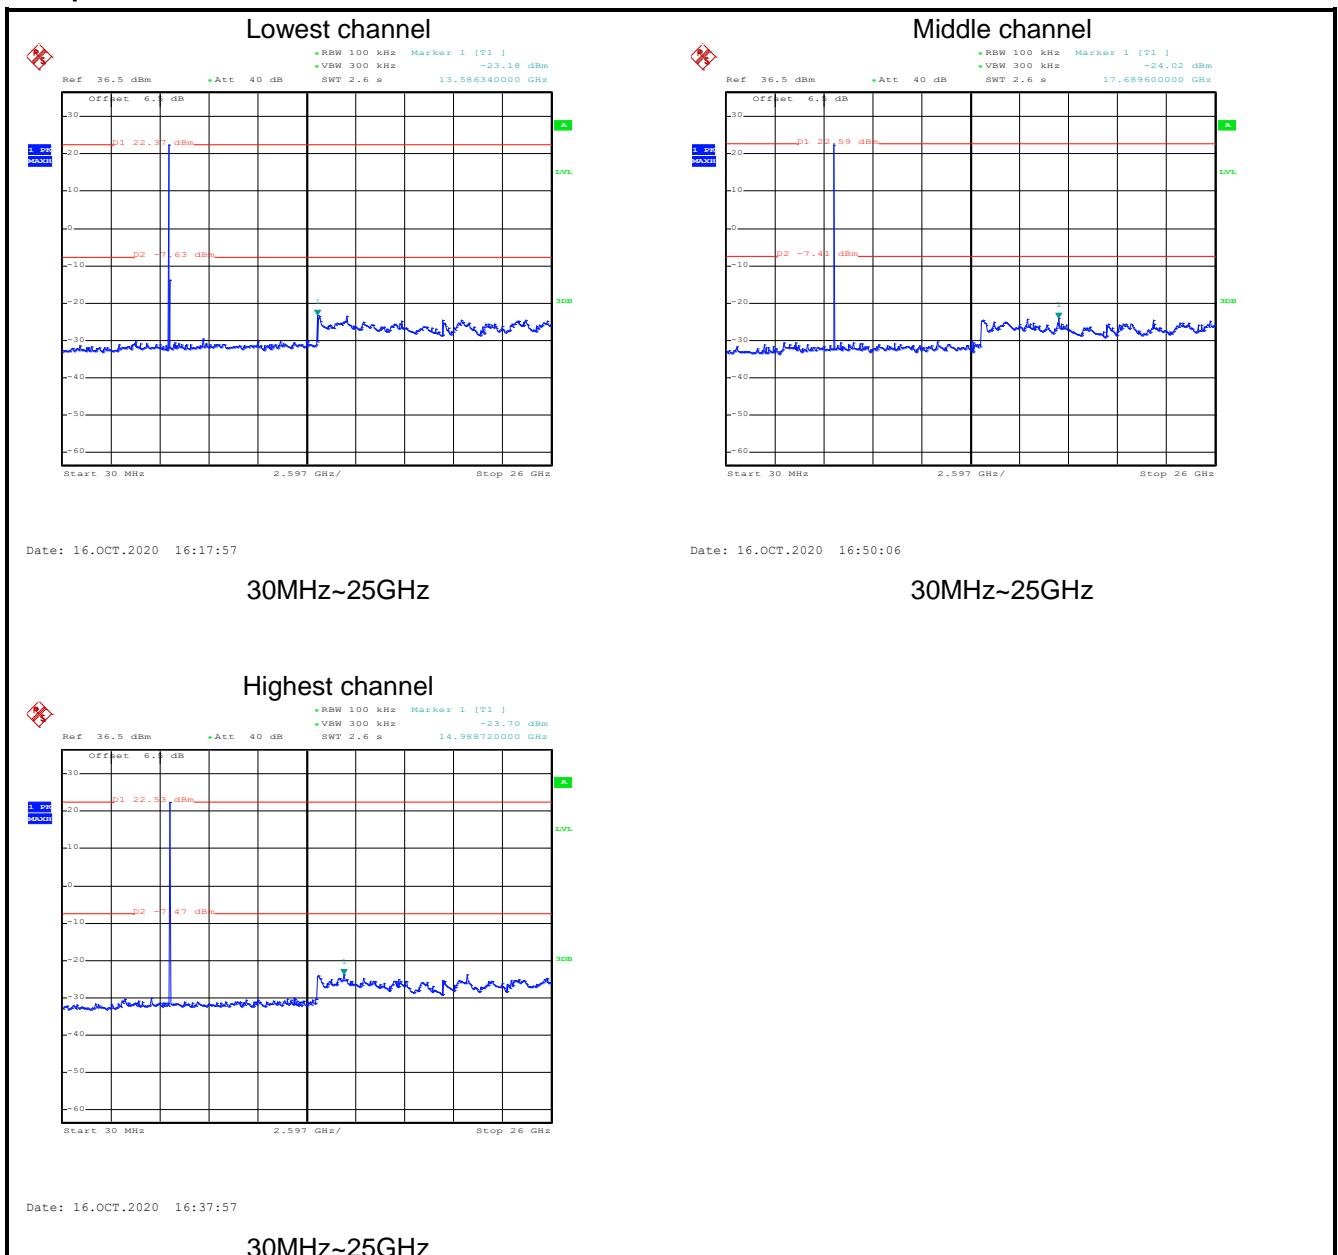

6.7.2 Radiated Emission Method


Test Requirement:	FCC Part 15 C Section 15.205 and 15.209						
Test Frequency Range:	9kHz to 25GHz						
Test Distance:	3m						
Receiver setup:	Frequency	Detector	RBW	VBW	Remark		
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value		
	Above 1GHz	Peak	1MHz	3MHz	Peak Value		
Limit:	RMS	1MHz	3MHz	Average	Value		
	Frequency	Limit (dBuV/m @3m)		Remark			
	30MHz-88MHz	40.0		Quasi-peak Value			
	88MHz-216MHz	43.5		Quasi-peak Value			
	216MHz-960MHz	46.0		Quasi-peak Value			
	960MHz-1GHz	54.0		Quasi-peak Value			
	Above 1GHz	54.0		Average Value			
Test Procedure:		<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 					
Test setup:	<p>Below 1GHz</p> <p>Above 1GHz</p>						

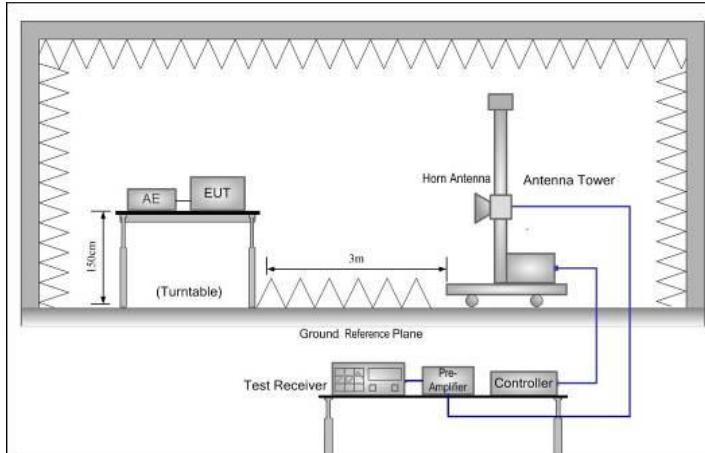

Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	<ol style="list-style-type: none">1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.2. 9 kHz to 30MHz is lower than the limit 20dB, so only shows the data of above 30MHz in this report.

Measurement Data (worst case):**Below 1GHz:**

Product Name:	Dragon Fish Remote Control	Product Model:	DFRC-1
Test By:	Mike	Test mode:	5.8G Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

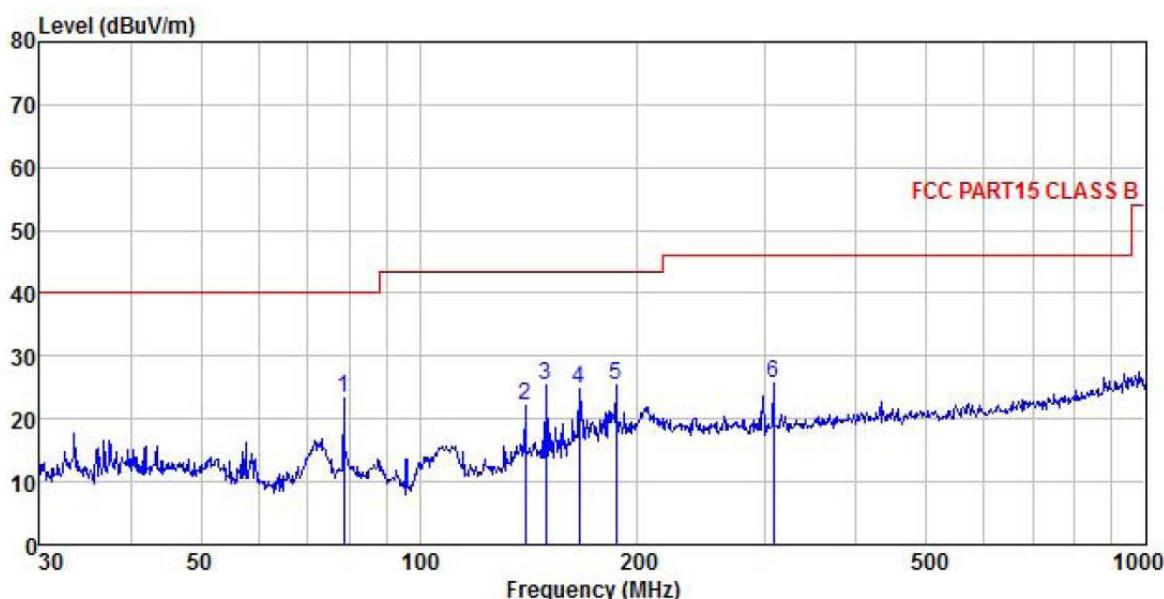


Freq MHz	Read	Antenna	Cable	Aux	Preampl	Limit Line dBuV/m	Over Limit dB	Remark
	Level dBuV	Factor	Loss dB	Factor	Factor			
1 78.689	40.10	12.46	0.47	0.00	29.65	23.38	40.00	-16.62 QP
2 139.851	37.07	13.80	0.60	0.00	29.27	22.20	43.50	-21.30 QP
3 149.486	39.86	14.26	0.62	0.00	29.22	25.52	43.50	-17.98 QP
4 166.068	37.36	15.80	0.65	0.00	29.08	24.73	43.50	-18.77 QP
5 186.441	36.39	17.26	0.69	0.00	28.93	25.41	43.50	-18.09 QP
6 307.831	34.62	18.72	0.87	0.00	28.47	25.74	46.00	-20.26 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

Product Name:	Dragon Fish Remote Control	Product Model:	DFRC-1
Test By:	Mike	Test mode:	5.8G Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

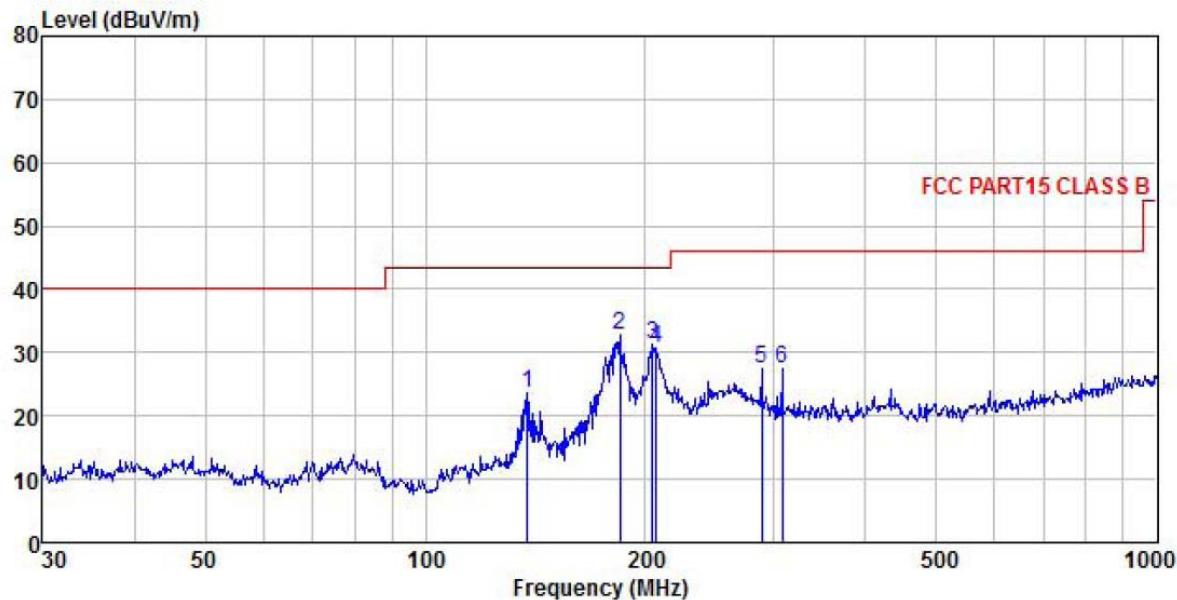

Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss dB	Aux Factor dB	Preamplifier Factor dB	Limit Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1 137.903	38.49	13.68	0.60	0.00	29.28	23.49	43.50	-20.01	QP
2 184.490	43.93	17.16	0.69	0.00	28.94	32.84	43.50	-10.66	QP
3 204.238	41.06	18.32	0.72	0.00	28.80	31.30	43.50	-12.20	QP
4 207.123	40.48	18.33	0.73	0.00	28.78	30.76	43.50	-12.74	QP
5 287.990	36.30	18.65	0.85	0.00	28.47	27.33	46.00	-18.67	QP
6 307.831	36.33	18.72	0.87	0.00	28.47	27.45	46.00	-18.55	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

Above 1GHz

Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11459.36	40.67	39.57	10.82	4.21	42.29	48.77	74.00	-25.23	Vertical
11459.36	40.27	39.57	10.82	4.21	42.29	48.37	74.00	-25.63	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11459.36	30.89	39.57	10.82	4.21	42.29	38.99	54.00	-15.01	Vertical
11459.36	30.67	39.57	10.82	4.21	42.29	38.77	54.00	-15.23	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11501.36	40.47	39.55	10.81	4.21	42.29	48.54	74.00	-25.46	Vertical
11501.36	40.04	39.55	10.81	4.21	42.29	48.11	74.00	-25.89	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11501.36	30.42	39.55	10.81	4.21	42.29	38.49	54.00	-15.51	Vertical
11501.36	30.94	39.55	10.81	4.21	42.29	39.01	54.00	-14.99	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11541.36	40.26	39.53	10.80	4.21	42.28	48.31	74.00	-25.69	Vertical
11541.36	40.07	39.53	10.80	4.21	42.28	48.12	74.00	-25.88	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11541.36	30.39	39.53	10.80	4.21	42.28	38.44	54.00	-15.56	Vertical
11541.36	31.10	39.53	10.80	4.21	42.28	39.15	54.00	-14.85	Horizontal

Remark:

- Final Level =Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.