

TEST REPORT

ACCORDING TO: FCC CFR 47 Part 90, subpart I, and RSS-119 Issue 12:2015

FOR:

ST Engineering Telematics Wireless Ltd

Water meter

Model: ALLEGRO3I

FCC ID: NTA2W4GB3

IC: 4732A-2W4GB3

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 90 and RSS-119 requirements	7
7.1	Effective radiated power of carrier.....	7
7.2	Radiated spurious emission measurements.....	14
8	APPENDIX A Test equipment and ancillaries used for tests.....	23
9	APPENDIX B Test equipment correction factors.....	24
10	APPENDIX C Measurement uncertainties	26
11	APPENDIX D Test laboratory description	27
12	APPENDIX E Specification references.....	27
13	APPENDIX F Abbreviations and acronyms.....	28

1 Applicant information

Client name: ST Engineering Telematics Wireless Ltd
Address: 26 Hamelaha street, POB 1911, Holon 5811801, Israel
Telephone: +972 3557 5767
Fax: +972 3557 5753
E-mail: itsikk@tlmw.com
Contact name: Mr. Itsik Kanner

2 Equipment under test attributes

Product name: Water meter with external antenna
Product type: Transceiver
Model(s): ALLEGRO3I
Serial number: 01455472
Hardware version: REV D
Software release: 4.65
Receipt date 12-Oct-23

3 Manufacturer information

Manufacturer name: ST Engineering Telematics Wireless Ltd
Address: 26 Hamelaha street, POB 1911, Holon 5811801, Israel
Telephone: +972 3557 5767
Fax: +972 3557 5753
E-Mail: itsikk@tlmw.com
Contact name: Mr. Itsik Kanner

4 Test details

Project ID: 52275
Location: Hermon Laboratories Ltd. 66 HaTachana str., P.O. Box 23, Binyamina 3055001, Israel
Test started: 10-Dec-23
Test completed: 17-Dec-23
Test specification(s): FCC part 90, subpart I; RSS-119 issue 12




5 Tests summary

Test	Status
FCC Section 90.205 / RSS-119 Section 5.4, Maximum output power	Pass
FCC Section 90.209 / RSS-119 Section 5.5, Occupied bandwidth	Not required*
FCC Section 90.210 / RSS-119 Section 5.8.4, Emission mask	Not required*
FCC Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions	Pass
FCC Section 90.210 / RSS-119 Section 5.8.4, Conducted spurious emissions	Not required*
FCC Section 90.213 / RSS-119 Section 5.3, Frequency stability	Not required*
FCC Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour	Not required*
FCC Section 2.1091 / RSS-102 section 2.5, RF radiation exposure evaluation	Pass, Exhibit in application for certification provided

Note*. The test results provided in the test report TELRAD_FCC.42897_52275_EA for device version with external antenna.

Testing was completed against all relevant requirements of the test standard. However, results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. A. Shabi, test engineer, EMC & Radio	10-Dec-23 – 17-Dec-23	
Reviewed by:	Mrs. S. Peysahov Sheynin, certification specialist, EMC & Radio	20-Feb-24	
Approved by:	Mr. M. Nikishin, group leader, EMC & Radio	20-Mar-24	


6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility

6.1 General information

The EUT is a Water Meter, operating in 450-470 MHz band, battery powered. The battery rated voltage is 3.6V.

6.2 Test configuration

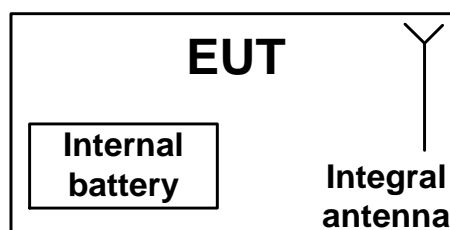

6.3 Changes made in EUT

No changes were implemented in the EUT during testing.

6.4 Transmitter characteristics

Type of equipment							
X	Stand-alone (Equipment with or without its own control provisions)						
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)						
	Plug-in card (Equipment intended for a variety of host systems)						
Intended use				Condition of use			
	fixed				Always at a distance more than 2 m from all people		
X	mobile				Always at a distance more than 20 cm from all people		
	portable				May operate at a distance closer than 20 cm to human body		
Assigned frequency range				450- 470 MHz			
Maximum rated output power				At transmitter 50 Ω RF output connector		32.32 dBm	
				Effective radiated power			
Is transmitter output power variable?				X	No		
					continuous variable		
					stepped variable with stepsize		
					minimum RF power		
					maximum RF power		
Antenna connection							
unique coupling		standard connector		X	integral	with temporary RF connector	
						without temporary RF connector	
Antenna/s technical characteristics							
Type		Manufacturer		Model number		Gain	
Internal		Arad Technologies		NA		-1 dBi	
Transmitter 99% power bandwidth				6 kHz			
Transmitter aggregate data rate/s				4.8 kbps			
Type of modulation				4GFSK			
Modulating test signal (baseband)				PRBS			
Maximum transmitter duty cycle in normal use				0.0023 %	Tx ON time	1 s	Period
							12 hours
Transmitter duty cycle supplied for test				100 %	Tx ON time		Period
Transmitter power source							
X	Battery	Nominal rated voltage	3.6 VDC	Battery type	Lithium		
	DC	Nominal rated voltage	VDC				
	AC mains	Nominal rated voltage	VAC	Frequency	Hz		
Common power source for transmitter and receiver				X	yes	no	



Test specification:		Section 90.205 / RSS-119 Section 5.4, Maximum output power	
Test procedure:		47 CFR, Section 2.1046;	
Test mode:		Verdict: PASS	
Date(s):			
17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 90 and RSS-119 requirements

7.1 Effective radiated power of carrier

7.1.1 General

This test was performed to measure effective radiated power emanated by transmitter at carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 Effective radiated power limit

Assigned frequency band, MHz	ERP		Equivalent field strength limit @ 3m, dB(μV/m)*
	W	dBm	
According to FCC part 90.205			
450-470	2	33	130.38
According to RSS-119			
450-470	60	47.78	145.16

* - Equivalent field strength limit was calculated from maximum allowed ERP as follows: $E = \sqrt{30 \times P \times 1.64} / r$, where P is ERP in Watts, 1.64 is numeric gain of ideal dipole and r is antenna to EUT distance in meters

7.1.2 Test procedure for field strength measurements

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.

7.1.2.2 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360, the measuring antenna height was swept throughout the range, specified in Table 7.1.2 and Table 7.1.3, in both vertical and horizontal polarizations.

7.1.2.3 The worst test results (the lowest margins) were recorded in Table 7.1.2 and Table 7.1.3 and shown in the associated plots.



Test specification: Section 90.205 / RSS-119 Section 5.4, Maximum output power			
Test procedure: 47 CFR, Section 2.1046;			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Figure 7.1.1 Setup for carrier field strength measurements


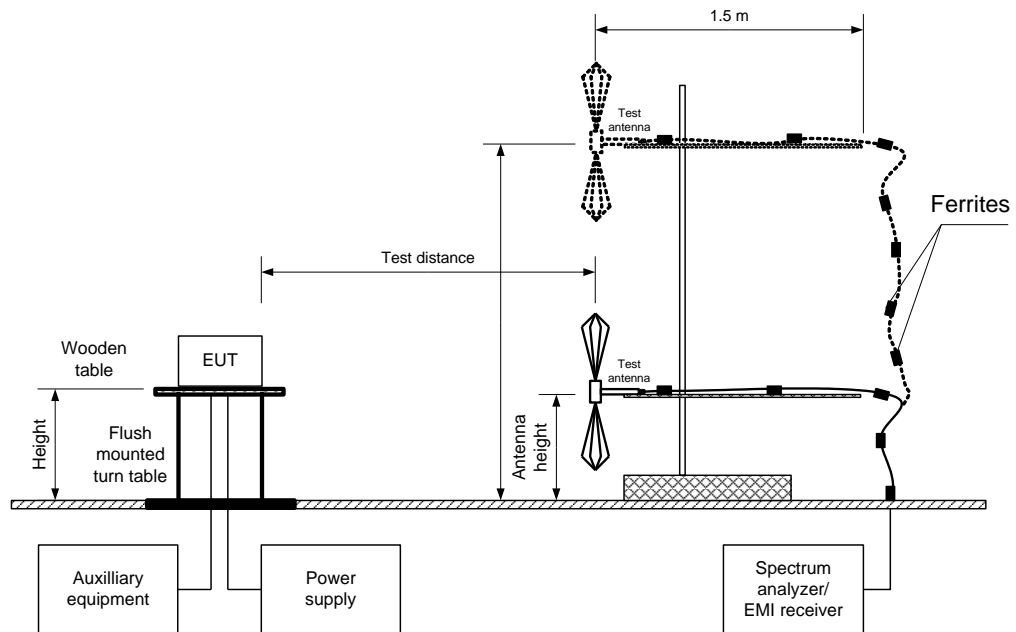


Figure 7.1.2 Setup for substitution ERP measurements



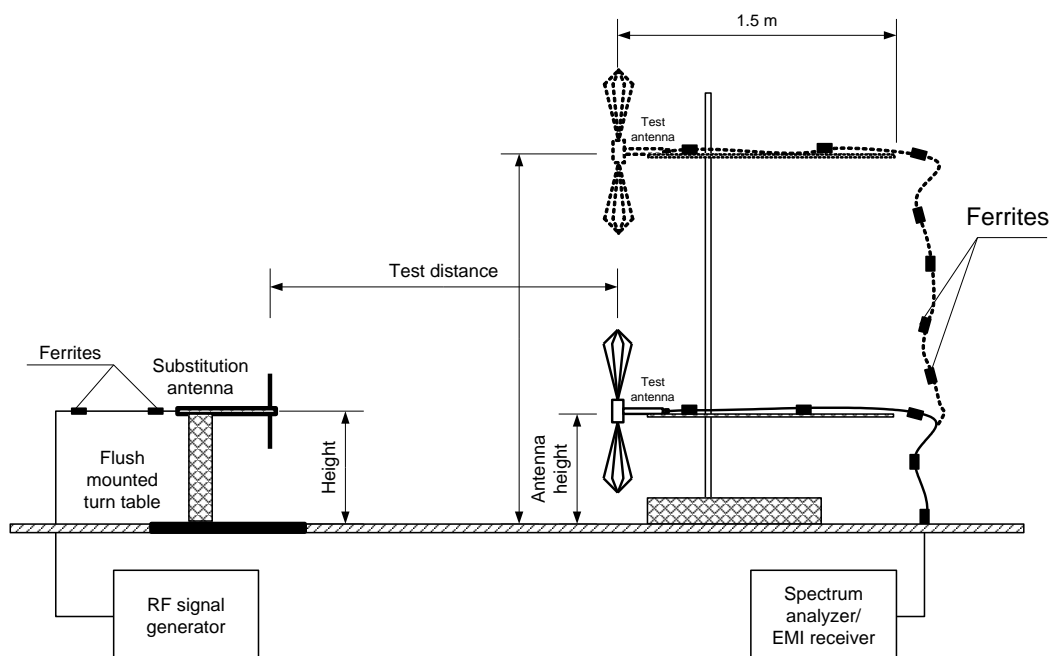

HERMON LABORATORIES

Test specification: Section 90.205 / RSS-119 Section 5.4, Maximum output power			
Test procedure: 47 CFR, Section 2.1046;			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Table 7.1.2 Transmitter carrier field strength according to FCC requirements

ASSIGNED FREQUENCY RANGE: 450 - 470 MHz
 TEST SITE: SAC
 TEST DISTANCE: 3 m
 EUT HEIGHT: 0.8 m
 TEST ANTENNA HEIGHTS RANGE: 1.0 – 4.0 m
 DETECTOR USED: Peak
 Resolution bandwidth: 100KHz
 VIDEO BANDWIDTH: 300KHz
 TEST ANTENNA TYPE: Biconical
 MODULATION: 4GFSK
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees	EUT antenna gain, dBi	ERP, dBm***	Peak output power (conducted), dBm*	ERP Limit, dBm	Margin, dB**	Verdict
450.0125	126.57	VER	1.1	0	-1.0	29.17	32.32	33.00	-3.83	Pass
460.0000	126.02	VER	1.1	0	-1.0	28.62	31.77	33.00	-4.38	Pass
469.9875	124.43	VER	1.1	0	-1.3	27.03	30.48	33.00	-5.97	Pass

*- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance:
Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi – 95.2 dB

** - Margin = ERP – specification ERP limit.

*** ERP=Field strength in dB(μV/m) – 97.4 dB



Test specification: Section 90.205 / RSS-119 Section 5.4, Maximum output power			
Test procedure: 47 CFR, Section 2.1046;			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Table 7.1.3 Transmitter carrier field strength according to RSS-119 requirements

ASSIGNED FREQUENCY RANGE: 450 - 470 MHz
 TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 EUT HEIGHT: 0.8 m
 TEST ANTENNA HEIGHTS RANGE: 1.0 – 4.0 m
 DETECTOR USED: Peak
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Biconilog
 MODULATION: 4GFSK
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees	EUT antenna gain, dBi	ERP, dBm***	Peak output power (conducted), dBm*	ERP Limit, dBm	Margin, dB**	Verdict
450.0125	126.57	VER	1.1	0	-1.0	29.17	32.32	47.78	-18.61	Pass
460.0000	126.02	VER	1.1	0	-1.0	28.62	31.77	47.78	-19.16	Pass
469.9875	124.43	VER	1.1	0	-1.3	27.03	30.48	47.78	-20.75	Pass

*- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$,

where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance:
Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB

** - Margin = ERP – specification ERP limit.

*** ERP=Field strength in dB(μV/m) – 97.4 dB

Reference numbers of test equipment used

HL 3903	HL 5288	HL 5902	HL 7585				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:		Section 90.205 / RSS-119 Section 5.4, Maximum output power	
Test procedure:		47 CFR, Section 2.1046;	
Test mode:		Verdict: PASS	
Date(s):			
17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.1.1 Transmitter carrier field strength at low frequency in vertical antenna polarization

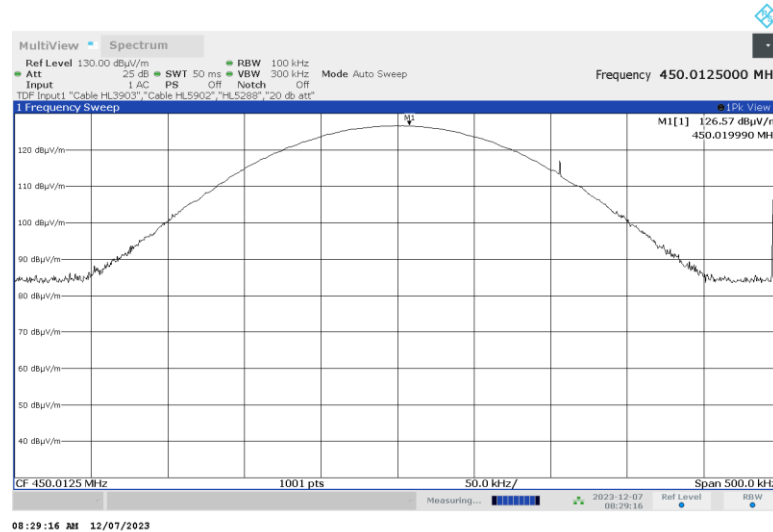

Plot 7.1.2 Transmitter carrier field strength at low frequency in horizontal antenna polarization

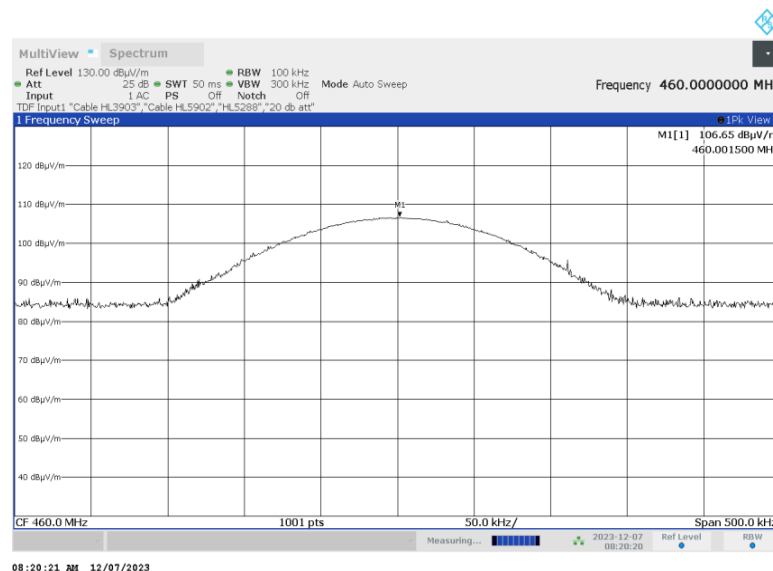




HERMON LABORATORIES

Report ID: TELRAD_FCC.42897_52275_IA.docx


Date of Issue: 20-Mar-24

Test specification: Section 90.205 / RSS-119 Section 5.4, Maximum output power			
Test procedure: 47 CFR, Section 2.1046;			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.1.3 Transmitter carrier field strength at mid frequency in vertical antenna polarization

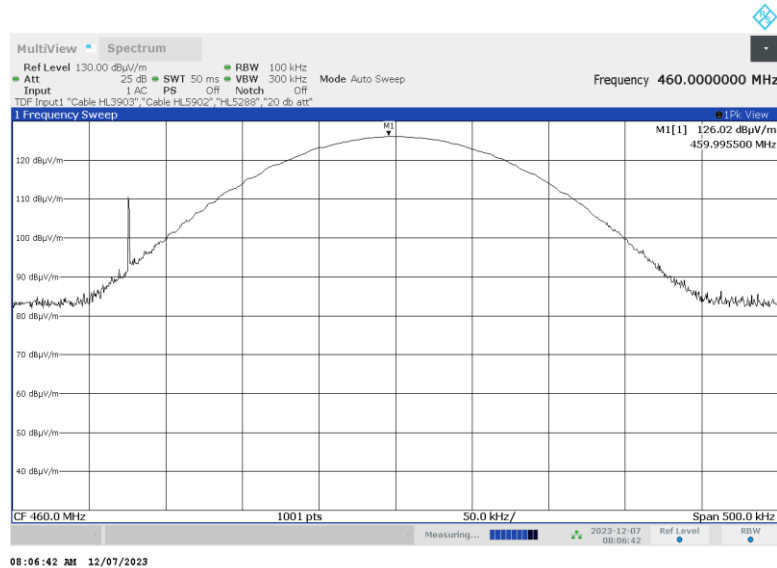

Plot 7.1.4 Transmitter carrier field strength at mid frequency in horizontal antenna polarization

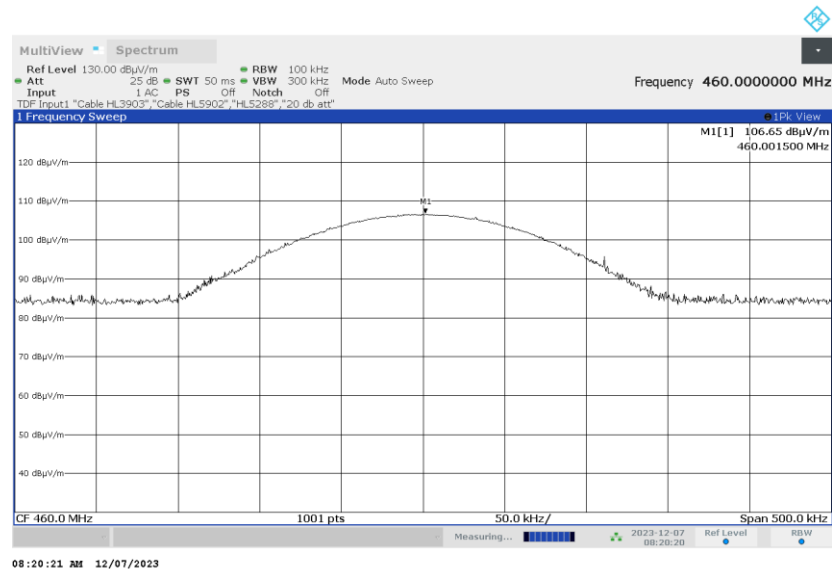





HERMON LABORATORIES

Test specification: Section 90.205 / RSS-119 Section 5.4, Maximum output power			
Test procedure: 47 CFR, Section 2.1046;			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.1.5 Transmitter carrier field strength at high frequency in vertical antenna polarization

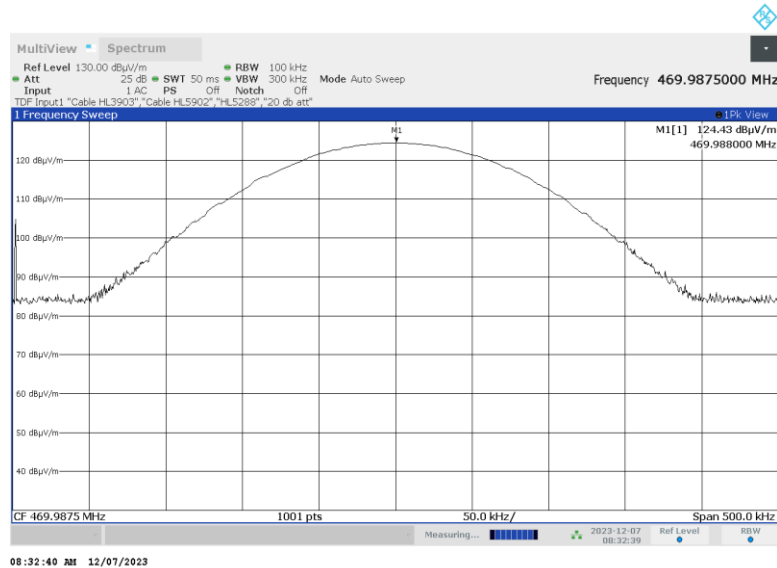

Plot 7.1.6 Transmitter carrier field strength at high frequency in horizontal antenna polarization

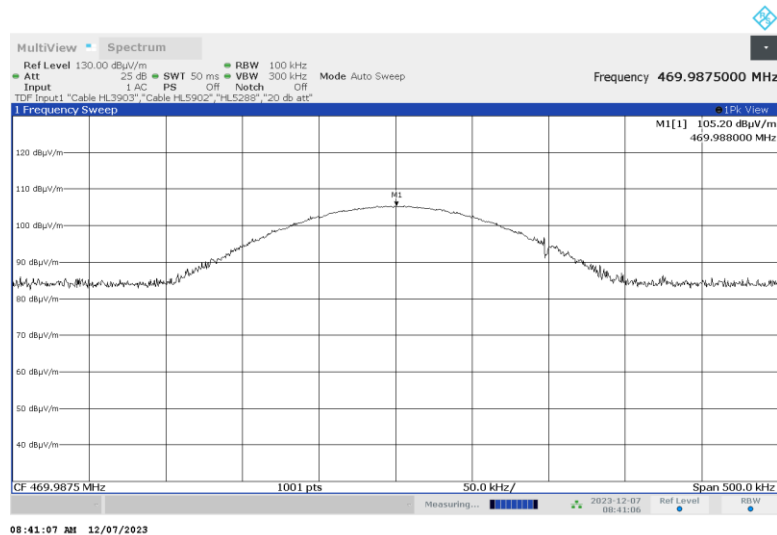



Test specification: Section 90.210 / RSS-119 Section 5.8.4, Conducted spurious emissions			
Test procedure: 47 CFR, Sections 2.1051			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

7.2 Radiated spurious emission measurements

7.2.1 General

This test was performed to measure radiated spurious emissions from the EUT. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Radiated spurious emission test limits

Frequency, MHz	Attenuation below carrier, dBc	ERP of spurious, dBm	Equivalent field strength limit @ 3m, dB(μV/m)***
0.009 – 10th harmonic*	55+10logP**	-25	72.35

* - Excluding the in band emission within ± 250 % of the authorized bandwidth from the carrier

** - P is transmitter output power in Watts

*** - Equivalent field strength limit was calculated from maximum allowed ERP of spurious as follows:
 $E = \sqrt{30 \times P \times 1.64} / r$, where P is ERP in Watts, 1.64 is numeric gain of ideal dipole and r is antenna to EUT distance in meters

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.2 and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal, polarizations.

7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.2 and shown in the associated plots.



Test specification: Section 90.210 / RSS-119 Section 5.8.4, Conducted spurious emissions			
Test procedure: 47 CFR, Sections 2.1051			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Figure 7.2.1 Setup for spurious emission field strength measurements in 9 kHz to 30 MHz band


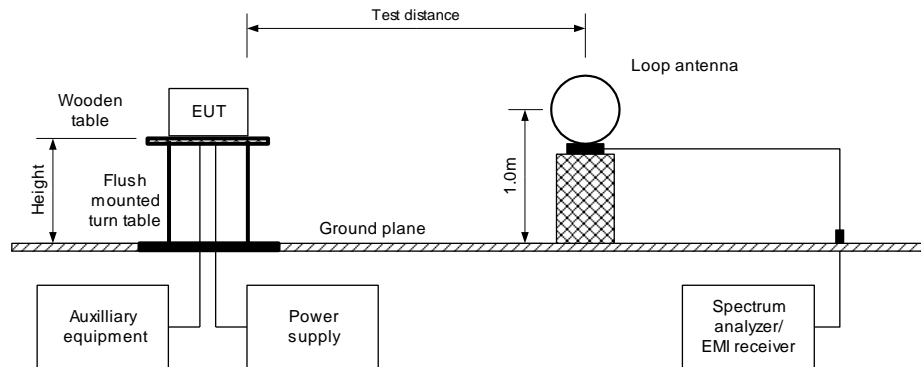


Figure 7.2.2 Setup for spurious emission field strength measurements above 30 MHz



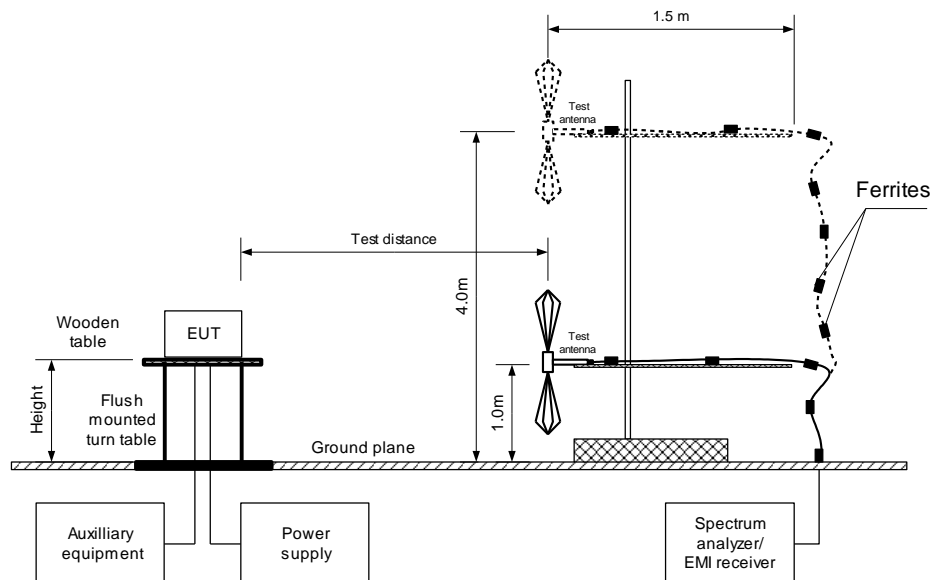

Test specification: Section 90.210 / RSS-119 Section 5.8.4, Conducted spurious emissions			
Test procedure: 47 CFR, Sections 2.1051			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Table 7.2.2 Spurious emission field strength test results

ASSIGNED FREQUENCY RANGE: 450 - 470 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 0.8m - (9 kHz – 1000 MHz)
 1.5m - (above 1000 MHz)
 INVESTIGATED FREQUENCY RANGE: 0.009 – 5000 MHz
 DETECTOR USED: Peak
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)
 MODULATION: 4GFSK
 BIT RATE: 4.8 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	RBW, kHz	Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
Low carrier frequency 450.0125 MHz								
900.025	57.2	72.3	-15.10	100	VER	1.5	-160	Pass
1350.0	55.0	72.3	-17.30	1000	VER	1.5	-30	Pass
1901.2	44.4	72.3	-27.90	1000	VER	1.5	-30	Pass
Mid carrier frequency 460.0000 MHz								
920	49.8	72.3	-22.50	100	VER	1.5	-160	Pass
1380.00	57.3	72.3	-15.00	1000	VER	1.5	120	Pass
1841.20	48.6	72.3	-23.70	1000	VER	1.5	-180	Pass
2760.70	50.6	72.3	-21.70	1000	VER	1.5	-180	Pass
High carrier frequency 469.9875 MHz								
939.86	46.73	72.3	-25.57	100	VER	1.5	-140	Pass
1409.60	58.8	72.3	-13.50	1000	VER	1.5	95	Pass
1881.10	47.5	72.3	-24.80	1000	VER	1.5	-180	Pass
2820.20	52.20	72.3	-20.10	1000	VER	1.5	-180	Pass

*- Margin = Field strength of spurious – calculated field strength limit.

** - EUT front panel refers to 0 degrees position of turntable.



Test specification: Section 90.210 / RSS-119 Section 5.8.4, Conducted spurious emissions			
Test procedure: 47 CFR, Sections 2.1051			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Table 7.2.3 ERP of spurious emission test results in TX mode

OPERATIONAL FREQUENCY BAND: 450 - 470 MHz
 TEST DISTANCE: 3 m
 SUBSTITUTION ANTENNA HEIGHT: 1.5 m
 TEST ANTENNA HEIGHTS RANGE: 1.0 – 4m
 DETECTOR USED: Peak / Quasi-peak (25 – 1000 MHz)
 Peak (above 1000 MHz)
 RESOLUTION BANDWIDTH: 25 MHz – 1000 MHz: 120 kHz (6 dB RBW)
 above 1000 MHz: 1.0 MHz (3 dB RBW)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 SUBSTITUTION ANTENNA TYPE: Biconical (25 MHz – 30 MHz)
 Tunable dipole (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength, dB(μV/m)	RBW, kHz	Antenna polarization	RF generator output, dBm	Ant gain, dBd	Cable loss, dB	Spurious emission, dBm	Limit, dBm	Margin, dB*	Verdict
Low carrier frequency 450.0125 MHz										
900.025	57.2	100	Ver	-45.3	-1.72	0.7	-47.72	-25	-22.72	Pass
1350.0	55.0	1000	Ver	-40.0	6.30	0.7	-34.40	-25	-9.40	Pass
Mid carrier frequency 460.0000 MHz										
1380.00	57.3	1000	Ver	-40.0	6.49	0.7	-34.21	-25	-9.21	Pass
High carrier frequency 469.9969 MHz										
1409.60	58.8	1000	Ver	-41.2	6.57	0.7	-35.33	-25	-10.33	Pass

*- Margin = Spurious emission – specification limit.

** - The worst case results from all data & 2 control channels that were investigated.

Reference numbers of test equipment used

HL 1565	HL 3903	HL 4339	HL 4933	HL 5288	HL 5371	HL 5588	HL 5902
HL 7585	HL446	HL3339	HL4114				

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:		Section 90.210 / RSS-119 Section 5.8.4, Conducted spurious emissions	
Test procedure:		47 CFR, Sections 2.1051	
Test mode:		Verdict: PASS	
Date(s):			
17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.2.1 Radiated emission measurements in 9 kHz- 30 MHz range



TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Low
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

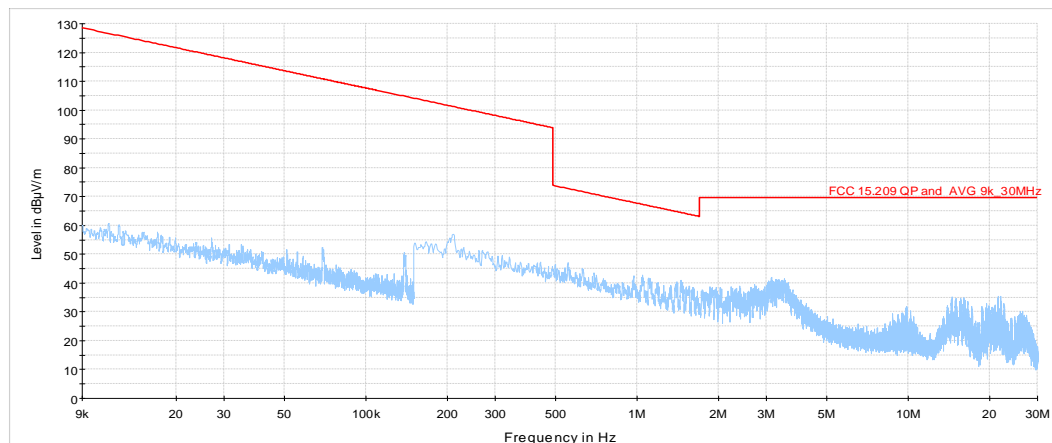

*Will be applied limit of 72.35 dBμV/m

Plot 7.2.2 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi anechoic chamber
CARRIER FREQUENCY: Low
ANTENNA POLARIZATION: Vertical and Horizontal
TEST DISTANCE: 3 m

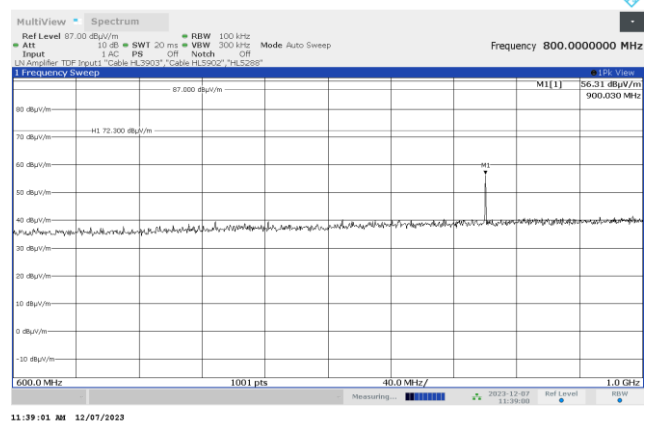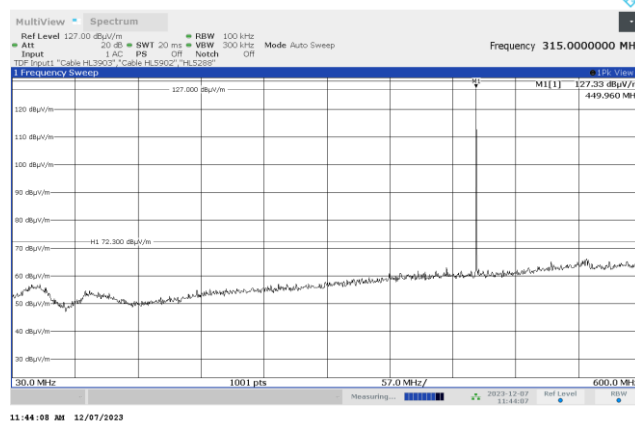





HERMON LABORATORIES

Test specification: Section 90.210 / RSS-119 Section 5.8.4, Conducted spurious emissions			
Test procedure: 47 CFR, Sections 2.1051			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			

Plot 7.2.3 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE:
CARRIER FREQUENCY:
ANTENNA POLARIZATION:
TEST DISTANCE:



Semi anechoic chamber
Mid
Vertical and Horizontal
3 m

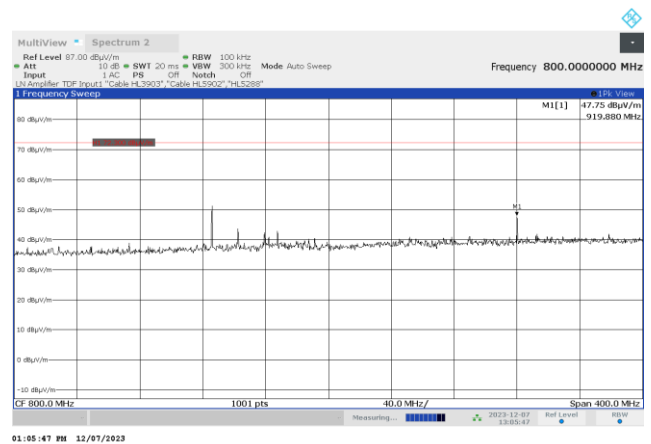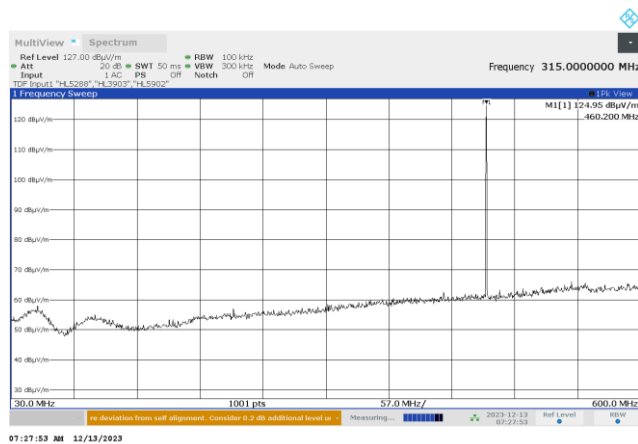

Plot 7.2.4 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE:
CARRIER FREQUENCY:
ANTENNA POLARIZATION:
TEST DISTANCE:

Semi anechoic chamber
High
Vertical and Horizontal
3 m

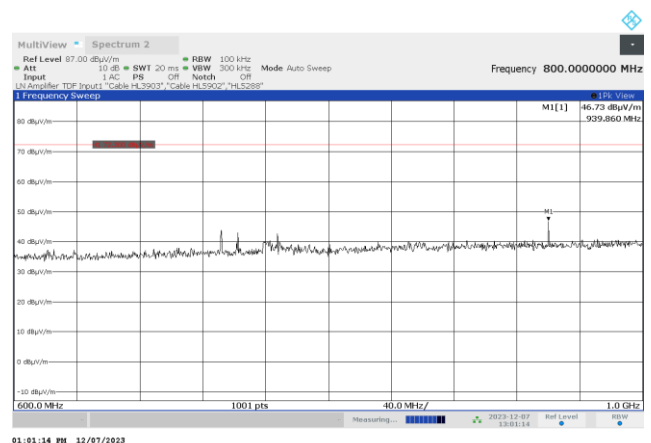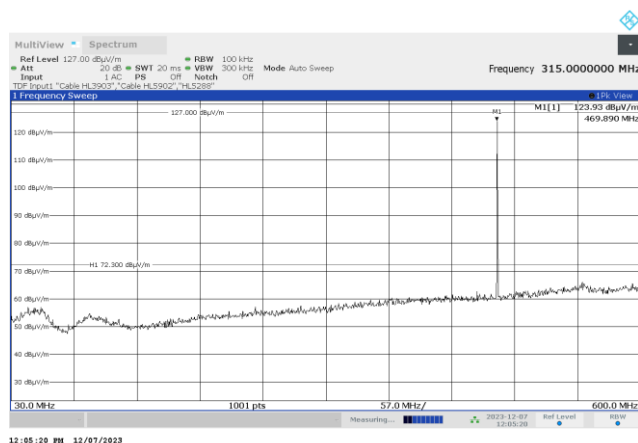



HERMON LABORATORIES

Report ID: TELRAD_FCC.42897_52275_IA.docx


Date of Issue: 20-Mar-24

Test specification: Section 90.210 / RSS-119 Section 5.8.4, Conducted spurious emissions			
Test procedure: 47 CFR, Sections 2.1051			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.2.5 Radiated emission measurements in 1000 – 5000 MHz range

TEST SITE:
TEST DISTANCE:
CARRIER FREQUENCY: Low

Semi anechoic chamber
3 m
CARRIER FREQUENCY: Mid

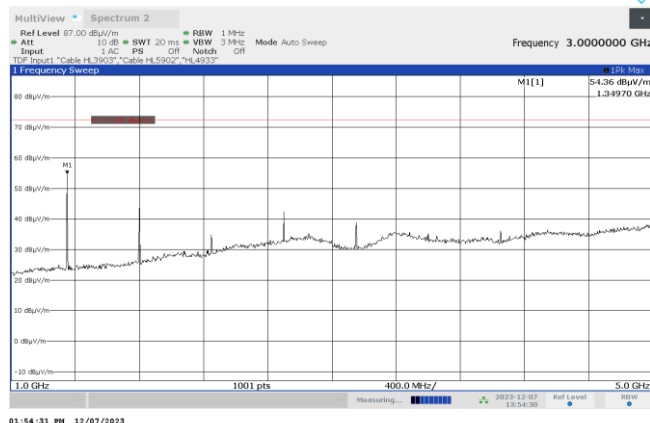


01:54:31 PM 12/07/2023

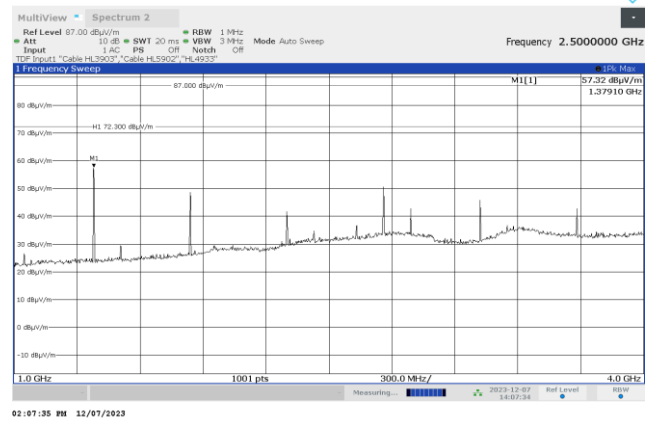

02:07:35 PM 12/07/2023

CARRIER FREQUENCY: High

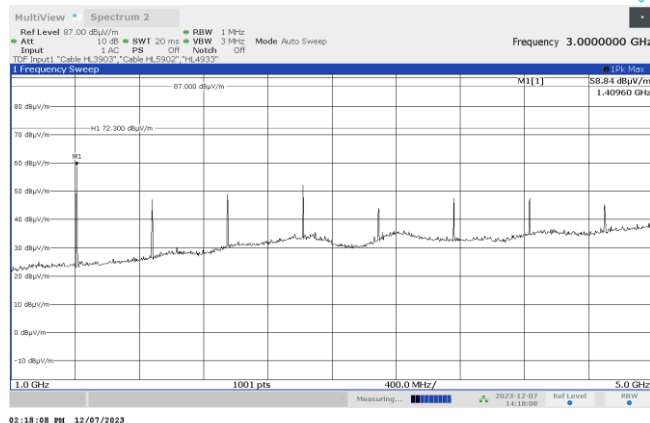

02:18:08 PM 12/07/2023



HERMON LABORATORIES

Report ID: TELRAD_FCC.42897_52275_IA.docx



Date of Issue: 20-Mar-24

Test specification: Section 90.210 / RSS-119 Section 5.8.4, Conducted spurious emissions			
Test procedure: 47 CFR, Sections 2.1051			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			


Plot 7.2.6 Radiated emission measurements at the 2nd harmonic

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
CARRIER FREQUENCY: Low

Semi anechoic chamber
3 m
Vertical & Horizontal
CARRIER FREQUENCY: Mid

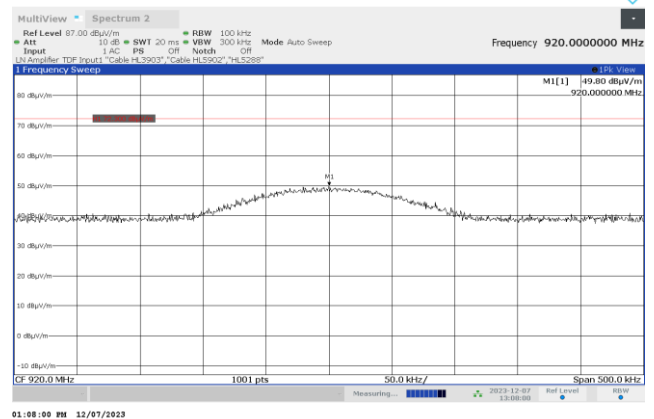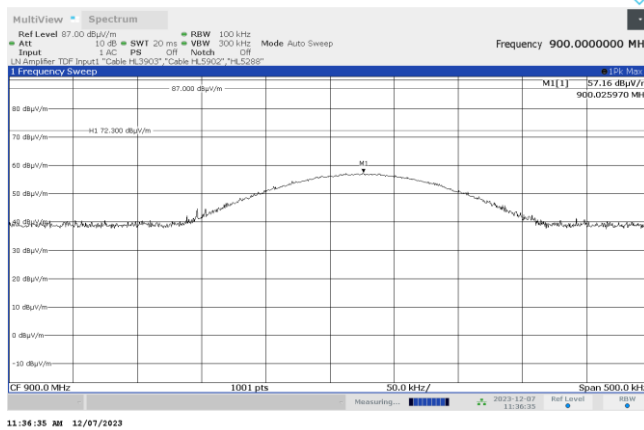

CARRIER FREQUENCY: High

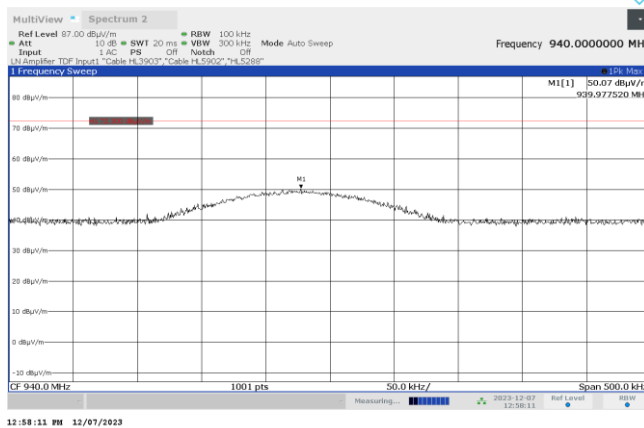



HERMON LABORATORIES

Report ID: TELRAD_FCC.42897_52275_IA.docx

Date of Issue: 20-Mar-24

Test specification:		Section 90.210 / RSS-119 Section 5.8.4, Conducted spurious emissions	
Test procedure:		47 CFR, Sections 2.1051	
Test mode:		Verdict: PASS	
Date(s):			
17-Dec-23			
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1012 hPa	Power: 3.6 VDC
Remarks:			



Plot 7.2.7 Radiated emission measurements at the 3 harmonics

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:


Semi anechoic chamber
3 m
Vertical & Horizontal

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

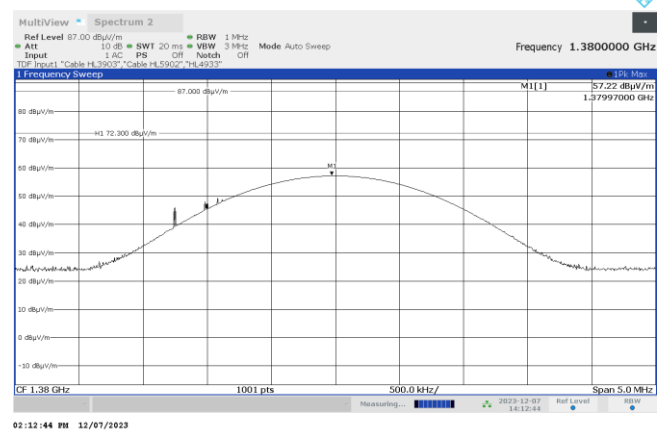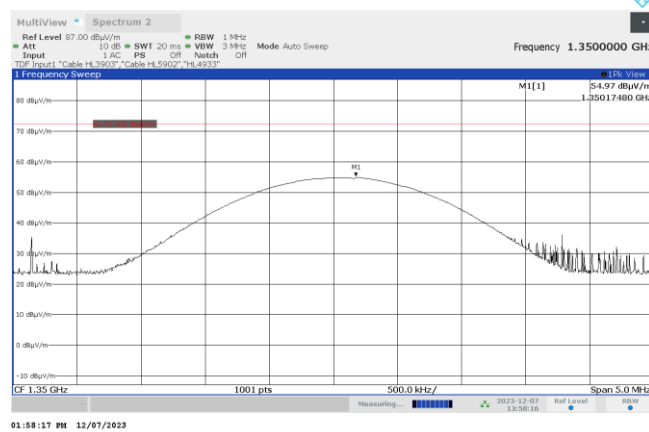

CARRIER FREQUENCY: High

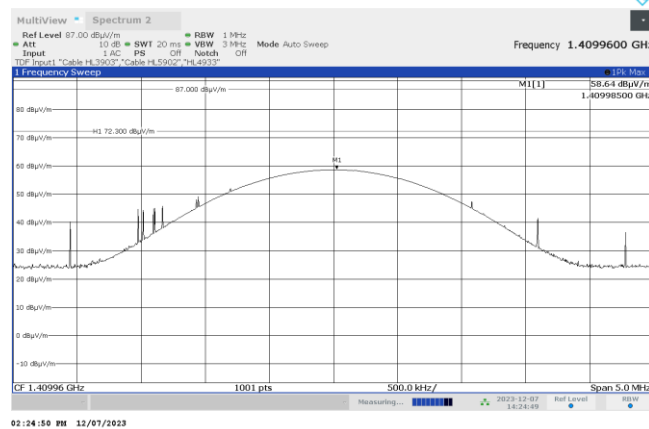

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
1565	Antenna, Dipole, Tunable 500 - 1000 MHz	Electro-Metrics	TDS-30-2	334	12-Feb-23	12-Feb-24
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1226/2A	16-Apr-23	16-Apr-24
4339	High pass Filter, 50 Ohm, 1000 to 18000 MHz, SMA-FM / SMA-M	Micro-Tronics	HPM5011 5-02	001	21-Jun-23	21-Jun-25
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	19-Jan-23	19-Jan-24
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	24-Mar-22	24-Mar-25
5371	EXG Analog Signal Generator, 9 kHz - 40 GHz	Keysight Technologies	N5173B	MY57280540	21-Dec-22	21-Jan-24
5588	Cable, 50 Ohm, DC to 18 GHz, 1.8 m, SMA/N-type	Mini Circuits	CBL-6FT-SMNM+	NA	13-Jul-23	13-Jul-24
5902	RF cable, 18 GHz, 6.0m, N-type	Huber-Suhner	SF126EA/11N/11N/6000	NA	19-Nov-23	19-Nov-24
7585	EMI Test Receiver, 1 Hz to 44 GHz	Rohde & Schwarz	ESW44	103130	21-Sep-23	21-Sep-24

9 APPENDIX B Test equipment correction factors

HL 4933: Active Horn Antenna
COM-POWER CORPORATION, model: AHA-118, s/n 701046

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

HL 5288: Trilog Antenna
Frankonia, model: ALX-8000E, s/n: 00809
30-1000 MHz

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.
above 1000 MHz

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

10 APPENDIX C Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Transmitter tests	
Carrier power conducted at antenna connector	± 1.7 dB
Carrier power radiated (substitution method)	± 4.5 dB
Occupied bandwidth	$\pm 8\%$
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Spurious emissions radiated 30 MHz – 40 GHz (substitution method)	± 4.5 dB
Frequency error	30 – 300 MHz: ± 50.5 Hz (1.68 ppm) 300 – 1000 MHz: ± 168 Hz (0.56 ppm)
Transient frequency behaviour	187 Hz $\pm 13.9\%$
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0\%$
Unintentional radiator tests	
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

11 APPENDIX D Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), ISED #2186A, CAB identifier is IL1001; Certified by VCCI, Japan (the registration numbers for OATS are R-10808 for RE measurements below 1 GHz, G-20112 for RE measurements above 1 GHz, R-11082 for anechoic chamber for RE measurements below 1 GHz, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager

12 APPENDIX E Specification references

FCC 47CFR part 90: 2022	Private land mobile radio services
FCC 47CFR part 2: 2022	Frequency allocations and radio treaty matters; general rules and regulations
RSS-119 Issue 12: 2015+Amendment (April, 2022)	Land Mobile and Fixed Equipment Operating in the Frequency Range 27.41-960 MHz

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
BB	broad band
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT