


1.DIMENSIONS(UNIT:mm) ./Appearance size(unit:mm)

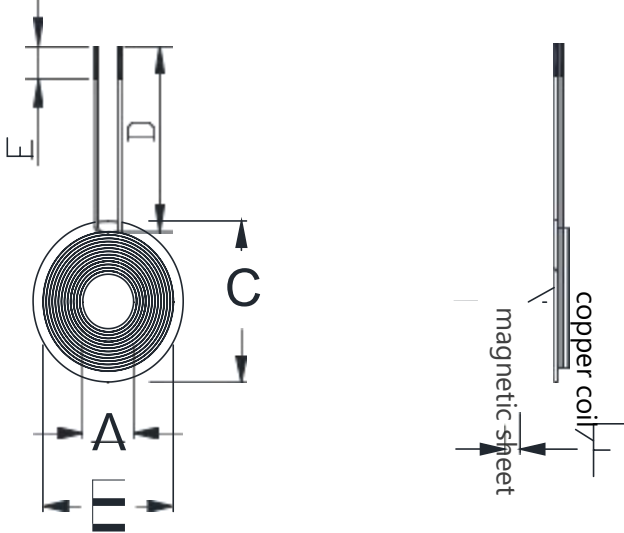

A	InnerDiameter	10±0.2
B	InnerDiameter	19.5±0.5
C	MagneticDisk OuterDiameter	20.5±0.5
D	LeadWireLength	15±3
E	Soldering Length	2~3
F	Coilthickness	1.3 Max

2.ELECTRICAL DATA

PART	Specification	Test condition	Testing instrument	Principle of electrical apparatus
L (S-F)	6.6μH±10%	100KHZ&1.0V		
Q (S-F)	NA	NA		
DCR (S-F)	200mΩMax	25℃		

3.WINDING DATA

Matters needing attention

WIRE	0.08mm*24P	Winding direction: CW clockwise
TURES	16T Ref	Diskettes with lead avoidance notches

4. MATERIAL LIST (材料清單)

ITEM	MATERIAL	UL NO.	SUPPLIER
Wire rod	2LOCKCS 0.08mm*24Phot air stranded wire	NA	
Tin	High temperature lead-free tin	NA	
Magnetic sheet	20.5×0.3T Notched Single-Sided Adhesive-Backed	NA	

5.發行記錄(RELEASE RECORDS)

Edition	Alterations	File Number	ISSUE DATE
A0	New regulation making	TB00789	2022-5-13

APPROVED BY	CHECKED BY	DRAWN BY	CUSTOMER P/N	
			SUN MIEN NO.	D10*19.5*0.85H-0.08*24P
			REVISION	A0
			ISSUE DATE	2022-5-13