



ShenZhen Eastong Electronic technology Co., LTD

**APPROVAL SHEET**  
**FOR**  
**BT**  
**(2.4G band internal antenna)**

<b>Issued by</b>		<b>Checked by</b>	
<b>Confirmed by</b>		<b>Date</b>	<b>2024-01-11</b>
<b>Customer Confirm</b>			

Project: BT		Author: XU xiaorong	File Name:  <b>BT-APP-RA</b>
Date: 2024-01-11			
Rev:	Language:	Check:	
A	ENG		
<b>CONFIDENTIAL</b> ShenZhen Eastong Electronic technology Co., LTD 411, No. 9, Yangmei Huancheng Middle Road, Bantian, Longgang District, Shenzhen			

Revision History

Date	Revision	Description of Changes
2024-01-11	R:A	Antenna performance approved by customer

1 SUMMARY

2 GENERAL DESCRIPTION

2.1 Definitions

3 MECHANICAL DESCRIPTION

4 ELECTRICAL PERFORMANCE

4.1 Set-up

- 4.1.1 VSWR and return loss
- 4.1.2 Efficiency, Gain and TRP/TIS
- 4.1.3 Matching Circuit Description

4.2 Measurement Data

- 4.2.1 VSWR
- 4.2.2 Active result

5 MECHANICAL DRAWING

6 CONCLUSION

试用水印

Project: BT		Author: XU xiaorong	File Name:  <b>BT-APP-RA</b>
Date: 2024-01-11			
Rev:	Language:	Check:	
A	ENG		
<div>CONFIDENTIAL</div> <div>ShenZhen Eastong Electronic technology Co., LTD</div> <div>411, No. 9, Yangmei Huancheng Middle Road, Bantian, Longgang District, Shenzhen</div>			

# 1 Summary

This report summarizes the electrical results of the proposed antenna to support the BT program. We test the antenna with the latest version handset .

## 2 General Description

### 2.1 Definitions

VSWR: Voltage Standing Wave Rate

## 3 Mechanical Description

## 4 Electrical Performance

### 4.1 Set-up

#### 4.1.1 VSWR and return loss

VSWR measurements ( $S_{11}$ ) were performed using an Agilent E5070B Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

#### 4.1.2 Efficiency, Gain and TRP/TIS

The gain of the antenna was measured in Dong Xin's 3D anechoic chamber in Shenzhen. The chamber is capable of doing tests from 380MHz to 6GHz. Coaxial chokes on the feed cable were used to mitigate surface currents. The measurement results are calibrated using dipole standards. For TRP and TIS the chamber uses a Agilent 8960 to establish the connection with the mobile device. During TRP tests the 8960 reads the power received through the chamber probes whilst during TIS tests the 8960 transmits through the probe. All data is afterwards corrected by a calibration table.

#### 4.1.3 Matching Circuit Description

No matching.


Project: BT		Author: XU xiaorong	File Name:  <b>BT-APP-RA</b>
Date: 2024-01-11			
Rev:	Language:	Check:	
A	ENG		
<div><b>CONFIDENTIAL</b> ShenZhen Eastong Electronic technology Co., LTD 411, No. 9, Yangmei Huancheng Middle Road, Bantian, Longgang District, Shenzhen</div>			

4.2 Measurement Data

**Specification:** Single strand, wire diameter 0.6mm, total length 28mm, black, exposed welding head 1mm

Frequency:2402~2480MHz


S11:

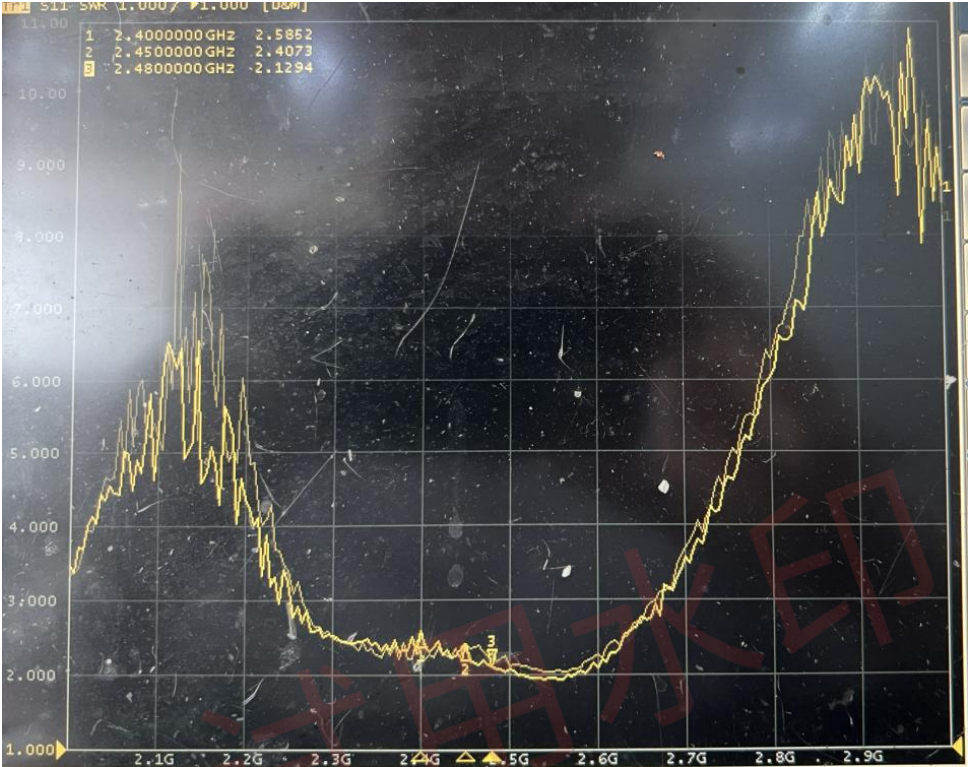

GAIN:

Test Point ID	Freq. (MHz)	TRP (dBm)	Gain (dBi)
1	2400.0	2400.00	-2.91
2	2410.0	2410.00	-2.43
3	2420.0	2420.00	-2.27
4	2430.0	2430.00	-2.12
5	2440.0	2440.00	-1.72
6	2450.0	2450.00	-1.60
7	2460.0	2460.00	-1.27
8	2470.0	2470.00	-2.46
9	2480.0	2480.00	-1.09
10	2490.0	2490.00	-0.84
11	2500.0	2500.00	0.67

Project: BT		Author: XU xiaorong	File Name:  <b>BT-APP-RA</b>
Date: 2024-01-11			
Rev:	Language:	Check:	
A	ENG		
<b>CONFIDENTIAL</b> ShenZhen Eastong Electronic technology Co., LTD 411, No. 9, Yangmei Huancheng Middle Road, Bantian, Longgang District, Shenzhen			

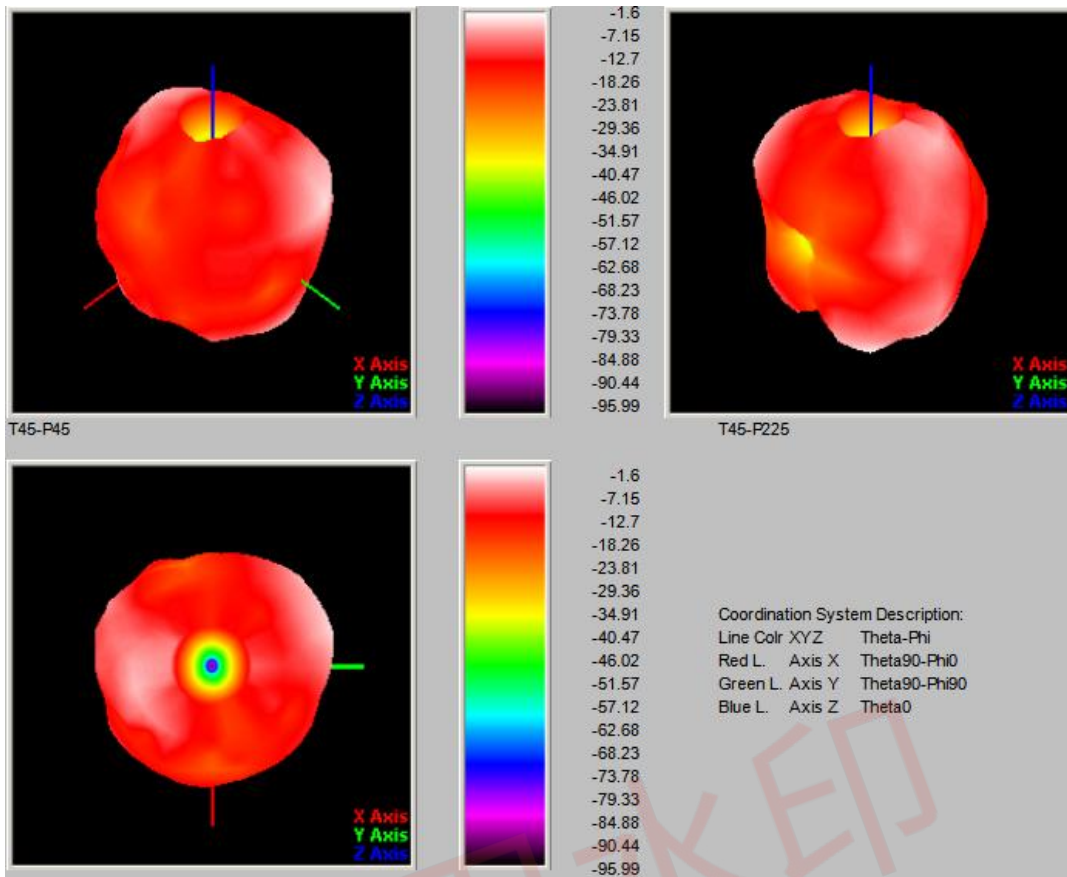

Project: BT		Author: XU xiaorong	File Name:  <b>BT-APP-RA</b>
Date: 2024-01-11			
Rev:	Language:	Check:	
A	ENG		
<b>CONFIDENTIAL</b>			
ShenZhen Eastong Electronic technology Co., LTD			
411, No. 9, Yangmei Huancheng Middle Road, Bantian, Longgang District, Shenzhen			

Technical drawing of a vertical rectangular plate. A horizontal dimension line at the top indicates a width of  $28 \pm 2.0$  mm. The plate has a small rectangular protrusion at the bottom left corner.

 $28 \pm 2.0$ 

0.6

1. The size marked with \* is the key size, and the tolerance not noted is according to the drawing

Project: BT		Author: XU xiorong	File Name:  <b>BT-APP-RA</b>
Date: 2024-01-11			
Rev:	Language:	Check:	
A	ENG		
<div><b>CONFIDENTIAL</b></div> <div>ShenZhen Eastong Electronic technology Co., LTD</div> <div>411, No. 9, Yangmei Huancheng Middle Road, Bantian, Longgang District, Shenzhen</div>			