


# Dual Band Internal PCB Omni Antenna (2.4-2.484 GHz & 5.18-5.850 GHz)

HFDBD-PBPCANT-3-5-0.110

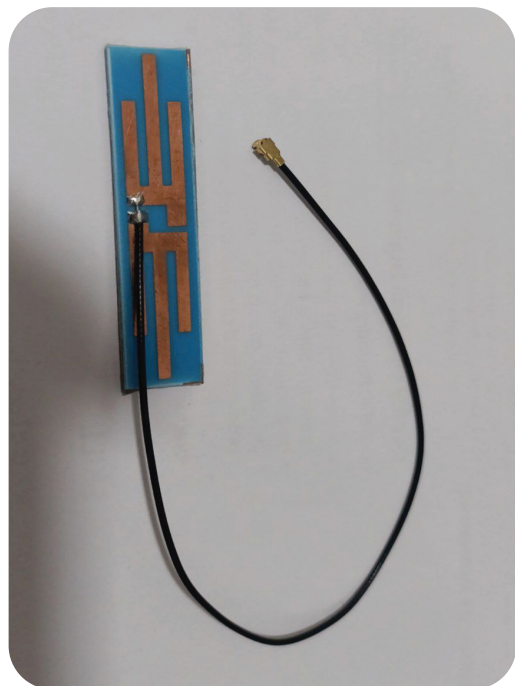

## Electrical Parameters


Frequency (MHz)	2400 - 2484	5180 - 5850
Gain (dBi)	3.5±0.5	5±0.5
VSWR (Typ)	1.5:1	1.5:1
VSWR (Max)	2.0:1	2.0:1
H Plane BW (°)	360	360
E Plane BW (°)	70 ± 5	70 ± 5
Polarization	Linear	
Max. Power Input (Watts)	10	
Impedance (Ω)	50	
Cable & Connector Termination	110 (+2mm tolerance) 1.37 mm cable UFL Female Connector	

## Environmental Parameters

Temperature Range (°C) ( - ) 40 to ( + ) 70

## Mechanical Parameters

Dimension (mm)	55 X 12 X 0.8 (T)
Gross Weight (Grams)	5±2
Fixing Method	3M VHB 4941

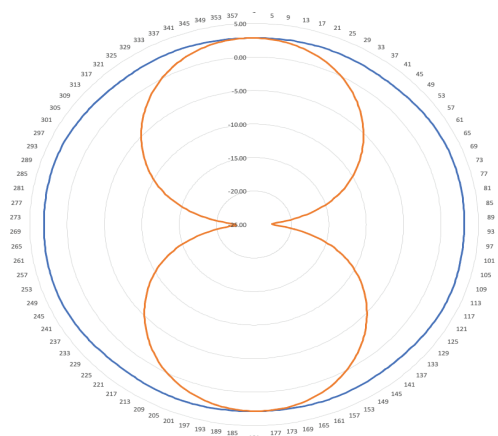

Release date : 05/05/2023 Version : 1.0

Email: [iosupport@hfcl.com](mailto:iosupport@hfcl.com) | Website: [hfcl.com](http://hfcl.com) | [io.hfcl.com](http://io.hfcl.com)  
8, Commercial Complex, Masjid Moth Greater Kailash-II, New Delhi-110048

# Dual Band Internal PCB Omni Antenna (2.4-2.484 GHz & 5.18-5.850 GHz)

**HFDBD-PBPCANT-3-5-0.110**

