

FCC Test Report

Report No.: AGC00408210801FE02

FCC ID : 2A3DR-G1

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: 5G Smart phone

BRAND NAME : AGM

MODEL NAME : Glory G1, Glory G1 SE, Glory G1 PRO

APPLICANT : AGM Mobile Limited

DATE OF ISSUE : Oct. 20, 2021

STANDARD(S) : FCC Part 22H & 24E& 27L Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.





Page 2 of 80

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct. 20, 2021	Valid	Initial Release

Page 3 of 80

TABLE OF CONTENTS

1. GENERAL INFORMATION	
2. PRODUCT INFORMATION	6
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	8
2.3 TEST METHODOLOGY	8
2.4 DEVICE CAPABILITIES	3
2.5 SPECIAL ACCESSORIES	8
2.6 EQUIPMENT MODIFICATIONS	9
2.7 EMISSION DESIGNATOR	9
3. TEST ENVIRONMENT	10
3.1 ADDRESS OF THE TEST LABORATORY	10
3.2 TEST FACILITY	10
3.3 ENVIRONMENTAL CONDITIONS	11
3.4 MEASUREMENT UNCERTAINTY	11
3.5 LIST OF TEST EQUIPMENT	12
4. SYSTEM TEST CONFIGURATION	14
4.1 EUT CONFIGURATION	14
4.2 EUT EXERCISE	14
4.3 CONFIGURATION OF EUT SYSTEM	14
4.4 EQUIPMENT USED IN TESTED SYSTEM	14
5. SUMMARY OF TEST RESULTS	15
5.1 TEST CONDITION : CONDUCTED TEST	15
5.2 TEST CONDITION : RADIATED TEST	15
6. DESCRIPTION OF TEST MODES	
7. CONDUCTED OUTPUT POWER	18
7.1 MEASUREMENT OVERVIEW	18
7.2 MEASUREMENT METHOD	
7.3 MEASUREMENT SETUP	18
7.4 MEASUREMENT RESULT	19
8. RADIATED OUTPUT POWER	
8.1 MEASUREMENT OVERVIEW	22
8.2 MEASUREMENT METHOD	22
8.3 MEASUREMENT SETUP	
8.4 MEASUREMENT RESULT	
9. PEAK-TO-AVERAGE RATIO	27



Report No.: AGC00408210801FE02 Page 4 of 80

9.1 PROVISIONS APPLICABLE	27
9.2 MEASUREMENT METHOD	27
9.3 MEASUREMENT SETUP	28
9.4 MEASUREMENT RESULT	
10. OCCUPIED BANDWIDTH	30
10.1 PROVISIONS APPLICABLE	30
10.2 MEASUREMENT METHOD	30
10.3 MEASUREMENT SETUP	30
10.4 MEASUREMENT RESULT	31
11. BAND EDGE EMISSIONS AT ANTENNA TERMINAL	37
11.1 MEASUREMENT OVERVIEW	37
11.2 MEASUREMENT METHOD	37
11.3 MEASUREMENT METHOD	
11.4 MEASUREMENT RESULT	38
12. SPURIOUS EMISSIONS AT ANTENNA TERMINAL	42
12.1 PROVISIONS APPLICABLE	42
12.2 MEASUREMENT METHOD	
12.3 MEASUREMENT SETUP	42
12.4 MEASUREMENT RESULT	43
13. RADIATED SPURIOUS EMISSION	54
13.1. PROVISIONS APPLICABLE	54
13.2. MEASUREMENT PROCEDURE	54
13.3. MEASUREMENT SETUP	55
12.4 MEASUREMENT RESULT	56
14. FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	66
14.1 PROVISIONS APPLICABLE	66
14.2 MEASUREMENT METHOD	66
14.3 MEASUREMENT SETUP	
13.4 MEASUREMENT RESULT	68
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	79

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

APPENDIX B: PHOTOGRAPHS OF EUT



Page 5 of 80

1. GENERAL INFORMATION

Applicant	AGM Mobile Limited	
FLAT B5, 1/F MANNING IND. BUILDING, 116-118 HOW MING STREET, KW TONG, KOWLOON, HONG KONG		
Manufacturer	Shenzhen AIJIEMO Technology Company Limited	
Address	1st Floor 101 and 2nd Floor 201, Building A2, Huafeng Century Technology Park, Nanchang Community, Xixiang, Baoan District, Shenzhen, China	
Factory	Shenzhen AlJIEMO Technology Company Limited	
Address	1st Floor 101 and 2nd Floor 201, Building A2, Huafeng Century Technology Park, Nanchang Community, Xixiang, Baoan District, Shenzhen, China	
Product Designation	5G Smart phone	
Brand Name	AGM	
Test Model	Glory G1	
Series Model	Glory G1 SE , Glory G1 PRO	
Declaration of Difference	All the same except the model name.	
Date of test	Aug. 05, 2021~Oct. 20, 2021	
Deviation	No any deviation from the test method.	
Condition of Test Sample	Normal	

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 22H, 24E and 27L. The test results of this report relate only to the tested sample identified in this report.

Reviewed By

Bibo Zhang
(Project Engineer)

Calvin Liu
(Reviewer)

Oct. 20, 2021

Calvin Liu
(Reviewer)

Oct. 20, 2021

Max Zhang
Authorized Officer

Oct. 20, 2021



Report No.: AGC00408210801FE02 Page 6 of 80

2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

A major technical description of EUT is described as following:

tinajor teorimoar accomption e					
Product Designation:	5G Smart phone				
Hardware Version:	V1.00				
Software Version:	N18804.02.01.00US	N18804.02.01.00US			
Support Networks:	GSM, GPRS, EDGE,	WCDMA, HSDPA, HSUPA	4		
	⊠GPRS 850 ⊠PCS	1900 (U.S. Bands)			
	⊠GSM 900 ⊠DCS	1800 (Non-U.S. Bands)			
Frequency Bands:	⊠UMTS FDD Band II	⊠UMTS FDD Band IV			
	⊠UMTS FDD Band V	(U.S. Bands)			
	⊠UMTS FDD Band I	⊠UMTS FDD Band VIII (I	Non-U.S. Bands)		
Town of Mandadations	GMSK,8PSK Modulat	ion For GSM/GPRS/EDGI	E		
Type of Modulation:	BPSK,QPSK Modulat	on For WCDMA/HSDPA/h	HSUPA		
	GSM/GPRS/EDGE 85	50: 824.2MHz-848.8 MHz	20		
	GSM/GPRS/EDGE 19	900: 1850.2MHz-1909.8 M	1Hz		
Frequency Range:	WCDMA Band II: 1852.4MHz-1907.6 MHz				
	WCDMA Band IV: 1712.4-1752.6 MHz				
	WCDMA Band V: 826.4-846.6 MHz				
	GSM/GPRS 850: 245KGXW				
	EDGE 850: 244KG7W				
	GSM/GPRS 1900:	GSM/GPRS 1900: 248KGXW			
Emission Designator:	EDGE 1900:	EDGE 1900: 249KG7W			
	WCDMA Band II:	4M17F9W	0		
	WCDMA Band IV:	4M18F9W	30 - 6		
	WCDMA Band V:	4M15F9W	30 .00		
Antenna Type:	PIFA Antenna	20	0		
Antenna gain:	GSM850:0.7dBi	PCS1900: 2.1dBi	-6		
7 (interina gain.	WCDMA850:0.7dBi	WCDMA1700:2.1dBi	WCDMA1900:1.8dBi		
Power Supply:	DC 3.7V by Built-in Li-	DC 3.7V by Built-in Li-ion Battery			
Battery parameter:	DC 3.7V 6200mAh				
Dual Card:	GSM /WCDMA Card S	GSM /WCDMA Card Slot			
Extreme Vol. Limits:	DC3.15V to 4.20V (Normal: DC 3.7V)				
Extreme Temp. Tolerance	-30°C to +50°C				
Operating Temp	5°C to +40°C				



Page 7 of 80

GSM/WCDMA SLOT 1:

	Maximum ERP/EIRP	Max. Average		
	(dBm)	Burst Power (dBm)		
GSM 850	29.74	30.90		
PCS 1900	27.16	28.15		
UMTS BAND V	20.65	21.47		
UMTS BAND II	18.76	19.47		
UMTS BAND IV	19.69	20.67		

GSM/WCDMA SLOT 2:

	Maximum ERP/EIRP	Max. Average		
	(dBm)	Burst Power (dBm)		
GSM 850	27.74	28.78		
PCS 1900	25.56	27.03		
UMTS BAND V	18.35	19.79		
UMTS BAND II	17.25	18.89		
UMTS BAND IV	18.11	19.29		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 8 of 80

2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2A3DR-G1**, filing to comply with the FCC Part 22H&24E&27L requirements.

2.3 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title
1	47 CFR FCC Part 2	Frequency allocations and radio treaty matters, general rules and regulations.
2	47 CFR FCC Part 22	Public Mobile Services.
3	47 CFR FCC Part 24	Personal Communications Services.
4	47 CFR FCC Part 27	Miscellaneous Wireless Communications Services.
5	47 CFR FCC Part 90	Private Land Mobile Radio Services.
6	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
7	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
8	KDB 971168	D01 v03r01 Measurement Guidance For Certification Of Licensed Digital Transmitters.

2.4 DEVICE CAPABILITIES

This device contains the following capabilities:

850/1900 GSM/GPRS/EGPRS,850/1700/1900 WCDMA/HSPA, Multi-Band LTE, 802.11 b/g/n for WLAN, 802.11 a/n/ac for UNII, Bluetooth (1X,EDR,LE),GPS and NFC.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.5 SPECIAL ACCESSORIES

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.



Page 9 of 80

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7 EMISSION DESIGNATOR

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand



Page 10 of 80

3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842



Page 11 of 80

3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS
Temperature range	15~35℃	-20℃~50℃
Humidty range	20 % to 75 %.	20 % to 75 %.
Pressure range	86-106kPa	86-106kPa
Power supply	DC 3.70V	DC3.15V or 4.20V

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 MEASUREMENT UNCERTAINTY

Test	Measurement Uncertainty	Notes	
Transmitter power conducted	±0.57 dB	(1)	
Transmitter power Radiated	±2.20 dB	(1)	
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)	
Occupied Bandwidth	±0.01ppm	(1)	
Radiated Emission 30~1000MHz	±4.10dB	(1)	
Radiated Emission Above 1GHz	±4.32dB	(1)	
Conducted Disturbance0.15~30MHz	±3.20dB	(1)	
Radio Frequency	± 6.5 x 10-8	(1)	
RF Power, Conducted	± 0.9 dB	(1)	

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Report No.: AGC00408210801FE02 Page 12 of 80

3.5 LIST OF TEST EQUIPMENT

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 11, 2021	May 10, 2022
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2021	Jun. 08, 2022
TEST RECEIVER	R&S	ESCI	10096	Apr. 14. 2021	Apr. 13. 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 07, 2020	Dec. 06, 2021
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 21, 2019	Sep. 20, 2021
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 19, 2021	Sep. 18, 2023
preamplifier	ChengYi	EMC184045S E	980508	Sep. 21, 2020	Sep. 20, 2021
preamplifier	ChengYi	EMC184045S E	980508	Sep. 19, 2021	Sep. 18, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.08, 2021	Jun.07, 2022
ANTENNA	SCHWARZBECK	VULB9168	D69250	Apr. 28, 2021	Apr. 27, 2023
SIGNAL ANALYZER	Agilent	N9020A	MY52090123	Sep. 06, 2021	Sep. 05, 2022
USB Wideband Power Sensor	Agilent	U2021XA	MY54110007	May 11, 2021	May 10, 2025
Universal Radio Communication Tester	R&S	CMU200	120237	Jun. 09, 2021	Jun. 08, 2022
Universal Radio Communication Tester	Agilent	8960	GB46200384	Aug. 18, 2021	Aug. 17, 2022
Power Splitter	Agilent	11636A	34	Jun.08, 2021	Jun.07, 2022
Attenuator	JFW	50FHC-006-5 0	N/A	Jun.08, 2021	Jun.07, 2022
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170		Sep. 21, 2019	Sep. 20, 2021
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	300	Sep. 19, 2021	Sep. 18, 2022



Report No.: AGC00408210801FE02 Page 13 of 80

		0)4/11 01 40	0			
Horn Ant	ETS	QWH_SL_18	- C	Sep. 21, 2019	Sep. 20, 2021	
(18G-40GHz)		_40_K_SG		Gop. 21, 2010	Oep. 20, 2021	
Horn Ant	FTO	QWH_SL_18		0 40 0004	0 40 0000	
(18G-40GHz)	ETS	_40_K_SG		Sep. 19, 2021	Sep. 18, 2022	
Power Splitter	Agilent	11636A	1	Sep.16, 2020	Sep.15, 2021	
Power Splitter	Agilent	11636A	1	Sep.14, 2021	Sep.13, 2022	
CMU200	R&S	120237		Jun. 09, 2021	Jun. 08, 2022	
Artificial Mains	R&S	101242		Jun. 09, 2021	Jun. 08, 2022	
Network ENV216	1100	101242		0dii. 00, 2021	Juli. 00, 2022	
Filter Bank Notch	MICRO-TRONICS	010	® /	Feb. 23, 2021	Feb. 22, 2022	
1(880-915MHz)	WILCINO-TINOINICS	010		1 60. 23, 2021	1 60. 22, 2022	
Filter Bank Notch 2	MIODO TRONICO	000		F-1- 00 0004	F-1- 00 0000	
(1710-1785MHz)	MICRO-TRONICS	009	/	Feb. 23, 2021	Feb. 22, 2022	
Filter Bank Notch 3	MICRO-TRONICS	008	1 8	Feb. 23, 2021	Feb. 22, 2022	
(1920-1980MHz)	WILCINO-1 KONICS	000		1 60. 23, 2021	1 60. 22, 2022	



Page 14 of 80

4. SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF EUT SYSTEM

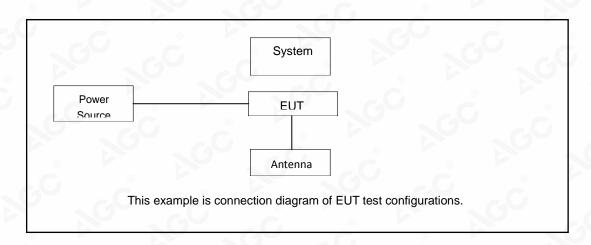


Table 2-1 Equipment Used in EUT System

4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

- ☐ Test Accessories Come From The Laboratory
- ☐ Test Accessories Come From The Manufacturer

Item	Equipment	Model No.	Identifier	Note
1	5G Smart phone	Glory G1	2A3DR-G1	EUT
2	Adapter	GS-551	Input:100-240V, 50/60Hz, 0.6A Output: 12V 1.5A	AE
3	Battery	Glory G1	DC 3.7V 6200mAh	AE
4	USB Cable	N/A	N/A	AE



Page 15 of 80

5. SUMMARY OF TEST RESULTS

5.1 TEST CONDITION: CONDUCTED TEST

Item	Test Description	FCC Rules	Result
1	Occupied Bandwidth	§2.1049	Pass
2	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal	§2.1051, §22.917(a), §24.238(a) §27.53(h)	Pass
3	Conducted Output Power	§2.1046	Pass
4	Frequency stability / variation of ambient temperature	§2.1055, § 22.355	Pass
5	Peak- to- Average Ratio	§24.232(d), §27.50(d)(5), §24.235, §27.54	Pass

5.2 TEST CONDITION: RADIATED TEST

Item	Test Description	FCC Rules	Result
1	Effective Radiated Power	§22.913(a)(5)	Pass
2	Equivalent Isotropic Radiated Power	§24.232(c), §27.50(d)(4)	Pass
3	Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a), §27.53(h)	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC00408210801FE02 Page 16 of 80

6. DESCRIPTION OF TEST MODES

		RF Channel		
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)
GSM/GPRS/	TX	Channel 128	Channel 190	Channel 251
EDGE850	(824 MHz ~ 849 MHz)	824.2 MHz	836.6 MHz	848.8 MHz
8	TX	Channel 4132	Channel 4182	Channel 4233
WCDMA band V	(824 MHz ~ 849 MHz)	826.4 MHz	836.4 MHz	846.6 MHz

Bands	Tx/Rx Frequency	RF Channel			
Burido		Low(L)	Middle(M)	High(H)	
GSM/GPRS/	TX	Channel 512	Channel 661	Channel 810	
EDGE1900	(1850 MHz-1910 MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz	
100 c	ТХ	Channel 9262	Channel 9400	Channel 9538	
WCDMA Band II	(1850 MHz-1910 MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz	

			RF Channel	hannel	
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)	
8	TX	Channel 1312	Channel 1412	Channel 1513	
WCDMA Band IV	(1710 MHz-1755 MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz	

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
	GSM (GMSK, 1Tx-slot) Link	GSM (GMSK,1Tx-slot) Link
GSM/GPRS/	GPRS (GMSK, 1Tx-slot) Link	GPRS (GMSK, 1Tx-slot) Link
EDGE 850/1900	EDGE (8PSK, 1Tx-slot) Link	EDGE (8PSK, 1Tx-slot) Link
WCDMA Band II/IV/V	RMC 12.2kbps Link	RMC 12.2kbps Link

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 17 of 80

he test results

ACCORDING TO 3GPP 25.101 SUB-CLAUSE 6.2.2, THE MAXIMUM OUTPUT POWER IS ALLOWED TO BE REDUCED BY FOLLOWING THE TABLE.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)	
For all combinations of ,DPDCH,DPCCH	0≤ CM≤3.5	MAY(CM 1.0)	
HS-DPDCH,E-DPDCH and E-DPCCH	05 CIVIS3.5	MAX(CM-1,0)	

Note: CM=1 for $\beta / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH,

E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



Page 18 of 80

7. CONDUCTED OUTPUT POWER

7.1 PROVISIONS APPLICABLE

The conduction test is carried out in a shielded room.

According to the test, connect the device under test to the antenna port on the non-conductive platform directly to the test device for evaluation and measurement (ANSI-C63.26-2015 Clause 5.4)

7.2 MEASUREMENT METHOD

- The transmitter output port was connected to base station.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
- The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all mode (GSM/EGPRS 850, GSM/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band IV, WCDMA/HSPA band V)at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

7.3 MEASUREMENT SETUP






Page 19 of 80

7.4 MEASUREMENT RESULT

GSM 850 Maximum Average Power (dBm)					
Channel	128	190	251		
Frequency(MHz)	824.2 MHz	836.6 MHz	848.8 MHz		
GSM (GMSK, 1Tx-slot)	30.90	29.11	30.23		
GPRS (GMSK, 1Tx-slot)	30.87	29.07	29.42		
GPRS (GMSK, 2Tx-slot)	29.60	28.89	28.99		
GPRS (GMSK, 3Tx-slot)	28.45	28.68	28.71		
GPRS (GMSK, 4Tx-slot)	27.25	27.19	27.20		
EDGE (8PSK, 1Tx-slot)	24.60	23.06	23.99		
EDGE (8PSK, 2Tx-slot)	23.01	23.12	23.06		
EDGE (8PSK, 3Tx-slot)	22.10	22.25	22.05		
EDGE (8PSK, 4Tx-slot)	21.63	21.42	21.38		


PCS 1900 Maximum Average Power (dBm)					
Channel 512 661 810					
Frequency(MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz		
GSM (GMSK, 1Tx-slot)	26.15	24.91	26.00		
GPRS (GMSK, 1Tx-slot)	25.99	26.03	25.86		
GPRS (GMSK, 2Tx-slot)	24.45	24.52	24.36		
GPRS (GMSK, 3Tx-slot)	23.53	23.71	23.62		
GPRS (GMSK, 4Tx-slot)	22.58	22.57	22.56		
EDGE (8PSK, 1Tx-slot)	22.84	23.21	23.27		
EDGE (8PSK, 2Tx-slot)	21.35	21.22	21.32		
EDGE (8PSK, 3Tx-slot)	20.92	20.76	20.08		
EDGE (8PSK, 4Tx-slot)	18.46	18.36	18.59		





	WCDMA Band II Ma	ximum Average Power (dBm)			
Channel 9262 9400 9538					
Frequency(MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz		
RMC 12.2kbps	19.39	19.47	19.25		
HSDPA Subtest-1	17.91	17.64	17.75		
HSDPA Subtest-2	17.00	16.94	16.99		
HSDPA Subtest-3	16.68	16.87	16.89		
HSDPA Subtest-4	16.60	17.16	16.97		
HSUPA Subtest-1	16.55	17.24	17.47		
HSUPA Subtest-2	14.55	15.29	15.50		
HSUPA Subtest-3	15.48	16.25	16.48		
HSUPA Subtest-4	14.48	15.26	15.47		
HSUPA Subtest-5	13.98	14.64	15.01		

WCDMA Band IV Maximum Average Power (dBm)					
Channel	1312	1412	1513		
Frequency(MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz		
RMC 12.2kbps	20.67	19.37	19.17		
HSDPA Subtest-1	19.56	18.28	18.10		
HSDPA Subtest-2	19.16	17.51	17.63		
HSDPA Subtest-3	18.70	17.44	17.26		
HSDPA Subtest-4	18.68	16.81	17.26		
HSUPA Subtest-1	18.00	17.07	17.31		
HSUPA Subtest-2	18.14	17.15	17.49		
HSUPA Subtest-3	18.96	18.13	18.37		
HSUPA Subtest-4	17.50	16.60	16.94		
HSUPA Subtest-5	18.99	18.22	18.53		





	WCDMA Band V Ma	ximum Average Power (dBm)
Channel	4132	4182	4233
Frequency(MHz)	826.4 MHz	836.4 MHz	846.6 MHz
RMC 12.2kbps	22.97	22.41	22.65
HSDPA Subtest-1	22.01	21.42	21.73
HSDPA Subtest-2	21.31	20.67	21.05
HSDPA Subtest-3	21.24	20.61	20.94
HSDPA Subtest-4	21.26	20.51	20.90
HSUPA Subtest-1	18.40	17.99	18.53
HSUPA Subtest-2	18.38	18.02	18.58
HSUPA Subtest-3	19.46	19.05	19.60
HSUPA Subtest-4	17.89	17.47	18.04
HSUPA Subtest-5	19.36	18.96	19.48



Page 22 of 80

8. RADIATED OUTPUT POWER

8.1 PROVISIONS APPLICABLE

The radiation test is carried out in a semi-anechoic chamber.

According to the test, put the device under test on a non-conductive platform 3 meters away from the receiving antenna (ANSI/TIA-603-E-2016 Article 2.2.17).

The following rules are for the maximum radiated power limit requirements of the product:

Mode	Nominal Peak Power
GSM 850	< 7 Watts max. ERP (38.45dBm)
PCS 1900	< 2 Watts max. EIRP (33dBm)
WCDMA Band II	< 2 Watts max. EIRP (33dBm)
WCDMA Band IV	< 1 Watts max. EIRP (30dBm)
WCDMA Band V	< 7 Watts max. ERP (38.45dBm)

8.2 MEASUREMENT METHOD

- 1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
- 2. RBW = 1 5% of the expected OBW, not to exceed 1MHz
- 3. VBW ≥ 3 x RBW
- 4. Span = 1.5 times the OBW
- 5. No. of sweep points > 2 x span / RBW
- 6. Detector = RMS
- 7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
- 8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
- 9. Trace mode = trace averaging (RMS) over 100 sweeps
- 10. The trace was allowed to stabilize.



Page 23 of 80

Radiation Construction Method:

- 1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
- 2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.


The power is calculated by the following formula:


Where: Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.

- 3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
- 4. The EUT was tested in three orthogonal planes (X, Y, Z) and in all possible test configurations and positioning.
- 5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.


8.3 MEASUREMENT SETUP

Radiated Power 30MHz to 1GHz Test setup

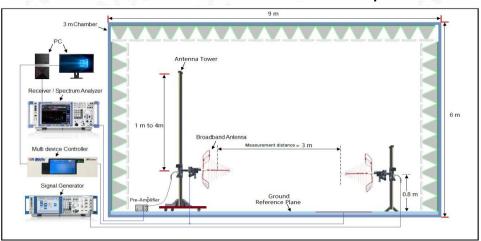







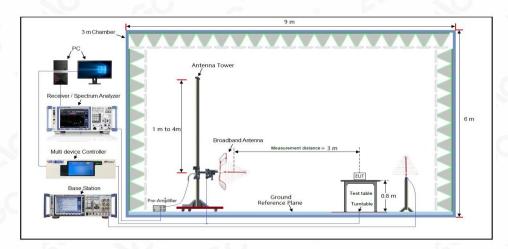

Radiated Power Above 1GHz Test setup

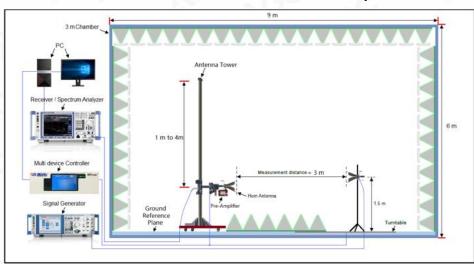

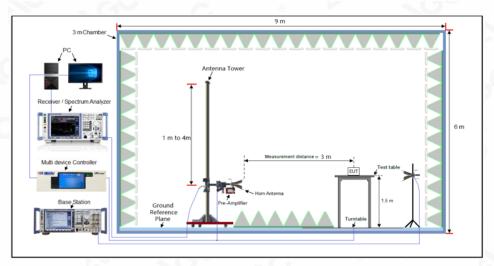



Page 25 of 80

8.4 MEASUREMENT RESULT

	Ch./ Freq.		Substitute	Ant.			Limit	El	RP
Mode	channel	Freq. (MHz)	LEVEL (dBm)	Gain (dBd)	C.L	Pol.	w	w	dBm
~GC	128	824.2	34.43	5.9	1.21	Н		0.942	29.74
GSM850	190	836.6	34.04	5.9	1.22	Н	\ G	0.863	29.36
- C	251	848.8	34.17	5.9	1.25	Н		0.895	29.52
	128	824.2	27.55	5.9	1.21	Н		0.193	22.86
EDGE	190	836.6	27.20	5.9	1.22	Н		0.179	22.52
- 60	251	848.8	27.51	5.9	1.25	Н		0.193	22.86
	4132	826.4	25.16	5.9	1.21	Н	< 7.00	0.111	20.47
WCDMA850	4183	836.6	25.26	5.9	1.25	Н	8	0.115	20.61
	4233	846.6	25.31	5.9	1.24	н		0.116	20.65
HSPA	4132	826.4	23.16	5.9	1.21	Н	10	0.070	18.47
	4183	836.6	23.56	5.9	1.25	Н	®	0.078	18.91
	4233	846.6	23.32	5.9	1.24	Н	GO	0.073	18.66

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Mode	Ch./ Freq.		Substitute	Ant.			Limit	EIRP	
	channel	Freq. (MHz)	LEVEL (dBm)	Gain (dBi)	C.L	Pol.	w	W	dBm
< GC	512	1850.2	33.54	8.6	2.11	Н		0.507	27.05
PCS1900	661	1880.0	33.61	8.6	2.15	Н	\ G	0.520	27.16
. Ĉ	810	1909.8	33.44	8.6	2.15	Н		0.500	26.99
	512	1850.2	29.74	8.6	2.11	Н		0.211	23.25
EDGE	661	1880.0	29.78	8.6	2.15	Н	< 2.00	0.215	23.33
	810	1909.8	29.61	8.6	2.15	Н		0.207	23.16
	9262	1852.4	25.23	8.6	2.11	Н		0.075	18.74
WCDMA 1900	9400	1880.0	25.01	8.6	2.15	Н		0.072	18.56
1900	9538	1907.6	25.21	8.6	2.15	н		0.075	18.76
®	9262	1852.4	24.89	8.6	2.11	Н		0.069	18.40
HSPA	9400	1880.0	24.78	8.6	2.15	Н		0.068	18.33
	9538	1907.6	24.61	8.6	2.15	Н		0.065	18.16
	1312	1712.4	25.81	8.3	2.05	н		0.090	19.56
WCDMA 1700	1412	1732.4	25.94	8.3	2.05	Н	< 1.00	0.093	19.69
1700	1513	1752.6	25.71	8.3	2.06	Н		0.089	19.47
a.G	1312	1712.4	23.48	8.3	2.05	Н		0.053	17.23
HSPA	1412	1732.4	23.44	8.3	2.05	Н		0.052	17.19
0	1513	1752.6	23.49	8.3	2.06	Н		0.053	17.25

Note:1._EIRP/ERP = Substitute LEVEL (dBm) + Ant. Gain – C.L (Cable Loss)

2. All polarizations and modes have been tested, only the worst mode is recorded in the report



Report No.: AGC00408210801FE02 Page 27 of 80

9. PEAK-TO-AVERAGE RATIO

9.1 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

9.2 MEASUREMENT METHOD

① CCDF Procedure for PAPR:

- 1. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- 2. Set the number of counts to a value that stabilizes the measured CCDF curve;
- 3. Set the measurement interval as follows:
- -for continuous transmissions, set to 1 ms,
- -or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time
 - that is less than or equal to the burst duration.
- 4. Record the maximum PAPR level associated with a probability of 0.1%.

2 Alternate Procedure for PAPR:

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as PPk. Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and recordas PAvg. Determine the P.A.R. from:


P.A.R(dB) = PPk (dBm) – PAvg (dBm) (PAvg = Average Power + Duty cycle Factor) Allow trace to fully stabilize.

Use the peak marker function to determine the peak amplitude level.

Test Settings(Peak Power):

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW \geq 3 × RBW.

- 1. Set the RBW ≥ OBW.
- 2. Set VBW ≥ 3 × RBW.
- 3. Set span ≥ 2 × OBW.





- 4. Sweep time ≥ 10 × (number of points in sweep) × (transmission symbol period).
- 5. Detector = peak.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

- 1. Set span to $2 \times$ to $3 \times$ the OBW.
- 2. Set RBW ≥ OBW.
- 3. Set VBW ≥ 3 × RBW.
- 4. Set number of measurement points in sweep ≥ 2 × span / RBW.
- 5. Sweep time: Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
- 6. Detector = power averaging (rms).
- 7. Set sweep trigger to "free run."
- 8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. Add [10 log (1/duty cycle)] to the measured maximum power level to compute the average power during continuous transmission. For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is a constant 25%.

9.3 MEASUREMENT SETUP





Page 29 of 80

9.4 MEASUREMENT RESULT

Bands	Modulation	Peak-to	o-average rat	Limit	Result	
Danus	Wiodulation	Lowest	Middle	Highest	(dB)	Result
0014.050	GSM	2.63	2.64	2.63	13	Pass
GSM 850	EDGE	5.69	5.71	5.68	13	Pass
DCC 4000	GSM	2.66	2.66	2.65	13	Pass
PCS 1900	EDGE	5.26	5.21	5.73	13	Pass
WCDMA Band II	RMC 12.2kbps	2.92	2.99	2.99	13	Pass
WCDMA Band II	HSUPA	4.23	4.39	4.48	13	Pass
WCDMA Band II	HSDPA	3.14	3.17	3.19	13	Pass
WCDMA Band IV	RMC 12.2kbps	5.55	5.35	5.29	13	Pass
WCDMA Band IV	HSUPA	6.22	6.44	6.03	13	Pass
WCDMA Band IV	HSDPA	6.36	6.77	6.37	13	Pass
WCDMA Band V	RMC 12.2kbps	2.92	3.08	2.99	13	Pass
WCDMA Band V	HSUPA	4.40	4.41	4.33	13	Pass
WCDMA Band V	HSDPA	3.23	3.24	3.11	13	Pass



Page 30 of 80

10. OCCUPIED BANDWIDTH

10.1 PROVISIONS APPLICABLE

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission. The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

10.2 MEASUREMENT METHOD

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ $3 \times RBW$
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7

10.3 MEASUREMENT SETUP





Page 31 of 80

10.4 MEASUREMENT RESULT

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHz)	Emission Bandwidth (KHz)	Verdict
GSM 850 EDGE		LCH	243.7	316	PASS
	GSM	MCH	244.6	313	PASS
		HCH	240.7	314	PASS
	0	LCH	243.6	305	PASS
	EDGE	MCH	240.8	301	PASS
		HCH	239.9	296	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHz)	Emission Bandwidth (KHz)	Verdict
-60		LCH	247.7	321	PASS
	GSM	MCH	243.8	311	PASS
DCC 1000		HCH	242.3	312	PASS
PCS 1900 EDGE	-30	LCH	249.0	313	PASS
	EDGE	MCH	247.9	319	PASS
		НСН	248.1	315	PASS




Report No.: AGC00408210801FE02 Page 32 of 80


Test Band Test Mo	Toot Mode	est Mode Test Channel	Occupied Bandwidth	Emission Bandwidth	\/ordiot
	Test Mode		(KHz)	(KHz)	Verdict
NA/ODNAA	WCDMA UMTS	LCH	4146.9	4723	PASS
		MCH	4149.2	4719	PASS
850	O	HCH	4130.0	4706	PASS


Test Band	Test Mode	Test Channel	Occupied Bandwidth	Emission Bandwidth	Vardiat
			(KHz)	(KHz)	Verdict
WCDMA 1900	UMTS	LCH	4166.3	4751	PASS
		MCH	4162.2	4727	PASS
		HCH	4154.9	4755	PASS

Test Band Test Mode	Toot Mode	Toot Channal	Occupied Bandwidth	Emission Bandwidth	Verdict
	Test Channel	(KHz)	(KHz)	verdict	
WCDMA 1700 UMTS		LCH	4162.7	4747	PASS
	MCH	4162.0	4746	PASS	
	30	HCH	4176.9	4740	PASS






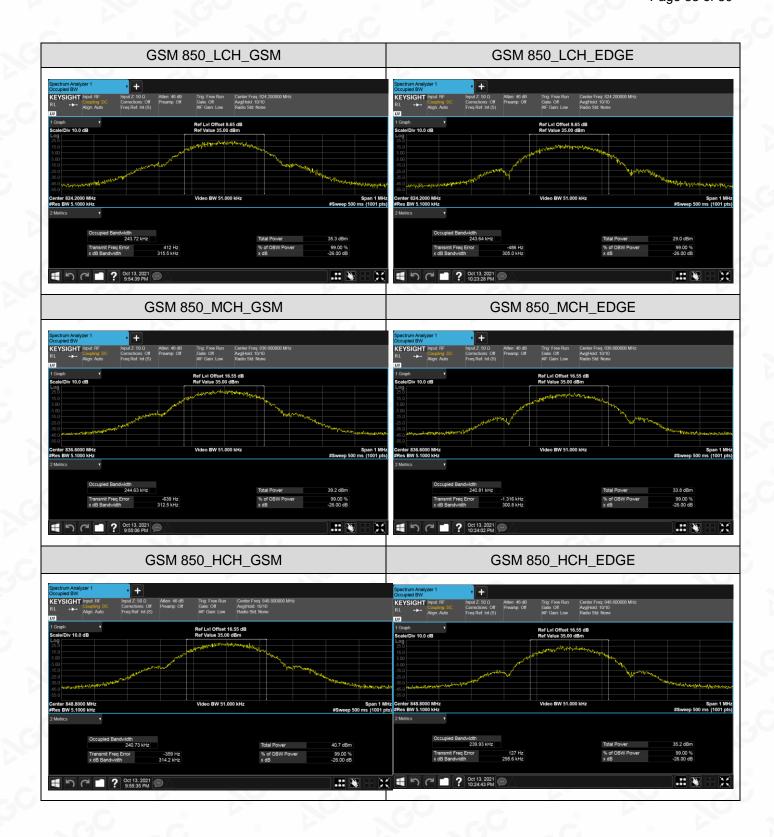







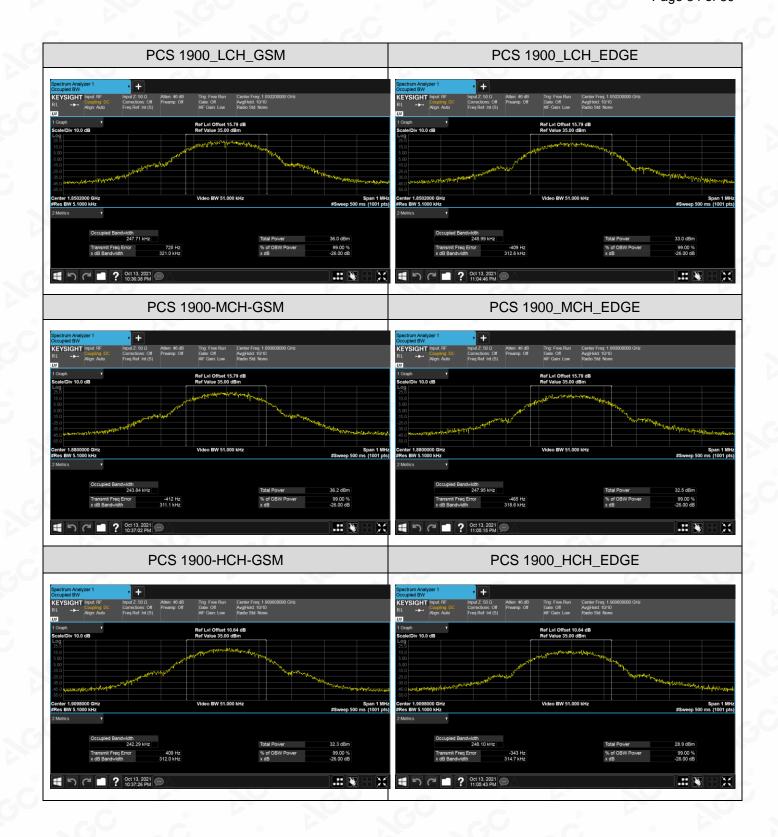


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Feating/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






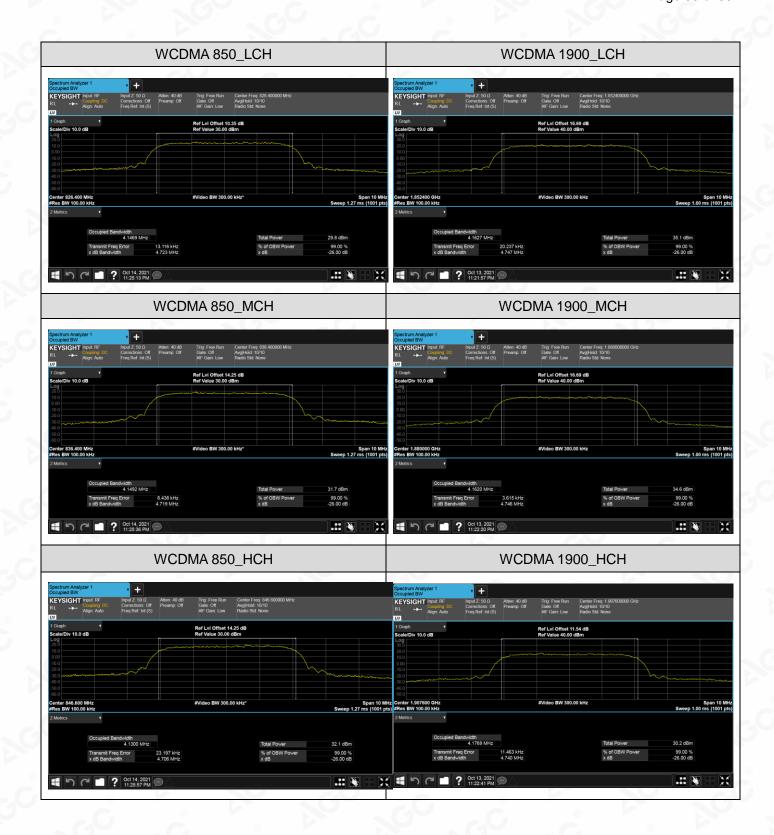



The test results



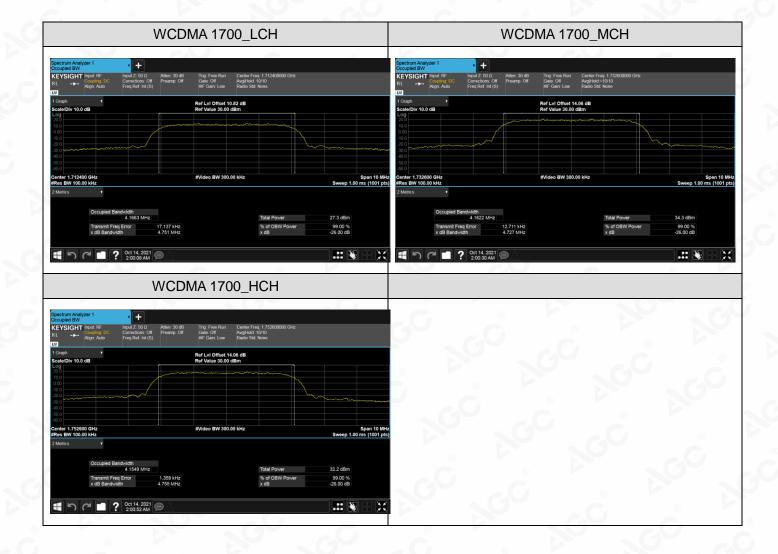

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 37 of 80

11. BAND EDGE EMISSIONS AT ANTENNA TERMINAL

11.1 MEASUREMENT OVERVIEW

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

11.2 MEASUREMENT METHOD


- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- 4. $VBW > 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

TEST NOTE

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. All measurements were done at 2 channels(low and high operational frequency range.) The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

11.3 MEASUREMENT METHOD







11.4 MEASUREMENT RESULT

