



Engineering and Testing for EMC and Safety Compliance

## APPLICATION CERTIFICATION FOR A FRS DEVICE

Maxon Telecom Ltd  
459-23 Kasan-Dong  
Kumchon-Ku, Seoul / Korea

MODEL: UBZ-GR14

FCC ID: AWWUBZGR14

*June 27, 2001*

STANDARDS REFERENCED FOR THIS REPORT	
PART 2; 1999	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15; 1999	RADIO FREQUENCIES DEVICES
PART 95; 1998	PERSONAL RADIO SERVICES
OET BULLETIN No. 43; 1994	PEAK ENVELOPE POWER AND OUTPUT LIMITING IN THE CITIZENS BAND (CB) RADIO SERVICE
ANSI C63.4-1992	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
ANSI/TIA/EIA 603-1; 1998	ADDENDUM TO ANSI/TIA/EIA 603-1992
RSS-210; Issue 5; Draft 3	LOW POWER LICENCE-EXEMPT RADIOCOMMUNICATION DEVICES (ALL FREQUENCY BANDS)
RSS-102; Issue 1; 1999	EVALUATION PROCEDURE FOR MOBILE AND PORTABLE RADIO TRANSMITTERS WITH RESPECT TO HEALTH CANADA'S SAFETY CODE 6 FOR EXPOSURE OF HUMANS TO RADIO FREQUENCY FIELDS

FREQUENCY RANGE MHZ	OUTPUT POWER (W) ERP	FREQUENCY TOLERANCE	EMISSION DESIGNATOR
462.5625-467.7125	0.243	0.00025%	11K0F3E

**REPORT PREPARED BY:**

EMI Technician: Daniel Baltzell  
Administrative Writer: Melissa Fleming

**Rhein Tech Laboratories, Inc.**

*Document Number: 2001153*

*No part of this report may be reproduced without the full written approval of Rhein Tech Laboratories, Inc.*

360 Herndon Parkway, Suite 1400  
Herndon, VA 20170  
Phone: 703-689-0368; Fax: 703-689-2056; Metro: 703-471-6441



## Table of Contents

<b>1</b>	<b>GENERAL INFORMATION.....</b>	<b>4</b>
1.1	MODIFICATIONS.....	4
1.2	RELATED SUBMITTAL(S)/GRANT(S).....	4
1.3	TEST METHODOLOGY .....	4
1.4	TEST FACILITY .....	4
<b>2</b>	<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
2.1	JUSTIFICATION .....	5
2.2	EXERCISING THE EUT.....	5
2.3	POWER CAPABILITY .....	5
<b>3</b>	<b>CONFORMANCE STATEMENT .....</b>	<b>6</b>
<b>4</b>	<b>EMISSIONS EQUIPMENT LIST .....</b>	<b>7</b>
<b>5</b>	<b>CONDUCTED EMISSIONS.....</b>	<b>9</b>
<b>6</b>	<b>RADIATED EMISSIONS MEASUREMENTS .....</b>	<b>9</b>
<b>7</b>	<b>FCC PART 2.202: NECESSARY BANDWIDTH AND EMISSION BANDWIDTH.....</b>	<b>10</b>
7.1	PART 2 §2.1046 RF POWER OUTPUT .....	11
7.1.1	Effective Radiated Power .....	11
7.1.2	§15.109: Radiated Emissions: (Receiver/Digital) .....	11
<b>8</b>	<b>PART 2 §2.1047 MODULATION CHARACTERISTICS .....</b>	<b>12</b>
8.1	§95.637: MODULATION STANDARDS .....	12
<b>9</b>	<b>PART 2 §2.1049 MEASUREMENTS REQUIRED: OCCUPIED BANDWIDTH .....</b>	<b>16</b>
9.1	§95.633: EMISSION BANDWIDTH .....	16
<b>10</b>	<b>PART 2 §2.1051 AND §2.1053: SPURIOUS EMISSIONS .....</b>	<b>18</b>
10.1	§95.635: UNWANTED RADIATION .....	18
10.2	RADIATED SPURIOUS EMISSIONS .....	18
<b>11</b>	<b>PART 2 §2.1055 MEASUREMENTS REQUIRED: FREQUENCY STABILITY .....</b>	<b>19</b>
11.1	§95.625: FREQUENCY TOLERANCE .....	19
11.2	TEST PROCEDURE .....	19
11.3	TEMPERATURE FREQUENCY STABILITY.....	19
11.4	VOLTAGE FREQUENCY STABILITY .....	20
<b>12</b>	<b>§95.627: FRS UNIT CHANNEL FREQUENCIES.....</b>	<b>21</b>
12.1	TEST DATA .....	21
<b>13</b>	<b>§95.655: FREQUENCY CAPABILITY .....</b>	<b>22</b>
<b>14</b>	<b>PRODUCT DESCRIPTION .....</b>	<b>24</b>
<b>15</b>	<b>LABEL INFORMATION.....</b>	<b>27</b>
15.1	FCC ID LABEL.....	27
15.2	LOCATION OF LABEL ON EUT .....	27
<b>16</b>	<b>MANUAL .....</b>	<b>28</b>
<b>17</b>	<b>BILL OF MATERIALS .....</b>	<b>29</b>
<b>18</b>	<b>SCHEMATICS.....</b>	<b>33</b>



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

19	BLOCK DIAGRAM .....	34
20	TEST CONFIGURATION PHOTOGRAPHS .....	35
20.1	RADIATED CONFIGURATION PHOTOGRAPHS .....	35
21	EXTERNAL PHOTOGRAPHS.....	36
22	INTERNAL PHOTOGRAPHS.....	42



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 1 GENERAL INFORMATION

The following Application for FCC Type Certification is prepared on behalf of **Maxon** in accordance with Part 2, and Part 15, Subparts A and B of the Federal Communications Commissions rules and regulations and Industry Canada RSS-210. The Equipment Under Test (EUT) was the **UBZ-GR14, FCC ID: AWWUBZGR14**. The test results reported in this document relate only to the item that was tested.

All measurements contained in this Application were conducted in accordance with ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 1992. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Some accessories are used to increase sensitivity and prevent overloading of the measuring instrument. These are explained in this report. Calibration checks are performed regularly on the instruments, and all accessories including the high pass filter, preamplifier and cables.

### 1.1 MODIFICATIONS

No modifications were made to the EUT during testing.

### 1.2 RELATED SUBMITTAL(S)/GRANT(S)

This is an original certification submission.

### 1.3 TEST METHODOLOGY

Radiated testing was performed according to the procedures in ANSI C63.4 1992. Radiated testing was performed at an antenna to EUT distance of 3 meters.

### 1.4 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report, submitted to and approved by the Federal Communication Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## **2 SYSTEM TEST CONFIGURATION**

### **2.1 JUSTIFICATION**

To complete the test configuration required by the FCC, the receiver's external antenna received a signal from a signal generator output connector to an antenna, the receiver indicator displayed optimal reception. The EUT's IF, local oscillators, and crystal oscillators and harmonics of each were investigated. All modes were investigated and tested including idle mode. The final radiated data was taken with the EUT locked to a set frequency.

### **2.2 EXERCISING THE EUT**

The EUT was exercised using a Hewlett Packard Signal Generator to generate a continuous wave frequency, which was received by and activated the EUT receiver portion under test.

### **2.3 POWER CAPABILITY**

The EUT cannot be increased in excess of the limit specified in the FCC Rules and Regulations §95.639



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

### 3 CONFORMANCE STATEMENT

STANDARDS REFERENCED FOR THIS REPORT	
PART 2; 1999	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15; 1999	RADIO FREQUENCIES DEVICES
PART 95; 1998	PERSONAL RADIO SERVICES
OET BULLETIN NO. 43; 1994	PEAK ENVELOPE POWER AND OUTPUT LIMITING IN THE CITIZENS BAND (CB) RADIO SERVICE
ANSI C63.4-1992	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
ANSI/TIA/EIA 603-1; 1998	ADDENDUM TO ANSI/TIA/EIA 603-1992
RSS-210; Issue 5; Draft 3	LOW POWER LICENCE-EXEMPT RADIOCOMMUNICATION DEVICES (ALL FREQUENCY BANDS)
RSS-102; Issue 1; 1999	EVALUATION PROCEDURE FOR MOBILE AND PORTABLE RADIO TRANSMITTERS WITH RESPECT TO HEALTH CANADA'S SAFETY CODE 6 FOR EXPOSURE OF HUMANS TO RADIO FREQUENCY FIELDS

FREQUENCY RANGE MHZ	OUTPUT POWER (W) ERP	FREQUENCY TOLERANCE	EMISSION DESIGNATOR
462.5625-467.7125	0.243	0.00025%	11K0F3E

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described above. Modifications were not made during testing to the equipment in order to achieve compliance with these standards.


Furthermore, there was no deviation from, additions to or exclusions from the ANSI C63.4 test methodology.

Signature: 

Date: June 27, 2001

Typed/Printed Name: Desmond A. Fraser

Position: President  
(NVLAP Signatory)

 Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 20061-0.

**Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.**



#### 4 EMISSIONS EQUIPMENT LIST

RTL Asset Number	Manufacturer	Model	Part Type	Serial Number	Calibration due date
900969	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz – 40 GHz)	2412A00414	03/23/01
900929	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz – 40 GHz)	2811A01276	03/28/01
900901	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz – 40 GHz)	3145A01599	11/02/01
900339	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz – 40 GHz)	2521A00743	03/27/01
900042	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz – 40 GHz)	2521A01032	11/05/01
900924	Amplifier Research	75A220	Amplifier (10 kHz – 220 MHz)		N/A
900933	Hewlett Packard	11975A	Power Amplifier (2 - 8 GHz)	2304A00348	11/15/01
901067	Hewlett Packard	8903B	Audio Analyzer	2303A00307	06/28/01
901055	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2545A04102	06/08/01
900926	Hewlett Packard	8753D	RF Vector Network Analyzer	3410A09659	03/28/01
901089	Hewlett Packard	HP875ET	Transmission/Reflection Network Analyzer	US39170052	N/A
900968	Hewlett Packard	8567A	Spectrum Analyzer (10 kHz – 1.5 GHz)	2602A00160	03/23/01
900903	Hewlett Packard	8567A	Spectrum Analyzer (10 kHz – 1.5 GHz)	2841A00614	11/02/01
900897	Hewlett Packard	8567A	Spectrum Analyzer (10 kHz – 1.5 GHz)	2727A00535	11/08/01
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz – 22 GHz)	3138A07771	03/27/01
900912	Hewlett Packard	8568A	RF Spectrum Analyzer (100 Hz – 1.5 GHz)	2634A02704	08/02/01
900824	Hewlett Packard	8591E	RF Spectrum Analyzer (9 KHz – 1.8 GHz)	3710A06135	11/14/01
900724	ARA	LPB-2520	Log Periodic / Biconical Antenna (25-1000 MHz)	1037	2/1/01
900725	ARA	LPB-2520	Log Periodic / Biconical Antenna (25-1000 MHz)	1036	07/12/01
900967	A.H. Systems	TDS-206/535-1 through TDS-206/535-4	Tuned Dipole set (30 – 1000 MHz)	126, 128, 129, 132	12/15/00
900154	Compliance Design	Roberts Dipole	Adjustable Elements Dipole antenna (30-1000MHz)	N/A	7/26/01
900814	Electro-Metrics	RGA-60	Double Ridges Guide Antenna (1-18 GHz)	2310	2/26/01
900081	EMCO	3146	Log-Periodic Antenna (200-1000 MHz)	1850	
900800	EMCO	3301B	Active Monopole (Rod antenna) (30 Hz – 50 MHz)	9809-4071	05/02/01
900151	Rohde and Schwarz	HFH2-Z2	Loop Antenna (9kHz-30 MHz)	82825/019	05/26/01
900791	Schaffner –Chase	CSL6112	Bilog antenna (30 MHz – 2GHz)	2099	2/22/01
901053	Schaffner –Chase	CBL6112B	Bilog Chase antenna (200 MHz – 2 GHz)	2648	05/24/01
900060	Hewlett Packard	86634B	Auxiliary Section for External Pulse Modulator	1314A02913	11/08/01
901041	ACO Pacific	511E	Sound Level Calibrator	028751	In calibration
900970	Hewlett Packard	85662A	Spectrum Analyzer Display	254211239	03/23/01
900930	Hewlett Packard	85662A	Spectrum Analyzer Display	3144A20839	03/28/01
900911	Hewlett Packard	85662A	Spectrum Analyzer Display	2542A12739	08/02/01
900902	Hewlett Packard	85662A	Spectrum Analyzer Display	2848A17585	11/02/01
900896	Hewlett Packard	85662A	Spectrum Analyzer Display	2816A16471	11/02/01
900914	Hewlett Packard	8546OA	RF Filter Section, (100 KHz to 6.5 GHz)	3330A00107	11/07/01
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	06/21/01
900059	Hewlett Packard	8660C	Signal Generator (9 KHz – 3200 MHz)	1947A02956	11/08/01
900960	Hewlett Packard	8444A	Tracking Generator (0.5 –1500MHz)	2325A07827	03/08/01
900917	Hewlett Packard	8648C	Synthesized. Signal Generator (9 KHz – 3200 MHz)	3537A01741	03/28/01



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

RTL Asset Number	Manufacturer	Model	Part Type	Serial Number	Calibration due date
900821	Hewlett Packard	33120A	15 MHz Function / Arbitrary Waveform Generator	US36029992	11/14/01
900059	Hewlett Packard	8660C	Synthesized. Signal Generator (9 kHz – 3200 MHz)	1947A02956	11/08/01
900195	Tektronix	CFG280	Function Generator (0.1 Hz – 11 MHz)	TW12167	N/A
900927	Tektronix	ASG 100	Audio Signal Generator	B03274 V2.3	N/A
900268	Taylor	5565	Hygrometer / Thermometer	N/A	09/05/01
901056	Hewlett Packard	8954A, Opt.H03	Transceiver Interface	2924A00830	06/02/01
901088	Hewlett Packard	8954A	Transceiver Interface	2146A00139	07/28/01
901082	AFJ International	AFJ LS16	LISN (9 kHz – 30 MHz)	16010020081	06/16/01
901083	AFJ International	AFJ LS16	LISN (9 kHz – 30 MHz)	16010020082	06/16/01
901084	AFJ International	AFJ LS16	LISN (9 kHz – 30 MHz)	16010020080	06/16/01
901090	Bajog electronic	4V-100/200	LISN (150 kHz – 30 MHz)	00-44-007	08/03/01
900726	Solar	7225-1	LISN	N/A	03/29/01
900727	Solar	7225-1	LISN	N/A	03/29/01
900078	Solar	7225-1	LISN	N/A	03/29/01
900077	Solar	7225-1	LISN	N/A	03/29/01
901054	Hewlett Packard	HP 3586B	Selective Level Meter	1928A01892	06/08/01
900793	Hewlett Packard	432A	Thermistor Power Meter	1848a22632	N/A
900721	Hewlett Packard	8447D	Preamplifier (0.1-1300 MHz)	2727A05397	N/A
900889	Hewlett Packard	85685A	RF Preselector for HP 8566B or 8568B (20Hz-2GHz)	3146A01309	11/14/01
900566	Amplifier Research	FP 2000	Isotropic Field Probe	20760	08/29/01
900854	Solar Electronics Co	9119-IN	RF Current Probe	972501	
900849	Solar Electronics Co	9121-IN	Injection Probe (10 MHz – 1 GHz)	953501	
900848	Solar Electronics Co	9320-IN	RF Current Probe	990521	
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 KHz – 6.5 GHz)	3325A00159	03/29/01





360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 5 CONDUCTED EMISSIONS

Conducted line emissions are not required since this device is battery operated.

## 6 RADIATED EMISSIONS MEASUREMENTS

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one meter and three meter distances, in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to insure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three-meter, open-field test site. The EUT was placed on a nonconductive turntable approximately 0.8 meters above the ground plane. The spectrum was examined from 30 MHz to 1000 MHz using a Hewlett Packard 8566B spectrum analyzer, a Hewlett Packard 85650A quasi-peak adapter, and EMCO log periodic and biconical antenna. In order to gain sensitivity, a HP8447 preamplifier was connected in series between the antenna and the input of the spectrum analyzer.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations. The spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. No video filter less than 10 times the resolution bandwidth was used. When any clock exceeds 108 MHz, the EUT was tested between 1 to 2 Gigahertz in peak mode with the resolution bandwidth set at 1 MHz as stated in ANSI C63.4. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

*Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech quality manual, section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.*



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 7 FCC PART 2.202: NECESSARY BANDWIDTH AND EMISSION BANDWIDTH

### FCC Part 95.631 and FCC 95.193:

#### FCC Part 95.631 (d): Emission Types

"An FRS unit may transmit only emission type F3E."

Type of Emission: F3E

Necessary Bandwidth and Emission Bandwidth:

12.5kHz (NB channel) :  $B_n = 10K6F3E$

Calculation:

Max modulation (M) in kHz : 3

Max deviation (D) in kHz: 2.275 (NB)

Constant factor (K) : 1

$B_n = 2xM + 2xDK$

Max deviation for CTCSS found on sub channel 19 was 2.275 kHz

Retaken Audio Frequency Response curve Max response = 3000 Hz (not to exceed 3.125 kHz.)



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 7.1 PART 2 §2.1046 RF POWER OUTPUT

### 7.1.1 EFFECTIVE RADIATED POWER

Emission Frequency (MHz)	Signal Generator Reading (dBm)	Cable Loss and TX Antenna Gain Correction (dB)	Corrected Signal Generator Level (dBm) ERP	ERP (mW)	Limit 95.639 (d) Watt
462.5625	27.6	-3.75	23.85	243	0.5
462.7125	27.6	-3.75	23.85	243	0.5
467.7125	26.4	-3.95	22.45	176	0.5


Measurement uncertainty=1.5 dB

### 7.1.2 §15.109: RADIATED EMISSIONS: (RECEIVER/DIGITAL)

Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
34.076	Qp	V	0	1.0	34.7	-11.8	22.9	40.0	-17.1
36.075	Qp	V	0	1.0	34.7	-13.0	21.7	40.0	-18.3
441.317	Qp	V	85	1.0	49.2	-11.5	37.7	46.0	-8.3
882.625	Qp	V	200	1.8	49.0	-4.9	44.1	46.0	-1.9
1323.944	Av	V	30	1.2	35.0	0.8	35.8	54.0	-18.2
1765.261	Av	V	0	1.6	39.9	4.8	44.7	54.0	-9.3

*\*All readings are quasi-peak, unless stated otherwise.*

TEST PERSONNEL:

Signature: 

Date: June 27, 2001


Typed/Printed Name: Daniel Baltzell




## 8 PART 2 §2.1047 MODULATION CHARACTERISTICS

### 8.1 §95.637: MODULATION STANDARDS

#### Modulation Limiting Positive Peak

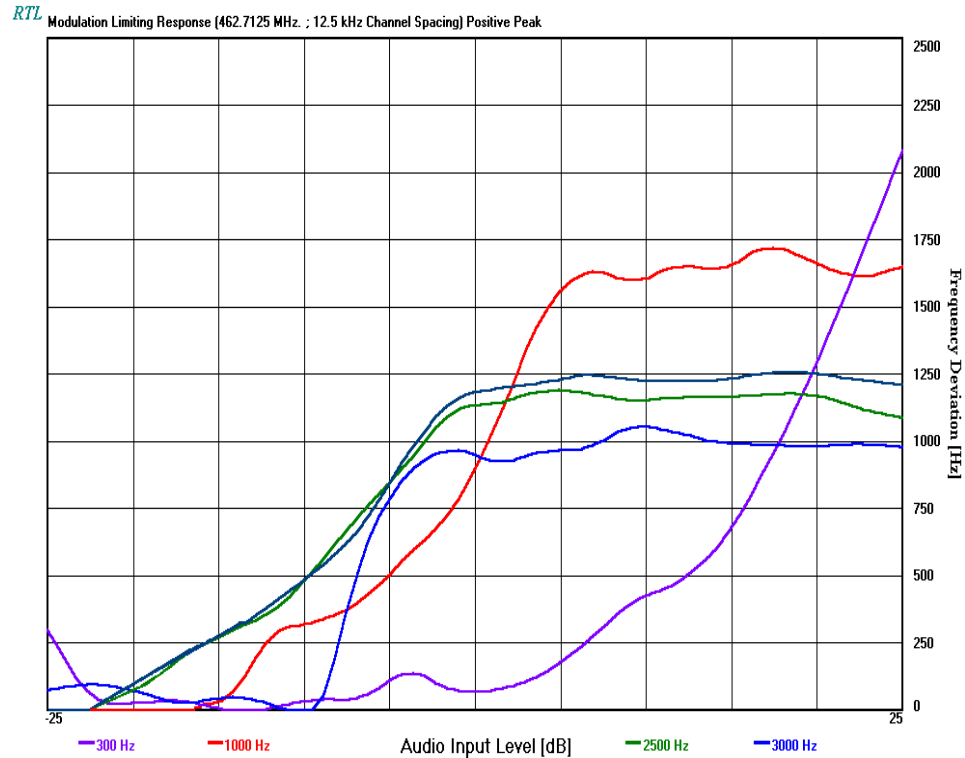


CTCSS Positive Peak (2500 Hz curve at  $-2.5 + 16 =$  approx. 1200 kHz deviation)  $1200/2500 = 0.48$

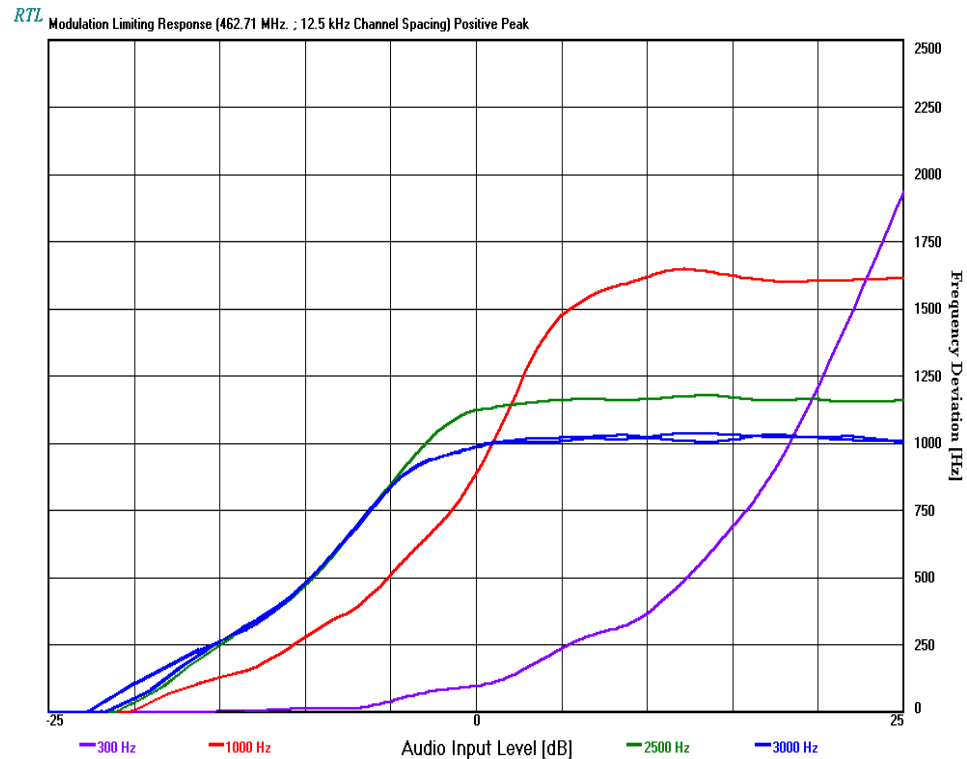


Positive Peak (2500 Hz curve at  $-3 + 16 =$  approx. 1200 kHz deviation)  $1200/2500 = 0.48$



## Modulation Limiting Negative Peak

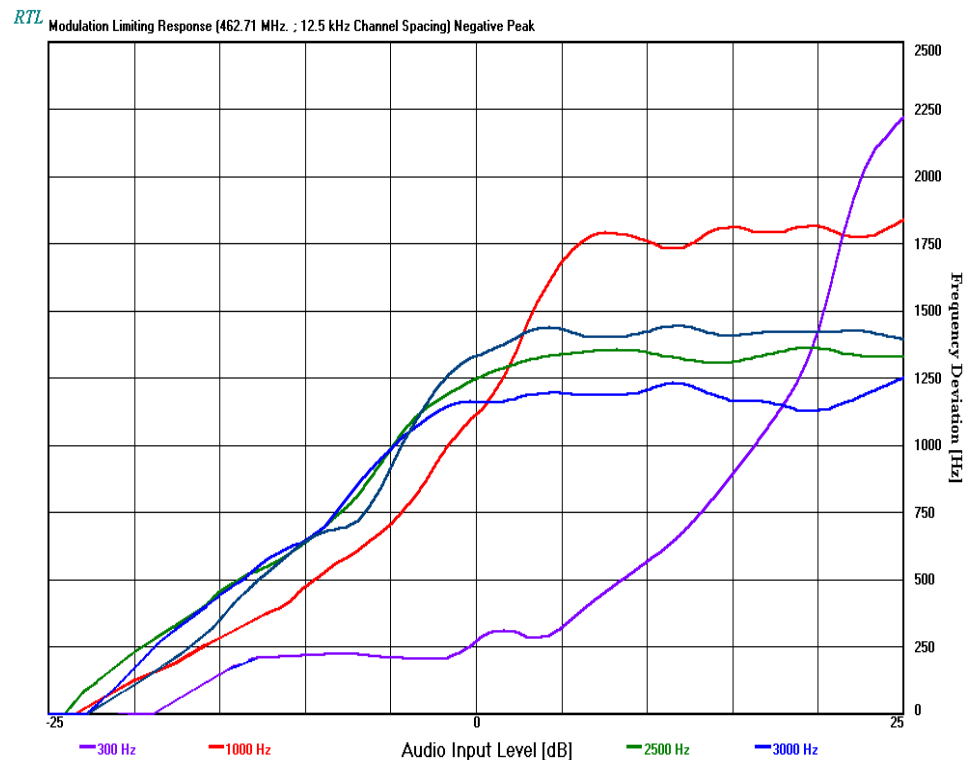

CTCSS Negative Peak (2500 Hz curve at  $-2.5 + 16 =$  approx. 1300 kHz deviation)  $1300/2500 = 0.52$

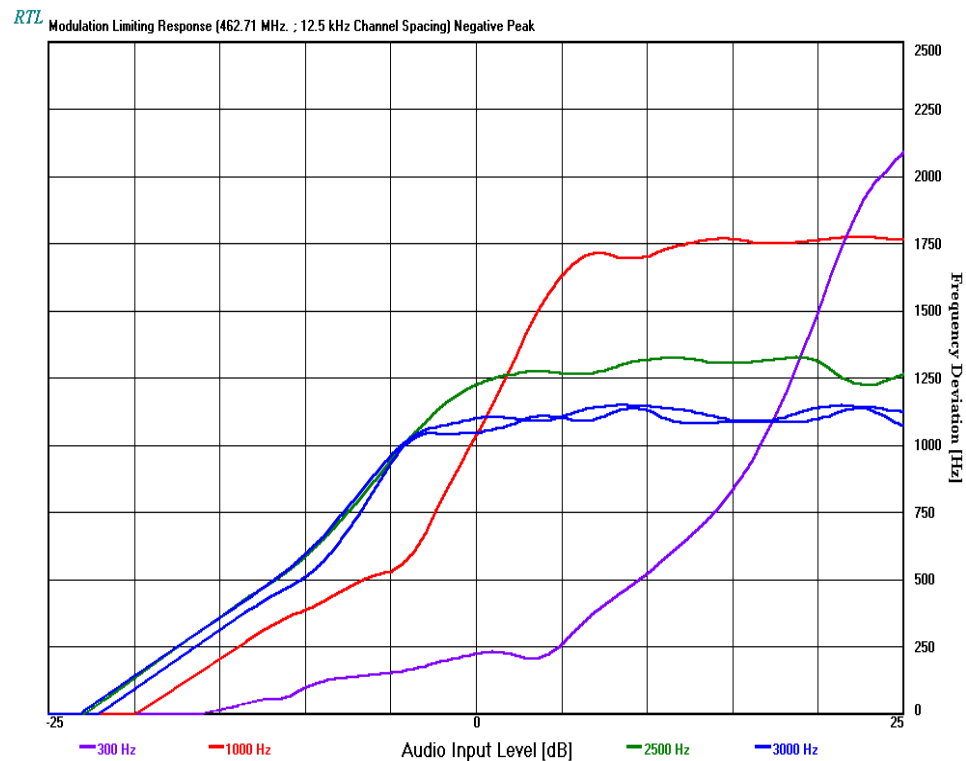

Negative Peak (2500 Hz curve at  $-3 + 16 =$  approx. 1300 kHz deviation)  $1300/2500 = 0.52$




360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 9 PART 2 §2.1049 MEASUREMENTS REQUIRED: OCCUPIED BANDWIDTH

### 9.1 §95.633: EMISSION BANDWIDTH


A 100 kHz span is used to show 25 dB, 35 dB, and  $43 + 10 \log P$  of paragraphs 95.635 (b) (1), (3), and (7) using CTCSS sub channel 19 (127.3 Hz). 100 Hz resolution and 12.5 kHz authorized bandwidth is used.

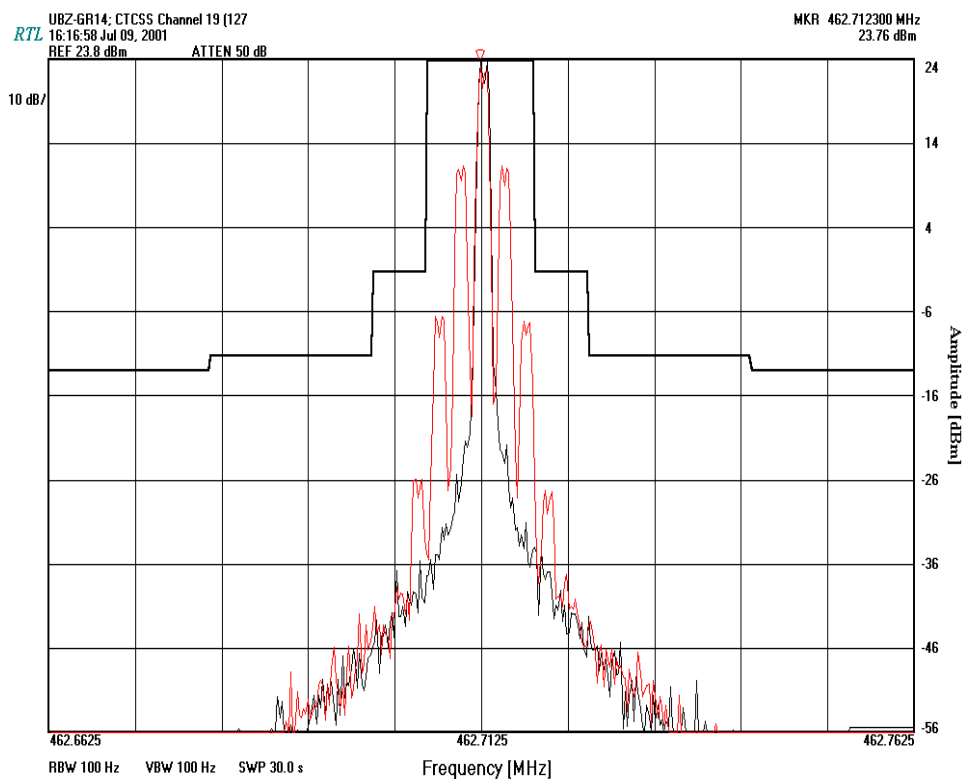





360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

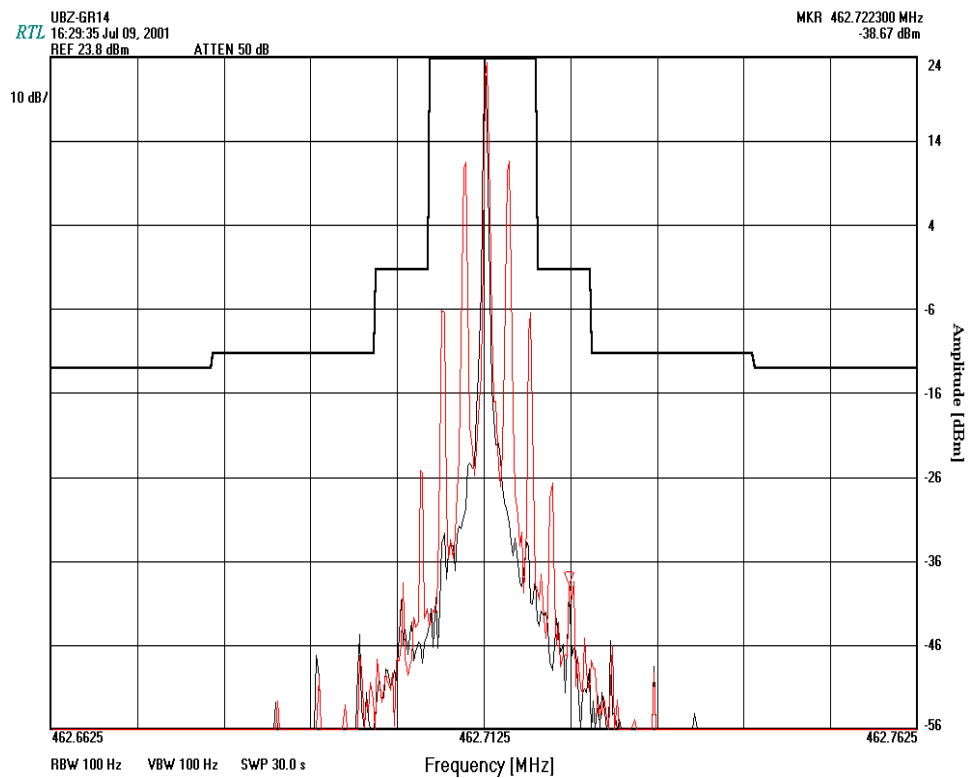

No sub channel tone applied



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 10 PART 2 §2.1051 AND §2.1053: SPURIOUS EMISSIONS

### 10.1 §95.635: UNWANTED RADIATION

#### 10.2 RADIATED SPURIOUS EMISSIONS

Frequency (MHz)	dBuV/m @ 3 m	Signal Generator (dBm)	Cable Loss (dB)	Corrected Antenna Gain	Corrected Signal Generator Level (-dBc)	Limit (-dBc)	Margin (dB)
925.4250	45.9	-32.0	3.4	-1.2	-35.6	-12.0	-23.6
1388.1375	48.6	-34.0	4.6	3.6	-34.0	-12.0	-22.0
1850.8500	60.4	-19.0	6.6	4.8	-19.8	-12.0	-7.9
2313.5625	63.7	-24.3	7.0	5.1	-25.2	-12.0	-13.2
2776.2750	65.6	-19.9	8.0	5.8	-21.1	-12.0	-9.1
3238.9875	58.5	-47.0	8.3	6.1	-48.3	-12.0	-36.3
3701.7000	50.8	-53.0	9.1	6.0	-55.2	-12.0	-43.2
4164.4125	40.9	-51.4	9.7	6.2	-53.8	-12.0	-41.8
4627.1250	38.6	-48.0	9.9	7.1	-49.8	-12.0	-37.8



## 11 PART 2 §2.1055 MEASUREMENTS REQUIRED: FREQUENCY STABILITY

### 11.1 §95.625: FREQUENCY TOLERANCE

### 11.2 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.2

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +50°C.

The temperature was initially set to -30°C and a 2-hour period was observed for stabilization of the EUT.


The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½ an hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter.

Additionally, the power supply voltage of the EUT was varied from 85% to 115% of the nominal voltage.

The worst-case test data are shown.

### 11.3 TEMPERATURE FREQUENCY STABILITY


Limit 0.00025 %

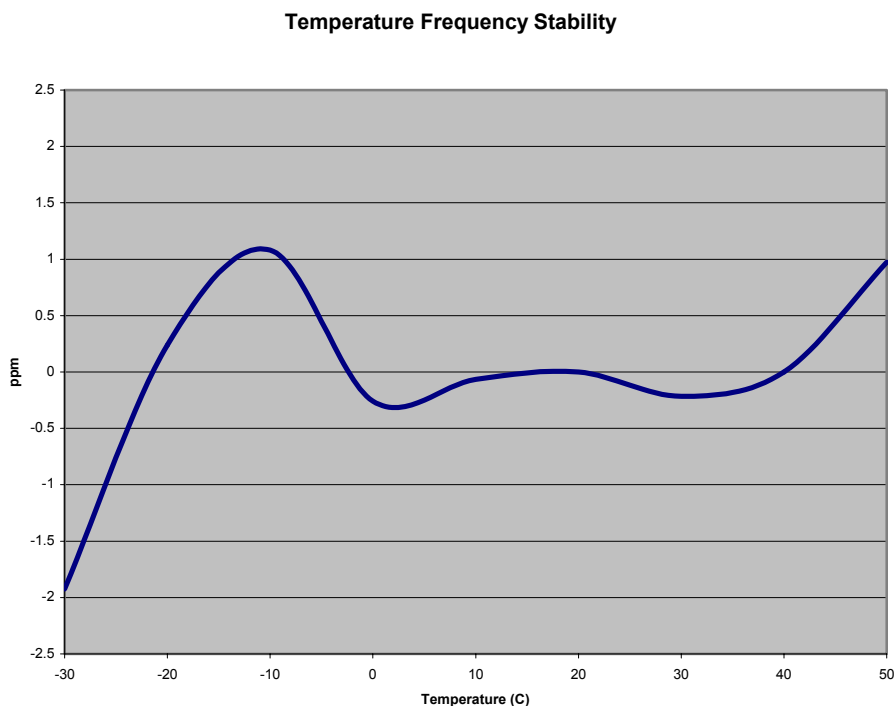



## 11.4 VOLTAGE FREQUENCY STABILITY

Battery end-point 2.4 VDC

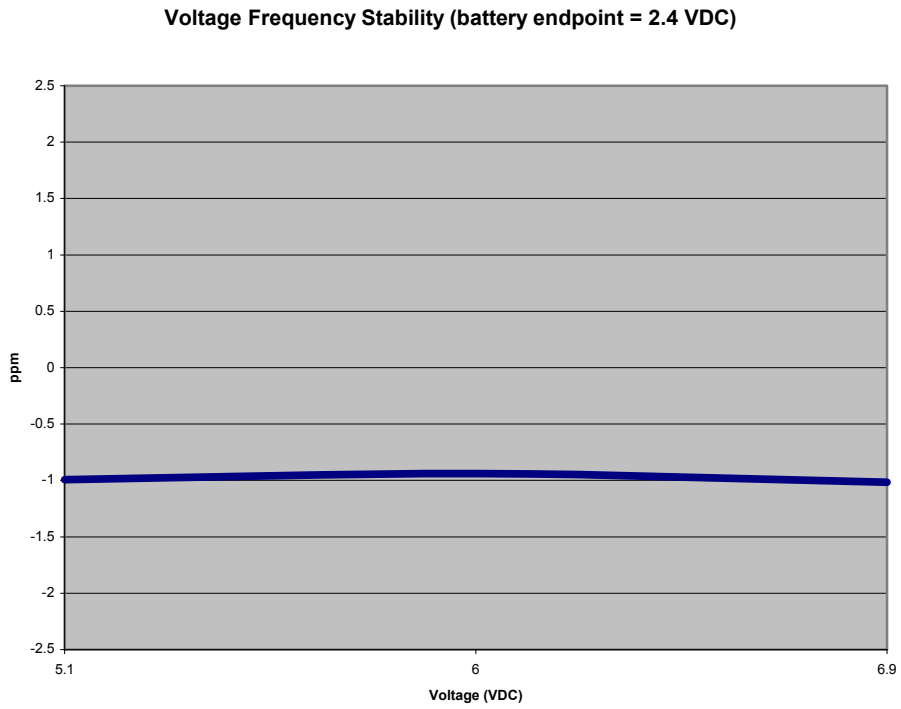



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 12 §95.627: FRS UNIT CHANNEL FREQUENCIES

### 12.1 TEST DATA


Channel No.	Assigned Frequency (MHz)	Measured Frequency (MHz)	ppm
1	462.5625	462.56264	0.30
2	462.5875	462.58764	0.30
3	462.6125	462.61269	0.41
4	462.6375	462.63764	0.30
5	462.6625	462.66262	0.26
6	462.6875	462.68769	0.41
7	462.7125	462.71263	0.28
8	467.5625	467.56269	0.41
9	467.5875	467.58760	0.21
10	467.6125	467.61270	0.43
11	467.6375	467.63765	0.32
12	467.6625	467.66266	0.34
13	467.6875	467.68768	0.38
14	467.7125	467.71270	0.43



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

### 13 §95.655: FREQUENCY CAPABILITY

#### Audio Low Pass Filter Response

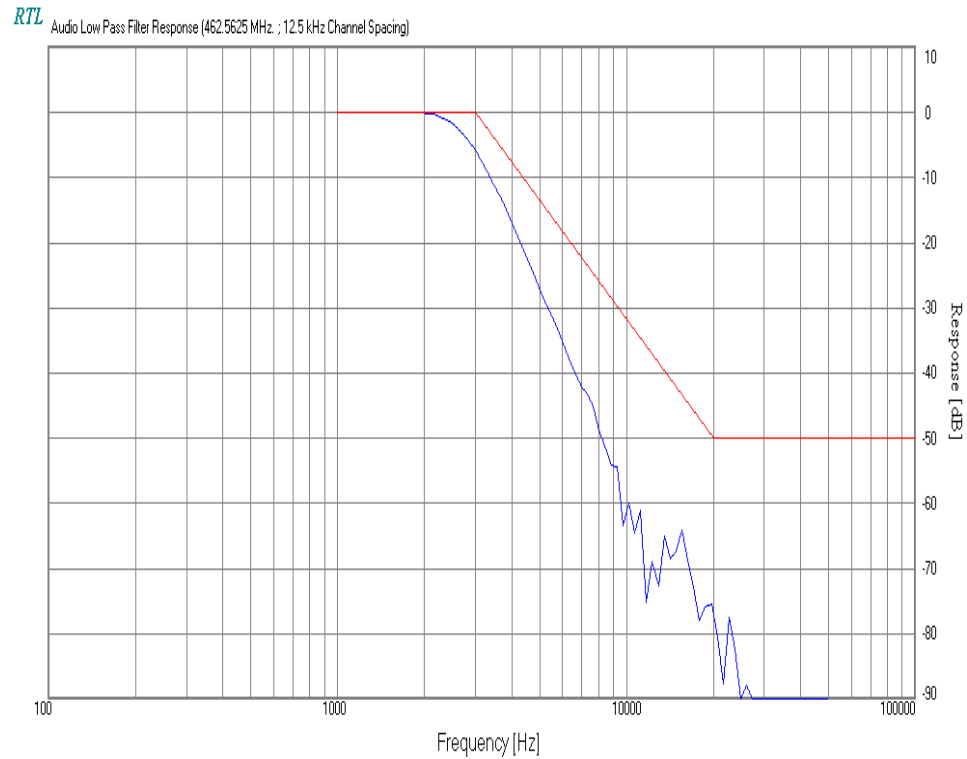



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## Audio Frequency Response

