

Designated by Ministry of international Trade and industry

KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER

HEAD OFFICE
6-8-7 NISHITENMA
KITA-KU OSAKA 530-0047 JAPAN



Corporate Juridical Person

IKOMA TESTING LABORATORY
12128 TAKAYAMA-CHO
IKOMA-CITY NARA 630-0101 JAPAN

TEST REPORT**Report No.A-040-00-C**

Date: 13 October 2000

This test report is to certify that the tested device properly complies with the requirements of:

FCC Rules and Regulations Part 15 Subpart C Intentional Radiators.

All the tests necessary to show compliance to the requirements were performed and these results met the specifications of requirement. The results of this report should not be construed to imply compliance of equipment other than that, which was tested. Unless the laboratory permission, this report should not be copied in part.

1. Applicant

Company Name : SANWA ELECTRONIC INSTRUMENT CO., LTD.
Mailing Address : 1-2-50, YOSHIDA HONMACHI, HIGASHI-OSAKA,
578-0982 Japan

2. Identification of Tested Device

Type of Device : Transmitter
Kind of Equipment Authorization : ☐: DoC ☒: Certification ☐: Verification
FCC ID : L73RM-Y808
Device Name : REMOTE CONTROL TRANSMITTER
Trade Name : SONY
Model Number : RM-Y808
Serial Number : 000001 ☐: Prototype ☒: Pre-production ☐: Production
Date of Manufacture : September 2000

3. Test Items and Procedure

☐: AC Power Line Conducted Emission Measurement
☒: Radiated Emission Measurement
☒: Emission Bandwidth Measurement

Above all tests were performed under: ANSI C63.4 – 1992

☒: without deviation, ☐: with deviation(details are found inside of this report)**4. Date of Test**

Receipt of Test Sample : 3 October 2000
Test Completed on : 6 October 2000

Fumitoshi Nagaoka
Associate Director/ Ikoma Testing Laboratory

Table of Contents

0.	NVLAP ACCREDITATION AND MEASUREMENT UNCERTAINTY	3
0.1.	NVLAP Accreditation	3
0.2.	Measurement Uncertainty	3
1.	CERTIFICATION OF THE COMPLIANCE	3
2.	GENERAL INFORMATION	4
2.1.	Product Description	4
2.2.	Description for Equipment Authorization	4
2.3.	Test Facility	5
3.	TESTED SYSTEM	6
3.1.	Test Mode	6
3.2.	Characterization and condition of EUT System	6
4.	RADIATED EMISSION MEASUREMENT	7
4.1.	Test Procedure	7
4.2.	Test Results	8
4.3.	Photographs of EUT System Configuration	12
5.	EMISSION BANDWIDTH MEASUREMENT	13
5.1.	Test Configuration	13
5.2.	Test Results	13
6.	USED TEST EQUIPMENTS AND CALIBRATION STATUS	15

0. NVLAP ACCREDITATION AND MEASUREMENT UNCERTAINTY

0.1. NVLAP Accreditation

KEC is accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code: 200207-0.

When a test report concerns with the NVLAP Accreditation test, the first page of the test report is signed by NVLAP Approved Signatory together with the expression.

The report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

0.2. Measurement Uncertainty

The result of a measurement is only an approximation or estimate of the value of a specific quantity. And thus the measurand is complete only when a statement of uncertainty is given.

KEC quotes Measurement Uncertainty (U)

of +/- 4.9 dB for Radiated Emissions

of +/- 2.2 dB for Conducted Emissions

1. CERTIFICATION OF THE COMPLIANCE

This test report is to certify that the tested device properly complies with the requirements of FCC Rules and Regulations Part 15 Subpart C Intentional Radiators.

KEC evaluation criteria for compliance:

The Product complies, if

the measured results are below the specification limit by a margin more than or equal to

1/2 U (2.5 dB) for Radiated Emissions

U (2.2 dB) for Conducted Emissions

2. GENERAL INFORMATION

2.1. Product Description

The SONY Model No. : RM-Y808 (referred to as the EUT in this report) is
REMOTE CONTROL TRANSMITTER.

1) Technical Specifications

· Operating frequency range : 315.625~316.425 MHz (316.025 MHz in EUT)
Type of antenna : Internal monopole Antenna (50Ω, Unbalance)
Type of Emission : F1D (FSK)
Frequency deviation : 37.5kHz (Nominal)

2) Contained Oscillators

CPU clock : 4 MHz

3) Rated Power Supply

: DC2.4~3.2V
(2 peace of type “AA” alkaline manganese battery)

2.2. Description for Equipment Authorization

(1) Type of device	: ☒ Intentional Radiators
(2) Reference Rule and Specification	: FCC Rule Part 15 Subpart C, Section 15.231 Periodic operation in the band 40.66 - 40.70MHz and above 70 MHz ☐ Section 15.207 ☒ Section 15.209 ☒ Section 15.231(b) ☒ Section 15.231(c)
(3) Kind of Equipment Authorization	: ☐ DoC ☒ Certification ☐ Verification
(4) Procedure of Application	: ☒ Original Equipment ☐ Modification
(5) Highest Frequency used in the Device	: 316.025 MHz
(6) Upper Frequency of Radiated Emission Measurement Range	: ☐ 1000 MHz ☐ 2000 MHz ☐ 5000 MHz ☒ Tenth harmonics of the highest fundamental frequency

2.3. Test Facility

All tests described in this report were performed by:

Name: KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER (KEC)
IKOMA TESTING LABORATORY

Open Area Test Site ☒ No.1 ☐ No.2 ☐ No.3 ☐ No.4
EMC M.C. Anechoic Chamber ☐ No.1
Shielded Room ☐ No.2 ☒ No.4 ☐ EMC M.C. Shielded Room

Address: 12128, Takayama-cho Ikoma-city, Nara, 630-0101 Japan

These test facilities have been filed with the FCC under the criteria of ANSI C63.4-1992. The Open Area Test Site No.4, EMC MC. Anechoic Chamber No.1, Shielded Room No.4 and EMC MC. Shielded Room have been accredited by the NVLAP (Lab. Code: 200207-0) based on ISO/IEC Guide 25.

Also the laboratory has been authorized by ITI (Interference Technology International, (UK), TUV Product Service (GER) and TUV Rheinland (GER) based on their criteria for testing laboratory (EN45001).

3. TESTED SYSTEM

3.1. Test Mode

Continuously transmitted code (data) mode.

[Note]

The EUT was operated continuously in measurement. In addition the measurement of radiated emission, placed horizontally or vertically on the test table.

The data of operation modes that produce the maximum emission were reported at each frequency.

3.2. Characterization and condition of EUT System

☒ : normal , ☐ : not normal (that is)

4. RADIATED EMISSION MEASUREMENT

4.1. Test Procedure

(1) (2) (3) (4) (5) (6) (7) (8)	Configure the EUT System in accordance with ANSI C63.4-1992 section 8. ☒: without deviation, ☐: with deviation(details are found below) See also the block diagram and the photographs of EUT System configuration in this report. If the EUT system is connected to a public power network, all power cords for the EUT System are connected the receptacle on the turntable. Warm up the EUT System. Activate the EUT System and run the prepared software for the test, if necessary. To find out the emissions of the EUT System, preliminary radiated measurement are performed at a closer distance than that specified for final radiated measurement using the spectrum analyzer (*1) and the broad band antenna. In the frequency above 1 GHz, it is performed using the spectrum analyzer (*2) and the horn antenna. To find out an EUT System condition, which produces the maximum emission, the configuration of EUT System, the position of the cables, and the operation mode, are changed under normal usage of the EUT. The spectrums are scanned from 30 MHz to the upper frequency of measurement range, and collect the six highest emissions minimum on the spectrum analyzer relative to the limits in the whole range. In final compliance test, the six highest emissions minimum, recorded above, are measured at the specified distance using the broad band antenna or the tuned dipole antenna and the test receiver (*3). In the frequency above 1 GHz, the measurements are performed by the horn antenna and ☐ the test receiver (*4). ☒ the spectrum analyzer(*2) with pre-amplifier.
	[Note] (*1) Spectrum Analyzer Set Up Conditions Frequency range : 30 - 1000 MHz Resolution bandwidth : 100 kHz Detector function : Peak mode (*2) Spectrum Analyzer Set Up Conditions Frequency range : 1 GHz - Upper frequency of measurement range Resolution bandwidth : 1 MHz Video bandwidth : 1 MHz Attenuator : 10 dB Detector function : Peak mode (*3) Test Receiver Set Up Conditions Detector function : Quasi-Peak or Peak IF bandwidth : 120 kHz (*4) Test Receiver Set Up Conditions Detector function : Average IF bandwidth : 1 MHz

4.2. Test Results

(1) Fundamental and Harmonics of Transmitting Frequency

Measurement Distance ☒: 3m ☐: 10m

Measured Frequency [MHz]	Antenna Factor [dB/m]	Meter Reading		Maximum Field Strength [dBuV/m]	Limits		Margine for Limits [dB]
		Horizontal [dBuV]	Vertical [dBuV]		Peak [dBuV/m]	Average [dBuV/m]	
Peak Detector Measurement							
Fundamental							
316.03	16.3	48.3	44.7	64.6	95.7	75.7	31.1
Harmonics							
632.05	21.9	15.8	18.5	40.4	75.7	55.7	35.3
948.08	25.6	18.8	16.0	44.4	75.7	55.7	31.3
1264.10	-9.8	50.3	49.1	40.5	75.7	55.7	35.2
1580.13	-11.3	67.7	65.8	56.4	74.0	54.0	17.6
1896.15	-9.6	52.9	51.3	43.3	75.7	55.7	32.4
2212.18	-8.4	60.5	58.3	52.1	74.0	54.0	21.9
2528.20	-8.5	52.2	50.2	43.7	75.7	55.7	32.0
2844.23	-8.1	51.8	51.0	43.7	74.0	54.0	30.3
3160.03	-7.8	48.3	48.4	40.6	75.7	55.7	35.1
Average Detector Measurement (*)							
1580.13	-11.3	62.1	61.0	50.8	-	54.0	3.2
2212.18	-8.4	51.8	49.8	43.4	-	54.0	10.6

- Continued -

(2) In the frequency range : 30 MHz to 1000 MHz (Restricted Bands)

Quasi-Peak Detector Measurement

Measurement Distance ☒: 3m ☐: 10m

Measured Frequency (MHz)	Antenna Factor (dB/m)	Meter Reading		Maximum Field Strength (dBuV/m)	Limits (dBuV/m)	Margin for Limits (dB)
		Horizontal (dBuV)	Vertical (dBuV)			
37.50	16.3	< 5.0	< 2.0	< 21.3	40.0	> 18.7
38.25	16.1	< 5.0	< 5.0	< 21.1	40.0	> 18.9
73.00	7.4	< 8.0	< 10.0	< 17.4	40.0	> 22.6
74.60	7.5	< 6.5	< 10.0	< 17.5	40.0	> 22.5
74.80	7.6	< 7.0	< 10.0	< 17.6	40.0	> 22.4
75.20	7.6	< 7.0	< 10.0	< 17.6	40.0	> 22.4
108.00	12.5	< 4.0	< 10.0	< 22.5	43.5	> 21.0
121.94	14.2	< 1.5	< 7.0	< 21.2	43.5	> 22.3
123.00	14.4	< 1.5	< 7.0	< 21.4	43.5	> 22.1
138.00	15.4	< 0.0	< 5.0	< 20.4	43.5	> 23.1
149.90	15.9	< 1.0	< 7.0	< 22.9	43.5	> 20.6
150.05	15.9	< 4.0	< 10.0	< 25.9	43.5	> 17.6
156.52475	16.0	< 0.5	< 0.0	< 16.5	43.5	> 27.0
156.52525	16.0	< 1.0	< 0.5	< 17.0	43.5	> 26.5
156.70	16.0	< 0.5	< 0.5	< 16.5	43.5	> 27.0
156.90	16.0	< 0.0	< 0.5	< 16.5	43.5	> 27.0
162.0125	16.2	< 0.0	< 5.0	< 21.2	43.5	> 22.3
167.17	16.5	< 0.0	< 2.0	< 18.5	43.5	> 25.0
167.72	16.5	< 1.0	< 2.0	< 18.5	43.5	> 25.0
173.20	16.9	< 10.0	< 10.0	< 26.9	43.5	> 16.6
240.00	19.0	< 3.0	< 8.0	< 27.0	46.0	> 19.0
285.00	21.5	< 10.0	< 10.0	< 31.5	46.0	> 14.5
332.33	16.7	< 0.5	< 2.0	< 18.7	46.0	> 27.3
335.40	16.7	< 1.0	< 1.0	< 17.7	46.0	> 28.3
399.90	18.1	< 0.5	< 0.5	< 18.6	46.0	> 27.4
410.00	18.3	< 1.5	< 2.0	< 20.3	46.0	> 25.7
608.00	21.6	< 0.5	< 1.0	< 22.6	46.0	> 23.4
614.00	21.7	< 0.5	< 1.0	< 22.7	46.0	> 23.3
960.00	25.7	< 2.0	< 3.0	< 28.7	46.0	> 17.3
1000.00	26.2	< 0.5	< 2.0	< 28.2	54.0	> 25.8

- Continued -

(3) In the frequency range : above 1 GHz (Restricted Bands)

Peak detector Measurement

Measurement Distance ☒: 3m ☐: 10m

Measured Frequency (MHz)	Antenna Factor (dB/m)	Meter Reading		Maximum Field Strength (dBuV/m)	Limits Average (dBuV/m)	Margin for Limits (dBuV/m)
		Horizontal (dBuV)	Vertical (dBuV)			
1000.00	- 9.8	< 43.0	< 43.0	< 33.2	54.0	> 20.8
1240.00	-10.2	< 43.0	< 43.0	< 32.8	54.0	> 21.2
1300.00	- 9.0	< 43.0	< 43.0	< 34.0	54.0	> 20.0
1427.00	-10.3	< 43.0	< 43.0	< 32.7	54.0	> 21.3
1435.00	-10.3	< 43.0	< 43.0	< 32.7	54.0	> 21.3
(*) 1580.13	-11.3	62.1	61.0	50.8	54.0	3.2
1626.50	-12.0	< 43.0	< 43.0	< 31.0	54.0	> 23.0
1645.50	-11.7	< 43.0	< 43.0	< 31.3	54.0	> 22.7
1646.50	-11.7	< 43.0	< 43.0	< 31.3	54.0	> 22.7
1660.00	-11.4	< 43.0	< 43.0	< 31.6	54.0	> 22.4
1710.00	-10.3	< 43.0	< 43.0	< 32.7	54.0	> 21.3
1718.80	-10.2	< 43.0	< 43.0	< 32.8	54.0	> 21.2
1722.20	-10.2	< 43.0	< 43.0	< 32.8	54.0	> 21.2
2000.00	-10.0	< 43.0	< 43.0	< 33.0	54.0	> 21.0
(*) 2212.18	- 8.4	51.8	49.8	43.4	54.0	10.6
2300.00	- 7.9	< 43.0	< 43.0	< 35.1	54.0	> 18.9
2483.50	- 8.5	< 43.0	< 43.0	< 34.5	54.0	> 19.5
2500.00	- 8.5	< 43.0	< 43.0	< 34.5	54.0	> 19.5
2655.00	- 8.4	< 42.0	< 42.0	< 33.6	54.0	> 20.4
2844.23	- 8.1	51.8	51.0	43.7	54.0	10.3
2900.00	- 8.1	< 42.0	< 42.0	< 33.9	54.0	> 20.1
3260.00	- 7.8	< 42.0	< 42.0	< 34.2	54.0	> 19.8
3267.00	- 7.8	< 42.0	< 42.0	< 34.2	54.0	> 19.8
3332.00	- 7.7	< 41.0	< 41.0	< 33.3	54.0	> 20.7
3339.00	- 7.7	< 41.0	< 41.0	< 33.3	54.0	> 20.7
3345.80	- 7.7	< 41.0	< 41.0	< 33.3	54.0	> 20.7
3358.00	- 7.6	< 41.0	< 41.0	< 33.4	54.0	> 20.6

- Continued -

[Remark]

(*) : If the measurement value with the peak detector meets the average limits, the measurement with average detector is omitted.

In FCC rule, the limit of measurement of radiated emission above 1GHz is regulated on the average value. Therefore, the average value above 1GHz was determined by using a reduced the video bandwidth of spectrum analyzer to obtain the average value in this case spectrum analyzer set up condition.

Resolution Bandwidth : 1 MHz

Video Bandwidth : 30Hz

Detector function : Peak detector

[Note]

(1) Antenna Factor includes the cable loss.

(2) * mark in Measured Frequency : Measured with the tuned dipole antenna.

No mark in Measured Frequency : Measured with the broadband antenna.

(3) Above 1GHz, antenna factor includes both of the cable loss and pre-amplifier gain.

(4) All emission not reported were less than 10dBμV at meter reading.

[Calculation method]

Maximum Field Strength (dBμV/m)

= Meter Reading (at maximum level of Horizontal or Vertical) (dBμV) + Antenna Factor (dB/m)

[Calculation of Limit (Average detector)]

Fundamental

$$L = 20 \log \left(\frac{1}{3} \times (125 \times F - 21250) \right)$$

$$L = 75.7 \text{ [dB}\mu\text{V/m]}$$

Where, L: Limit [dBμV/m]

F: Frequency [MHz]

At F=316.025[MHz]

Spurious Emission

$$L = 75.7 - 20 = 55.7 \text{ [dB}\mu\text{V/m]}$$

Limit of peak detector are up to 20 dB from the fundamental and spurious emissions average limits.

[Environment]

Temperature: 24°C

Humidity: 64%

[Tested Date/ Tester]

6 October 2000

Signature


 Ikuya Minematsu

4.3. Photographs of EUT System Configuration

Horizontally placed




Vertically placed



5. EMISSION BANDWIDTH MEASUREMENT

5.1. Test Configuration

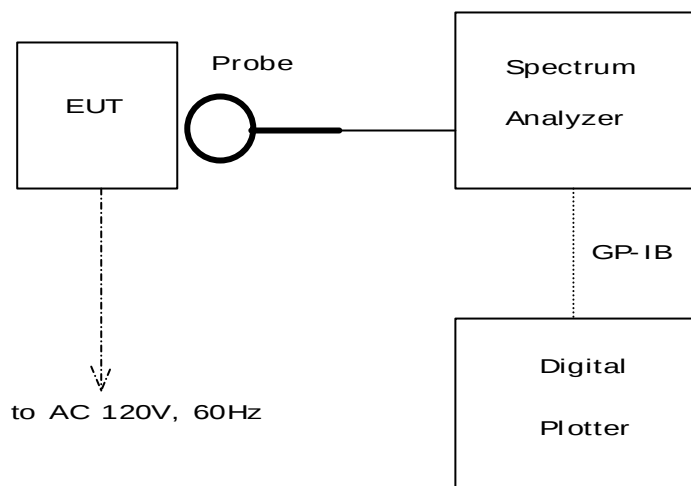

5.2. Test Results

Measured emission bandwidth = 554 kHz

See next Figure 1(the picture of spectrum analyzer)

[Note]

Emission Bandwidth was determined at the points 20dB down from the modulated carrier.

Spectrum Analyzer Setting:

Center Frequency = 315.827 MHz
 Frequency Span = 200 kHz/div.
 Resolution Bandwidth = 100 kHz
 Video Bandwidth = 3 MHz
 Sweep Time = 20 m sec
 Trace Mode : MAX. HOLD

[Environment]

Temperature : 24°C Humidity : 72%

[Calculation of Limit]

Limit of Emission bandwidth = $316.025 \text{ MHz} \times 0.25\% = 790.06 \text{ kHz}$

[Summary of Test Results]

Minimum margin of emission bandwidth was 236.06 kHz.

Tested Date : 6 October 2000

Signa


 Ikuya Minematsu

- Continued -

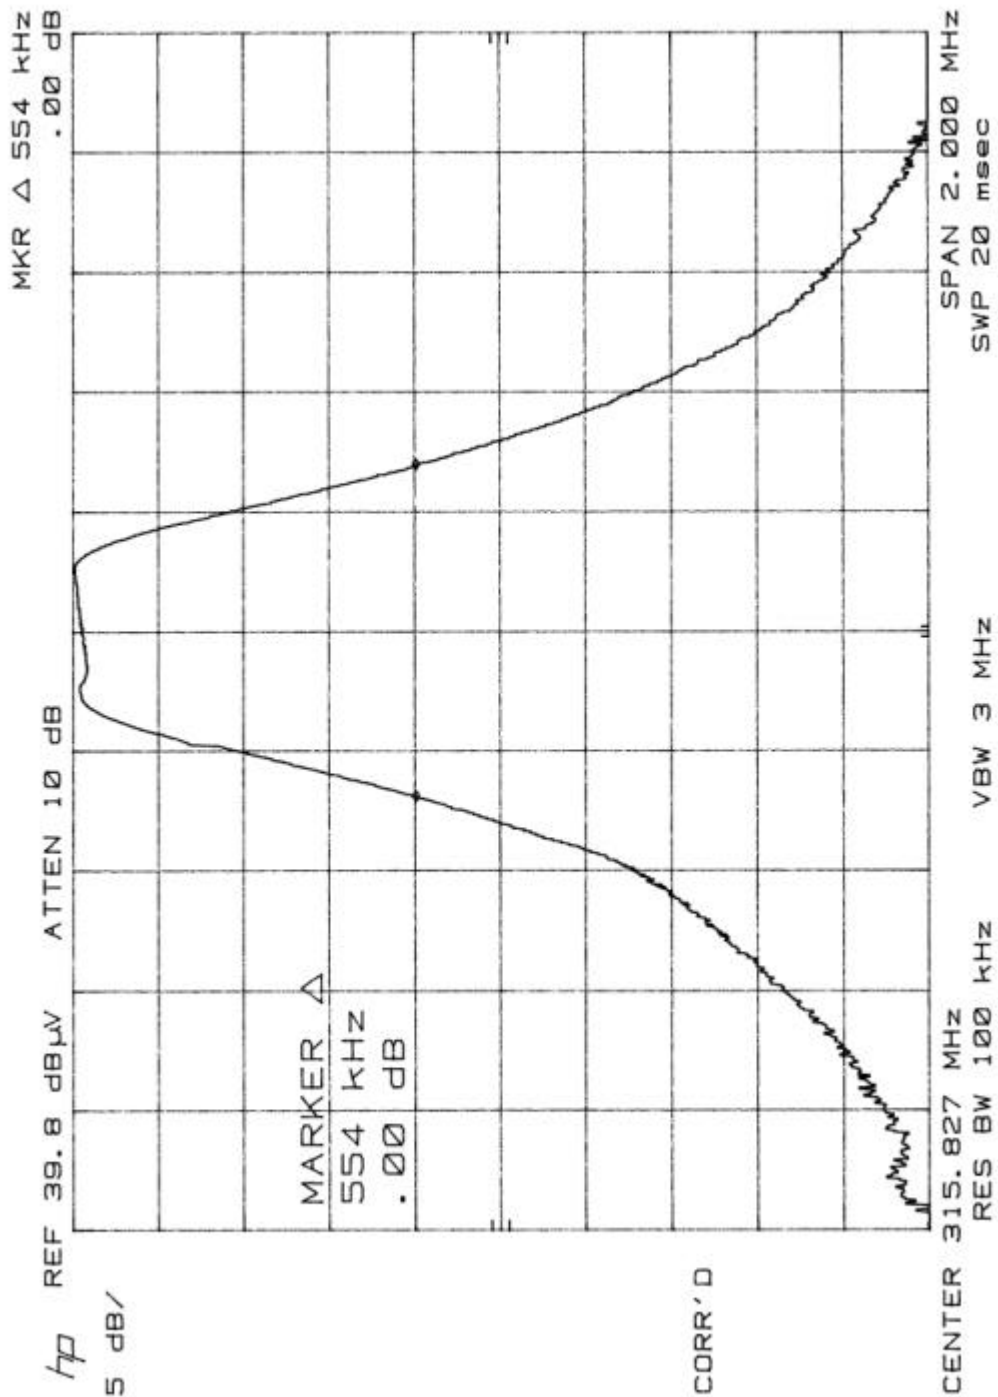


Figure 1

6. USED TEST EQUIPMENTS AND CALIBRATION STATUS

Equipment	Manufacturer	Model No.	Specifications	KEC Control No.	Test Item (*)	Last Cal.	Next Cal.
Test Receiver	Rohde & Schwarz	ESHS10	Frequency Range 9kHz-30MHz	FS-67	N/A	1999/12	2000/12
		ESVS10	Frequency Range 20MHz-1GHz	FS-81	2	1999/10	2000/10
Spectrum Analyzer	Rohde & Schwarz	8564E	Frequency Range 30 Hz-40 GHz	SA-39	2	2000/1	2001/1
	Hewlett Packard	8568B	Frequency Range 100 Hz-1.5 GHz	FS-46-3	3	2000/4	2001/4
Pre-amplifier	Anritsu	8449B	Frequency Range 1 GHz-26.5 GHz	AM-52	2	2000/2	2001/2
Biconical Antenna	Schwarzbeck	BBA9106	Frequency Range 30MHz-300MHz	AN-99	2	2000/2	2001/2
Log-Periodic Antenna	Schwarzbeck	UHALP9108A	Frequency Range 300MHz-1GHz	AN-249	2	2000/2	2001/2
Tuned Dipole Antenna	Kyoritsu	KBA-511AS	Frequency Range 25MHz-500MHz	AN-135	N/A	2000/3	2001/3
		KBA-611S	Frequency Range 500MHz-1GHz	AN-137	N/A	2000/3	2001/3
Horn Antenna	Raven	92888-2	Frequency Range 1 GHz- 2GHz	AN-167	2	1999/11	2001/11
		91889-2	Frequency Range 2 GHz- 5GHz	AN-168	2	1999/11	2001/11
LISN for EUT	Kyoritsu	KNW-407	Frequency Range 150kHz- 30MHz	FL-106	N/A	2000/4	2001/4
LISN for Peripheral	Kyoritsu	KNW-242	Frequency Range 10kHz- 30MHz	FL-110	N/A	2000/4	2001/4
Digital Plotter	Hewlett Packard	7440A	Plot Area A4 size	FS-51-7	3	-	-

[Note]

Test Item (*): 1: Conducted Emission Measurement
2: Radiated Emission Measurement
3: Bandwidth Measurement
N/A: Not Applicable

The overall program of calibration and verification of equipment is designed and operated so as to ensure that measurements made by KEC are traceable to national standards of measurement or equivalent abroad.