

**#01\_WLAN2.4GHz\_802.11b 1Mbps\_Edge 1\_0mm\_Ch1;Ant 1**

Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1.01

Medium: MSL\_2450\_190410 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.906$  S/m;  $\epsilon_r = 53.37$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3931; ConvF(7.56, 7.56, 7.56) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (51x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.41 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.54 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.75 W/kg

**SAR(1 g) = 0.737 W/kg; SAR(10 g) = 0.322 W/kg**

Maximum value of SAR (measured) = 1.15 W/kg

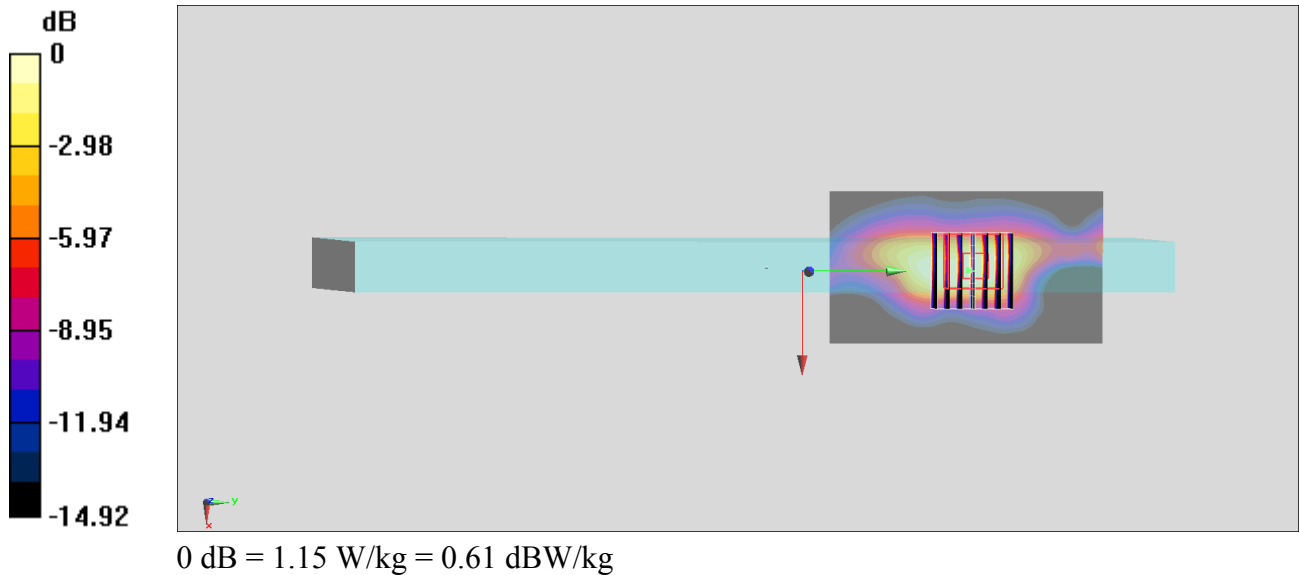

**#02\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Edge 1\_0mm\_Ch58;Ant 1**

Communication System: 802.11ac ; Frequency: 5290 MHz;Duty Cycle: 1:1.024

Medium: MSL\_5G\_190411 Medium parameters used:  $f = 5290$  MHz;  $\sigma = 5.403$  S/m;  $\epsilon_r = 47.735$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3931; ConvF(4.4, 4.4, 4.4) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (81x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.74 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 20.05 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 4.03 W/kg

**SAR(1 g) = 0.704 W/kg; SAR(10 g) = 0.217 W/kg**

Maximum value of SAR (measured) = 1.64 W/kg

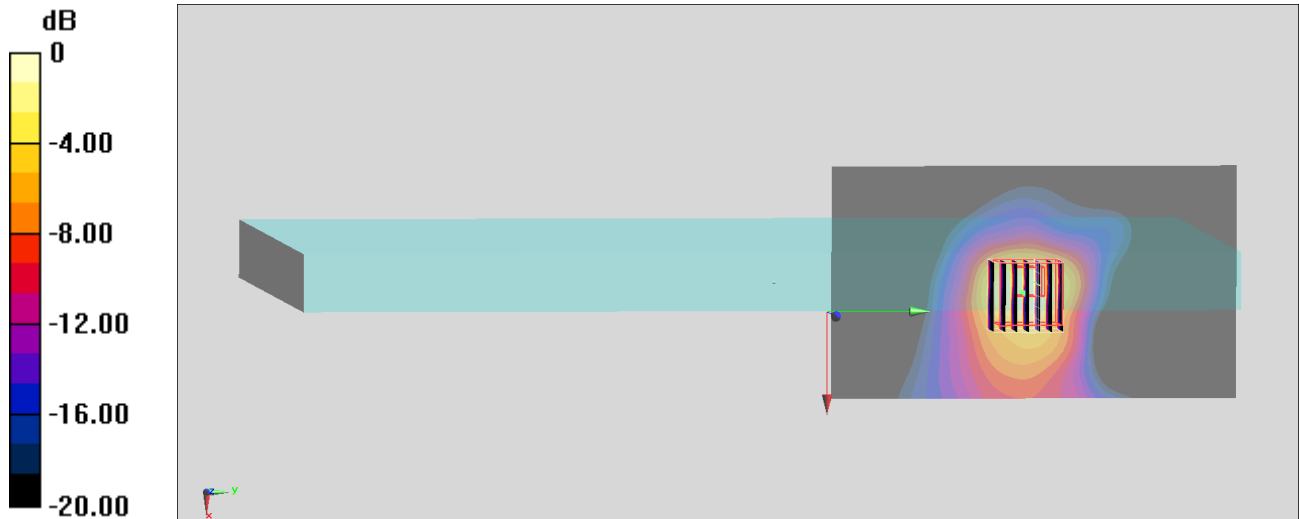

**#03\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Edge 1\_0mm\_Ch138;Ant 1**

Communication System: 802.11ac; Frequency: 5690 MHz; Duty Cycle: 1:1.024

Medium: MSL\_5G\_190411 Medium parameters used :  $f = 5690$  MHz;  $\sigma = 5.993$  S/m;  $\epsilon_r = 47.144$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.11, 4.11, 4.11) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.55 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 9.900 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 4.90 W/kg

**SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.229 W/kg**

Maximum value of SAR (measured) = 1.56 W/kg

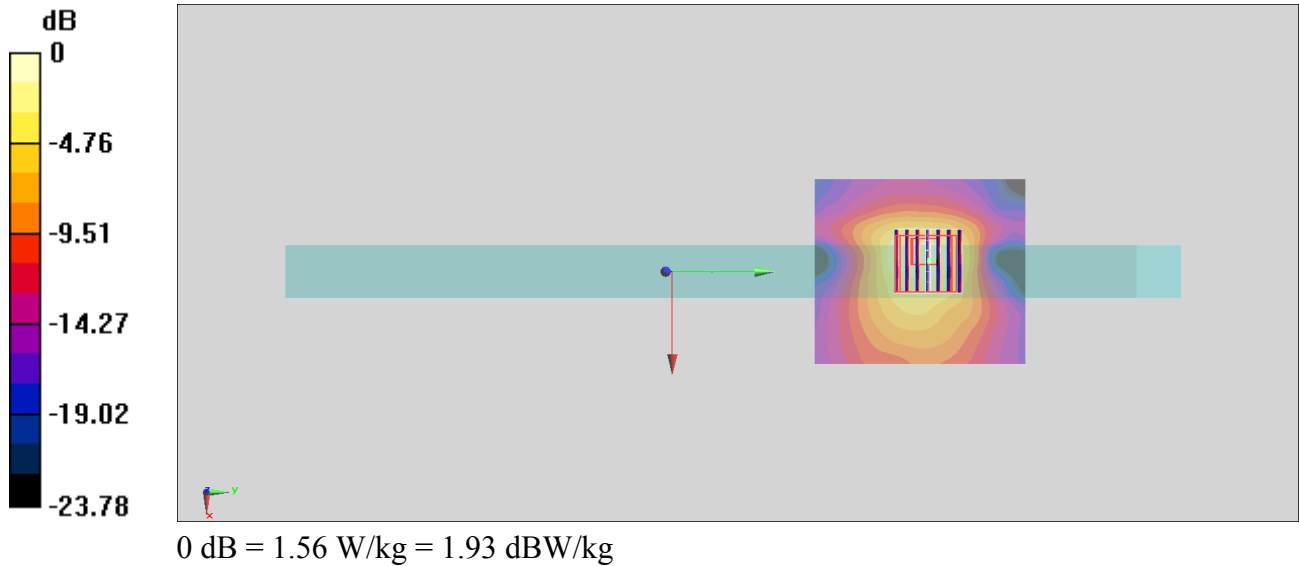

**#04\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Edge 1\_0mm\_Ch155;Ant 1**

Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.024

Medium: MSL\_5G\_190411 Medium parameters used:  $f = 5775$  MHz;  $\sigma = 6.057$  S/m;  $\epsilon_r = 46.968$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.11, 4.11, 4.11) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.40 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.766 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.87 W/kg

**SAR(1 g) = 0.580 W/kg; SAR(10 g) = 0.215 W/kg**

Maximum value of SAR (measured) = 1.43 W/kg

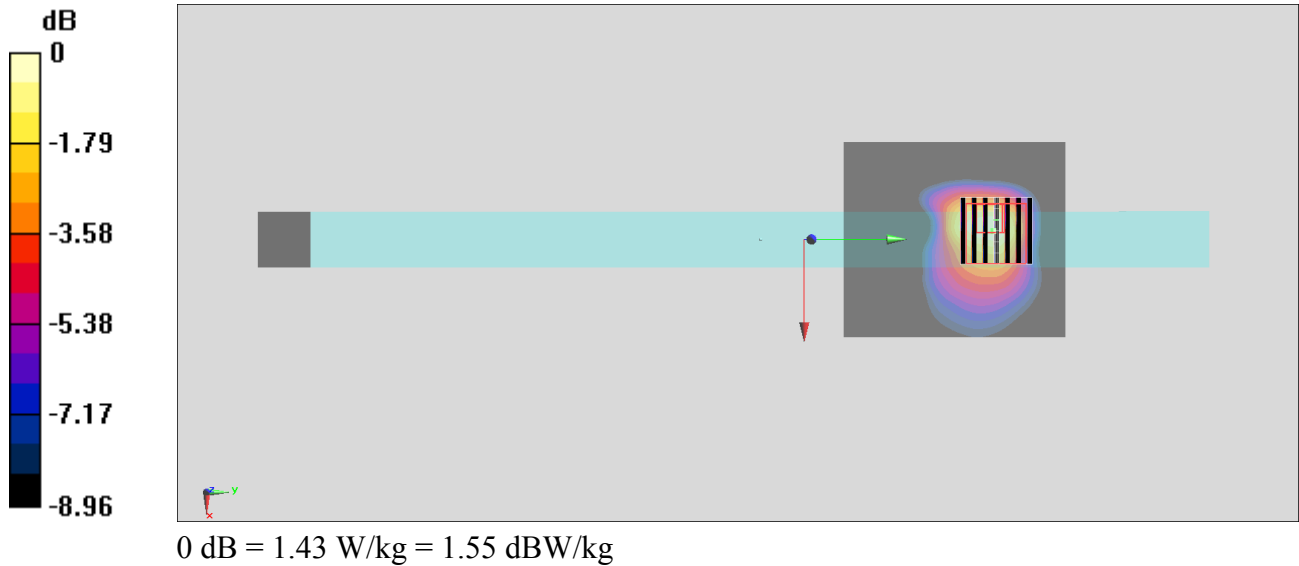

**#05\_Bluetooth\_1Mbps\_Edge 1\_0mm\_Ch39;Ant 1**

Communication System: Bluetooth ; Frequency: 2441 MHz;Duty Cycle: 1:1.297

Medium: MSL\_2450\_190410 Medium parameters used :  $f = 2441$  MHz;  $\sigma = 1.943$  S/m;  $\epsilon_r = 53.272$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.56, 7.56, 7.56) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (51x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.218 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.09 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.291 W/kg

**SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.052 W/kg**

Maximum value of SAR (measured) = 0.181 W/kg

