



FCC TEST REPORT

For

ARTIKA FOR LIVING INC

Horizon Fan

Test Model: FAN-HOC-BN

Additional Model No.: FAN-HOC-*****("*****" means may be follow by up to six characters, The character mentioned can be letters, numbers, "-" or blank. denote different commercial codes))

Prepared for : ARTIKA FOR LIVING INC
Address : 1756, 50th Avenue Montréal (Lachine), Québec, Canada
H8T 2V5

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District,
Shenzhen, 518000, China
Tel : +(86) 0755-82591330
Fax : +(86) 0755-82591332
Web : www.lcs-cert.com
Mail : webmaster@lcs-cert.com

Date of receipt of test sample : November 07, 2024
Number of tested samples : 1
Serial number : Prototype
Sample No. : A241008090001
Date of Test : November 07, 2024 to November 12, 2024
Date of Report : November 13, 2024



**TEST REPORT****Report No.** : **LCSA09304089E****Date of Issue** : November 13, 2024**Testing Laboratory Name** : **Shenzhen LCS Compliance Testing Laboratory Ltd.****Address** : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District,
Shenzhen, 518000, China**Testing Location/ Procedure** : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □**Applicant's Name** : **ARTIKA FOR LIVING INC****Address** : 1756, 50th Avenue Montréal (Lachine), Québec, Canada H8T 2V5**Test Specification****Standard** : FCC 47 CFR Part 15, Subpart B
ANSI C63.4-2014**Test Report Form No.** : TRF-4-E-010 A/0**TRF Originator** : Shenzhen LCS Compliance Testing Laboratory Ltd.**Master TRF** : Dated 2011-03**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : **Horizon Fan****Trade Mark** : ARTIKA**Test Model** : FAN-HOC-BN**Result** : **Positive****Compiled by:**

Emma wang / File Administrator

Supervised by:

Cary Luo/ Technique principal

Approved by:

Gavin Liang / Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District,
Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



TEST REPORT

Test Report No.: LCSA09304089E	November 13, 2024 Date of issue
---------------------------------------	---

Test Model	: FAN-HOC-BN
EUT	: Horizon Fan
Applicant	: ARTIKA FOR LIVING INC
Address	: 1756, 50th Avenue Montréal (Lachine), Québec, Canada H8T 2V5
Telephone	: /
Fax	: /
Manufacturer	: Giant Force Technology Inc.
Address	: Sui Feng Nian Village, Lin Hai Industries Park, Sha Tian Town, Dong Guan City, China
Telephone	: /
Fax	: /
Factory	: Giant Force Technology Inc.
Address	: Sui Feng Nian Village, Lin Hai Industries Park, Sha Tian Town, Dong Guan City, China
Telephone	: /
Fax	: /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





Revision History

Report Version	Issue Date	Revision Content	Revised By
000	November 13, 2024	Initial Issue	/





TABLE OF CONTENTS

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1 Description of Standards and Results	6
1.2 Description of Test Modes	7
2. GENERAL INFORMATION	8
2.1 Description of Device (EUT)	8
2.2 Support equipment List	8
2.3 Description of Test Facility	8
2.4 Measurement Uncertainty	8
3. MEASURING DEVICES AND TEST EQUIPMENT	9
4. EMISSION TEST RESULTS (EMI)	10
4.1 Conducted emissions on AC mains	10
4.2 Radiated emissions (Below 1GHz)	13
4.3 Radiated emissions (Above 1GHz)	17
5. TEST SETUP PHOTOS	20
6. EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	20





1. SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

Description of Test Item	Standard	Limits	Result
Conducted emissions on AC mains	FCC 47 CFR Part 15, Subpart B ANSI C63.4-2014	15.107, Class B	Pass
Radiated emissions (Below 1GHz)	FCC 47 CFR Part 15, Subpart B ANSI C63.4-2014	15.109, Class B	Pass
Radiated emissions (Above 1GHz)	FCC 47 CFR Part 15, Subpart B ANSI C63.4-2014	15.109, Class B	Pass





1.2 Description of Test Modes

No	Title	Description
TM1	Working(AC 120V/60Hz)	Record





2. GENERAL INFORMATION

2.1 Description of Device (EUT)

EUT	: Horizon Fan
Test Model	: FAN-HOC-BN
Additional Model No.	: FAN-HOC-*****("*****" means may be follow by up to six characters, The character mentioned can be letters, numbers, "-" or blank. denote different commercial codes))
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested.
Power Supply	: 120V~, 60Hz, 30W LED+25W Fan
Highest Internal Frequency	: FX > 108 MHz
Classification of Equipment	: Class B

Highest internal frequency (Fx)	Highest measured frequency
$Fx \leq 1.705\text{MHz}$	30MHz
$1.705\text{MHz} < Fx \leq 108\text{MHz}$	1GHz
$108\text{MHz} < Fx \leq 500\text{MHz}$	2GHz
$500\text{MHz} < Fx \leq 1000\text{MHz}$	5GHz
$Fx > 1\text{GHz}$	5 x Fx up to a maximum of 40GHz

2.2 Support equipment List

The EUT was tested as an independent device.

2.3 Description of Test Facility

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

2.4 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emission (150kHz to 30MHz)	$\pm 2.35 \text{ dB}$
Radiated Emission (30MHz to 1000MHz)	$\pm 3.48 \text{ dB}$
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	





3. MEASURING DEVICES AND TEST EQUIPMENT

Conducted emissions on AC mains

Equipment	Manufacturer	Model No	Serial No.	Cal Date	Due Date
EMI Test Software	Farad	EZ	/	/	/
Artificial Mains	R&S	ENV216	101288	2024-06-06	2025-06-05
Pulse Limiter	R&S	ESH3-Z2	102750-NB	2024-06-06	2025-06-05
EMI Test Receiver	R&S	ESR3	102312	2024-03-12	2025-03-11

Radiated emissions (Below 1GHz) (Above 1GHz)

Equipment	Manufacturer	Model No	Serial No.	Cal Date	Due Date
EMI Test Software	AUDIX	E3	/	N/A	N/A
By-log Antenna	SCHWARZBECK	VULB9163	01143	2024-07-20	2027-07-19
Horn Antenna	SCHWARZBECK	3115	EABF-018	2024-07-20	2027-07-19
EMI Test Receiver	R&S	ESR3	102311	2024-06-06	2025-06-05
Broadband Preamplifier	/	BP-01M18G	P190501	2024-06-06	2025-06-05
EMI Test Receiver	R&S	ESCI7	101173	2024-10-06	2025-10-07
By-log Antenna	SchwarzZBECK	VULB9163	01565	2024-07-13	2027-07-12
EMI Test Software	Farad	EZ	/	N/A	N/A
MXA Signal Analyzer	Agilent	N9020A	MY53290398	2024-06-06	2025-06-05





4. EMISSION TEST RESULTS (EMI)


4.1 Conducted emissions on AC mains

Test Requirement:	15.107, Class B		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dBμV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Method:	ANSI C63.4-2014		
Procedure:	An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected. Remark: Level= Read Level+ Cable Loss+ LISN Factor		

4.1.1 E.U.T. Operation:

Operating Environment:			
Temperature:	22.5 °C	Humidity:	53.7 %
Pre test mode:	TM1		
Final test mode:	TM1		

4.1.2 Test Setup Diagram:

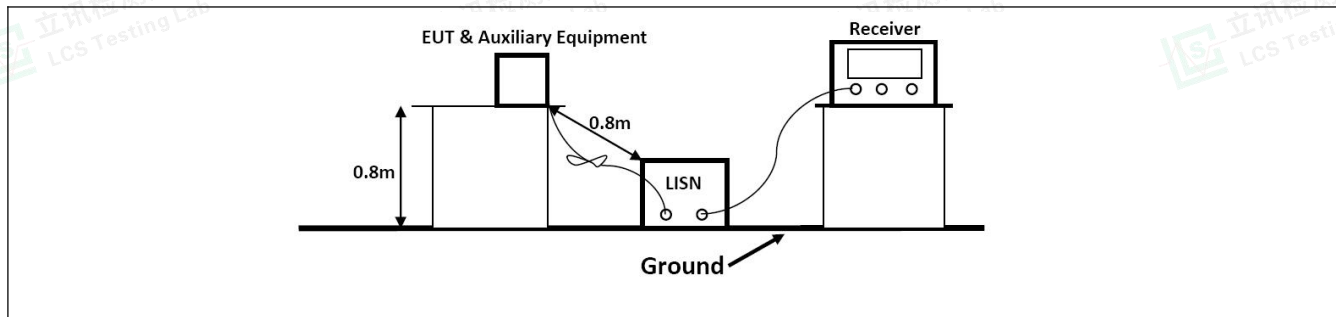

4.1.3 Disturbance Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dBuV)} = RA \text{ (dBuV)} + PL \text{ (dB)} + CL \text{ (dB)}$$


Where CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor





4.1.4 Test Data:

TM1 / Line: Line

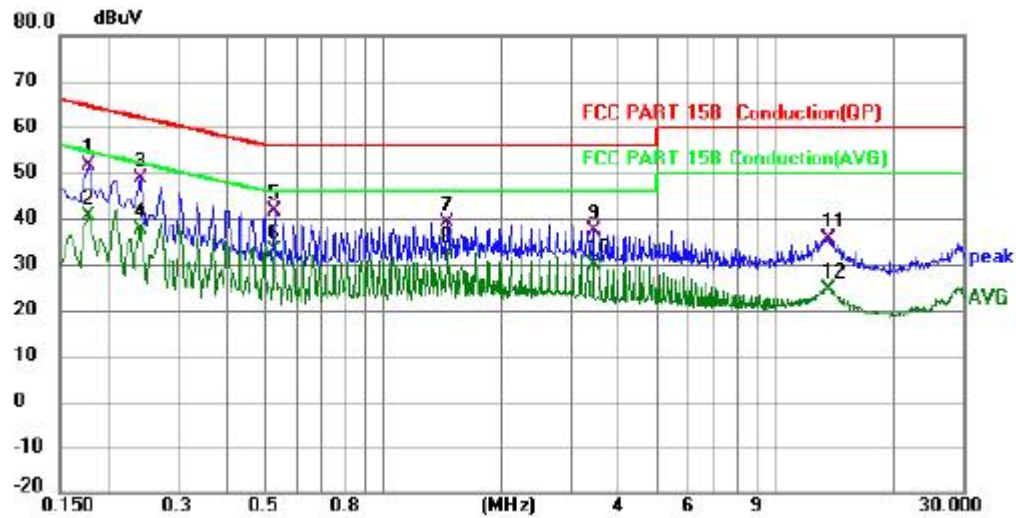

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment	dBuV	dB	Detector	Comment
1		0.177	30.05	21.44	51.49	64.63	-13.14	QP	
2		0.177	19.08	21.44	40.52	54.63	-14.11	AVG	
3		0.240	27.37	21.44	48.81	62.10	-13.29	QP	
4		0.240	16.17	21.44	37.61	52.10	-14.49	AVG	
5		0.528	20.16	21.44	41.60	56.00	-14.40	QP	
6	*	0.528	11.59	21.44	33.03	46.00	-12.97	AVG	
7		1.460	17.14	22.08	39.22	56.00	-16.78	QP	
8		1.460	10.18	22.08	32.26	46.00	-13.74	AVG	
9		3.449	15.15	22.30	37.45	56.00	-18.55	QP	
10		3.449	7.67	22.30	29.97	46.00	-16.03	AVG	
11		13.627	12.80	22.76	35.56	60.00	-24.44	QP	
12		13.627	1.79	22.76	24.55	50.00	-25.45	AVG	



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



TM1 / Line: Neutral

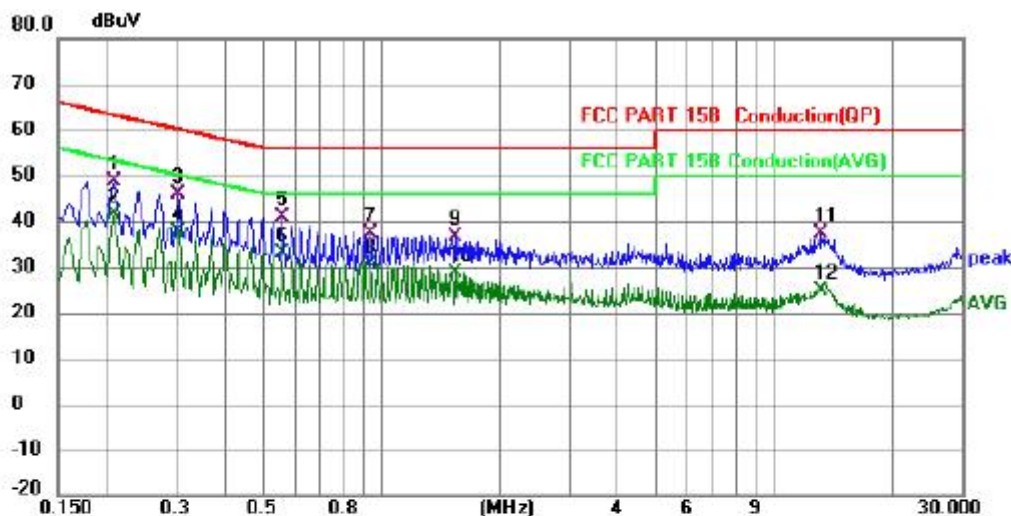

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
		MHz	Level	Factor	ment				
1		0.208	27.42	21.44	48.86	63.28	-14.42	QP	
2	*	0.208	20.27	21.44	41.71	53.28	-11.57	AVG	
3		0.303	24.51	21.44	45.95	60.16	-14.21	QP	
4		0.303	16.14	21.44	37.58	50.16	-12.58	AVG	
5		0.559	19.37	21.44	40.81	56.00	-15.19	QP	
6		0.559	11.70	21.44	33.14	46.00	-12.86	AVG	
7		0.942	15.46	21.82	37.28	56.00	-18.72	QP	
8		0.942	8.75	21.82	30.57	46.00	-15.43	AVG	
9		1.550	14.38	22.12	36.50	56.00	-19.50	QP	
10		1.550	6.54	22.12	28.66	46.00	-17.34	AVG	
11		13.187	14.54	22.74	37.28	60.00	-22.72	QP	
12		13.187	2.19	22.74	24.93	50.00	-25.07	AVG	

***Note: 1) Pre-scan all modes and recorded the worst case results in this report.

2) Margin= Reading level + Correct factor-Limit

Correct Factor=Lisn Factor+Cable Factor+Insertion loss of Pulse Limiter






4.2 Radiated emissions (Below 1GHz)

Test Requirement:	15.109, Class B				
Test Limit:	Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:				
	Frequency of emission (MHz)		Field strength @3m		Field strength @10m
			(uV/m)	(dBuV/m)	(uV/m) (dBuV/m)
	30 – 88	100	40	30	29.5
	88 – 216	150	43.5	45	33.1
	216 – 960	200	46	60	35.6
	Above 960	500	54	150	43.5
Test Method:	ANSI C63.4-2014				
Procedure:	An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities. Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor				

4.2.1 E.U.T. Operation:

Operating Environment:			
Temperature:	26.4 °C	Humidity:	54.2 %
Pre test mode:	TM1		
Final test mode:	TM1		

4.2.2 Test Setup Diagram:

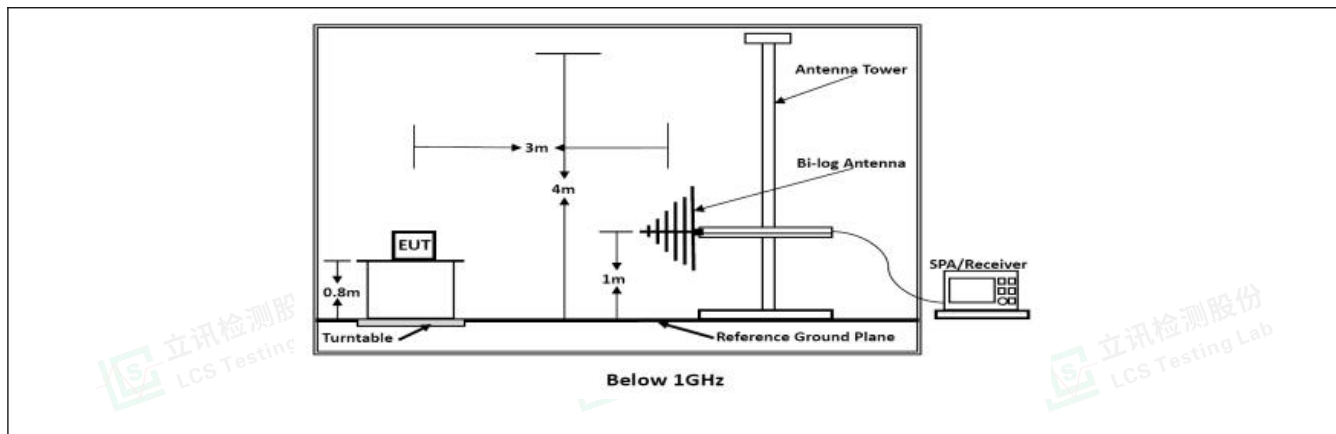



4.2.3 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$


Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	





4.2.4 Test Data:

TM1 / Polarization: Horizontal

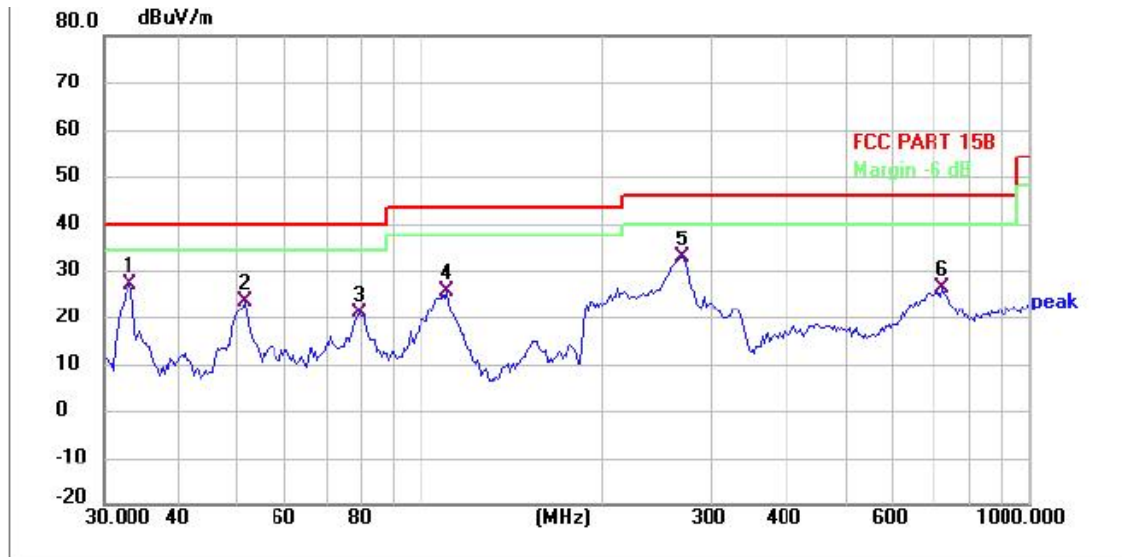


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	33.101	45.67	-18.56	27.11	40.00	-12.89	QP	P	
2	51.176	40.25	-17.02	23.23	40.00	-16.77	QP	P	
3	79.119	42.25	-21.43	20.82	40.00	-19.18	QP	P	
4	110.082	42.67	-17.29	25.38	43.50	-18.12	QP	P	
5	268.721	49.84	-17.00	32.84	46.00	-13.16	QP	P	
6	723.793	35.83	-9.62	26.21	46.00	-19.79	QP	P	





TM1 / Polarization: Vertical

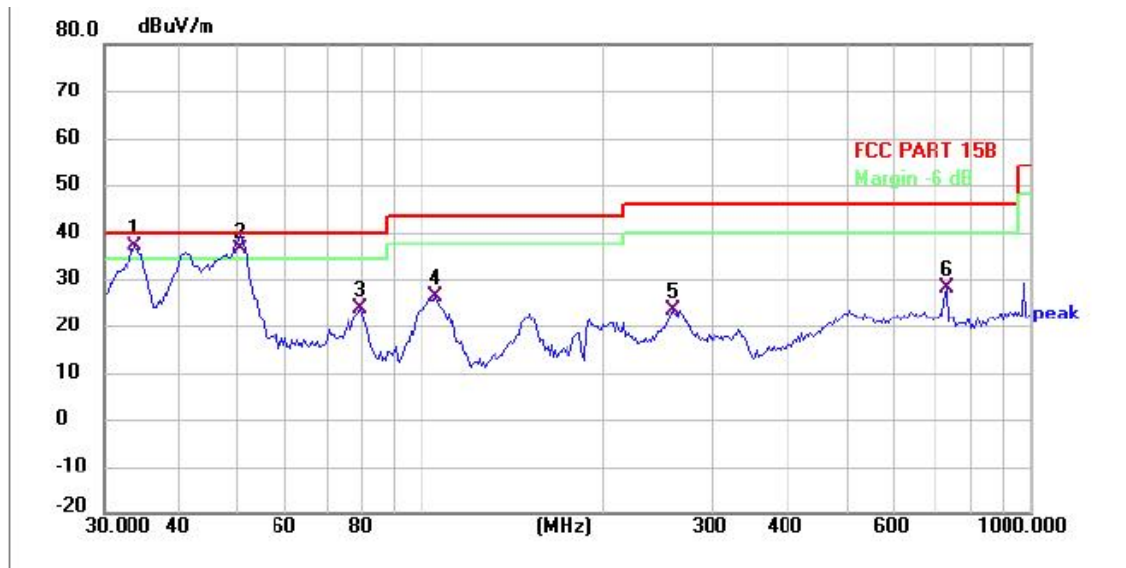

Note:1).Pre-Scan all mode, Thus record worse case mode result in this report.

2) Margin= Reading level + Correct factor – Limit

Correct Factor=Antenna Factor+Cable Factor- Pre-amplifier Factor






4.3 Radiated emissions (Above 1GHz)

Test Requirement:	15.109, Class B			
Test Limit:	Frequency of emission (MHz)	Field strength @3m		
		Average (uV/m)	Average(d BuV/m)	Peak (dBuV/m)
	Above 1GHz	500	54	74
Test Method:	ANSI C63.4-2014			
Procedure:	An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. For below 1GHz test, Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities. For above 1GHz test, Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities. Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor			

4.3.1 E.U.T. Operation:

Operating Environment:			
Temperature:	23.5 °C	Humidity:	52.1 %
Pre test mode:	TM1		
Final test mode:	TM1		

4.3.2 Test Setup Diagram:

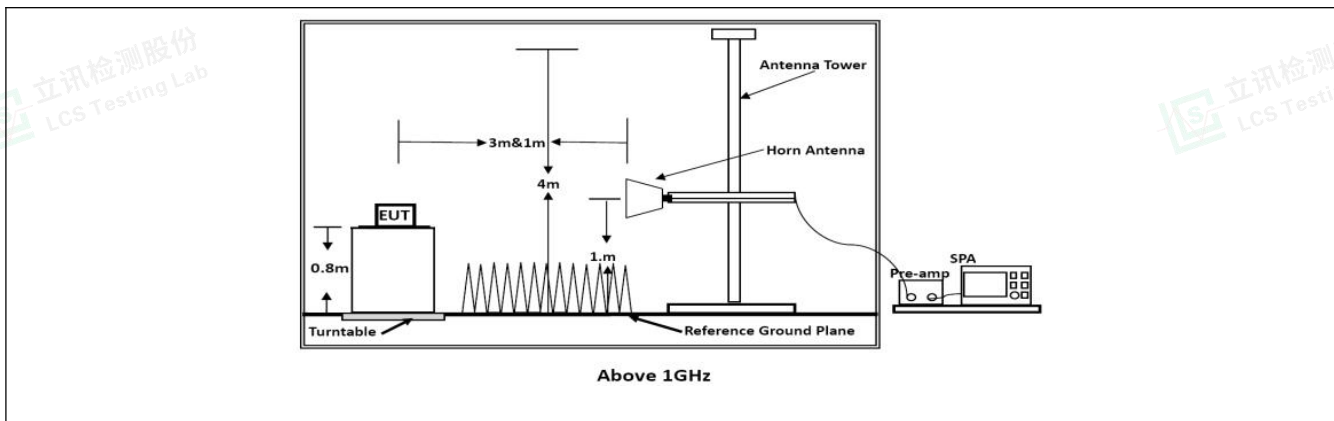

4.3.3 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$


Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	





4.3.4 Test Data:

TM1 / Polarization: Horizontal

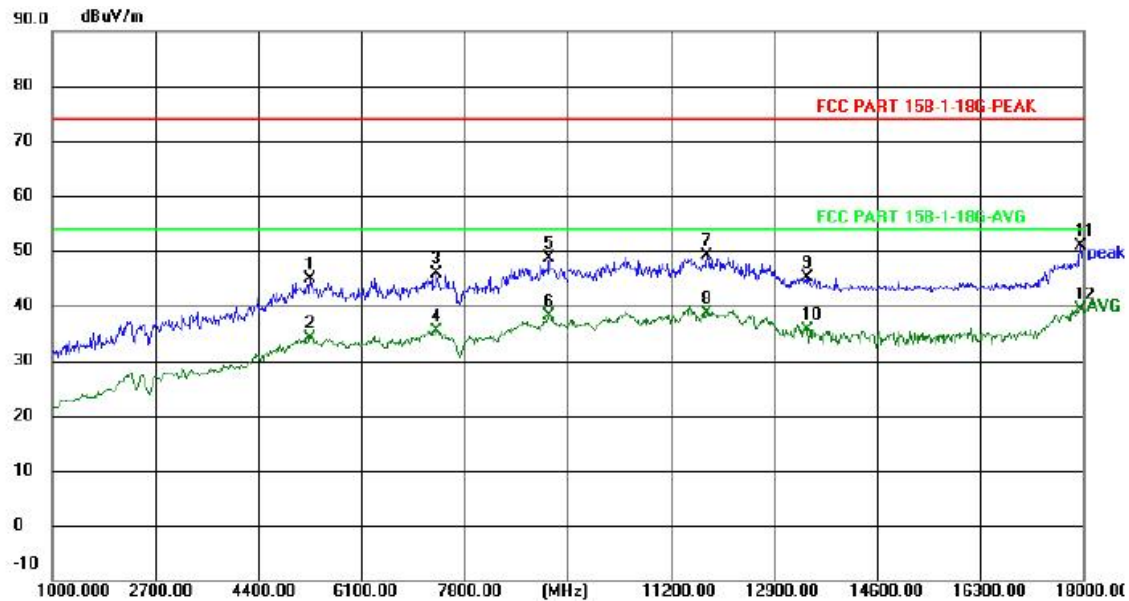

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5250.000	46.84	-2.07	44.77	74.00	-29.23	peak	P
2	5250.000	36.26	-2.07	34.19	54.00	-19.81	AVG	P
3	7341.000	44.40	1.44	45.84	74.00	-28.16	peak	P
4	7341.000	33.84	1.44	35.28	54.00	-18.72	AVG	P
5	9194.000	43.86	4.80	48.66	74.00	-25.34	peak	P
6	9194.000	33.27	4.80	38.07	54.00	-15.93	AVG	P
7	11795.000	43.18	5.94	49.12	74.00	-24.88	peak	P
8	11795.000	32.80	5.94	38.74	54.00	-15.26	AVG	P
9	13444.000	36.97	8.27	45.24	74.00	-28.76	peak	P
10	13444.000	27.41	8.27	35.68	54.00	-18.32	AVG	P
11	17966.000	33.40	17.36	50.76	74.00	-23.24	peak	P
12	17966.000	22.09	17.36	39.45	54.00	-14.55	AVG	P



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



TM1 / Polarization: Vertical

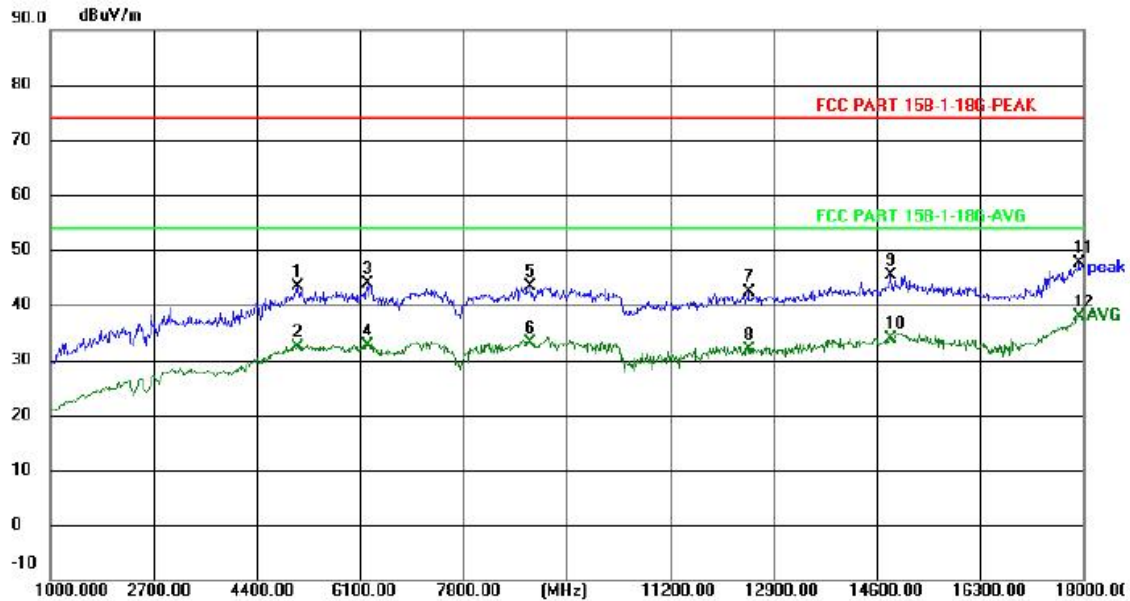

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5063.000	47.42	-4.00	43.42	74.00	-30.58	peak	P
2	5063.000	36.30	-4.00	32.30	54.00	-21.70	AVG	P
3	6219.000	46.49	-2.71	43.78	74.00	-30.22	peak	P
4	6219.000	35.34	-2.71	32.63	54.00	-21.37	AVG	P
5	8905.000	41.62	1.77	43.39	74.00	-30.61	peak	P
6	8905.000	31.47	1.77	33.24	54.00	-20.76	AVG	P
7	12492.000	35.80	6.46	42.26	74.00	-31.74	peak	P
8	12492.000	25.34	6.46	31.80	54.00	-22.20	AVG	P
9	14838.000	35.59	9.87	45.46	74.00	-28.54	peak	P
10	14838.000	23.92	9.87	33.79	54.00	-20.21	AVG	P
11	17949.000	30.18	17.34	47.52	74.00	-26.48	peak	P
12	17949.000	20.44	17.34	37.78	54.00	-16.22	AVG	P

Note:1).Pre-Scan all mode, Thus record worse case mode result in this report.

2) Margin= Reading level + Correct factor – Limit

Correct Factor=Antenna Factor+Cable Factor- Pre-amplifier Factor





5. TEST SETUP PHOTOS

Refer to Appendix - Test Setup Photos for LCSA09304089E.docx

6. EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)

Refer to Appendix - EUT Photos for LCSA09304089E.docx

--- End of Report ---

