
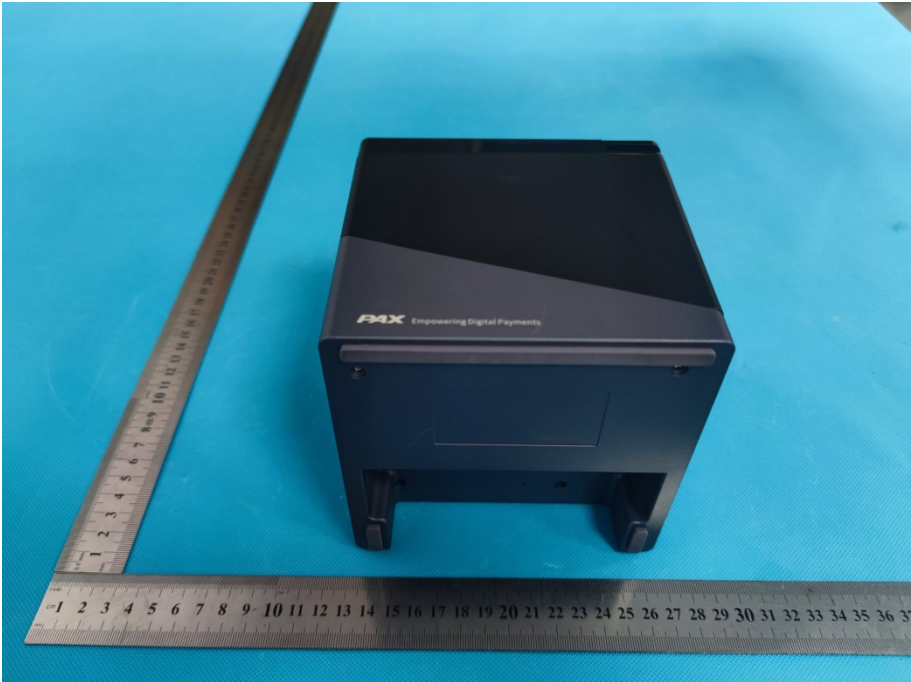


EXHIBIT 2 - EUT EXTERNAL PHOTOGRAPHS

EUT View 1	
EUT View 2	

EUT View 3	 A photograph of the device from the rear, showing ports and a ruler for scale. The device is dark grey with a lighter grey diagonal stripe. The rear panel features two RJ45 ports, an RS232 port, and a DC power input. A ruler is placed vertically to the left and horizontally below the device for scale.
EUT View 4	 A photograph of the device from the front, showing the 'MAX' logo and a ruler for scale. The device is dark grey with a lighter grey diagonal stripe. The front panel features a small display screen and a button. A ruler is placed vertically to the left and horizontally below the device for scale.

EUT View 5	 A black rectangular device is shown from a side-on perspective. A metal ruler is placed horizontally in front of the device, and another ruler is placed vertically to its left. The device has a small white logo on its right side. The background is a light blue surface.
EUT View 6	 A black rectangular device is shown from a front-on perspective. A metal ruler is placed horizontally in front of the device, and another ruler is placed vertically to its left. The device features a front panel with a circular power button, a small display, and several indicator lights labeled 'POWER', 'ERROR', and 'FAULT'. A red power button is also visible on the right side of the front panel. The background is a light blue surface.

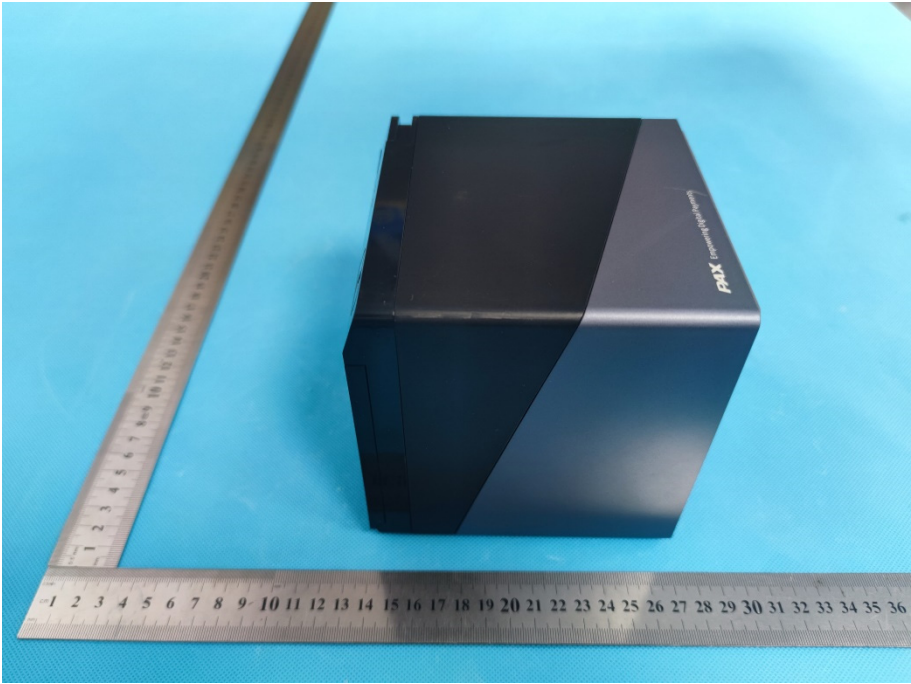