

FCC PART 15.247
RSS-GEN, ISSUE 4, NOVEMBER 2014
RSS-247, ISSUE 2, FEBRUARY 2017
TEST REPORT

For

Fujian LANDI Commercial Equipment Co., Ltd.

Building 17, Section A, Software Park, No. 89 Software Road, Gulou District, Fuzhou
Municipality, Fujian Province, P.R. China.

FCC ID: 2AG6N-APOSA8-BLWF
IC: 23725-APOSA8BLWF

Report Type: Original Report	Product Name: APOS A8
Report Number: RXM171225055-00C	
Report Date: 2018-03-14	
Jerry Zhang	
Reviewed By:	EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).
This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	9
SUPPORT EQUIPMENT LIST AND DETAILS	9
SUPPORT CABLE LIST AND DETAILS	9
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS	11
FCC §15.247 (i) & §1.1310 & §2.1093 & RSS-102 CLAUSE 4- RF EXPOSURE.....	12
APPLICABLE STANDARD	12
TEST RESULT	12
FCC §15.203& RSS-GEN CLAUSE 8.3 - ANTENNA REQUIREMENT	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) & RSS-Gen CLAUSE 8.8– AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA	16
FCC §15.209, §15.205 & §15.247(d) &RSS-247 CLAUSE 5.5, RSS-GEN CLAUSE 8.10- SPURIOUS EMISSIONS	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	21
TEST PROCEDURE	21
CORRECTED AMPLITUDE & MARGIN CALCULATION	21
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST DATA	22
FCC §15.247(a) (2)& & RSS-247 CLAUSE 5.2 a) &RSS-247 CLAUSE 5.2 a) &RSS-GEN CLAUSE 6.6–6 dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §15.247(b) (3) &RSS-247 CLAUSE 5.4 d)- MAXIMUM PEAK CONDUCTED OUTPUT POWER	48

APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST EQUIPMENT LIST AND DETAILS.....	49
TEST DATA	49
FCC §15.247(d) & RSS-247 CLAUSE 5.5– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	50
APPLICABLE STANDARD	50
TEST PROCEDURE	50
TEST EQUIPMENT LIST AND DETAILS.....	51
TEST DATA	51
FCC §15.247(e) & RSS-247 CLAUSE 5.2 b - POWER SPECTRAL DENSITY	56
APPLICABLE STANDARD	56
TEST PROCEDURE	56
TEST EQUIPMENT LIST AND DETAILS.....	56
TEST DATA	56

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		APOS A8
EUT Model:		APOS A8-I94A4
FCC ID:		2AG6N-APOSA8-BLWF
IC:		23725-APOSA8BLWF
Rated Input Voltage:		DC7.2V from battery or DC 5V from USB port
Adapter #1 Information	Model:	HKA00505010-XA
	Input:	AC 100-240V, 50/60Hz, 0.2A
	Output:	DC 5V, 1.0A
Adapter #2 Information	Model:	HKC0115021-2D
	Input:	AC 100-240V, 50/60Hz, 0.5A
	Output:	DC 5V, 2A
External Dimension:		Length (183mm)*Width (84mm)*High (64mm)
Serial Number:		171225055
EUT Received Date:		2018.1.26

Objective

This report is prepared on behalf of **Fujian LANDI Commercial Equipment Co., Ltd.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 4, November 2014 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 4, November 2014 of the Innovation, Science and Economic Development Canada.

Related Submittal(s)/Grant(s)

FCC Part 15E NII submissions with FCC ID: 2AG6N-APOSA8-BLWF.
 FCC Part 15C DSS submissions with FCC ID: 2AG6N-APOSA8-BLWF.
 FCC Part 15C DXX submissions with FCC ID: 2AG6N-APOSA8-BLWF.
 RSS-247 DSSs, RSS-247 LE-LAN, RSS-210 submissions with IC: 23725-APOSA8BLWF.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 558074 D01 DTS Meas Guidance v04 and RSS-247, Issue 2, February 2017, RSS-Gen Issue 4, November 2014 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218,the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11 n20 modes were test with channel 1,6,11. For 802.11 n40 mode were test with channel 3,6,9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.


EUT Exercise Software

The software “QRCT.exe” was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:

Mode	Channel	Frequency (MHz)	Data rate (Mbps)	Power level
802.11b	Low	2412	1	17
	Middle	2437	1	17
	High	2462	1	17
802.11g	Low	2412	6	21
	Middle	2437	6	20
	High	2462	6	16
802.11 n20	Low	2412	MCS0	20
	Middle	2437	MCS0	20
	High	2462	MCS0	15
80.211 n40	Low	2422	MCS0	20
	Middle	2437	MCS0	21
	High	2452	MCS0	16


The maximum duty cycle as following table:

Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	8.24	8.44	97.63
802.11g	1.37	1.57	87.26
802.11 n20	1.28	1.47	87.07
802.11 n40	0.638	0.840	75.95

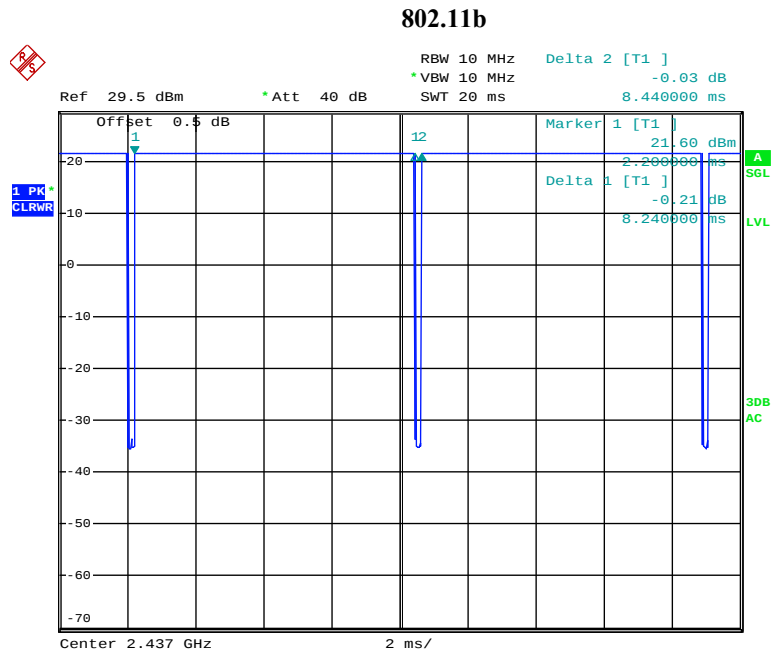


Date: 31.JAN.2018 09:19:45

802.11g

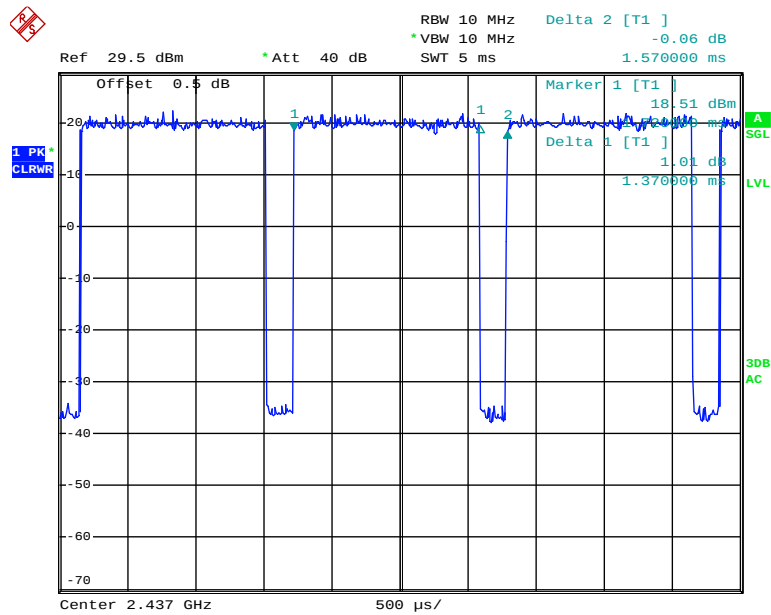


Date: 31.JAN.2018 09:20:43

802.11 n20

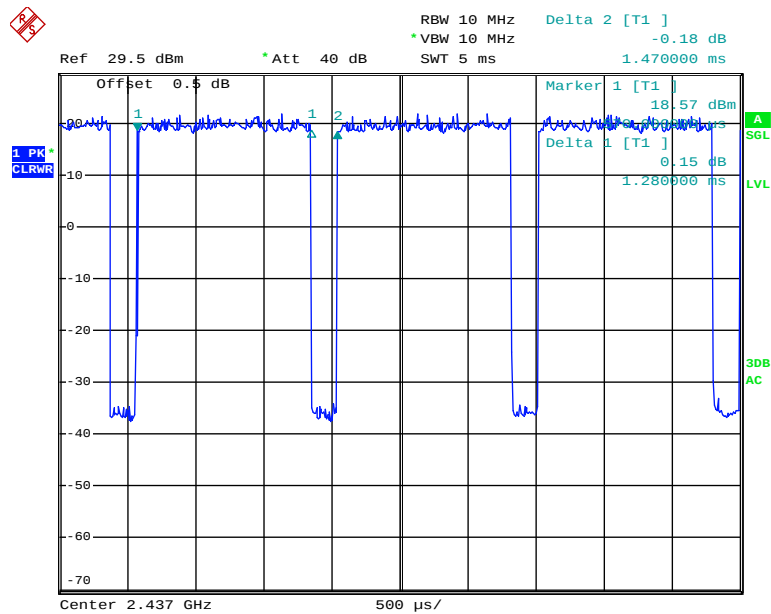

Date: 31.JAN.2018 09:21:52

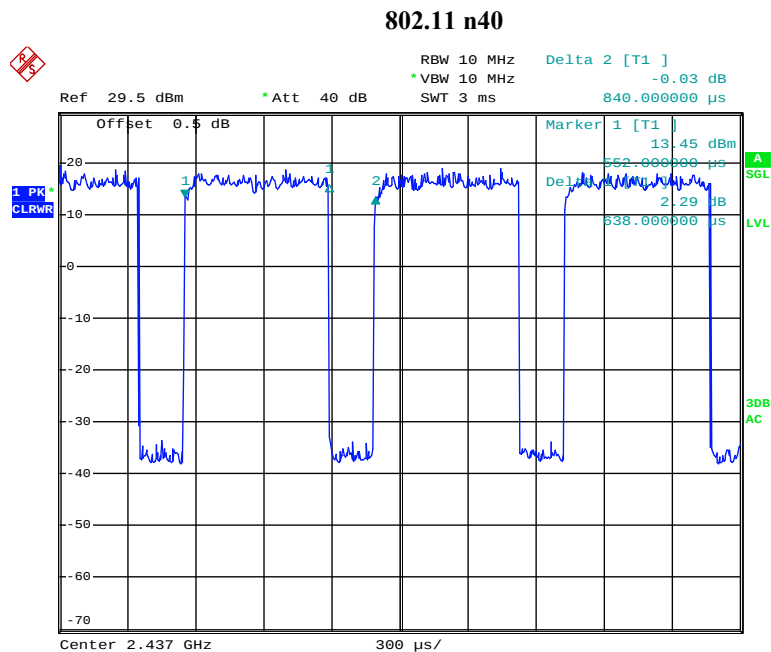

Date: 31.JAN.2018 09:22:52

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
HUAWEI	Earphone	/	/

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB cable	yes	No	0.8	Adapter	EUT

Block Diagram of Test Setup

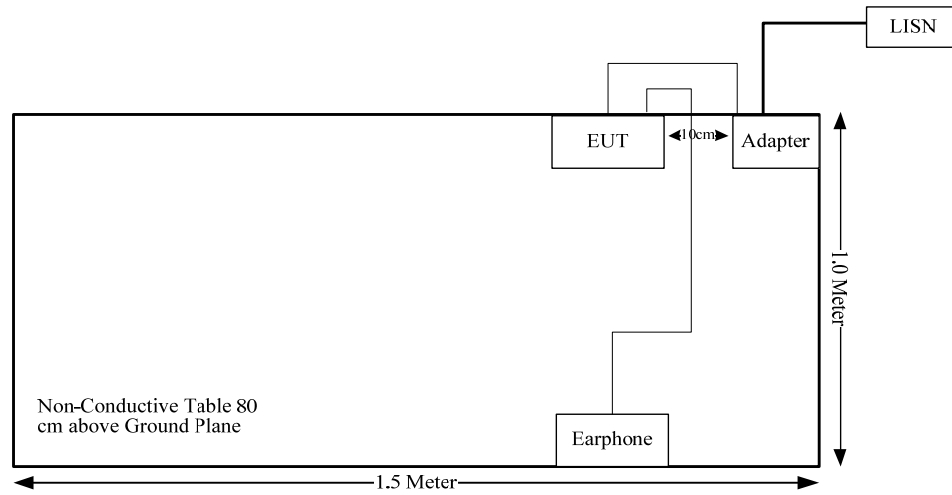

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093 RSS-102 Clause 4	RF Exposure	Compliance
§15.203 RSS-GEN Clause 8.3	Antenna Requirement	Compliance
§15.207 (a) RSS-Gen Clause 8.8	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d) RSS-247 Clause 5.5 RSS-Gen Clause 8.10	Spurious Emissions	Compliance
§15.247 (a)(2) RSS-247 Clause 5.2 a)	6 dB Bandwidth and 99% Occupied Bandwidth	Compliance
§15.247(b)(3) RSS-247 Clause 5.4 d)	Maximum Conducted Output Power	Compliance
§15.247(d) RSS-247 Clause 5.5	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e) RSS-247 Clause 5.2 b)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093 & RSS-102 CLAUSE 4- RF EXPOSURE**Applicable Standard**

According to §15.247(i), §1.1310 and §2.1093.

According to RSS-102 Clause 4 Table 3, SAR limits for device used by the general public.

Body Region	Average SAR (W/Kg)	Averaging Time (minutes)	Mass Average (g)
Whole Body	0.08	6	Whole Body
Localized Head, Neck and Trunk	1.6	6	1
Localized Limbs	4	6	10

Test Result

Compliant, please refer to the SAR report: RXM171225055-20.

FCC §15.203& RSS-GEN CLAUSE 8.3 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

According to RSS-Gen §8.3, The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the licence-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level.⁹ When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

This radio transmitter (identify the device by certification number or model number if Category II) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dBi).

Antenna Connector Construction

The EUT has one internal antenna arrangement for WLAN, and the antenna gain is 2.31 dBi in 2.4GHz band, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) & RSS-Gen CLAUSE 8.8– AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a) and RSS-Gen§8.8.

EUT Setup

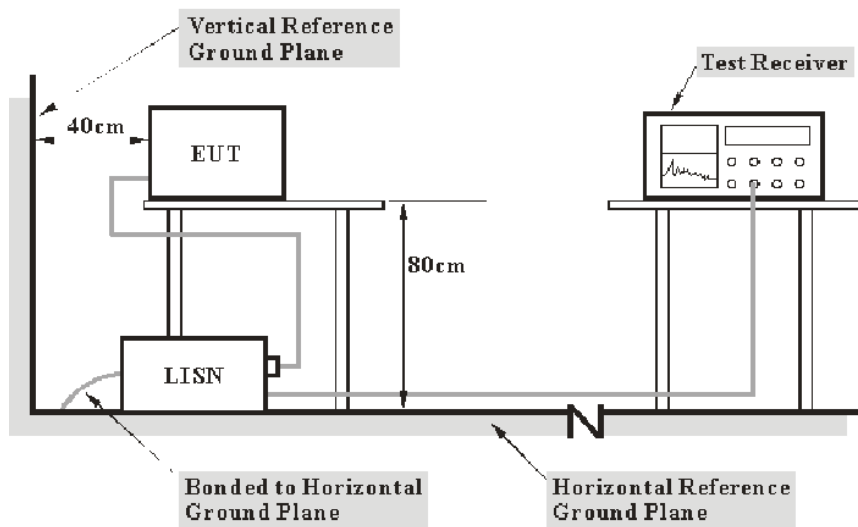

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 and RSS-Gen limits

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
N/A	Coaxial Cable	C-NJNJ-50	C-0200-01	2017-09-05	2018-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08
R&S	L.I.S.N	ESH2-Z5	892107/021	2017-9-25	2018-9-25

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data

Environmental Conditions

Temperature:	19.4°C
Relative Humidity:	26%
ATM Pressure:	102.1 kPa

The testing was performed by Alex You on 2018-02-06.

Model Number: APOS A8-I94A4
 Port: L
 Test Mode: Transmitting
 Power Source: AC 120V/60Hz
 Note: Adapter #1

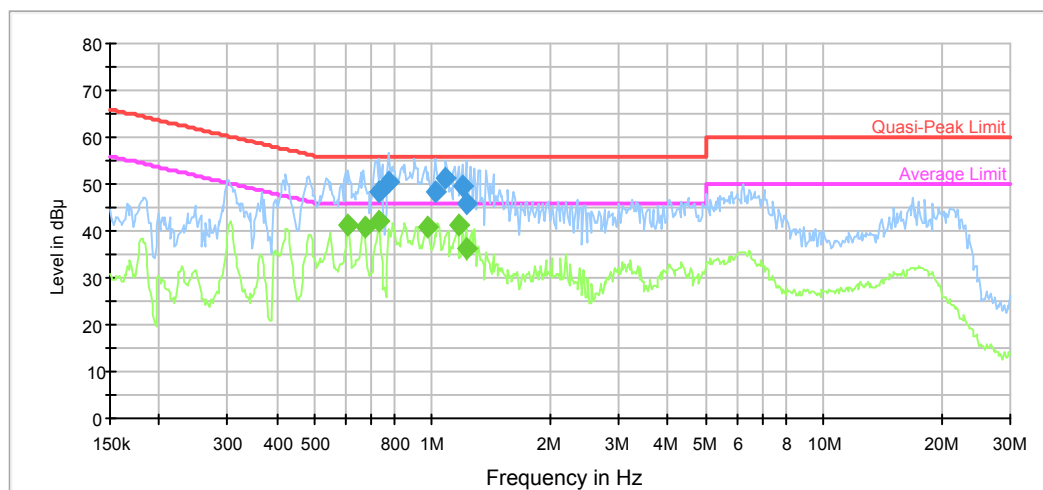


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.732382	48.3	9.000	L1	9.8	7.7	56.0
0.774393	50.5	9.000	L1	9.8	5.5	56.0
1.015358	48.4	9.000	L1	9.8	7.6	56.0
1.082190	51.2	9.000	L1	9.8	4.8	56.0
1.200302	49.4	9.000	L1	9.8	6.6	56.0
1.219583	46.0	9.000	L1	9.8	10.0	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.609741	41.4	9.000	L1	9.8	4.6	46.0
0.670921	40.7	9.000	L1	9.8	5.3	46.0
0.732382	42.0	9.000	L1	9.8	4.0	46.0
0.975701	41.0	9.000	L1	9.8	5.0	46.0
1.162648	41.1	9.000	L1	9.8	4.9	46.0
1.219583	36.1	9.000	L1	9.8	9.9	46.0

Model Number: APOS A8-I94A4
Port: N
Test Mode: Transmitting
Power Source: AC 120V/60Hz
Note: Adapter #1

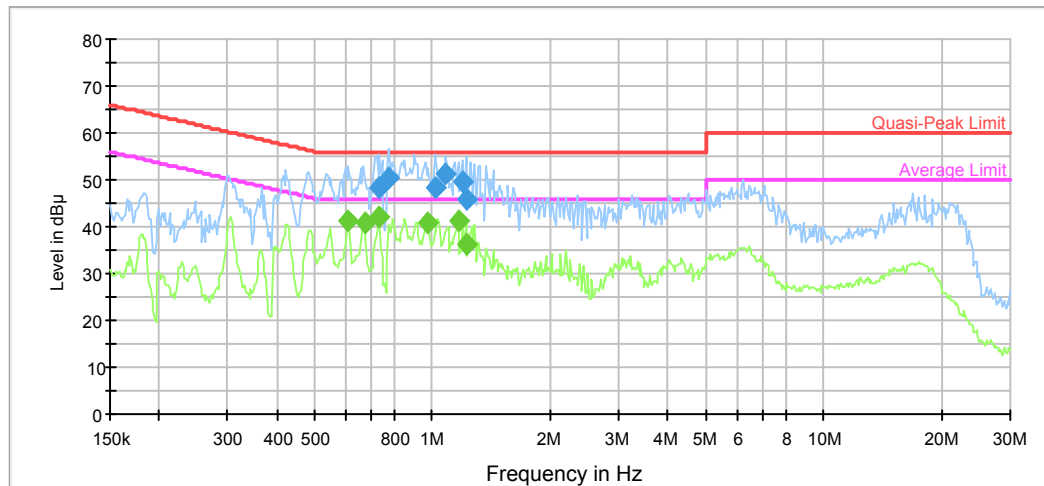


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.732382	48.3	9.000	L1	9.8	7.7	56.0
0.774393	50.5	9.000	L1	9.8	5.5	56.0
1.015358	48.4	9.000	L1	9.8	7.6	56.0
1.082190	51.2	9.000	L1	9.8	4.8	56.0
1.200302	49.4	9.000	L1	9.8	6.6	56.0
1.219583	46.0	9.000	L1	9.8	10.0	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.609741	41.4	9.000	L1	9.8	4.6	46.0
0.670921	40.7	9.000	L1	9.8	5.3	46.0
0.732382	42.0	9.000	L1	9.8	4.0	46.0
0.975701	41.0	9.000	L1	9.8	5.0	46.0
1.162648	41.1	9.000	L1	9.8	4.9	46.0
1.219583	36.1	9.000	L1	9.8	9.9	46.0

Model Number: APOS A8-I94A4
Port: L
Test Mode: Transmitting
Power Source: AC 120V/60Hz
Note: Adapter #2

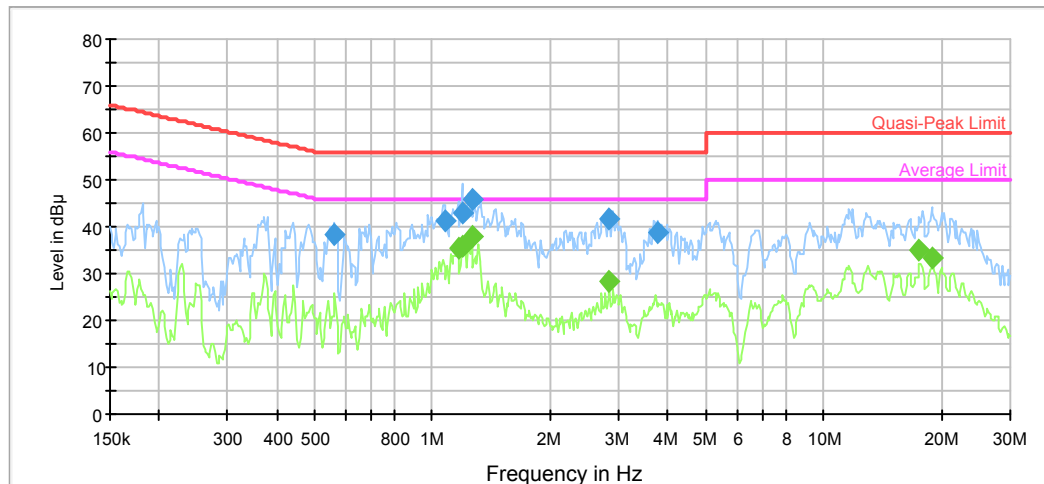


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.563041	38.5	9.000	L1	9.9	17.5	56.0
1.073601	41.2	9.000	L1	9.8	14.8	56.0
1.190776	42.7	9.000	L1	9.8	13.3	56.0
1.259081	46.0	9.000	L1	9.8	10.0	56.0
2.838101	41.7	9.000	L1	9.8	14.3	56.0
3.781003	38.8	9.000	L1	9.8	17.2	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.162648	35.5	9.000	L1	9.8	10.5	46.0
1.190776	35.8	9.000	L1	9.8	10.2	46.0
1.259081	38.0	9.000	L1	9.8	8.0	46.0
2.838101	28.3	9.000	L1	9.8	17.7	46.0
17.599071	34.8	9.000	L1	10.0	15.2	50.0
19.058779	33.5	9.000	L1	10.1	16.5	50.0

Model Number: APOS A8-I94A4
 Port: N
 Test Mode: Transmitting
 Power Source: AC 120V/60Hz
 Note: Adapter #2

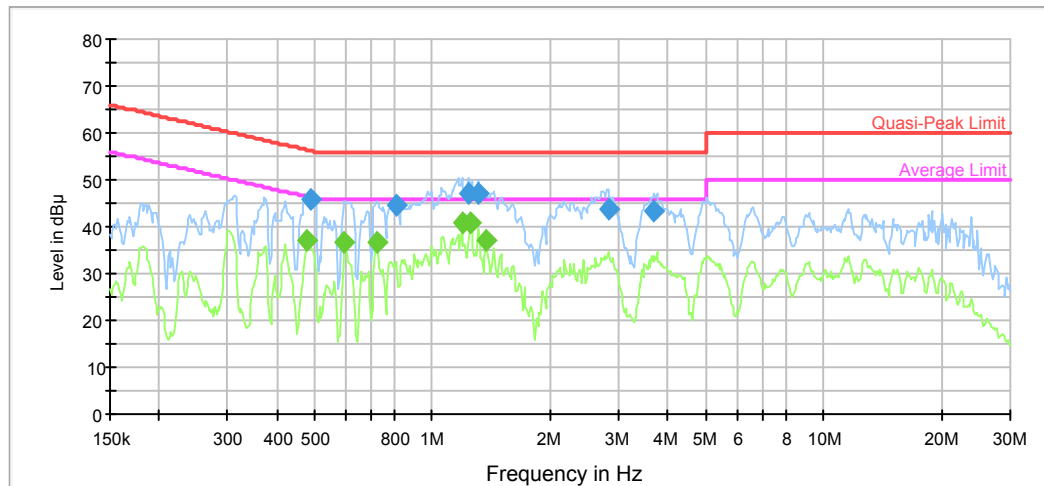

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.487810	45.9	9.000	N	9.9	10.3	56.2
0.805868	44.6	9.000	N	9.8	11.4	56.0
1.239175	46.9	9.000	N	9.8	9.1	56.0
1.310256	46.9	9.000	N	9.8	9.1	56.0
2.815577	43.9	9.000	N	9.8	12.1	56.0
3.691692	43.4	9.000	N	9.8	12.6	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.480097	36.9	9.000	N	9.9	9.4	46.3
0.595338	36.7	9.000	N	9.8	9.3	46.0
0.720803	36.7	9.000	N	9.8	9.3	46.0
1.190776	40.6	9.000	N	9.8	5.4	46.0
1.249088	41.0	9.000	N	9.8	5.0	46.0
1.374420	37.0	9.000	N	9.7	9.0	46.0


FCC §15.209, §15.205 & §15.247(d) & RSS-247 CLAUSE 5.5, RSS-GEN CLAUSE 8.10- SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205 and RSS-247 §5.5, RSS-GEN §8.10.

EUT Setup

Below 1GHz:

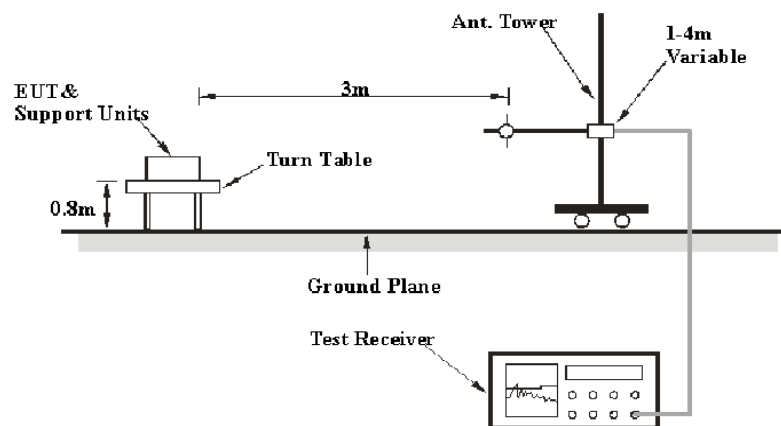

Above 1GHz:

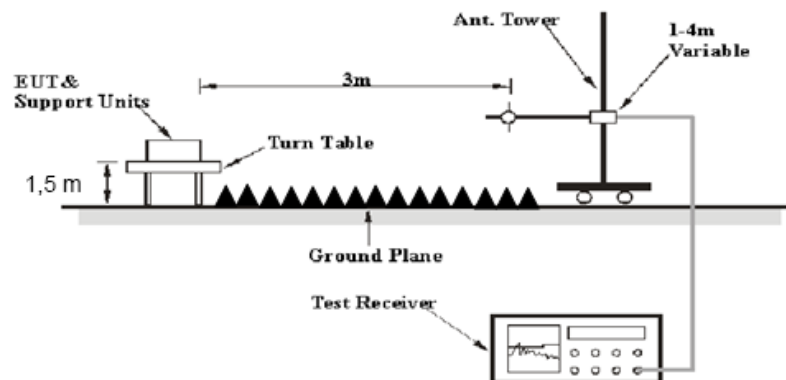

The radiated emission tests were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits and RSS-247 §5.5, RSS-Gen §8.10 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Detector	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2017-06-27	2018-06-27
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
N/A	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2017-06-27	2018-06-27
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2017-09-05	2018-09-05
Chengdu OuLi	Band Rejector Filter	2400-2483.5	001	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	18.3 °C
Relative Humidity:	38 %
ATM Pressure:	102 kPa


The testing was performed by Steve Zuo on 2018-02-03

Test Result: Compliance, please Refer to the following data

Test Mode: Transmitting

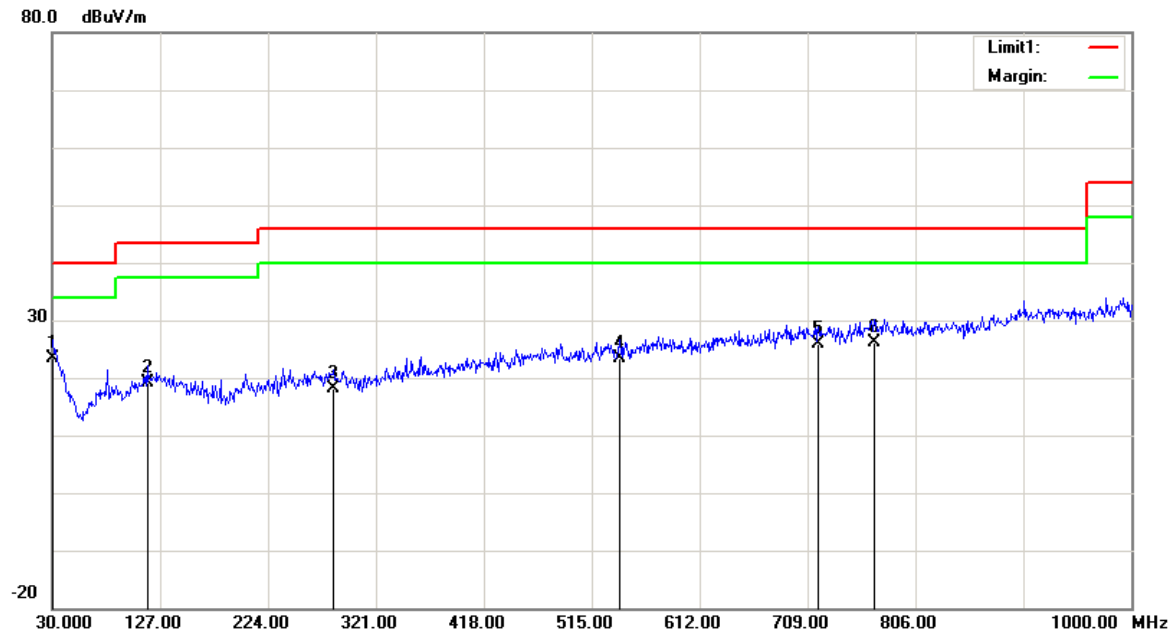1) 30MHz-1GHz(802.11b mode Middle channel was the worst)*Adapter #1***Horizontal:**


Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	22.42	QP	1.08	23.50	40.00	16.50
115.3600	24.39	QP	-5.19	19.20	43.50	24.30
283.1700	21.81	QP	-3.71	18.10	46.00	27.90
540.2200	23.85	QP	-0.35	23.50	46.00	22.50
718.7000	23.00	QP	2.90	25.90	46.00	20.10
769.1400	22.38	QP	3.72	26.10	46.00	19.90

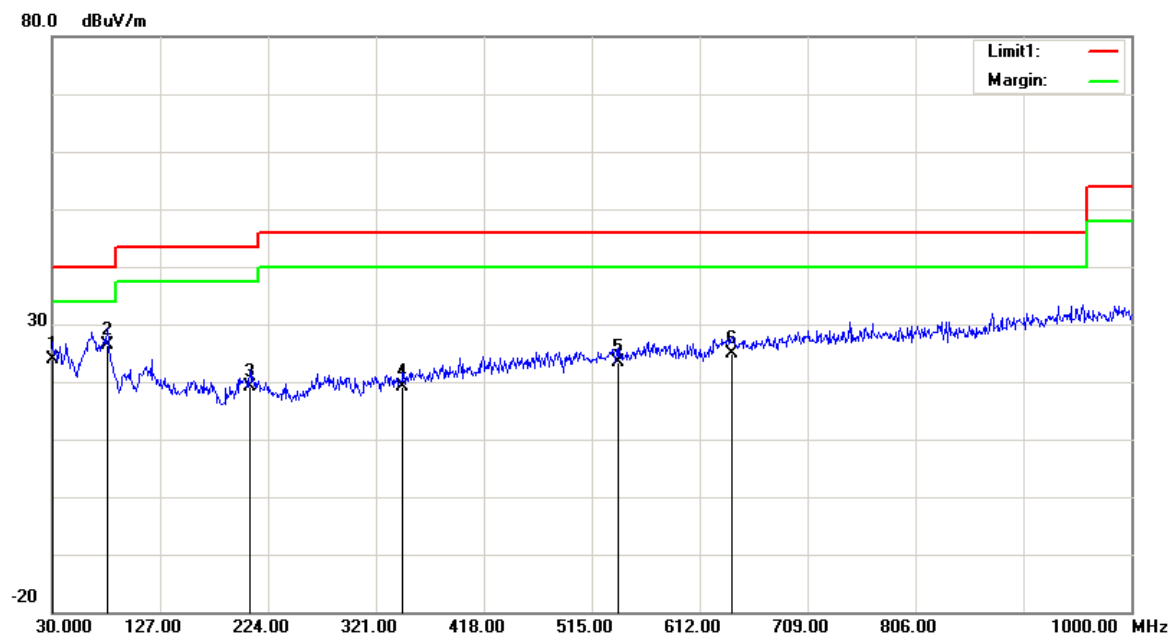Vertical:


Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	22.72	QP	1.08	23.80	40.00	16.20
79.4700	37.41	QP	-11.11	26.30	40.00	13.70
207.5100	26.57	QP	-7.37	19.20	43.50	24.30
345.2500	22.52	QP	-3.32	19.20	46.00	26.80
539.2500	23.84	QP	-0.34	23.50	46.00	22.50
641.1000	22.97	QP	1.83	24.80	46.00	21.20

Adapter #2

Horizontal:

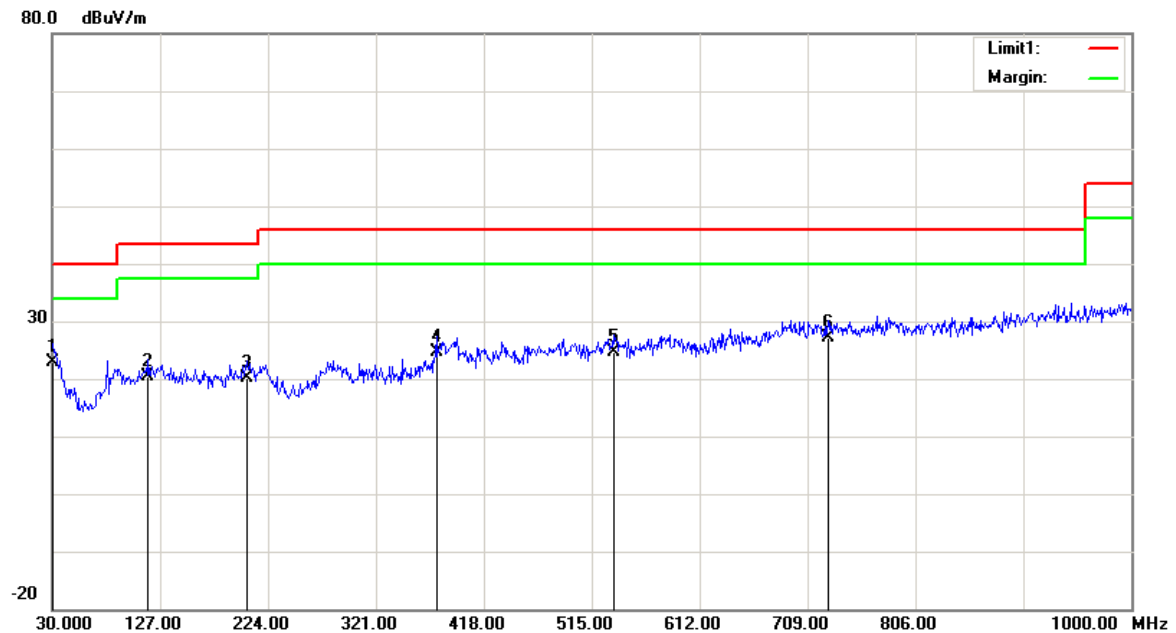

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.9700	22.65	QP	0.35	23.00	40.00	17.00
116.3300	25.51	QP	-5.11	20.40	43.50	23.10
205.5700	27.15	QP	-7.05	20.10	43.50	23.40
375.3200	27.37	QP	-2.77	24.60	46.00	21.40
534.4000	24.86	QP	-0.26	24.60	46.00	21.40
727.4300	24.39	QP	2.81	27.20	46.00	18.80

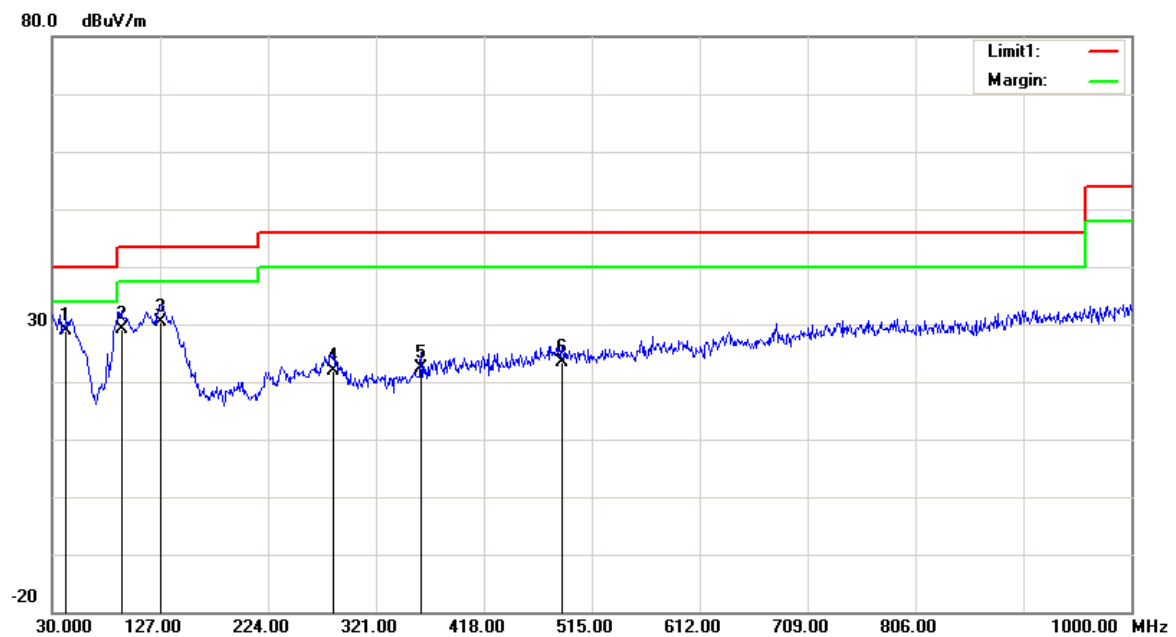Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
42.6100	36.95	QP	-8.05	28.90	40.00	11.10
92.0800	39.80	QP	-10.60	29.20	43.50	14.30
127.9700	35.41	QP	-5.01	30.40	43.50	13.10
283.1700	25.61	QP	-3.71	21.90	46.00	24.10
361.7400	25.20	QP	-2.90	22.30	46.00	23.70
487.8400	24.76	QP	-1.26	23.50	46.00	22.50

2) 1-25GHz(Adapter #1 was the worst):**802.11b Mode**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	73.69	PK	H	28.12	1.81	0.00	103.62	N/A	N/A
2412.00	69.53	AV	H	28.12	1.81	0.00	99.46	N/A	N/A
2412.00	71.24	PK	V	28.12	1.81	0.00	101.17	N/A	N/A
2412.00	67.42	AV	V	28.12	1.81	0.00	97.35	N/A	N/A
2390.00	24.76	PK	H	28.08	1.80	0.00	54.64	74.00	19.36
2390.00	13.48	AV	H	28.08	1.80	0.00	43.36	54.00	10.64
4824.00	55.07	PK	H	32.95	3.19	37.20	54.01	74.00	19.99
4824.00	49.63	AV	H	32.95	3.19	37.20	48.57	54.00	5.43
7236.00	46.53	PK	H	35.81	4.77	37.27	49.84	74.00	24.16
7236.00	34.82	AV	H	35.81	4.77	37.27	38.13	54.00	15.87
Middle Channel: 2437 MHz									
2437.00	74.14	PK	H	28.17	1.82	0.00	104.13	N/A	N/A
2437.00	70.26	AV	H	28.17	1.82	0.00	100.25	N/A	N/A
2437.00	70.83	PK	V	28.17	1.82	0.00	100.82	N/A	N/A
2437.00	66.54	AV	V	28.17	1.82	0.00	96.53	N/A	N/A
4874.00	54.58	PK	H	33.05	3.26	37.21	53.68	74.00	20.32
4874.00	48.25	AV	H	33.05	3.26	37.21	47.35	54.00	6.65
7311.00	46.39	PK	H	36.01	4.64	37.36	49.68	74.00	24.32
7311.00	34.72	AV	H	36.01	4.64	37.36	38.01	54.00	15.99
High Channel: 2462 MHz									
2462.00	74.95	PK	H	28.22	1.83	0.00	105.00	N/A	N/A
2462.00	70.78	AV	H	28.22	1.83	0.00	100.83	N/A	N/A
2462.00	71.54	PK	V	28.22	1.83	0.00	101.59	N/A	N/A
2462.00	67.83	AV	V	28.22	1.83	0.00	97.88	N/A	N/A
2483.50	25.63	PK	H	28.27	1.84	0.00	55.74	74.00	18.26
2483.50	14.25	AV	H	28.27	1.84	0.00	44.36	54.00	9.64
4924.00	54.45	PK	H	33.15	3.27	37.22	53.65	74.00	20.35
4924.00	48.39	AV	H	33.15	3.27	37.22	47.59	54.00	6.41
7386.00	46.27	PK	H	36.20	4.51	37.46	49.52	74.00	24.48
7386.00	34.58	AV	H	36.20	4.51	37.46	37.83	54.00	16.17

802.11g Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	75.83	PK	H	28.12	1.81	0.00	105.76	N/A	N/A
2412.00	64.49	AV	H	28.12	1.81	0.00	94.42	N/A	N/A
2412.00	73.18	PK	V	28.12	1.81	0.00	103.11	N/A	N/A
2412.00	61.58	AV	V	28.12	1.81	0.00	91.51	N/A	N/A
2390.00	41.44	PK	H	28.08	1.80	0.00	71.32	74.00	2.68
2390.00	22.20	AV	H	28.08	1.80	0.00	52.08	54.00	1.92
4824.00	52.36	PK	H	32.95	3.19	37.20	51.30	74.00	22.70
4824.00	41.49	AV	H	32.95	3.19	37.20	40.43	54.00	13.57
7236.00	46.52	PK	H	35.81	4.77	37.27	49.83	74.00	24.17
7236.00	34.48	AV	H	35.81	4.77	37.27	37.79	54.00	16.21
Middle Channel: 2437 MHz									
2437.00	77.11	PK	H	28.17	1.82	0.00	107.10	N/A	N/A
2437.00	66.34	AV	H	28.17	1.82	0.00	96.33	N/A	N/A
2437.00	73.86	PK	V	28.17	1.82	0.00	103.85	N/A	N/A
2437.00	62.65	AV	V	28.17	1.82	0.00	92.64	N/A	N/A
4874.00	52.42	PK	H	33.05	3.26	37.21	51.52	74.00	22.48
4874.00	41.29	AV	H	33.05	3.26	37.21	40.39	54.00	13.61
7311.00	46.66	PK	H	36.01	4.64	37.36	49.95	74.00	24.05
7311.00	34.48	AV	H	36.01	4.64	37.36	37.77	54.00	16.23
High Channel: 2462 MHz									
2462.00	72.43	PK	H	28.22	1.83	0.00	102.48	N/A	N/A
2462.00	62.34	AV	H	28.22	1.83	0.00	92.39	N/A	N/A
2462.00	70.48	PK	V	28.22	1.83	0.00	100.53	N/A	N/A
2462.00	60.22	AV	V	28.22	1.83	0.00	90.27	N/A	N/A
2483.50	35.64	PK	H	28.27	1.84	0.00	65.75	74.00	8.25
2483.50	17.26	AV	H	28.27	1.84	0.00	47.37	54.00	6.63
4924.00	52.33	PK	H	33.15	3.27	37.22	51.53	74.00	22.47
4924.00	41.28	AV	H	33.15	3.27	37.22	40.48	54.00	13.52
7386.00	46.63	PK	H	36.20	4.51	37.46	49.88	74.00	24.12
7386.00	34.36	AV	H	36.20	4.51	37.46	37.61	54.00	16.39

802.11n20 Mode:




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	77.06	PK	H	28.12	1.81	0.00	106.99	N/A	N/A
2412.00	66.63	AV	H	28.12	1.81	0.00	96.56	N/A	N/A
2412.00	74.64	PK	V	28.12	1.81	0.00	104.57	N/A	N/A
2412.00	64.94	AV	V	28.12	1.81	0.00	94.87	N/A	N/A
2390.00	39.04	PK	H	28.08	1.80	0.00	68.92	74.00	5.08
2390.00	22.11	AV	H	28.08	1.80	0.00	51.99	54.00	2.01
4824.00	50.52	PK	H	32.95	3.19	37.20	49.46	74.00	24.54
4824.00	38.24	AV	H	32.95	3.19	37.20	37.18	54.00	16.82
7236.00	46.75	PK	H	35.81	4.77	37.27	50.06	74.00	23.94
7236.00	34.38	AV	H	35.81	4.77	37.27	37.69	54.00	16.31
Middle Channel: 2437 MHz									
2437.00	77.63	PK	H	28.17	1.82	0.00	107.62	N/A	N/A
2437.00	67.04	AV	H	28.17	1.82	0.00	97.03	N/A	N/A
2437.00	75.03	PK	V	28.17	1.82	0.00	105.02	N/A	N/A
2437.00	64.78	AV	V	28.17	1.82	0.00	94.77	N/A	N/A
4874.00	50.57	PK	H	33.05	3.26	37.21	49.67	74.00	24.33
4874.00	38.32	AV	H	33.05	3.26	37.21	37.42	54.00	16.58
7311.00	46.90	PK	H	36.01	4.64	37.36	50.19	74.00	23.81
7311.00	34.33	AV	H	36.01	4.64	37.36	37.62	54.00	16.38
High Channel: 2462 MHz									
2462.00	75.26	PK	H	28.22	1.83	0.00	105.31	N/A	N/A
2462.00	65.42	AV	H	28.22	1.83	0.00	95.47	N/A	N/A
2462.00	73.29	PK	V	28.22	1.83	0.00	103.34	N/A	N/A
2462.00	63.43	AV	V	28.22	1.83	0.00	93.48	N/A	N/A
2483.50	41.32	PK	H	28.27	1.84	0.00	71.43	74.00	2.57
2483.50	20.31	AV	H	28.27	1.84	0.00	50.42	54.00	3.58
4924.00	50.52	PK	H	33.15	3.27	37.22	49.72	74.00	24.28
4924.00	38.39	AV	H	33.15	3.27	37.22	37.59	54.00	16.41
7386.00	47.06	PK	H	36.20	4.51	37.46	50.31	74.00	23.69
7386.00	34.53	AV	H	36.20	4.51	37.46	37.78	54.00	16.22

802.11n40 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2422 MHz									
2422.00	73.76	PK	H	28.14	1.81	0.00	103.71	N/A	N/A
2422.00	64.42	AV	H	28.14	1.81	0.00	94.37	N/A	N/A
2422.00	71.37	PK	V	28.14	1.81	0.00	101.32	N/A	N/A
2422.00	62.29	AV	V	28.14	1.81	0.00	92.24	N/A	N/A
2390.00	39.79	PK	H	28.08	1.80	0.00	69.67	74.00	4.33
2390.00	20.18	AV	H	28.08	1.80	0.00	50.06	54.00	3.94
4844.00	49.46	PK	H	32.99	3.22	37.20	48.47	74.00	25.53
4844.00	37.55	AV	H	32.99	3.22	37.20	36.56	54.00	17.44
7266.00	46.88	PK	H	35.89	4.72	37.31	50.18	74.00	23.82
7266.00	34.63	AV	H	35.89	4.72	37.31	37.93	54.00	16.07
Middle Channel: 2437 MHz									
2437.00	74.86	PK	H	28.17	1.82	0.00	104.85	N/A	N/A
2437.00	65.15	AV	H	28.17	1.82	0.00	95.14	N/A	N/A
2437.00	72.64	PK	V	28.17	1.82	0.00	102.63	N/A	N/A
2437.00	62.79	AV	V	28.17	1.82	0.00	92.78	N/A	N/A
4874.00	49.51	PK	H	33.05	3.26	37.21	48.61	74.00	25.39
4874.00	37.55	AV	H	33.05	3.26	37.21	36.65	54.00	17.35
7311.00	46.98	PK	H	36.01	4.64	37.36	50.27	74.00	23.73
7311.00	34.61	AV	H	36.01	4.64	37.36	37.90	54.00	16.10
High Channel: 2452 MHz									
2452.00	69.84	PK	H	28.20	1.83	0.00	99.87	N/A	N/A
2452.00	60.05	AV	H	28.20	1.83	0.00	90.08	N/A	N/A
2452.00	67.23	PK	V	28.20	1.83	0.00	97.26	N/A	N/A
2452.00	58.16	AV	V	28.20	1.83	0.00	88.19	N/A	N/A
2483.50	37.89	PK	H	28.27	1.84	0.00	68.00	74.00	6.00
2483.50	21.69	AV	H	28.27	1.84	0.00	51.80	54.00	2.20
4904.00	49.39	PK	H	33.11	3.30	37.21	48.59	74.00	25.41
4904.00	37.46	AV	H	33.11	3.30	37.21	36.66	54.00	17.34
7356.00	47.03	PK	H	36.13	4.56	37.42	50.30	74.00	23.70
7356.00	34.48	AV	H	36.13	4.56	37.42	37.75	54.00	16.25




**Test plots(802.11b Low channel was the worst)
Horizontal:**

Fundamental
Test with Band
Rejection Filter

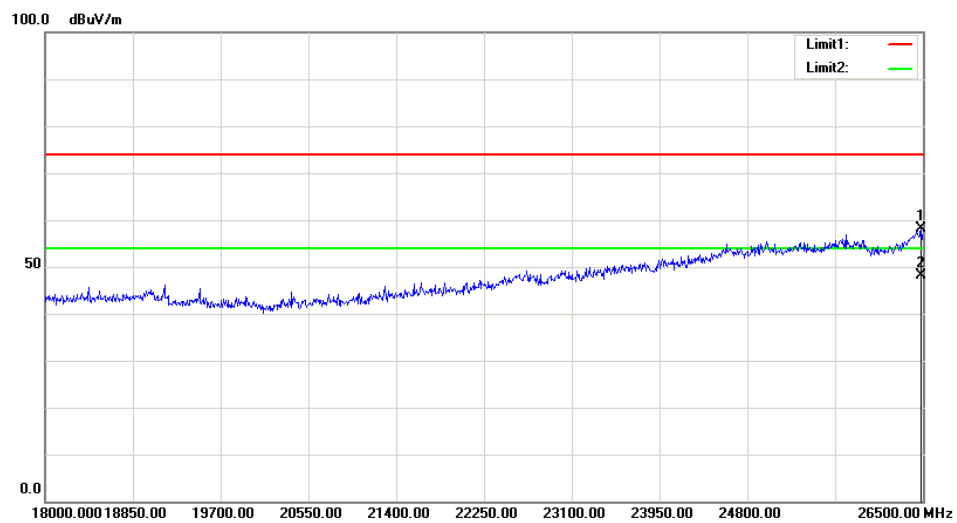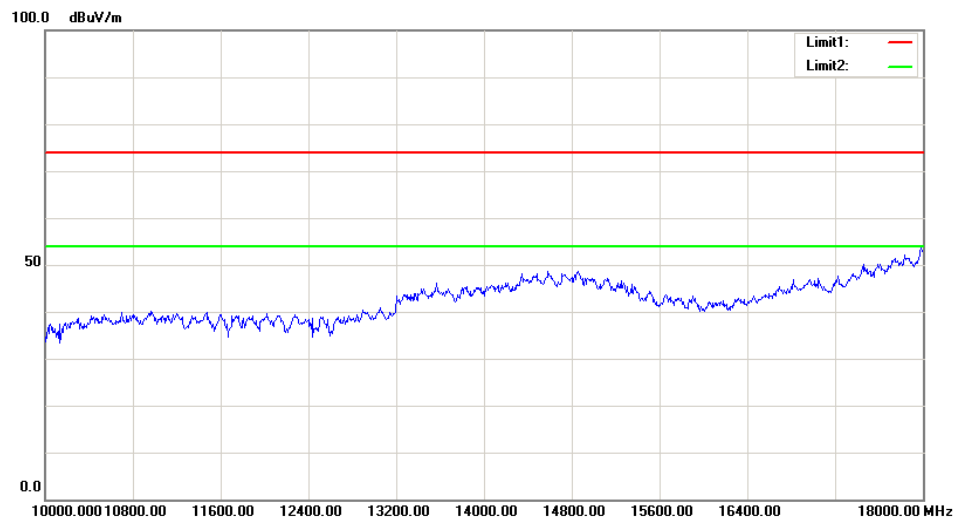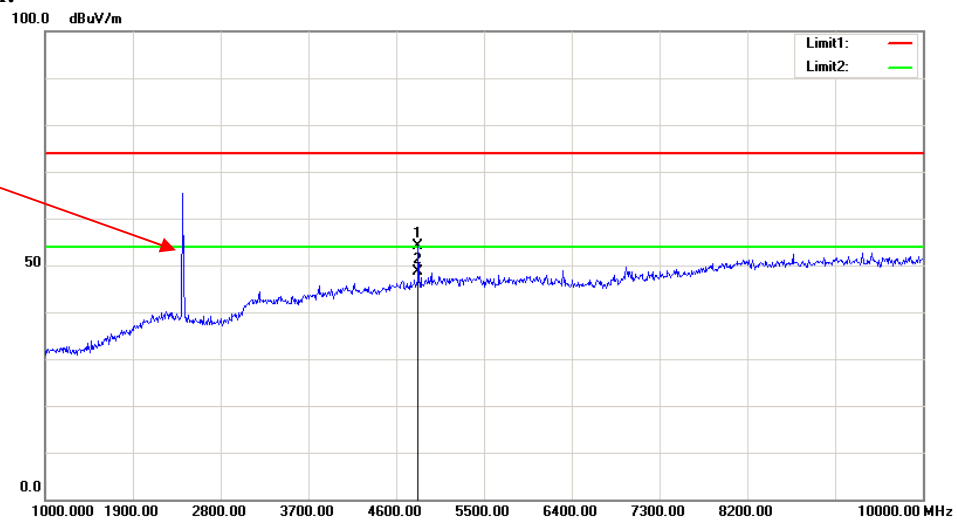

Vertical:

Fundamental
Test with Band
Rejection Filter

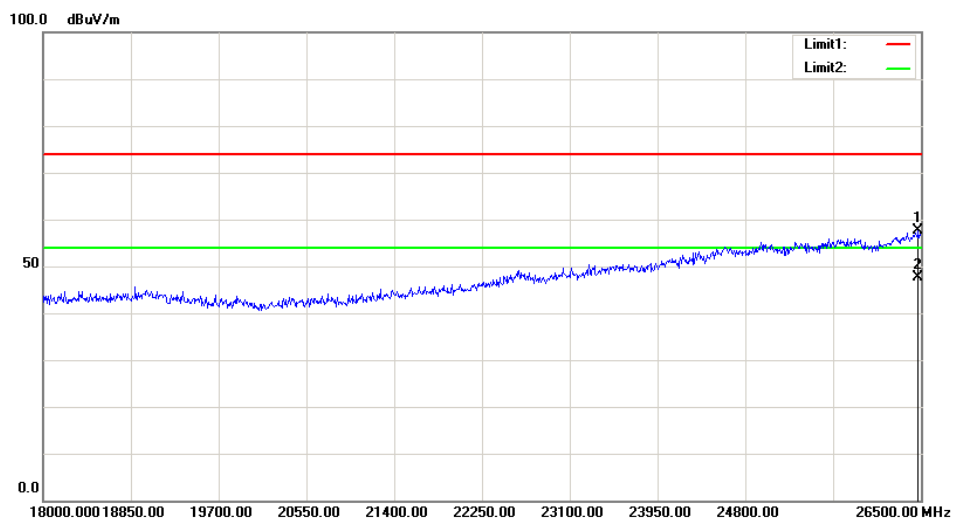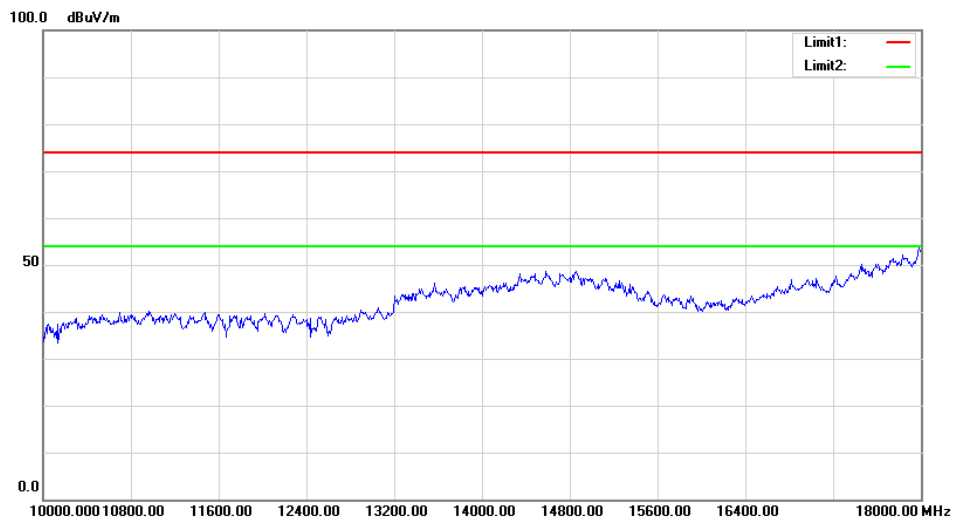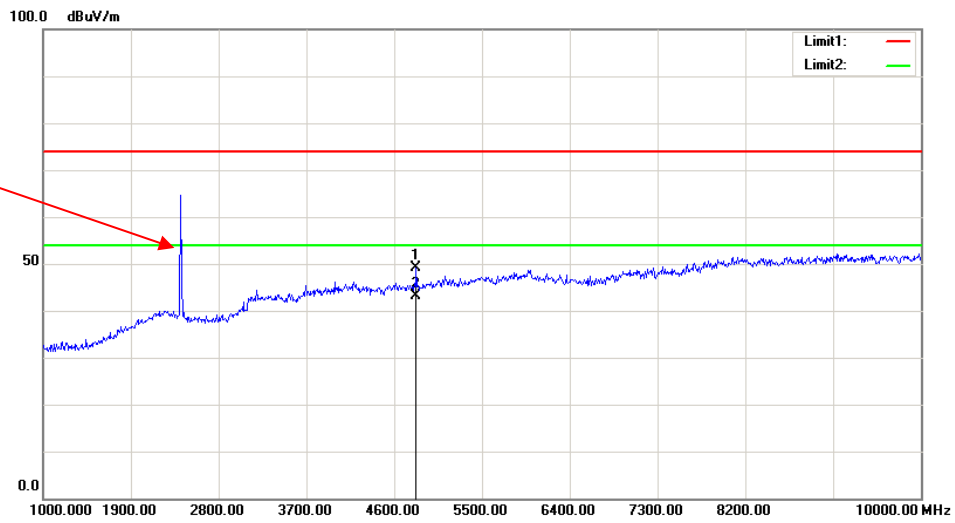

FCC §15.247(a) (2)& & RSS-247 CLAUSE 5.2 a) &RSS-247 CLAUSE 5.2 a) &RSS-GEN CLAUSE 6.6–6 dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH

Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

According to RSS-247 §5.2 a)

The minimum 6 dB bandwidth shall be 500 kHz.


According to RSS-Gen §6.6

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- h) Measure the 99% bandwidth use OBW test function, the test setting according to ANSI C63.10-2013 clause 6.9.3.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2017-03-02	2018-03-02
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	20 ~ 21.7 °C
Relative Humidity:	28 ~ 41 %
ATM Pressure:	101 ~ 102.1 kPa

* The testing was performed by George Pang from 2018-01-30 to 2018-02-07.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	8.16	13.68	≥ 0.5
	Middle	2437	8.56	13.60	≥ 0.5
	High	2462	8.00	13.52	≥ 0.5
802.11g	Low	2412	16.56	20.16	≥ 0.5
	Middle	2437	16.48	19.92	≥ 0.5
	High	2462	16.48	17.20	≥ 0.5
802.11n20	Low	2412	17.68	20.80	≥ 0.5
	Middle	2437	17.44	20.40	≥ 0.5
	High	2462	17.68	18.16	≥ 0.5
802.11n40	Low	2422	35.36	37.28	≥ 0.5
	Middle	2437	35.52	38.24	≥ 0.5
	High	2452	35.52	37.28	≥ 0.5


6dB bandwidth:

802.11b Low Channel

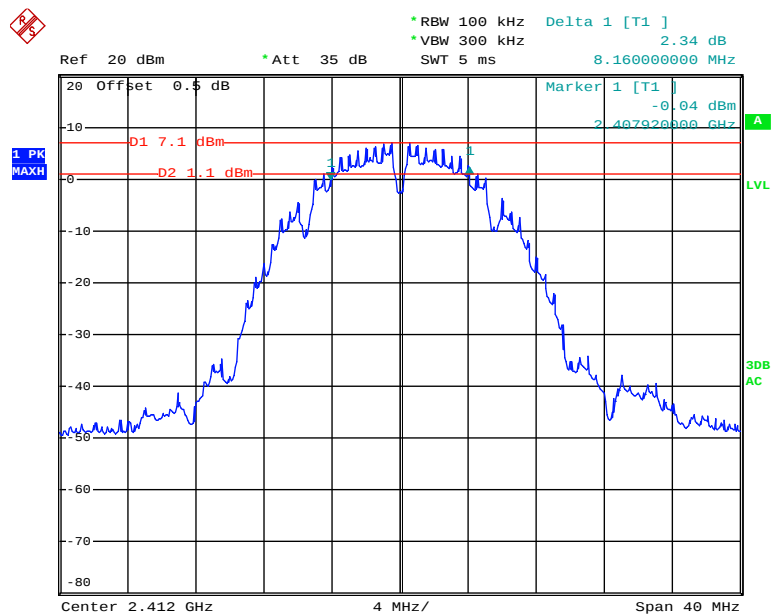


Date: 30.JAN.2018 07:53:48

802.11b Middle Channel

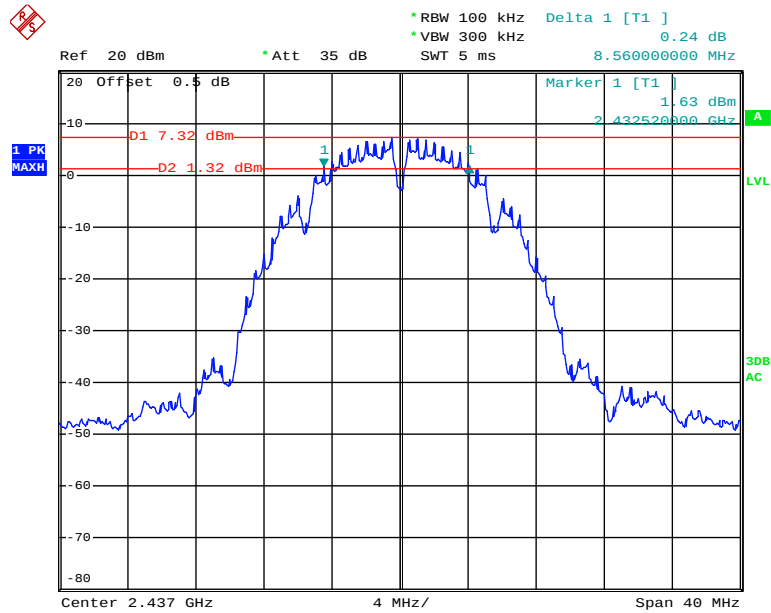


Date: 30.JAN.2018 07:58:04

802.11b High Channel

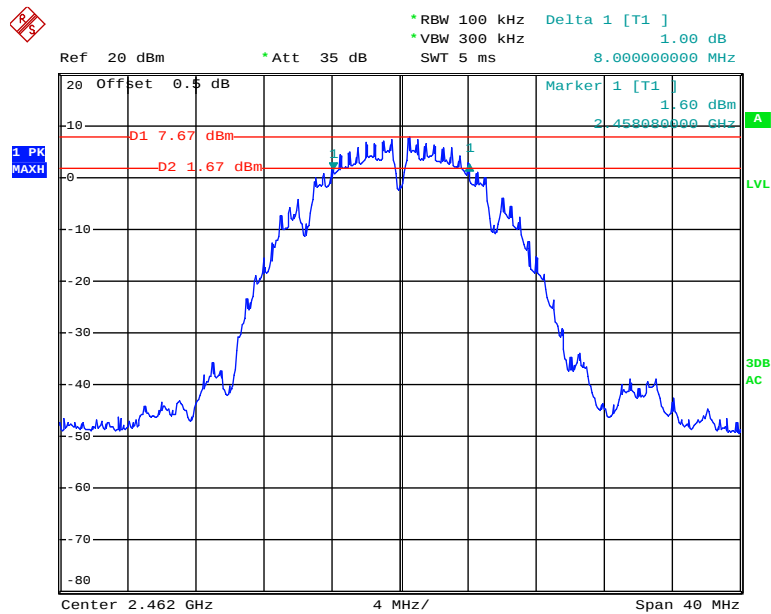


Date: 30.JAN.2018 08:04:41

802.11g Low Channel

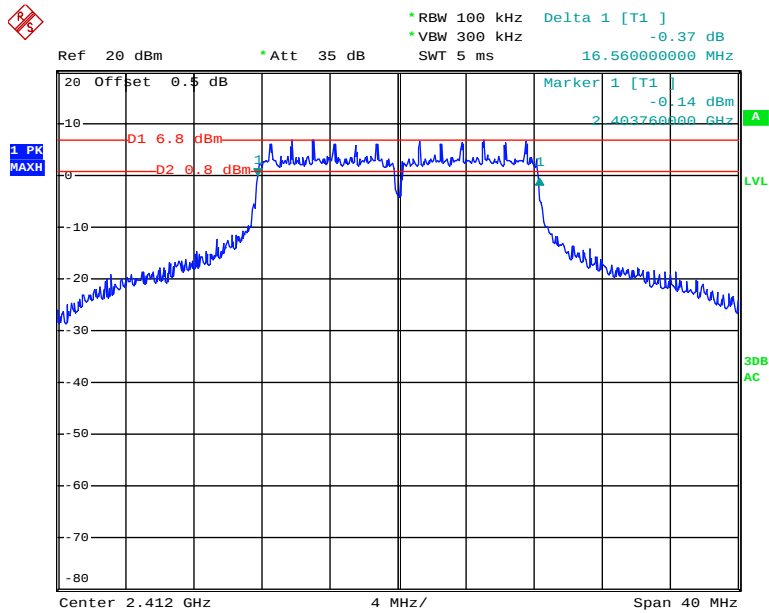


Date: 30.JAN.2018 08:18:48


802.11g Middle Channel

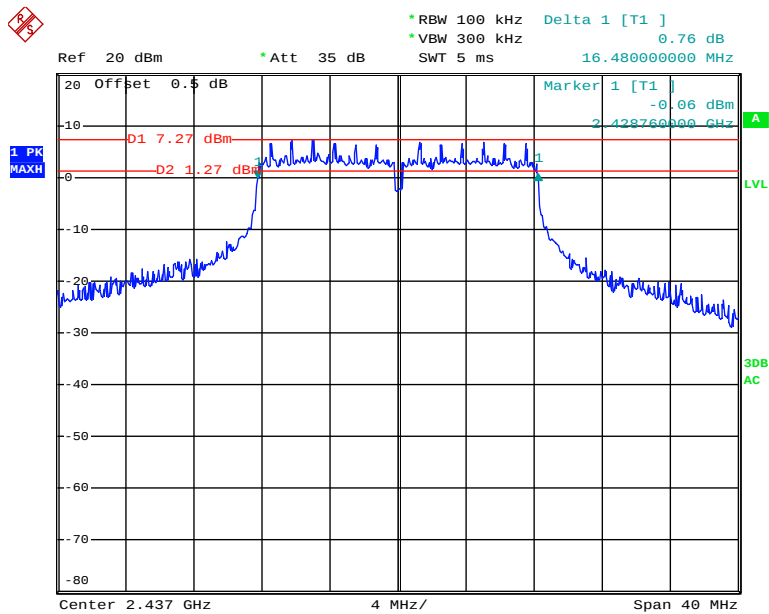

Date: 30.JAN.2018 08:14:51

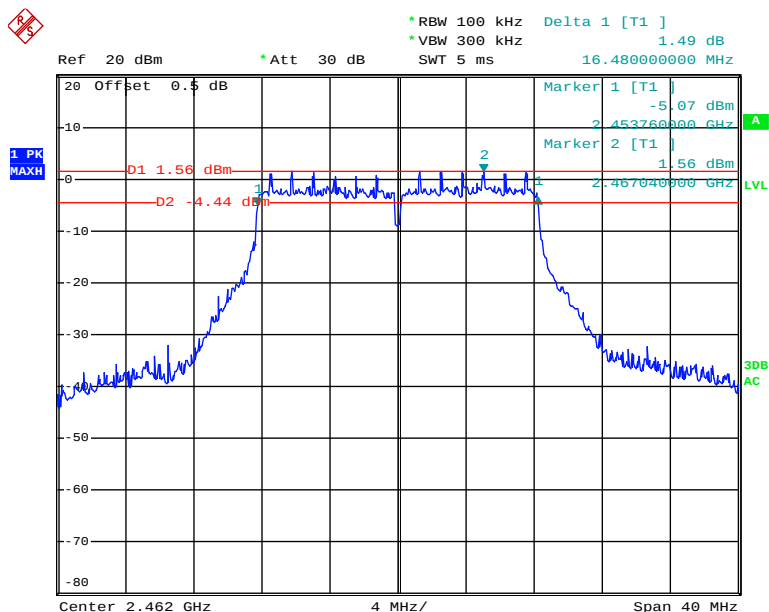
802.11g High Channel

Date: 7.FEB.2018 18:27:27

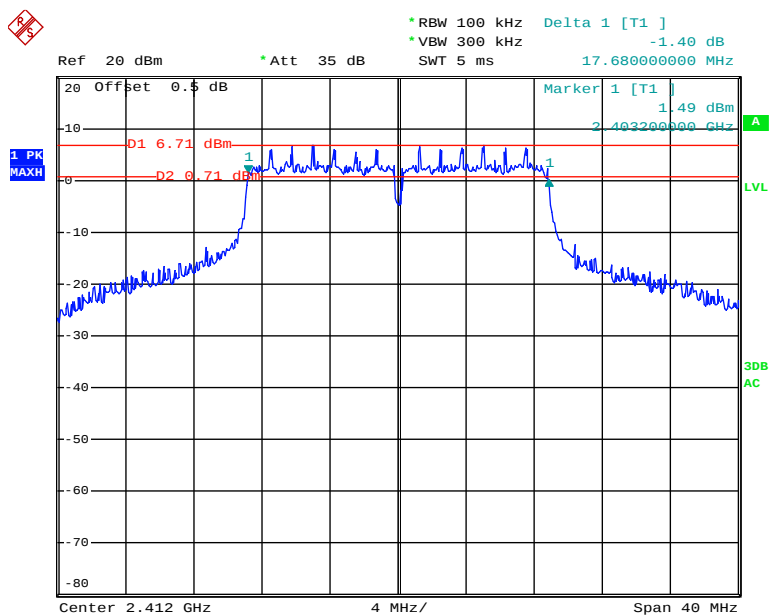802.11n ht20 Low Channel


Date: 30.JAN.2018 08:30:36

802.11n ht20 Middle Channel

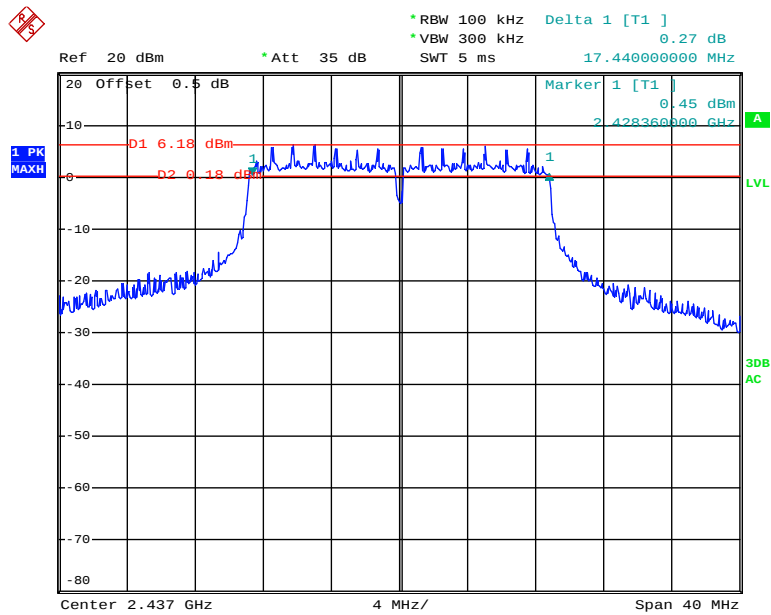


Date: 30.JAN.2018 08:35:10

802.11n ht20 High Channel

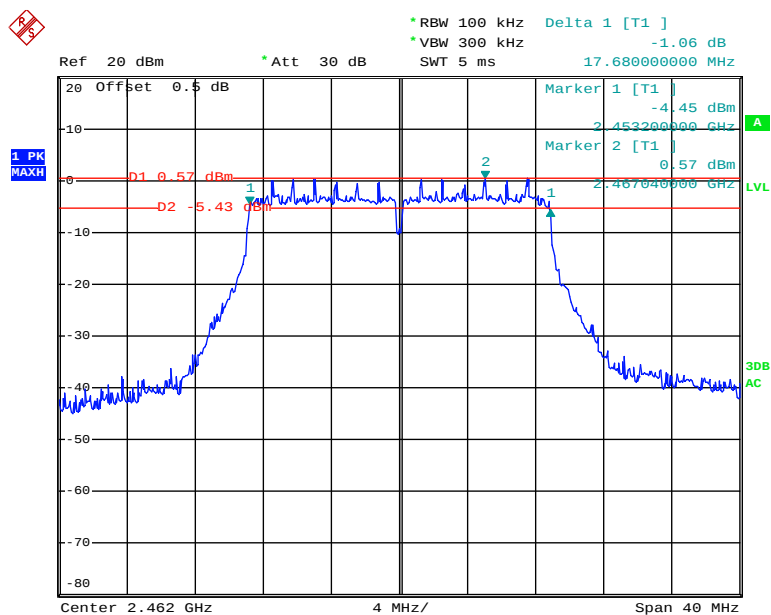


Date: 7.FEB.2018 18:29:29

802.11n ht40 Low Channel

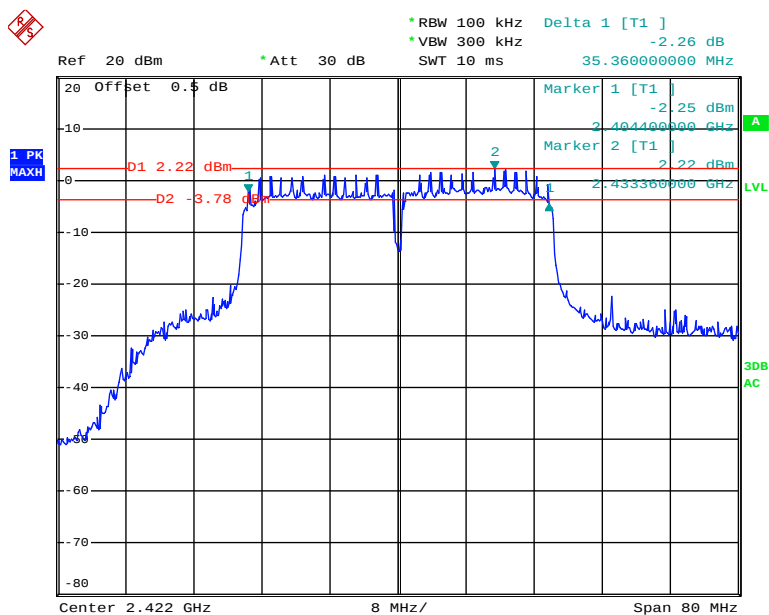


Date: 7.FEB.2018 18:35:22


802.11n ht40 Middle Channel

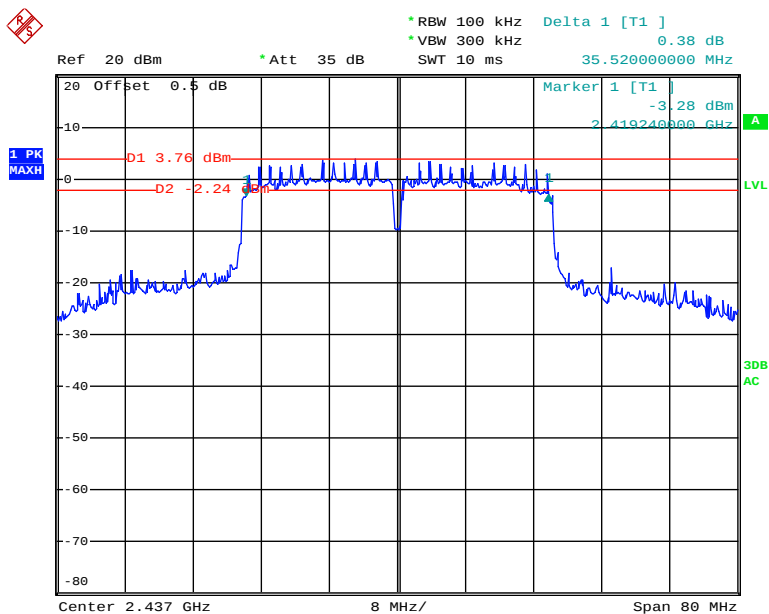

Date: 30.JAN.2018 15:58:16

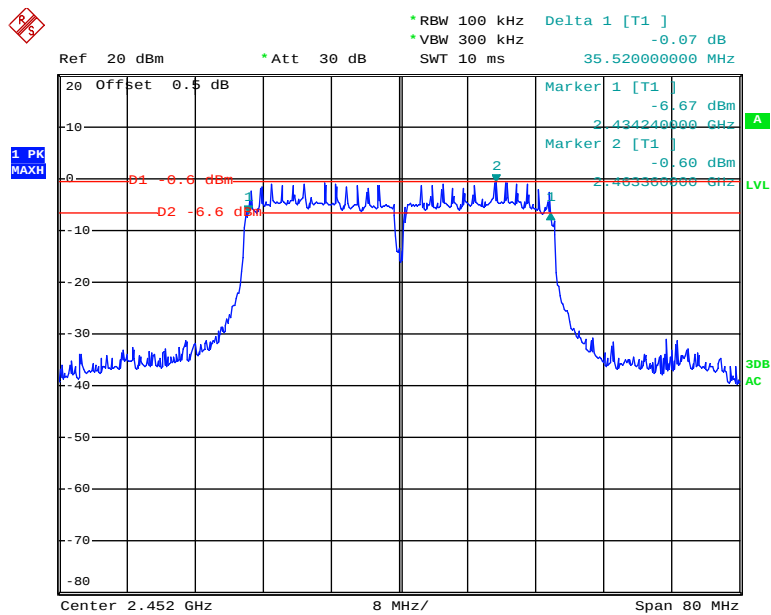
802.11n ht40 High Channel

Date: 7.FEB.2018 18:33:27

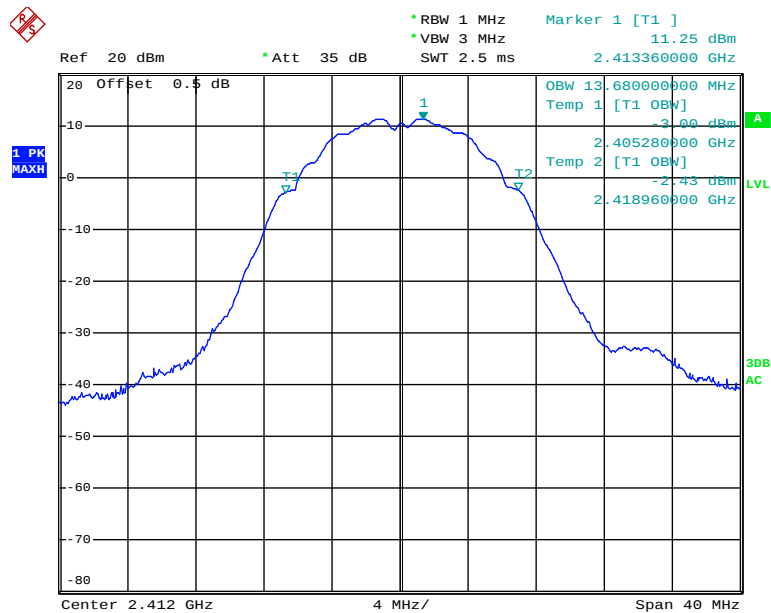99% Occupied bandwidth:**802.11b Low Channel**


Date: 30.JAN.2018 07:54:09

802.11b Middle Channel

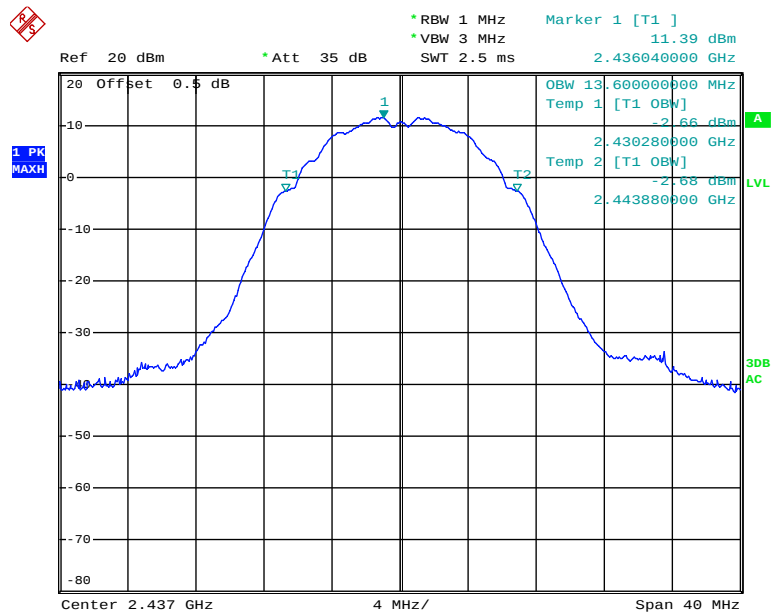


Date: 30.JAN.2018 07:58:23

802.11b High Channel

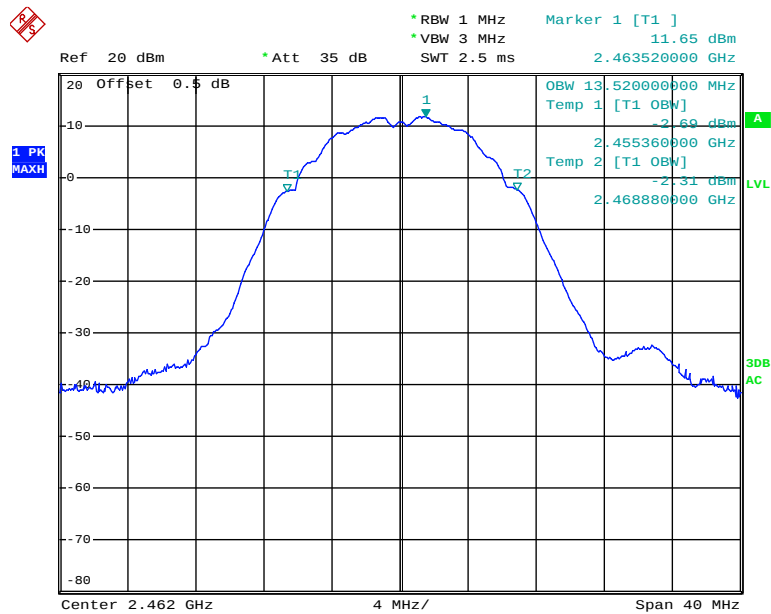


Date: 30.JAN.2018 08:05:00

802.11g Low Channel

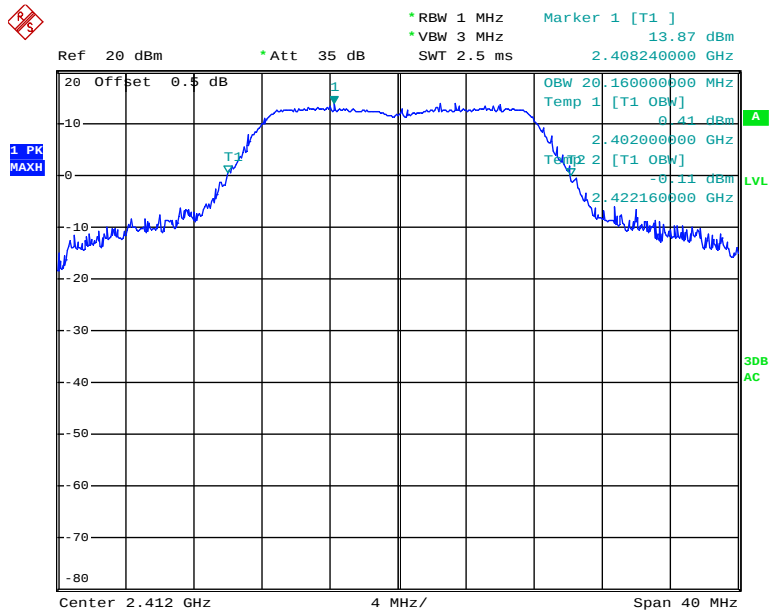


Date: 30.JAN.2018 16:15:23


802.11g Middle Channel

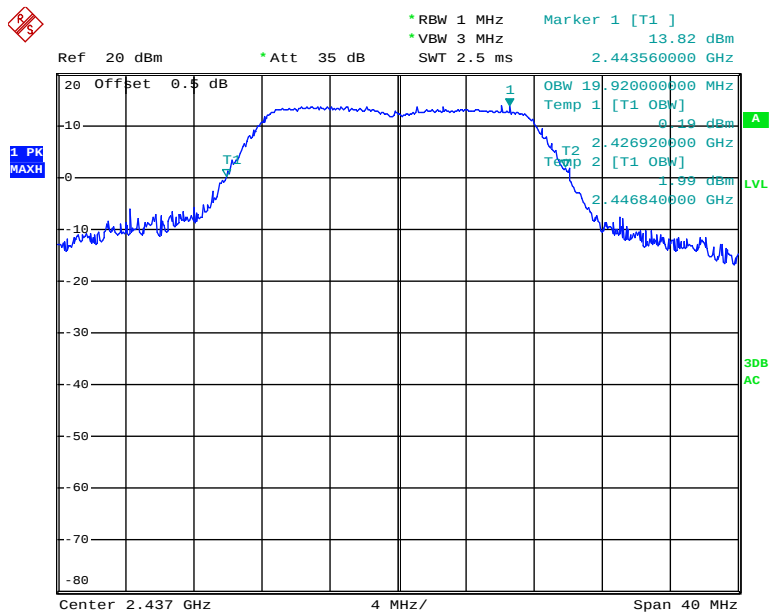

Date: 30.JAN.2018 16:16:40

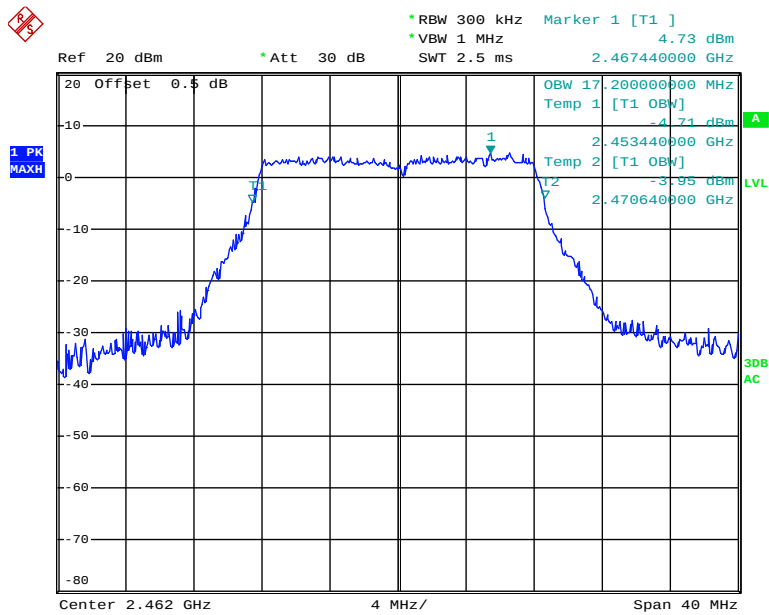
802.11g High Channel

Date: 7.FEB.2018 18:27:38

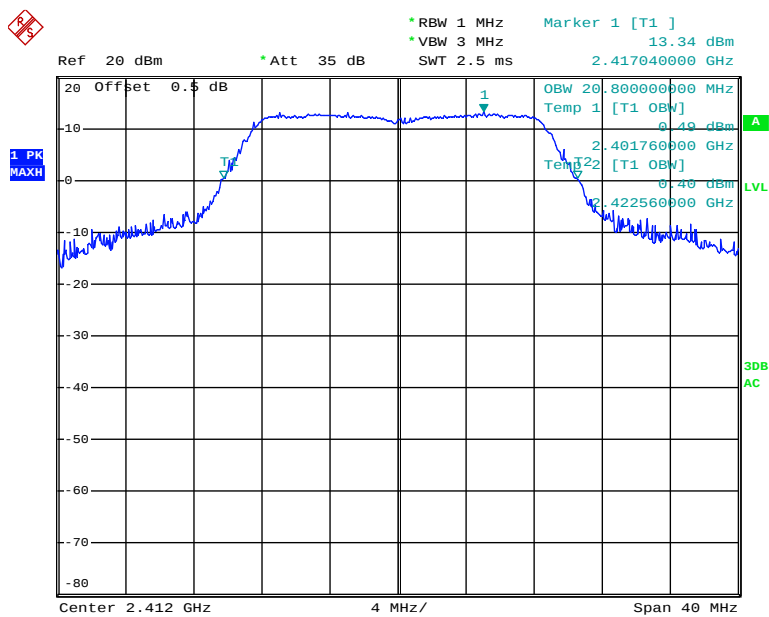802.11n ht20 Low Channel


Date: 30.JAN.2018 16:22:02

802.11n ht20 Middle Channel

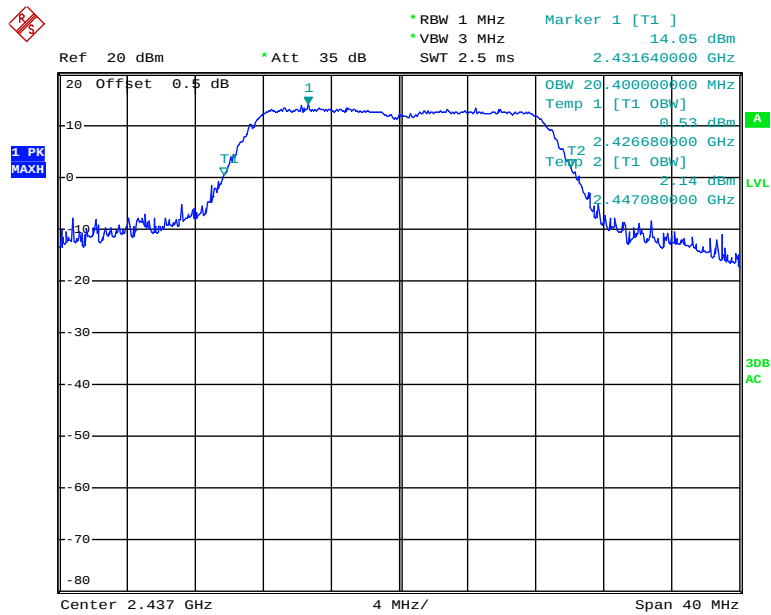


Date: 30.JAN.2018 16:23:04

802.11n ht20 High Channel

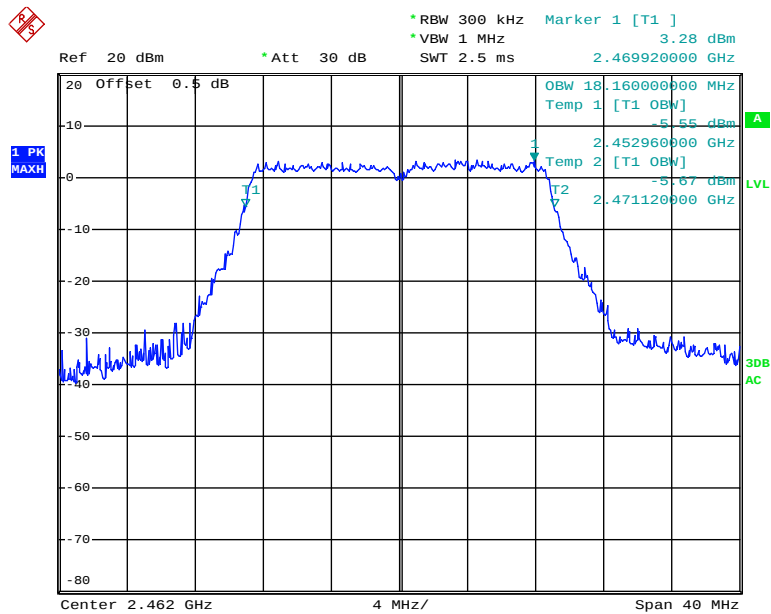


Date: 7.FEB.2018 18:29:41

802.11n ht40 Low Channel

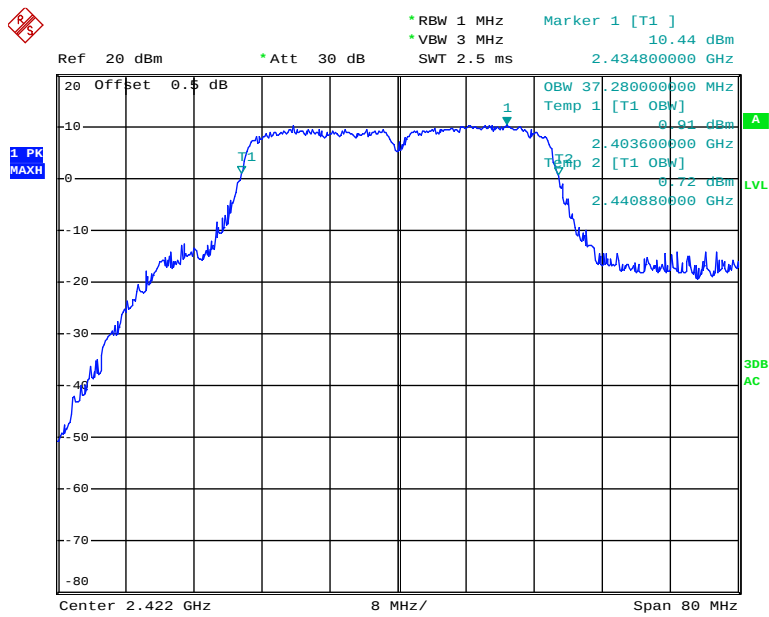


Date: 7.FEB.2018 18:35:32

802.11n ht40 Middle Channel

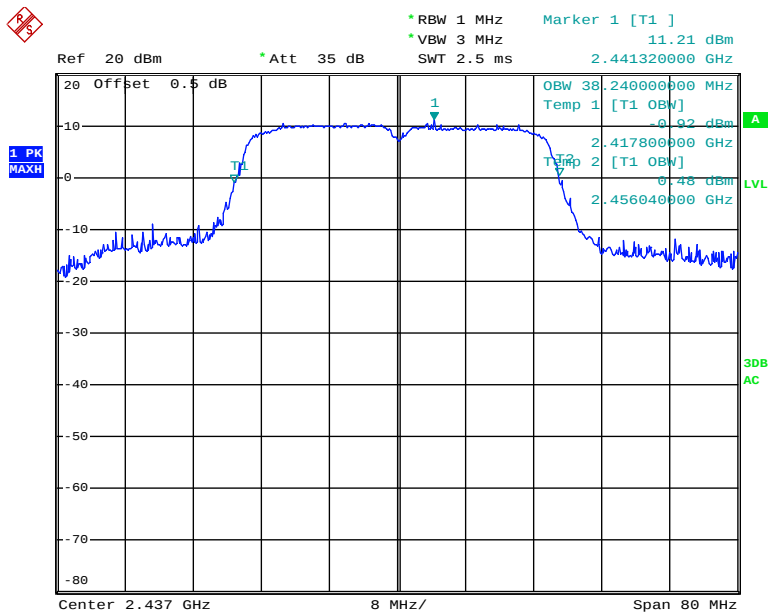

Date: 30.JAN.2018 16:10:33

802.11n ht40 High Channel

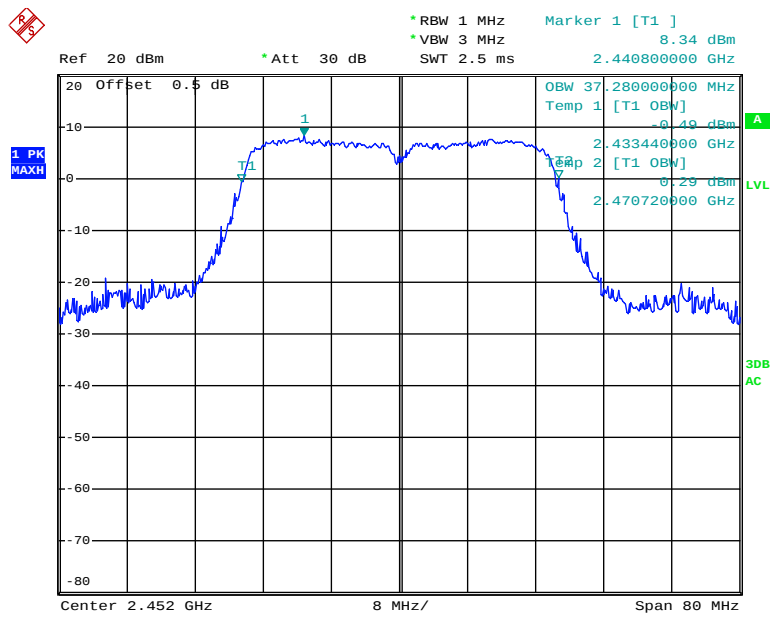

Date: 7.FEB.2018 18:33:37

FCC §15.247(b) (3) & RSS-247 CLAUSE 5.4 d)- MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to RSS-247§5.4 d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. Except as provided in Section 5.4(e), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.
5. Set the power meter to test average output power, record the result as average power.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2017-11-03	2018-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2017-11-03	2018-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2017-11-03	2018-11-03
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	21.1 °C
Relative Humidity:	39 %
ATM Pressure:	101 kPa

* The testing was performed by George Pang on 2018-01-30.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Mode	Channel	Frequency (MHz)	Peak Conducted Output Power (dBm)	Limit (dBm)
802.11 b	Low	2412	17.45	30
	Middle	2437	17.46	30
	High	2462	18.07	30
802.11 g	Low	2412	22.64	30
	Middle	2437	22.91	30
	High	2462	21.42	30
802.11 n20	Low	2412	22.11	30
	Middle	2437	22.58	30
	High	2462	20.61	30
802.11 n40	Low	2422	22.41	30
	Middle	2437	22.11	30
	High	2452	20.07	30

FCC §15.247(d) & RSS-247 CLAUSE 5.5– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 Clause 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2017-03-02	2018-03-02
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	20 ~ 21.7°C
Relative Humidity:	28 ~ 41 %
ATM Pressure:	101~102.1 kPa

* The testing was performed by George Pang from 2018-01-30 to 2018-02-07.


Test mode: Transmitting

Test Result: Compliant. Please refer to following plots.

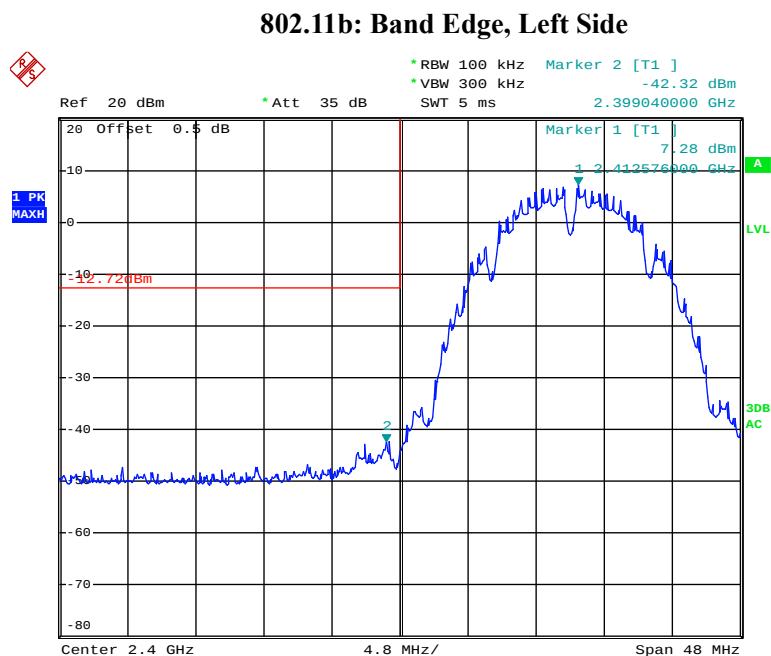


Date: 30.JAN.2018 07:56:06

802.11b: Band Edge, Right Side

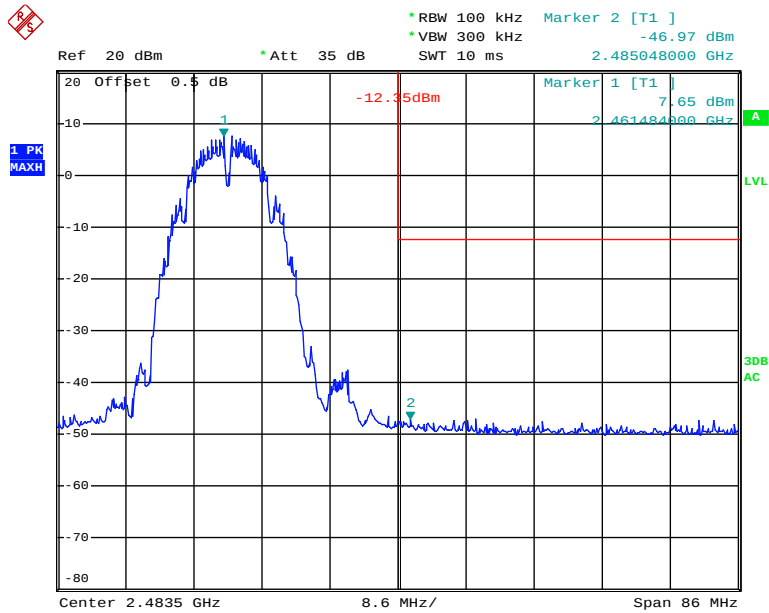


Date: 30.JAN.2018 08:06:49


802.11g: Band Edge, Left Side

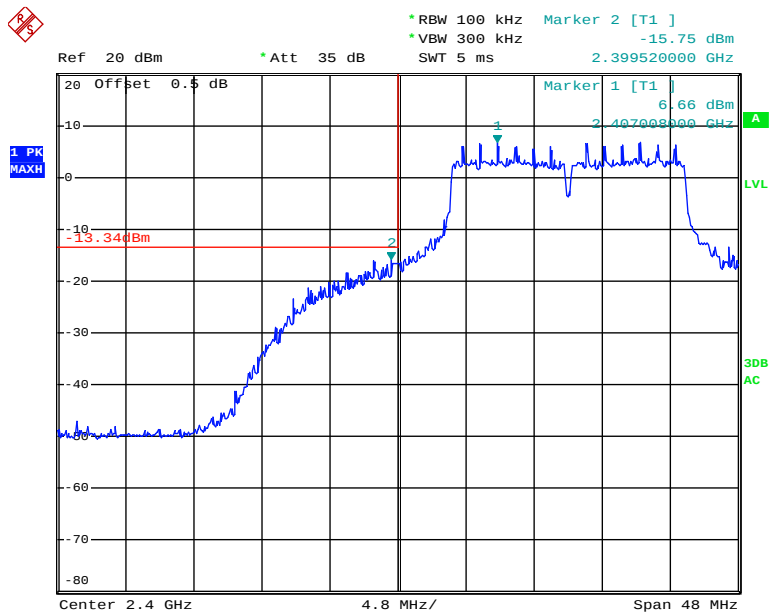


Date: 30.JAN.2018 08:21:41

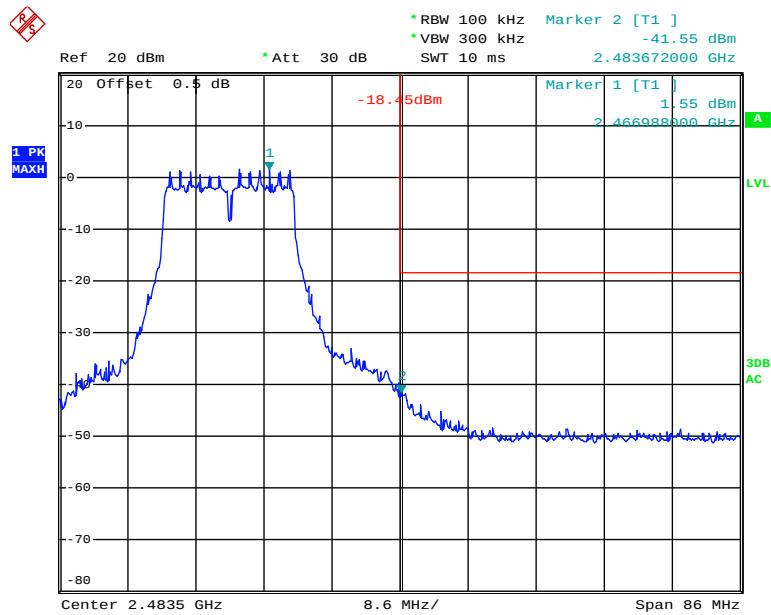802.11g: Band Edge, Right Side


Date: 7.FEB.2018 18:28:31

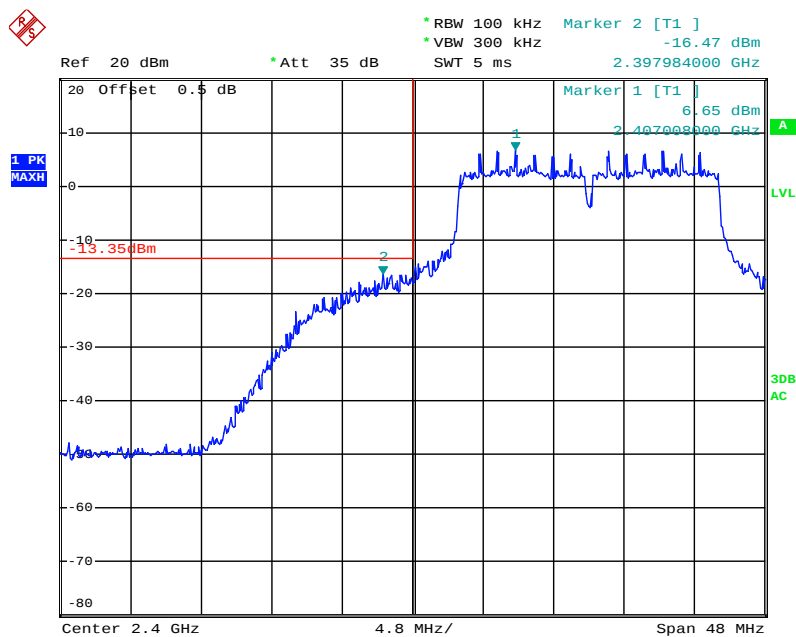802.11n ht20 Band Edge, Left Side

Date: 30.JAN.2018 08:33:25

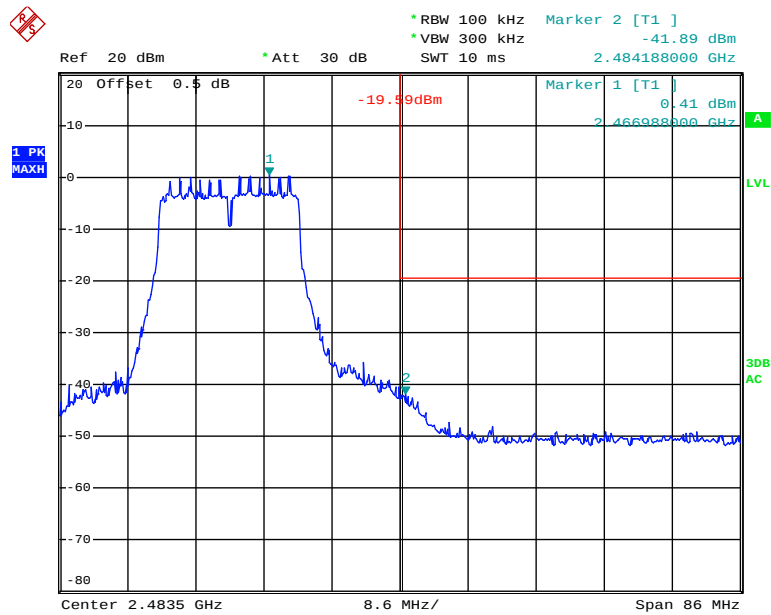
802.11n ht20 Band Edge, Right Side

Date: 7.FEB.2018 18:30:32

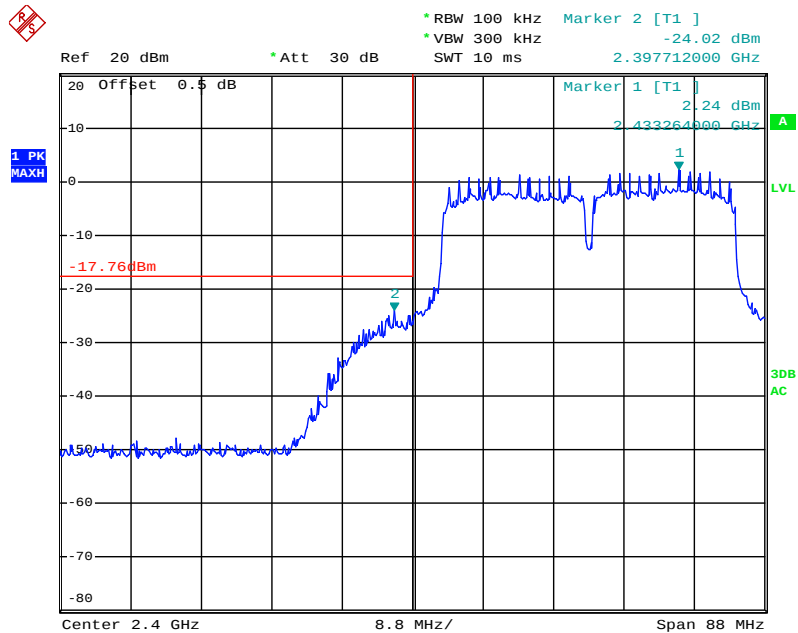802.11n ht40 Band Edge, Left Side

Date: 7.FEB.2018 18:36:34

802.11n ht40 Band Edge, Right Side

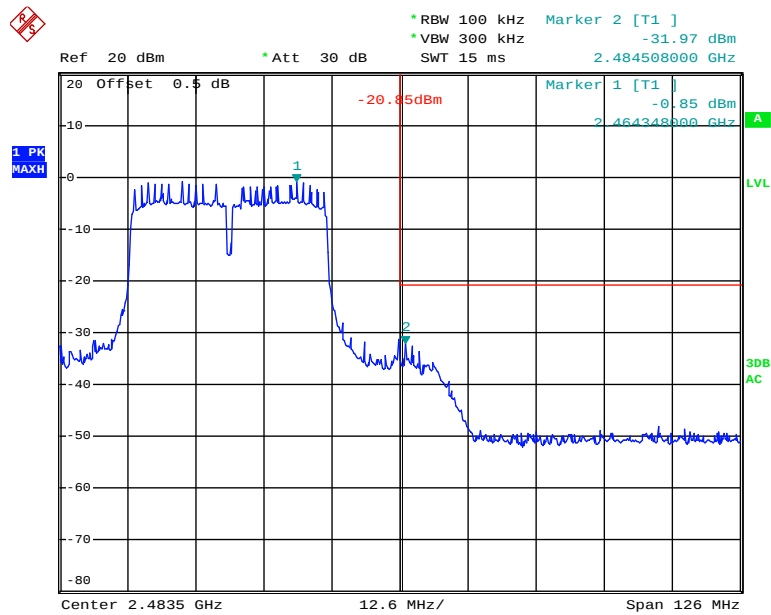

Date: 7.FEB.2018 18:34:33

FCC §15.247(e) & RSS-247 CLAUSE 5.2 b - POWER SPECTRAL DENSITY

Applicable Standard

According to FCC §15.247(e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-247 §5.2 b):

- b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2017-03-02	2018-03-02
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	20 ~ 21.7 °C
Relative Humidity:	28 ~ 41 %
ATM Pressure:	101 ~ 102.1 kPa

* The testing was performed by George Pang from 2018-01-30 to 2018-02-07.


Test Result: Compliance*Test Mode: Transmitting**Test Result: Compliant. Please refer to the following table and plots*

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
802.11 b	Low	2412	-6.53	≤8.00
	Middle	2437	-6.06	≤8.00
	High	2462	-6.75	≤8.00
802.11 g	Low	2412	-7.19	≤8.00
	Middle	2437	-6.97	≤8.00
	High	2462	-13.12	≤8.00
802.11 n20	Low	2412	-7.87	≤8.00
	Middle	2437	-8.01	≤8.00
	High	2462	-13.79	≤8.00
802.11 n40	Low	2422	-12.69	≤8.00
	Middle	2437	-10.11	≤8.00
	High	2452	-15.40	≤8.00

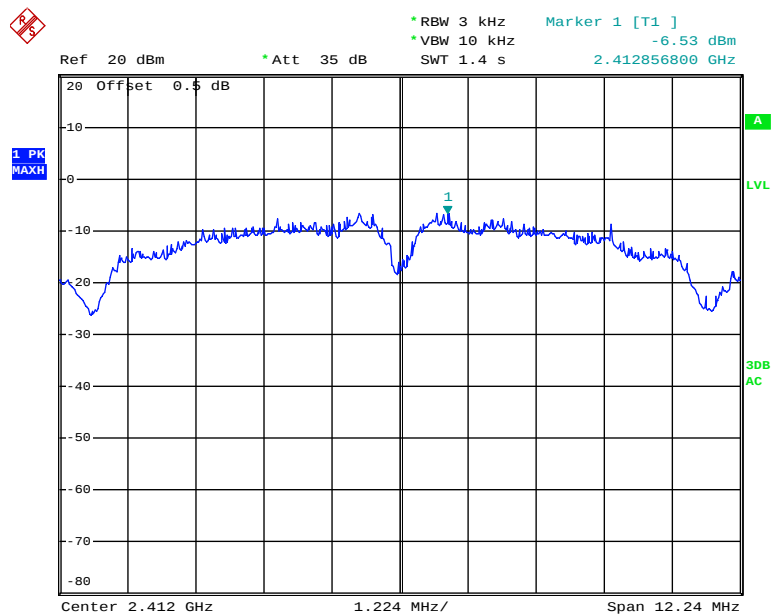Power Spectral Density, 802.11b Low Channel


Date: 30.JAN.2018 07:55:35

Power Spectral Density, 802.11b Middle Channel

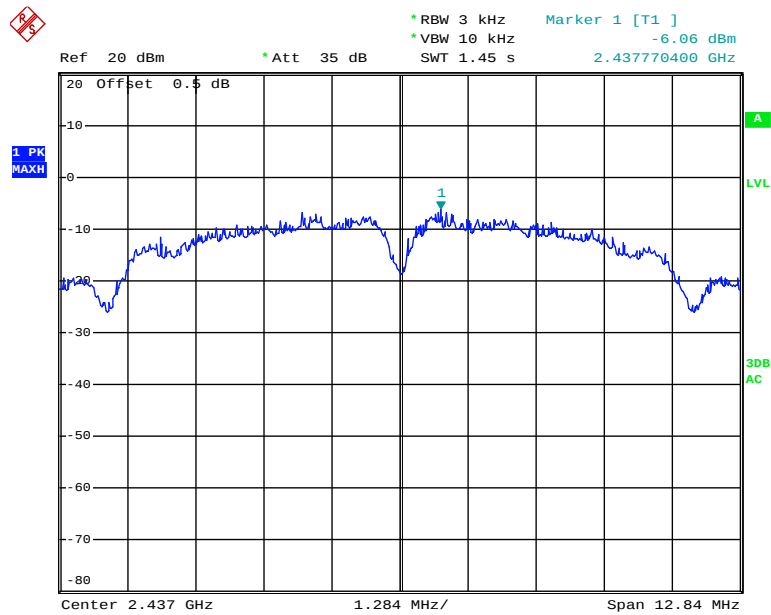


Date: 30.JAN.2018 07:59:41

Power Spectral Density, 802.11b High Channel

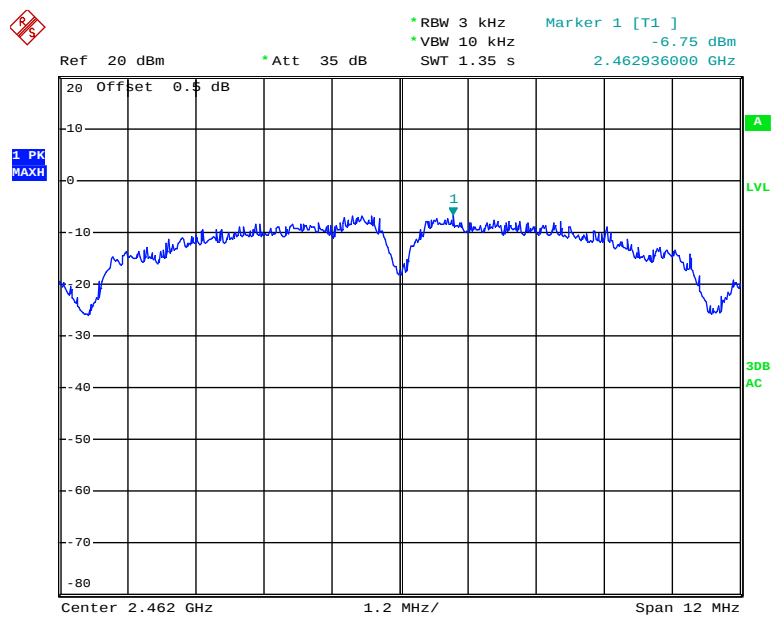


Date: 30.JAN.2018 08:06:15

Power Spectral Density, 802.11g Low Channel

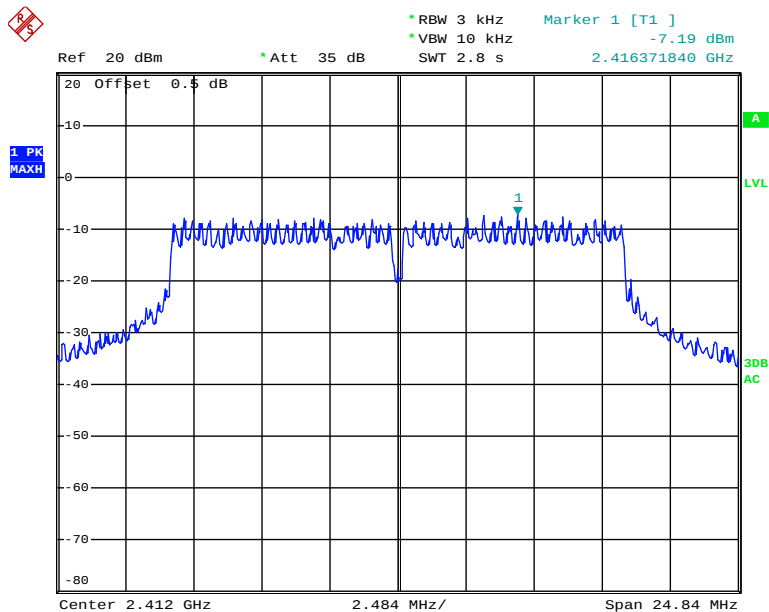


Date: 30.JAN.2018 08:21:03

Power Spectral Density, 802.11g Middle Channel

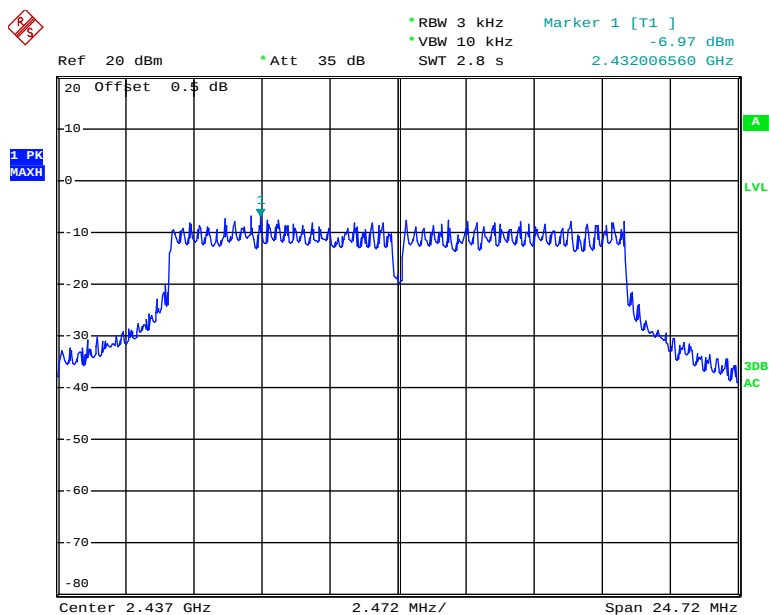


Date: 30.JAN.2018 08:16:48

Power Spectral Density, 802.11g High Channel

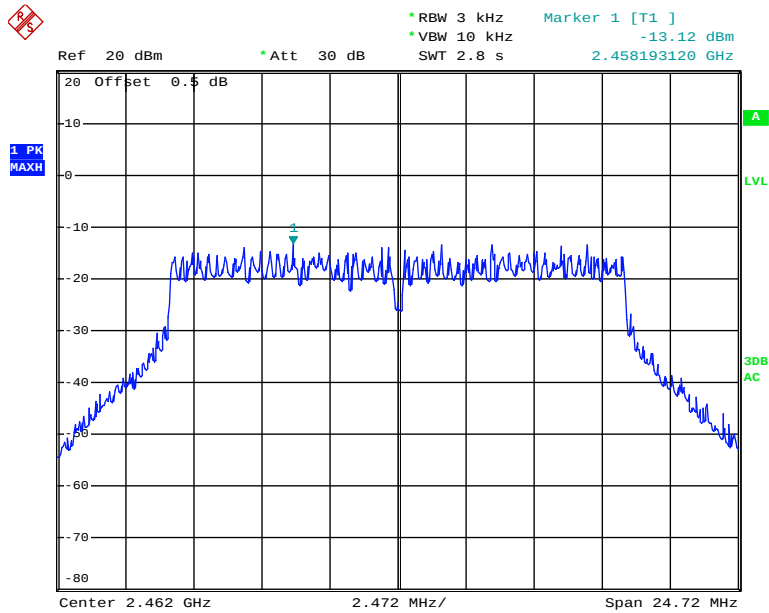


Date: 7.FEB.2018 18:28:04

Power Spectral Density, 802.11n ht20 Low Channel

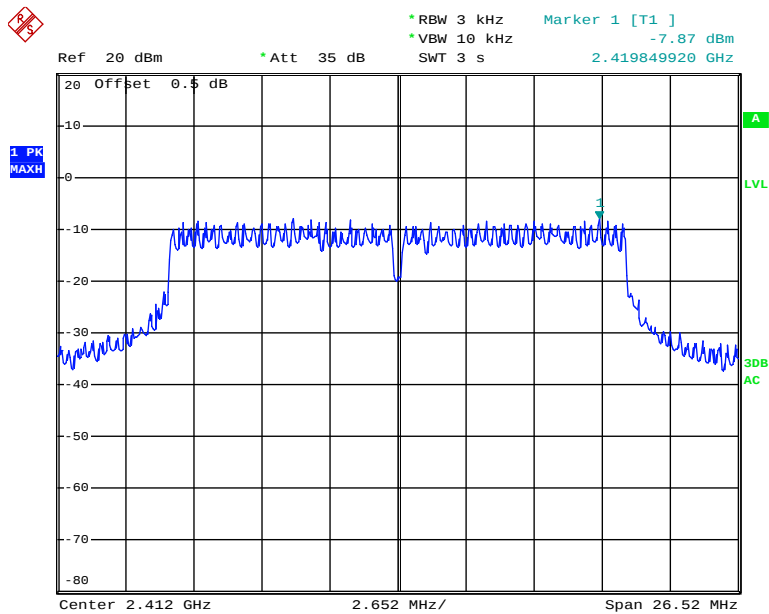


Date: 30.JAN.2018 08:32:55

Power Spectral Density, 802.11n ht20 Middle Channel

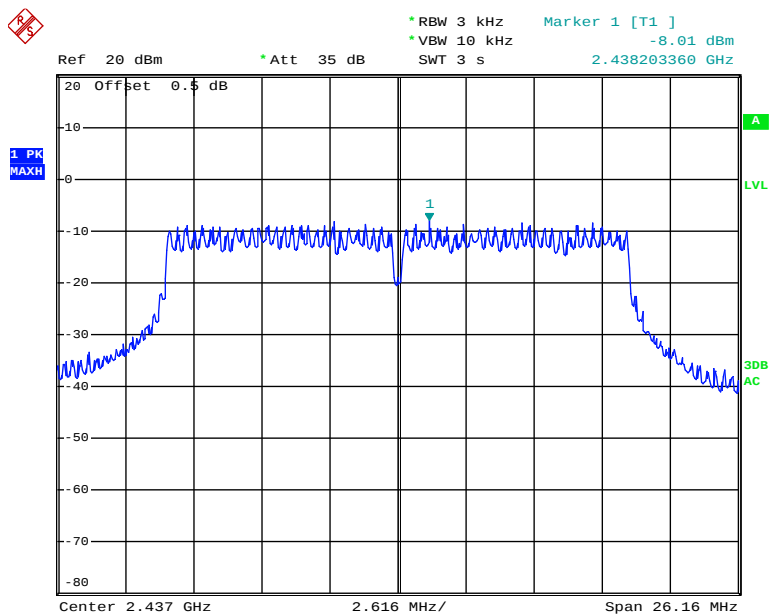

Date: 30.JAN.2018 08:37:50

Power Spectral Density, 802.11n ht20 High Channel

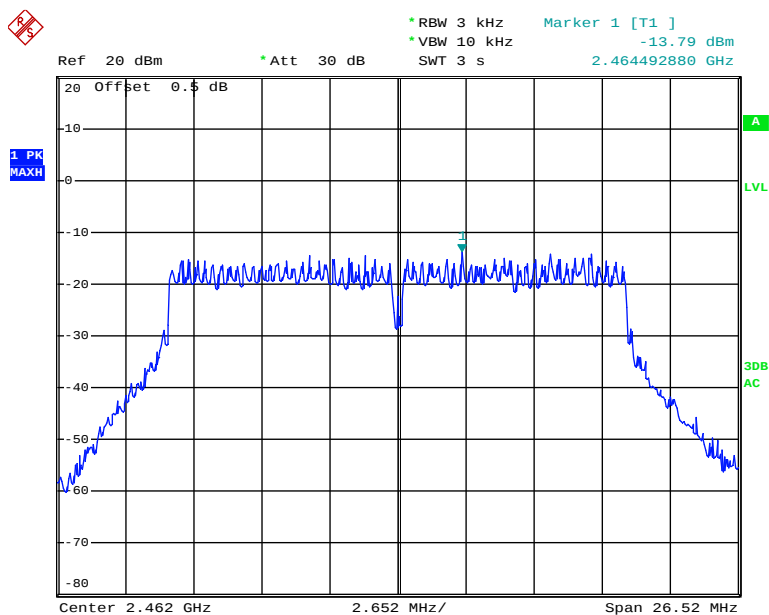

Date: 7.FEB.2018 18:30:17

Ref 20 dBm * Att 30 dB * RBW 3 kHz * VBW 10 kHz * SWT 6 s Marker 1 [T1] -12.69 dBm 2.434517440 GHz

20 Offset 0.5 dB

1 PK MAXH

3dB AC

Center 2.422 GHz 5.304 MHz/ Span 53.04 MHz

Date: 7.FEB.2018 18:36:13

Ref 20 dBm * Att 35 dB * RBW 3 kHz * VBW 10 kHz Marker 1 [T1] -10.11 dBm
 SWT 6 s 2.428901440 GHz

20 Offset 0.5 dB


1. PK MAXH

3dB AC

Center 2.437 GHz 5.328 MHz/ Span 53.28 MHz

Date: 30.JAN.2018 16:02:04

Power Spectral Density, 802.11n ht40 High Channel

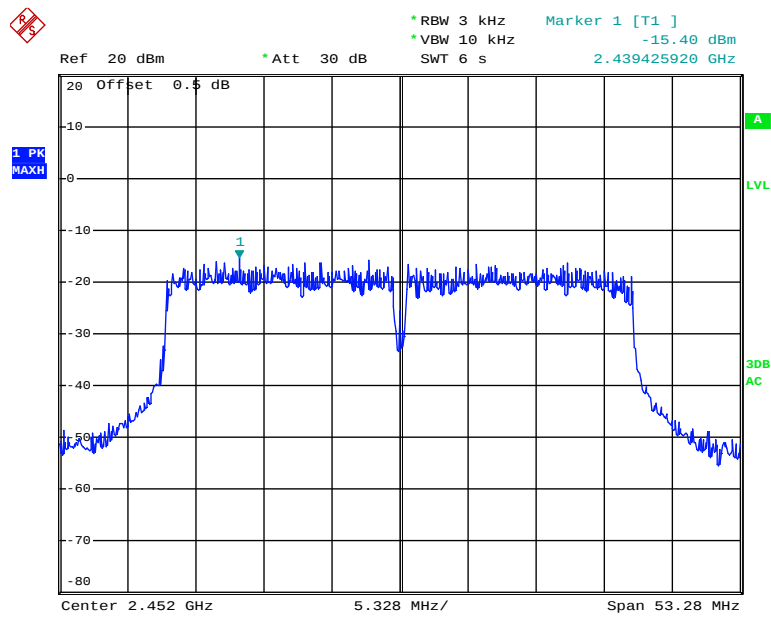

Date: 7.FEB.2018 18:34:18

***** END OF REPORT *****