Shenzhen Huatongwei International Inspection Co., Ltd.

1/F,Bldg 3,Hongfa Hi-tech Industrial Park,Genyu Road,Tianliao,Gongming,Shenzhen,China Phone:86-755-26748019 Fax:86-755-26748089 http://www.szhtw.com.cn



TEST REPORT

Report No.:: CHTEW20040137 Report Verification:

SHT2004013802EW Project No.....

FCC ID.....:: 2AE6CEP8100U5

Applicant's name.....: Shenzhen Excera Technology Co., Ltd.

3rd Floor, Jiada R&D Building, No.5 Songpingshan Road, Hi-Address....:

Tech Park North, Nanshan District, Shenzhen, China

Manufacturer....: Shenzhen Excera Technology Co., Ltd.

Address....: 3rd Floor, Jiada R&D Building, No.5 Songpingshan Road, Hi-

Tech Park North, Nanshan District, Shenzhen, China

Test item description: **Digital Portable Radio**

Trade Mark: **EXCERA**

Model/Type reference.....: EP8100 U5

Listed Model(s):

Standard:: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of receipt of test sample.....: Apr.07, 2020

Date of testing..... Apr.07, 2020- Apr.16, 2020

Date of issue.....: Apr.17, 2020

Result....: **PASS**

Compiled by

(Position+Printed name+Signature): File administrator Echo Wei

Supervised by

(Position+Printed name+Signature): Project Engineer Gaosheng Pan Echo Wei Gaosheng. Pan

Approved by

(Position+Printed name+Signature): RF Manager Hans Hu

Shenzhen Huatongwei International Inspection Co., Ltd. Testing Laboratory Name:

1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Address....:

Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Report No.: CHTEW20040137 Page: 2 of 33 Issued: 2020-04-17

Contents

<u>1.</u>	TEST STANDARDS AND REPORT VERSION	3
1.1.	Test Standards	3 3
1.2.	Report version	3
<u>2.</u>	TEST DESCRIPTION	4
_		
<u>3.</u>	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
<u>4.</u>	TEST CONFIGURATION	7
		_
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test mode	7
4.4.	Support unit used in test configuration and system	8
4.5. 4.6.	Testing environmental condition Measurement uncertainty	8 8
4.0. 4.7.	Equipment Used during the Test	9
4.7.	Equipment Osed during the rest	3
<u>5.</u>	TEST CONDITIONS AND RESULTS	11
5.1.	Antenna Requirement	11
5.2.	AC Conducted Emission	12
5.3.	Peak Output Power	15
5.4.	20 dB Bandwidth	16
5.5.	99% Occupied Bandwidth	17
5.6.	Carrier Frequencies Separation	18
5.7.	Hopping Channel Number	19
5.8.	Dwell Time	20
5.9.	Duty Cycle Correction Factor (DCCF)	21
5.10.	Pseudorandom Frequency Hopping Sequence	22
5.11.	Conducted Band edge and Spurious Emission	23
5.12.	Radiated Band edge Emission	25
5.13.	Radiated Spurious Emission	27
<u>6.</u>	TEST SETUP PHOTOS	32
<u>7.</u>	EXTERANAL AND INTERNAL PHOTOS	33
	A DDENDLY DEDOOT	
<u>8.</u>	APPENDIX REPORT	33

Report No.: CHTEW20040137 Page: 3 of 33 Issued: 2020-04-17

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices
- KDB 558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description
N/A	2020-04-17	Original

Report No.: CHTEW20040137 Page: 4 of 33 Issued: 2020-04-17

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result
5.1	Antenna Requirement	15.203/15.247 (c)	PASS
5.2	AC Conducted Emission	15.207	PASS
5.3	Peak Output Power	15.247 (b)(1)	PASS
5.4	20 dB Bandwidth	15.247 (a)(1)	PASS
5.5	99% Occupied Bandwidth	-	PASS ^{*1}
5.6	Carrier Frequency Separation	15.247 (a)(1)	PASS
5.7	Hopping Channel Number	15.247 (a)(1)	PASS
5.8	Dwell Time	15.247 (a)(1)	PASS
5.9	Duty Cycle Correction Factor	-	PASS*1
5.10	Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	PASS
5.11	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS
5.12	Radiated Band Edge Emission	15.205/15.209	PASS
5.13	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS

Note:

The measurement uncertainty is not included in the test result.

 ^{*1:} No requirement on standard, only report these test data.

Report No.: CHTEW20040137 Page: 5 of 33 Issued: 2020-04-17

3. **SUMMARY**

3.1. Client Information

Applicant:	Shenzhen Excera Technology Co., Ltd.	
Address:	3rd Floor, Jiada R&D Building, No.5 Songpingshan Road , Hi-Tech Park North, Nanshan District , Shenzhen , China	
Manufacturer: Shenzhen Excera Technology Co., Ltd.		
Address:	3rd Floor, Jiada R&D Building, No.5 Songpingshan Road , Hi-Tech Park North, Nanshan District , Shenzhen , China	

3.2. Product Description

Name of EUT:	Digital Portable Radio
Trade Mark:	EXCERA
Model No.:	EP8100 U5
Listed Model(s):	-
Power supply:	DC 7.4V
Battery information:	Model: EB242L DC 7.2Vd.c.,2400mAh/17 28Wh
Charger information:	Model: ESC102L Input: 12Vd.c.,1A Output: 8.4Vd.c.,1A
Adapter information:	Model: HKA01212010-XQ Input: 100-240Va.c.,50/60Hz 0.5A Output: 12.0Vd.c.,1.0A
Hardware version:	Α
Software version:	1.3.00.11P

3.3. Radio Specification Description

Bluetooth version:	V2.1
Support function*2:	EDR
Modulation:	GFSK, π/4DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	Internal Antenna
Antenna gain:	0 dBi

Note:

^{*2:} only show the RF function associated with this report.

Report No.: CHTEW20040137 Page: 6 of 33 Issued: 2020-04-17

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.		
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China		
Type Accreditation Numb		Accreditation Number	
	CNAS	L1225	
Qualifications	A2LA	3902.01	
	FCC	762235	
	Canada	5377A	

Report No.: CHTEW20040137 Page: 7 of 33 Issued: 2020-04-17

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

Channel	Frequency (MHz)
00	2402
01	2403
<u>:</u>	i:
39	2441
÷	:
77	2479
78	2480

4.2. Descriptions of Test mode

Preliminary tests were performed in different data rates and recorded the RF output power in the clause 5.3

Note:

- 1) The manufacturer declare that the maximum power value of the product is set as a default value in the enter test mode software.
- 2) All the test data for each data rate were verified, found GFSK Modulation which is worse case mode

4.3. Test mode

For RF test items:				
The engineering test program was provided and enabled to make EUT continuous transmitting.				
	Modulation / Data Rate			
Test Item	GFSK	π/4DQPSK	8DPSK	
	1Mbps	2Mbps	3Mbps	
Conducted test item	✓	✓	✓	
Radiated test item	✓	-	-	

Remark:

- For radiated test item, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests.
- The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Report No.: CHTEW20040137 Page: 8 of 33 Issued: 2020-04-17

4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Wheth	Whether support unit is used?				
✓	✓ No				
Item	Equipement	Trade Name	Model No.	FCC ID	Power cord
1					
2					

4.5. Testing environmental condition

Туре	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.6. Measurement uncertainty

Test Item	Measurement Uncertainty
AC Conducted Emission (150kHz~30MHz)	3.02 dB
Radiated Emission (30MHz~1000MHz	4.90 dB
Radiated Emissions (1GHz~25GHz)	4.96 dB
Peak Output Power	0.51 dB
Power Spectral Density	0.51 dB
Conducted Spurious Emission	0.51 dB
6dB Bandwidth	70 Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

Report No.: CHTEW20040137 Page: 9 of 33 Issued: 2020-04-17

4.7. Equipment Used during the Test

•	Conducted Emission								
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
•	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27		
•	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2019/10/26	2020/10/25		
•	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2019/10/23	2020/10/22		
•	Pulse Limiter	R&S	HTWE0033	ESH3-Z2	100499	2019/10/23	2020/10/22		
•	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLE X_142	EF-NM- BNCM-2M	2019/10/23	2020/10/22		
•	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A		

Radiated emission-6th test site								
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
•	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2021/09/29	
•	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2019/10/26	2020/10/25	
•	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2018/04/02	2021/04/01	
•	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2018/04/04	2021/04/03	
•	Pre-Amplifer	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2019/11/14	2020/11/13	
•	RF Connection Cable	HUBER+SUHNER	HTWE0062- 01	N/A	N/A	2019/08/21	2020/08/20	
•	RF Connection Cable	HUBER+SUHNER	HTWE0062- 02	SUCOFLEX 104	501184/4	2019/05/27	2020/05/26	
•	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A	

Radiated emission-7th test site								
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
•	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26	
•	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2019/10/26	2020/10/25	
•	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31	
•	Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	25841	2018/10/11	2021/10/10	
•	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2018/10/11	2021/10/10	
•	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2019/11/14	2020/11/13	
•	Broadband Pre- amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2019/05/23	2020/05/22	
•	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2019/05/10	2020/05/09	
•	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09	
•	RF Connection Cable	HUBER+SUHNER	HTWE0120-03	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09	
•	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09	
•	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2019/05/10	2020/05/09	
•	Test Software	Audix	N/A	E3	N/A	N/A	N/A	

Report No.: CHTEW20040137 Page: 10 of 33 Issued: 2020-04-17

•	RF Conducted Method							
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
•	Signal and spectrum Analyzer	R&S	FSV40	100048	2019/10/26	2020/10/25		
•	Spectrum Analyzer	Agilent	N9020A	MY50510187	2019/10/26	2020/10/25		
0	Power Meter	Anritsu	ML249A	N/A	2019/10/26	2020/10/25		
0	Radio communication tester	R&S	CMW500	137688-Lv	2019/10/26	2020/10/25		

Report No.: CHTEW20040137 Page: 11 of 33 Issued: 2020-04-17

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responseble party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST RESULT

⊠ Passed	☐ Not A	pplicable
----------	---------	-----------

The antenna type is a PCB antenna, the directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



Report No.: CHTEW20040137 Page: 12 of 33 Issued: 2020-04-17

5.2. AC Conducted Emission


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Fraguenay rango (MHz)	Limit (dBuV)			
Frequency range (MHz)	Quasi-peak	Average		
0.15-0.5	66 to 56*	56 to 46*		
0.5-5	56	46		
5-30	60	50		

^{*} Decreases with the logarithm of the frequency.

TEST CONFIGURATION

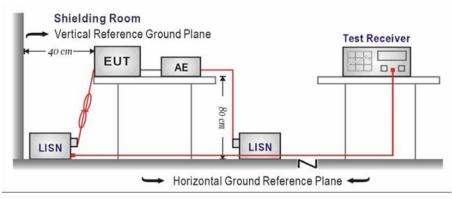

TEST PROCEDURE

- 1. The EUT was setup according to ANSI C63.10 requirements.
- The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
- 3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
- 4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
- 5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
- 6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- 7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
- 8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Please refer to the clause 4.3

TEST RESULT

 Report No.: CHTEW20040137 Page: 13 of 33 Issued: 2020-04-17

Test Line: L Level [dBµV] 70 60 50 40 30 10 0 150k 2M 4M 5M 6M 30M 300k 400k 600k 800k 1M 3M 8M 10M 20M Frequency [Hz] x x x MES GM2004105013_fin MEASUREMENT RESULT: "GM2004105013 fin" 4/10/2020 9:44AM Level Transd Limit Margin Detector Line Frequency PEdΒμV MHz dΒμV dB 10.0 0.181500 54.80 64 9.6 QP L1GND 0.762000 50.30 10.1 56 5.7 QP L1GND 1.896000 42.70 10.1 56 13.3 QP L1GND 2.782500 44.30 10.2 56 11.7 QP ь1 GND 48.40 10.2 5.892000 60 11.6 QP L1GND 60 15.5 QP 44.50 10.5 20.395500 L1 GND MEASUREMENT RESULT: "GM2004105013 fin2" 4/10/2020 9:44AM Frequency Level Transd Limit Margin Detector Line PEMHz dBμV dB dBμV dB 0.181500 42.50 10.0 54 11.9 AV ь1 GND 0.766500 44.10 10.1 46 1.9 AV L1 GND 35.70 10.1 2.143500 46 10.3 AV ь1 GND 2.805000 37.50 10.2 46 8.5 AV ь1 GND 7.6 AV 10.2 5.892000 42.40 50 L1GND 10.5 20.431500 39.10 50 10.9 AV ь1 GND

Report No.: CHTEW20040137 Page: 14 of 33 Issued: 2020-04-17

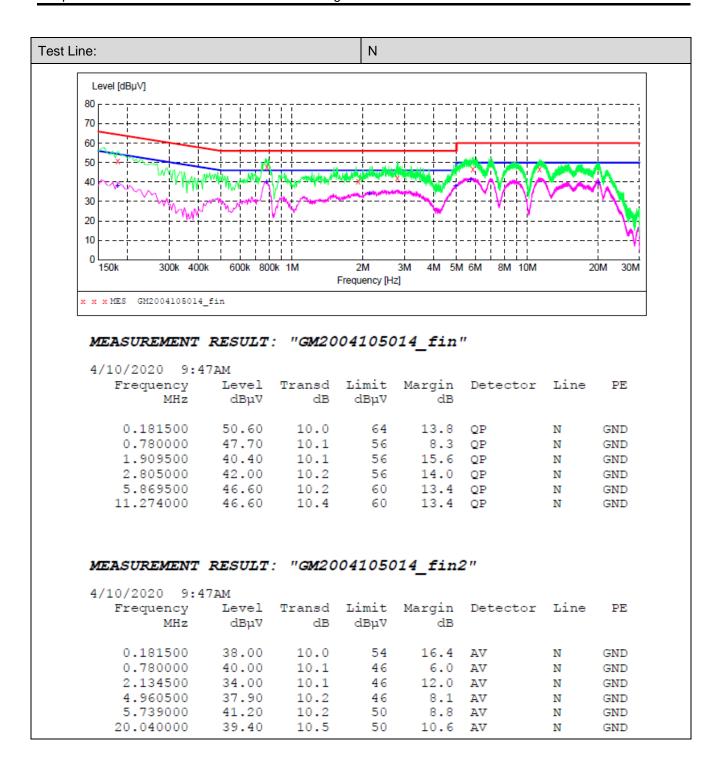

Report No.: CHTEW20040137 Page: 15 of 33 Issued: 2020-04-17


5.3. Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1):

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST CONFIGURATION

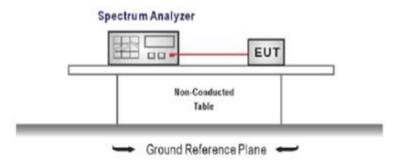

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- 3. Use the following spectrum analyzer settings: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW≥ the 20 dB bandwidth of the emission being measured, VBW≥RBW Sweep = auto, Detector function = peak, Trace = max hold
- Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

TEST Data

Please refer to appendix A on the appendix report


Report No.: CHTEW20040137 Page: 16 of 33 Issued: 2020-04-17

5.4. 20 dB Bandwidth

LIMIT

N/A

TEST CONFIGURATION

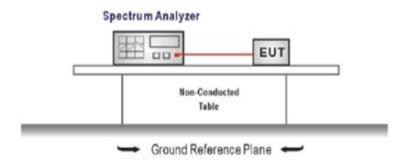

TEST PROCEDURE

- The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- 3. Use the following spectrum analyzer settings: Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

TEST Data

Please refer to appendix B on the appendix report


Report No.: CHTEW20040137 Page: 17 of 33 Issued: 2020-04-17

5.5. 99% Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION

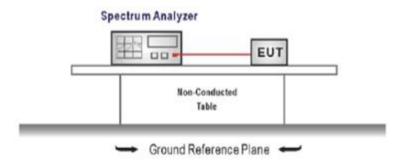

TEST PROCEDURE

- 1. Connect the antenna port(s) to the spectrum analyzer input.
- Configure the spectrum analyzer as shown below (enter all losses between the transmitter output andthe spectrum analyzer).

Center Frequency =channel center frequency

Span≥1.5 x OBW

RBW = 1%~5%OBW

VBW ≥ 3 × RBW

Sweep time= auto couple

Detector = Peak

Trace mode = max hold

3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

TEST Data

Please refer to appendix C on the appendix report

Report No.: CHTEW20040137 Page: 18 of 33 Issued: 2020-04-17


5.6. Carrier Frequencies Separation

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST CONFIGURATION

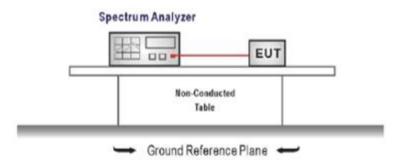

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- 3. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peaks of two adjacent channels
 - RBW ≥ 1% of the span, VBW ≥ RBW
 - Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 4.3

TEST RESULTS

TEST Data

Please refer to appendix D on the appendix report

Report No.: CHTEW20040137 Page: 19 of 33 Issued: 2020-04-17


5.7. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

TEST CONFIGURATION

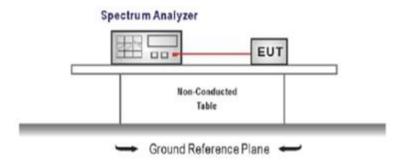

TEST PROCEDURE

- The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- 3. Use the following spectrum analyzer settings:
 - Span = the frequency band of operation
 - RBW ≥ 1% of the span, VBW ≥ RBW
 - Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 4.3

TEST RESULTS

TEST Data

Please refer to appendix E on the appendix report


Report No.: CHTEW20040137 Page: 20 of 33 Issued: 2020-04-17

5.8. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST CONFIGURATION

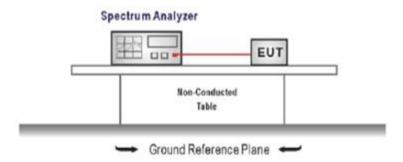

TEST PROCEDURE

- The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- Use the following spectrum analyzer settings:
 Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW ≥ RBW
 Sweep = as necessary to capture the entire dwell time per hopping channel,
 Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 4.3

TEST RESULTS

TEST Data

Please refer to appendix F on the appendix report


Report No.: CHTEW20040137 Page: 21 of 33 Issued: 2020-04-17

5.9. Duty Cycle Correction Factor (DCCF)

LIMIT

N/A

TEST CONFIGURATION

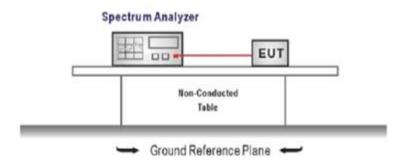

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- 3. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW ≥ RBW Sweep = as necessary to capture the entire dwell time per hopping channel, Detector function = peak, Trigger mode
- 4. Measure and record the duty cycle data

TEST MODE:

Please refer to the clause 4.3

TEST Data

Please refer to appendix G on the appendix report

Report No.: CHTEW20040137 Page: 22 of 33 Issued: 2020-04-17

5.10. Pseudorandom Frequency Hopping Sequence


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems shall have hopping channel carrier fre-quencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Al-ternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier fre-quencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to chan-nel frequencies that are selected at the system hopping rate from a pseudo ran-domly ordered list of hopping fre-quencies. Each frequency must be used equally on the average by each trans-mitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their cor-responding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nice-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the friststage. The sequence begins with the frist one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An explame of pseudorandom frequency hopping sequence as follows:



Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.


Report No.: CHTEW20040137 Page: 23 of 33 Issued: 2020-04-17

5.11. Conducted Band edge and Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section15.247 (d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

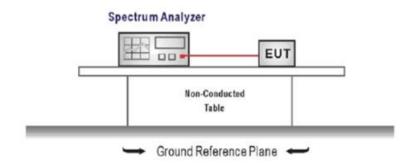

TEST PROCEDURE

- 1. Connect the antenna port(s) to the spectrum analyzer input.
- 2. Establish a reference level by using the following procedure

Center frequency=DTS channel center frequency

The span = 1.5 times the DTS bandwidth.

RBW = 100 kHz. VBW ≥ 3 x RBW

Detector = peak, Sweep time = auto couple, Trace mode = max hold

Allow trace to fully stabilize

Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

3. Emission level measurement

Set the center frequency and span to encompass frequency range to be measured

RBW = 100 kHz, VBW \geq 3 x RBW

Detector = peak, Sweep time = auto couple, Trace mode = max hold

Allow trace to fully stabilize

Use the peak marker function to determine the maximum amplitude level.

- 4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
- Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

TEST MODE:

Please refer to the clause 4.3

Report No.: CHTEW20040137 Page: 24 of 33 Issued: 2020-04-17

 $oxed{oxed}$ Passed $oxed{oxed}$ Not Applicable

TEST Data

Please refer to appendix H on the appendix report

Report No.: CHTEW20040137 Page: 25 of 33 Issued: 2020-04-17


5.12. Radiated Band edge Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

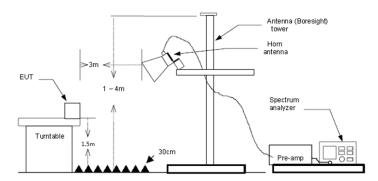

TEST PROCEDURE

- 1. The EUT was setup and tested according to ANSI C63.10.
- 2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
- 4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. Thisis repeated for both horizontal and vertical polarization of the antenna. In order to find themaximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
- Use the following spectrum analyzer settings:
 - a) Span shall wide enough to fully capture the emission being measured
 - b) Set RBW=100kHz for <1GHz, VBW=3*RBW, Sweep time=auto, Detector=peak, Trace=max hold
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement: use duty cycle correction factor method (DCCF)

Averager level = Peak level + DCCF

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

Note:

- 1) Level= Reading + Factor; Factor = Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit Level
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m).

Report No.: CHTEW20040137 Page: 26 of 33 Issued: 2020-04-17

Test chan	Test channel:			Pol	arity		Horizonta	al
Sus	pected Data	List						
NO	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
1	2310.000	43.70	-2.34	41.36	74.00	32.64	Horizontal	PK
2	2390.010	44.41	-2.41	42.00	74.00	32.00	Horizontal	PK
Test channel: CH00			Pol	arity		Vertical		
Sus	pected Data	List						
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
1	2310.000	44.50	-2.34	42.16	74.00	31.84	Vertical	PK
2	2390.010	43.62	-2.41	41.21	74.00	32.79	Vertical	PK

st channel: CH78			Pol	arity		Horizonta	al	
Susp	ected Data	List						
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
1	2483.501	46.98	-2.15	44.83	74.00	29.17	Horizontal	PK
2	2500.000	44.11	-2.10	42.01	74.00	31.99	Horizontal	PK
st chann	el:	CH78		Pol	arity		Vertical	
Susp	ected Data	List						
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
1	2483.501	46.44	-2.15	44.29	74.00	29.71	Vertical	PK
2	2500.000	44.37	-2.10	42.27	74.00	31.73	Vertical	PK

Report No.: CHTEW20040137 Page: 27 of 33 Issued: 2020-04-17

5.13. Radiated Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak

Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80, Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)= Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
Above IGHZ	74.00	Peak

TEST CONFIGURATION


→ 9 kHz ~ 30 MHz

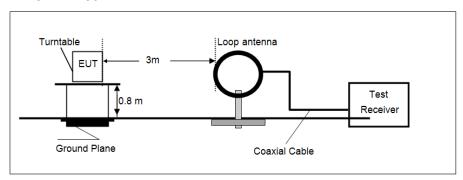

> 30 MHz ~ 1 GHz

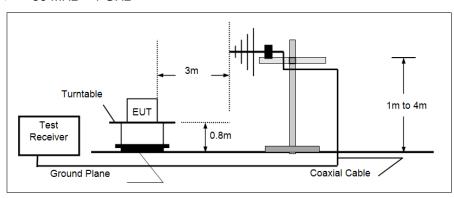

Above 1 GHz

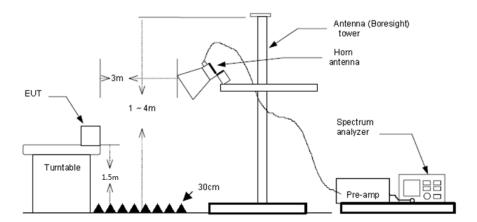

TEST PROCEDURE

- The EUT was setup and tested according to ANSI C63.10.
- 2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
- 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- 5. Set to the maximum power setting and enable the EUT transmit continuously.
- 6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

 Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement: use duty cycle correction factor method (DCCF) Averager level = Peak level + DCCF

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd = Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit Level
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

Report No.: CHTEW20040137 Page: 29 of 33 Issued: 2020-04-17

TEST DATA FOR 9 kHz ~ 30 MHz

The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

TEST DATA FOR 30 MHz ~ 1000 MHz

Have pre-scan all test channel, found CH39 which it was worst case, so only show the worst case's data on this report.

Report No.: CHTEW20040137 Page: 30 of 33 Issued: 2020-04-17

Polarization: Horizontal Level [dBµV/m] 80 60 50 40 30 20 10 0 30M 40M 50M 60M 70M 200M 300M 400M 500M 600M 800M Frequency [Hz] и и и MES GM2004096063_red MEASUREMENT RESULT: "GM2004096063 red" 4/9/2020 4:38PM Level Transd Limit Margin Det. Height Azimuth Polarization Frequency dB dBμV/m MHz dBμV/m dB CIM deg 45.520000 -8.4 20.6 ---300.0 0.00 HORIZONTAL 19.40 40.0 ---20.8 356.00 55.220000 19.20 -8.4 40.0 300.0 HORIZONTAL 101.780000 17.40 26.1 ---127.00 HORIZONTAL -10.2 43.5 100.0 24.4 ---18.4 ---19.10 27.60 -9.4 145.00 HORIZONTAL 333.00 HORIZONTAL 43.5 46.0 194.900000 300.0 HORIZONTAL 542.160000 -0.1 300.0 10.7 ---300.0 169.00 HORIZONTAL 939.860000 35.30 8.0 46.0 Polarization: Vertical Level [dBµV/m] 70 60 50 40 30 20 10 0 30M 50M 60M 70M 100M 300M 400M 500M 600M 1G 40M 200M 800M Frequency [Hz] x x x MES GM2004096064_red MEASUREMENT RESULT: "GM2004096064 red" 4/9/2020 4:41PM Level Transd Limit Margin Det. Height Azimuth Polarization Frequency MHz dBµV/m dB dBuV/m dΒ CIII deq 100.0 33.880000 35.00 -12.1 40.0 5.0 ---152.00 VERTICAL 16.1 ---59.100000 23.90 -9.1 40.0 100.0 3.00 VERTICAL 76.560000 22.50 -14.9 40.0 17.5 ---100.0 164.00 VERTICAL -9.8 0.1 43.5 46.0 20.7 ---192.960000 22.80 100.0 272.00 VERTICAL 100.0 27.90 18.1 ---547.980000 342.00 VERTICAL 951.500000 8.2 46.0 11.0 ---100.0 232.00 VERTICAL 35.00

Report No.: CHTEW20040137 Page: 31 of 33 Issued: 2020-04-17

TEST DATA FOR 1 GHz ~ 25 GHz

Test channel	CH00

Susp	Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector	
1	1239.406	33.25	-5.73	27.52	74.00	46.48	Horizontal	PK	
2	3175.218	31.76	0.71	32.47	74.00	41.53	Horizontal	PK	
3	4804.062	41.22	7.06	48.28	74.00	25.72	Horizontal	PK	
4	6651.750	30.26	13.32	43.58	74.00	30.42	Horizontal	PK	

Suspe	Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector	
1	1224.718	33.95	-5.77	28.18	74.00	45.82	Vertical	PK	
2	3151.718	32.00	0.59	32.59	74.00	41.41	Vertical	PK	
3	4804.062	41.68	7.06	48.74	74.00	25.26	Vertical	PK	
4	6654.687	30.24	13.33	43.57	74.00	30.43	Vertical	PK	

Test channel CH39

Suspe	Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector	
1	1192.406	34.29	-5.91	28.38	74.00	45.62	Horizontal	PK	
2	3166.406	32.69	0.67	33.36	74.00	40.64	Horizontal	PK	
3	4881.906	37.13	7.16	44.29	74.00	29.71	Horizontal	PK	
4	7776.812	33.10	15.32	48.42	74.00	25.58	Horizontal	PK	

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
1	1199.750	33.57	-5.83	27.74	74.00	46.26	Vertical	PK
2	3103.250	31.52	0.34	31.86	74.00	42.14	Vertical	PK
3	4881.906	35.36	7.16	42.52	74.00	31.48	Vertical	PK
4	6691.406	30.32	13.44	43.76	74.00	30.24	Vertical	PK

Test channel CH78

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
1	1148.343	34.82	-6.38	28.44	74.00	45.56	Horizontal	PK
2	3188.437	31.64	0.78	32.42	74.00	41.58	Horizontal	PK
3	4959.750	35.05	7.58	42.63	74.00	31.37	Horizontal	PK
4	6895.562	29.95	14.06	44.01	74.00	29.99	Horizontal	PK

Susp	Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector	
1	1186.531	33.42	-5.97	27.45	74.00	46.55	Vertical	PK	
2	3203.125	31.90	0.80	32.70	74.00	41.30	Vertical	PK	
3	4959.750	32.39	7.58	39.97	74.00	34.03	Vertical	PK	
4	7114.406	29.79	14.51	44.30	74.00	29.70	Vertical	PK	

Report No.: CHTEW20040137 Page: 32 of 33 Issued: 2020-04-17

6. TEST SETUP PHOTOS

Radiated Emissio







Report No.: CHTEW20040137 Page: 33 of 33 Issued: 2020-04-17



AC Conducted Emission



7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No.: CHTEW20030073.

8. APPENDIX REPORT

Project No.: SHT2004013802EW Radio Specification: Bluetooth EDR

APPENDIX REPORT

Project No.	SHT2004013802EW	Radio Specification	Bluetooth EDR
Test sample No.	YPHT20040138009	Model No.	EP8100 U5(806-941MHz)
Start test date	2020/4/14	Finish date	2020/4/14
Temperature	25°C	Humidity	50%
Test Engineer	Jinyue.Yan	Auditor	William . wang


Appendix clause	Test item	Result
А	Peak Output Power	PASS
В	20 dB Bandwidth	PASS
С	99% Occupied Bandwidth	PASS
D	Carrier Frequencies Separation	PASS
Е	Hopping Channel Number	PASS
F	Dwell Time	PASS
G	Duty Cycle Correction Factor (DCCF)	PASS
Н	Band edge and Spurious Emissions(coducted)	PASS


Project No.: SHT2004013802EW Radio Specification: Bluetooth EDR


Appendix A: Peak Output Power

Modulation type	Channel	Output power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
	00	7.67	6.35		
GFSK	39	8.32	7.23	≤ 30.00	Pass
	78	7.97	6.11		
	00	6.36	4.85		
π/4DQPSK	39	7.26	6.02	≤ 21.00	Pass
	78	7.46	6.04		
	00	6.59	4.37		
8DPSK	39	7.41	5.98	≤ 21.00	Pass
	78	7.52	6.11		

Project No.: SHT2004013802EW Radio Specification: Bluetooth EDR

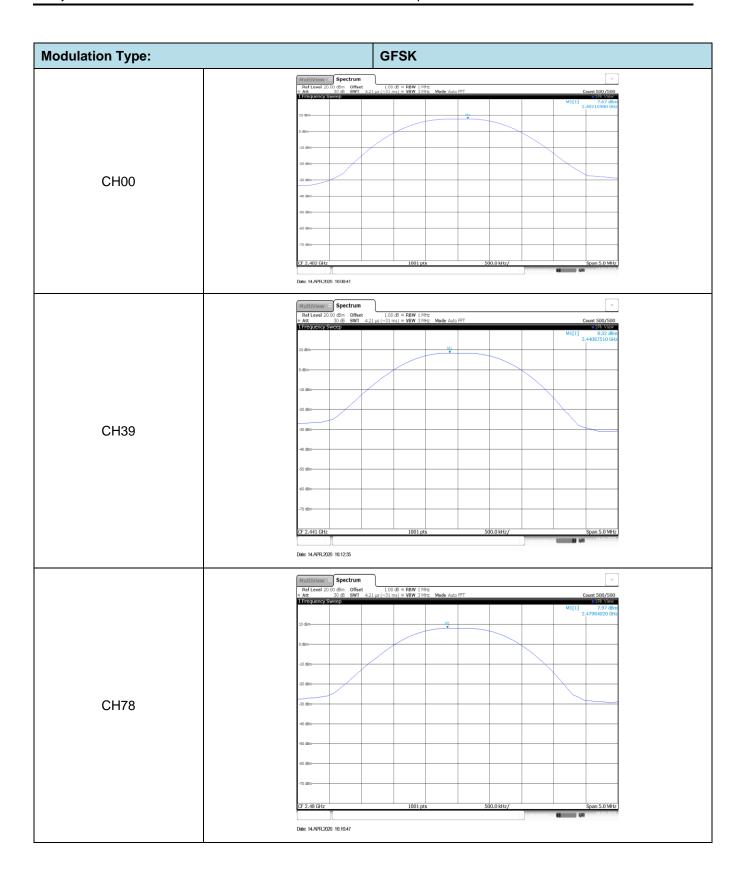


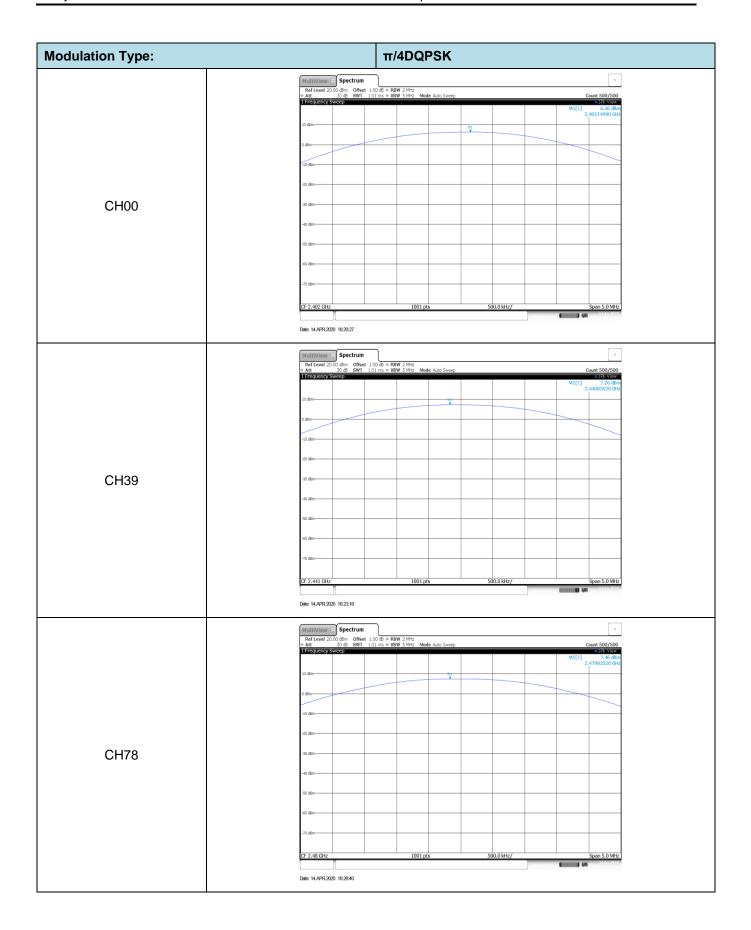


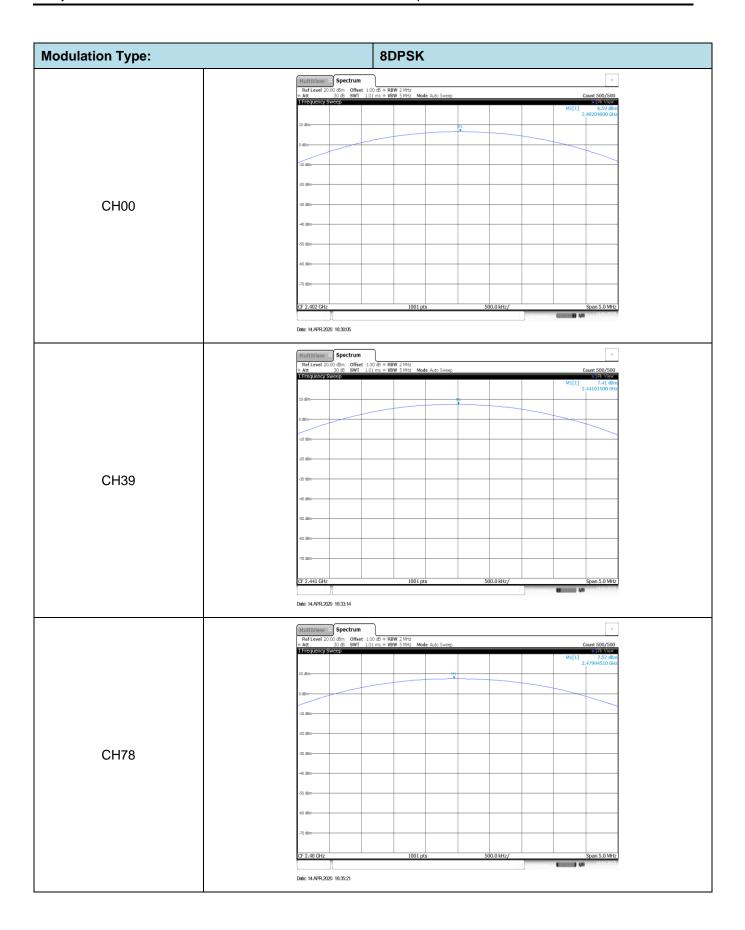


Appendix B : 20 dB Bandwidth

Modulation type	Channel	20 dB Bandwidth (kHz)	0 dB Bandwidth (kHz) Limit (kHz)	
	00	932.50		
GFSK	39	930.00	-	Pass
	78	932.50		
	00	1330.00		
π/4DQPSK	39	1327.50	-	Pass
	78	1352.50		
	00	1307.50		
8DPSK	39	1330.00	-	Pass
	78	1335.00		

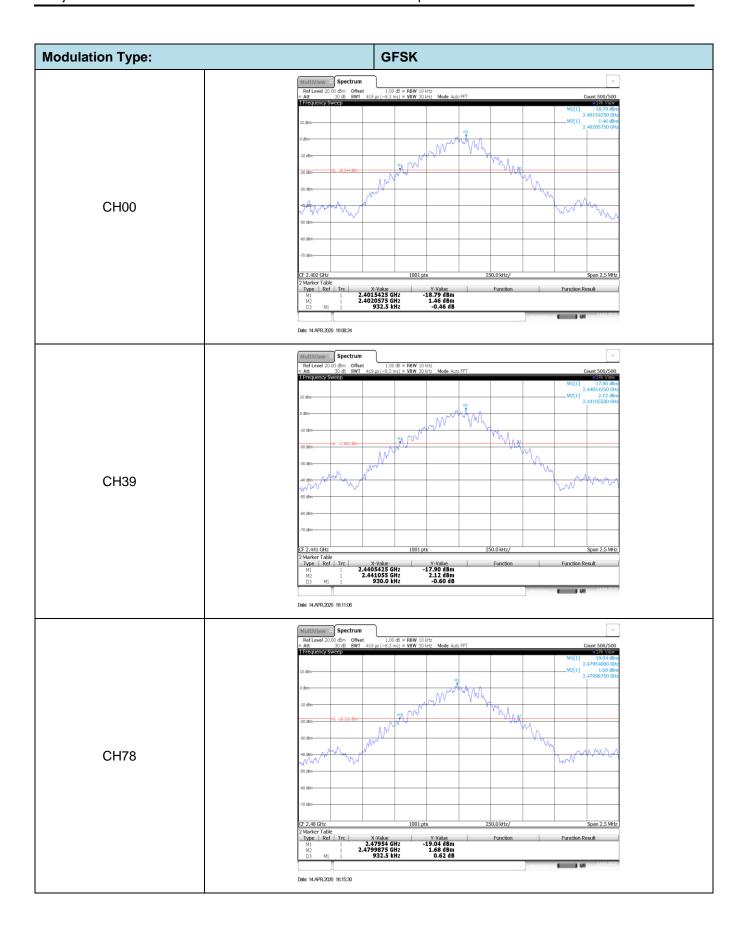


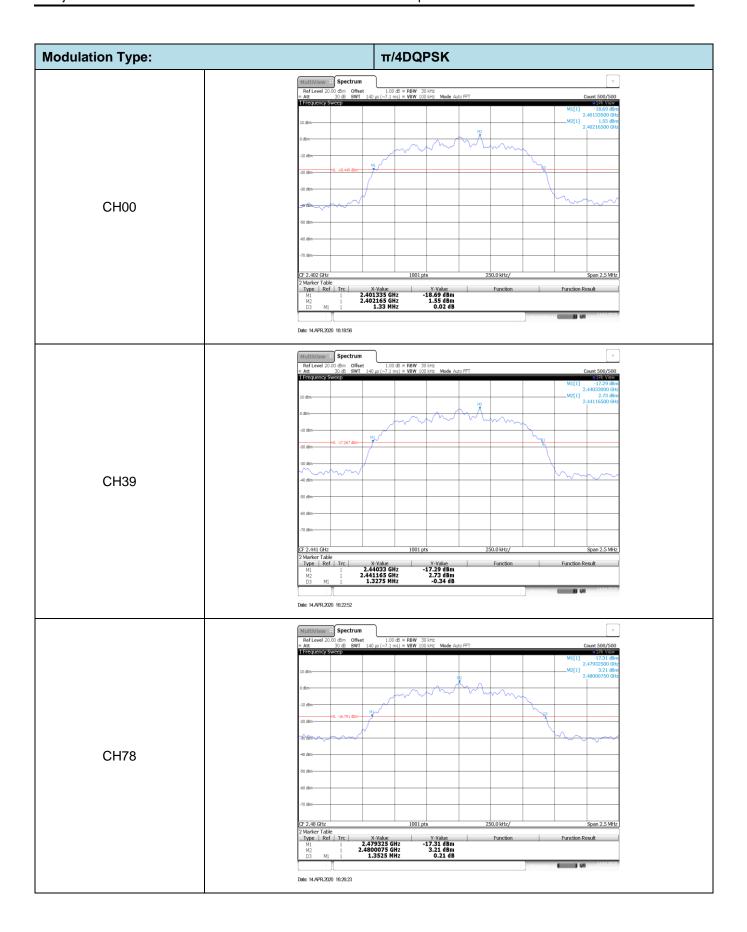


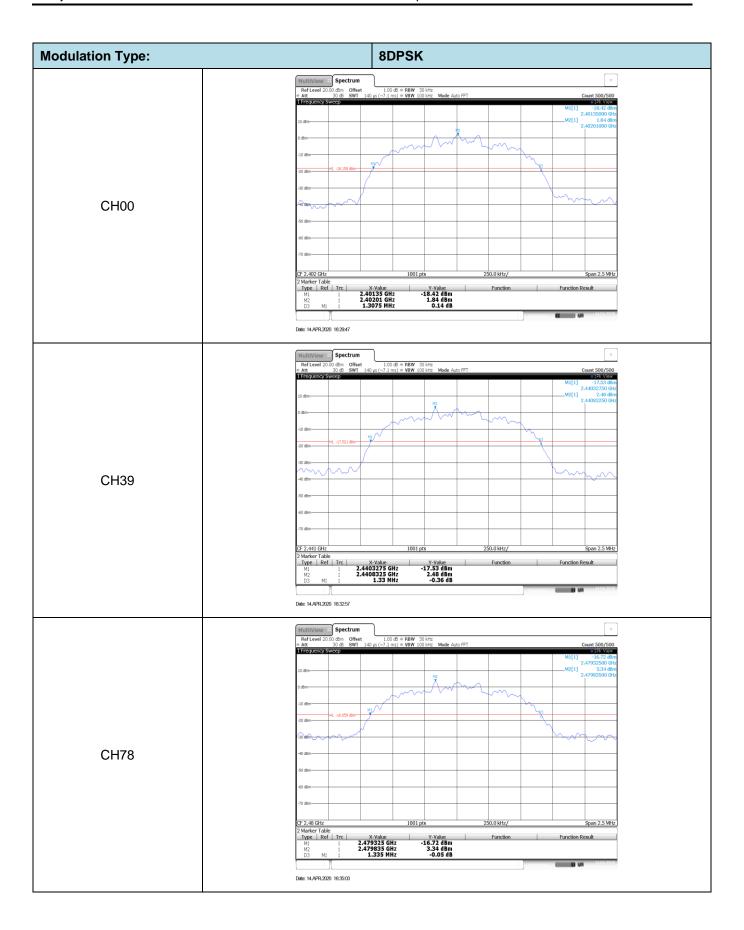


Appendix C: 99% Occupied Bandwidth

Modulation type	Channel	99% Occupied Bandwidth (MHz) Limit (MHz)		Result
	00	0.89		
GFSK	39	0.88	-	Pass
	78	0.89		
	00	1.18		
π/4DQPSK	39	1.18	-	Pass
	78	1.21		
	00	1.18		
8DPSK	39	1.19	-	Pass
	78	1.22		

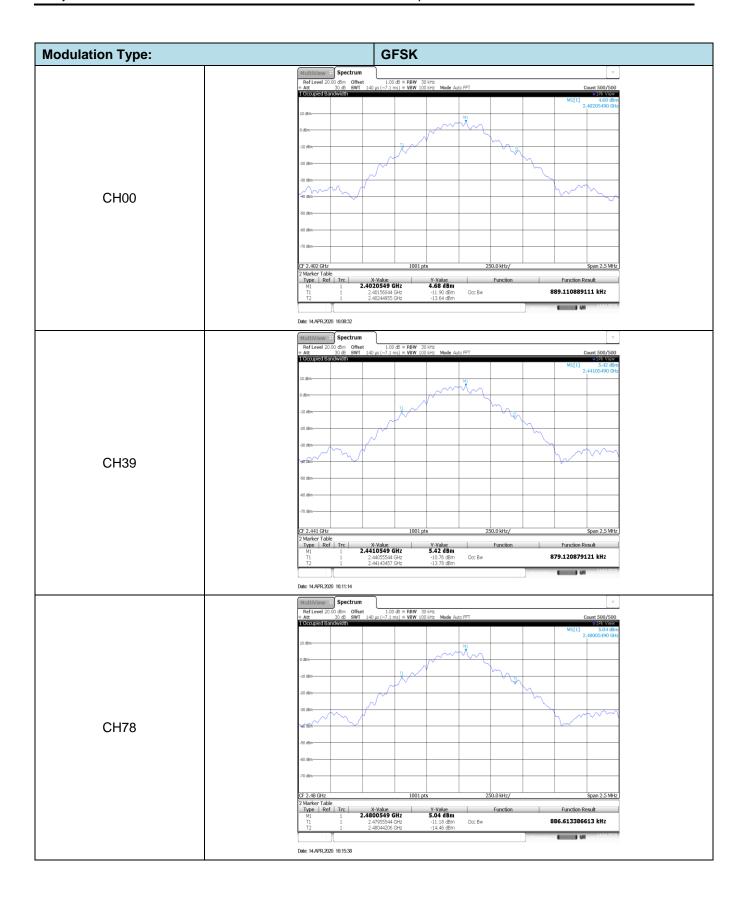

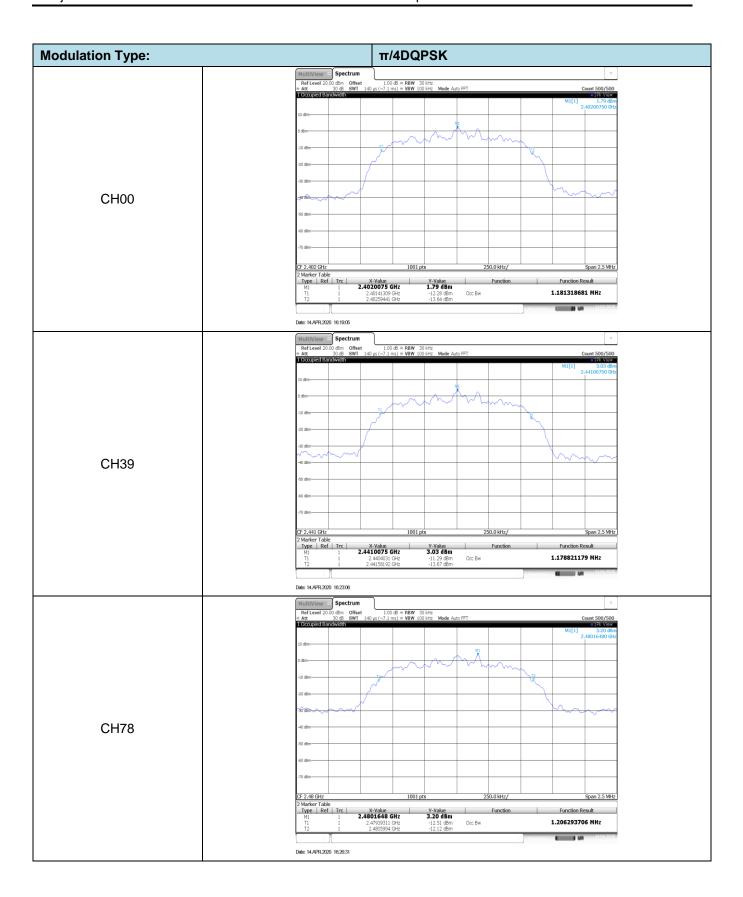

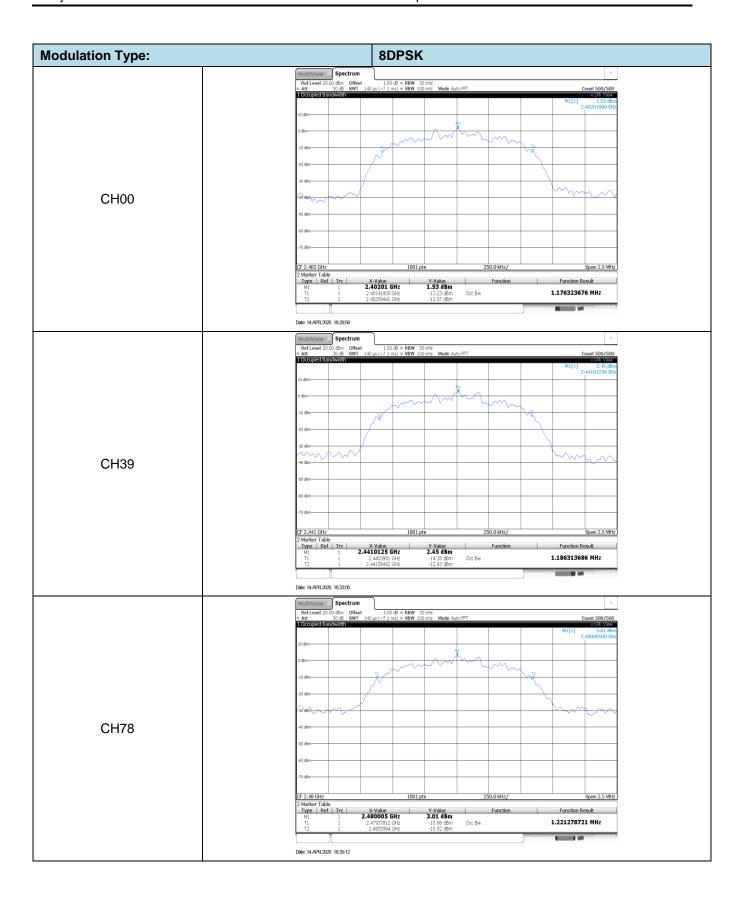


Appendix D: Carrier Frequencies Separation

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (kHz) *	Result
GFSK	39	1.00	≥932.50	Pass
π/4DQPSK	39	1.16	≥901.67	Pass
8DPSK	39	1.00	≥890.00	Pass


Note:

^{*:} GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the appendix B. $\pi/4DQPSK$ limit = 2/3 * The maximum 20 dB Bandwidth for $\pi/4DQPSK$ modulation on the appendix B. 8DPSK limit = 2/3 * The maximum 20 dB Bandwidth for 8DPSK modulation on the appendix B

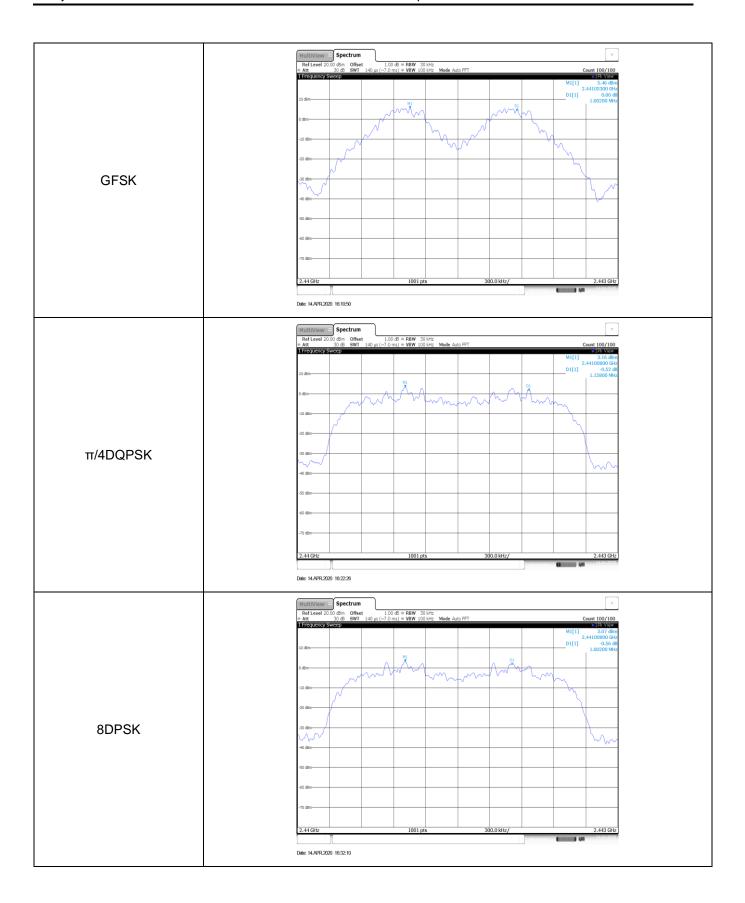


Appendix E: Hopping Channel Number


Modulation type	Channel number	Limit	Result
GFSK	79		
π/4DQPSK	79	≥15.00	Pass
8DPSK	79		

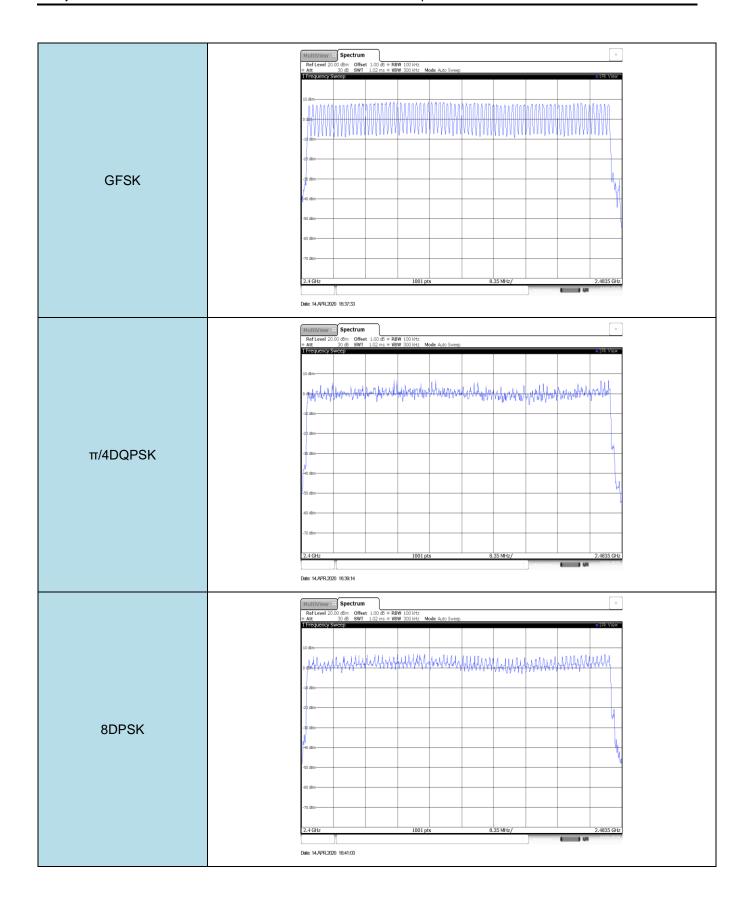



Appendix F: Dwell Time


Modulation type	Packet	Burst Width [ms]	Total Hops[hop*ch]	Dwell time (Second)	Limit (Second)	Result
	DH1	0.38	320	0.12		
GFSK	DH3	1.65	160	0.26	≤ 0.40	Pass
	DH5	2.91	107	0.31		
	2DH1	0.40	320	0.13		
π/4DQPSK	2DH3	1.66	160	0.27	≤ 0.40	Pass
	2DH5	2.91	107	0.31		
	3DH1	0.41	320	0.13		
8DPSK	3DH3	1.67	160	0.27	≤ 0.40	Pass
	3DH5	2.91	107	0.31		

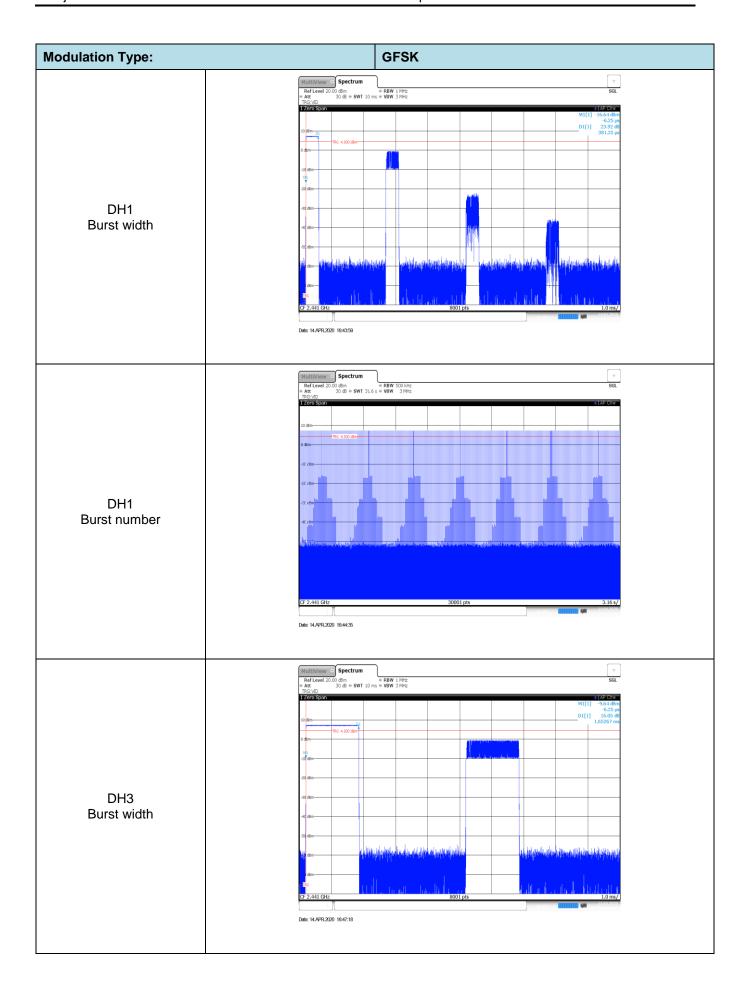


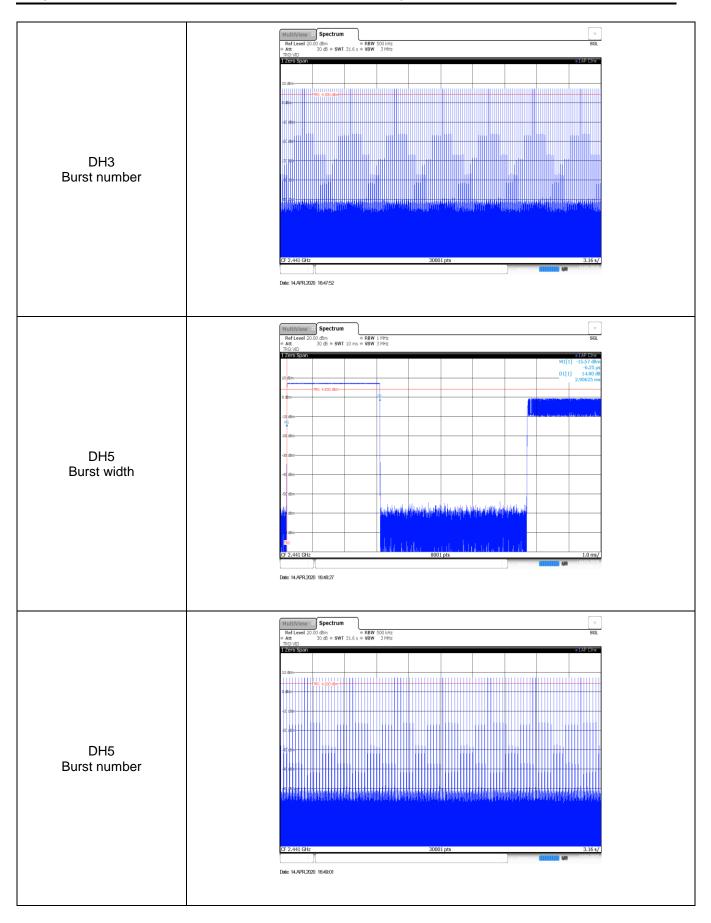

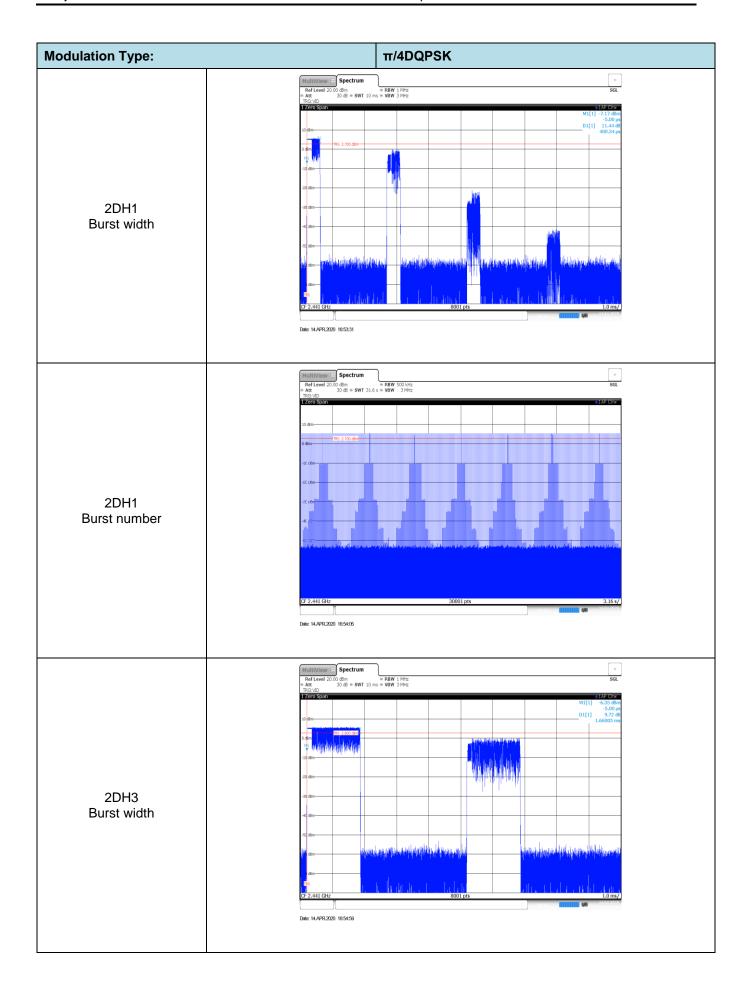

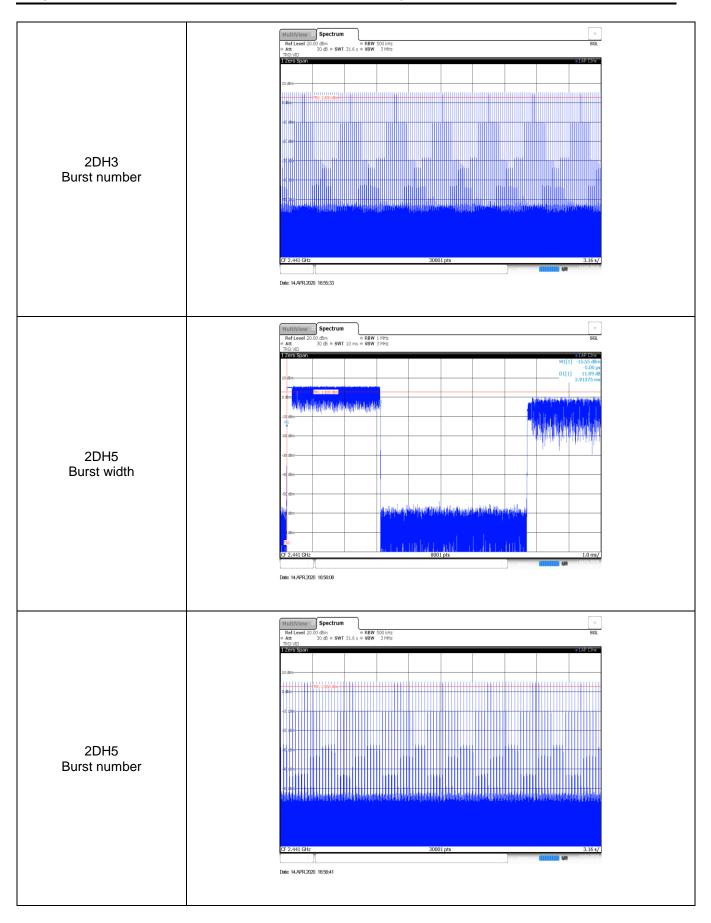


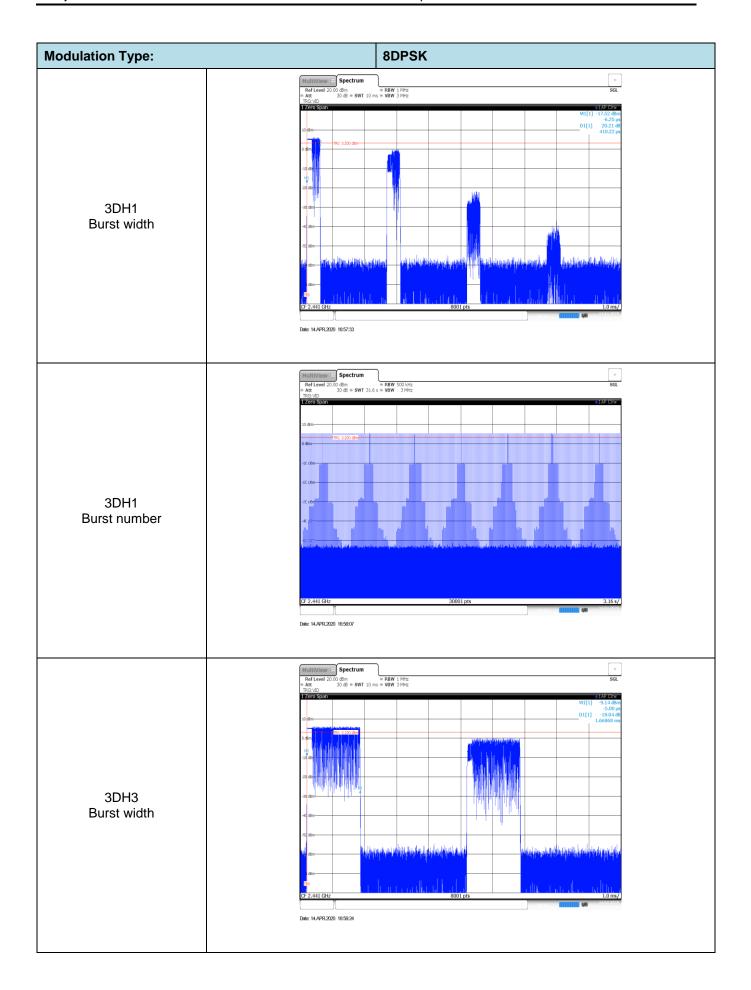

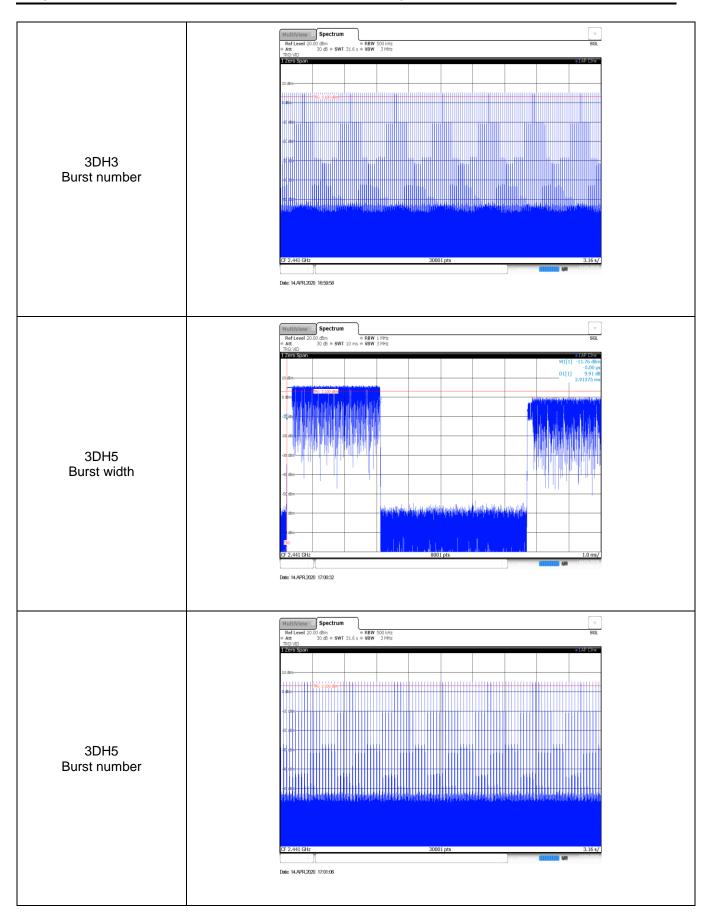



Appendix G: Duty Cycle Correction Factor (DCCF)


DCCF Calculate Formula						
DCCF=20 * Log(duty cycle) = 20 * Log(T _{on time} / T _{period})						
Modulation type	Test Frequency (MHz)	T _{on time} for single burst [ms]	T _{period} [ms]	Burst Quantity	DCCF [dB]	
GFSK	2441	2.89	100	4	-18.74	
π/4 DQPSK	2441	2.90	100	4	-18.71	
8DPSK	2441	2.90	100	4	-18.71	

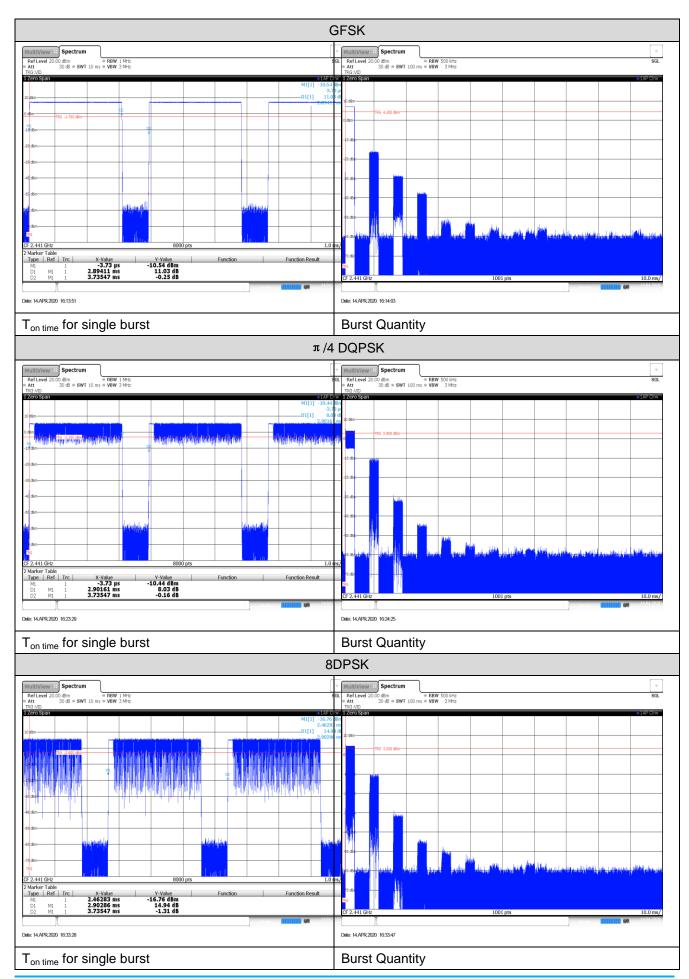



Appendix H: Band edge and Spurious Emissions (conducted)

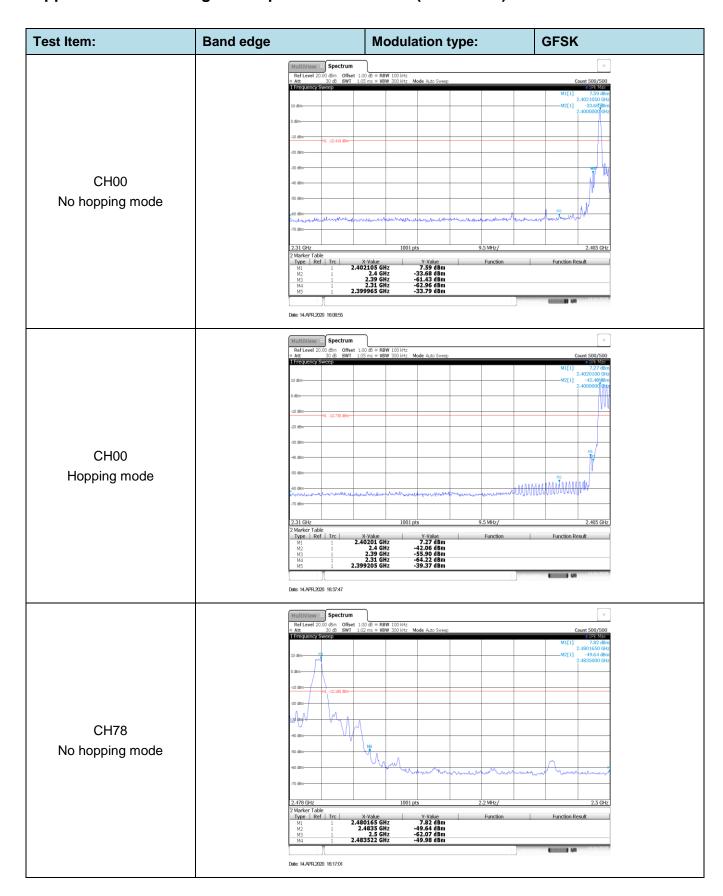


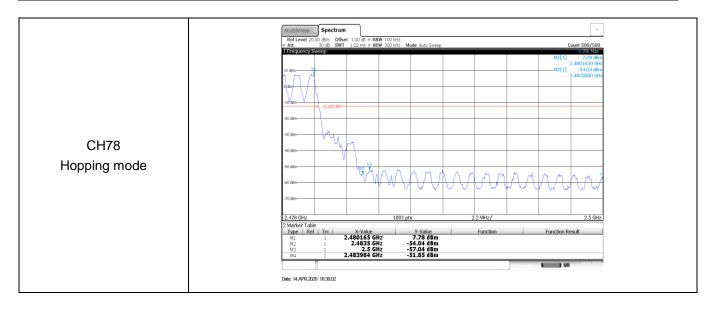


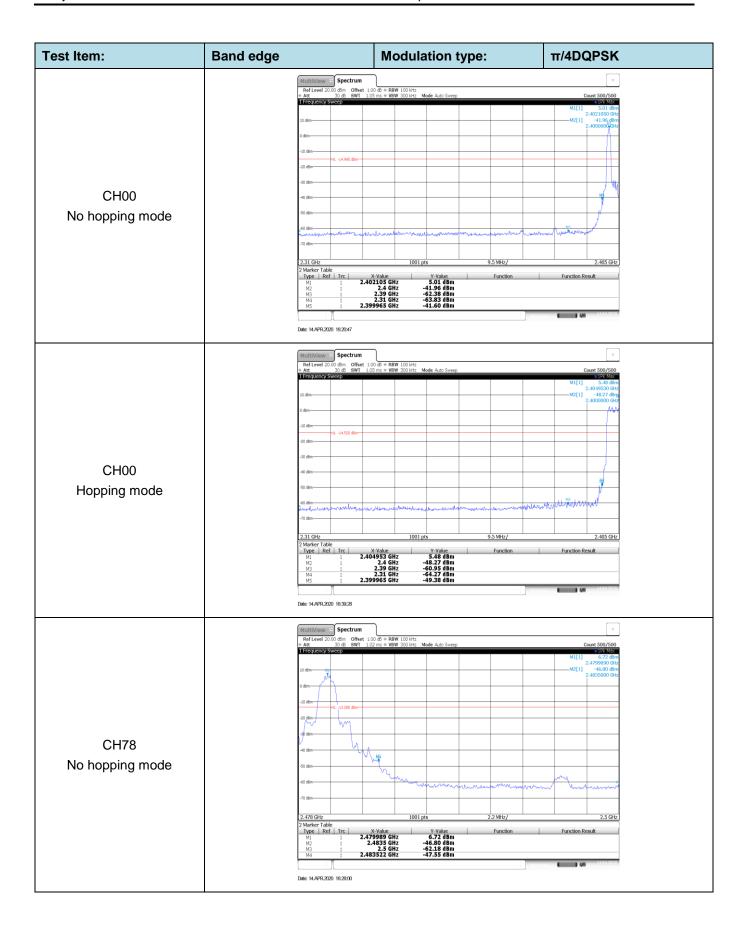


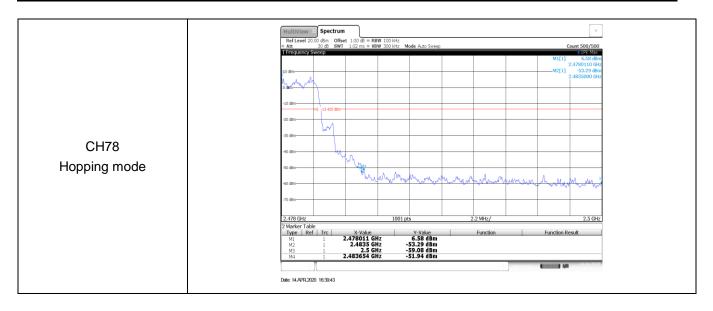


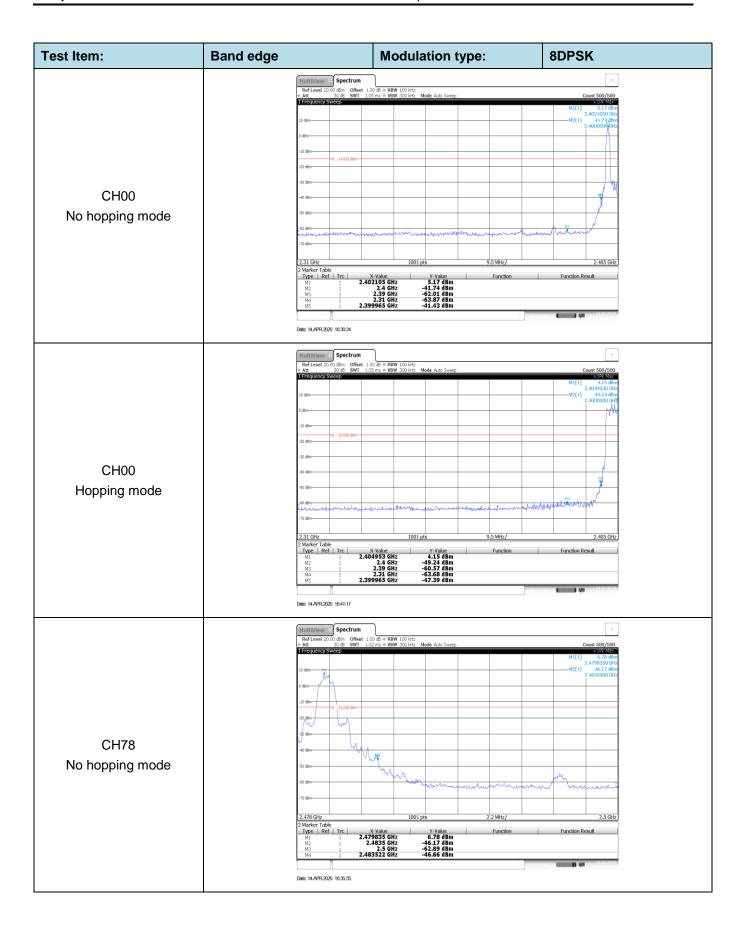


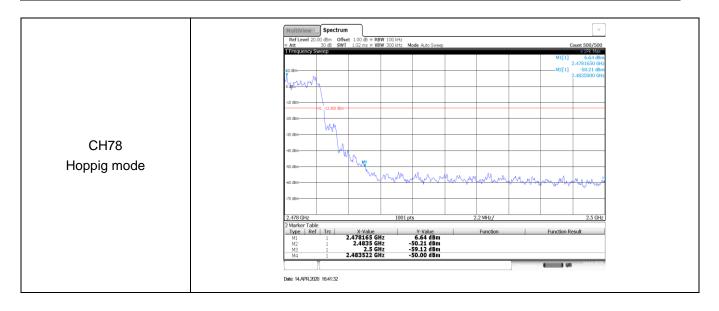


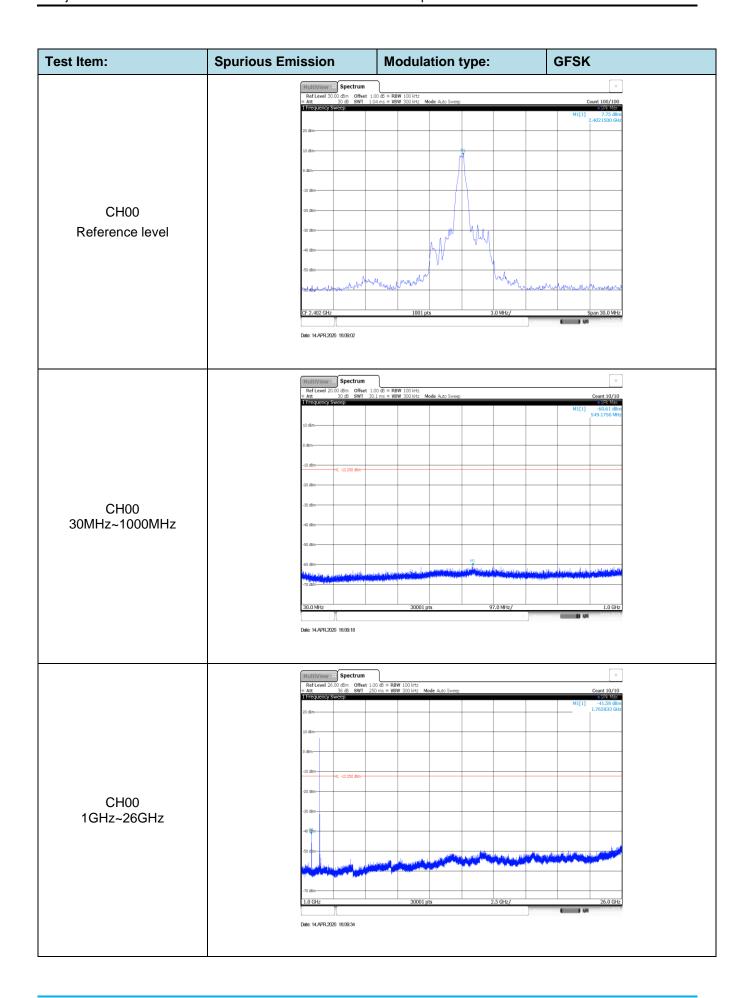


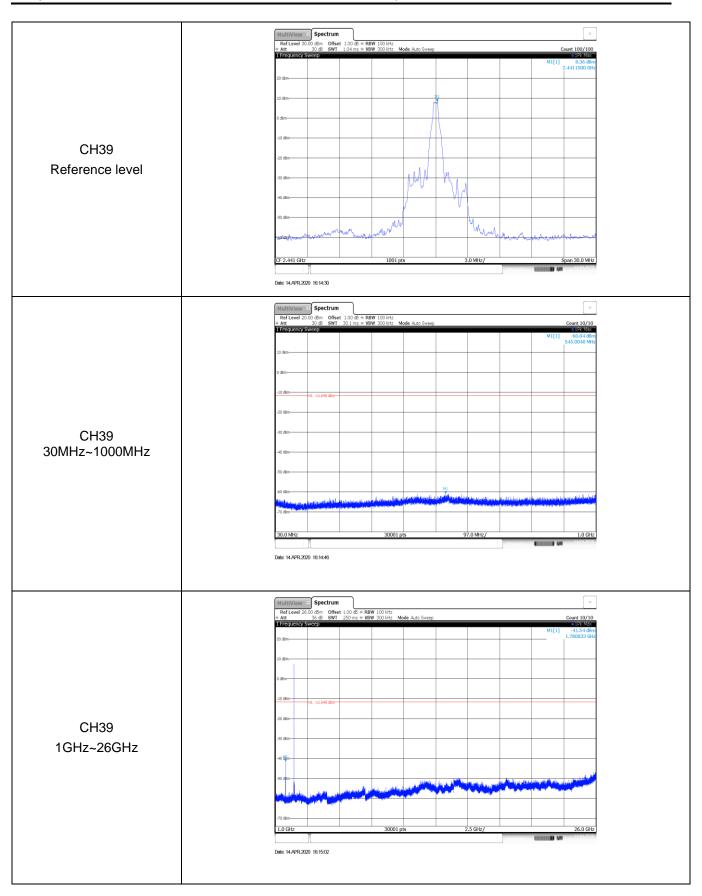


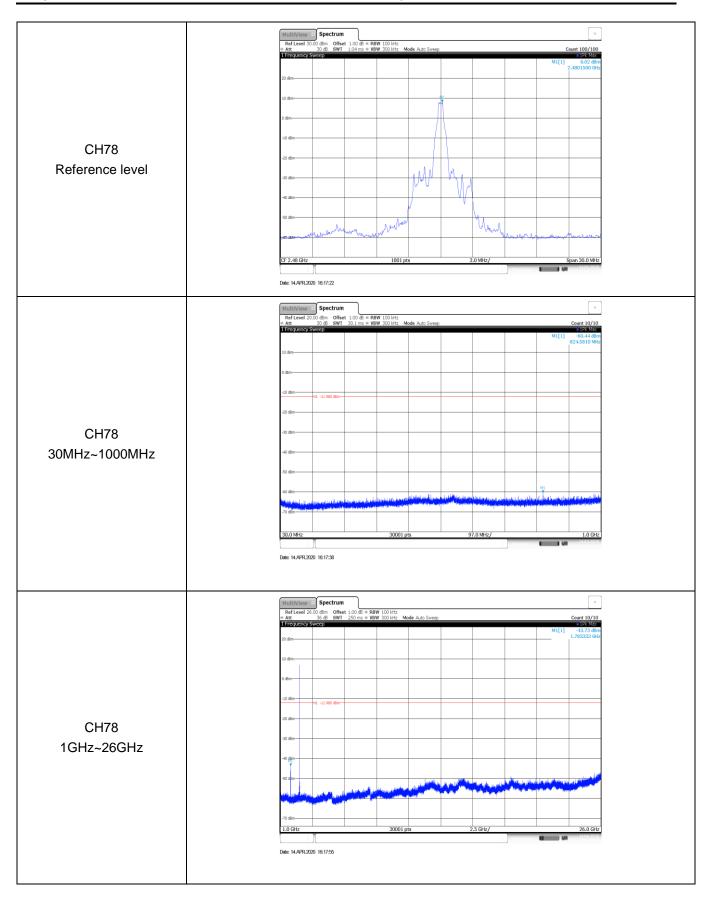


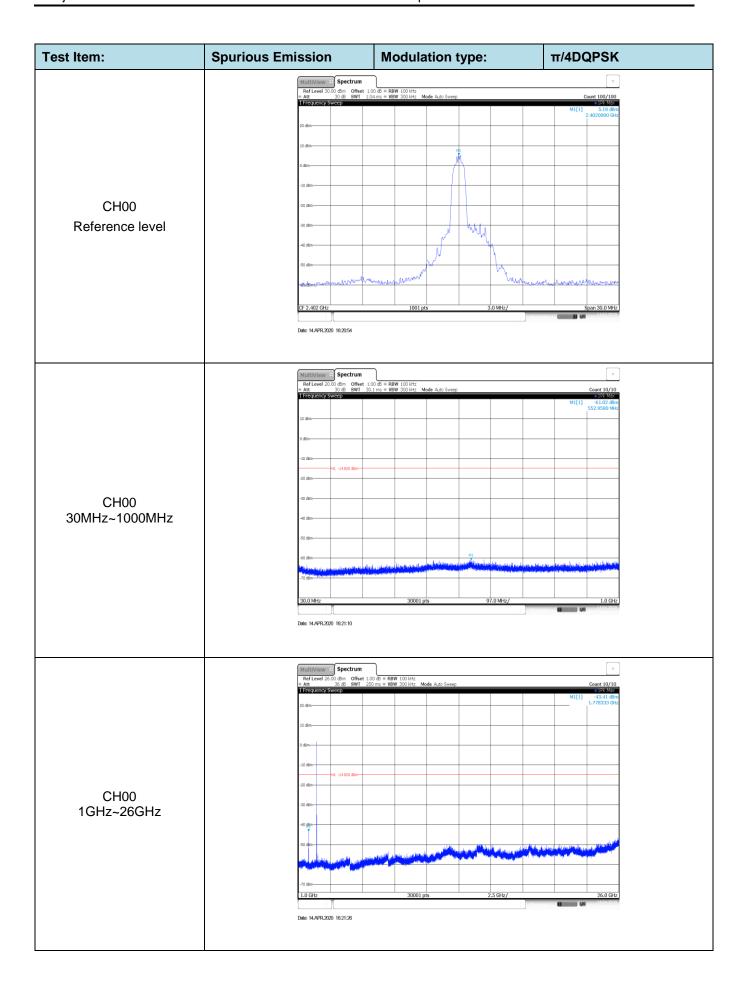


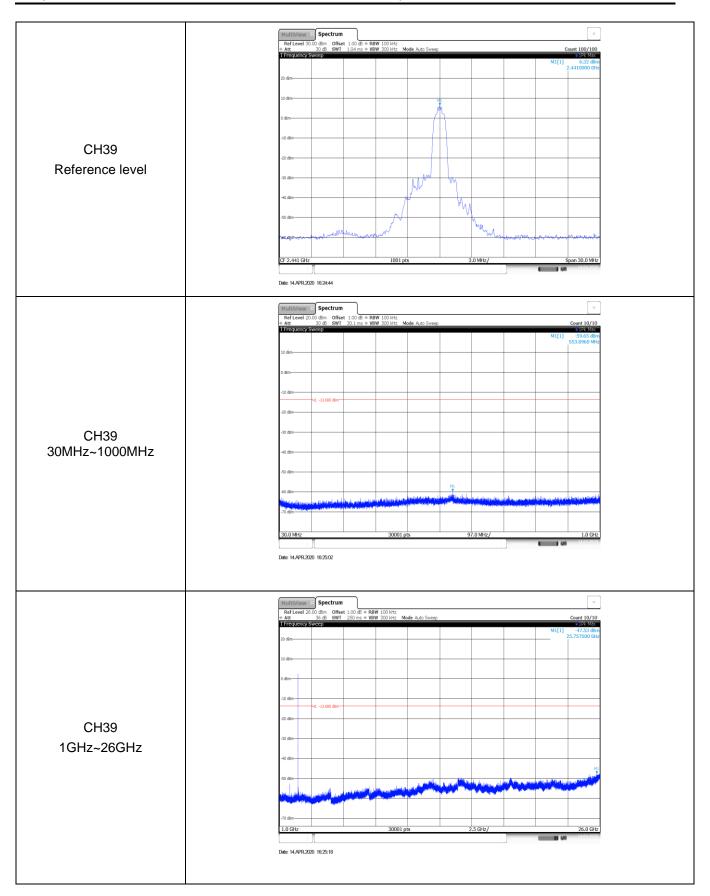

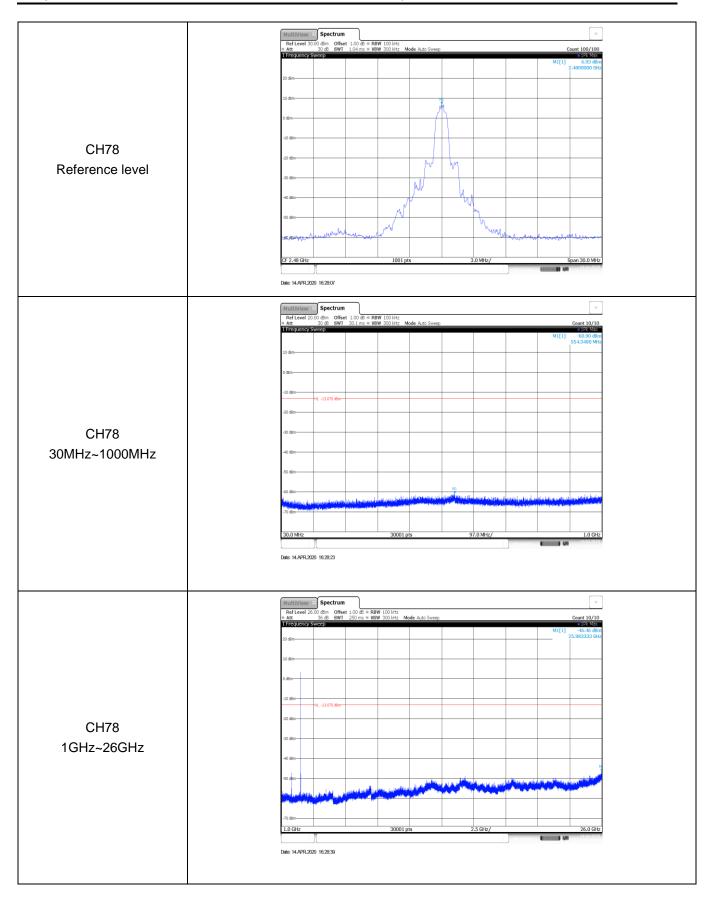

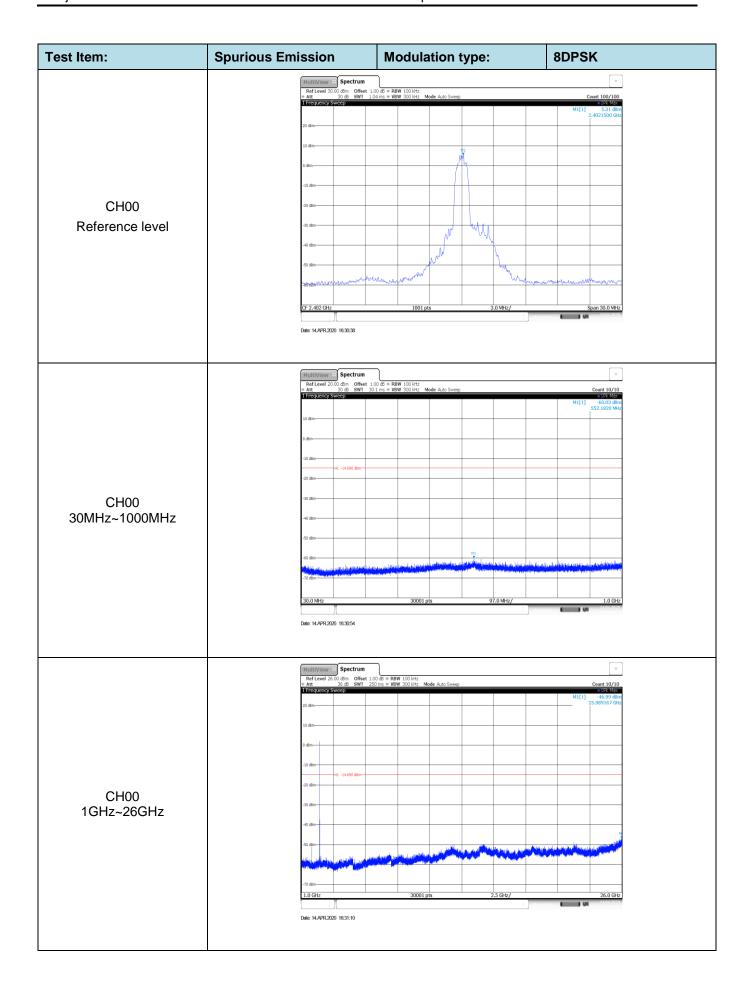

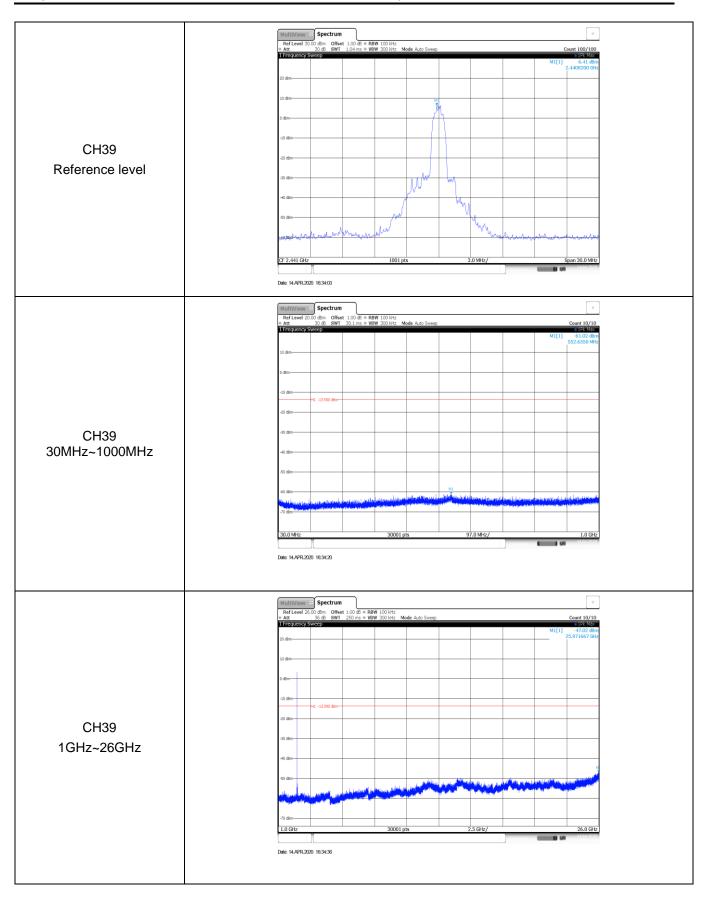

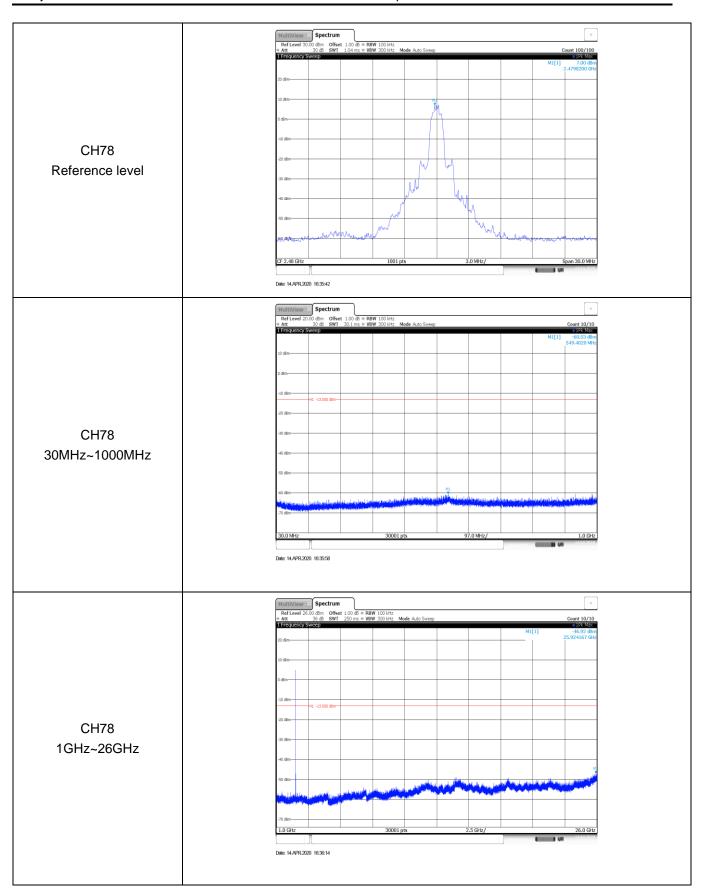

-----End of Report-----