



FCC TEST REPORT

FCC ID: 2AATL-6251C-PUB

On Behalf of

FN-LINK TECHNOLOGY LIMITED

Wi-Fi/BT module

Model No.: 6251C-PUB

Prepared for : FN-LINK TECHNOLOGY LIMITED
Address : No.8, Litong Road, Liuyang Economic & Technical Development
Zone, Changsha, Hunan, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2408107-C01-R08
Date of Receipt : August 19, 2024
Date of Test : August 19, 2024 – September 27, 2024
Date of Report : October 10, 2024
Version Number : V0
Result **Pass**

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. Summary Of Standards And Results.....	6
1.1. Description of Standards and Results.....	6
2. General Information.....	7
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description.....	8
2.6. Test Conditions	9
2.7. Test Facility	9
2.8. Measurement Uncertainty.....	9
2.9. Test Equipment List	10
3. Maximum Peak Output Power.....	12
3.1. Limit.....	12
3.2. Test Procedure	12
3.3. Test Setup	12
3.4. Test Result.....	12
4. Bandwidth	14
4.1. Limit.....	14
4.2. Test Procedure	14
4.3. Test Result.....	14
5. Carrier Frequency Separation.....	25
5.1. Limit.....	25
5.2. Test Procedure	25
5.3. Test Result.....	25
6. Number Of Hopping Channel.....	27
6.1. Limit.....	27
6.2. Test Procedure	27
6.3. Test Result.....	27
7. Dwell Time	29
7.1. Test limit.....	29
7.2. Test Procedure	29
7.3. Test Result.....	29
8. Radiated Emissions.....	39
8.1. Limit.....	39
8.2. Block Diagram of Test setup.....	41
8.3. Test Procedure	42
8.4. Test Result.....	42
9. Band Edge Compliance	57
9.1. Block Diagram of Test Setup	57

9.2. Limit.....	57
9.3. Test Procedure	57
9.4. Test Result.....	57
10. Power Line Conducted Emissions	73
10.1. Block Diagram of Test Setup.....	73
10.2. Limit.....	73
10.3. Test Procedure	73
10.4. Test Result	73
11. Antenna Requirements	76
11.1. Limit.....	76
11.2. Result.....	76
12. Test Setup Photo	77
12.1. Photos of Radiated emission	77
12.2. Photos of Conducted Emission test.....	78

TEST REPORT DECLARATION

Applicant : FN-LINK TECHNOLOGY LIMITED

Address : No.8, Litong Road, Liuyang Economic & Technical Development Zone,
Changsha, Hunan, China

Manufacturer : FN-LINK TECHNOLOGY LIMITED

Address : No.8, Litong Road, Liuyang Economic & Technical Development Zone,
Changsha, Hunan, China

EUT Description : Wi-Fi/BT module

(A) Model No. : 6251C-PUB

(B) Trademark :  欧智通

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247,
ANSI C63.10:2013, CISPR 16-1-4:2010

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen
Project Engineer



Approved by (name + signature).....: Jack Xu
Project Manager



Date of issue.....: October 10, 2024

Revision History

Revision	Issue Date	Revisions	Revised By
V0	October 10, 2024	Initial released Issue	Yannis Wen

1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	P
Antenna requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. Decision rules for the conclusion of this test report: decision by actual test data without considering measurement uncertainty.		

2. General Information

2.1. Description of Device (EUT)

Description/PMN : Wi-Fi/BT module

Model : 6251C-PUB

Number/HVIN(s)

Diff. : N/A

Test Voltage : DC 3.3V from USB adapter board

Radio Technology : Bluetooth EDR

Operation frequency : 2402-2480MHz

Channel No. : 79 Channels

Channel spacing : 1MHz

Modulation type : GFSK, $\pi/4$ DQPSK, 8DPSK

Antenna Type : PIFA antenna 1, max gain 3.39dBi

PIFA antenna 2, max gain 3.39dBi
(Antenna information is provided by applicant.)

Software version : V1.0

Hardware version : V1.0

Remark:

1. Both antenna 1 and antenna 2 have transmissions and can only be transmitted separately. They do not support MIMO.


2.2. Accessories of Device (EUT)

Accessories	:	/
Manufacturer	:	/
Model	:	/
Ratings	:	/

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1.	Notebook PC	Lenovo	ThinkPad E14	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

The test software “BT Tools.exe” was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Mode	Channel	Frequency (MHz)
Carrier Tx Mode	CH0	2402
	CH39	2441
	CH78	2480
GFSK / Pi/4-DQPSK / 8-DPSK hopping on Tx Mode	CH0 to CH78	2402 to 2480
GFSK / Pi/4-DQPSK / 8-DPSK hopping off Tx Mode	CH0	2402
	CH39	2441
	CH78	2480

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	25℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

Designation Number: CN1236

July 15, 2019 Certificated by IC

Registration Number: 12135A

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2℃
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.18	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2024.08.08	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2024.08.08	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2024.08.08	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2024.08.08	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2024.08.08	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2024.08.08	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2024.08.08	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2024.08.08	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2024.08.08	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2024.08.08	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2024.08.08	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	2Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2024.08.08	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2024.08.08	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2024.08.08	1 Year
Electronic Thermo-Hygrometer	S.H.Qixiang	HTC-1	/	N/A	2024.08.11	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2024.08.08	1 Year
Adjustable attenuator	MWRFTest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. Maximum Peak Output Power


3.1. Limit

Please refer FCC part 15.247.

3.2. Test Procedure

The transmitter output is connected to the RF Power meter. The Power meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	4.996	≤30	Pass
NVNT	1-DH1	2441	Ant1	4.783	≤30	Pass
NVNT	1-DH1	2480	Ant1	3.725	≤30	Pass
NVNT	1-DH3	2441	Ant1	5.15	≤30	Pass
NVNT	1-DH5	2441	Ant1	4.766	≤30	Pass
NVNT	2-DH1	2402	Ant1	4.69	≤21	Pass
NVNT	2-DH1	2441	Ant1	5.352	≤21	Pass
NVNT	2-DH1	2480	Ant1	3.61	≤21	Pass
NVNT	2-DH3	2441	Ant1	5.388	≤21	Pass
NVNT	2-DH5	2441	Ant1	5.144	≤21	Pass
NVNT	3-DH1	2402	Ant1	5.743	≤21	Pass
NVNT	3-DH1	2441	Ant1	5.247	≤21	Pass
NVNT	3-DH1	2480	Ant1	4.36	≤21	Pass
NVNT	3-DH3	2441	Ant1	5.242	≤21	Pass
NVNT	3-DH5	2441	Ant1	5.292	≤21	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant2	4.361	≤30	Pass
NVNT	1-DH1	2441	Ant2	4.247	≤30	Pass
NVNT	1-DH1	2480	Ant2	3.99	≤30	Pass
NVNT	1-DH3	2441	Ant2	4.554	≤30	Pass
NVNT	1-DH5	2441	Ant2	4.644	≤30	Pass
NVNT	2-DH1	2402	Ant2	4.248	≤21	Pass
NVNT	2-DH1	2441	Ant2	4.097	≤21	Pass
NVNT	2-DH1	2480	Ant2	3.528	≤21	Pass
NVNT	2-DH3	2441	Ant2	4.21	≤21	Pass
NVNT	2-DH5	2441	Ant2	4.309	≤21	Pass
NVNT	3-DH1	2402	Ant2	4.753	≤21	Pass
NVNT	3-DH1	2441	Ant2	4.328	≤21	Pass
NVNT	3-DH1	2480	Ant2	4.16	≤21	Pass
NVNT	3-DH3	2441	Ant2	5.124	≤21	Pass
NVNT	3-DH5	2441	Ant2	5.021	≤21	Pass

4. Bandwidth

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


4.3. Test Result

-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH1	2402	Ant1	0.958
NVNT	1-DH1	2441	Ant1	0.954
NVNT	1-DH1	2480	Ant1	0.952
NVNT	2-DH1	2402	Ant1	1.36
NVNT	2-DH1	2441	Ant1	1.362
NVNT	2-DH1	2480	Ant1	1.36
NVNT	3-DH1	2402	Ant1	1.346
NVNT	3-DH1	2441	Ant1	1.346
NVNT	3-DH1	2480	Ant1	1.346


Note: 1. All antennas have been tested, and antenna 1 is the worst data.

-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

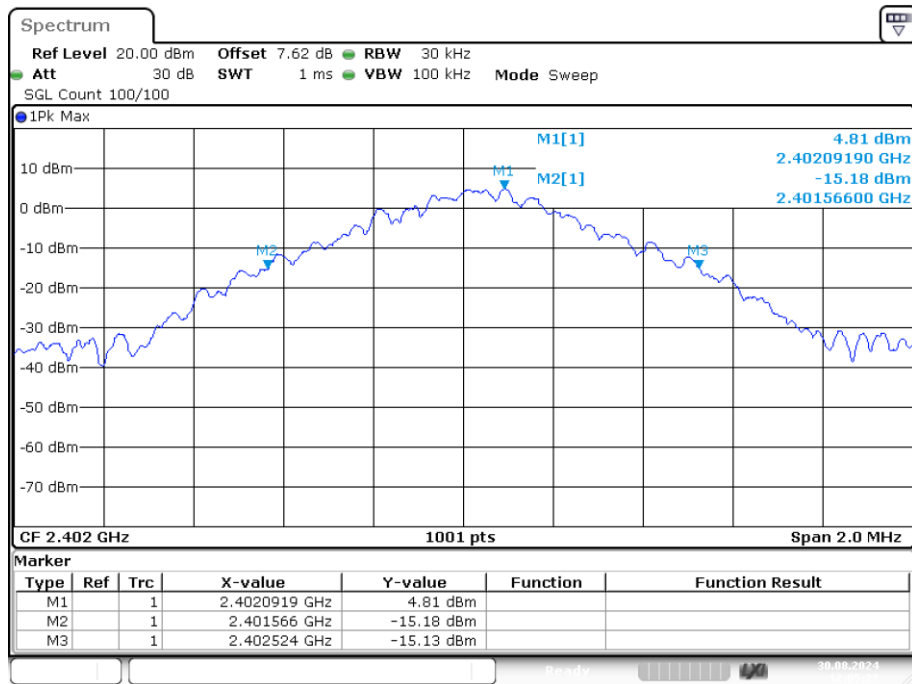


Date: 30.AUG.2024 12:05:27

-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

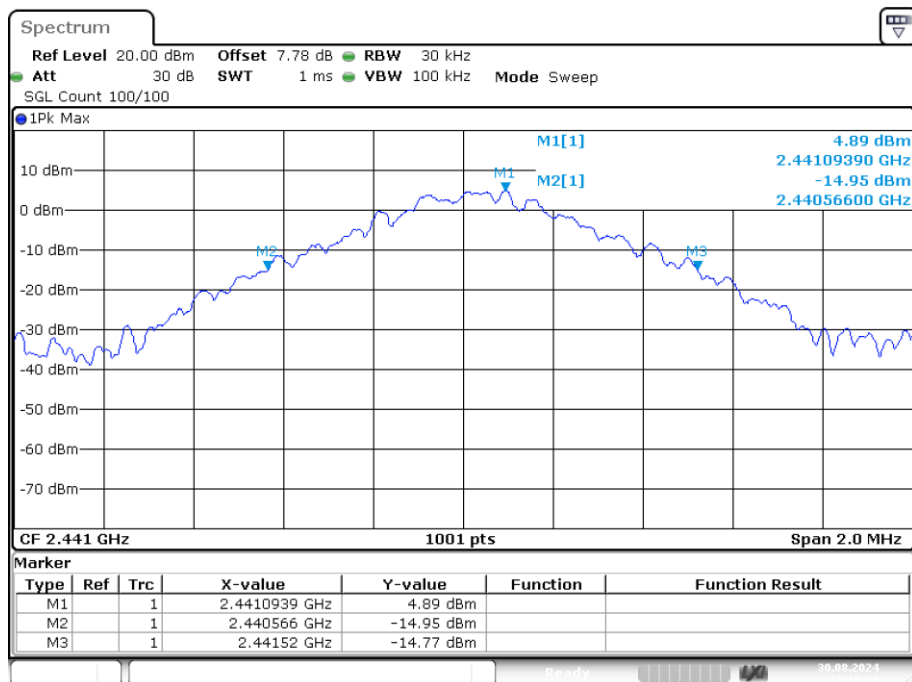


Date: 30.AUG.2024 12:10:23

-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

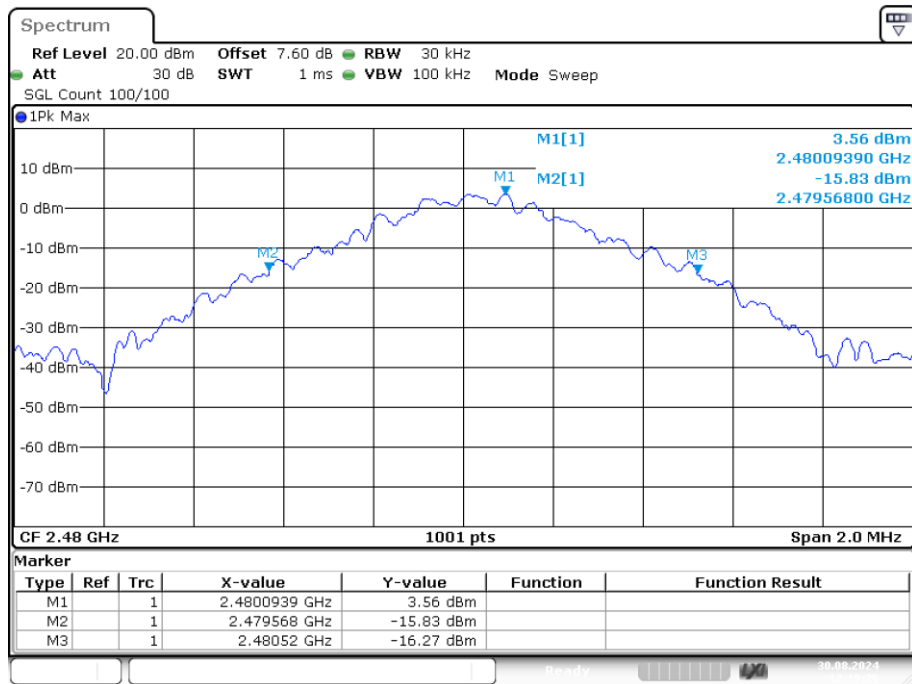


Date: 30.AUG.2024 12:19:26

-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

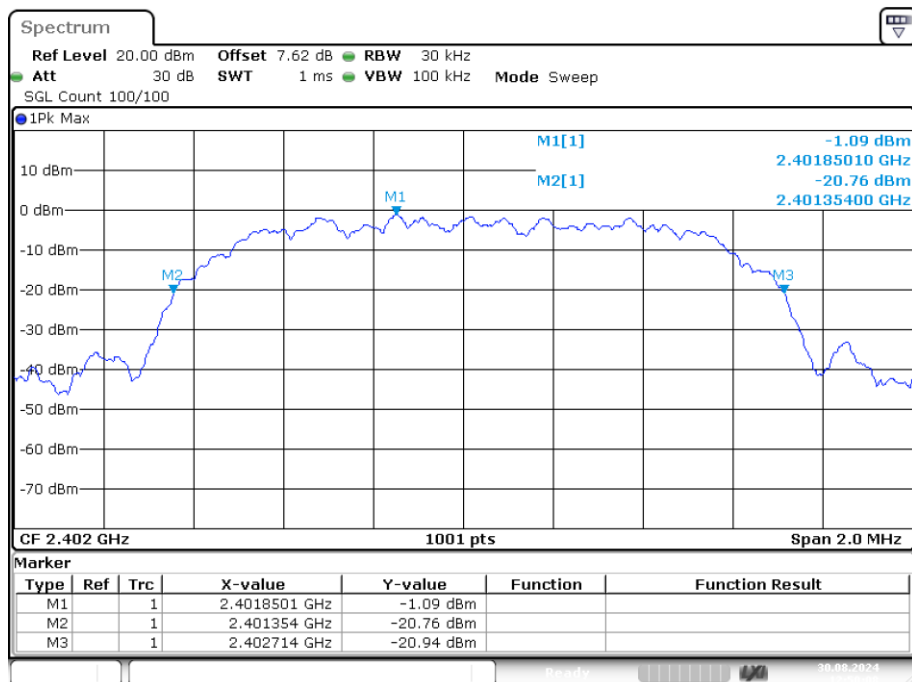


Date: 30.AUG.2024 12:50:09

-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

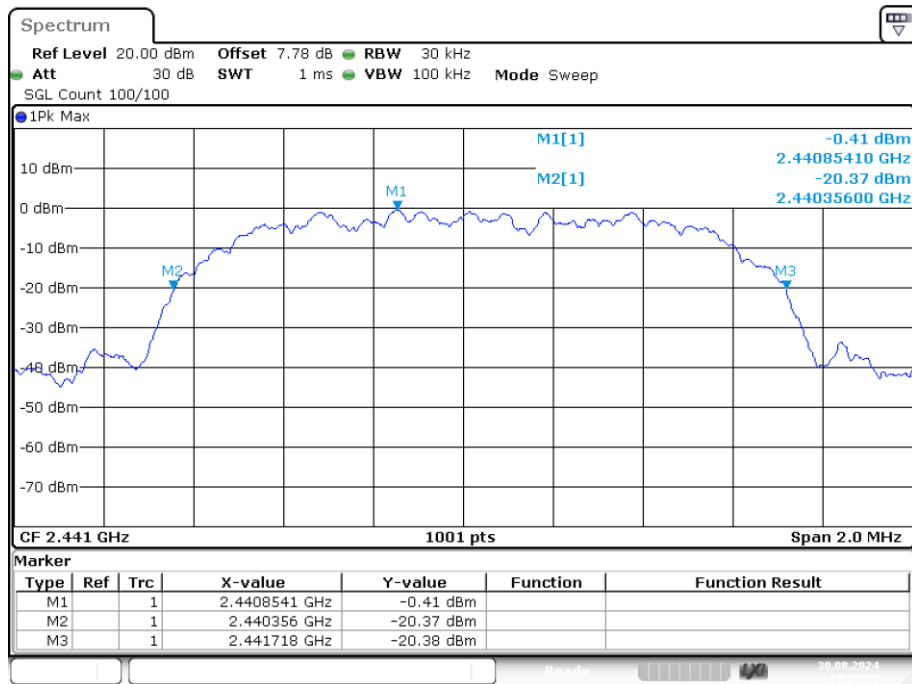


Date: 30.AUG.2024 14:29:25

-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

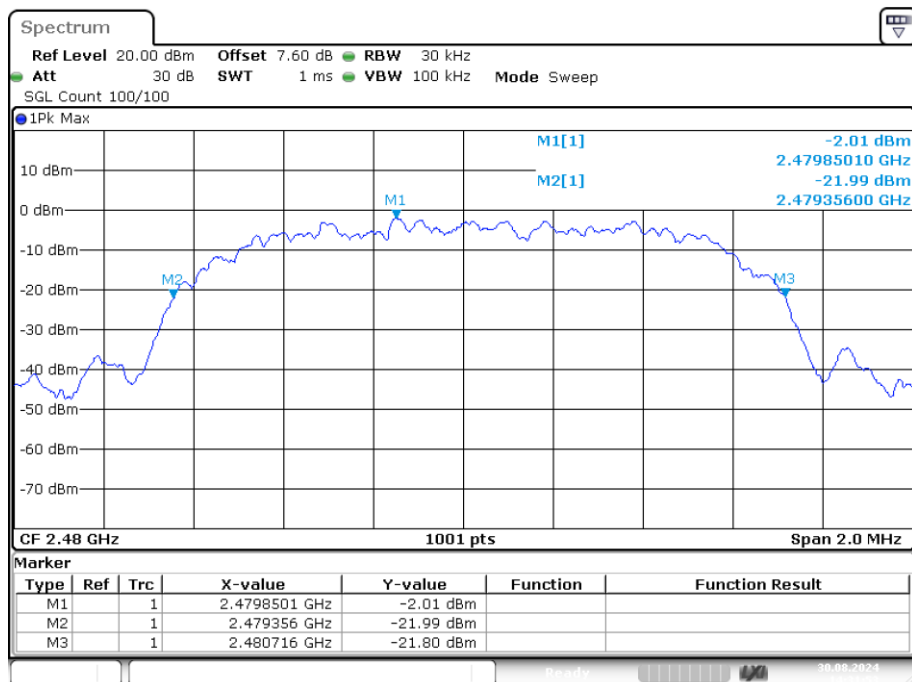


Date: 30.AUG.2024 14:31:53

-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

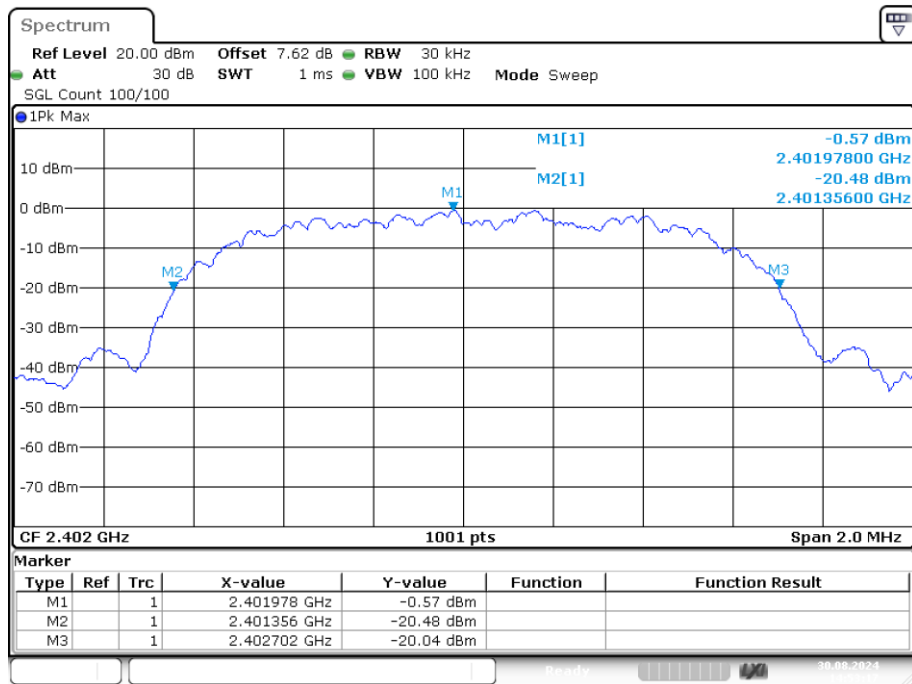


Date: 30.AUG.2024 14:53:16

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

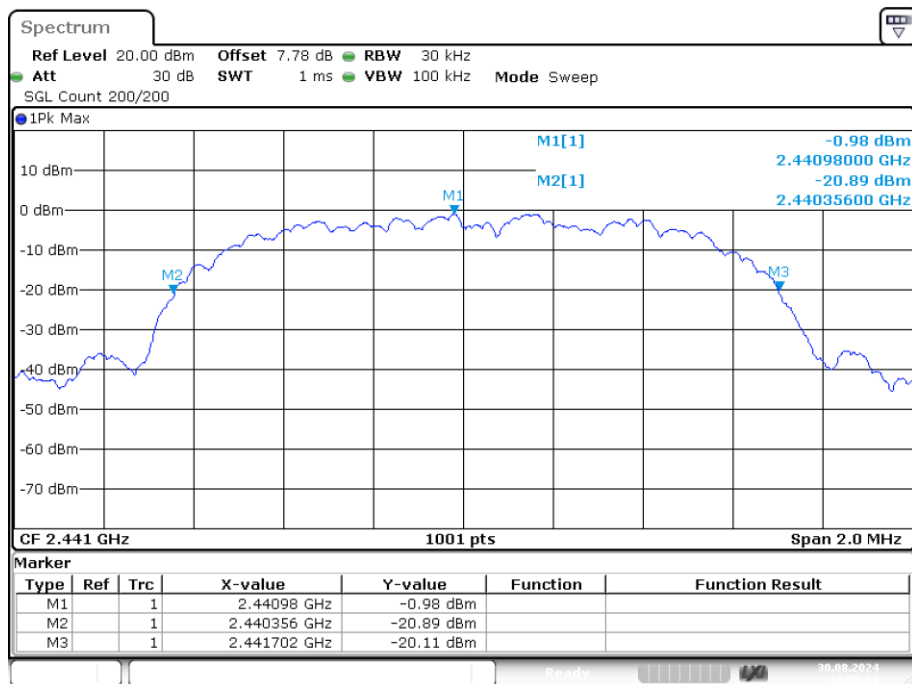

Date: 30.AUG.2024 14:55:11

-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

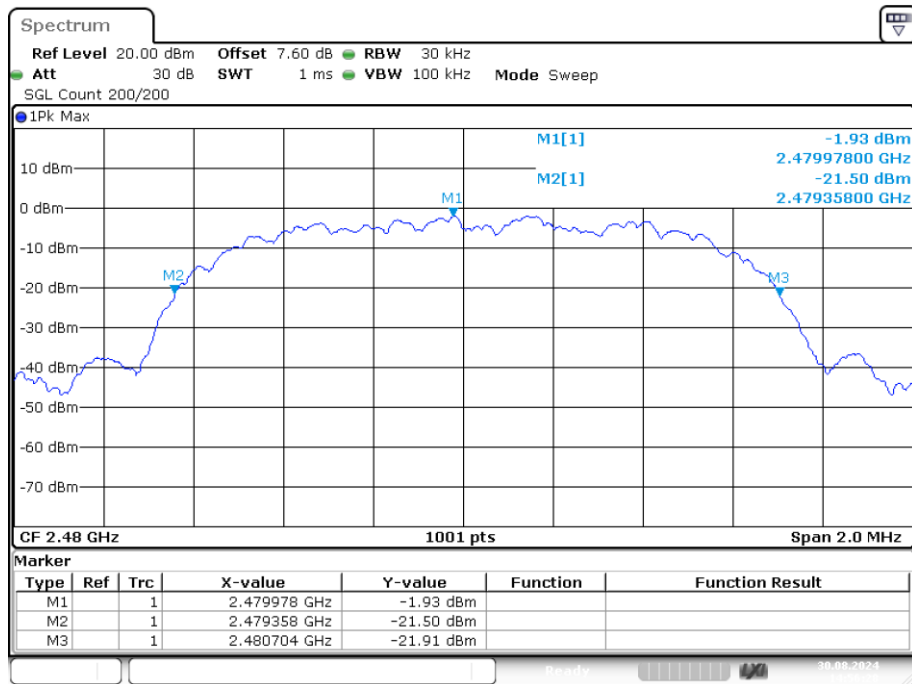


Date: 30.AUG.2024 14:56:27

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.911
NVNT	1-DH1	2441	Ant1	0.905
NVNT	1-DH1	2480	Ant1	0.905
NVNT	2-DH1	2402	Ant1	1.197
NVNT	2-DH1	2441	Ant1	1.199
NVNT	2-DH1	2480	Ant1	1.199
NVNT	3-DH1	2402	Ant1	1.199
NVNT	3-DH1	2441	Ant1	1.201
NVNT	3-DH1	2480	Ant1	1.201


Note: 1. All antennas have been tested, and antenna 1 is the worst data.

OBW NVNT 1-DH1 2402MHz Ant1

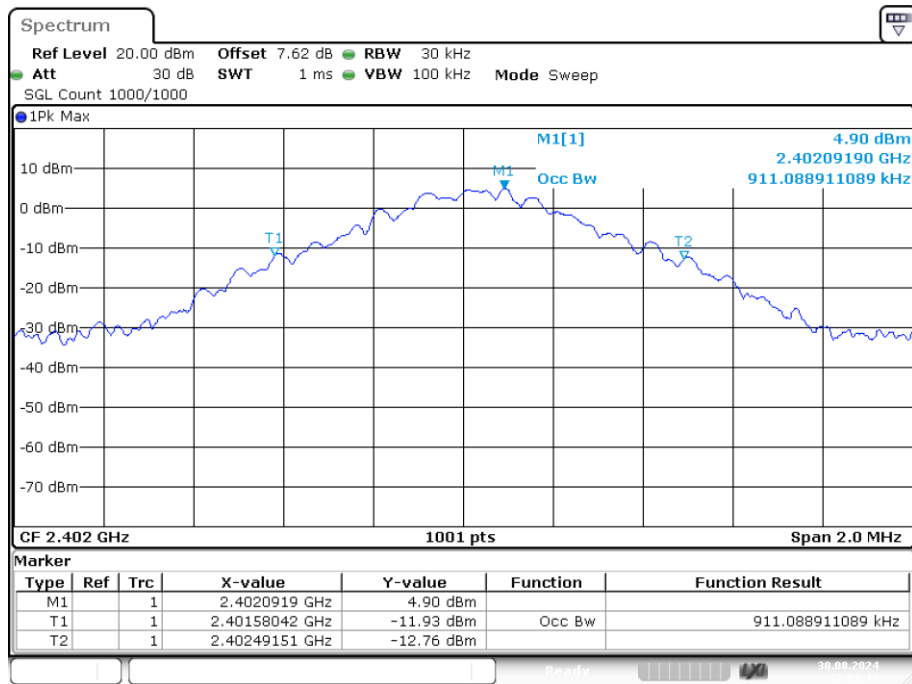


Date: 30.AUG.2024 12:05:19

OBW NVNT 1-DH1 2441MHz Ant1

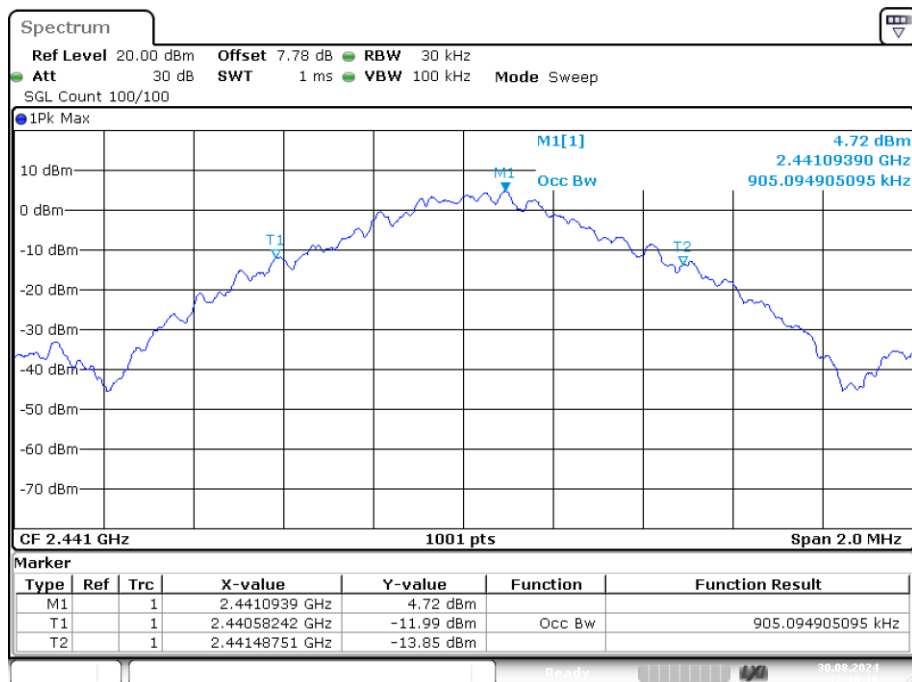


Date: 30.AUG.2024 12:10:15

OBW NVNT 1-DH1 2480MHz Ant1

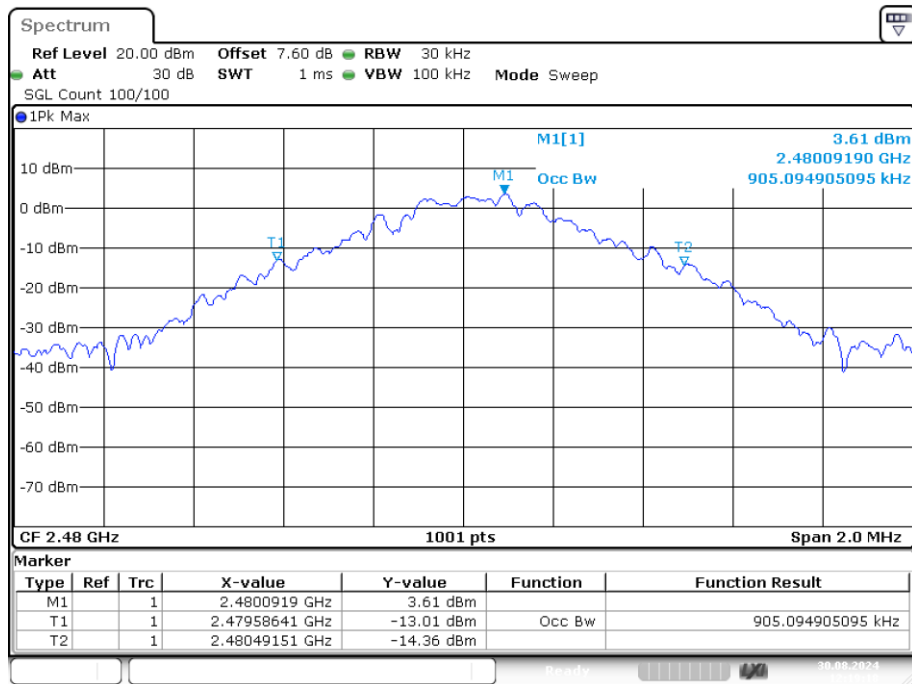


Date: 30.AUG.2024 12:19:17

OBW NVNT 2-DH1 2402MHz Ant1

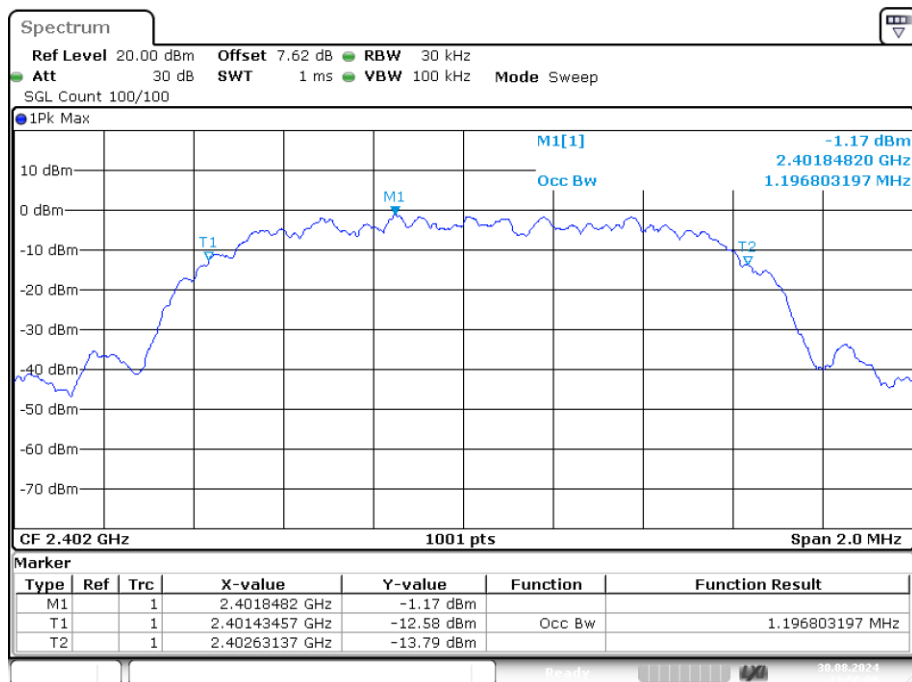


Date: 30.AUG.2024 12:50:00

OBW NVNT 2-DH1 2441MHz Ant1

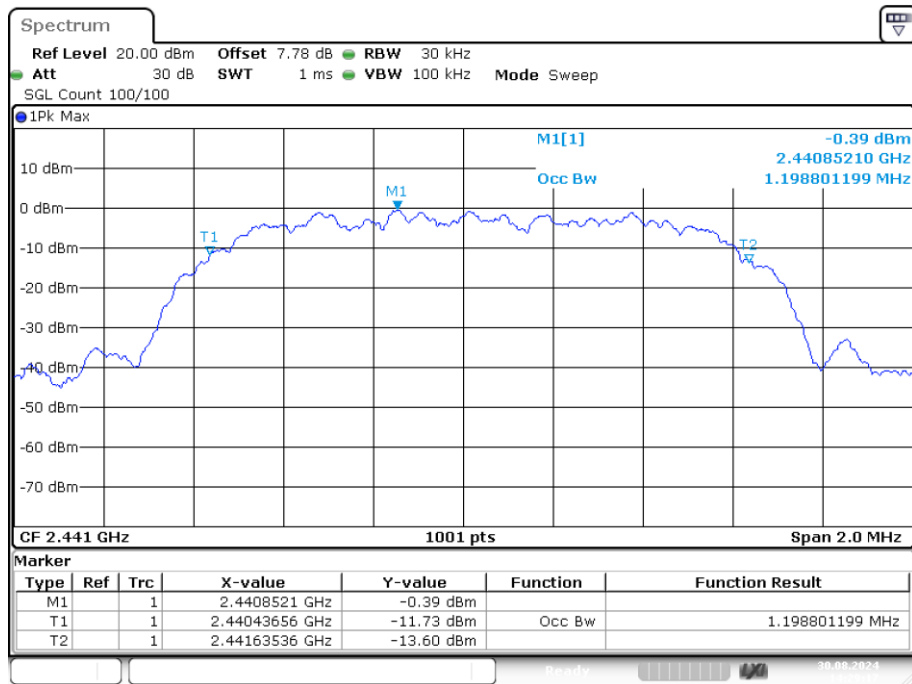


Date: 30.AUG.2024 14:29:17

OBW NVNT 2-DH1 2480MHz Ant1

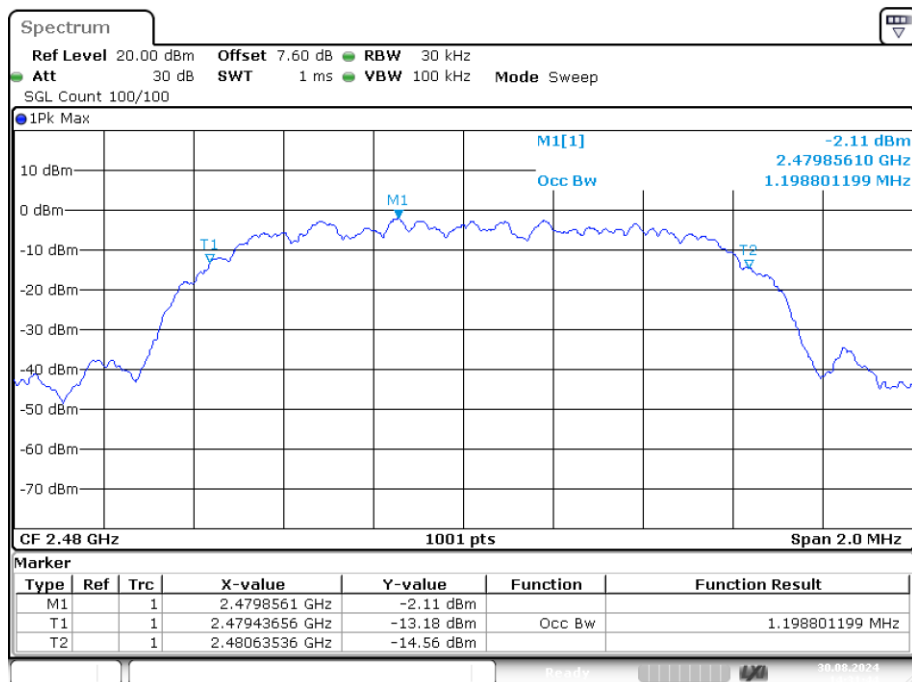


Date: 30.AUG.2024 14:31:44

OBW NVNT 3-DH1 2402MHz Ant1

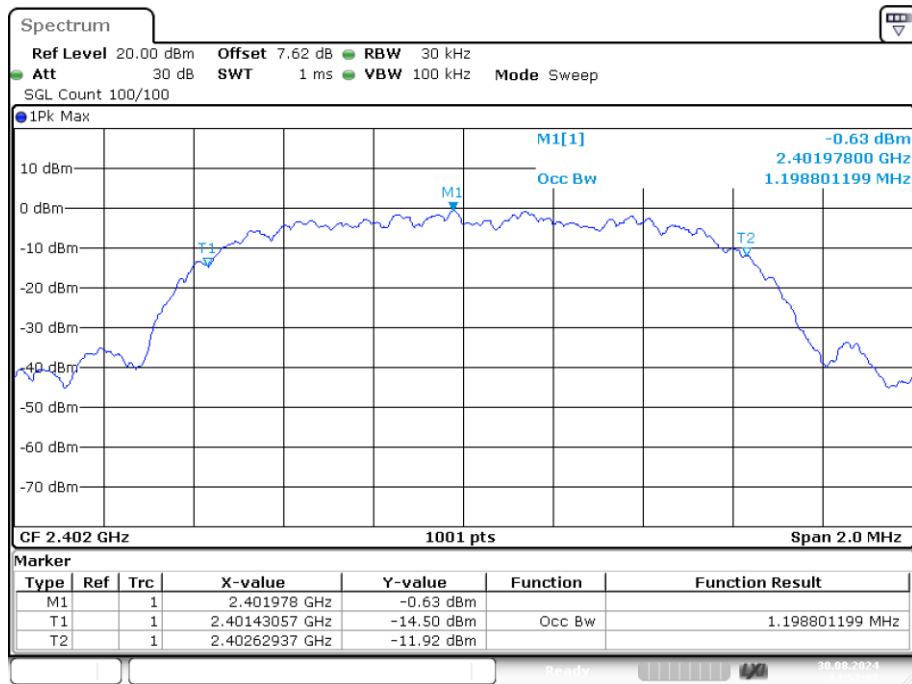


Date: 30.AUG.2024 14:53:08

OBW NVNT 3-DH1 2441MHz Ant1

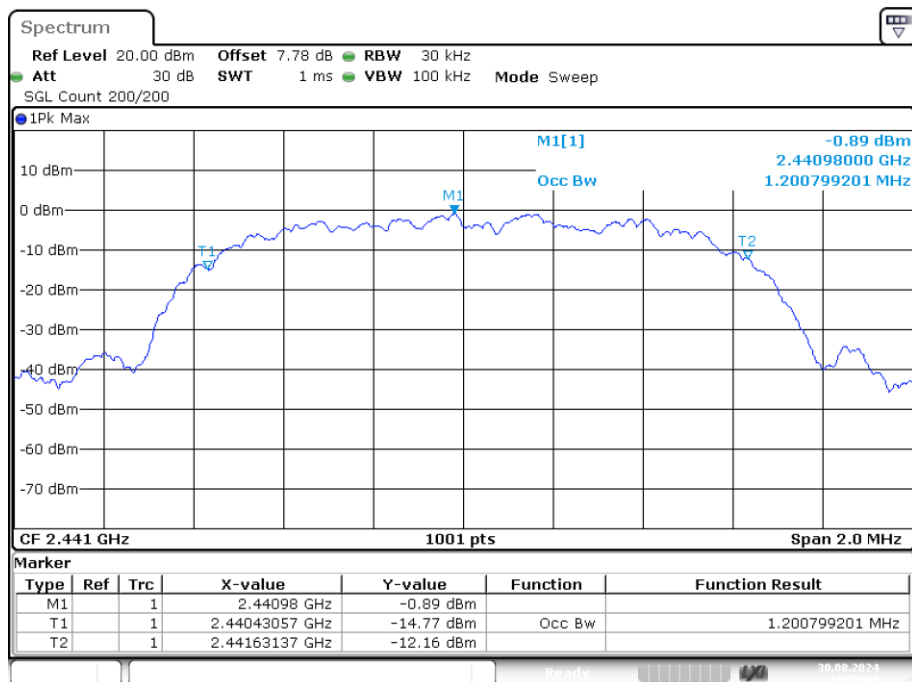

Date: 30.AUG.2024 14:55:02

OBW NVNT 3-DH1 2480MHz Ant1

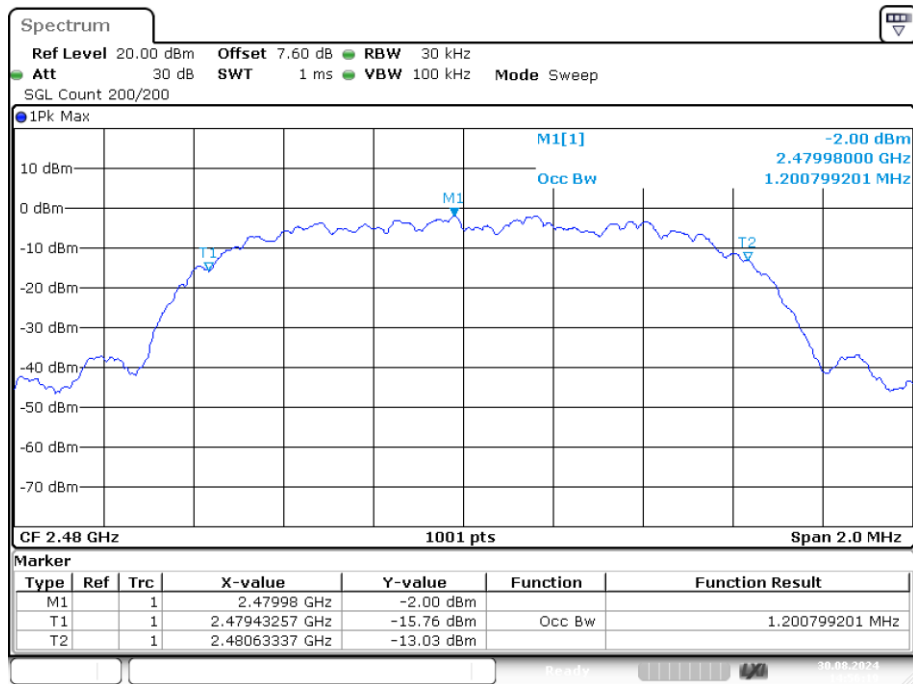

Date: 30.AUG.2024 14:56:18

5. Carrier Frequency Separation

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

5.2. Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3. Test Result

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	Ant1	2441.038	2442.196	1.158	0.954	Pass
NVNT	2-DH1	Ant1	2441.016	2442.192	1.176	0.908	Pass
NVNT	3-DH1	Ant1	2441.02	2442.034	1.014	0.897	Pass


Note: 1. All antennas have been tested, and antenna 1 is the worst data.

CFS NVNT 1-DH1 2441MHz Ant1

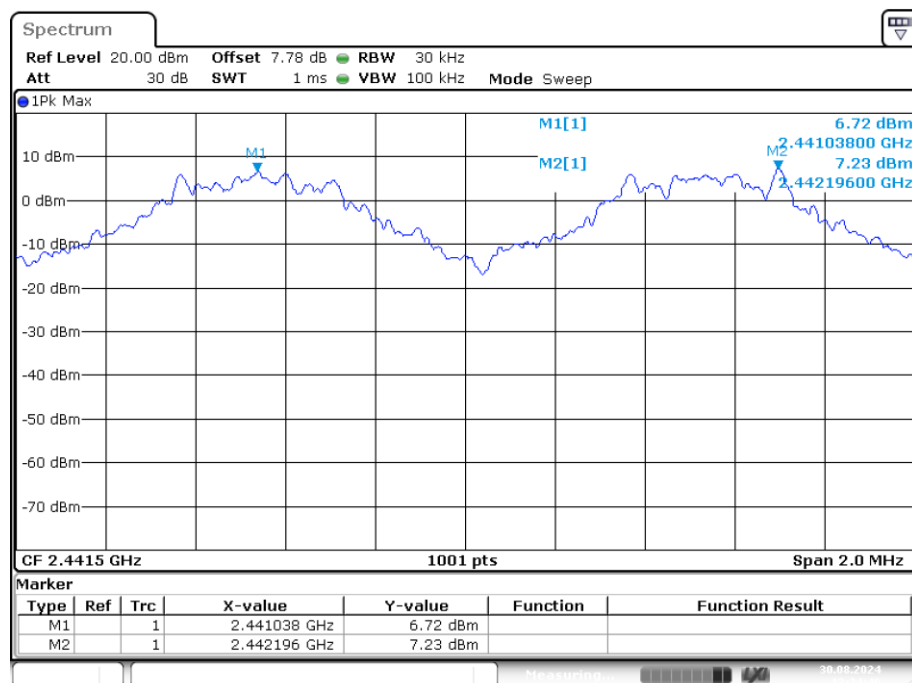


Date: 30.AUG.2024 12:24:46

CFS NVNT 2-DH1 2441MHz Ant1

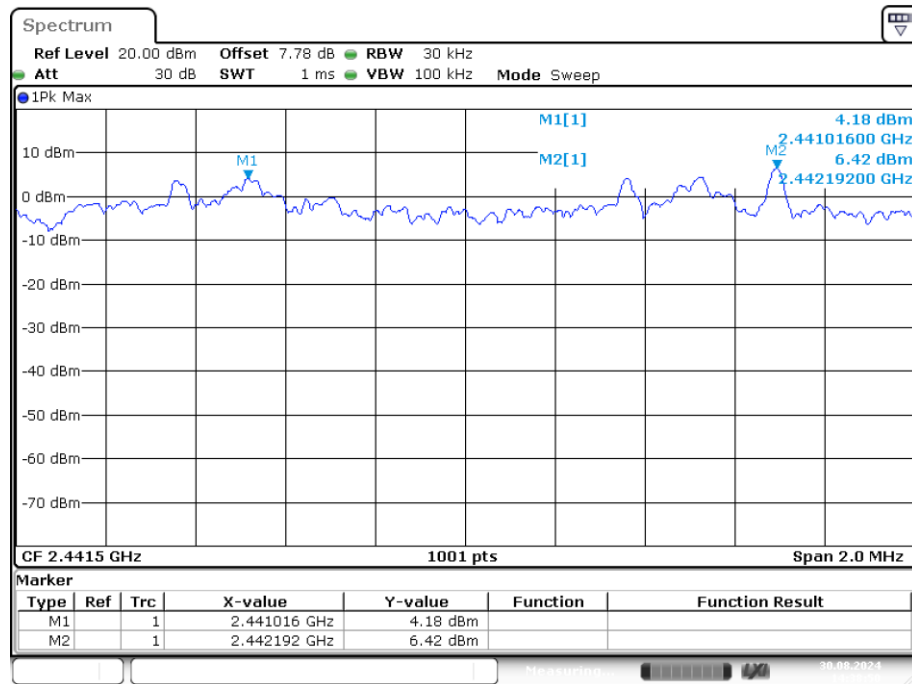

Date: 30.AUG.2024 14:38:50

CFS NVNT 3-DH1 2441MHz Ant1

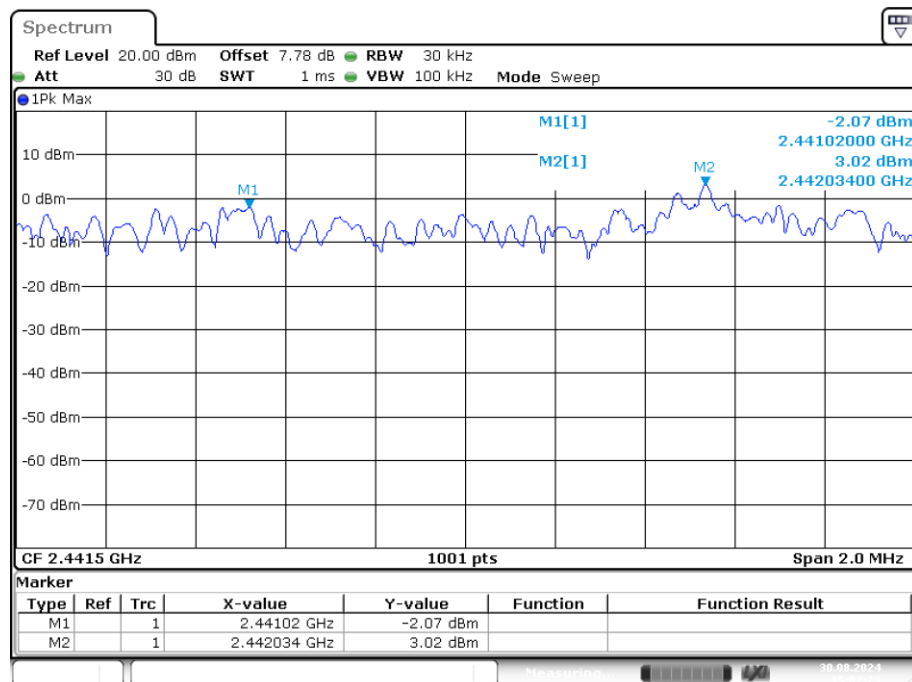

Date: 30.AUG.2024 15:02:23

6. Number Of Hopping Channel

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3. Test Result

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH1	Ant1	79	15	Pass
NVNT	2-DH1	Ant1	79	15	Pass
NVNT	3-DH1	Ant1	79	15	Pass


Note: 1. All antennas have been tested, and antenna 1 is the worst data.

Hopping No. NVNT 1-DH1 2441MHz Ant1

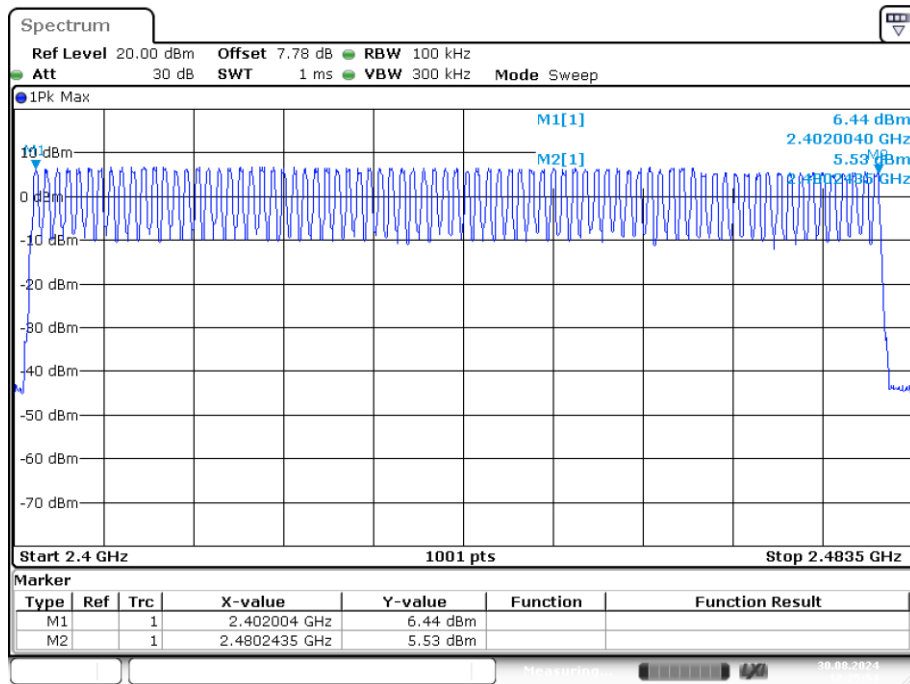


Date: 30.AUG.2024 12:25:54

Hopping No. NVNT 2-DH1 2441MHz Ant1

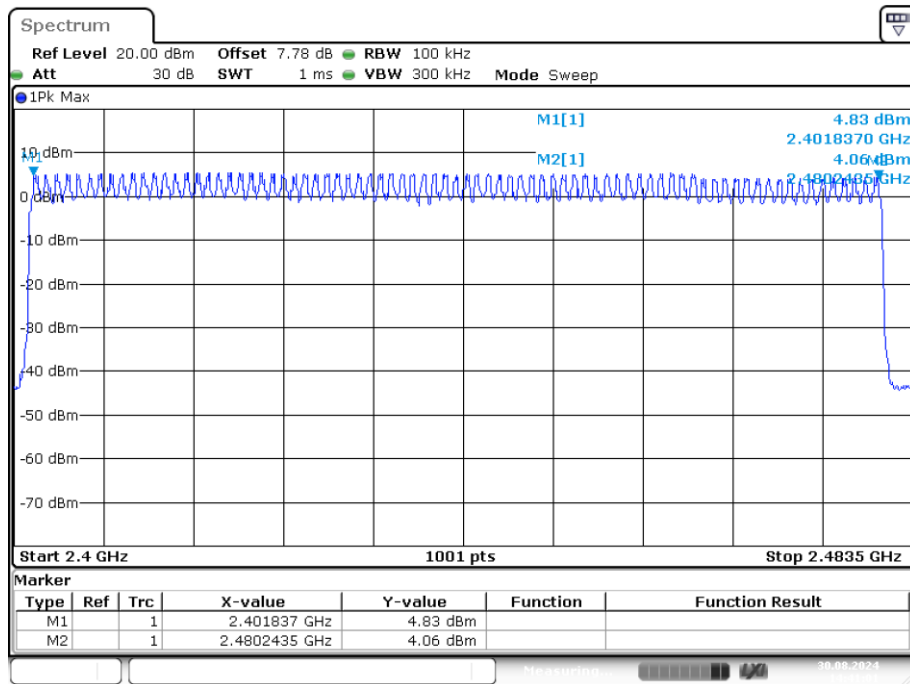

Date: 30.AUG.2024 14:41:02

Hopping No. NVNT 3-DH1 2441MHz Ant1

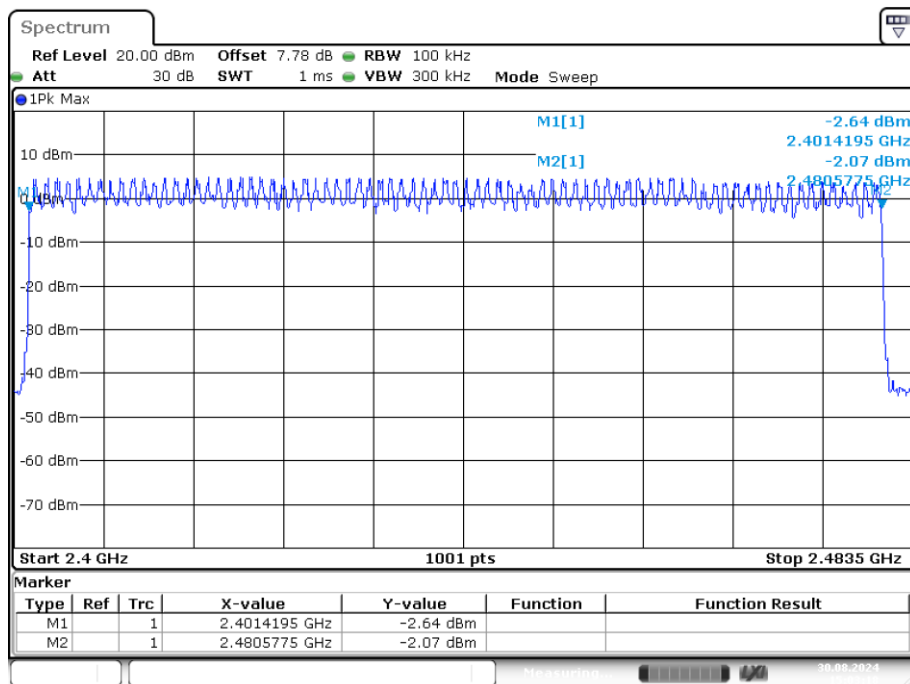

Date: 30.AUG.2024 15:03:18

7. Dwell Time

7.1. Test limit

Please refer FCC part 15.247.

Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Result

PASS.


Detailed information please see the following page.

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.383	122.177	319	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.639	255.684	156	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.887	242.508	84	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.392	122.304	312	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.643	257.951	157	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.89	303.45	105	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.392	124.264	317	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.642	277.498	169	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.893	321.123	111	31600	400	Pass

Note: 1. Total Dwell Time= Pulse Time* Burst Count


2. All antennas have been tested, and antenna 1 is the worst data.

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

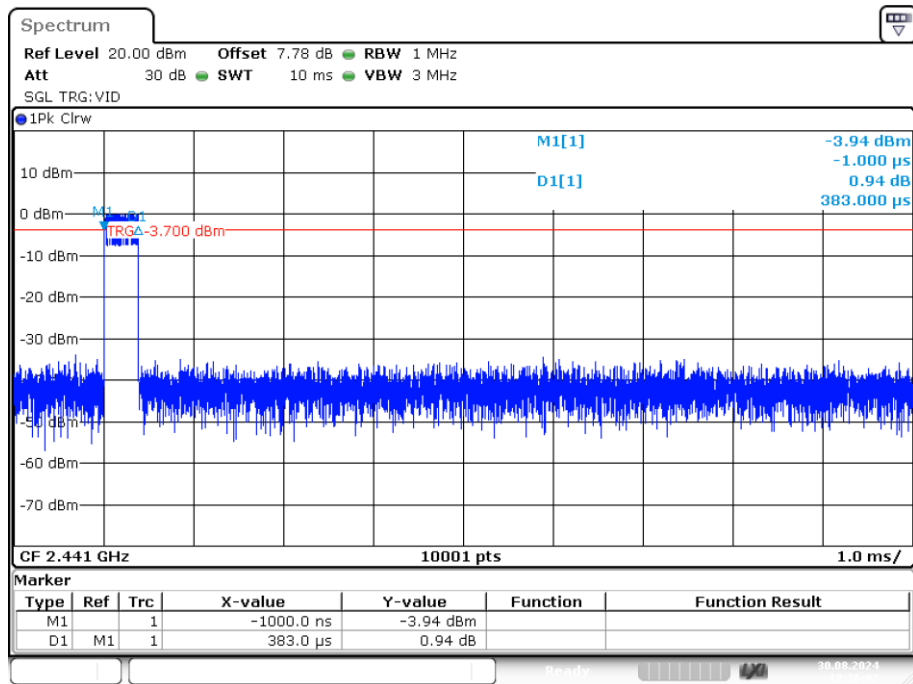


Date: 30.AUG.2024 12:26:02

Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

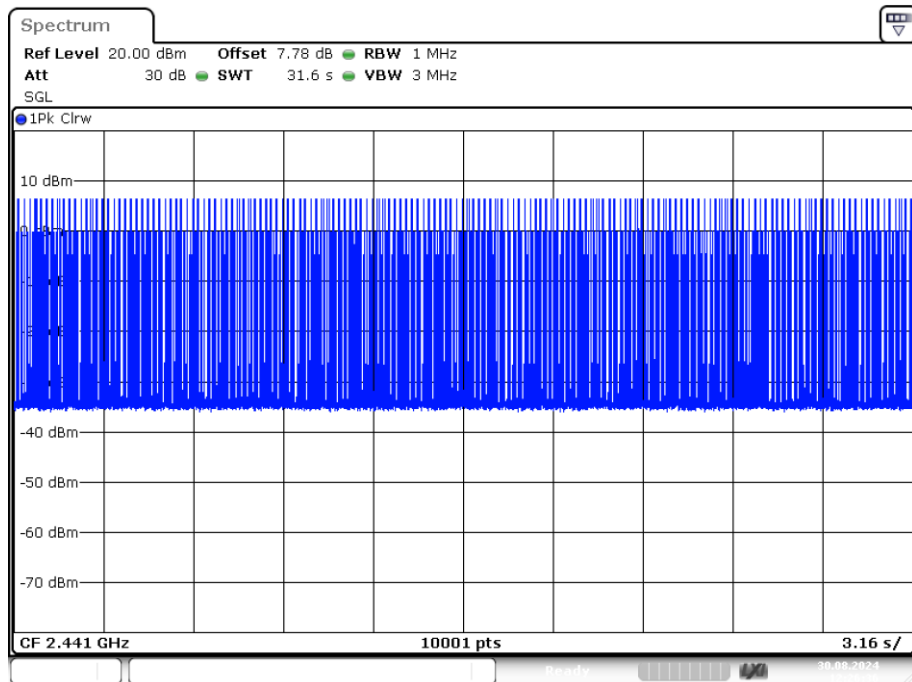


Date: 30.AUG.2024 12:26:36

Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

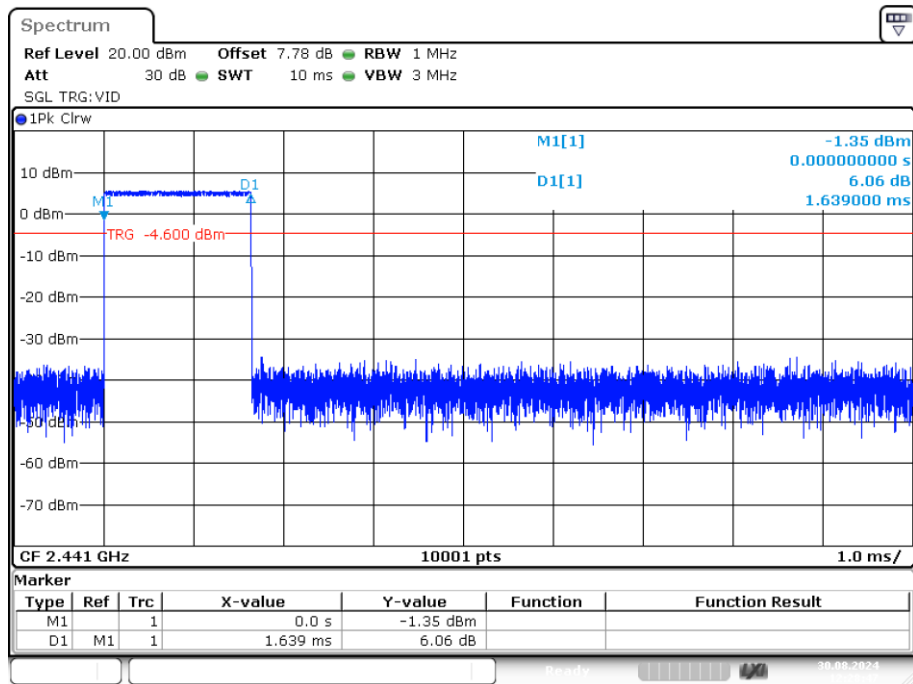


Date: 30.AUG.2024 12:28:46

Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

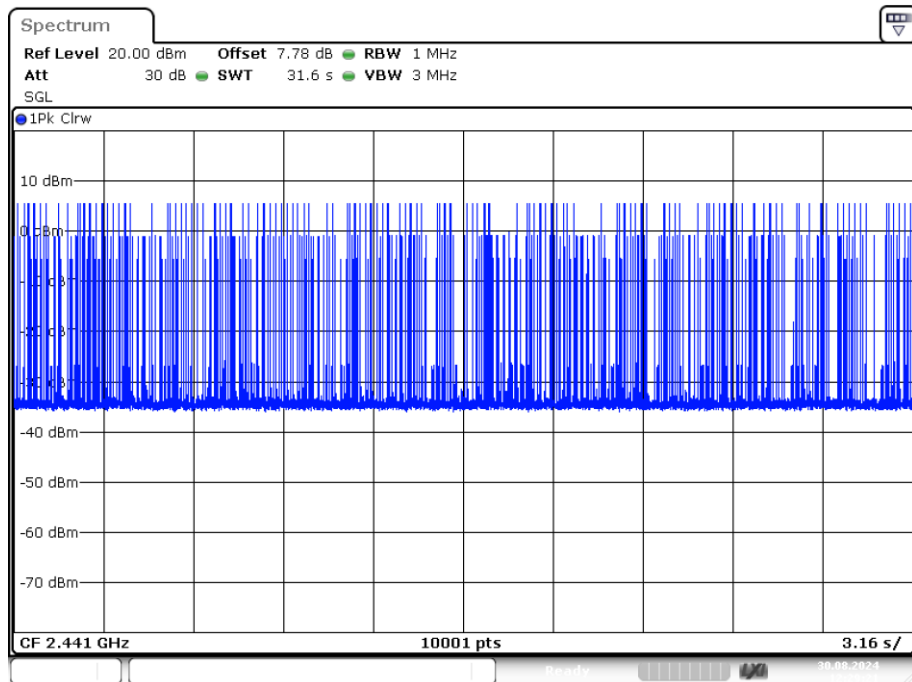


Date: 30.AUG.2024 12:29:21

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

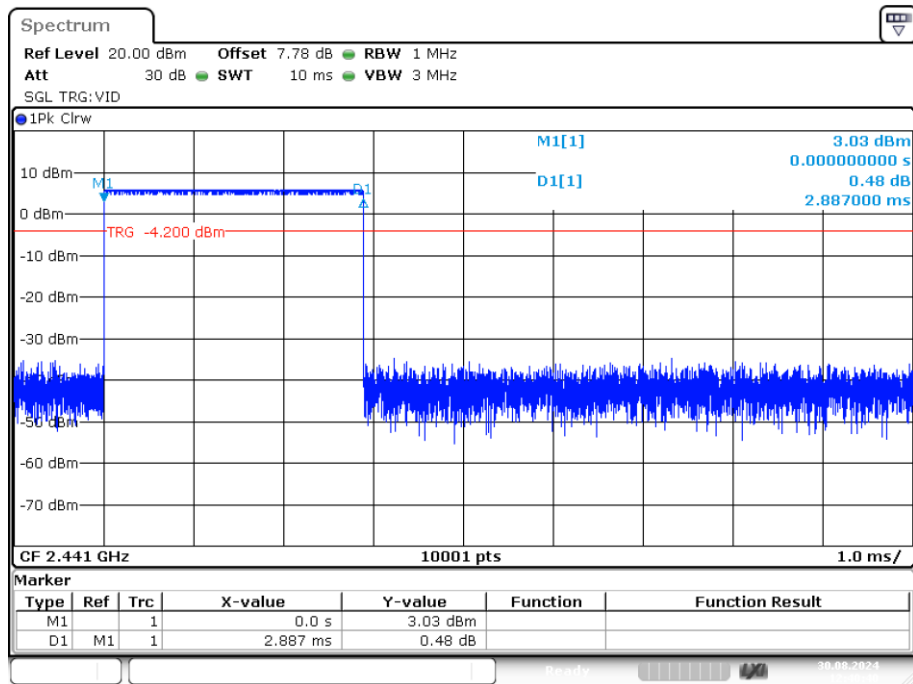


Date: 30.AUG.2024 12:40:40

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

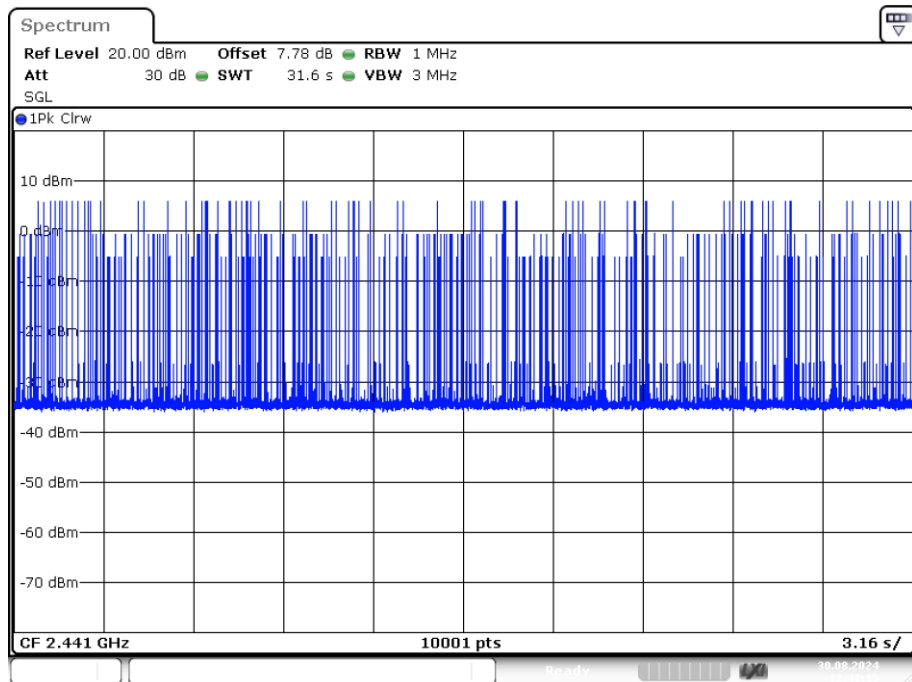


Date: 30.AUG.2024 12:41:15

Dwell NVNT 2-DH1 2441MHz Ant1 One Burst

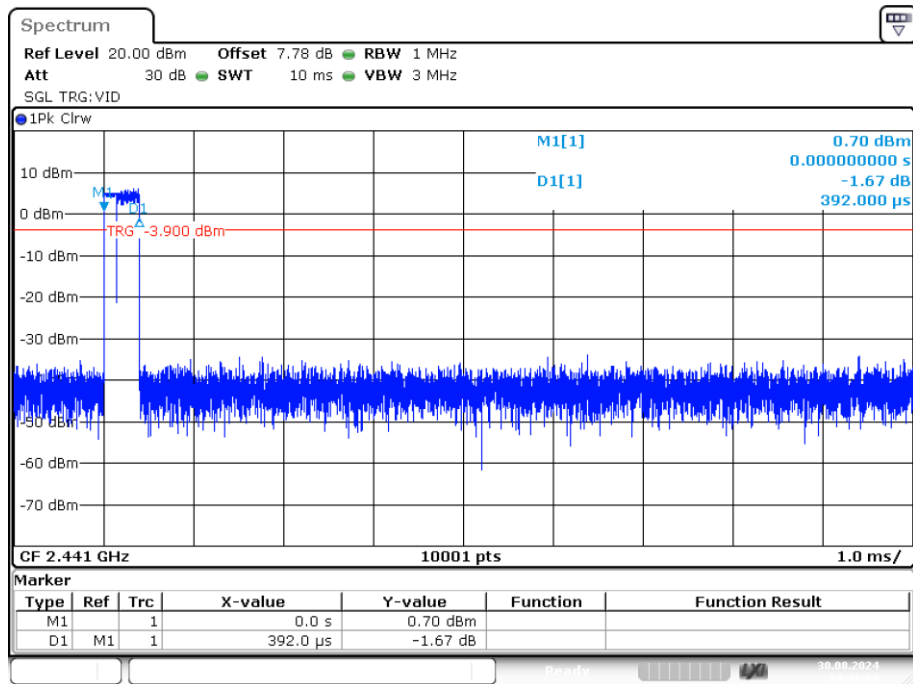


Date: 30.AUG.2024 14:41:09

Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

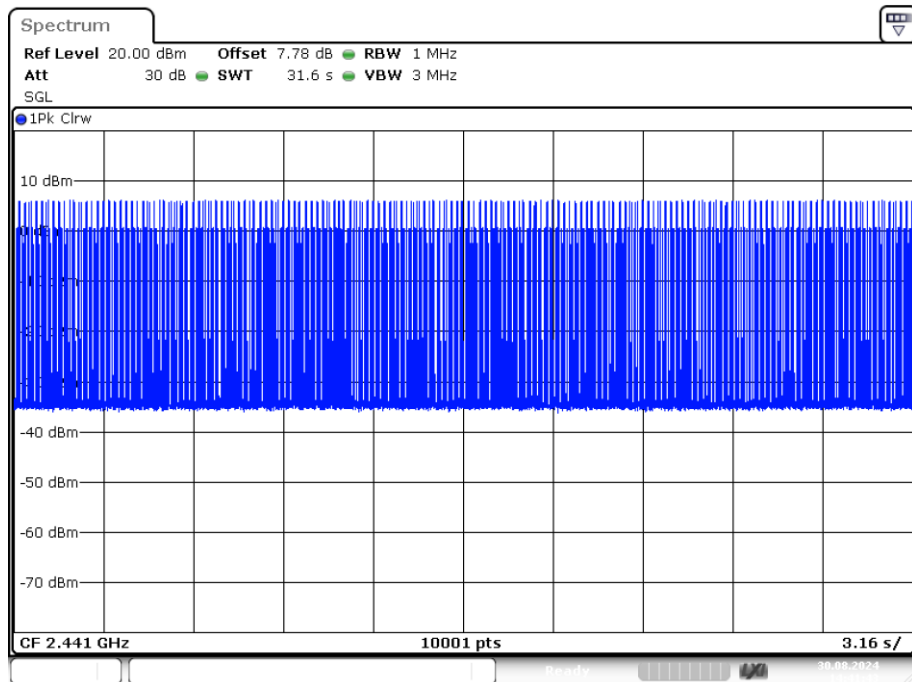


Date: 30.AUG.2024 14:41:43

Dwell NVNT 2-DH3 2441MHz Ant1 One Burst

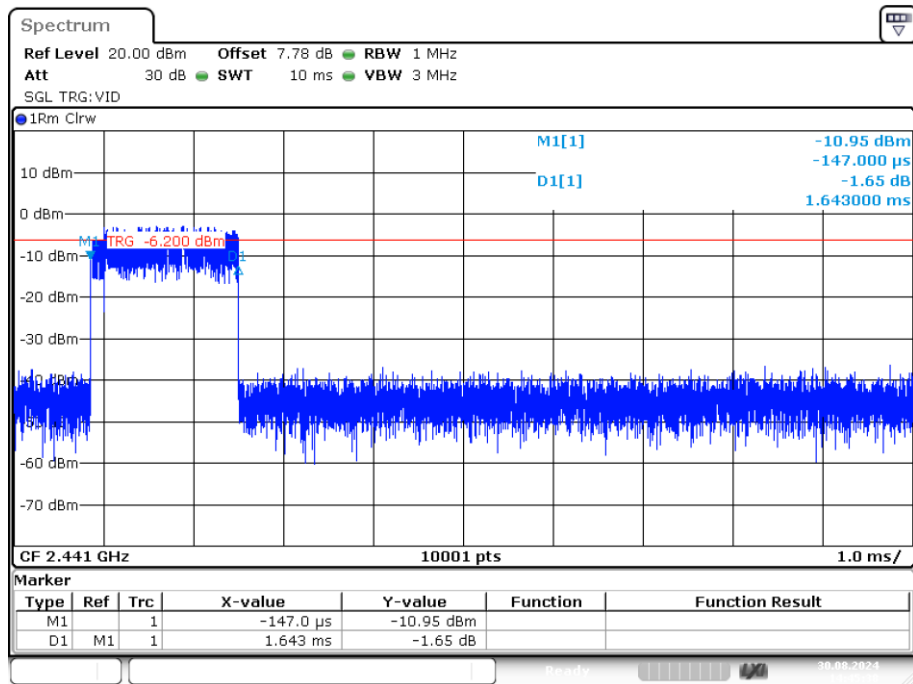


Date: 30.AUG.2024 14:45:38

Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

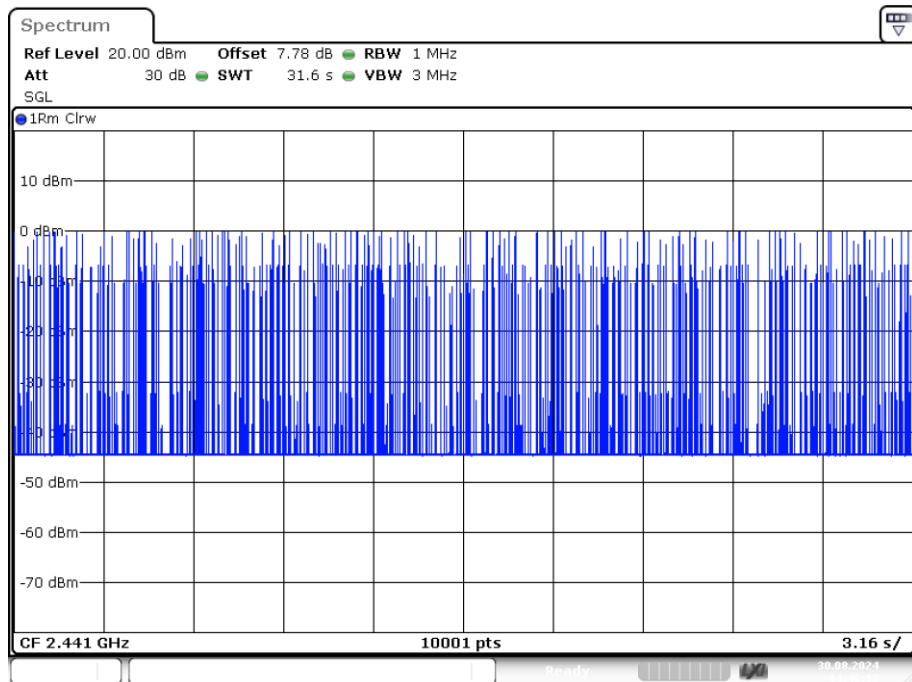


Date: 30.AUG.2024 14:46:12

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

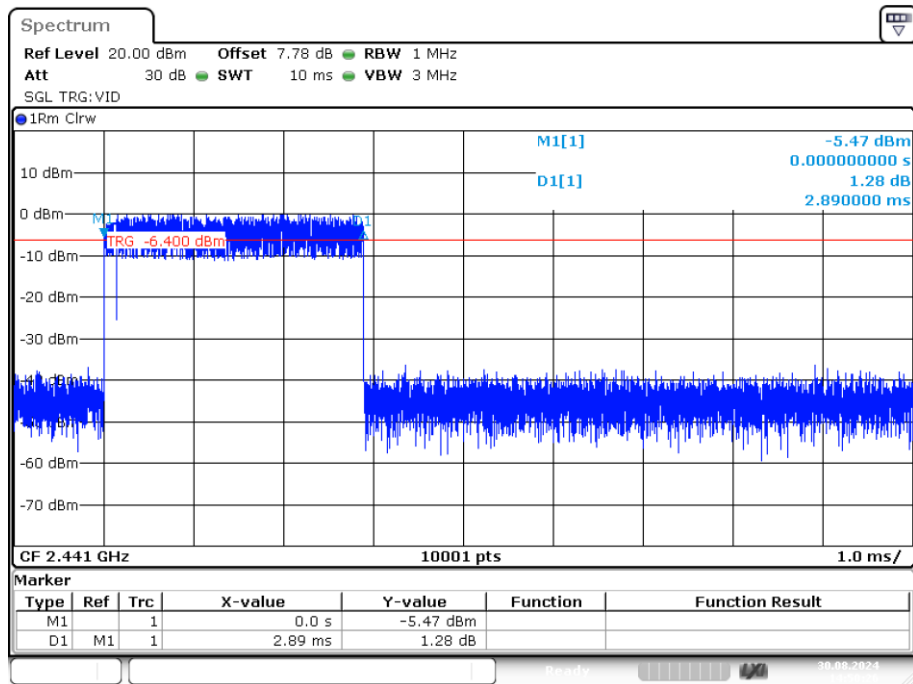


Date: 30.AUG.2024 14:50:26

Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

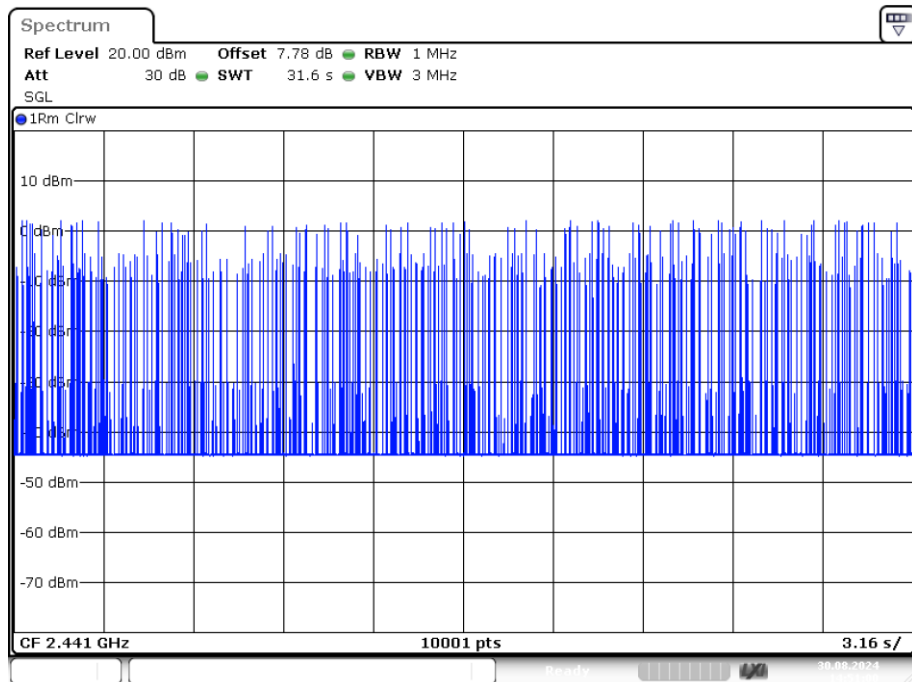


Date: 30.AUG.2024 14:51:01

Dwell NVNT 3-DH1 2441MHz Ant1 One Burst

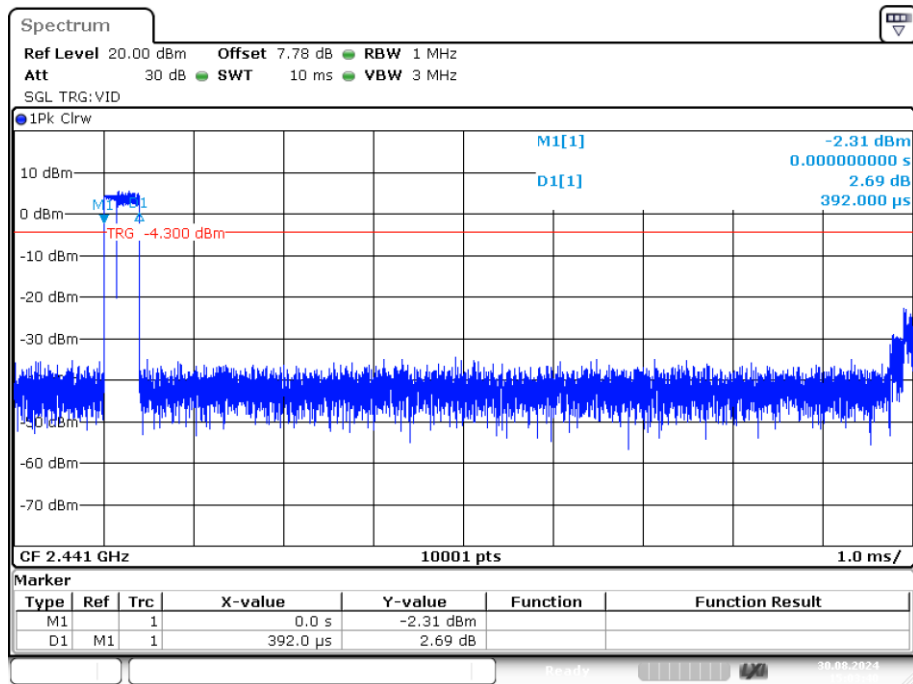


Date: 30.AUG.2024 15:03:40

Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

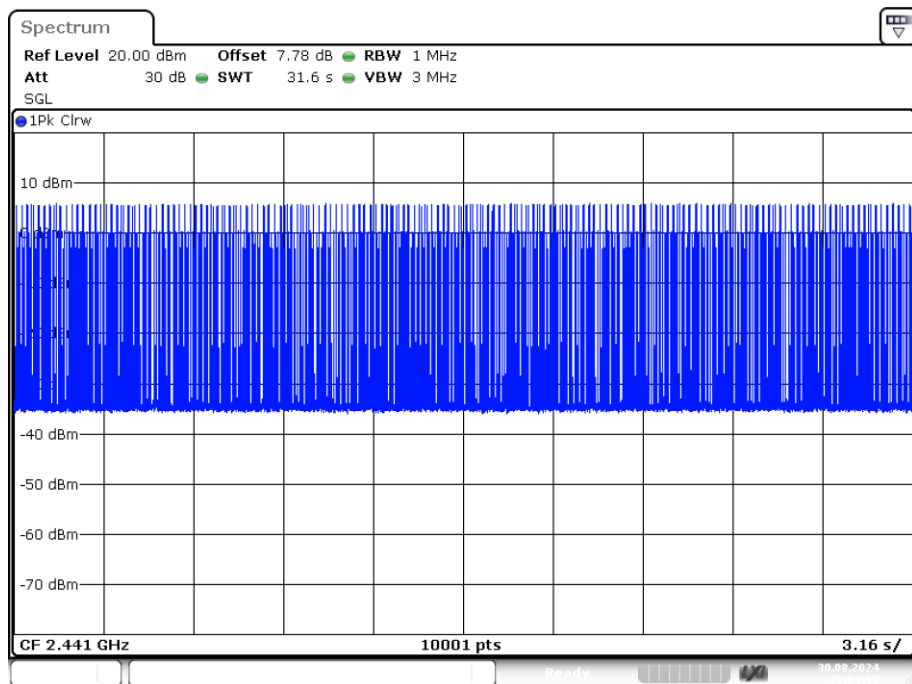


Date: 30.AUG.2024 15:04:14

Dwell NVNT 3-DH3 2441MHz Ant1 One Burst

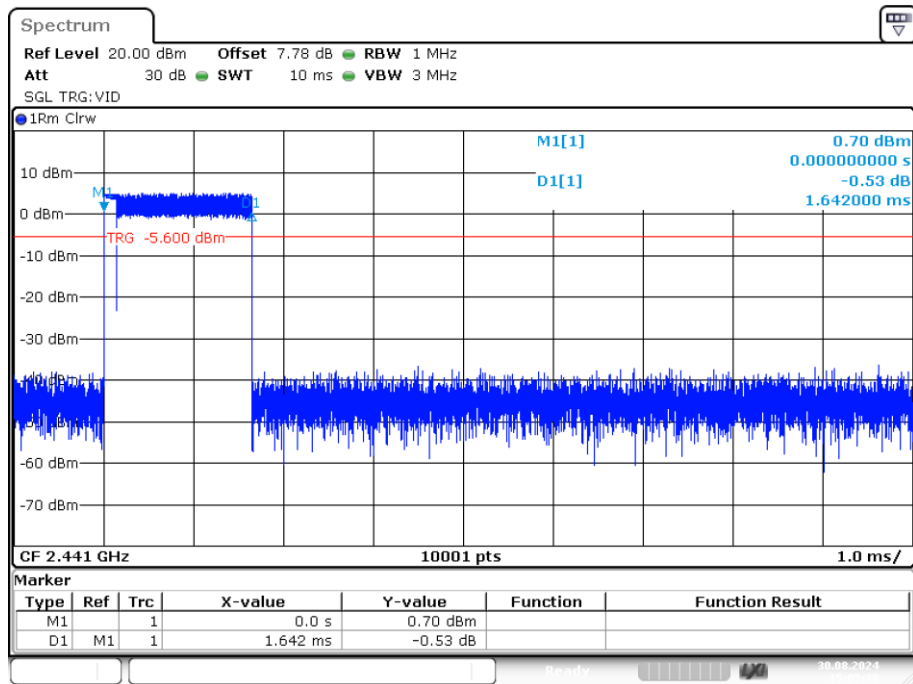


Date: 30.AUG.2024 15:05:30

Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

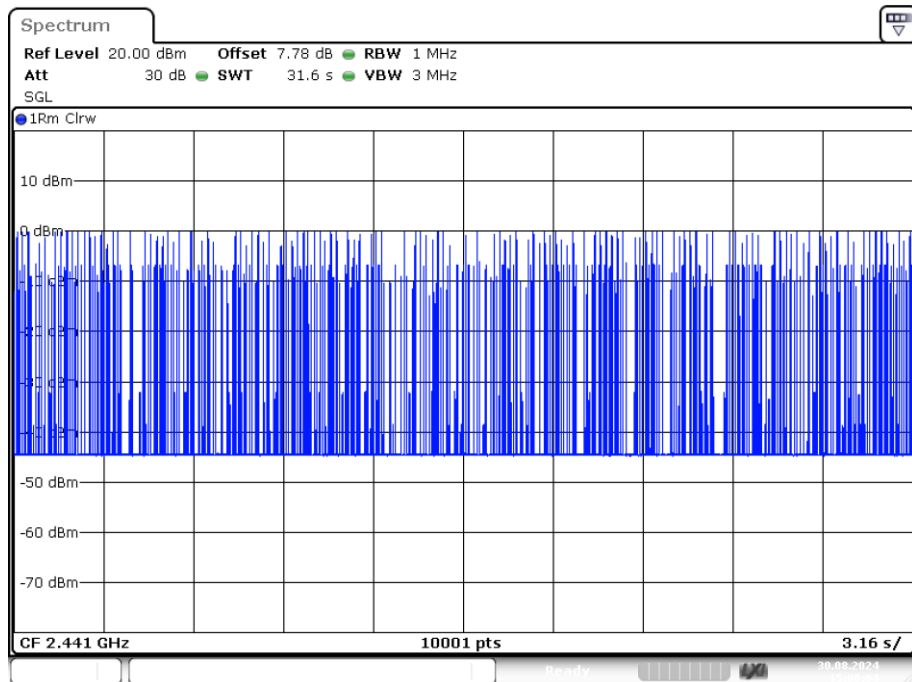


Date: 30.AUG.2024 15:06:04

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

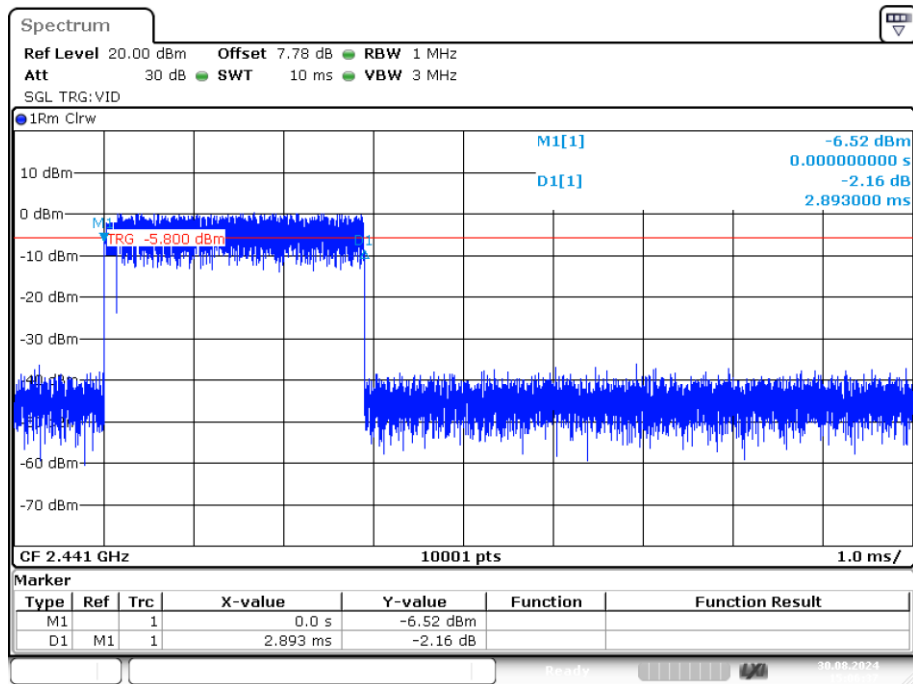

Date: 30.AUG.2024 15:06:37

Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

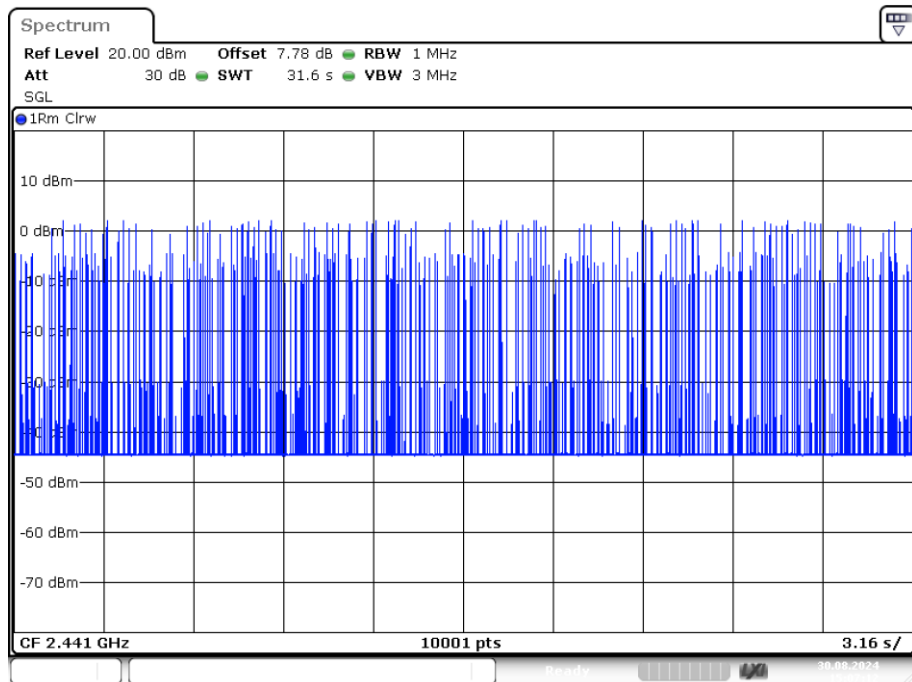

Date: 30.AUG.2024 15:07:12

8. Radiated Emissions

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	$2400/\text{F}(\text{KHz})$	/
0.490-1.705	30	$24000/\text{F}(\text{KHz})$	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: The peak limit is 20 dB higher than the average limit

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500


Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A}/\text{m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	$6.37/\text{F}$ (F in kHz)	300
490 - 1705 kHz	$63.7/\text{F}$ (F in kHz)	30
1.705 - 30 MHz	0.08	30


Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

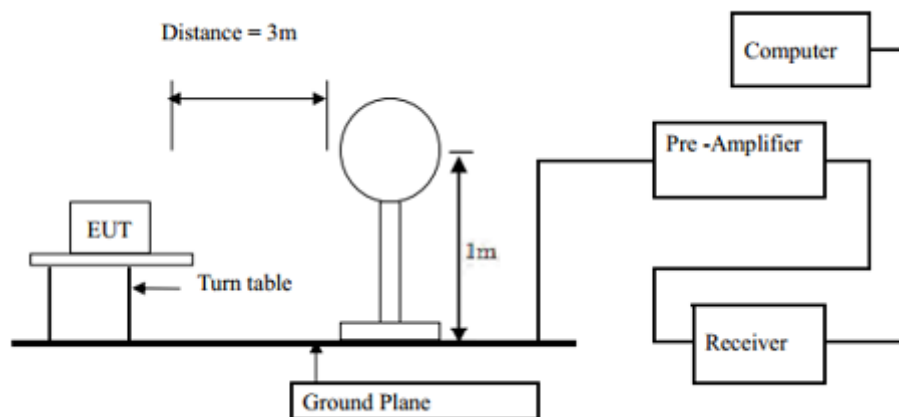

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

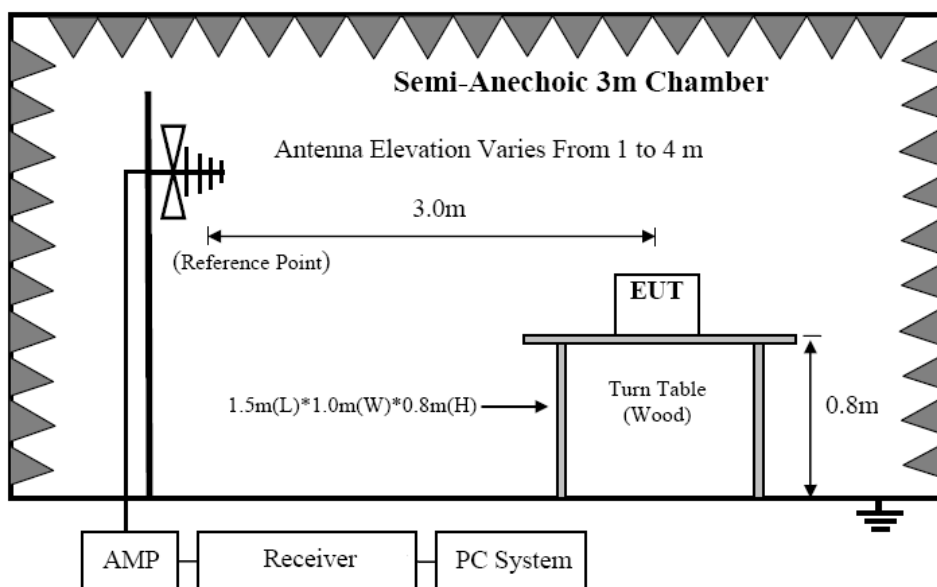

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

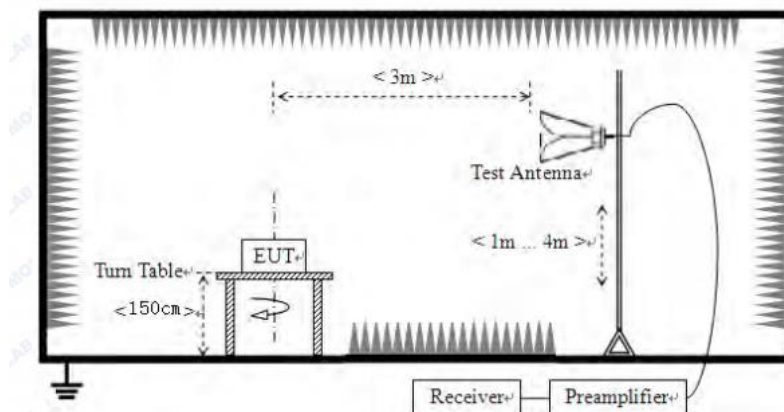

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned from 9kHz to the 10th harmonic of the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


From 30MHz to 1000MHz: Conclusion: PASS

Vertical:

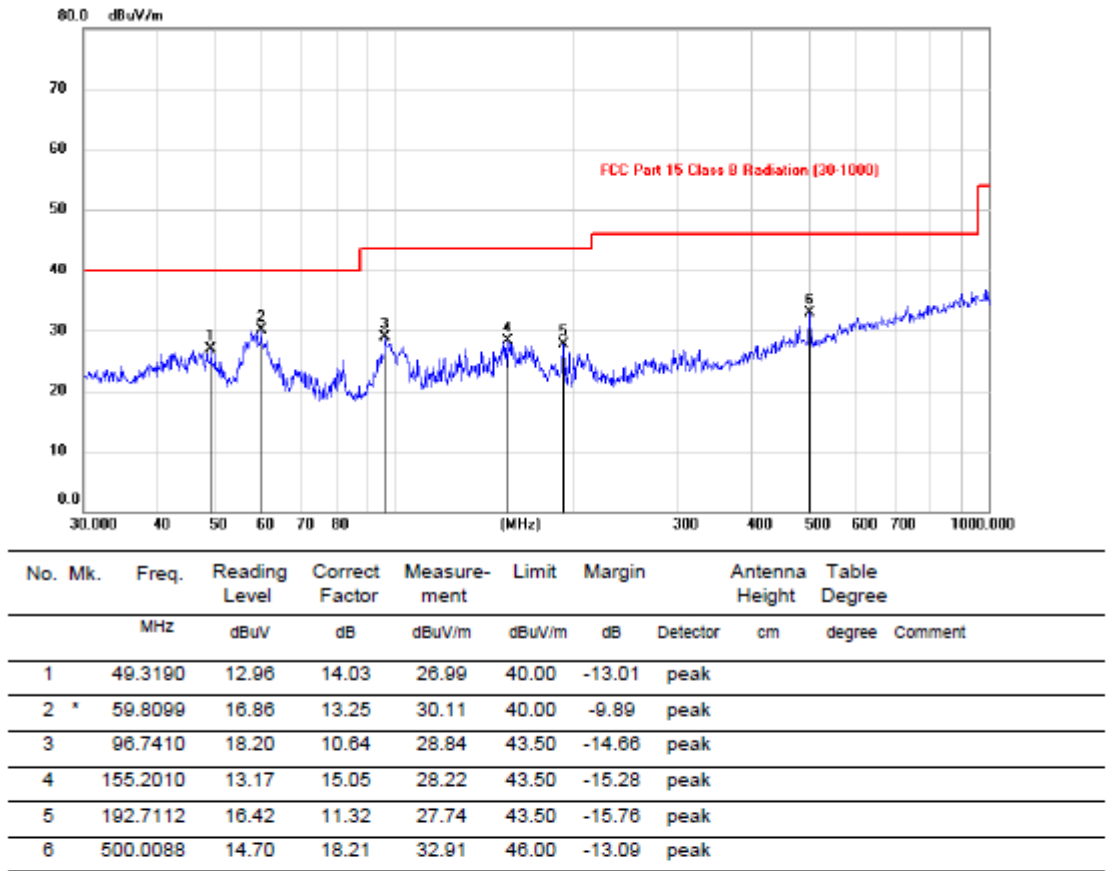

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

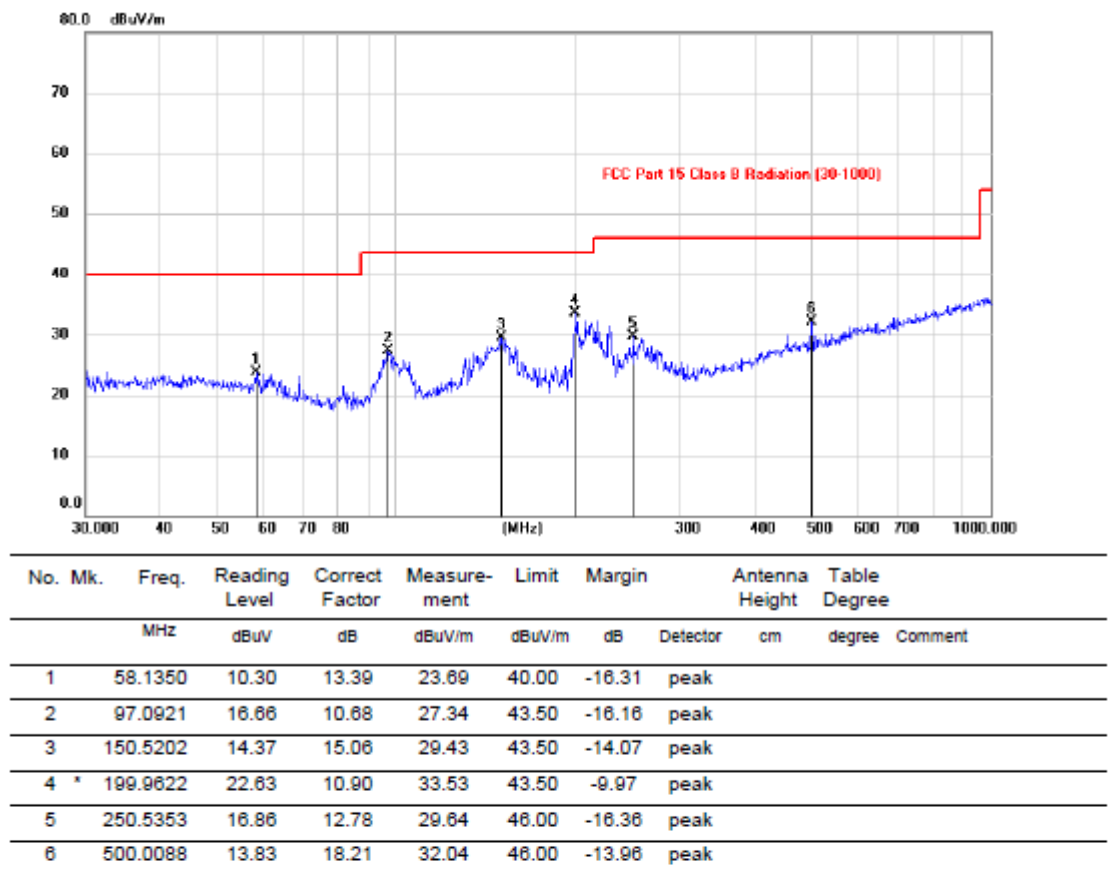Horizontal:

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz was listed in this report.

From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	46.83	V	33.95	10.18	34.26	56.70	74	-17.30	PK
4804	35.86	V	33.95	10.18	34.26	45.73	54	-8.27	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	46.61	H	33.95	10.18	34.26	56.48	74	-17.52	PK
4804	34.91	H	33.95	10.18	34.26	44.78	54	-9.22	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	43.05	V	33.93	10.2	34.29	52.89	74	-21.11	PK
4882	34.79	V	33.93	10.2	34.29	44.63	54	-9.37	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	44.06	H	33.93	10.2	34.29	53.90	74	-20.10	PK
4882	35.76	H	33.93	10.2	34.29	45.60	54	-8.40	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	46.35	V	33.93	10.2	34.29	56.19	74	-17.81	PK
4960	32.99	V	33.93	10.2	34.29	42.83	54	-11.17	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	42.03	H	33.93	10.2	34.29	51.87	74	-22.13	PK
4960	31.62	H	33.93	10.2	34.29	41.46	54	-12.54	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

From 1G-25GHz

Test Mode: $\pi/4$ DQPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	47.49	V	33.95	10.18	34.26	57.36	74	-16.64	PK
4804	36.74	V	33.95	10.18	34.26	46.61	54	-7.39	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	46.81	H	33.95	10.18	34.26	56.68	74	-17.32	PK
4804	34.50	H	33.95	10.18	34.26	44.37	54	-9.63	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: $\pi/4$ DQPSK TX Mid									
4882	44.41	V	33.93	10.2	34.29	54.25	74	-19.75	PK
4882	35.63	V	33.93	10.2	34.29	45.47	54	-8.53	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	46.19	H	33.93	10.2	34.29	56.03	74	-17.97	PK
4882	34.12	H	33.93	10.2	34.29	43.96	54	-10.04	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: $\pi/4$ DQPSK TX High									
4960	45.57	V	33.93	10.2	34.29	55.41	74	-18.59	PK
4960	35.53	V	33.93	10.2	34.29	45.37	54	-8.63	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	44.06	H	33.93	10.2	34.29	53.90	74	-20.10	PK
4960	32.86	H	33.93	10.2	34.29	42.70	54	-11.30	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									


From 1G-25GHz

Test Mode: 8- DQPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	47.19	V	33.95	10.18	34.26	57.06	74	-16.94	PK
4804	35.52	V	33.95	10.18	34.26	45.39	54	-8.61	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	44.77	H	33.95	10.18	34.26	54.64	74	-19.36	PK
4804	37.32	H	33.95	10.18	34.26	47.19	54	-6.81	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: 8- DQPSK TX Mid									
4882	41.54	V	33.93	10.2	34.29	51.38	74	-22.62	PK
4882	33.82	V	33.93	10.2	34.29	43.66	54	-10.34	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	42.66	H	33.93	10.2	34.29	52.50	74	-21.50	PK
4882	35.50	H	33.93	10.2	34.29	45.34	54	-8.66	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: 8- DQPSK TX High									
4960	45.25	V	33.93	10.2	34.29	55.09	74	-18.91	PK
4960	35.30	V	33.93	10.2	34.29	45.14	54	-8.86	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	44.69	H	33.93	10.2	34.29	54.53	74	-19.47	PK
4960	31.45	H	33.93	10.2	34.29	41.29	54	-12.71	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									


Conducted RF Spurious Emission

Note: 1. All antennas have been tested, and antenna 1 is the worst data.


Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Ref

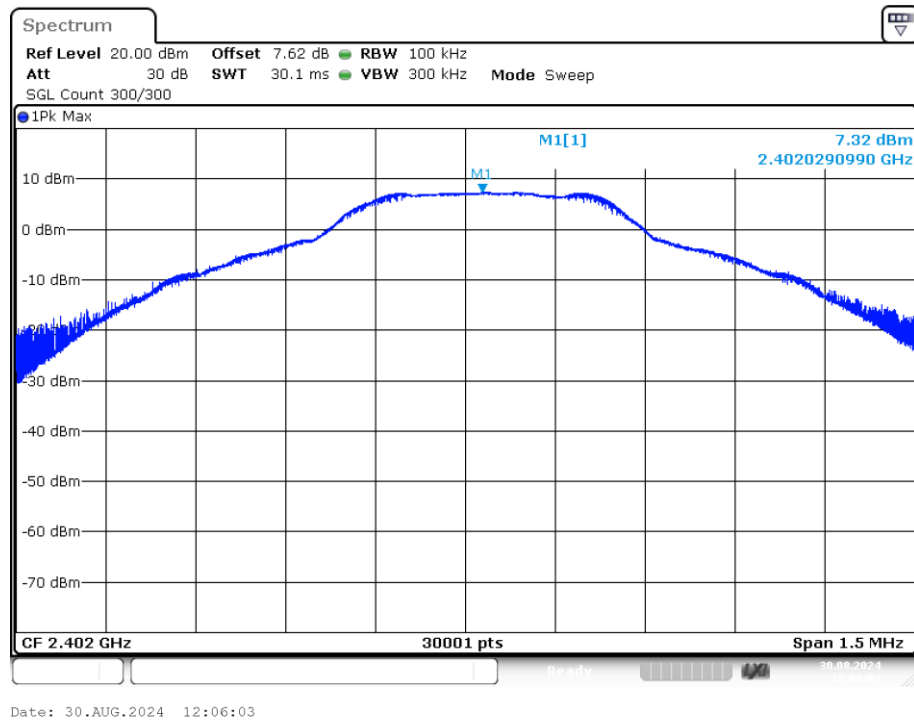

Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission

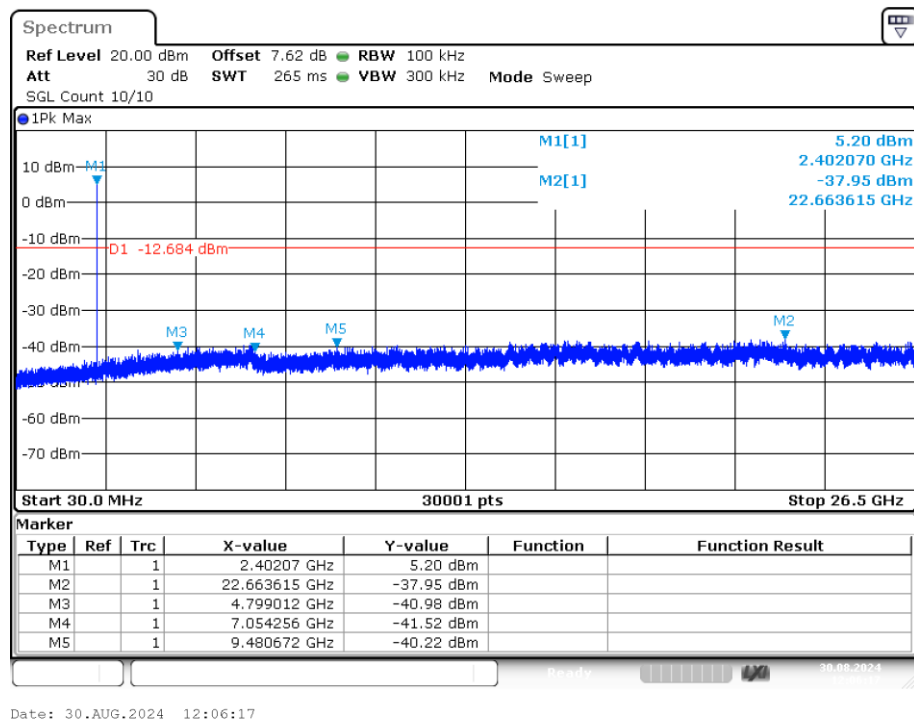


Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Ref

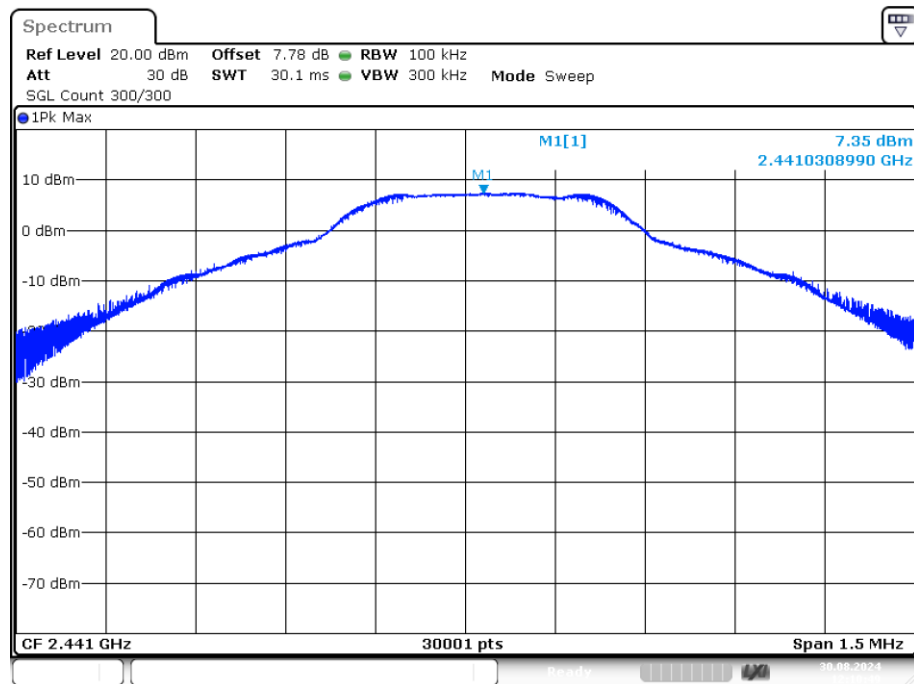


Date: 30.AUG.2024 12:10:48

Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission

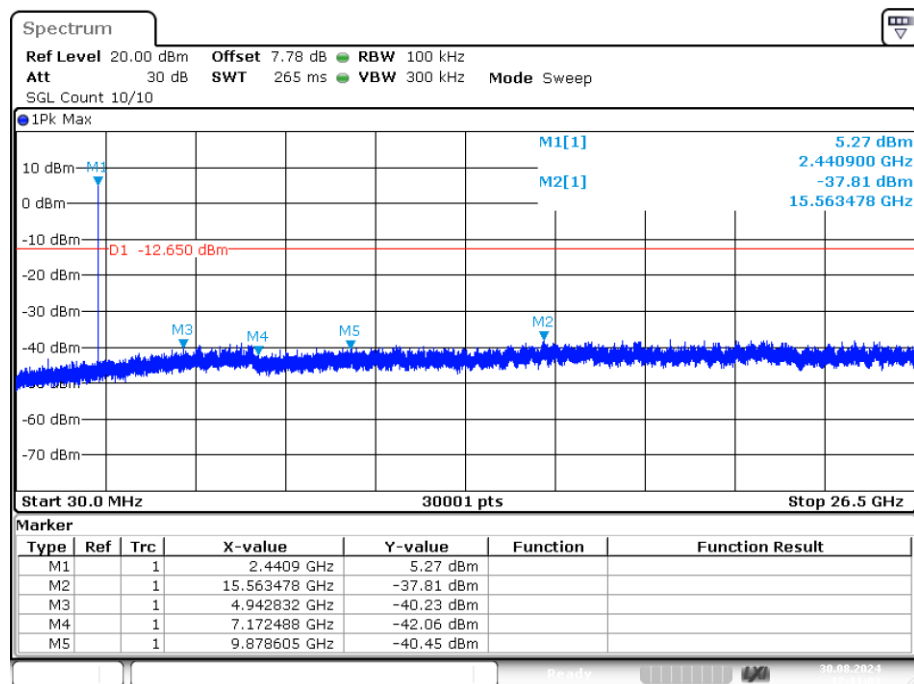


Date: 30.AUG.2024 12:11:02

Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Ref

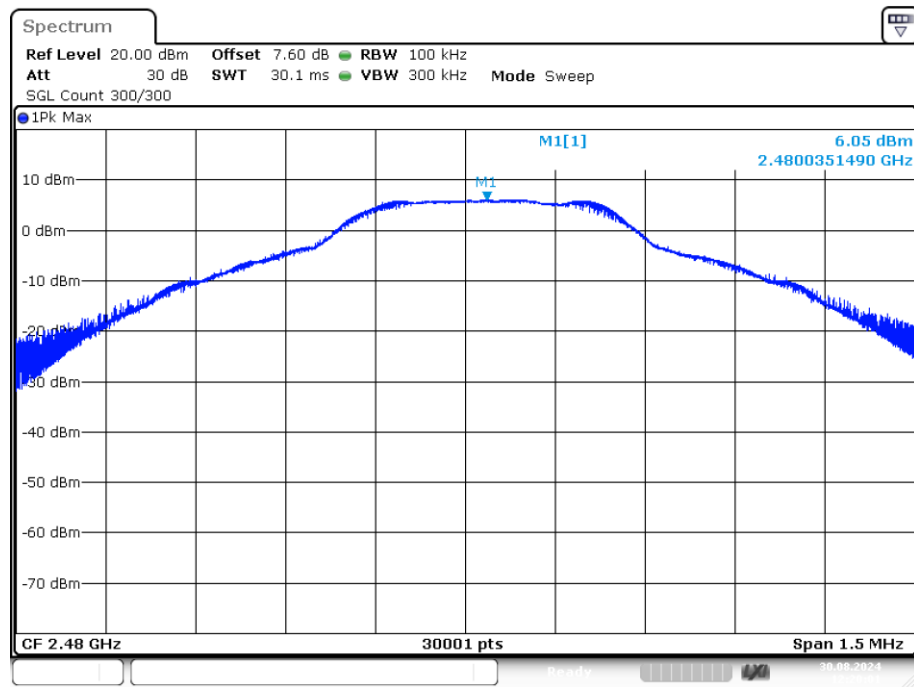


Date: 30.AUG.2024 12:20:01

Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission

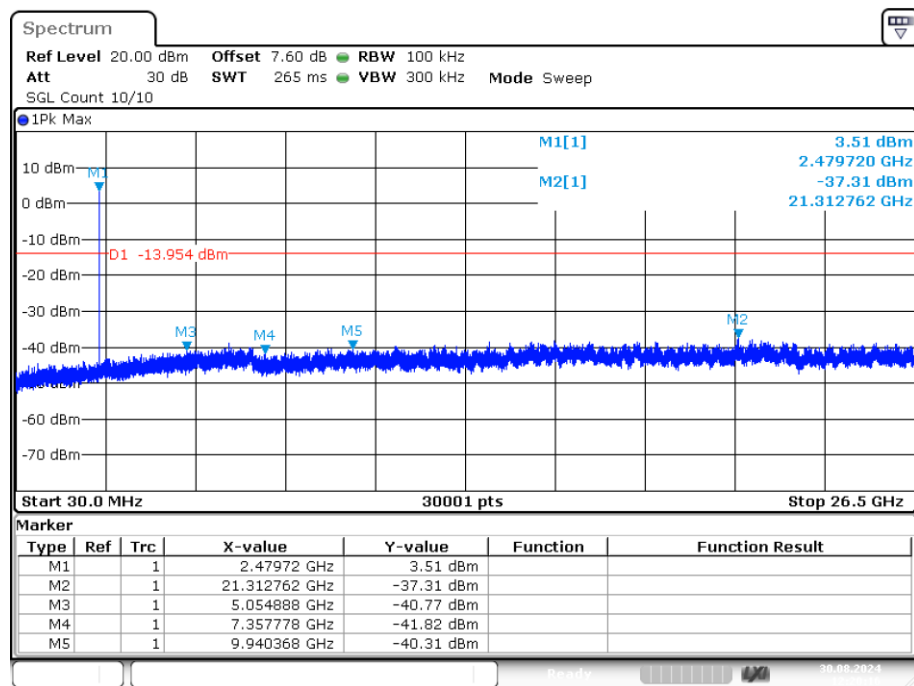


Date: 30.AUG.2024 12:20:15

Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Ref

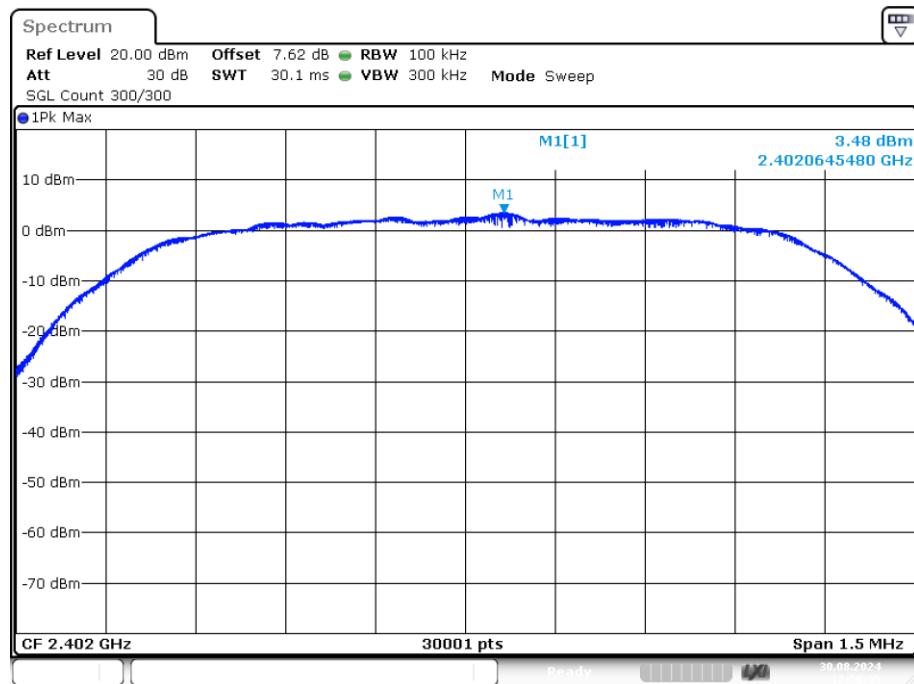


Date: 30.AUG.2024 12:50:44

Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Emission

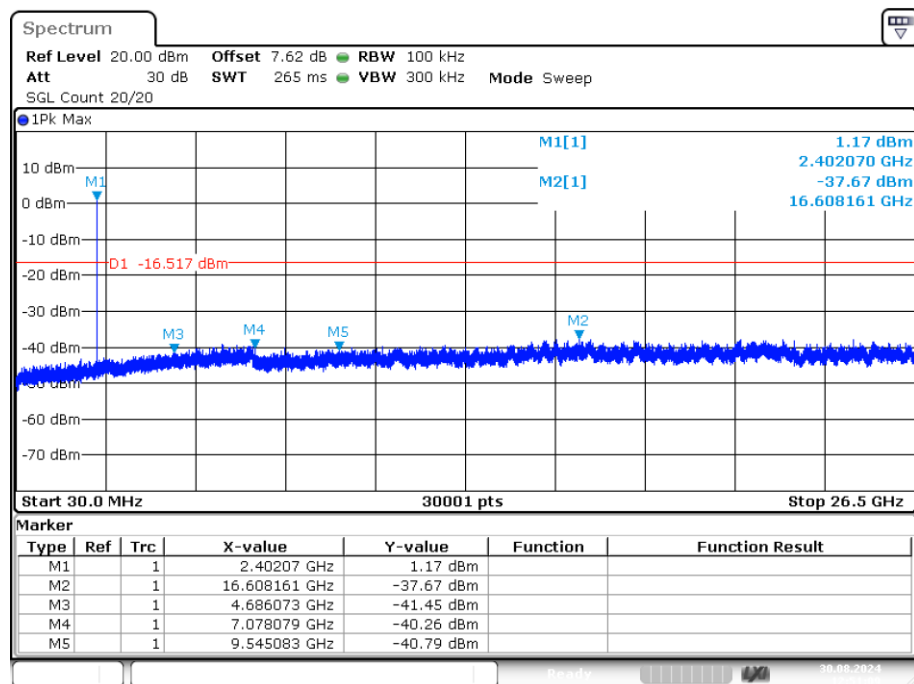


Date: 30.AUG.2024 12:51:08

Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Ref

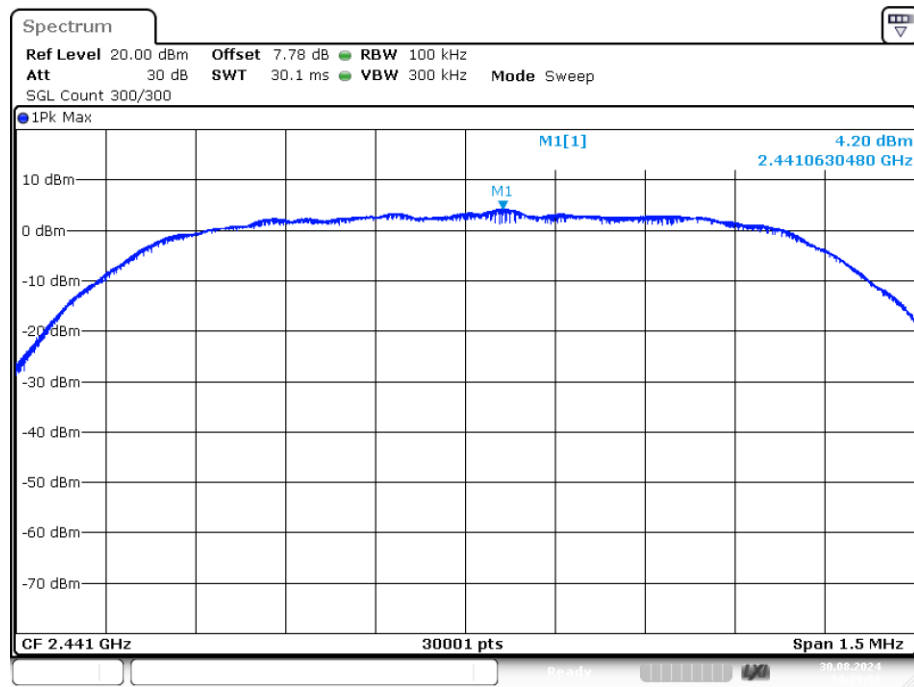


Date: 30.AUG.2024 14:29:50

Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Emission

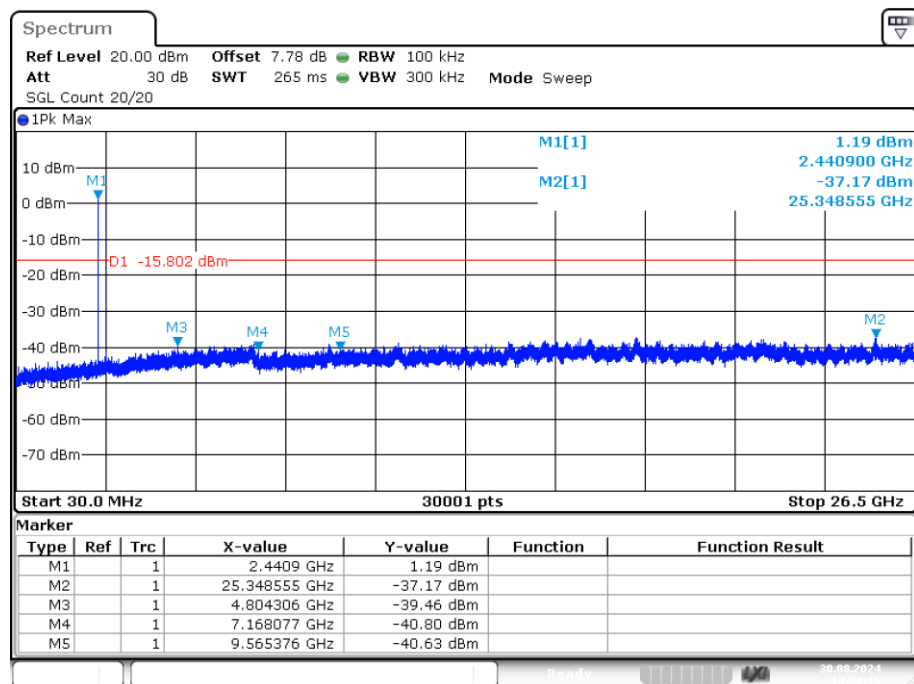


Date: 30.AUG.2024 14:30:15

Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Ref

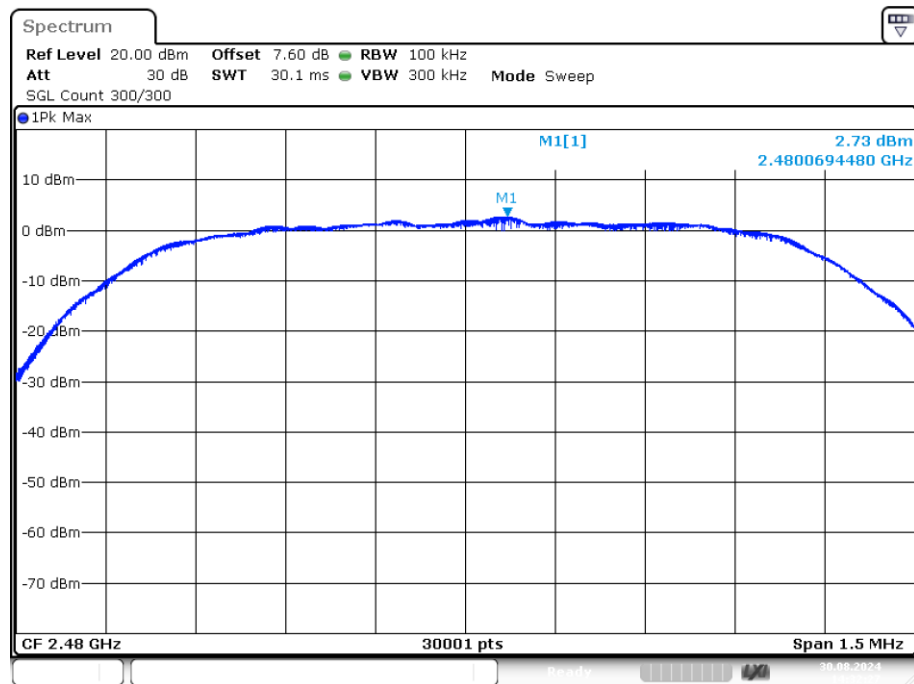


Date: 30.AUG.2024 14:32:27

Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Emission

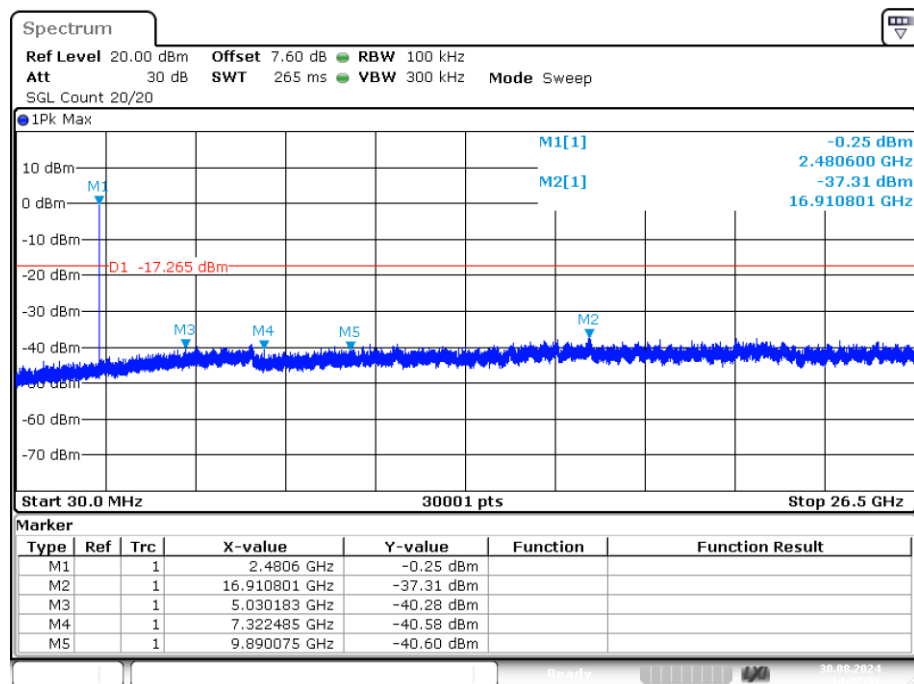


Date: 30.AUG.2024 14:32:51

Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Ref

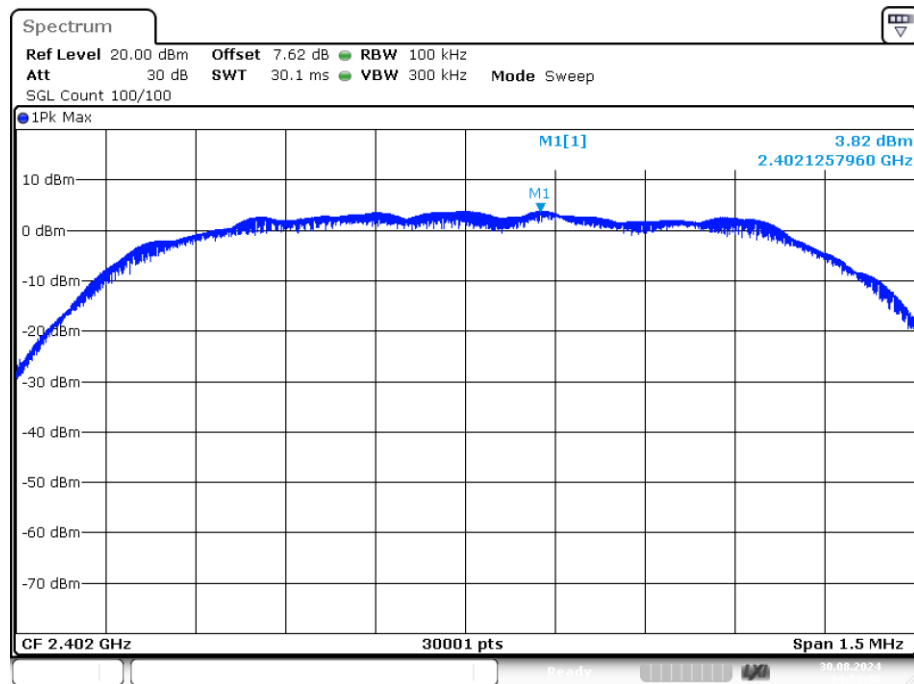


Date: 30.AUG.2024 14:53:40

Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Emission

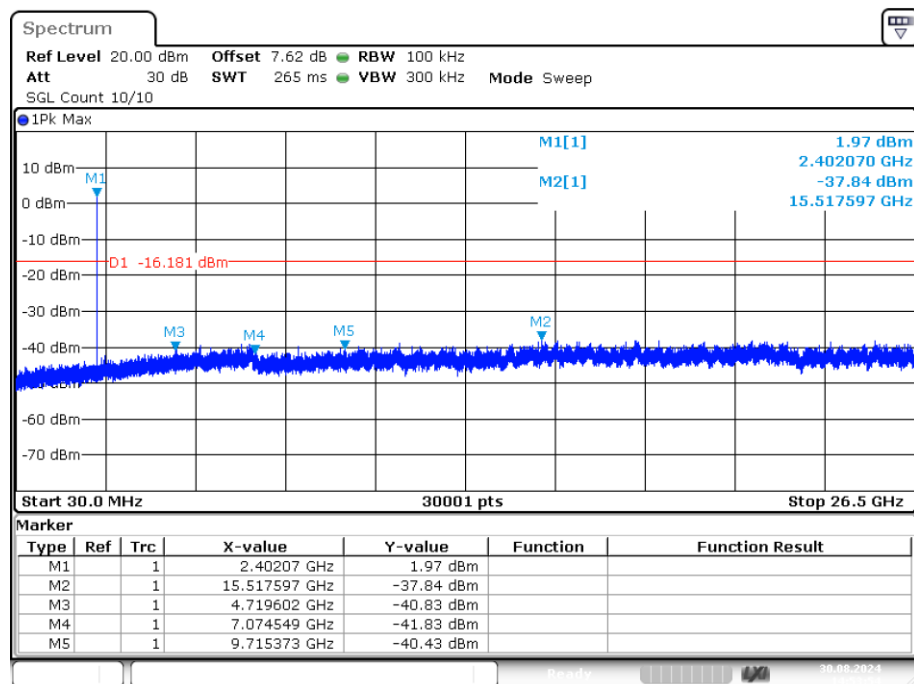


Date: 30.AUG.2024 14:53:54

Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Ref

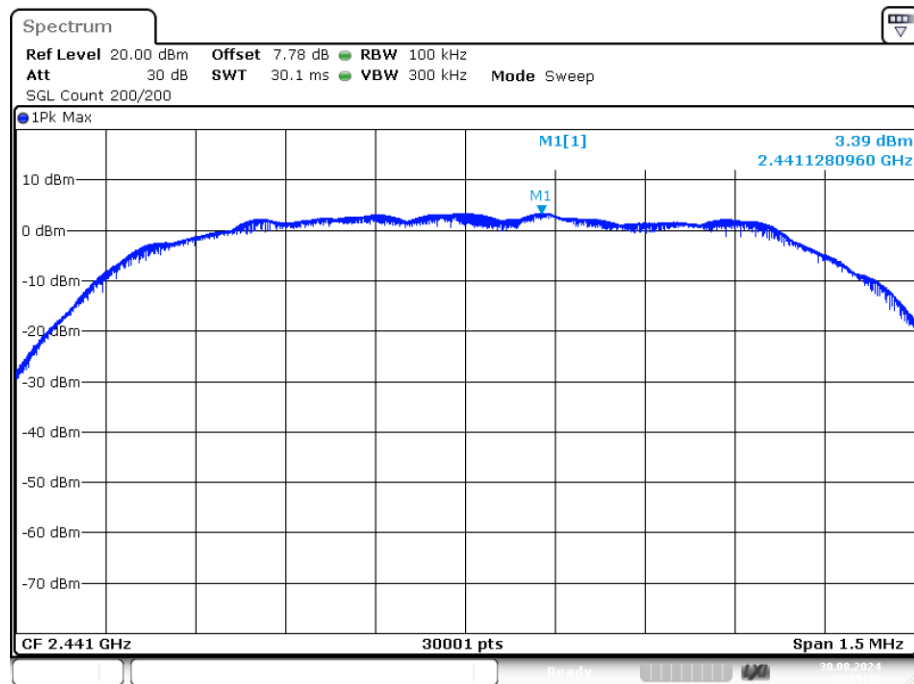


Date: 30.AUG.2024 14:55:29

Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Emission

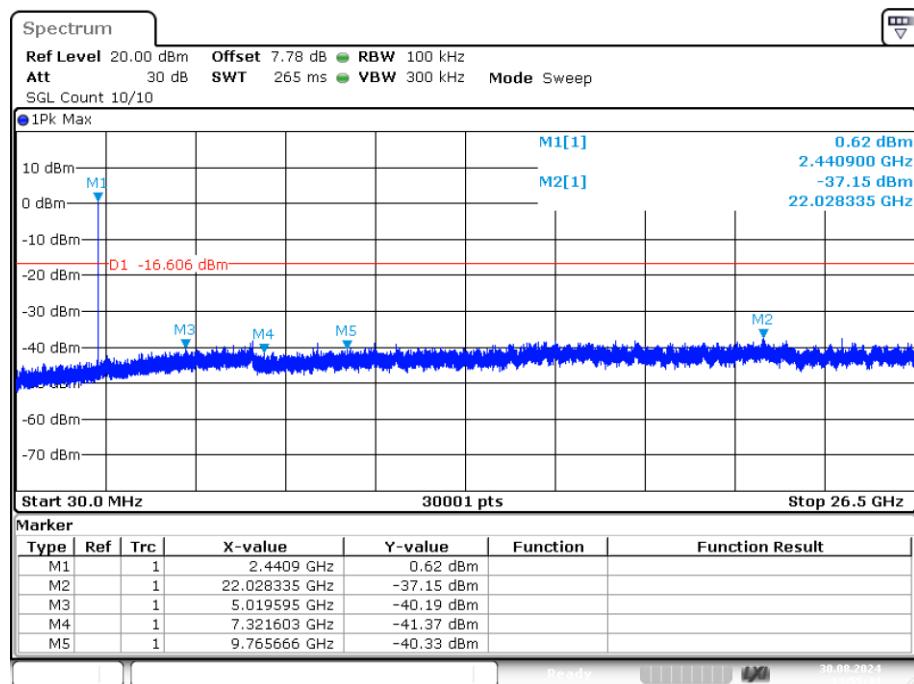


Date: 30.AUG.2024 14:55:43

Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Ref

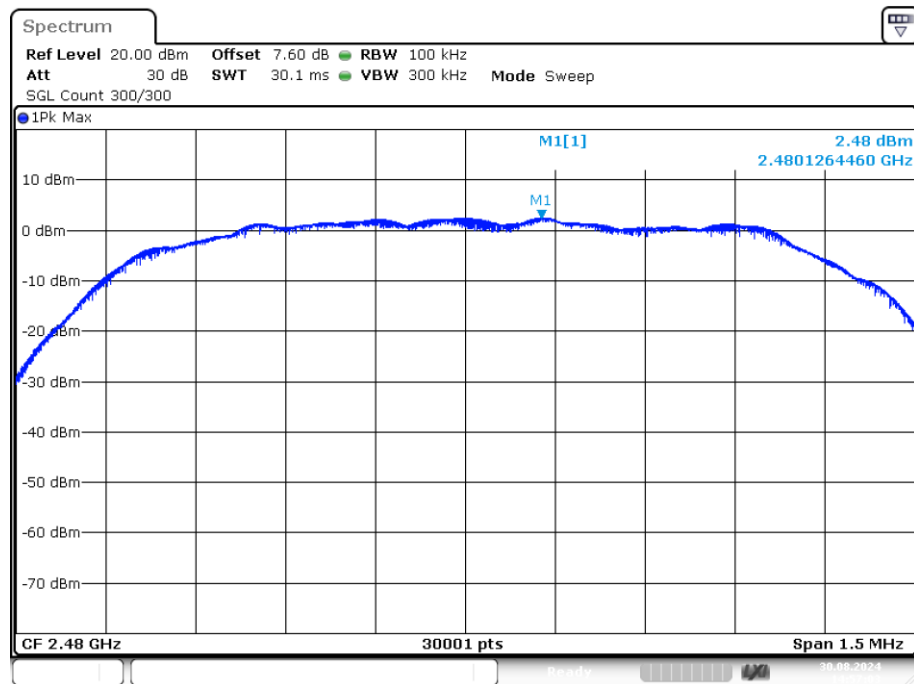

Date: 30.AUG.2024 14:57:03


Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Emission

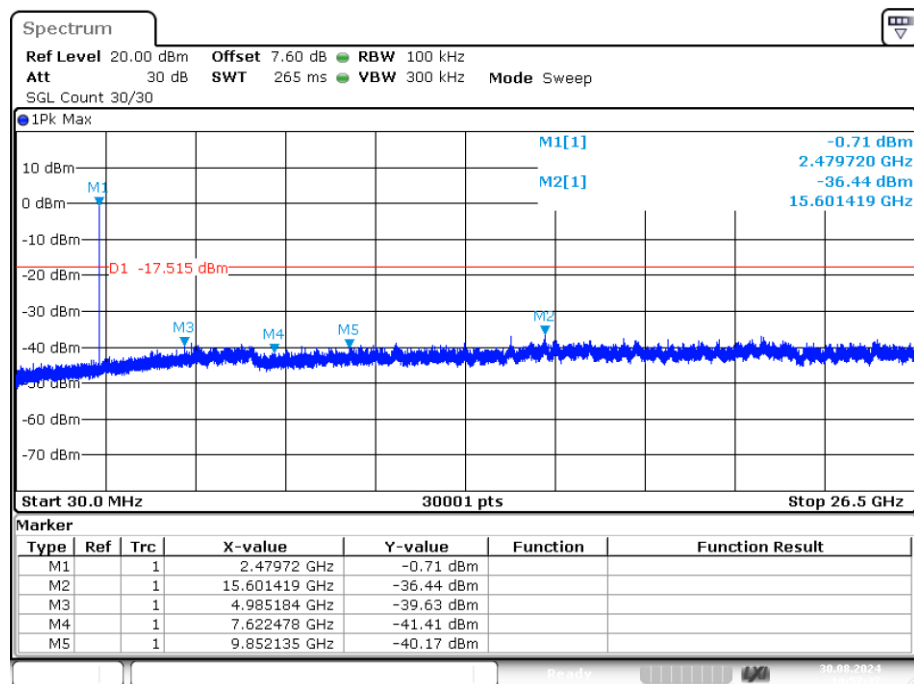

Date: 30.AUG.2024 14:57:38

9. Band Edge Compliance

9.1. Block Diagram of Test Setup

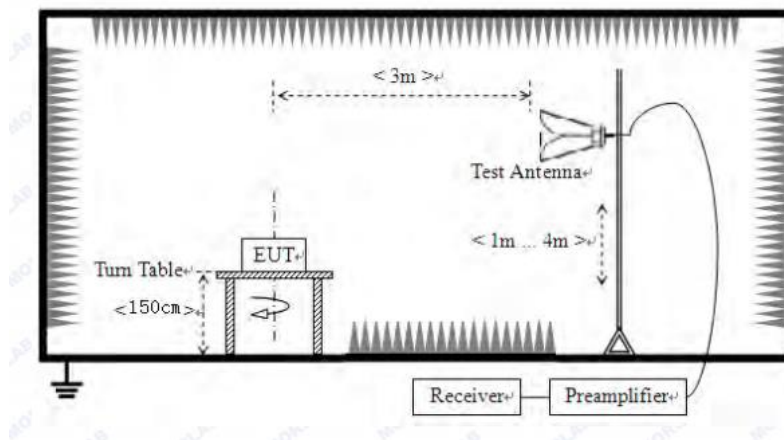

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in FCC part 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with FCC part 15.209 limits.

9.3. Test Procedure

Refer to ANSI C 63.10, Clause 6.10.


All restriction band and non- restriction band have been tested, only worse case is reported.

9.4. Test Result


PASS. (See below detailed test data)

Radiated Method:


Test Mode: GFSK-Low Hopping-off

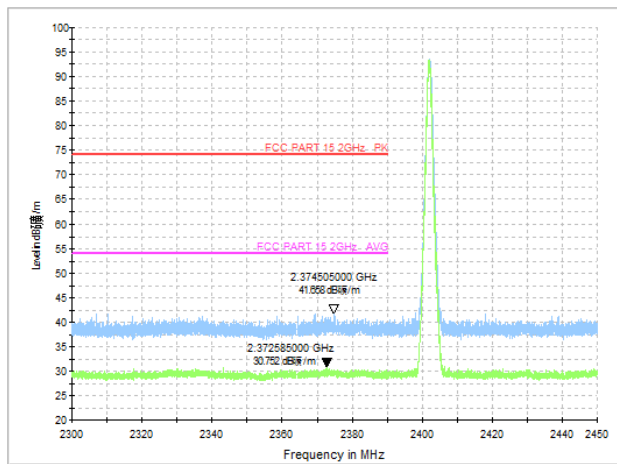


Test Mode: GFSK-High Hopping-off




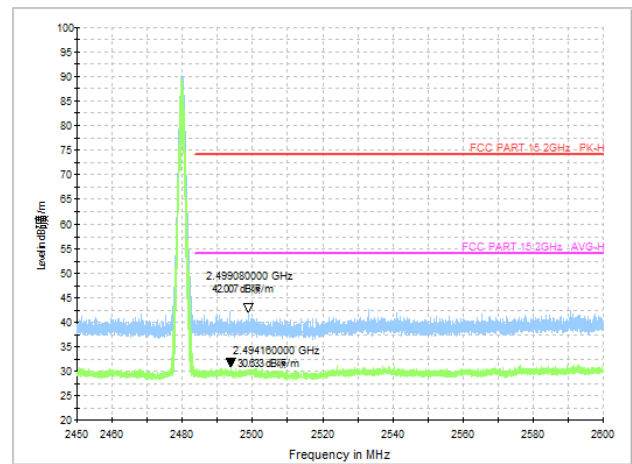


Test Mode: GFSK-Low Hopping-on

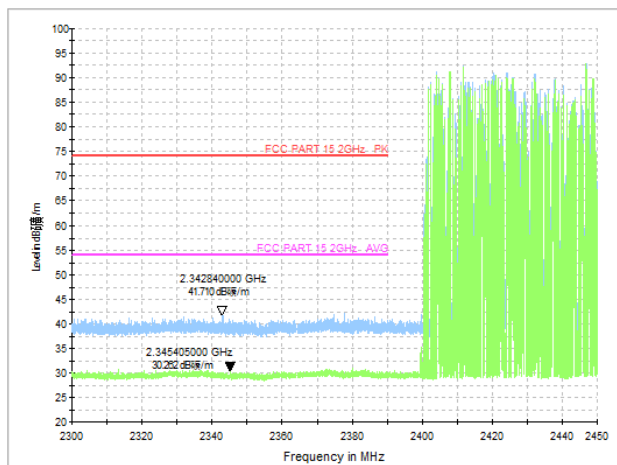


Test Mode: GFSK-High Hopping-on

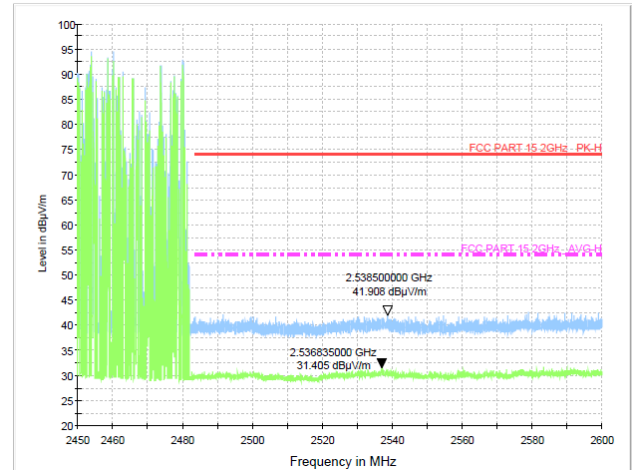


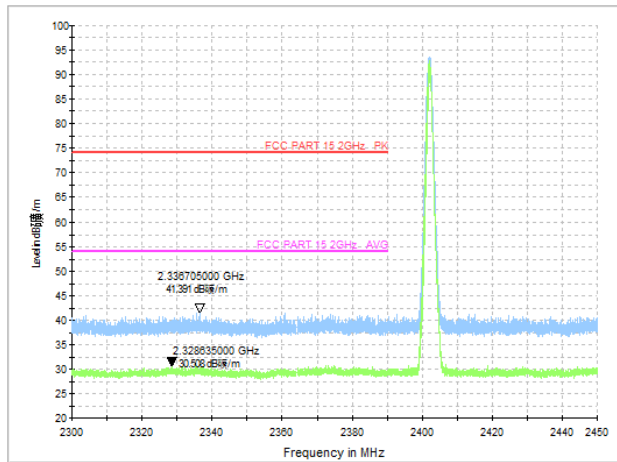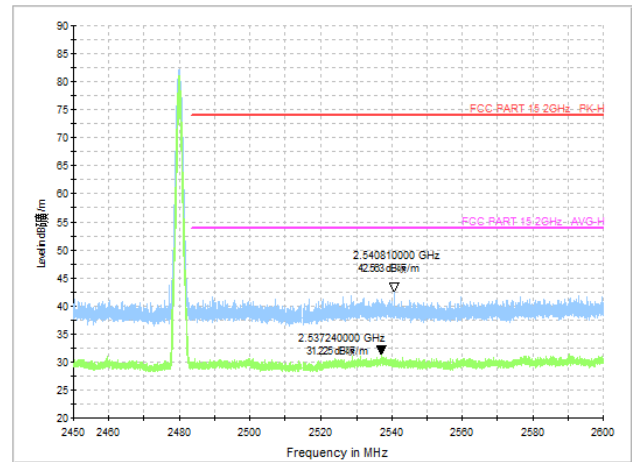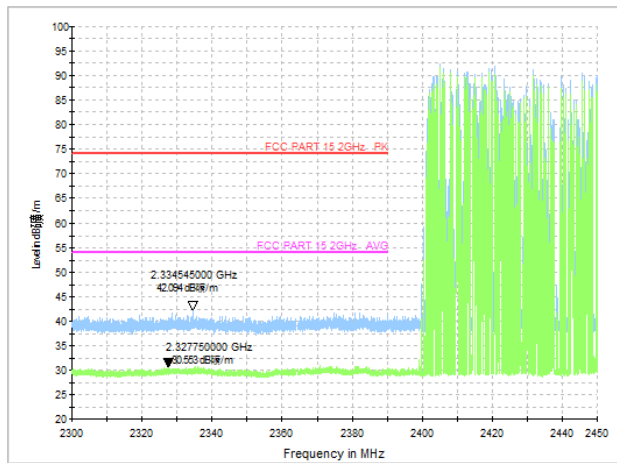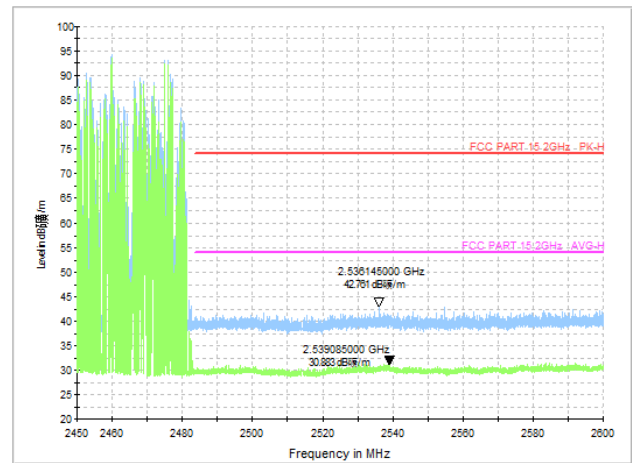Test Mode: $\pi/4$ DQPSK-Low Hopping-offTest Mode: $\pi/4$ DQPSK-High Hopping-offTest Mode: $\pi/4$ DQPSK-Low Hopping-onTest Mode: $\pi/4$ DQPSK-High Hopping-on


Test Mode: 8DPSK-Low Hopping-off

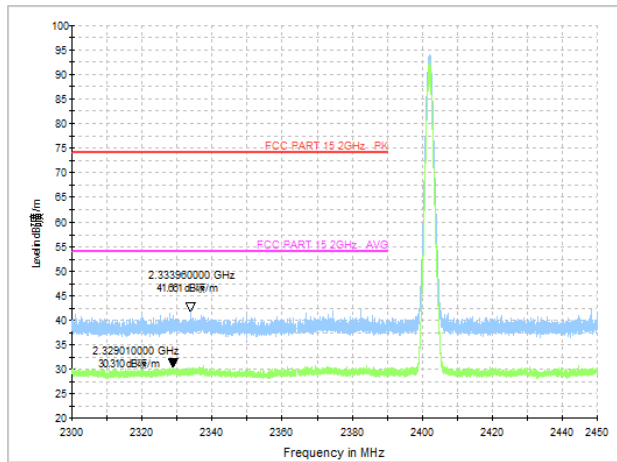


Test Mode: 8DPSK-High Hopping-off

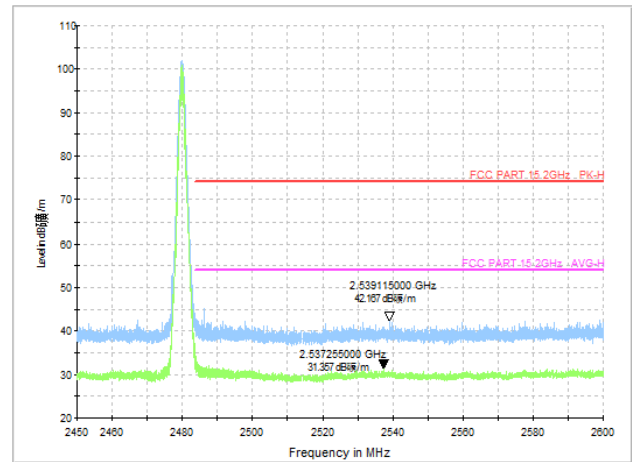

Test Mode: 8DPSK-Low Hopping-on

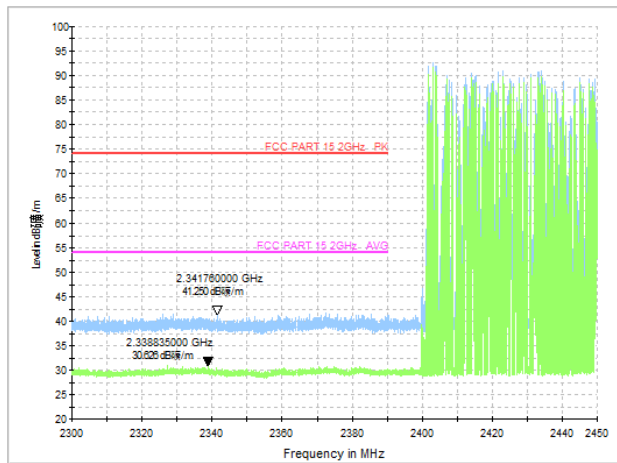


Test Mode: 8DPSK-High Hopping-on

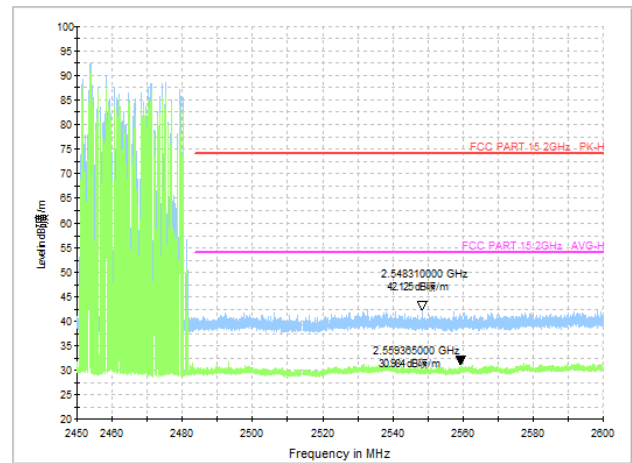

Conducted Method


Note: 1. All antennas have been tested, and antenna 1 is the worst data.

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref

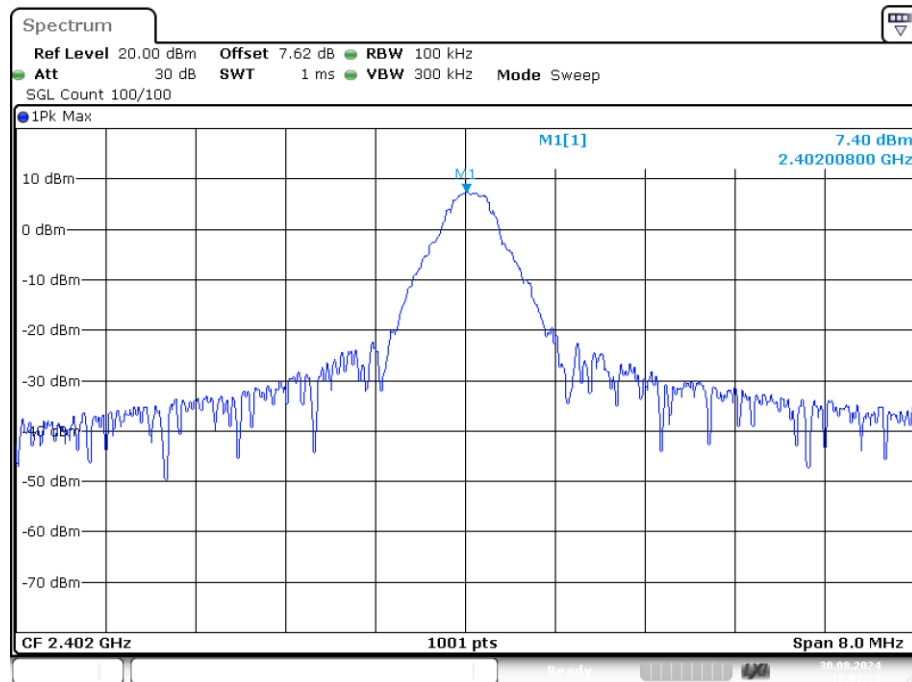


Date: 30.AUG.2024 12:05:33

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

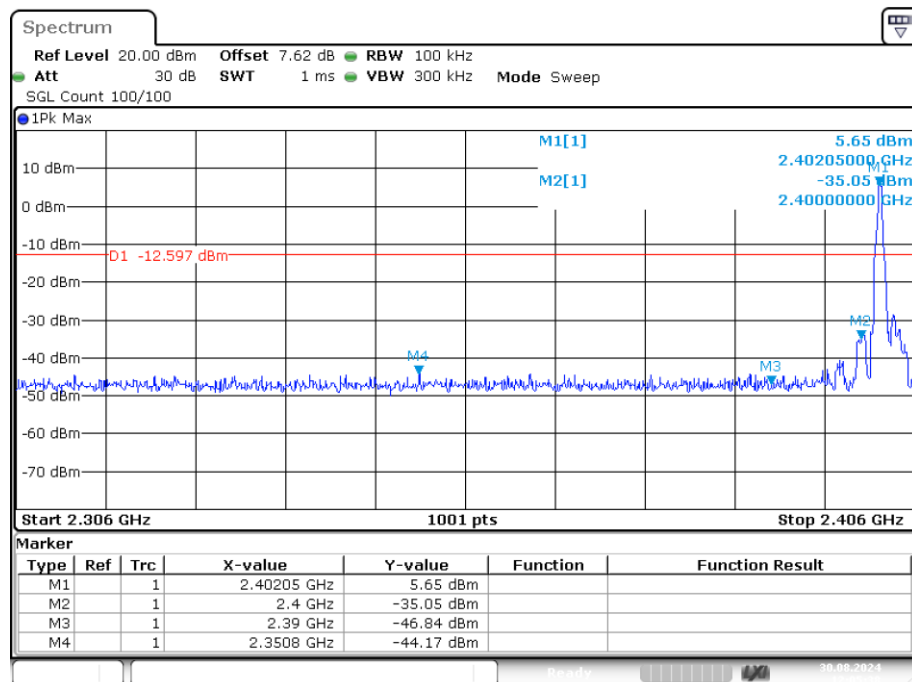


Date: 30.AUG.2024 12:05:38

Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref

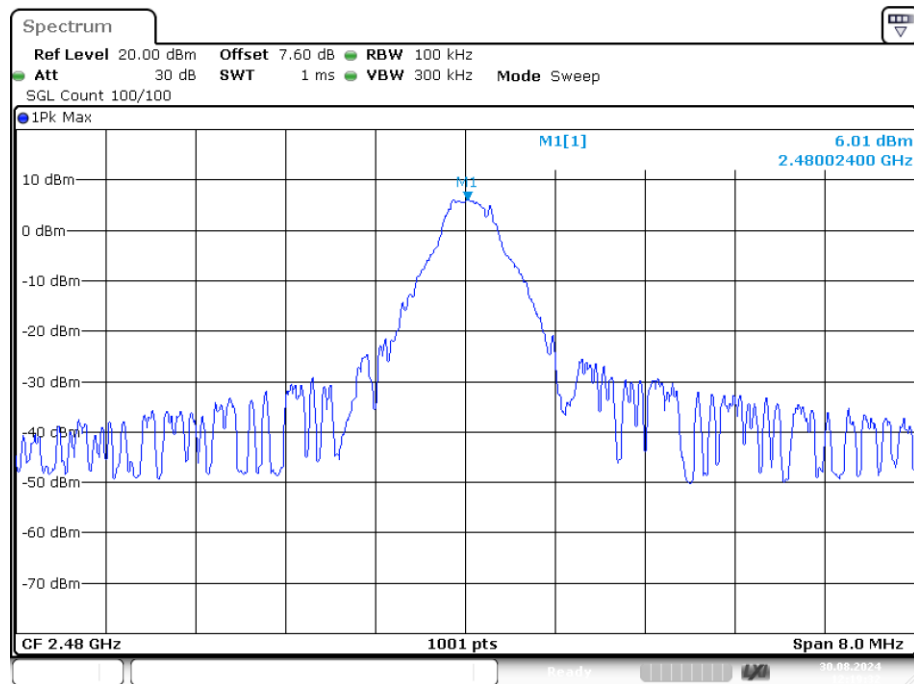


Date: 30.AUG.2024 12:19:32

Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

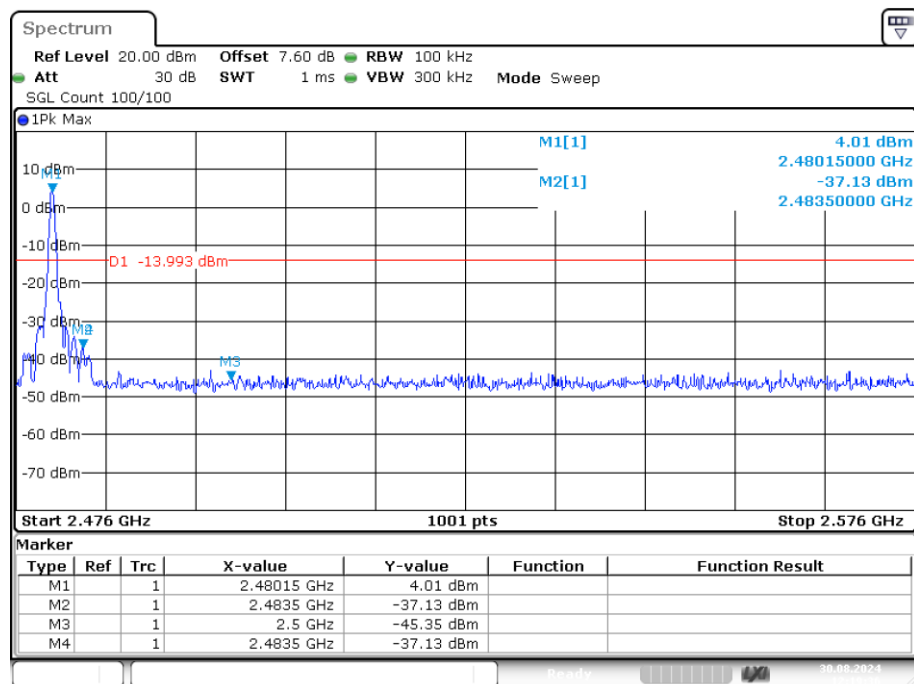


Date: 30.AUG.2024 12:19:36

Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref

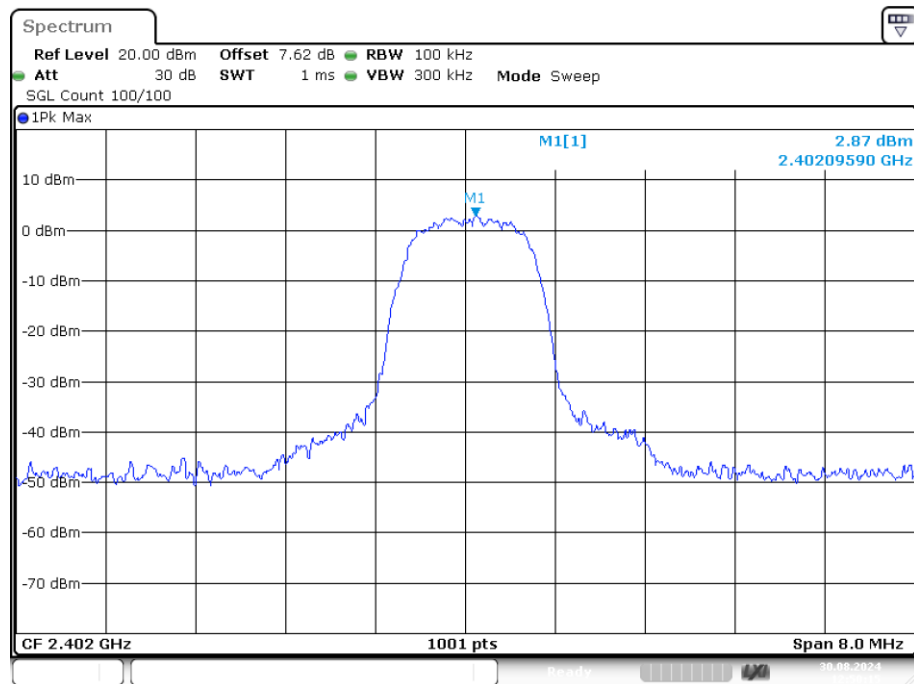

Date: 30.AUG.2024 12:50:15

Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission

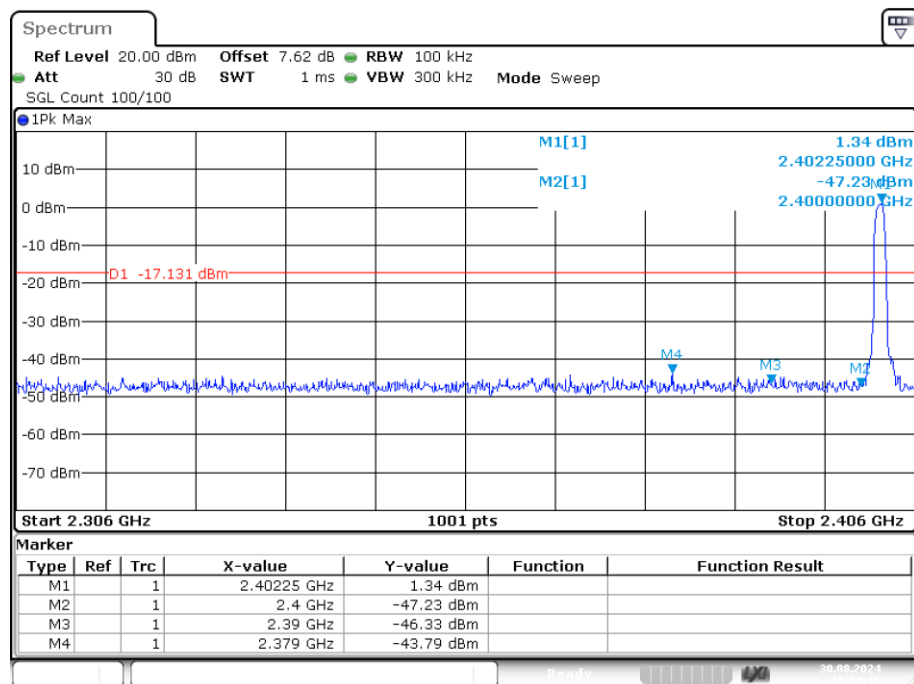

Date: 30.AUG.2024 12:50:19

Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref