Shenzhen Huatongwei International Inspection Co., Ltd.

1/F,Bldg 3,Hongfa Hi-tech Industrial Park,Genyu Road,Tianliao,Gongming,Shenzhen,China Phone: 86-755-26748019 Fax: 86-755-26748089 http://www.szhtw.com.cn



TEST REPORT

Report Reference No.....:: CHTEW19100085 Report verification:

Project No....:: SHT1909057701EW

FCC ID.....:: QRP-SP-011

Applicant's name.....: Azumi S.A

Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza, Address.....:

Piso 16 of. 16-01, Marbella, Ciudad de Panama, Panama

Manufacturer....: **AZUMI HK LTD**

FLAT/RM 18 BLK 1 14/F GOLDEN INDUSTRIAL BUILDING 16-Address....:

26 KWAI TAK STREET KWAI CHUNG,HK

Test item description: **Mobile Phone**

AZUMI Trade Mark:

Model/Type reference.....: V5

Listed Model(s)

FCC CFR Title 47 Part 15 Subpart C Section 15.247 Standard::

Date of receipt of test sample.....: Sep 19, 2019

Date of testing..... Sep 20, 2019- Oct 15, 2019

Date of issue.....: Oct 16, 2019

Result....: **PASS**

Compiled by

(position+printedname+signature)...: File administrators Silvia Li

Supervised by

(position+printedname+signature)....: Project Engineer Aaron Fang Silvia Li Aaron.Fang

Approved by

(position+printedname+signature)....: RF Manager Hans Hu

Shenzhen Huatongwei International Inspection Co., Ltd. Testing Laboratory Name::

Address..... 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,

Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Page: 1 of 51

Report No.: CHTEW19100085 Page: 2 of 51 Issued: 2019-10-16

Contents

<u> </u>	TEST STANDARDS AND REPORT VERSION	<u> </u>
_		
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	TEST DESCRIPTION	4
<u>3.</u>	SUMMARY	5
<u> </u>	OUMMAN	
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	TEST ENVIRONMENT	7
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<u>5.</u>	TEST CONDITIONS AND RESULTS	11
<u>v.</u>	CONDITIONS IND NECESIO	• •
5.1.	Antenna requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	15
5.4.	Power Spectral Density	16
5.5.	6dB bandwidth	20
5.6.	Restricted band	24
5.7.	Band edge and Spurious Emissions (conducted)	28
5.8.	Spurious Emissions (radiated)	41
<u>6.</u>	TEST SETUP PHOTOS	50
7.	EXTERANAL AND INTERNAL PHOTOS	51
		0.1

Report No.: CHTEW19100085 Page: 3 of 51 Issued: 2019-10-16

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

<u>FCC Rules Part 15.247:</u> Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

<u>KDB 558074 D01 15.247 Meas Guidance v05r02:</u> Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description		
N/A	2019-10-16	Original		

Report No.: CHTEW19100085 Page: 4 of 51 Issued: 2019-10-16

2. TEST DESCRIPTION

Test Item	FCC Rule	Result	Test Engineer
Antenna requirement	15.203/15.247(c)	PASS	Minghua Fan
Line Conducted Emissions (AC Main)	15.207	PASS	Minghua Fan
Conducted Peak Output Power	15.247(b)(3)	PASS	Bruce Wong
Power Spectral Density	15.247(e)	PASS	Bruce Wong
6dB Bandwidth	15.247(a)(2)	PASS	Bruce Wong
Restricted band	15.247(d)/15.205	PASS	XuYang
Spurious Emissions	15.247(d)/15.209	PASS	XuYang

Note: The measurement uncertainty is not included in the test result.

Report No.: CHTEW19100085 Page: 5 of 51 Issued: 2019-10-16

3. **SUMMARY**

3.1. Client Information

Applicant:	Azumi S.A
Address:	Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza, Piso 16 of. 16-01, Marbella, Ciudad de Panama, Panama
Manufacturer:	AZUMI HK LTD
Address:	FLAT/RM 18 BLK 1 14/F GOLDEN INDUSTRIAL BUILDING 16-26 KWAI TAK STREET KWAI CHUNG,HK

3.2. Product Description

3.2. Floudet Description			
Name of EUT:	ame of EUT: Mobile Phone		
Trade Mark:	AZUMI		
Model No.:	V5		
Listed Model(s):	-		
Power supply:	DC 3.8V		
Adapter information:	Input:100-240Va.c., 50/60Hz, 0.15A Output:5.0Vd.c., 500mA		
Hardware version: Azumi_V5_HW-1			
Software version:	AZUMI_V5_CENAM_V001		
WIFI			
Supported type:	802.11b/802.11g/802.11n(HT20)		
Modulation:	DSSS for 802.11b OFDM for 802.11g/802.11n(HT20)		
Operation frequency:	2412MHz~2462MHz		
Channel number:	11		
Channel separation:	5MHz		
Antenna type:	PIFA Antenna		
Antenna gain:	1.8dBi		

Report No.: CHTEW19100085 Page: 6 of 51 Issued: 2019-10-16

3.3. Operation state

> Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

802.11b/g/n(HT20)				
Channel	Frequency (MHz)			
01	2412			
02	2417			
06	2437			
10	2457			
11	2462			

Test mode

_		_
 $D\Gamma$	+00+	items
κ	1681	Herris

The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).

For AC power line conducted emissions:

The EUT was set to connect with the WLAN AP under large package sizes transmission.

For Radiated suprious emissions test item:

The engineering test program was provided and enabled to make EUT continuous transmit(duty cycle>98%). The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- supplied by the lab

0	/	Manufacturer:	/
		Model No.:	/
0		Manufacturer:	/
		Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

Report No.: CHTEW19100085 Page: 7 of 51 Issued: 2019-10-16

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd. Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377A

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377A.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

Report No.: CHTEW19100085 Page: 8 of 51 Issued: 2019-10-16

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.51 dB	(1)
Conducted spurious emissions 9kHz~40GHz	0.51 dB	(1)
Conducted Disturbance 150kHz~30MHz	3.02 dB	(1)
Radiated Emissions below 1GHz	4.90 dB	(1)
Radiated Emissions above 1GHz	4.96 dB	(1)
Occupied Bandwidth	70 Hz	(1)

⁽¹⁾ This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

Report No.: CHTEW19100085 Page: 9 of 51 Issued: 2019-10-16

4.5. Equipments Used during the Test

•	Conducted Emission					
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
•	Shielded Room	Albatross projects	N/A	N/A	2018/09/28	2023/09/27
•	EMI Test Receiver	R&S	ESCI	101247	2018/10/27	2019/10/26
•	Artificial Mains	SCHWARZBECK	NNLK 8121	573	2018/10/27	2019/10/26
•	Pulse Limiter	R&S	ESH3-Z2	100499	2018/10/27	2019/10/26
•	RF Connection Cable	HUBER+SUHNER	EF400	N/A	2018/11/15	2019/11/14
•	Test Software	R&S	ES-K1	N/A	N/A	N/A
0	Single Balanced Telecom Pair ISN	FCC	FCC-TLISN-T2-02	20371	2018/10/28	2019/10/27
0	Two Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T4-02	20373	2018/10/28	2019/10/27
0	Four Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T8-02	20375	2018/10/28	2019/10/27
0	V-Network	R&S	ESH3-Z6	100211	2018/10/27	2019/10/26
0	V-Network	R&S	ESH3-Z6	100210	2018/10/27	2019/10/26
0	2-Line V-Network	R&S	ESH3-Z5	100049	2018/10/27	2019/10/26

•	Radiated Emission-6th test site					
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
•	Semi-Anechoic Chamber	Albatross projects	SAC-3m-02	N/A	2018/09/30	2021/09/29
•	EMI Test Receiver	R&S	ESCI	100900	2018/10/28	2019/10/27
•	Loop Antenna	R&S	HFH2-Z2	100020	2017/11/20	2020/11/19
•	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	546	2017/04/05	2020/04/04
•	Pre-Amplifer	SCHWARZBECK	BBV 9742	N/A	2018/11/15	2019/11/14
•	RF Connection Cable	HUBER+SUHNER	N/A	N/A	2019/8/21	2020/8/20
•	RF Connection Cable	HUBER+SUHNER	SUCOFLEX104	501184/4	2019/5/27	2020/5/26
•	Test Software	R&S	ES-K1	N/A	N/A	N/A
•	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
•	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

•	Radiated emission-7th test site											
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)						
•	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	N/A	2018/09/30	2021/09/29						
•	Spectrum Analyzer	R&S	FSP40	100597	2018/10/27	2019/10/26						
•	Horn Antenna	SCHWARZBECK	9120D	1011	2017/03/27	2020/03/26						
•	Pre-amplifier	BONN	BLWA0160-2M	1811887	2018/11/14	2019/11/13						
•	Pre-amplifier	CD	PAP-0102	12004	2018/11/14	2019/11/13						
•	Broadband Pre- amplifier	SCHWARZBECK	BBV 9718	9718-248	2019/04/26	2020/04/25						
•	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	2018/11/15	2019/11/14						
•	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	2018/11/15	2019/11/14						
•	Test Software	Audix	E3	N/A	N/A	N/A						

Report No.: CHTEW19100085 Page: 10 of 51 Issued: 2019-10-16

•	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
•	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

•	RF Conducted Method											
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)						
•	Signal and spectrum Analyzer	R&S	FSV40	100048	2018/10/28	2019/10/27						
•	Spectrum Analyzer	Agilent	N9020A	MY50510187	2018/10/8	2020/10/7						
•	OSP	R&S	OSP120	101317	N/A	N/A						
0	Radio communication tester	R&S	CMW500	137688-Lv	2018/10/8	2020/10/7						
0	Test software	Tonscend	JS1120-1(LTE)	N/A	N/A	N/A						
0	Test software	Tonscend	JS1120-2(WIFI)	N/A	N/A	N/A						
0	Test software	Tonscend	JS1120-3(WCDMA)	N/A	N/A	N/A						
0	Test software	Tonscend	JS1120-4(GSM)	N/A	N/A	N/A						

Report No.: CHTEW19100085 Page: 11 of 51 Issued: 2019-10-16

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

REQUIREMENT:

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of anantenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST RESULTS

□ Passed	☐ Not Applicable
----------	------------------

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



Report No.: CHTEW19100085 Page: 12 of 51 Issued: 2019-10-16

5.2. Conducted Emissions (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207:

Fraguenov rango (MHz)	Limit (d	BuV)
Frequency range (MHz)	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST CONFIGURATION

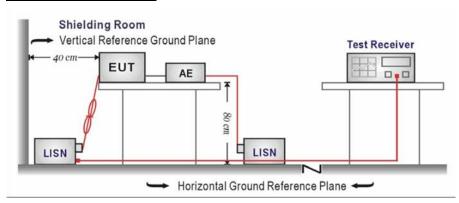

TEST PROCEDURE

- 1. The EUT was setup according to ANSI C63.10:2013 requirements.
- 2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
- 3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
- 4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
- 5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor,was individually connected through a LISN to the input power source.
- 6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- 7. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
- 8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS


Note:

- 1) Transd=Cable lose+ Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit -Level

Report No.: CHTEW19100085 Page: 13 of 51 Issued: 2019-10-16

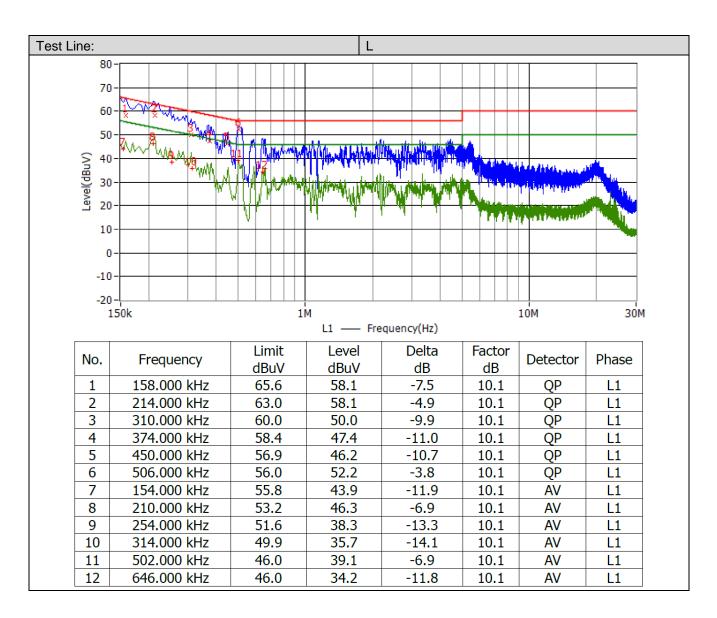

Report No.: CHTEW19100085 Page: 14 of 51 Issued: 2019-10-16

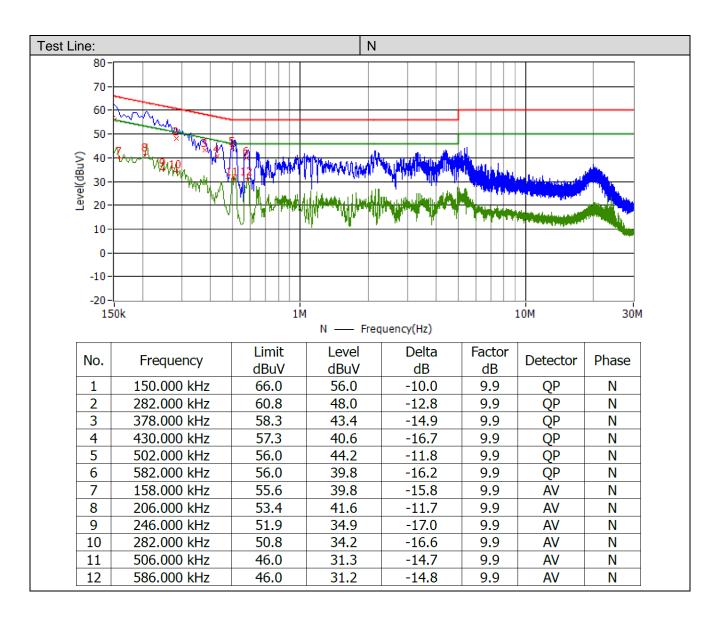


Report No.: CHTEW19100085 Page: 15 of 51 Issued: 2019-10-16

5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

TEST CONFIGURATION

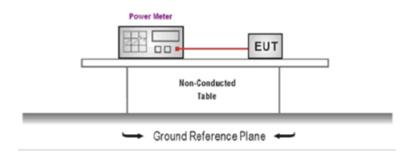

TEST PROCEDURE

- The EUT was tested according to ANSI C63.10: 2013 and KDB 558074 D01 for compliance to FCC 47 CFR 15.247 requirements.
- 2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
- 3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector
- 4. Record the measurement data.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Туре	Channel	Peak Output power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
	01	17.40	15.23		
802.11b	06	16.66	14.50	≤30.00	Pass
	11	17.76	15.61		
	01	17.35	13.69		
802.11g	06	17.05	13.30	≤30.00	Pass
	11	16.98	13.12		
	01	16.95	13.45		
802.11n(HT20)	06	16.56	13.18	≤30.00	Pass
	11	16.40	13.06		

Report No.: CHTEW19100085 Page: 16 of 51 Issued: 2019-10-16


5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION

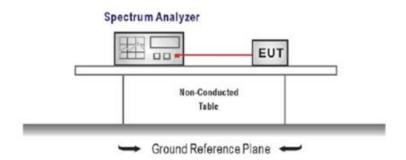

TEST PROCEDURE

- 1. Connect the antenna port(s) to the spectrum analyzer input,
- 2. Configure the spectrum analyzer as shown below:

Center frequency=DTS channel center frequency

Span =1.5 times the DTS bandwidth

RBW = 3 kHz ≤ RBW ≤ 100 kHz, VBW ≥ 3 × RBW

Sweep time = auto couple

Detector = peak

Trace mode = max hold

- 3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
- 4. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS


Туре	Channel	Power Spectral Density (dBm/30KHz)	Limit (dBm/3KHz)	Result	
	01	3.42			
802.11b	06	2.84	≤8.00	Pass	
	11	4.24			
	01	-7.06			
802.11g	06	-6.95	≤8.00	Pass	
	11	-6.42			
	01	-7.32			
802.11n(HT20)	06	-6.70	≤8.00	Pass	
	11	-7.21			

Test plot as follows:


Report No.: CHTEW19100085 Page: 17 of 51 Issued: 2019-10-16

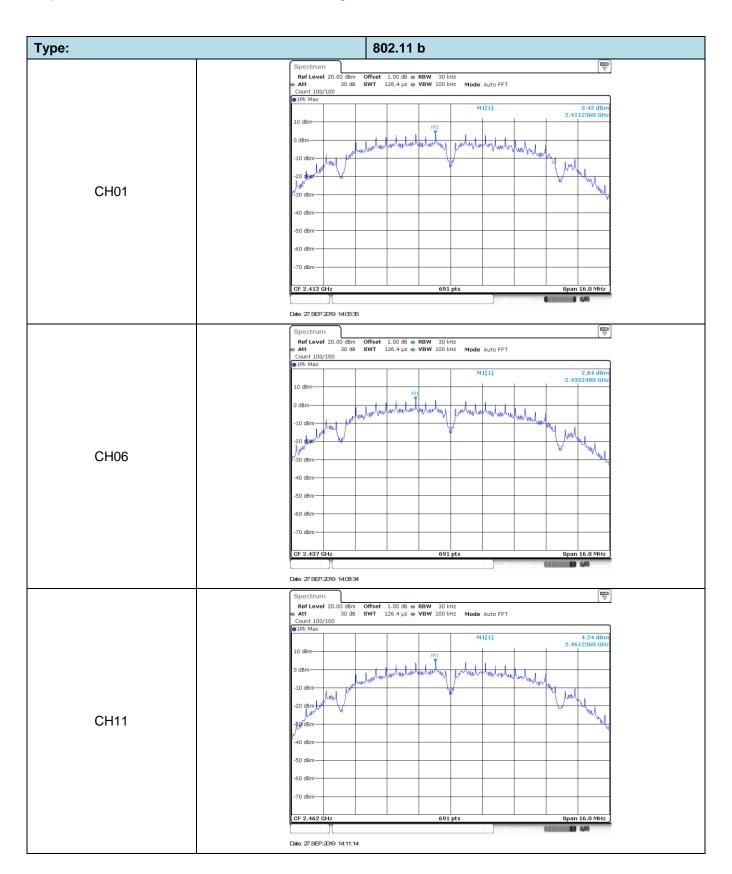

Report No.: CHTEW19100085 Page: 18 of 51 Issued: 2019-10-16

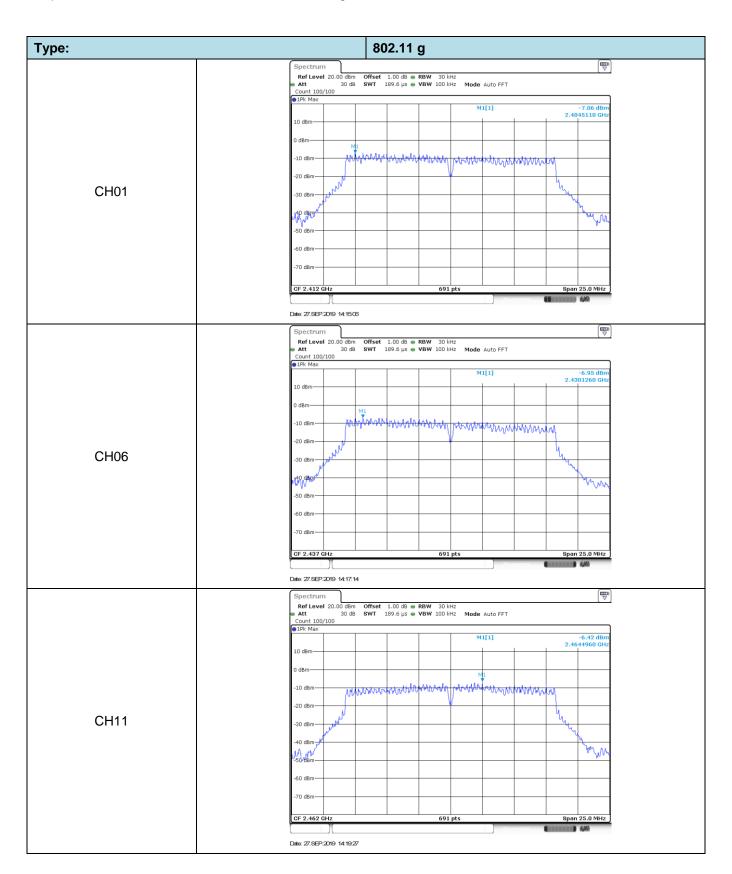

Report No.: CHTEW19100085 Page: 19 of 51 Issued: 2019-10-16

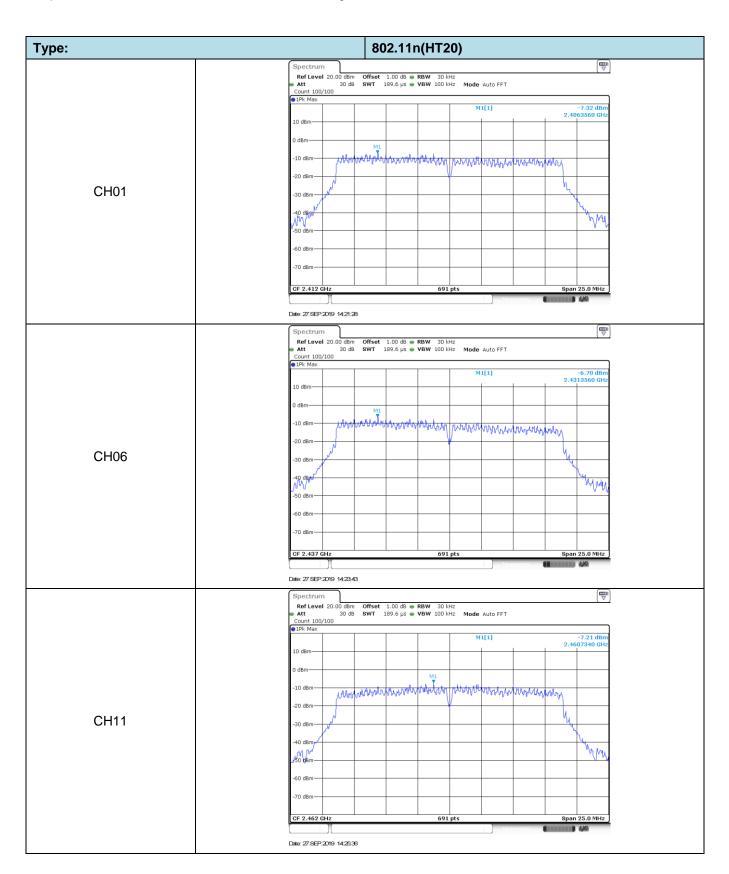

Report No.: CHTEW19100085 Page: 20 of 51 Issued: 2019-10-16


5.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION

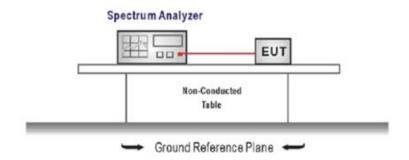

TEST PROCEDURE

- 1. Connect the antenna port(s) to the spectrum analyzer input.
- 2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency =DTS channel center frequency

Span=2 x DTS bandwidth

RBW = 100 kHz, VBW ≥ 3 × RBW

Sweep time= auto couple

Detector = Peak

Trace mode = max hold

- 3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS


Туре	Channel	6dB Bandwidth (MHz)	Limit (kHz)	Result	
	01	9.60			
802.11b	06	9.15	≥500	Pass	
	11	9.12			
	01	16.38			
802.11g	06	16.23	≥500	Pass	
	11	15.48			
	01	17.40			
802.11n(HT20)	06	17.76	≥500	Pass	
	11	15.75			

Test plot as follows:


Report No.: CHTEW19100085 Page: 21 of 51 Issued: 2019-10-16

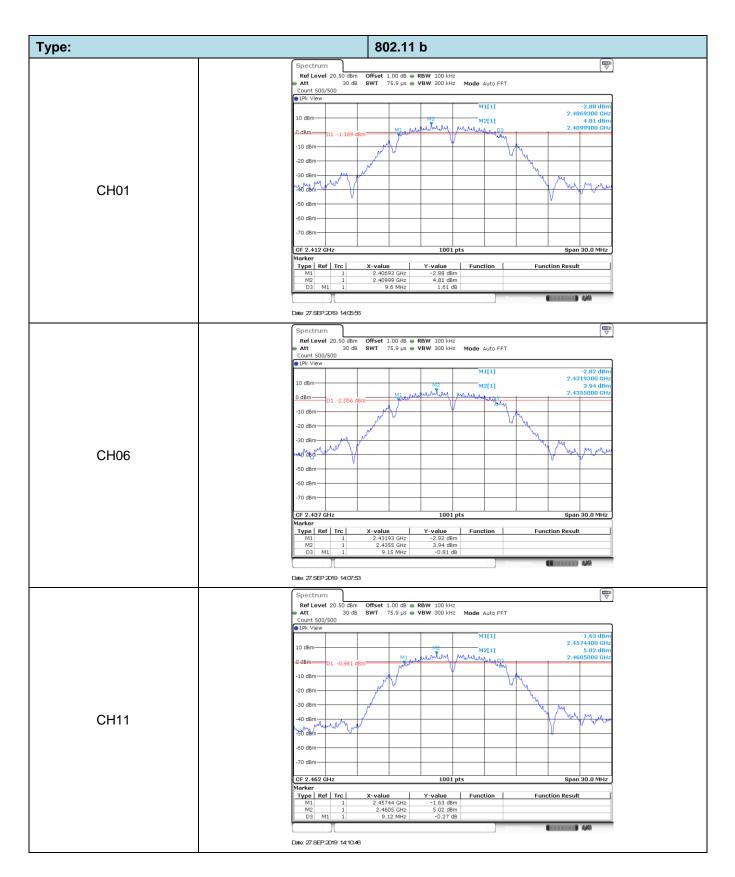

Report No.: CHTEW19100085 Page: 22 of 51 Issued: 2019-10-16

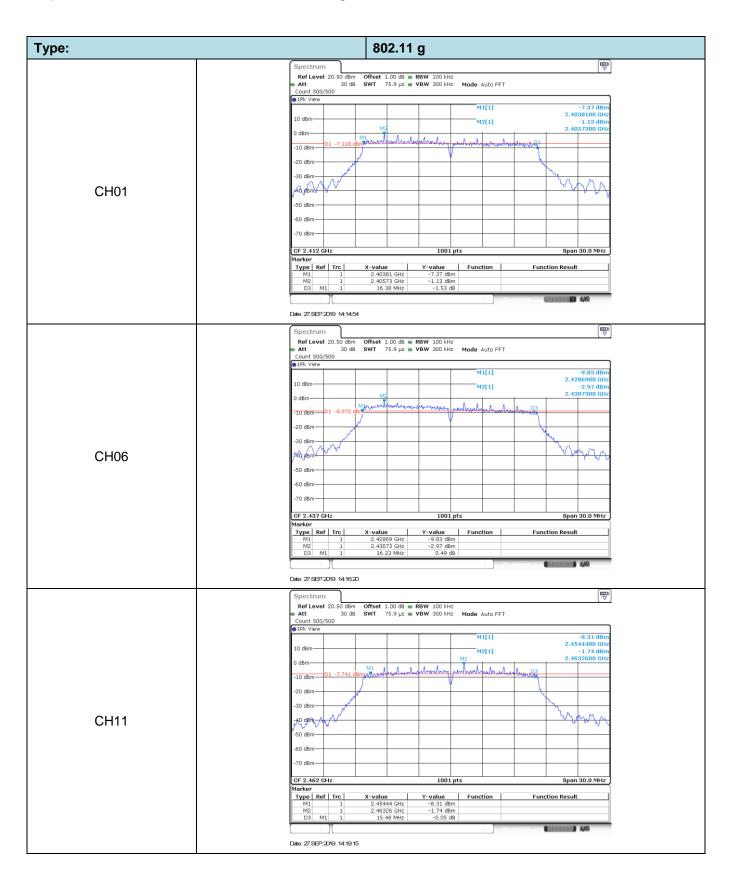

Report No.: CHTEW19100085 Page: 23 of 51 Issued: 2019-10-16

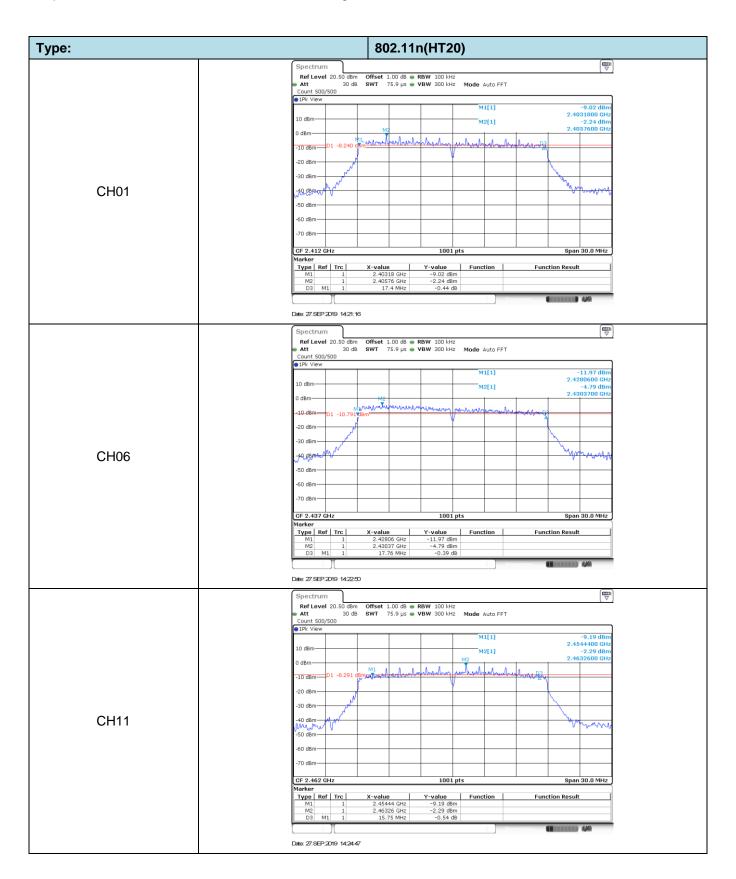

Report No.: CHTEW19100085 Page: 24 of 51 Issued: 2019-10-16


5.6. Restricted band

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

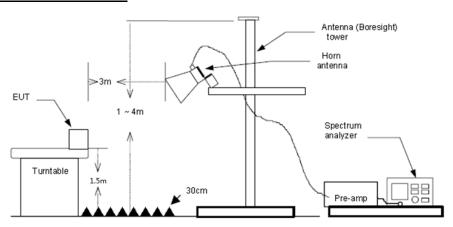

TEST PROCEDURE

- The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2) The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3) The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
- 4) The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. Thisis repeated for both horizontal and vertical polarization of the antenna. In order to find themaximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- 5) The receiver set as follow: RBW=1MHz, VBW=3MHz PEAK detector for Peak value. RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Note:

1) Final level= Read level + Factor

Report No.: CHTEW19100085 Page: 25 of 51 Issued: 2019-10-16

802.11b				CH01				
Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector	
2310.000	18.07	35.78	53.85	74.00	20.15	Horizontal	PK	
2310.000	14.67	35.78	50.45	54.00	3.55	Horizontal	AV	
2390.000	16.88	35.50	52.38	74.00	21.62	Horizontal	PK	
2390.000	12.22	35.50	47.72	54.00	6.28	Horizontal	AV	
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector	
2310.000	15.89	35.78	51.67	74.00	22.33	Vertical	PK	
2310.000	13.58	35.78	49.36	54.00	4.64	Vertical	AV	
2390.000	17.29	35.50	52.79	74.00	21.21	Vertical	PK	
2390.000	13.92	35.50	49.42	54.00	4.58	Vertical	AV	

802.11b				CH11			
Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
2483.500	15.76	35.31	51.07	74.00	22.93	Horizontal	PK
2483.500	15.43	35.31	50.74	54.00	3.26	Horizontal	AV
2500.000	17.06	35.28	52.34	74.00	21.66	Horizontal	PK
2500.000	14.48	35.28	49.76	54.00	4.24	Horizontal	AV
Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector

Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
2483.500	16.00	35.31	51.31	74.00	22.69	Vertical	PK
2483.500	14.51	35.31	49.82	54.00	4.18	Vertical	AV
2500.000	16.58	35.28	51.86	74.00	22.14	Vertical	PK
2500.000	15.02	35.28	50.30	54.00	3.70	Vertical	AV

Report No.: CHTEW19100085 Page: 26 of 51 Issued: 2019-10-16

802.11g				CH01			
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
2310.000	17.30	35.78	53.08	74.00	20.92	Vertical	PK
2310.000	14.35	35.78	50.13	54.00	3.87	Vertical	AV
2390.000	16.38	35.50	51.88	74.00	22.12	Vertical	PK
2390.000	13.42	35.50	48.92	54.00	5.08	Vertical	AV
Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
2310.000	18.03	35.78	53.81	74.00	20.19	Horizontal	PK
2310.000	15.16	35.78	50.94	54.00	3.06	Horizontal	AV
2390.000	16.61	35.50	52.11	74.00	21.89	Horizontal	PK
2390.000	13.58	35.50	49.08	54.00	4.92	Horizontal	AV

2310.000	15.16	35.78	50.94	54.00	3.06	Horizontal	AV		
2390.000	16.61	35.50	52.11	74.00	21.89	Horizontal	PK		
2390.000	13.58	35.50	49.08	54.00	4.92	Horizontal	AV		
802.11g	802.11g				CH11				
Freq.	Reading	Factor	Level	Limit	Margin	Polarity	Detector		
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]				
2483.500	15.52	35.31	50.83	74.00	23.17	Vertical	PK		
2483.500	14.92	35.31	50.23	54.00	3.77	Vertical	AV		
2500.000	17.16	35.28	52.44	74.00	21.56	Vertical	PK		
2500.000	15.76	35.28	51.04	54.00	2.96	Vertical	AV		
Freq.	Reading	Factor	Level	Limit	Margin	Polarity	Detector		
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]				
2483.500	16.38	35.31	51.69	74.00	22.31	Horizontal	PK		
2483.500	15.04	35.31	50.35	54.00	3.65	Horizontal	AV		
2500.000	16.31	35.28	51.59	74.00	22.41	Horizontal	PK		
2500.000	15.57	35.28	50.85	54.00	3.15	Horizontal	AV		

Report No.: CHTEW19100085 Page: 27 of 51 Issued: 2019-10-16

802.11n(HT20)				CH01			
Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
2310.000	17.26	35.78	53.04	74.00	20.96	Horizontal	PK
2310.000	14.85	35.78	50.63	54.00	3.37	Horizontal	AV
2390.000	16.52	35.50	52.02	74.00	21.98	Horizontal	PK
2390.000	12.93	35.50	48.43	54.00	5.57	Horizontal	AV
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
2310.000	14.63	35.78	50.41	54.00	3.59	Vertical	AV
2310.000	17.15	35.78	52.93	74.00	21.07	Vertical	PK
2390.000	13.55	35.50	49.05	54.00	4.95	Vertical	AV
2390.000	16.83	35.50	52.33	74.00	21.67	Vertical	PK

802.11n(HT	802.11n(HT20)				CH11			
Freq.	Reading	Factor	Level	Limit	Margin	Delevite	Detector	
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	Polarity	Detector	
2483.500	16.16	35.31	51.47	74.00	22.53	Horizontal	PK	
2483.500	14.75	35.31	50.06	54.00	3.94	Horizontal	AV	
2500.000	16.69	35.28	51.97	74.00	22.03	Horizontal	PK	
2500.000	14.97	35.28	50.25	54.00	3.75	Horizontal	AV	
Freq.	Reading	Factor	Level	Limit	Margin	Polarity	Detector	
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]			
2483.500	15.65	35.31	50.96	74.00	23.04	Vertical	PK	
2483.500	14.22	35.31	49.53	54.00	4.47	Vertical	AV	
2500.000	17.19	35.28	52.47	74.00	21.53	Vertical	PK	
2500.000	16.18	35.28	51.46	54.00	2.54	Vertical	AV	

Report No.: CHTEW19100085 Page: 28 of 51 Issued: 2019-10-16


5.7. Band edge and Spurious Emissions (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

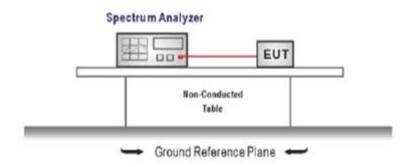

TEST PROCEDURE

- 1. Connect the antenna port(s) to the spectrum analyzer input.
- 2. Establish a reference level by using the following procedure Center frequency=DTS channel center frequency

The span = 1.5 times the DTS bandwidth.

RBW = 100 kHz, VBW ≥ 3 x RBW

Detector = peak, Sweep time = auto couple, Trace mode = max hold

Allow trace to fully stabilize

Use the peak marker function to determine the maximum PSD level

Note: the channel found to contain the maximum PSD level can be used to establish the reference level.

3. Emission level measurement

Set the center frequency and span to encompass frequency range to be measured

RBW = 100 kHz, VBW ≥ 3 x RBW

Detector = peak, Sweep time = auto couple, Trace mode = max hold

Allow trace to fully stabilize

Use the peak marker function to determine the maximum amplitude level.


- 4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
- 5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS


 Report No.: CHTEW19100085 Page: 29 of 51 Issued: 2019-10-16

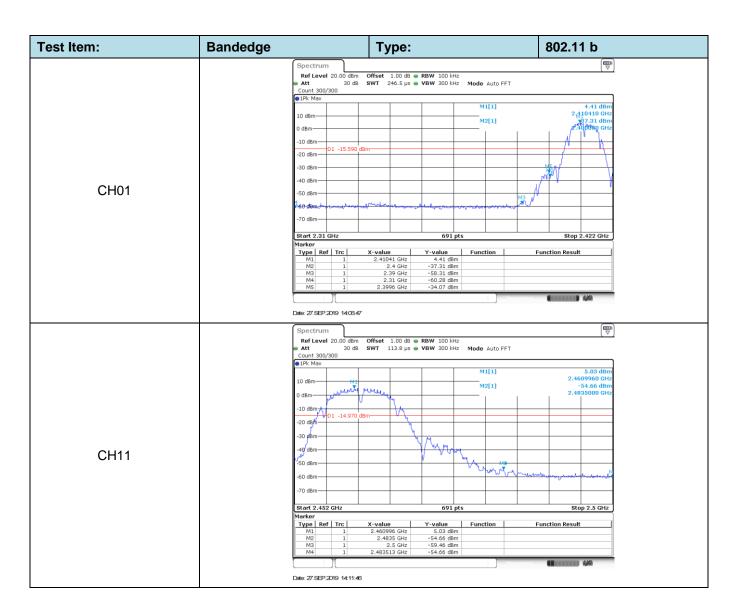


Report No.: CHTEW19100085 Page: 30 of 51 Issued: 2019-10-16

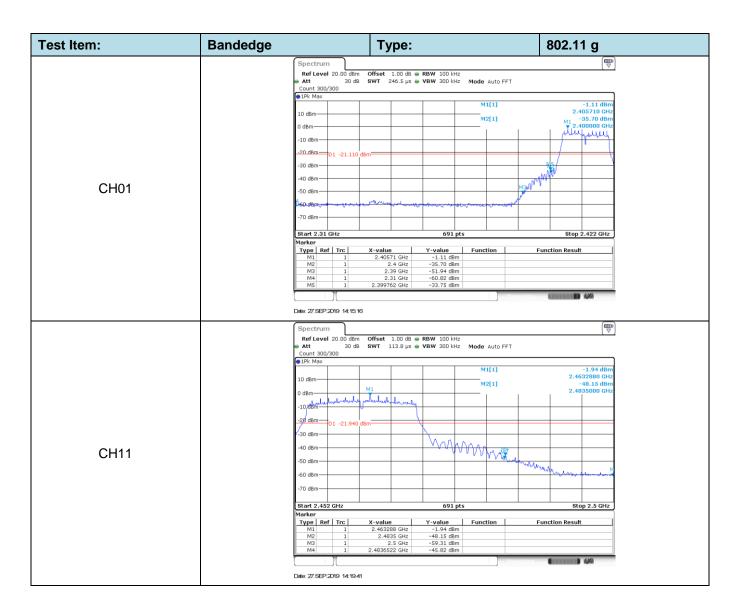


Report No.: CHTEW19100085 Page: 31 of 51 Issued: 2019-10-16

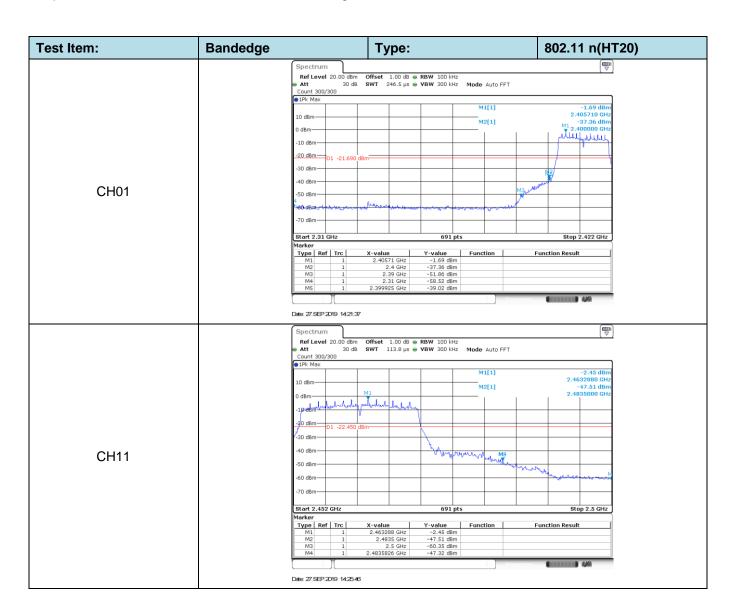


Report No.: CHTEW19100085 Page: 32 of 51 Issued: 2019-10-16

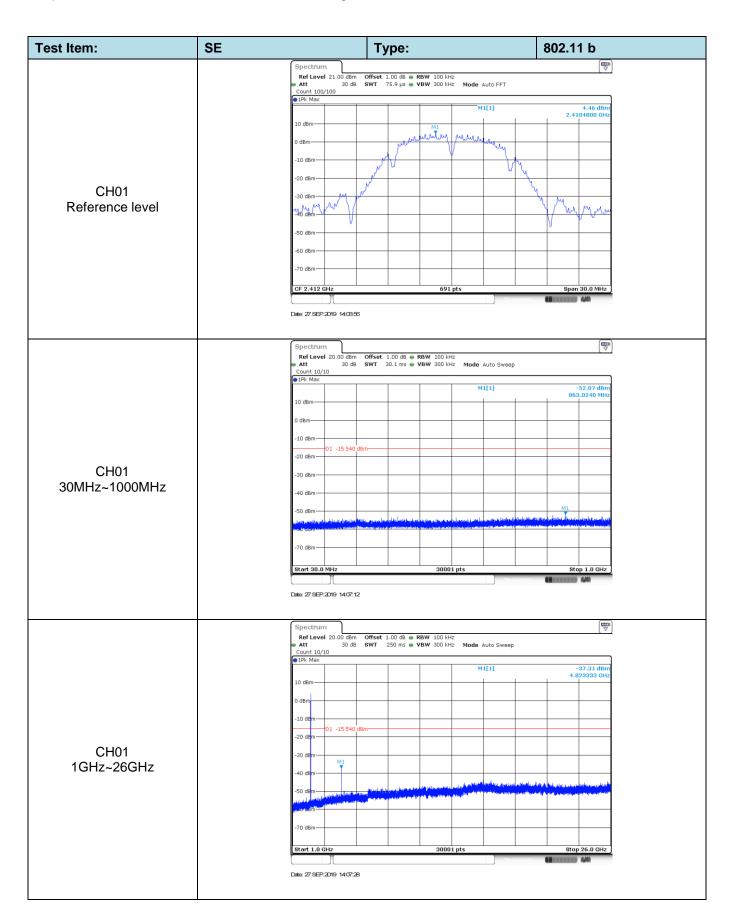


Report No.: CHTEW19100085 Page: 33 of 51 Issued: 2019-10-16

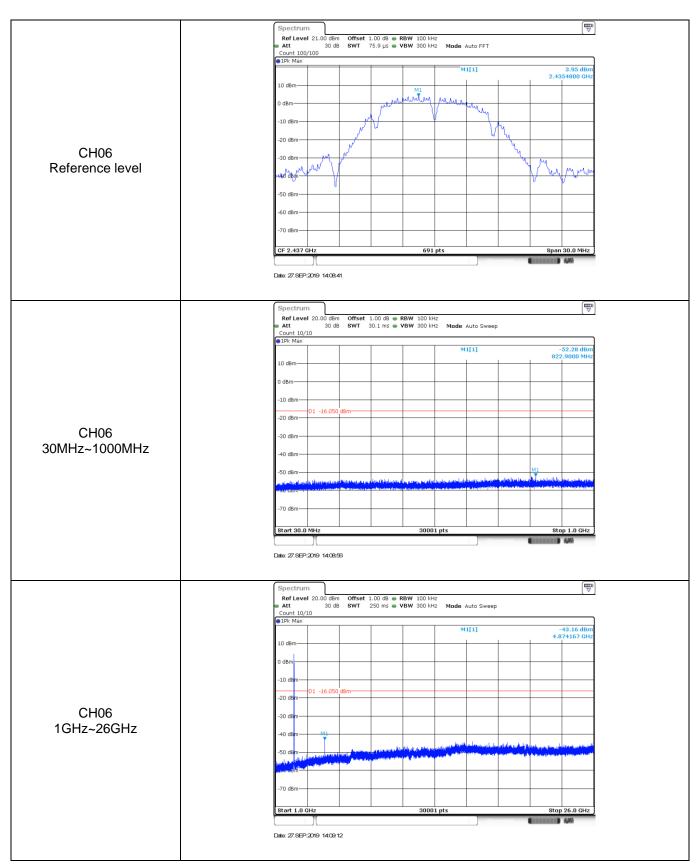


Report No.: CHTEW19100085 Page: 34 of 51 Issued: 2019-10-16

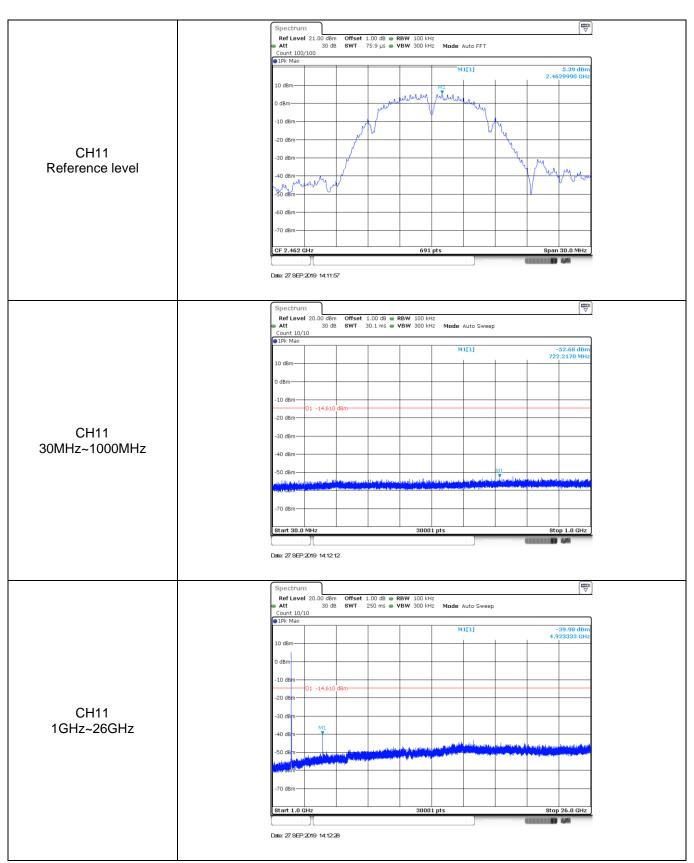


Report No.: CHTEW19100085 Page: 35 of 51 Issued: 2019-10-16

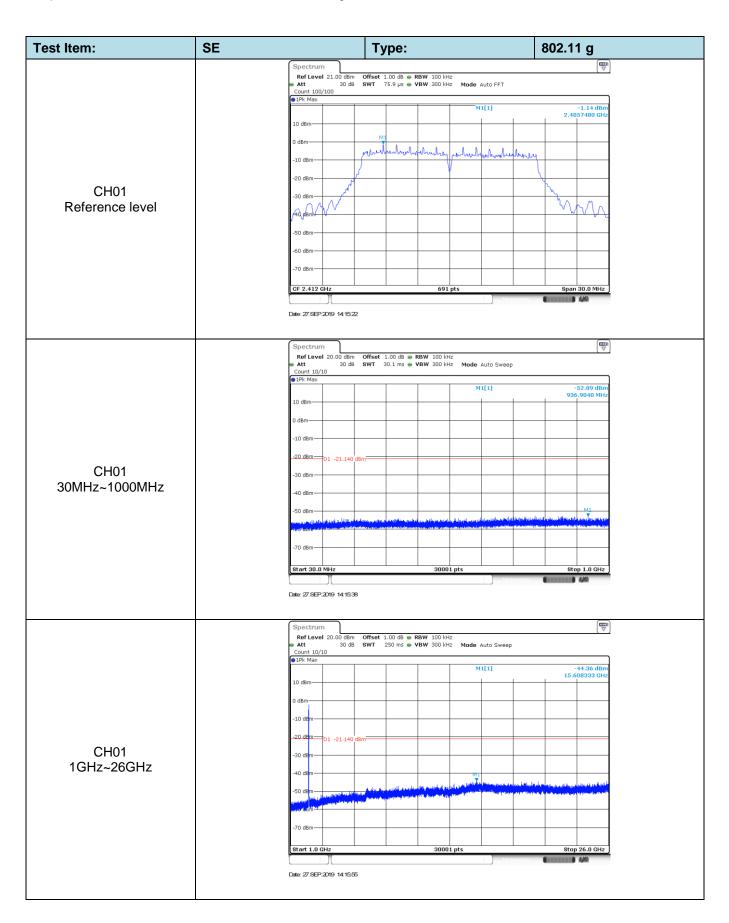


Report No.: CHTEW19100085 Page: 36 of 51 Issued: 2019-10-16

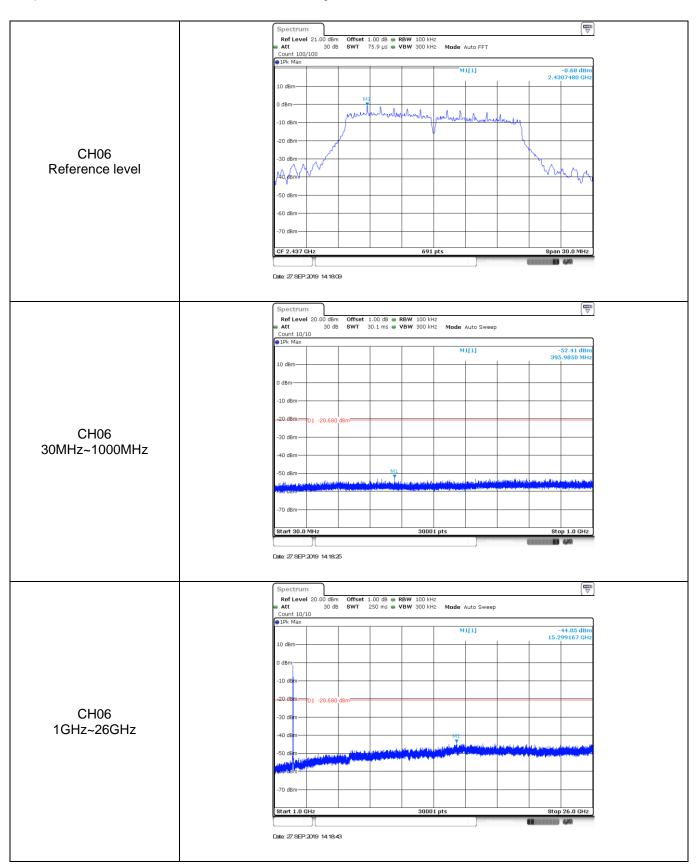


Report No.: CHTEW19100085 Page: 37 of 51 Issued: 2019-10-16

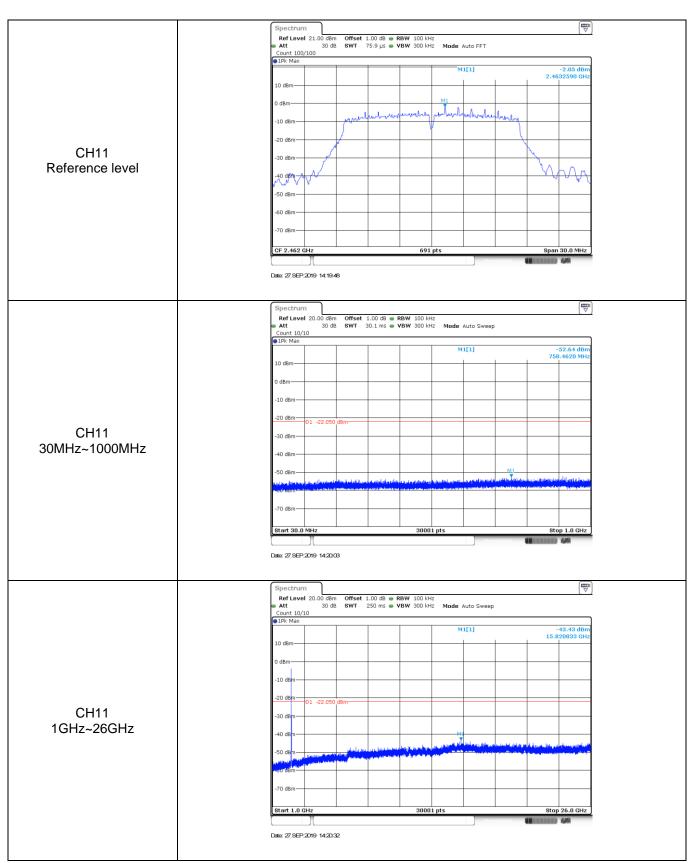


Report No.: CHTEW19100085 Page: 38 of 51 Issued: 2019-10-16

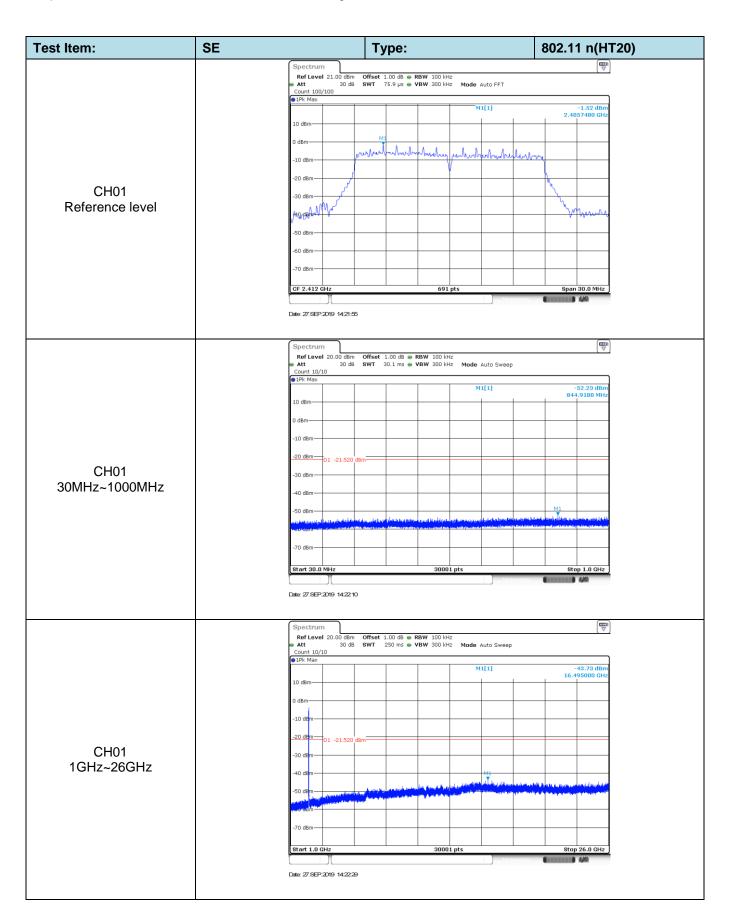

Report No.: CHTEW19100085 Page: 39 of 51 Issued: 2019-10-16

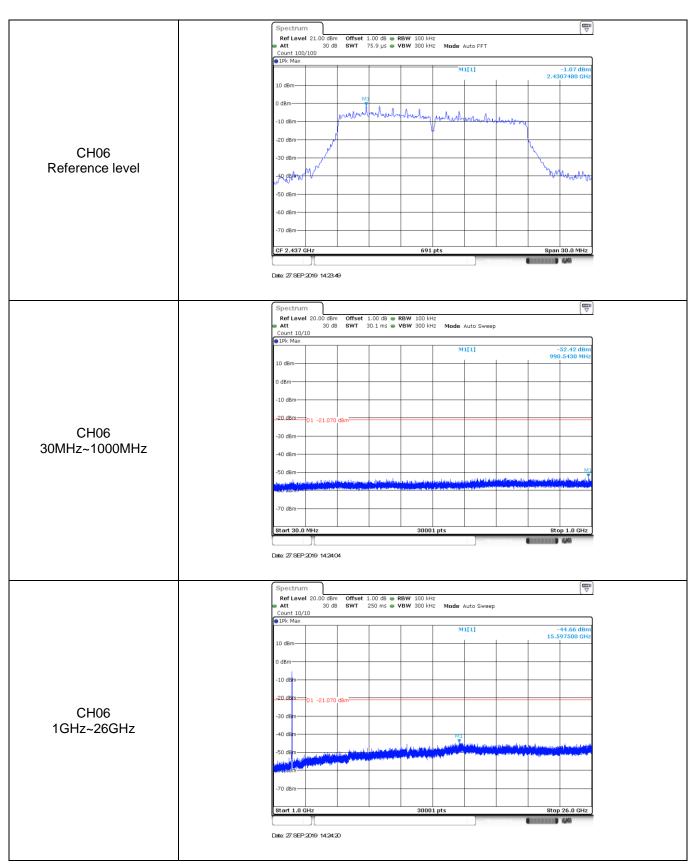

Report No.: CHTEW19100085 Page: 40 of 51 Issued: 2019-10-16

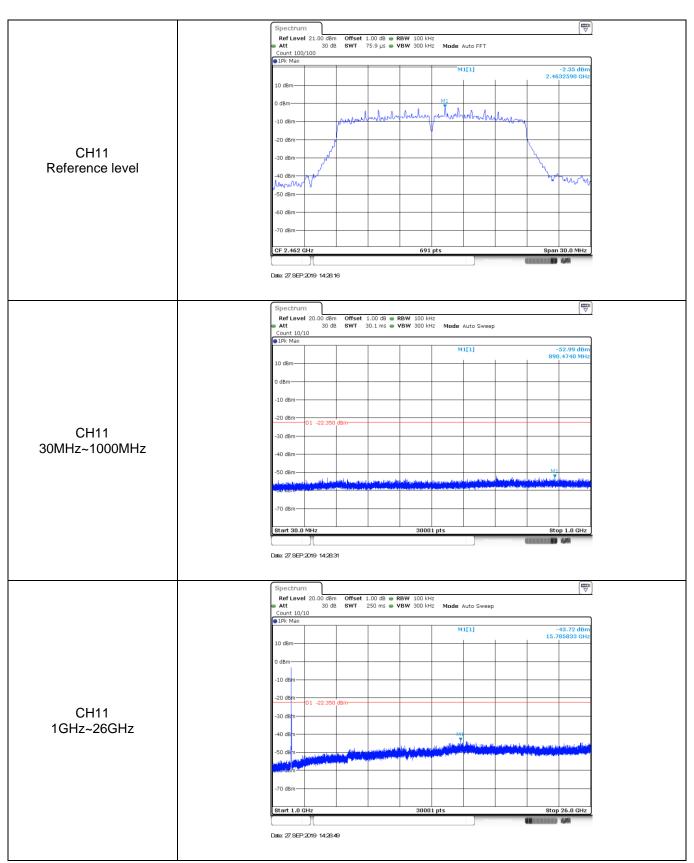

Report No.: CHTEW19100085 Page: 41 of 51 Issued: 2019-10-16

5.8. Spurious Emissions (radiated)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
Above Toriz	74.00	Peak

TEST CONFIGURATION


➤ 9kHz ~30MHz

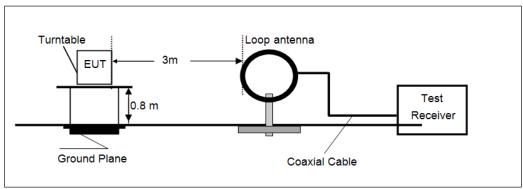

> 30MHz ~ 1GHz

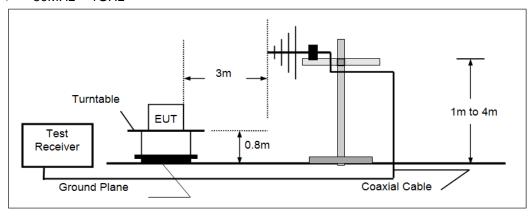

Above 1GHz

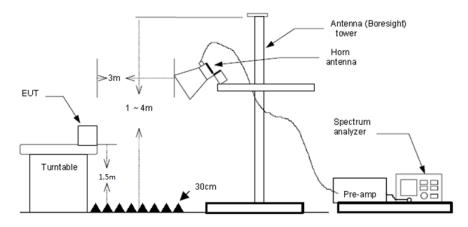

Report No.: CHTEW19100085 Page: 42 of 51 Issued: 2019-10-16

TEST PROCEDURE

- The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
- 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- 5. Set to the maximum power setting and enable the EUT transmit continuously.
- 6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(3) From 1 GHz to 10th harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

t Applicable
t

Note:

- 1) Final Level =Receiver Read level + Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.

➢ 9kHz ~ 30MHz

The EUT was pre-scanned the frequency band (9kHz~30MHz), found the radiated level lower than the limit, so don't show on the report.


➤ 30MHz ~1000MHz

Have pre-scan all modulation mode, found the 802.11b mode CH01 which it was worst case, so only the worst case's data on the test report.

Report No.: CHTEW19100085 Page: 43 of 51 Issued: 2019-10-16

30MHz ~ 1GHz

ization:		Vert	ical					
Level [dBµV/m]								
80								
70	- 	++		i			ii	- +
60		_				1	<u> </u>	
50						<u></u>	<u> </u>	
40					-	<u>-</u>	ii	-
30 +	_ i _ i _ i	+					i i X	Manufacture
	, , , ,	i i i		i	~~~~	wx www	manufaman	
20	- +		~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	~=~ <u>~</u> ~*	~~		†	- +
1 4 4	1 1 1	1 1 1				<u>+</u>	ļļ	
10				1		1	1 1	
		1 1 1		1				
	50M 60M 70N	vI 100		200 Frequency [Ha		300M 4	00M 500M 6	00M 800M 1G
0 30M 40M 5		М 100		200 Frequency [Hz		300M 4	00M 500M 6	800M 1G
0 30M 40M 5	50M 60M 70M	vi 100				300M 4	00M 500M 6	000M 800M 1G
0 30M 40M 5	256130_red		F	requency [Hz		300M 4	00M 500M 6	00M 800M 1G
0 30M 40M 5	256130_red		F			300M 4	00M 500M 6	00M 800M 1G
0 30M 40M 5 x x x MES GM1909 MEASUREMENT 9/26/2019 12	256130_red **RESULT:* :06AM	"GM19	0925613	requency [Hz	z]			
0 30M 40M 5 x x x MES GM1909 MEASUREMENT 9/26/2019 12 Frequency	256130_red **RESULT: :06AM Level	"GM19	0925613	requency [Hz 30_red" Margin		Height	Azimuth	
0 30M 40M 5 x x x MES GM1909 MEASUREMENT 9/26/2019 12	256130_red **RESULT:* :06AM	"GM19	0925613	requency [Hz	z]			
0 30M 40M 5 x x x MES GM1909 MEASUREMENT 9/26/2019 12 Frequency	256130_red **RESULT: :06AM Level	"GM19	0925613 Limit dBµV/m	Requency [Harmonic Harmonic Ha	Det.	Height	Azimuth	
30M 40M 5 x x x MES GM1909 MEASUREMENT 9/26/2019 12 Frequency MHz	256130_red **RESULT: :06AM Level dBμV/m	"GM19 Transd dB	0925613	requency [Hz 30_red" Margin	z]	Height cm	Azimuth deg	Polarization
0 30M 40M 5 x x x MES GM1909 MEASUREMENT 9/26/2019 12 Frequency MHz 31.940000	256130_red **RESULT: :06AM	"GM19 Transd dB -8.7	0925613 Limit dBμV/m 40.0	Requency [Harden Harden Ha	Det.	Height cm	Azimuth deg	Polarization VERTICAL
0 30M 40M 5 x x x MES GM1909 MEASUREMENT 9/26/2019 12 Frequency MHz 31.940000 59.100000	256130_red " RESULT: :06AM Level dBµV/m 28.90 23.70	"GM19 Transd dB -8.7 -5.1	0925613 Limit dBμV/m 40.0 40.0	Margin dB 11.1 16.3	Det. QP QP	Height cm 100.0 100.0	Azimuth deg 360.00 36.00	Polarization VERTICAL VERTICAL
0 30M 40M 5 x x x MES GM1909 MEASUREMENT 9/26/2019 12 Frequency MHz 31.940000 59.100000 97.900000	256130_red **RESULT: :06AM Level dBµV/m 28.90 23.70 21.50	"GM19 Transd dB -8.7 -5.1 -6.4	0925613 Limit dBμV/m 40.0 40.0 43.5	Margin dB 11.1 16.3 22.0	Det. QP QP QP QP	Height cm 100.0 100.0 100.0	Azimuth deg 360.00 36.00 119.00	Polarization VERTICAL VERTICAL VERTICAL

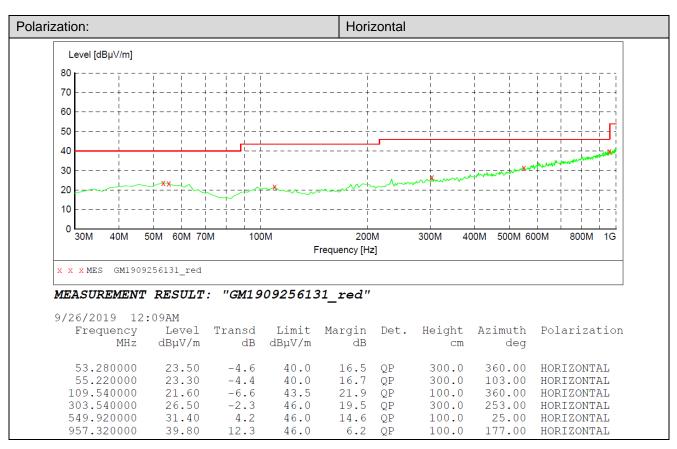

Report No.: CHTEW19100085 Page: 44 of 51 Issued: 2019-10-16

> 1 GHz ~ 25 GHz

802.11b				CH01			
Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
3172.281	34.48	0.70	35.18	74.00	38.82	Vertical	PK
4206.281	31.75	3.82	35.57	74.00	38.43	Vertical	PK
4823.156	41.26	7.08	48.34	54.00	5.66	Vertical	AV
4823.156	46.70	7.08	53.78	74.00	20.22	Vertical	PK
6513.687	30.02	12.61	42.63	74.00	31.37	Vertical	PK

Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
1541.968	33.25	-5.90	27.35	74.00	46.65	Horizontal	PK
4172.500	31.67	3.66	35.33	74.00	38.67	Horizontal	PK
4823.156	37.45	7.08	44.53	54.00	9.47	Horizontal	AV
4823.156	43.68	7.08	50.76	74.00	23.24	Horizontal	PK
7234.843	32.88	15.01	47.89	74.00	26.11	Horizontal	PK

802.11b CH06

Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
2840.343	32.64	1.43	34.07	74.00	39.93	Horizontal	PK
3564.437	33.35	1.31	34.66	74.00	39.34	Horizontal	PK
4874.562	35.49	7.15	42.64	54.00	11.36	Horizontal	AV
4874.562	41.63	7.15	48.78	74.00	25.22	Horizontal	PK
7309.750	32.32	15.08	47.40	74.00	26.60	Horizontal	PK

Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
1581.625	33.59	-6.16	27.43	74.00	46.57	Vertical	PK
3709.843	32.70	1.63	34.33	74.00	39.67	Vertical	PK
4873.093	44.27	7.15	51.42	74.00	22.58	Vertical	PK
4874.562	37.69	7.15	44.84	54.00	9.16	Vertical	AV
7312.687	30.49	15.09	45.58	74.00	28.42	Vertical	PK

Report No.: CHTEW19100085 Page: 45 of 51 Issued: 2019-10-16

802.11b				CH11				
Freq.	Reading	Factor	Level	Limit	Margin	Dalasita	Datasta	
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	Polarity	Detector	
1076.375	35.83	-7.06	28.77	74.00	45.23	Vertical	PK	
3614.375	33.01	1.47	34.48	74.00	39.52	Vertical	PK	
4924.500	44.44	7.34	51.78	74.00	22.22	Vertical	PK	
4924.500	40.37	7.34	47.71	54.00	6.29	Vertical	AV	
7384.656	30.92	15.32	46.24	74.00	27.76	Vertical	PK	
Freq.	Reading	Factor	Level	Limit	Margin	Delevite	Detector	
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	Polarity	Detector	
1640.375	33.93	-6.21	27.72	74.00	46.28	Horizontal	PK	
3184.031	34.00	0.76	34.76	74.00	39.24	Horizontal	PK	
4924.500	39.13	7.34	46.47	54.00	7.53	Horizontal	AV	
4924.500	43.72	7.34	51.06	74.00	22.94	Horizontal	PK	
7386.125	33.07	15.33	48.40	74.00	25.60	Horizontal	PK	

Remark:

- 1. Final Level =Receiver Read level + Factor
- 2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3. The emission levels of other frequencies(test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.

Report No.: CHTEW19100085 Page: 46 of 51 Issued: 2019-10-16

802.11g				CH01			
Freq.	Reading	Factor	Level	Limit	Margin	5.1."	5
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	Polarity	Detector
1749.062	34.71	-5.95	28.76	74.00	45.24	Horizontal	PK
3197.250	34.02	0.83	34.85	74.00	39.15	Horizontal	PK
4823.156	39.64	7.08	46.72	74.00	27.28	Horizontal	PK
4824.625	30.48	7.08	37.56	54.00	16.44	Horizontal	AV
7230.437	35.16	15.01	50.17	74.00	23.83	Horizontal	PK
Freq.	Reading	Factor	Level	Limit	Margin		
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	Polarity	Detector
1791.656	34.46	-5.83	28.63	74.00	45.37	Vertical	PK
3126.750	33.41	0.46	33.87	74.00	40.13	Vertical	PK
4823.156	42.09	7.08	49.17	74.00	24.83	Vertical	PK
4827.562	32.77	7.09	39.86	54.00	14.14	Vertical	AV
7239.250	32.34	15.01	47.35	74.00	26.65	Vertical	PK
802.11g				CH06			
Freq.	Reading	Factor	Level	Limit	Margin		
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	Polarity	Detector
1712.343	34.65	-6.06	28.59	74.00	45.41	Vertical	PK
3115.000	34.36	0.40	34.76	74.00	39.24	Vertical	PK
4873.093	42.29	7.15	49.44	74.00	24.56	Vertical	PK
4873.093	31.19	7.15	38.34	54.00	15.66	Vertical	AV
7506.562	30.48	15.44	45.92	74.00	28.08	Vertical	PK
Freq.	Reading	Factor	Level	Limit	Margin		
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	Polarity	Detector
1659.468	34.88	-6.17	28.71	74.00	45.29	Horizontal	PK
3248.656	34.65	0.26	34.91	74.00	39.09	Horizontal	PK
4874.562	28.52	7.15	35.67	54.00	18.33	Horizontal	AV
4880.437	38.47	7.15	45.62	74.00	28.38	Horizontal	PK

7311.218

32.70

15.09

47.79

74.00

26.21

Horizontal

 PK

Report No.: CHTEW19100085 Page: 47 of 51 Issued: 2019-10-16

802.11g				CH11			
Freq.	Reading	Factor	Level	Limit	Margin	Delevite	Datastan
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	Polarity	Detector
1666.812	34.61	-6.16	28.45	74.00	45.55	Horizontal	PK
3194.312	34.68	0.81	35.49	74.00	38.51	Horizontal	PK
4924.500	29.77	7.34	37.11	54.00	16.89	Horizontal	AV
4925.968	38.48	7.35	45.83	74.00	28.17	Horizontal	PK
7387.593	35.47	15.33	50.80	74.00	23.20	Horizontal	PK
Freq.	Reading	Factor	Level	Limit	Margin		

Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
1678.562	34.10	-6.14	27.96	74.00	46.04	Vertical	PK
2465.812	50.07	-2.21	47.86	74.00	26.14	Vertical	PK
4920.093	41.78	7.31	49.09	74.00	24.91	Vertical	PK
4924.500	31.25	7.34	38.59	54.00	15.41	Vertical	AV
7393.468	31.49	15.35	46.84	74.00	27.16	Vertical	PK

Remark:

- 1. Final Level =Receiver Read level + Factor
- 2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3. The emission levels of other frequencies(test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.

Report No.: CHTEW19100085 Page: 48 of 51 Issued: 2019-10-16

802.11n(HT	20)			CH01			
Freq.	Reading	Factor	Level	Limit	Margin		
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	Polarity	Detector
1677.093	34.11	-6.14	27.97	74.00	46.03	Vertical	PK
3147.312	34.40	0.57	34.97	74.00	39.03	Vertical	PK
4823.156	41.91	7.08	48.99	74.00	25.01	Vertical	PK
4823.156	31.80	7.08	38.88	54.00	15.12	Vertical	AV
7239.250	31.19	15.01	46.20	74.00	27.80	Vertical	PK
Freq.	Reading	Factor	Level	Limit	Margin	Delevity	Datastan
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	Polarity	Detector
1741.718	34.27	-5.97	28.30	74.00	45.70	Horizontal	PK
3225.156	33.98	0.54	34.52	74.00	39.48	Horizontal	PK
4823.156	27.35	7.08	34.43	54.00	19.57	Horizontal	AV
4833.437	39.81	7.09	46.90	74.00	27.10	Horizontal	PK
7236.312	36.00	15.01	51.01	74.00	22.99	Horizontal	PK
802.11n(HT	20)			CH06			
Freq.	Reading	Factor	Level	Limit	Margin		
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	Polarity	Detector
1650.656	35.44	-6.19	29.25	74.00	44.75	Horizontal	PK
3191.375	33.62	0.80	34.42	74.00	39.58	Horizontal	PK
4874.562	38.83	7.15	45.98	74.00	28.02	Horizontal	PK
4874.562	28.87	7.15	36.02	54.00	17.98	Horizontal	AV
7315.625	32.81	15.10	47.91	74.00	26.09	Horizontal	PK
Freq.	Reading	Factor	Level	Limit	Margin		
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	Polarity	Detector
1769.625	33.96	-5.89	28.07	74.00	45.93	Vertical	PK
3184.031	33.35	0.76	34.11	74.00	39.89	Vertical	PK
4873.093	39.76	7.15	46.91	74.00	27.09	Vertical	PK
4873.093	29.96	7.15	37.11	54.00	16.89	Vertical	AV
7299.468	29.96	15.05	45.01	74.00	28.99	Vertical	PK

Report No.: CHTEW19100085 Page: 49 of 51 Issued: 2019-10-16

802.11n(HT	20)			CH11			
Freq.	Reading	Factor	Level	Limit	Margin	Polarity	Detector
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]		
1719.687	34.53	-6.04	28.49	74.00	45.51	Vertical	PK
3132.625	34.10	0.49	34.59	74.00	39.41	Vertical	PK
4924.500	31.60	7.34	38.94	54.00	15.06	Vertical	AV
4925.968	40.28	7.35	47.63	74.00	26.37	Vertical	PK
7377.312	30.84	15.30	46.14	74.00	27.86	Vertical	PK
Freq.	Reading	Factor	Level	Limit	Margin	Polarity	Detector
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]		
1682.968	34.54	-6.13	28.41	74.00	45.59	Horizontal	PK
3123.812	33.90	0.44	34.34	74.00	39.66	Horizontal	PK
4920.093	40.26	7.31	47.57	74.00	26.43	Horizontal	PK
4924.500	28.95	7.34	36.29	54.00	17.71	Horizontal	AV
7387.593	34.24	15.33	49.57	74.00	24.43	Horizontal	PK

Remark:

- 1. Final Level =Receiver Read level + Factor
- 2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3. The emission levels of other frequencies(test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.

Report No.: CHTEW19100085 Page: 50 of 51 Issued: 2019-10-16


6. TEST SETUP PHOTOS

Conducted Emissions (AC Mains)



Radiated Emissions



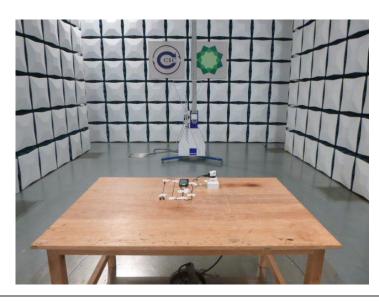

Report No.: CHTEW19100085 Page: 51 of 51 Issued: 2019-10-16



7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No. CHTEW19100080

-----End of Report-----