

FCC Test Report

Report No.: RFCCOG-WTW-P22060454

FCC ID: 2AH7L-UPSB

Test Model: PAS600L

Series Model: PAS600T, PAS600

Received Date: Jun. 15, 2022

Test Date: Sep. 08, 2022

Issued Date: Oct. 28, 2022

Applicant: Schneider Electric Industries SAS

Address: Electropole Site - 38EQ1, 31 rue Pierre Mendes France, Eybens - 38050
Grenoble cedex 9

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

FCC Registration /
Designation Number: 788550 / TW0003



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

| | |
|---|-----------|
| Release Control Record | 4 |
| 1 Certificate of Conformity | 5 |
| 2 Summary of Test Results | 6 |
| 2.1 Modification Record | 6 |
| 3 General Information | 7 |
| 3.1 General Description of EUT | 7 |
| 3.2 Description of Test Modes | 8 |
| 3.2.1 Test Mode Applicability and Tested Channel Detail | 9 |
| 3.3 Duty Cycle of Test Signal | 9 |
| 3.4 Description of Support Units | 10 |
| 3.4.1 Configuration of System under Test | 10 |
| 3.5 General Description of Applied Standards and References | 10 |
| 4 Test Types and Results | 11 |
| 4.1 6 dB Bandwidth Measurement | 11 |
| 4.1.1 Limits of 6 dB Bandwidth Measurement | 11 |
| 4.1.2 Test Setup | 11 |
| 4.1.3 Test Instruments | 11 |
| 4.1.4 Test Procedure | 11 |
| 4.1.5 Deviation from Test Standard | 11 |
| 4.1.6 EUT Operating Conditions | 11 |
| 4.1.7 Test Results | 12 |
| 4.2 Occupied Bandwidth Measurement | 13 |
| 4.2.1 Test Setup | 13 |
| 4.2.2 Test Instruments | 13 |
| 4.2.3 Test Procedure | 13 |
| 4.2.4 Deviation from Test Standard | 13 |
| 4.2.5 EUT Operating Conditions | 13 |
| 4.2.6 Test Results | 14 |
| 4.3 Conducted Output Power Measurement | 15 |
| 4.3.1 Limits of Conducted Output Power Measurement | 15 |
| 4.3.2 Test Setup | 15 |
| 4.3.3 Test Instruments | 15 |
| 4.3.4 Test Procedures | 15 |
| 4.3.5 Deviation from Test Standard | 15 |
| 4.3.6 EUT Operating Conditions | 15 |
| 4.3.7 Test Results | 15 |
| 4.4 Power Spectral Density Measurement | 16 |
| 4.4.1 Limits of Power Spectral Density Measurement | 16 |
| 4.4.2 Test Setup | 16 |
| 4.4.3 Test Instruments | 16 |
| 4.4.4 Test Procedure | 16 |
| 4.4.5 Deviation from Test Standard | 16 |
| 4.4.6 EUT Operating Condition | 16 |
| 4.4.7 Test Results | 17 |
| 4.5 Conducted Out of Band Emission Measurement | 18 |
| 4.5.1 Limits of Conducted Out of Band Emission Measurement | 18 |
| 4.5.2 Test Setup | 18 |
| 4.5.3 Test Instruments | 18 |
| 4.5.4 Test Procedure | 18 |
| 4.5.5 Deviation from Test Standard | 18 |
| 4.5.6 EUT Operating Condition | 18 |
| 4.5.7 Test Results | 19 |

Appendix – Information of the Testing Laboratories 20

Release Control Record

| Issue No. | Description | Date Issued |
|----------------------|------------------|---------------|
| RFCCOG-WTW-P22060454 | Original Release | Oct. 28, 2022 |

1 Certificate of Conformity

Product: EcoStruxure Panel Server Universal

Brand: Schneider Electric

Test Model: PAS600L

Series Model: PAS600T, PAS600

Sample Status: Identical Prototype

Applicant: Schneider Electric Industries SAS

Test Date: Sep. 08, 2022

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :

Gina Liu

Date:

Oct. 28, 2022

Gina Liu / Specialist

Approved by :

Jeremy Lin

Date:

Oct. 28, 2022

Jeremy Lin / Project Engineer

2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart C (Section 15.247) | | | |
|--|--------------------------------|--------|--|
| FCC Clause | Test Item | Result | Remarks |
| 15.207 | AC Power Conducted Emission | N/A | Refer to Note |
| 15.205 & 209 | Radiated Emissions | N/A | Refer to Note |
| 15.247(d) | Band Edge Measurement | N/A | Refer to Note |
| 15.247(d) | Antenna Port Emission | Pass | Meet the requirement of limit. |
| 15.247(a)(2) | 6 dB Bandwidth | Pass | Meet the requirement of limit. |
| --- | Occupied Bandwidth Measurement | Pass | Reference only |
| 15.247(b) | Conducted Power | Pass | Meet the requirement of limit. |
| 15.247(e) | Power Spectral Density | Pass | Meet the requirement of limit. |
| 15.203 | Antenna Requirement | Pass | Antenna connector is RP-SMA male not a standard connector. |

Note:

1. This report is a partial report, only antenna port conducted measurement tests were verified and recorded in this report. Other testing data please refer to report no.: RFBHBQ-WTW-P21030022.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

| | |
|----------------------------|--|
| Product | EcoStruxure Panel Server Universal |
| Brand | Schneider Electric |
| Test Model | PAS600L |
| Series Model | PAS600T, PAS600 |
| Status of EUT | Identical Prototype |
| Power Supply Rating | 24Vdc for PAS600L 110-240Vac, 50-60Hz and 240Vdc for PAS600T 110-277Vac, 50-60Hz and 277Vdc for PAS600 |
| Modulation Type | GFSK |
| Transfer Rate | 1 Mbps |
| Operating Frequency | 2402 ~ 2480 MHz |
| Number of Channel | 40 |
| Output Power | 0.07762 mW |
| Antenna Type | Refer to Note as below |
| Antenna Connector | Refer to Note as below |
| Accessory Device | External antenna (Brand: Schneider Electric; Model: PASA-ANT1) |
| Data Cable Supplied | N/A |

Note:

1. This report is prepared for FCC class II permissive change. The difference compared with the original report (BV CPS report no.: RFBHBQ-WTW-P21030022) is reducing power setting and changing internal antenna gain. The output power is lowered via firmware/software settings only (and cannot be changed by end-user / any other third parties). Therefore, only antenna port conducted measurement tests were verified and recorded in this report.
2. All models are listed as below. Model: PAS600L is the representative for final test.

| Brand | Model | Difference |
|--------------------|---------|--|
| Schneider Electric | PAS600L | Power Supply Rating: 24Vdc |
| | PAS600T | (1) Power Supply Rating: 110-240Vac/dc with +/-10% tolerance (2) Without digital input |
| | PAS600 | (1) Power Supply Rating: 110 -277Vac/dc with +/-10% tolerance (2) Without digital input |

3. The antenna information is listed as below.

| Type | Ant. Type | Connector | Brand | Model | Gain (dBi) |
|----------|-----------|-----------|--------------------|-----------|------------|
| External | Dipole | RP-SMA | Schneider Electric | PASA-ANT1 | 2.54 |
| Internal | PCB | - | Schneider Electric | U31_1 | 2.14 |

4. Detail antenna specification please refer to antenna datasheet or an antenna gain measurement report.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or User's Manual.

3.2 Description of Test Modes

40 channels are provided to this EUT:

| Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 0 | 2402 | 10 | 2422 | 20 | 2442 | 30 | 2462 |
| 1 | 2404 | 11 | 2424 | 21 | 2444 | 31 | 2464 |
| 2 | 2406 | 12 | 2426 | 22 | 2446 | 32 | 2466 |
| 3 | 2408 | 13 | 2428 | 23 | 2448 | 33 | 2468 |
| 4 | 2410 | 14 | 2430 | 24 | 2450 | 34 | 2470 |
| 5 | 2412 | 15 | 2432 | 25 | 2452 | 35 | 2472 |
| 6 | 2414 | 16 | 2434 | 26 | 2454 | 36 | 2474 |
| 7 | 2416 | 17 | 2436 | 27 | 2456 | 37 | 2476 |
| 8 | 2418 | 18 | 2438 | 28 | 2458 | 38 | 2478 |
| 9 | 2420 | 19 | 2440 | 29 | 2460 | 39 | 2480 |

3.2.1 Test Mode Applicability and Tested Channel Detail

| EUT Configure Mode | Applicable To | Description |
|--------------------|---------------|------------------|
| | APCM | |
| - | √ | Internal Antenna |

Where **APCM**: Antenna Port Conducted Measurement

Note: “-” means no effect.

Note: The internal and external antenna had been pre-tested for reduced power conducted power. The worst case scenario is the internal antenna.

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.


| EUT Configure Mode | Available Channel | Tested Channel | Modulation Type | Data Rate (Mbps) |
|--------------------|-------------------|----------------|-----------------|------------------|
| - | 0 to 39 | 0, 19, 39 | GFSK | 1 |

Test Condition:

| Applicable To | Environmental Conditions | Input Power | Tested by |
|---------------|--------------------------|-------------|-----------|
| APCM | 25 deg. C, 65 % RH | 24 Vdc | Wayne Lin |

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is 100 %, duty factor is not required.

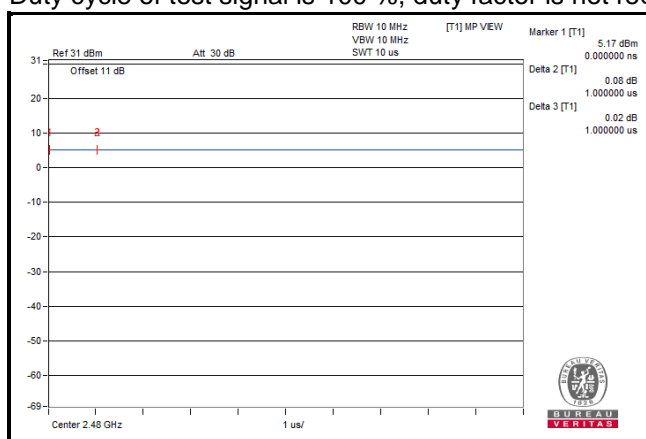

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


| ID | Product | Brand | Model No. | Serial No. | FCC ID | Remarks |
|----|-----------------|---------|-----------|------------|--------|---------|
| A. | Load | N/A | N/A | N/A | N/A | -- |
| B. | DC Power Supply | Topward | 33010D | 807748 | N/A | -- |

Note:

1. All power cords of the above support units are non-shielded (1.8m).

| ID | Cable Descriptions | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks |
|----|--------------------|------|------------|--------------------|--------------|---------|
| 1. | LAN Cable | 1 | 1.5 | N | 0 | -- |
| 2. | LAN Cable | 1 | 1.5 | N | 0 | -- |

3.4.1 Configuration of System under Test

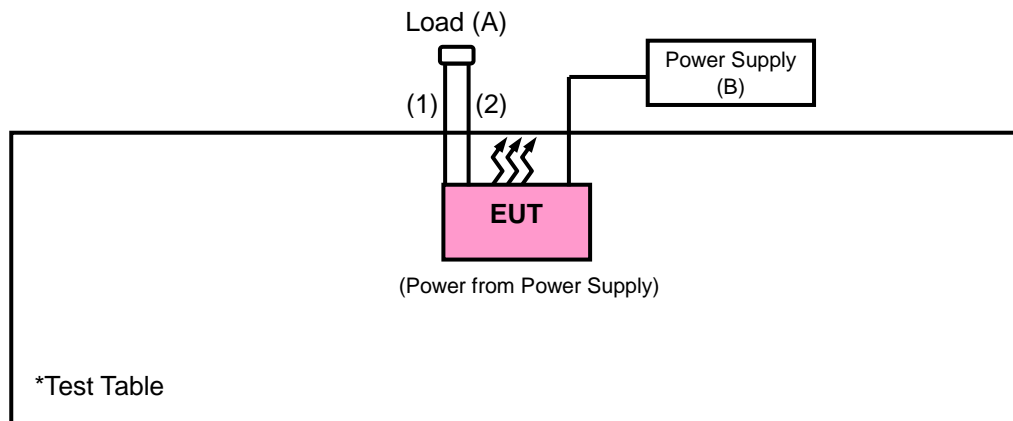

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

ANSI C63.10-2020

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

All test items have been performed as a reference to the above KDB test guidance.


4 Test Types and Results

4.1 6 dB Bandwidth Measurement

4.1.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

4.1.2 Test Setup



4.1.3 Test Instruments

| Description & Manufacturer | Model No. | Serial No. | Date Of Calibration | Due Date Of Calibration |
|--------------------------------------|-----------|------------|---------------------|-------------------------|
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100039 | Apr. 20, 2022 | Apr. 19, 2023 |
| Peak Power Analyzer KEYSIGHT | 8990B | MY51000485 | Jan. 18, 2022 | Jan. 17, 2023 |
| Wideband Power Sensor KEYSIGHT | N1923A | MY58020002 | Jan. 17, 2022 | Jan. 16, 2023 |

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Oven room.

4.1.4 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.1.5 Deviation from Test Standard


No deviation.

4.1.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.1.7 Test Results

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|----------------------|---------------------|-------------|
| 0 | 2402 | 0.71 | 0.5 | Pass |
| 19 | 2440 | 0.72 | 0.5 | Pass |
| 39 | 2480 | 0.72 | 0.5 | Pass |

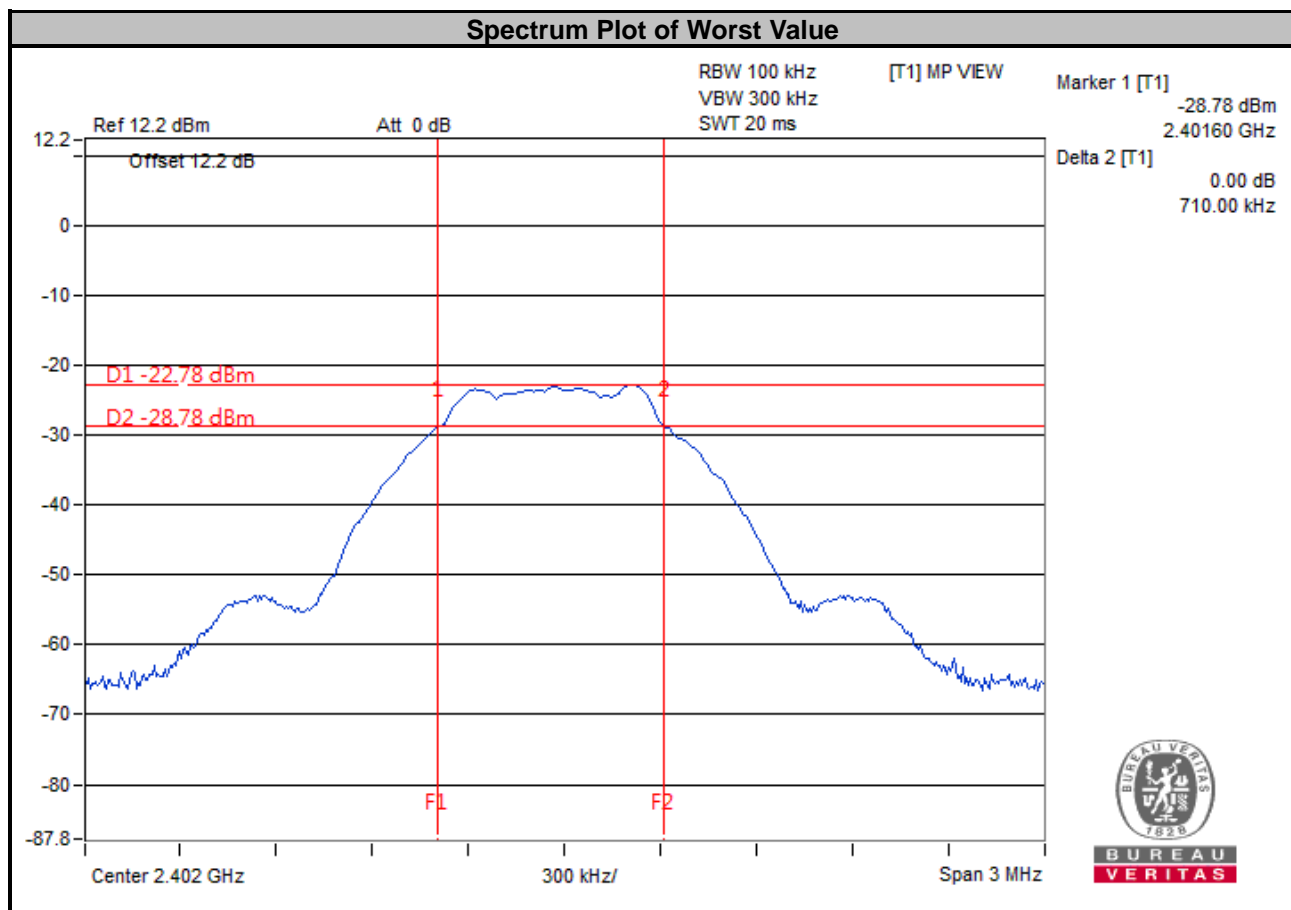

4.2 Occupied Bandwidth Measurement

4.2.1 Test Setup



4.2.2 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.2.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.2.4 Deviation from Test Standard

No deviation.


4.2.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.2.6 Test Results

Mode A

| Channel | Frequency (MHz) | Occupied Bandwidth (MHz) | Pass / Fail |
|---------|-----------------|--------------------------|-------------|
| 0 | 2402 | 1.03 | Pass |
| 19 | 2440 | 1.03 | Pass |
| 39 | 2480 | 1.03 | Pass |

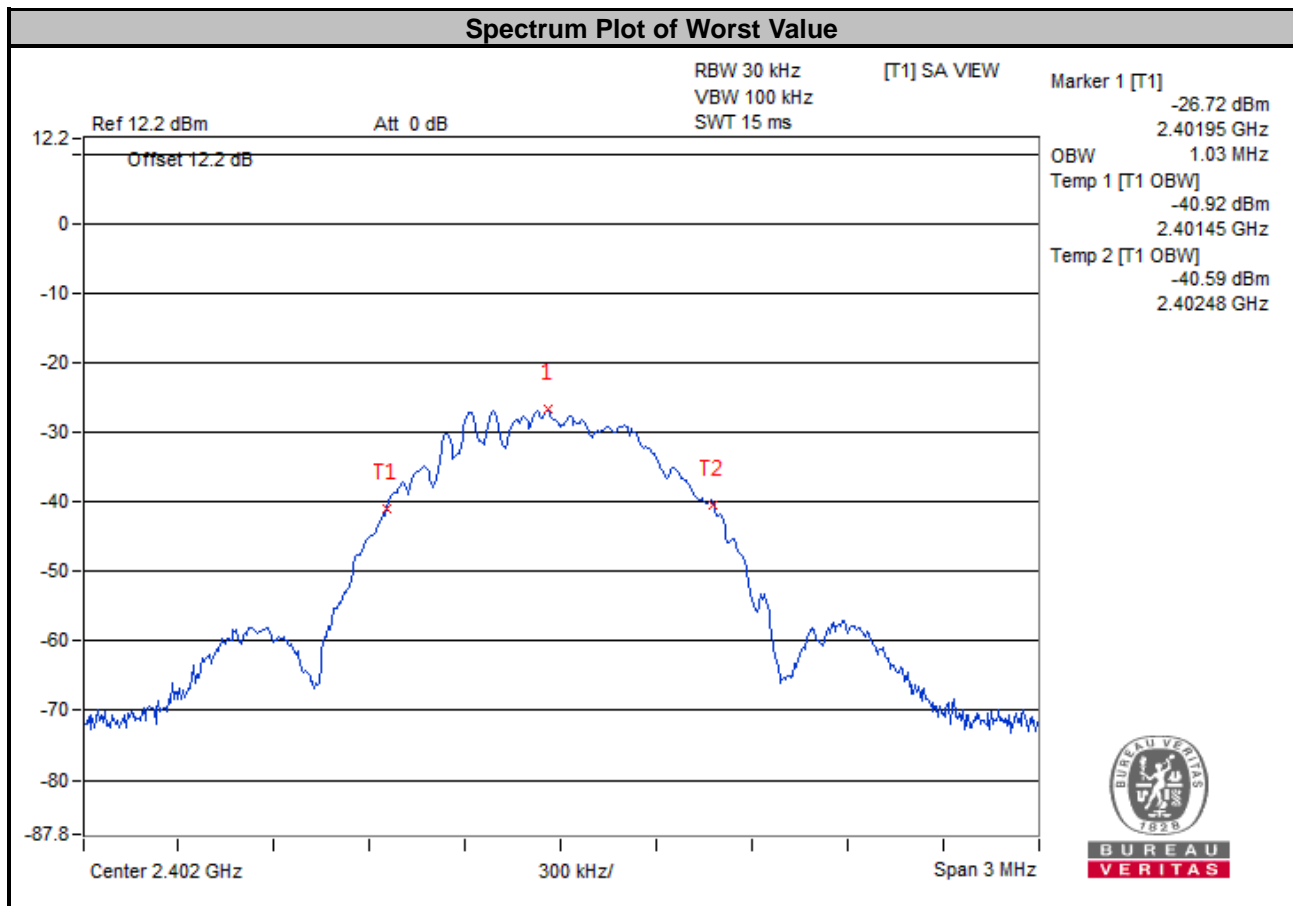


4.3 Conducted Output Power Measurement

4.3.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

4.3.2 Test Setup

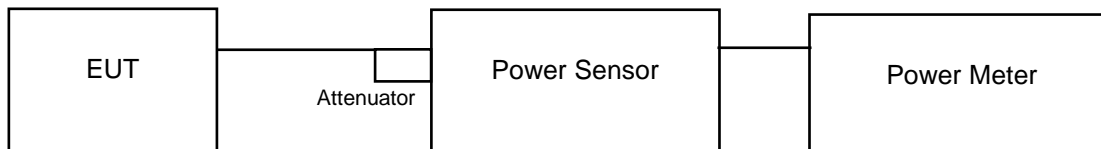

4.3.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.3.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

| Channel | Freq. (MHz) | Peak Power | | Average Power | | Power Limit (mW) | Pass / Fail |
|---------|-------------|------------|--------|---------------|--------|------------------|-------------|
| | | (mW) | (dBm) | (mW) | (dBm) | | |
| 0 | 2402 | 0.07762 | -11.10 | 0.002844 | -25.46 | 1000 | Pass |
| 19 | 2440 | 0.07464 | -11.27 | 0.002773 | -25.57 | 1000 | Pass |
| 39 | 2480 | 0.07178 | -11.44 | 0.002661 | -25.75 | 1000 | Pass |

4.4 Power Spectral Density Measurement

4.4.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.4.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.4.5 Deviation from Test Standard


No deviation.

4.4.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.7 Test Results

| Channel | Frequency (MHz) | PSD (dBm/3 kHz) | Limit (dBm/3 kHz) | Pass / Fail |
|---------|-----------------|-----------------|-------------------|-------------|
| 0 | 2402 | -38.66 | 8 | Pass |
| 19 | 2440 | -38.75 | 8 | Pass |
| 39 | 2480 | -38.96 | 8 | Pass |

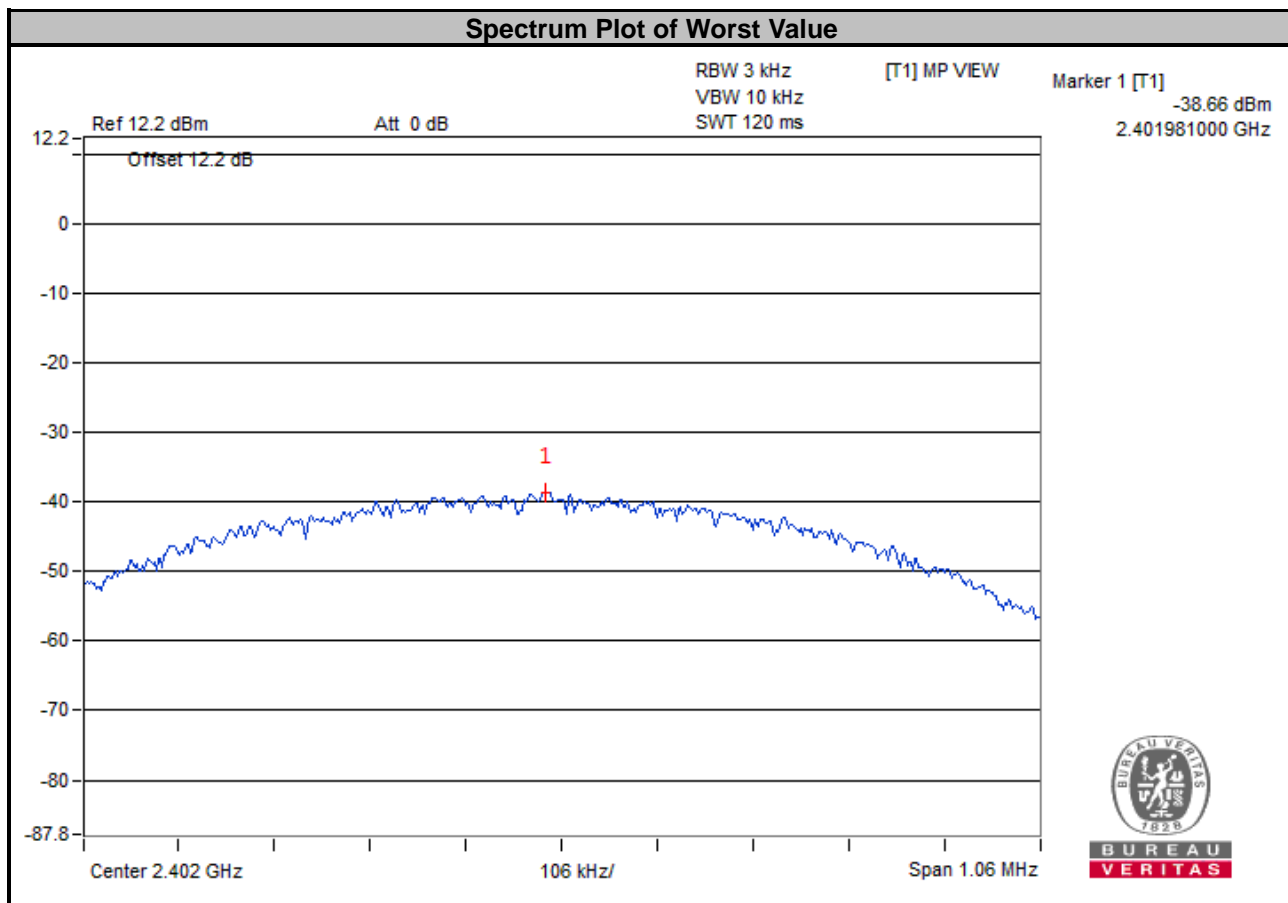


4.5 Conducted Out of Band Emission Measurement

4.5.1 Limits of Conducted Out of Band Emission Measurement

Below -20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.5.2 Test Setup

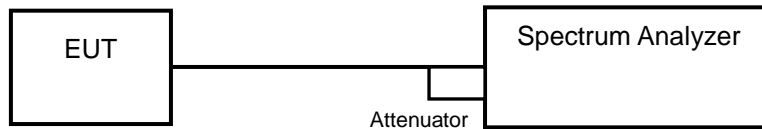

4.5.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.5.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.5.5 Deviation from Test Standard


No deviation.

4.5.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20 dB offset below D1. It shows compliance with the requirement.

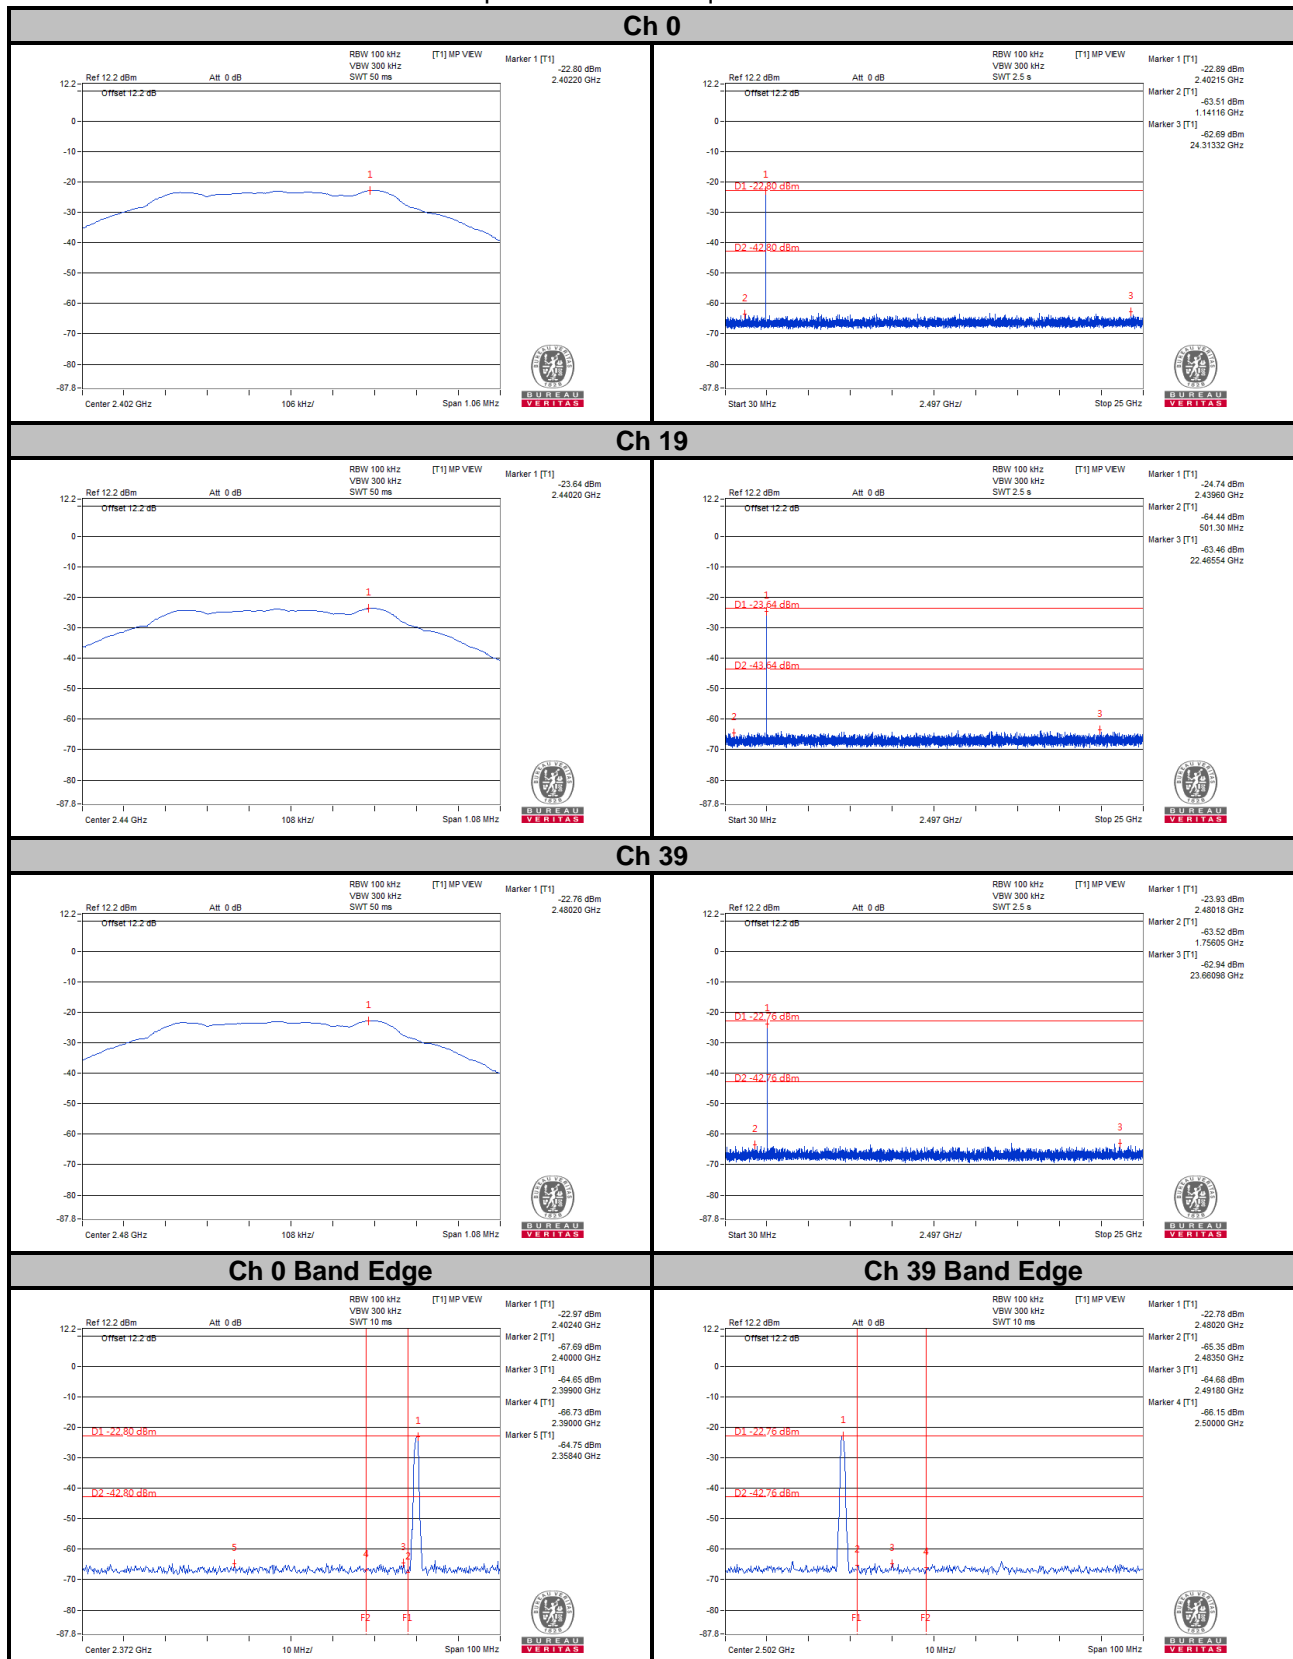

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---