

FCC Test Report

Report No.: AGC02931240301FR06

FCC ID	:	2BLTR-AND1
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	4G LTE IP Radio
BRAND NAME	:	ТҮТЕСН
MODEL NAME	:	IP-66
APPLICANT	:	Quanzhou RadioBoss Technology Co., Ltd
APPLICANT DATE OF ISSUE		Quanzhou RadioBoss Technology Co., Ltd Jan. 16, 2025
	:	







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan. 16, 2025	Valid	Initial Release



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Related Submittal(S) / Grant (S)	7
2.3 Test Methodology	7
2.4 Device Capabilities	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Emission Designator	
3. Test Environment	9
3.1 Address of The Test Laboratory	9
3.2 Test Facility	9
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	
3.5 List of Test Equipment	11
4. System Test Configuration	14
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of EUT System	
4.4 Equipment Used in Tested System	
5. Summary of Test Results	
5.1 Test Condition: Conducted Test	
5.2 Test Condition: Radiated Test	
6. Description of Test Modes	
7. Equivalent (Isotropic) Radiated Power	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup	
7.4 Measurement Result	
8. Peak-to-Average Ratio	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup	21
8.4 Measurement Result	
9. 99% Occupied Bandwidth and 26dB Emission Bandwidth	
9.1 Provisions Applicable	



9.2 Measurement Procedure	
9.3 Measurement Setup	
9.4 Measurement Result	
10. Band Edge Emissions at Antenna Terminal	
10.1 Provisions Applicable	
10.2 Measurement Procedure	
10.3 Measurement Setup	
10.4 Measurement Result	
11. Spurious Emissions at Antenna Terminal	24
11.1 Provisions Applicable	
11.2 Measurement Procedure	
11.3 Measurement Setup	24
11.4 Measurement Result	24
12. Radiated Spurious Emission	
12.1. Provisions Applicable	
12.2. Measurement Procedure	
12.3. Measurement Setup	
12.4 Measurement Result	
13. Frequency Stability / Variation of Ambient Temperature	
13.1 Provisions Applicable	
13.2 Measurement Procedure	
13.3 Measurement Setup	
13.4 Measurement Result	
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of EUT	40



1. General Information

Applicant	Quanzhou RadioBoss Technology Co., Ltd
Address	No.8, Chuangzao Road, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian
Manufacturer	Quanzhou RadioBoss Technology Co., Ltd
Address	No.8, Chuangzao Road, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian
Factory	Quanzhou RadioBoss Technology Co., Ltd
Address	No.8, Chuangzao Road, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian
Product Designation	4G LTE IP Radio
Brand Name	ТҮТЕСН
Test Model	IP-66
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Mar. 04, 2024
Date of Test	Mar. 04, 2024~Jan. 16, 2025
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-GSM&WCDMA-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Bibo zhang

Bibo Zhang (Project Engineer)

Jan. 16, 2025

Reviewed By

Calin Lin

Calvin Liu (Reviewer)


Jan. 16, 2025

Approved By

Angole Li

Angela Li (Authorized Officer)

Jan. 16, 2025





2. Product Information

2.1 Product Technical Description

Support Networks	GPRS, WCDMA, HSDPA, HSUPA					
Hardware Version	V2.0					
Software Version	PU562WAE3C_KT5508_starlight_istar two_V01_20180813					
	GPRS 850	⊠PCS1900	UMTS FDD Band II			
Support Fraguency Bond	UMTS FDD Band IV	UMTS FDD Band V	(Non-U.S. Bands)			
Support Frequency Band	□GSM 900	DCS 1800	UMTS FDD Band I			
	UMTS FDD Band VIII	(Non-U.S. Bands)				
	824.2MHz-848.8MHz (GF	PRS/EGPRS 850)	·			
	1850.2MHz-1909.8MHz (GPRS/EGPS 1900)				
Frequency Range	1852.4MHz-1907.6MHz (WCDMA Band II)				
	1712.4MHz-1752.6MHz (WCDMA Band IV)				
	826.4MHz-846.6 MHz (WCDMA Band V)					
Type of Modulation	GMSK/8PSK Modulation	For GPRS/EDGE				
	BPSK/QPSK Modulation For WCDMA/HSDPA/HSUPA					
	GPRS 850:	245KGXW				
	EGPRS 850:	PRS 850: 245KG7W				
	GPRS 1900: 244KGXW					
Emission Designator	EGPRS 1900:	246KG7W				
	WCDMA Band II:	4M20F9W				
	WCDMA Band IV:	4M21F9W				
	WCDMA Band V:	4M20F9W				
Antenna Designation	External Antenna	1				
Antenna Gain	GSM850:3.7dBi	PCS1900: 1.71dBi				
	WCDMA850: 3.7dBi	WCDMA1700:1.68dBi	WCDMA1900: 1.71dBi			
Power Supply	DC 3.7V by Built-in Li-ion	Battery				
Dual Card	GSM /WCDMA Card Slot					
Extreme Vol. Limits	DC 3.15V to 4.20V (Norm	nal: DC 3.7V)				
Extreme Temp. Tolerance	-30 °C to +50 °C					
Temperature Range	-20℃ to +50℃					



2.2 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2BLTR-AND1**, filing to comply with Part 2, Part 22/24/27 of the Federal Communication Commission rules.

2.3 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	47 CFR FCC Part 2	Frequency allocations and radio treaty matters, general rules and regulations.
2	47 CFR FCC Part 22	Public Mobile Services.
3	47 CFR FCC Part 24	Personal Communications Services.
4	47 CFR FCC Part 27	Miscellaneous Wireless Communications Services.
5	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters
5		Used in Licensed Radio Services
6	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and
0	ANSI/11A-003-L-2010	Performance Standards
7	KDB 971168	D01 v03r01 Measurement Guidance For Certification Of Licensed Digital
1		Transmitters.

2.4 Device Capabilities

850/1900 GSM/GPRS,850/1700/1900 WCDMA/HSPA, Multi-Band LTE, Bluetooth (1X,EDR).

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation

(landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

This device supports dual-SIM communication, and only the data corresponding to the worst card slot (SIM Card 1) is reflected in the report.

2.5 Special Accessories

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.6 Equipment Modifications

Not available for this EUT intended for grant.



2.7 Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW GSM BW = 249 kHz G = Phase Modulation X = Cases not otherwise covered W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W WCDMA BW = 4.17 MHz F = Frequency Modulation 9 = Composite Digital Info W = Combination (Audio/Data)

QAM Modulation

Emission Designator = 4M48W7D LTE BW = 4.48 MHz W = Amplitude/Angle Modulated 7 = Quantized/Digital Info D = Data transmission; telemetry; telecommand

EDGE Emission Designator

Emission Designator = 249KG7W GSM BW = 249 kHz G = Phase Modulation 7 = Quantized/Digital Info W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D LTE BW = 4.48 MHz G = Phase Modulation 7 = Quantized/Digital Info D = Data transmission; telemetry; telecommand



3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions	Extreme Conditions				
Temperature range	15~35 ℃	-20 ℃ ~50 ℃				
Humidty range	20 % to 75 %.	20 % to 75 %.				
Pressure range	86-106kPa	86-106kPa				
Power supply	DC 3.7V DC3.15V or DC4.2					
Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.						

3.4 Measurement Uncertainty

Test	Measurement Uncertainty	
Transmitter power conducted	±0.57 dB	
Transmitter power Radiated	±2.20 dB	
Conducted spurious emission 9kHz-40 GHz	±2.20 dB	
Occupied Bandwidth	±0.01ppm	
Radiated Emission 30~1000MHz	±4.10dB	
Radiated Emission Above 1GHz	±4.32dB	
Conducted Disturbance:0.15~30MHz	±3.20dB	
Radio Frequency	± 6.5 x 10-8	
RF Power, Conducted	± 0.9 dB	

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3.5 List of Test Equipment

• F	Radiated Spurious Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27
\boxtimes	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMW500	120909	2023-07-05	2024-07-04
	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMW500	120909	2024-05-28	2025-05-27
	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04
\bowtie	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-06-03	2025-06-02
\boxtimes	AGC-EM-E005	Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	2023-01-05	2025-01-04
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30
\boxtimes	AGC-EM-E102	Broadband Ridged Horn Antenna	ETS	3117	00154520	2023-06-03	2025-06-02
\bowtie	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23
	AGC-EM-E021	Pre-amplifier	MITEQ	AM-4A-000115	1465421	2022-06-08	2024-06-07
	AGC-EM-E021	Pre-amplifier	MITEQ	AM-4A-000115	1465421	2024-05-28	2026-05-27
\bowtie	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2023-06-01	2024-05-31
\boxtimes	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2024-05-23	2025-05-22
\boxtimes	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08
	AGC-EM-A090	High Pass Filter 1 (2500-18000MHz)	N/A	N/A	N/A	2023-06-01	2024-05-31
	AGC-EM-A090	High Pass Filter 1 (2500-18000MHz)	N/A	N/A	N/A	2024-05-23	2025-05-22
	AGC-EM-A091	High Pass Filter 2 (1200-18000MHz)	N/A	N/A	N/A	2023-06-01	2024-05-31
	AGC-EM-A091	High Pass Filter 2 (1200-18000MHz)	N/A	N/A	N/A	2024-05-23	2025-05-22
	AGC-EM-A113	(825-850MHZ)	MICRO-TRONICS	BRC50717	N/A	2023-06-01	2024-05-31
\boxtimes	AGC-EM-A113	Band Stop Filter (825-850MHz)	MICRO-TRONICS	BRC50717	N/A	2024-05-23	2025-05-22



AGC-EM-A114	Band Stop Filter (880-915MHz)	MICRO-TRONICS	BRC50718	N/A	2023-06-01	2024-05-31
AGC-EM-A114	Band Stop Filter (880-915MHz)	MICRO-TRONICS	BRC50718	N/A	2024-05-23	2025-05-22
AGC-EM-A115	Band Stop Filter (1710-1785MHz)	MICRO-TRONICS	BRC50719	N/A	2023-06-01	2024-05-31
AGC-EM-A115	Band Stop Filter (1710-1785MHz)	MICRO-TRONICS	BRC50719	N/A	2024-05-23	2025-05-22
AGC-EM-A116	Band Stop Filter (1850-1950MHz)	MICRO-TRONICS	BRC50720	N/A	2023-06-01	2024-05-31
AGC-EM-A116	Band Stop Filter (1850-1950MHz)	MICRO-TRONICS	BRC50720	N/A	2024-05-23	2025-05-22
AGC-EM-A117	Band Stop Filter (1920-1980MHz)	MICRO-TRONICS	BRC50721	N/A	2023-06-01	2024-05-31
AGC-EM-A117	Band Stop Filter (1920-1980MHz)	MICRO-TRONICS	BRC50721	N/A	2024-05-23	2025-05-22

• F	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E087	Spectrum Analyzer	KEYSIGHT	N9020B	MY56101792	2023-06-01	2024-05-31	
	AGC-ER-E087	Spectrum Analyzer	KEYSIGHT	N9020B	MY56101792	2024-05-23	2025-05-22	
\boxtimes	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMW500	120909	2023-07-05	2024-07-04	
	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMW500	120909	2024-05-28	2025-05-27	
\boxtimes	AGC-ER-E075	Small Environmental Tester	ESPEC	SH-242	93008290	2022-08-03	2024-08-02	
\boxtimes	AGC-ER-E075	Small Environmental Tester	ESPEC	SH-242	93008290	2024-07-24	2026-07-23	
\boxtimes	AGC-ER-A004	Power Splitter	Agilent	11667B	N/A	2023-06-01	2024-05-31	
\square	AGC-ER-A004	Power Splitter	Agilent	11667B	N/A	2024-05-30	2025-05-29	
\boxtimes		Universal Switch Control Unit	Tonscend	JS	N/A	N/A	N/A	
\boxtimes		RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes		RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• Tes	Test Software							
Used	Used Equipment No. Test Equipment Manufacturer Model No. Version Information							
	AGC-ER-S006	GSM Test System	Tonscend	JS1120-4	2.1.6.0			
\boxtimes	AGC-ER-S007	WCDMA Test System	Tonscend	JS1120-3	2.1.5.10			
	AGC-EM-S011	RSE Test System	Tonscend	TS ⁺ Ver2.1(JS36-RSE)	4.0.0.0			

Attestation of Global Compliance(Shenzhen)Co., LtdAttestation of Global Compliance(Shenzhen)Std & Tech Co., LtdTel: +86-755 2523 4088E-mail: agc@agccert.comWeb: http://www.agccert.com/





4. System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of EUT System

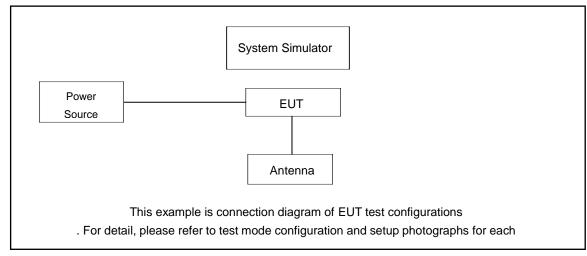


Table 2-1 Equipment Used in EUT System

4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

- Test Accessories Come From The Laboratory
- ☑ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Battery	Shenzhen Truepower New Energy Co.,Ltd.	AGM_M9	DC 3.7V 1150mAh	
2	Adapter	Shenzhen Flypower Technology Co., Ltd.	PS06CA050K1000 UU	Input: AC 100-240V~50/60Hz0.25A Output: DC 5V, 1A	



5. Summary of Test Results

5.1 Test Condition: Conducted Test

ltem	Test Description	FCC Rules	Result
1	Occupied Bandwidth	§2.1049	Pass
2	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal	§2.1051, §22.917(a), §24.238(a) §27.53(h)	Pass
3	Conducted Output Power	§2.1046	Pass
4	Frequency stability / variation of ambient temperature	§2.1055, § 22.355, §24.235, §27.54	Pass
5	Peak- to- Average Ratio	§24.232(d), §27.50(d)(5),	Pass

5.2 Test Condition: Radiated Test

ltem	Test Description	FCC Rules	Result
1	Effective Radiated Power	§22.913(a)(5)	Pass
2	Equivalent Isotropic Radiated Power	§24.232(c), §27.50(d)(4)	Pass
3	Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a), §27.53(h)	Pass



6. Description of Test Modes

		RF Channel			
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)	
	ТХ	Channel 128	Channel 190	Channel 251	
GSM/GPRS/850	(824 MHz ~ 849 MHz)	824.2 MHz	836.6 MHz	848.8 MHz	
	ТХ	Channel 4132	Channel 4182	Channel 4233	
WCDMA band V	(824 MHz ~ 849 MHz)	826.4 MHz	836.4 MHz	846.6 MHz	

Bands	Tx/Rx Frequency	RF Channel			
Banao	TXTIX Troquency	Low(L)	Middle(M)	High(H)	
000/0000/4000	ТХ	Channel 512	Channel 661	Channel 810	
GSM/GPRS/1900	(1850 MHz-1910 MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz	
	ТХ	Channel 9262	Channel 9400	Channel 9538	
WCDMA Band II	(1850 MHz-1910 MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz	

		RF Channel			
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)	
	ТХ	Channel 1312	Channel 1412	Channel 1513	
WCDMA Band IV	(1710 MHz-1755 MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz	

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
GSM/GPRS/ 850/1900	GSM (GMSK, 1Tx-slot) Link GPRS (GMSK, 1Tx-slot) Link	GSM (GMSK,1Tx-slot) Link GPRS (GMSK, 1Tx-slot) Link
WCDMA Band II/IV/V	RMC 12.2kbps Link	RMC 12.2kbps Link



According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

UE Transmit Channel Configuration	CM(db)	MPR(db)			
For all combinations of ,DPDCH,DPCCH	0≤ CM≤3.5	MAX(CM-1,0)			
HS-DPDCH, E-DPDCH and E-DPCCH					
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH,					
E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.					

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



7. Equivalent (Isotropic) Radiated Power

7.1 Provisions Applicable

The conduction test is carried out in a shielded room. According to the test, connect the device under test to the antenna port on the non-conductive platform directly to the test device for evaluation and measurement (ANSI-C63.26-2015 Clause 5.2)

The following rules are for the maximum radiated power limit requirements of the product:

-	
Mode	Nominal Peak Power
GSM 850	< 7 Watts max. ERP (38.45dBm)
PCS 1900	< 2 Watts max. EIRP (33dBm)
WCDMA Band II	< 2 Watts max. EIRP (33dBm)
WCDMA Band IV	< 1 Watts max. EIRP (30dBm)
WCDMA Band V	< 7 Watts max. ERP (38.45dBm)

7.2 Measurement Procedure

■ Measure the conducted average power as follows:

- 1. The transmitter output port was connected to base station.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
- 3. The path loss was compensated to the results for each measurement.
- 4. Measure the maximum burst average power and average power for other modulation signal.
- 5. The software records its average power as (P_{Meas})

The radiation power method is as follows

In many cases, the RF output power limits for licensed digital transmission devices is specified in terms of effective radiated power (ERP) or equivalent isotropic radiated power (EIRP). Typically, ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining the EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi). The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$ERP/EIRP = P_{Meas} + G_{T} - L_{C}$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);


- P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;
- G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);
- L_c = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

If the Fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

EIRP (dBm) = ERP (dBm) + 2.15



7.3 Measurement Setup

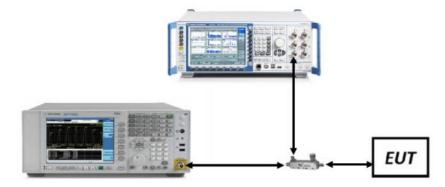

7.4 Measurement Result

Note: The test data please reference to attachment "AGC02931240301FR06_Appendix Data"



8. Peak-to-Average Ratio

8.1 Provisions Applicable

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

8.2 Measurement Procedure

CCDF Procedure for PAPR:

- 1. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- 2. Set the number of counts to a value that stabilizes the measured CCDF curve;
- 3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time
- 4. that is less than or equal to the burst duration.
- 5. Record the maximum PAPR level associated with a probability of 0.1%.

Alternate Procedure for PAPR:

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as PAvg. Determine the P.A.R. from:

 $P.A.R(dB) = P_{Pk} (dBm) - P_{Avg} (dBm) (P_{Avg} = Average Power + Duty cycle Factor)$

Allow trace to fully stabilize.

Use the peak marker function to determine the peak amplitude level.

Test Settings (Peak Power):

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW \ge 3 × RBW.

- 1. Set the RBW \geq OBW.
- 2. Set VBW \geq 3 × RBW.
- 3. Set span \geq 2 × OBW.
- 4. Sweep time \geq 10 × (number of points in sweep) × (transmission symbol period).




- 5. Detector = peak.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the peak amplitude level.

<u>Test Settings (Average Power)</u>

- 1. Set span to $2 \times to 3 \times the OBW$.
- 2. Set RBW ≥ OBW.
- 3. Set VBW ≥ 3 × RBW.
- 4. Set number of measurement points in sweep $\ge 2 \times \text{span} / \text{RBW}$.
- Sweep time: Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (Automation-compatible) measurement. The transmission period is the (on + off) time.
- 6. Detector = power averaging (rms).
- 7. Set sweep trigger to "free run."
- 8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
- 9. Use the peak marker function to determine the maximum amplitude level.
- Add [10 log (1/duty cycle)] to the measured maximum power level to compute the average power during continuous transmission. For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is a constant 25%.

8.3 Measurement Setup

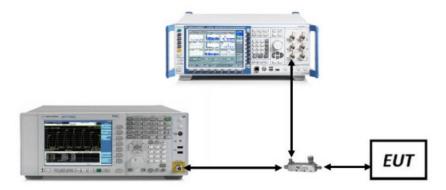

8.4 Measurement Result

Note: The test data please reference to attachment "AGC02931240301FR06_Appendix Data"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



9. 99% Occupied Bandwidth and 26dB Emission Bandwidth

9.1 Provisions Applicable

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission. The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

9.2 Measurement Procedure

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99%
- 2. Occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by
- 3. any intermediate power nulls in the fundamental emission.
- 4. RBW = 1 5% of the expected OBW
- 5. VBW \ge 3 x RBW
- 6. Detector = Peak
- 7. Trace mode = max hold
- 8. Sweep = auto couple
- 9. The trace was allowed to stabilize
- 10. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
- 11. 1 5% of the 99% occupied bandwidth observed in Step 7

9.3 Measurement Setup

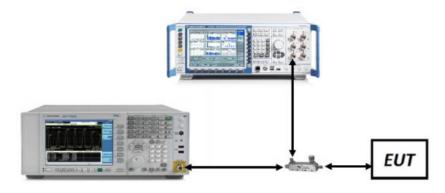

9.4 Measurement Result

Note: The test data please reference to attachment "AGC02931240301FR06_Appendix Data"



10. Band Edge Emissions at Antenna Terminal

10.1 Provisions Applicable

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

10.2 Measurement Procedure

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- 4. VBW > 3 x RBW
- 5. Detector = RMS
- 6. Number of sweep points \geq 2 x Span/RBW
- 7. Trace mode = trace average
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

Test Note


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. All measurements were done at 2 channels(low and high operational frequency range.) The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

10.3 Measurement Setup



10.4 Measurement Result

Note: The test data please reference to attachment "AGC02931240301FR06_Appendix Data"





11. Spurious Emissions at Antenna Terminal

11.1 Provisions Applicable

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

11.2 Measurement Procedure

Test Settings (GSM)

- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = Peak
- 4. Trace Mode = max hold
- 5. Sweep time = auto
- 6. Number of points in sweep $\ge 2 \times \text{Span} / \text{RBW}$

Test Settings (WCDMA)

- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = RMS
- 4. Trace Mode = trace average
- 5. Sweep time = auto
- 6. Number of points in sweep $\ge 2 \times \text{Span} / \text{RBW}$

11.3 Measurement Setup



11.4 Measurement Result

Note: The test data please reference to attachment "AGC02931240301FR06_Appendix Data"



12. Radiated Spurious Emission

12.1. Provisions Applicable

(A) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm.

At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

(B) For specific criteria, please refer to the description in section 9.2 of the report for corresponding evaluation.

12.2. Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the




pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 11. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT.
- 12. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
- 13. The spurious emissions is calculated by the following formula;
 - \diamond Result(dBm) = Pg(dBm) +Factor(dB)
 - ♦ Factor(dB) = Ant Gain(dB)-Cable Loss(dB) + Power Splitter(dB) (Above 1GHz)
 - ♦ Factor(dB) = Ant Gain(dB)-Cable Loss(dB) (Below 1GHz)
- 14. Where: P_{gis} the generator output power into the substitution antenna.
- 15. If the Fundamental frequency is below 1GHz, RF output power has been converted to EIRP.
 - \Rightarrow EIRP (dBm) = ERP (dBm) + 2.15




12.3. Measurement Setup

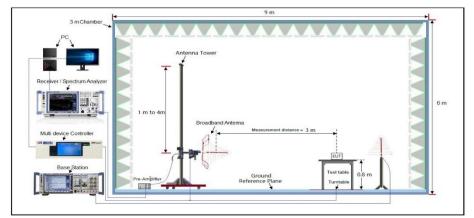

Radiated Emissions 30MHz to 1GHz Test setup

Radiated Emissions Above 1GHz Test setup

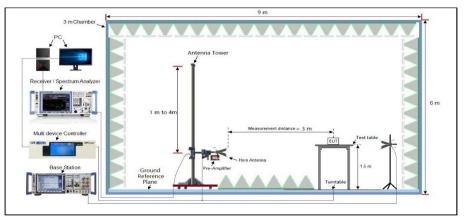



12.4 Measurement Result

The measurement Below 1GHz data as follows:

	GSM 850						
	Frequency	SA	Correction	EIRP	Limit	Margin	
No.	Trequency	Reading	factor	Result		warym	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			GSM_ Lo	owest Channel			
1	154.759	-66.31	15.52	-50.79	-13.00	-37.79	Horizontal
2	231.144	-62.43	16.75	-45.68	-13.00	-32.68	Horizontal
3	710.963	-59.42	19.35	-40.07	-13.00	-27.07	Horizontal
4	51.708	-64.65	10.44	-54.21	-13.00	-41.21	Vertical
5	426.340	-61.75	17.75	-44.00	-13.00	-31.00	Vertical
6	511.247	-59.08	18.66	-40.42	-13.00	-27.42	Vertical
			GSM_M	liddle Channel			
1	26.735	-63.12	9.78	-53.34	-13.00	-40.34	Horizontal
2	174.759	-62.77	13.75	-49.02	-13.00	-36.02	Horizontal
3	253.144	-60.75	16.75	-44.00	-13.00	-31.00	Horizontal
4	49.233	-63.64	10.23	-53.41	-13.00	-40.41	Vertical
5	412.340	-61.41	17.75	-43.66	-13.00	-30.66	Vertical
6	503.730	-58.76	18.02	-40.74	-13.00	-27.74	Vertical
			GSM_ Hi	ghest Channel			
1	166.759	-63.24	13.75	-49.49	-13.00	-36.49	Horizontal
2	217.144	-62.15	16.75	-45.40	-13.00	-32.40	Horizontal
3	653.435	-57.97	19.01	-38.96	-13.00	-25.96	Horizontal
4	42.233	-61.32	10.23	-51.09	-13.00	-38.09	Vertical
5	401.340	-60.73	17.75	-42.98	-13.00	-29.98	Vertical
6	455.730	-57.07	18.02	-39.05	-13.00	-26.05	Vertical



			PC	CS 1900			
	Frequency	SA	Correction	EIRP	Linoit	Marain	
No.	Frequency	Reading	factor	Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
	GSM_ Lowest Channel						
1	159.211	-65.11	15.52	-49.59	-13.00	-36.59	Horizontal
2	240.103	-61.03	16.75	-44.28	-13.00	-31.28	Horizontal
3	754.536	-57.89	19.35	-38.54	-13.00	-25.54	Horizontal
4	46.152	-63.51	10.44	-53.07	-13.00	-40.07	Vertical
5	433.263	-59.29	17.75	-41.54	-13.00	-28.54	Vertical
6	502.741	-57.93	18.66	-39.27	-13.00	-26.27	Vertical
			GSM_M	liddle Channel			
1	31.263	-62.66	9.78	-52.88	-13.00	-39.88	Horizontal
2	159.117	-63.47	13.75	-49.72	-13.00	-36.72	Horizontal
3	240.012	-62.08	16.75	-45.33	-13.00	-32.33	Horizontal
4	43.136	-63.97	10.23	-53.74	-13.00	-40.74	Vertical
5	433.256	-62.28	17.75	-44.53	-13.00	-31.53	Vertical
6	498.227	-59.78	18.02	-41.76	-13.00	-28.76	Vertical
			GSM_ Hi	ghest Channel			
1	159.413	-63.28	13.75	-49.53	-13.00	-36.53	Horizontal
2	240.236	-61.68	16.75	-44.93	-13.00	-31.93	Horizontal
3	679.415	-57.86	19.01	-38.85	-13.00	-25.85	Horizontal
4	43.236	-63.51	10.23	-53.28	-13.00	-40.28	Vertical
5	433.778	-60.31	17.75	-42.56	-13.00	-29.56	Vertical
6	498.635	-57.69	18.02	-39.67	-13.00	-26.67	Vertical



	WCDMA Band II								
	Frequency	SA	Correction	EIRP	Lincit	Morgin			
No.	Frequency	Reading	factor	Result	Limit	Margin	Ant. Pol.		
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)			
	RMC 12.2kbps_ Lowest Channel								
1	159.263	-65.89	15.52	-50.37	-13.00	-37.37	Horizontal		
2	240.012	-63.12	16.75	-46.37	-13.00	-33.37	Horizontal		
3	789.963	-58.55	19.35	-39.20	-13.00	-26.20	Horizontal		
4	52.708	-65.24	10.44	-54.80	-13.00	-41.80	Vertical		
5	413.340	-61.46	17.75	-43.71	-13.00	-30.71	Vertical		
6	512.247	-59.17	18.66	-40.51	-13.00	-27.51	Vertical		
			RMC 12.2kbp	s_ Middle Cha	nnel				
1	45.735	-62.85	9.78	-53.07	-13.00	-40.07	Horizontal		
2	163.759	-64.41	13.75	-50.66	-13.00	-37.66	Horizontal		
3	277.144	-61.30	16.75	-44.55	-13.00	-31.55	Horizontal		
4	26.233	-63.97	10.23	-53.74	-13.00	-40.74	Vertical		
5	369.340	-63.19	17.75	-45.44	-13.00	-32.44	Vertical		
6	551.730	-58.57	18.02	-40.55	-13.00	-27.55	Vertical		
			RMC 12.2kbp	s_ Highest Cha	annel				
1	152.636	-63.81	13.75	-50.06	-13.00	-37.06	Horizontal		
2	325.144	-62.71	16.75	-45.96	-13.00	-32.96	Horizontal		
3	587.435	-60.23	19.01	-41.22	-13.00	-28.22	Horizontal		
4	36.233	-64.10	10.23	-53.87	-13.00	-40.87	Vertical		
5	493.340	-62.00	17.75	-44.25	-13.00	-31.25	Vertical		
6	511.730	-68.39	18.02	-50.37	-13.00	-37.37	Vertical		



	WCDMA Band IV								
	Fraguanay	SA	Correction	EIRP	Limit	Margin			
No.	Frequency	Reading	factor	Result	Limit		Ant. Pol.		
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)			
	RMC 12.2kbps_ Lowest Channel								
1	159.525	-66.95	15.52	-51.43	-13.00	-38.43	Horizontal		
2	240.632	-62.96	16.75	-46.21	-13.00	-33.21	Horizontal		
3	754.125	-61.11	19.35	-41.76	-13.00	-28.76	Horizontal		
4	46.745	-65.86	10.44	-55.42	-13.00	-42.42	Vertical		
5	433.136	-61.78	17.75	-44.03	-13.00	-31.03	Vertical		
6	502.263	-60.61	18.66	-41.95	-13.00	-28.95	Vertical		
			RMC 12.2kbp	s_ Middle Cha	nnel				
1	31.236	-63.83	9.78	-54.05	-13.00	-41.05	Horizontal		
2	159.255	-64.04	13.75	-50.29	-13.00	-37.29	Horizontal		
3	240.152	-62.68	16.75	-45.93	-13.00	-32.93	Horizontal		
4	43.213	-64.73	10.23	-54.50	-13.00	-41.50	Vertical		
5	433.257	-64.13	17.75	-46.38	-13.00	-33.38	Vertical		
6	498.325	-60.08	18.02	-42.06	-13.00	-29.06	Vertical		
			RMC 12.2kbp	s_ Highest Cha	annel				
1	159.116	-64.01	13.75	-50.26	-13.00	-37.26	Horizontal		
2	240.105	-62.87	16.75	-46.12	-13.00	-33.12	Horizontal		
3	679.264	-60.08	19.01	-41.07	-13.00	-28.07	Horizontal		
4	43.136	-64.23	10.23	-54.00	-13.00	-41.00	Vertical		
5	433.525	-63.22	17.75	-45.47	-13.00	-32.47	Vertical		
6	498.163	-59.54	18.02	-41.52	-13.00	-28.52	Vertical		



	WCDMA Band V								
	Fraguanay	SA	Correction	EIRP	Lincit	Morain			
No.	Frequency	Reading	factor	Result	Limit	Margin	Ant. Pol.		
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)			
	RMC 12.2kbps_ Lowest Channel								
1	159.759	-65.73	15.52	-50.21	-13.00	-37.21	Horizontal		
2	240.144	-62.54	16.75	-45.79	-13.00	-32.79	Horizontal		
3	754.963	-59.90	19.35	-40.55	-13.00	-27.55	Horizontal		
4	46.708	-65.16	10.44	-54.72	-13.00	-41.72	Vertical		
5	433.340	-61.22	17.75	-43.47	-13.00	-30.47	Vertical		
6	502.247	-59.53	18.66	-40.87	-13.00	-27.87	Vertical		
			RMC 12.2kbp	os_ Middle Cha	nnel				
1	31.735	-62.70	9.78	-52.92	-13.00	-39.92	Horizontal		
2	159.759	-62.94	13.75	-49.19	-13.00	-36.19	Horizontal		
3	240.144	-62.31	16.75	-45.56	-13.00	-32.56	Horizontal		
4	43.233	-63.78	10.23	-53.55	-13.00	-40.55	Vertical		
5	433.340	-62.38	17.75	-44.63	-13.00	-31.63	Vertical		
6	498.730	-59.13	18.02	-41.11	-13.00	-28.11	Vertical		
			RMC 12.2kbp	s_ Highest Cha	annel				
1	159.759	-63.58	13.75	-49.83	-13.00	-36.83	Horizontal		
2	240.144	-61.98	16.75	-45.23	-13.00	-32.23	Horizontal		
3	679.435	-59.96	19.01	-40.95	-13.00	-27.95	Horizontal		
4	43.233	-64.07	10.23	-53.84	-13.00	-40.84	Vertical		
5	433.340	-61.85	17.75	-44.10	-13.00	-31.10	Vertical		
6	498.730	-59.89	18.02	-41.87	-13.00	-28.87	Vertical		



The measurement Above 1GHz data as follows:

GSM 850									
	Fraguaday	SA	Correction	EIRP	Limit	Morgin			
No.	Frequency	Reading	factor	Result		Margin	Ant. Pol.		
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)			
			GSM_ Lo	west Channel					
1	1648.400	-88.61	23.50	-65.11	-13.00	-52.11	Horizontal		
2	2472.600	-88.08	29.47	-58.61	-13.00	-45.61	Horizontal		
3	1648.400	-89.57	23.72	-65.85	-13.00	-52.85	Vertical		
4	2472.600	-88.68	29.47	-59.21	-13.00	-46.21	Vertical		
			GSM_M	liddle Channel					
1	1673.200	-89.15	23.50	-65.65	-13.00	-52.65	Horizontal		
2	2509.800	-90.91	29.47	-61.44	-13.00	-48.44	Horizontal		
3	1673.200	-88.71	23.72	-64.99	-13.00	-51.99	Vertical		
4	2509.800	-92.94	29.47	-63.47	-13.00	-50.47	Vertical		
	GSM_ Highest Channel								
1	1697.600	-91.83	23.50	-68.33	-13.00	-55.33	Horizontal		
2	2546.400	-93.28	29.47	-63.81	-13.00	-50.81	Horizontal		
3	1697.600	-93.44	23.72	-69.72	-13.00	-56.72	Vertical		
4	2546.400	-92.79	29.47	-63.32	-13.00	-50.32	Vertical		



	PCS 1900									
	Frequency	SA	Correction	EIRP	Limit	Morgin				
No.	Frequency	Reading	factor	Result		Margin	Ant. Pol.			
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)				
			GSM_ Lo	owest Channel						
1	3700.400	-87.14	32.11	-55.03	-13.00	-42.03	Horizontal			
2	5550.600	-86.07	33.21	-52.86	-13.00	-39.86	Horizontal			
3	3700.400	-87.90	32.09	-55.81	-13.00	-42.81	Vertical			
4	5550.600	-86.20	34.03	-52.17	-13.00	-39.17	Vertical			
	GSM_ Middle Channel									
1	3760.000	-82.38	32.11	-50.27	-13.00	-37.27	Horizontal			
2	5640.000	-84.75	33.21	-51.54	-13.00	-38.54	Horizontal			
3	3760.000	-89.18	32.09	-57.09	-13.00	-44.09	Vertical			
4	5640.000	-86.40	34.03	-52.37	-13.00	-39.37	Vertical			
	GSM_ Highest Channel									
1	3819.600	-88.01	32.11	-55.90	-13.00	-42.90	Horizontal			
2	5729.400	-87.07	33.21	-53.86	-13.00	-40.86	Horizontal			
3	3819.600	-90.72	32.09	-58.63	-13.00	-45.63	Vertical			
4	5729.400	-88.93	34.03	-54.90	-13.00	-41.90	Vertical			



WCDMA Band II									
	Frequency	SA	Correction	EIRP	Limit	Margin			
No.	тециенсу	Reading	factor	Result		Margin	Ant. Pol.		
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)			
			RMC 12.2kbp	s_ Lowest Cha	innel				
1	3704.800	-82.41	31.09	-51.32	-13.00	-38.32	Horizontal		
2	5557.200	-90.45	34.14	-56.31	-13.00	-43.31	Horizontal		
3	3704.800	-80.70	33.13	-47.57	-13.00	-34.57	Vertical		
4	5557.200	-86.13	32.66	-53.47	-13.00	-40.47	Vertical		
	RMC 12.2kbps_ Middle Channel								
1	3760.000	-79.61	31.09	-48.52	-13.00	-35.52	Horizontal		
2	5640.000	-88.01	34.14	-53.87	-13.00	-40.87	Horizontal		
3	3760.000	-79.88	33.13	-46.75	-13.00	-33.75	Vertical		
4	5640.000	-85.23	32.66	-52.57	-13.00	-39.57	Vertical		
	RMC 12.2kbps_ Highest Channel								
1	3815.200	-82.95	31.09	-51.86	-13.00	-38.86	Horizontal		
2	5722.800	-85.87	34.14	-51.73	-13.00	-38.73	Horizontal		
3	3815.200	-82.68	33.13	-49.55	-13.00	-36.55	Vertical		
4	5722.800	-83.58	32.66	-50.92	-13.00	-37.92	Vertical		



WCDMA Band IV									
	Frequency	SA	Correction	EIRP	Limit	Margin			
No.	Trequency	Reading	factor	Result	Linin	Margin	Ant. Pol.		
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)			
			RMC 12.2kbp	s_ Lowest Cha	innel				
1	3424.800	-90.14	32.11	-58.03	-13.00	-45.03	Horizontal		
2	5137.200	-88.03	33.21	-54.82	-13.00	-41.82	Horizontal		
3	3424.800	-90.28	32.09	-58.19	-13.00	-45.19	Vertical		
4	5137.200	-88.00	34.03	-53.97	-13.00	-40.97	Vertical		
	RMC 12.2kbps_ Middle Channel								
1	3464.800	-89.16	32.11	-57.05	-13.00	-44.05	Horizontal		
2	5197.200	-87.22	33.21	-54.01	-13.00	-41.01	Horizontal		
3	3464.800	-90.32	32.09	-58.23	-13.00	-45.23	Vertical		
4	5197.200	-87.14	34.03	-53.11	-13.00	-40.11	Vertical		
	RMC 12.2kbps_ Highest Channel								
1	3505.200	-88.58	32.11	-56.47	-13.00	-43.47	Horizontal		
2	5257.800	-86.24	33.21	-53.03	-13.00	-40.03	Horizontal		
3	3505.200	-88.94	32.09	-56.85	-13.00	-43.85	Vertical		
4	5257.800	-86.35	34.03	-52.32	-13.00	-39.32	Vertical		



WCDMA Band V									
	Frequency	SA	Correction	EIRP	Limit	Morgin			
No.	Trequency	Reading	factor	Result	Linint	Margin	Ant. Pol.		
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)			
			RMC 12.2kbp	s_ Lowest Cha	innel				
1	1652.800	-84.04	23.12	-60.92	-13.00	-47.92	Horizontal		
2	2479.200	-86.48	28.47	-58.01	-13.00	-45.01	Horizontal		
3	1652.800	-83.20	23.12	-60.08	-13.00	-47.08	Vertical		
4	2479.200	-83.36	28.47	-54.89	-13.00	-41.89	Vertical		
	RMC 12.2kbps_ Middle Channel								
1	1672.800	-81.41	23.12	-58.29	-13.00	-45.29	Horizontal		
2	2509.200	-84.03	28.47	-55.56	-13.00	-42.56	Horizontal		
3	1672.800	-82.90	23.12	-59.78	-13.00	-46.78	Vertical		
4	2509.200	-82.42	28.47	-53.95	-13.00	-40.95	Vertical		
	RMC 12.2kbps_ Highest Channel								
1	1693.200	-80.57	23.12	-57.45	-13.00	-44.45	Horizontal		
2	2539.800	-82.39	28.47	-53.92	-13.00	-40.92	Horizontal		
3	1693.200	-80.87	23.12	-57.75	-13.00	-44.75	Vertical		
4	2539.800	-80.99	28.47	-52.52	-13.00	-39.52	Vertical		

Note:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.

- 2. Result = Reading + Correct Factor.
- 3. Margin = Result Limit
- 4. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test. Subsequently, only the worst case emissions are reported.



13. Frequency Stability / Variation of Ambient Temperature

13.1 Provisions Applicable

13.1.1 For Hand carried battery powered equipment

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

13.1.2 For equipment powered by primary supply voltage

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a
- 2. reference).
- 3. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to
- 4. the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 5. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at
- 6. least one half-hour is provided to allow stabilization of the equipment at each temperature level.

13.2 Measurement Procedure


In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

- 1. Measure the carrier frequency at room temperature.
- Subject the EUT to overnight soak at -30℃. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on channel 20175 for LTE band 4 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 3. Repeat the above measurements at 10[°]C increments from -30[°]C to +50[°]C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 4. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each



voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.

- 5. Subject the EUT to overnight soak at $+50^{\circ}$ C.
- 6. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 7. Repeat the above measurements at 10[°]C increments from +50[°]C to -30[°]C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 8. At all temperature levels hold the temperature to +/- 0.5° C during the measurement procedure.

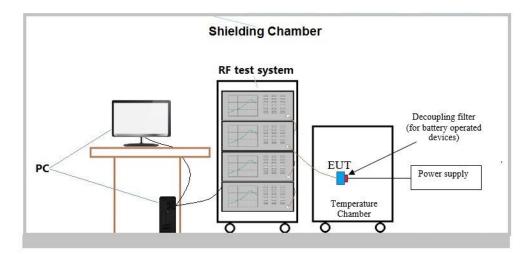

13.3 Measurement Setup

13.4 Measurement Result

Note: The test data please reference to attachment "AGC02931240301FR06_Appendix Data"



Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC02931240301AP03

Appendix II: Photographs of EUT

Refer to the Report No.: AGC02931240301AP02

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.