

Dynascan Technology Corp.

TEST REPORT

SCOPE OF WORK:

47 CFR FCC Part 15.247 – Radio Spectrum report

Model:

FBP205

REPORT NUMBER

220400321THC-001

ISSUE DATE

Jun. 08, 2022


PAGES

92

DOCUMENT CONTROL NUMBER

GFT-OP-10h (28-Nov-2018)

© 2020 Intertek

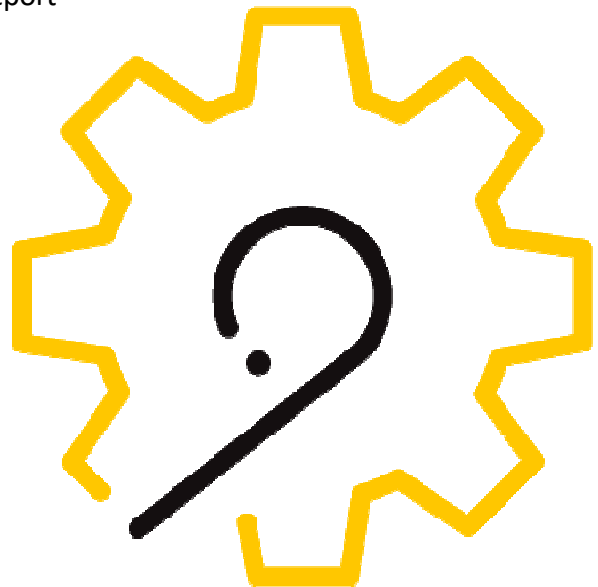

Radio Spectrum TEST REPORT

Applicant:	Dynascan Technology Corp. 6F., No. 88, Wenmao Rd., Leshan Vil., Guishan Dist., Taoyuan City 333001, Taiwan
Product:	Digital Transmission Systems
Model No.:	FBP205
FCC ID:	2AKWYFBP205
Test Method/ Standard:	47 CFR FCC Part 15.247 & ANSI C63.10 2013 KDB 558074 D01 v05r02
Test By:	Intertek Testing Services Taiwan Ltd., Hsinchu Laboratory No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li, Shiang-Shan District, Hsinchu City, Taiwan



Zero chen

Zero Chen
Engineer

Rico Deng

Rico Deng
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Revision History

Report No.	Issue Date	Revision Summary
220400321THC-001	Jun. 08, 2022	Original report

Table of Contents

Summary of Test Data	5
1. General Information	6
1.1 Identification of the EUT	6
1.2 Description of the EUT	6
1.3 Antenna description	7
1.4 Operation mode	7
1.5 Peripherals equipment	8
2. Minimum 6 dB Bandwidth	9
2.1 Instrument Setting.....	9
2.2 Test Procedure	9
2.3 Test Diagram	9
2.4 Limit	9
2.5 Test Results	10
3. Maximum Peak Conducted Output Power	19
3.1 Instrument Setting.....	19
3.2 Test Procedure	19
3.3 Test Diagram	19
3.4 Limit	19
3.5 Test Results	20
4. Power Spectral Density.....	22
4.1 Instrument Setting.....	22
4.2 Test Procedure	22
4.3 Test Diagram	22
4.4 Limit	22
4.5 Test Results	23
5. Emissions in Non-Restricted Frequency Bands	32
5.1 Instruments Setting	32
5.2 Test Procedure	32
5.3 Test Diagram	32
5.4 Limit	32
5.5 Test Results	32
6. Emissions in Restricted Frequency Bands (Radiated emission measurements)	57
6.1 Instrument Setting.....	57
6.2 Test setup & procedure	57
6.3 Limit	59
6.4 Test Result.....	60
6.4.1 Measurement results from 9kHz to 30MHz	60
6.4.2 Measurement results from 30 MHz to 1 GHz	64
6.4.3 Measurement results from 1 GHz to 25 GHz	66

TEST REPORT

7. Emission on Band Edge.....	68
7.1 Instrument Setting.....	68
7.2 Test Procedure	68
7.3 Test Results	69
8. AC Power Line Conducted Emission	84
8.1 Measuring instrument setting.....	84
8.2 Test Procedure	84
8.3 Test Diagram	85
8.4 Limit	85
8.5 Test Results	86
Appendix A: Test equipment list.....	90
Appendix B: Measurement Uncertainty.....	92

Summary of Test Data

Test Requirement	Applicable Rule (Section 15.247)	Result
Minimum 6 dB Bandwidth	15.247(a)(2)	Pass
Maximum Peak Conducted Output Power	15.247(b)(3)	Pass
Power Spectral Density	15.247(e)	Pass
Emissions In Non-Restricted Frequency Bands	15.247(d)	Pass
Emissions In Restricted Frequency Bands (Radiated emission measurements)	15.247(d), 15.205, 15.209	Pass
Emission On The Band Edge	15.247(d), 15.205	Pass
AC Power Line Conducted Emission	15.207	Pass
Antenna Requirement	15.203	Pass

Note: Please note that the test results with statement of conformity, the decision rules which are based on: Safety Testing: the specification, standard or IEC Guide 115.

Other Testing: the specification, standard and not taking into account the measurement uncertainty.

1. General Information

1.1 Identification of the EUT

Product:	Digital Transmission System
Model No.:	FBP205
Operating Frequency:	2412MHz ~ 2462MHz for 802.11b/g/n HT20 2422MHz ~ 2452MHz for 802.11n HT40
Channel Number:	11 channels for 2412MHz ~ 2462MHz 7 channels for 2422MHz ~ 2452MHz
Access scheme:	DSSS, OFDM
Rated Power:	DC 3.3V
Power Cord:	N/A
Sample receiving date:	2022/04/07
Sample condition:	Workable
Test Date(s):	2022/04/21 ~ 2022/05/31

1.2 Description of the EUT

Modulation mode	Transmit path	
	Chain 0	Chain 1
802.11b	V	V
802.11g	V	V
802.11 n (HT20)	V	V
802.11 n (HT40)	V	V

Item	Product name	Model No.	Rated Power
Host 1	Display	67401	100-240V~ 50-60Hz 2A
Host 2	Display	67301	100-240V~ 50-60Hz 3A

1.3 Antenna description

For antenna 0 (Chain 0)

Antenna Gain : -3.04 dBi
Antenna Type : PIFA antenna
Connector Type : I-pex

For antenna 1 (Chain 1)

Antenna Gain : -3.04 dBi
Antenna Type : PIFA antenna
Connector Type : I-pex

1.4 Operation mode

Power on, executing “WLAN Test Tool V2.3.0” to select different frequency and modulation.

With individual verifying, the maximum output power were found out 6 Mbps data rate for 802.11a mode, 6.5 Mbps data rate for 802.11ac(VHT20) mode, 13.5 Mbps data rate for 802.11ac(VHT40) mode , 29.3 Mbps data rate for 802.11ac(VHT80) mode, the final tests were executed under these conditions recorded in this report individually.

Mode	Channel	Frequency (MHz)	Data rate	Signal on time(ms)	Signal transmit on+off time(ms)	Duty cycle	Duty Cycle factor
802.11b	6	2437	1	12.210	12.710	0.961	0.174
802.11g	6	2437	6	2.013	2.521	0.798	0.977
802.11n (HT20)	6	2437	6.5	1.878	2.391	0.785	1.049
802.11n (HT40)	6	2437	13.5	0.894	1.431	0.625	2.043

1.5 Peripherals equipment

Peripherals	Brand	Model No.	Description of Data Cable
Notebook PC	HP	HSTNN-Q96C	Shielded HDMI cable 1.5m x 2
Earphone	i Coby	M80	Unshielded audio 3.5mm cable 2m x 1
USB flash drive	Kingston	DTSE9G2/8GB	N/A
USB flash drive	Kingston	DTSE9G2/8GB	N/A
Wireless AP	BUFFALO	WZR-AGL300NH	N/A

2. Minimum 6 dB Bandwidth


2.1 Instrument Setting

Spectrum Parameter	Setting
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Sweep	Auto couple
Trace	Allow the trace to stabilize.
Span	Between two times and five times the occupied bandwidth
Attenuation	Auto

2.2 Test Procedure

Step 1	The transmitter output was connected to the spectrum analyzer.
Step 2	Test was performed accordance with ANSI C63.10.
Step 3	Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

2.3 Test Diagram

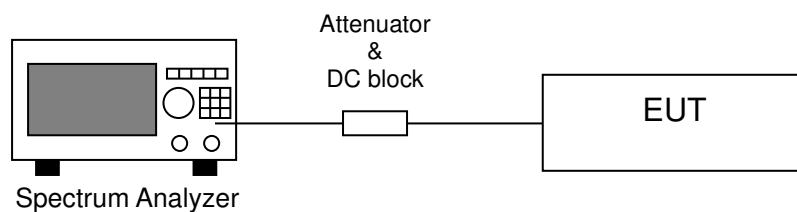

2.4 Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST REPORT

2.5 Test Results

Temperature (°C) :	23
Relative Humidity (%) :	60
Test date :	2022/05/18
Host 1 :	67401

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b Chain 0	1	2412	10.09	>0.5	Pass
	6	2437	10.07	>0.5	Pass
	11	2462	10.07	>0.5	Pass
802.11g Chain 0	1	2412	16.34	>0.5	Pass
	6	2437	16.33	>0.5	Pass
	11	2462	15.55	>0.5	Pass
802.11n(HT20) Chain 0	1	2412	15.64	>0.5	Pass
	6	2437	16.65	>0.5	Pass
	11	2462	15.37	>0.5	Pass
802.11n(HT40) Chain 0	3	2422	34.03	>0.5	Pass
	6	2437	35.16	>0.5	Pass
	9	2452	32.91	>0.5	Pass

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b Chain 1	1	2412	10.09	>0.5	Pass
	6	2437	10.08	>0.5	Pass
	11	2462	10.09	>0.5	Pass
802.11g Chain 1	1	2412	16.04	>0.5	Pass
	6	2437	15.69	>0.5	Pass
	11	2462	14.93	>0.5	Pass
802.11n(HT20) Chain 1	1	2412	16.53	>0.5	Pass
	6	2437	16.67	>0.5	Pass
	11	2462	16.13	>0.5	Pass
802.11n(HT40) Chain 1	3	2422	35.15	>0.5	Pass
	6	2437	35.04	>0.5	Pass
	9	2452	35.03	>0.5	Pass

Chain0 : 6dB Bandwidth @ 802.11b Mode Ch 1



Chain0 : 6dB Bandwidth @ 802.11b Mode Ch 6



Chain0 : 6dB Bandwidth @ 802.11b Mode Ch11



Chain1 : 6dB Bandwidth @ 802.11b Mode Ch 1




Chain1 : 6dB Bandwidth @ 802.11b Mode Ch 6




Chain1 : 6dB Bandwidth @ 802.11b Mode Ch11




Chain0 : 6dB Bandwidth @ 802.11g Mode Ch 1

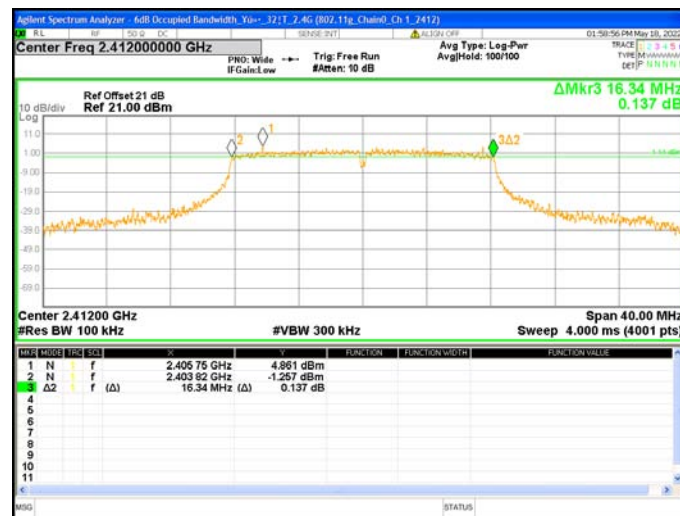


Chain0 : 6dB Bandwidth @ 802.11g Mode Ch 6

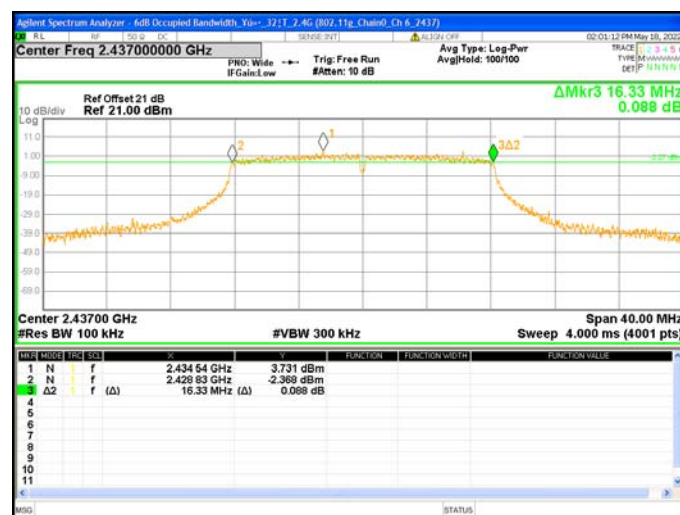


Chain0 : 6dB Bandwidth @ 802.11g Mode Ch11

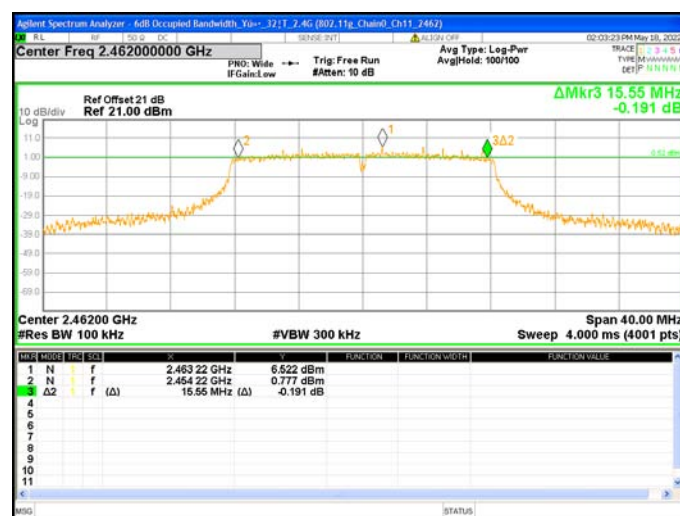

Chain1 : 6dB Bandwidth @ 802.11g Mode Ch 1

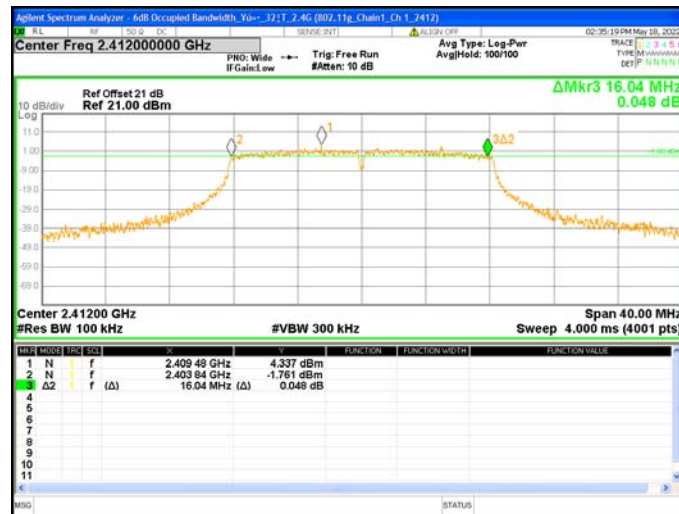

Chain1 : 6dB Bandwidth @ 802.11g Mode Ch 6

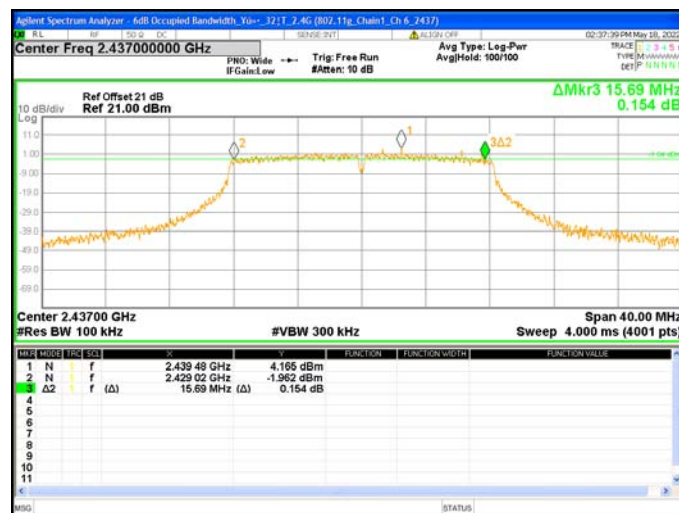


Chain1 : 6dB Bandwidth @ 802.11g Mode Ch11



Chain0 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch 1




Chain0 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch 6

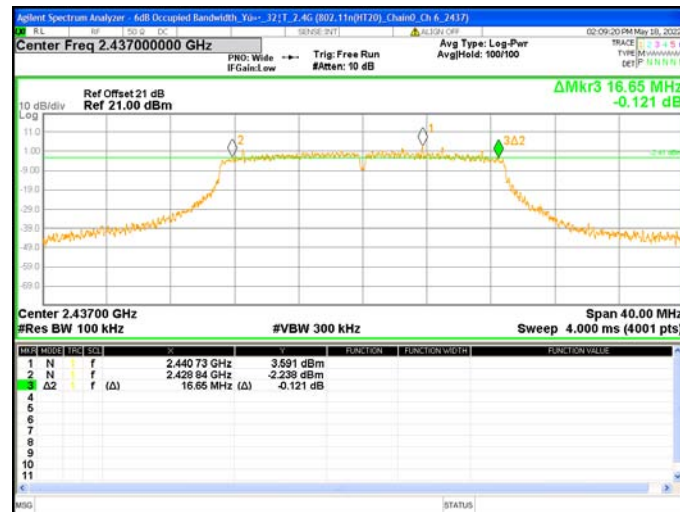

Chain0 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch11



Chain1 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch 1

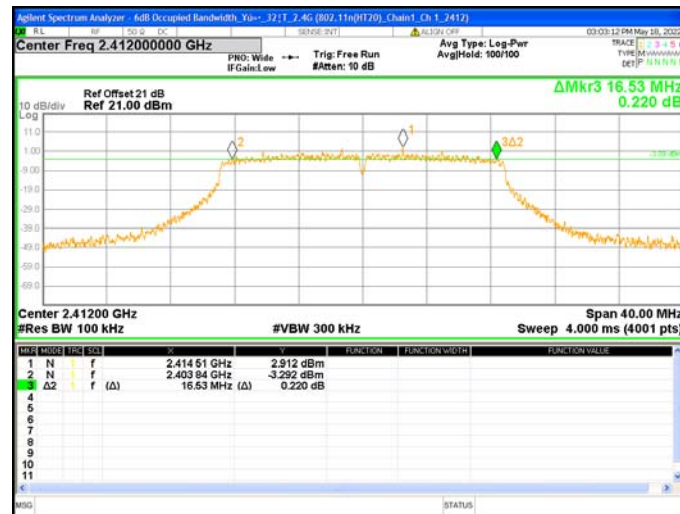

Chain1 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch 6



Chain1 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch11



Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 3



Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 6




Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 9



Chain1 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 3



Chain1 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 6

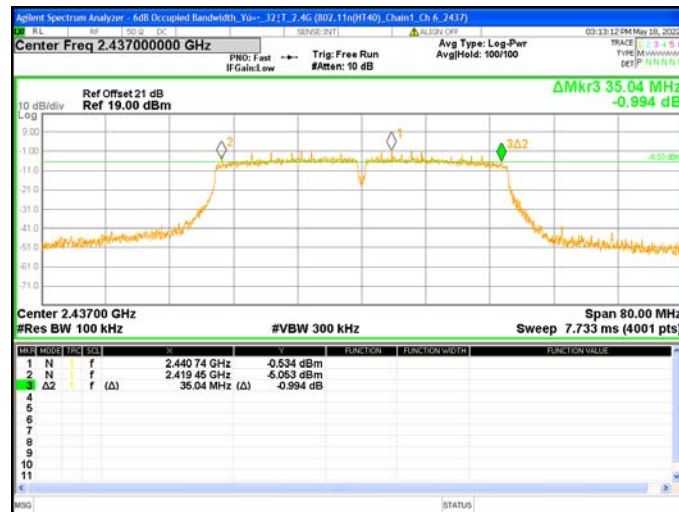

Chain1 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 9



3. Maximum Peak Conducted Output Power


3.1 Instrument Setting

Power Meter Parameter	Setting
Bandwidth	65MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak & Average

3.2 Test Procedure

The preferred methodology is to use integrated average power measurements, as described in 11.9.2 and 11.13.3 of ANSI C63.10. The peak integrated band power methods of 11.9.1.2 and 11.13.3.2 of ANSI C63.10 are not applicable for FCC compliance testing purposes.

3.3 Test Diagram

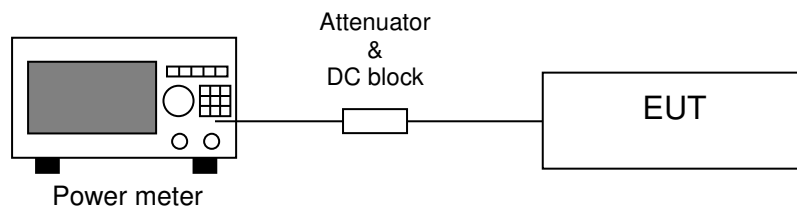

3.4 Limit

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt (30dBm)

3.5 Test Results

Temperature (°C) :	23
Relative Humidity (%) :	60
Test date :	2022/05/18
Host 1 :	67401

Mode	Ch	Frequency (MHz)	Output Power (dBm)				Output Power (mW)				Total Power (dBm)				Limit (dBm)	Margin (dB)
			Chian 0		Chain 1		Chain 0		Chian 1		AV		PK			
			AV	PK	AV	PK	AV	PK	AV	PK	0+1 (mW)	0+1 (dBm)	0+1 (mW)	0+1 (dBm)		
802.11b (Chain0+1)	1	2412	21.83	23.71	19.77	21.70	152.41	234.96	94.84	147.91	247.25	23.93	382.87	25.83	30.00	-4.17
	6	2437	21.44	23.35	19.12	21.09	139.32	216.27	81.66	128.53	220.97	23.44	344.80	25.38	30.00	-4.62
	11	2462	22.97	24.79	21.43	23.35	198.15	301.30	139.00	216.27	337.15	25.28	517.57	27.14	30.00	-2.86

Mode	Ch	Frequency (MHz)	Output Power (dBm)				Output Power (mW)				Total Power (dBm)				Limit (dBm)	Margin (dB)
			Chian 0		Chain 1		Chain 0		Chian 1		AV		PK			
			AV	PK	AV	PK	AV	PK	AV	PK	0+1 (mW)	0+1 (dBm)	0+1 (mW)	0+1 (dBm)		
802.11g (Chain0+1)	1	2412	18.11	25.56	17.04	24.60	64.71	359.75	50.58	288.40	115.30	20.62	648.15	28.12	30.00	-1.88
	6	2437	17.35	25.39	15.38	24.64	54.33	345.94	34.51	291.07	88.84	19.49	637.01	28.04	30.00	-1.96
	11	2462	17.74	26.02	16.74	24.98	59.43	399.94	47.21	314.77	106.64	20.28	714.72	28.54	30.00	-1.46

Mode	Ch	Frequency (MHz)	Output Power (dBm)				Output Power (mW)				Total Power (dBm)				Limit (dBm)	Margin (dB)
			Chian 0		Chain 1		Chain 0		Chian 1		AV		PK			
			AV	PK	AV	PK	AV	PK	AV	PK	0+1 (mW)	0+1 (dBm)	0+1 (mW)	0+1 (dBm)		
802.11n (HT20) (Chain0+1)	1	2412	16.37	24.82	15.43	23.00	43.35	303.39	34.91	199.53	78.27	18.94	502.92	27.01	30.00	-2.99
	6	2437	15.77	23.78	14.43	23.81	37.76	238.78	27.73	240.44	65.49	18.16	479.22	26.81	30.00	-3.19
	11	2462	17.93	25.92	15.88	23.65	62.09	390.84	38.73	231.74	100.81	20.04	622.58	27.94	30.00	-2.06

Mode	Ch	Frequency (MHz)	Output Power (dBm)				Output Power (mW)				Total Power (dBm)				Limit (dBm)	Margin (dB)
			Chian 0		Chain 1		Chain 0		Chian 1		AV		PK			
			AV	PK	AV	PK	AV	PK	AV	PK	0+1 (mW)	0+1 (dBm)	0+1 (mW)	0+1 (dBm)		
802.11n (HT40) (Chain0+1)	3	2422	15.86	24.83	14.77	23.53	38.55	304.09	29.99	225.42	68.54	18.36	529.51	27.24	30.00	-2.76
	6	2437	15.32	23.26	14.20	22.46	34.04	211.84	26.30	176.20	60.34	17.81	388.03	25.89	30.00	-4.11
	9	2452	16.52	24.49	15.21	23.82	44.87	281.19	33.19	240.99	78.06	18.92	522.18	27.18	30.00	-2.82

Temperature (°C) :	25
Relative Humidity (%) :	63
Test date :	2022/05/21
Host 2 :	67301

Mode	Ch	Frequency (MHz)	Output Power (dBm)				Output Power (mW)				Total Power (dBm)				Limit (dBm)	Margin (dB)
			Chian 0		Chain 1		Chain 0		Chian 1		AV		PK			
			AV	PK	AV	PK	AV	PK	AV	PK	0+1 (mW)	0+1 (dBm)	0+1 (mW)	0+1 (dBm)		
802.11b (Chain0+1)	1	2412	21.80	23.61	19.63	21.61	151.36	229.61	91.83	144.88	243.19	23.86	374.49	25.73	30.00	-4.27
	6	2437	21.43	23.20	19.10	21.01	139.00	208.93	81.28	126.18	220.28	23.43	335.11	25.25	30.00	-4.75
	11	2462	22.83	24.63	21.40	23.25	191.87	290.40	138.04	211.35	329.91	25.18	501.75	27.00	30.00	-3.00

Mode	Ch	Frequency (MHz)	Output Power (dBm)				Output Power (mW)				Total Power (dBm)				Limit (dBm)	Margin (dB)
			Chian 0		Chain 1		Chain 0		Chian 1		AV		PK			
			AV	PK	AV	PK	AV	PK	AV	PK	0+1 (mW)	0+1 (dBm)	0+1 (mW)	0+1 (dBm)		
802.11g (Chain0+1)	1	2412	18.03	25.31	17.00	24.51	63.53	339.63	50.12	282.49	113.65	20.56	622.11	27.94	30.00	-2.06
	6	2437	17.22	25.16	15.18	24.52	52.72	328.10	32.96	283.14	85.68	19.33	611.23	27.86	30.00	-2.14
	11	2462	17.63	25.93	16.53	24.91	57.94	391.74	44.98	309.74	102.92	20.13	701.48	28.46	30.00	-1.54

Mode	Ch	Frequency (MHz)	Output Power (dBm)				Output Power (mW)				Total Power (dBm)				Limit (dBm)	Margin (dB)
			Chian 0		Chain 1		Chain 0		Chian 1		AV		PK			
			AV	PK	AV	PK	AV	PK	AV	PK	0+1 (mW)	0+1 (dBm)	0+1 (mW)	0+1 (dBm)		
802.11n (HT20) (Chain0+1)	1	2412	16.24	24.80	15.26	22.95	42.07	302.00	33.57	197.24	75.65	18.79	499.24	26.98	30.00	-3.02
	6	2437	15.61	23.63	14.25	23.77	36.39	230.67	26.61	238.23	63.00	17.99	468.91	26.71	30.00	-3.29
	11	2462	17.86	25.82	15.71	23.43	61.09	381.94	37.24	220.29	98.33	19.93	602.24	27.80	30.00	-2.20

Mode	Ch	Frequency (MHz)	Output Power (dBm)				Output Power (mW)				Total Power (dBm)				Limit (dBm)	Margin (dB)
			Chian 0		Chain 1		Chain 0		Chian 1		AV		PK			
			AV	PK	AV	PK	AV	PK	AV	PK	0+1 (mW)	0+1 (dBm)	0+1 (mW)	0+1 (dBm)		
802.11n (HT40) (Chain0+1)	3	2422	15.71	24.63	14.63	23.41	37.24	290.40	29.04	219.28	66.28	18.21	509.68	27.07	30.00	-2.93
	6	2437	15.30	23.16	14.18	22.14	33.88	207.01	26.18	163.68	60.07	17.79	370.70	25.69	30.00	-4.31
	9	2452	16.51	24.32	15.18	23.73	44.77	270.40	32.96	236.05	77.73	18.91	506.44	27.05	30.00	-2.95

4. Power Spectral Density


4.1 Instrument Setting

Spectrum Function	Setting
Detector	Peak
RBW	≥ 3 kHz
VBW	$\geq 3 \times$ RBW
Sweep	Auto couple
Trace	Max hold
Span	1.5 times $\times$ 6dB bandwidth
Attenuation	Auto

4.2 Test Procedure

Step 1	Test procedure refer to subclause 11.10 of ANSI C63.10.
Step 2	Using the maximum conducted output power in the fundamental emission demonstrates compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
Step 3	Use the peak marker function to determine the maximum amplitude level within the RBW.

4.3 Test Diagram

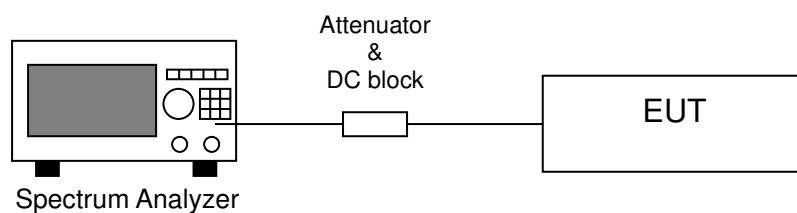

4.4 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 10 kHz band during any time interval of continuous transmission

TEST REPORT

4.5 Test Results

Temperature (°C) :	23
Relative Humidity (%) :	60
Test date :	2022/05/18
Host 1 :	67401


Mode	Channel	Frequency (MHz)	PSD (dBm)		Total PSD		Limit (dBm)	Margin (dB)
			Chain0	Chain1	mW	dBm		
802.11b (Chain0+1)	1	2412	5.061	3.764	5.59	7.47	8	-0.529
	6	2437	4.931	3.438	5.32	7.26	8	-0.741
	11	2462	5.150	3.761	5.65	7.52	8	-0.479

Mode	Channel	Frequency (MHz)	PSD (dBm)		Total PSD		Limit (dBm)	Margin (dB)
			Chain0	Chain1	mW	dBm		
802.11g (Chain0+1)	1	2412	-2.696	-3.888	0.95	-0.24	8	-8.241
	6	2437	-3.440	-4.536	0.80	-0.94	8	-8.943
	11	2462	-1.991	-3.041	1.13	0.53	8	-7.474


Mode	Channel	Frequency (MHz)	PSD (dBm)		Total PSD		Limit (dBm)	Margin (dB)
			Chain0	Chain1	mW	dBm		
802.11n(HT20) (Chain0+1)	1	2412	-3.854	-5.017	0.73	-1.39	8	-9.386
	6	2437	-4.622	-5.786	0.61	-2.15	8	-10.155
	11	2462	-3.168	-4.550	0.83	-0.79	8	-8.794

Mode	Channel	Frequency (MHz)	PSD (dBm)		Total PSD		Limit (dBm)	Margin (dB)
			Chain0	Chain1	mW	dBm		
802.11n(HT40) (Chain0+1)	3	2422	-6.735	-8.014	0.37	-4.32	8	-12.317
	6	2437	-7.542	-8.570	0.32	-5.02	8	-13.015
	9	2452	-0.787	-7.331	1.02	0.08	8	-7.918

Chain0 : Power Spectral Density @ 802.11b Mode Ch 1

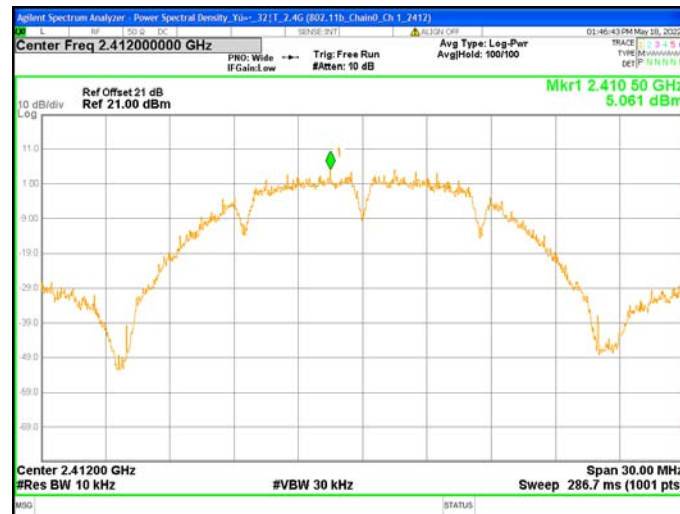

Chain0 : Power Spectral Density @ 802.11b Mode Ch 6

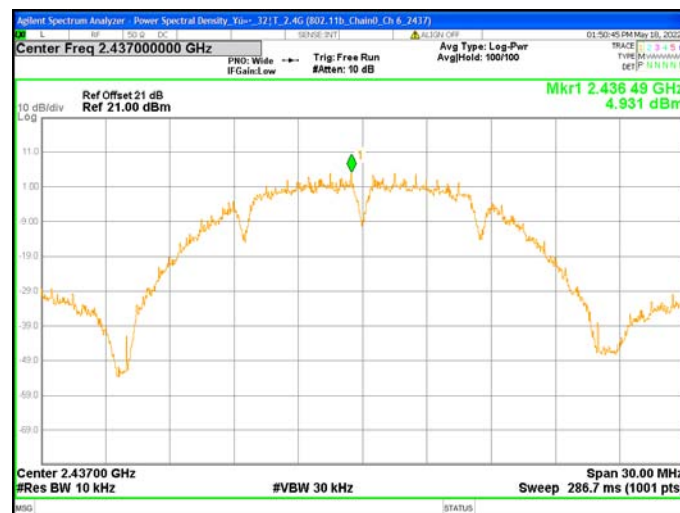

Chain0 : Power Spectral Density @ 802.11b Mode Ch11



Chain1 : Power Spectral Density @ 802.11b Mode Ch 1



Chain1 : Power Spectral Density @ 802.11b Mode Ch 6



Chain1 : Power Spectral Density @ 802.11b Mode Ch11



Chain0 : Power Spectral Density @ 802.11g Mode Ch 1



Chain0 : Power Spectral Density @ 802.11g Mode Ch 6



Chain0 : Power Spectral Density @ 802.11g Mode Ch11



Chain1 : Power Spectral Density @ 802.11g Mode Ch 1




Chain1 : Power Spectral Density @ 802.11g Mode Ch 6



Chain1 : Power Spectral Density @ 802.11g Mode Ch11




Chain0 : Power Spectral Density @ 802.11n(HT20) Mode Ch 1

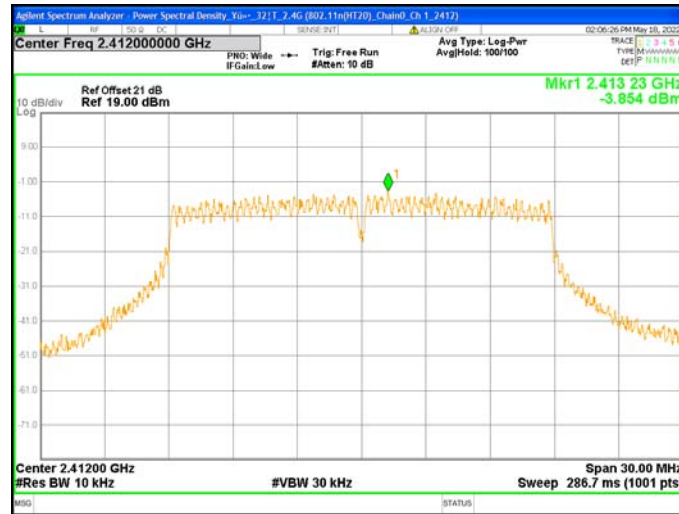


Chain0 : Power Spectral Density @ 802.11n(HT20) Mode Ch 6



Chain0 : Power Spectral Density @ 802.11n(HT20) Mode Ch11

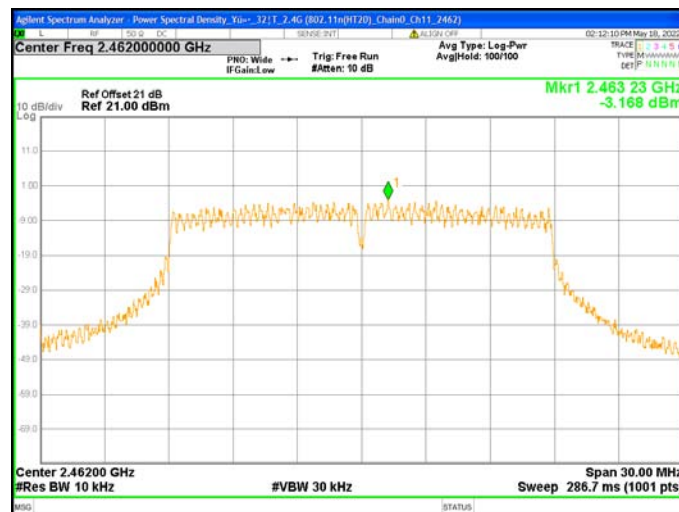

Chain1 : Power Spectral Density @ 802.11n(HT20) Mode Ch 1

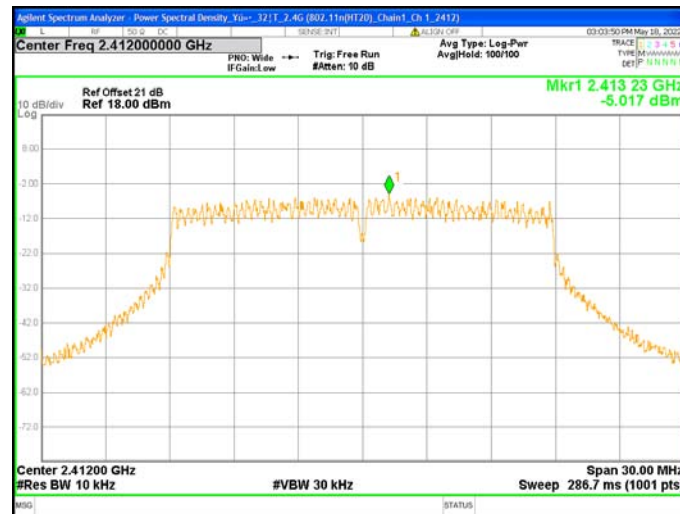


Chain1 : Power Spectral Density @ 802.11n(HT20) Mode Ch 6




Chain1 : Power Spectral Density @ 802.11n(HT20) Mode Ch11



Chain0 : Power Spectral Density @ 802.11n(HT40) Mode Ch 3

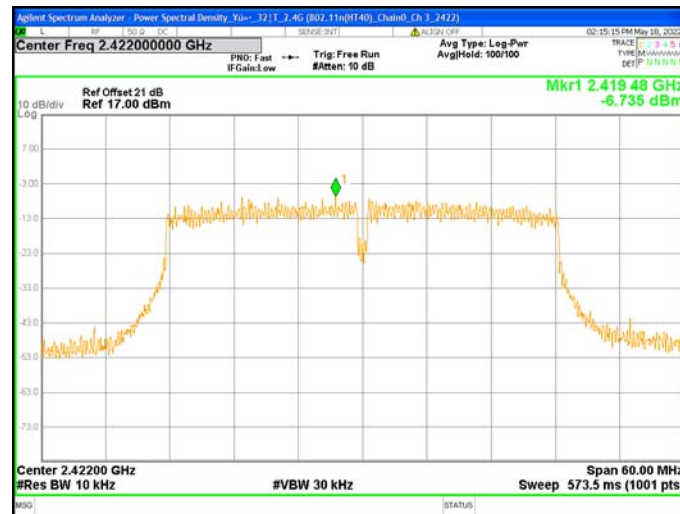


Chain0 : Power Spectral Density @ 802.11n(HT40) Mode Ch 6

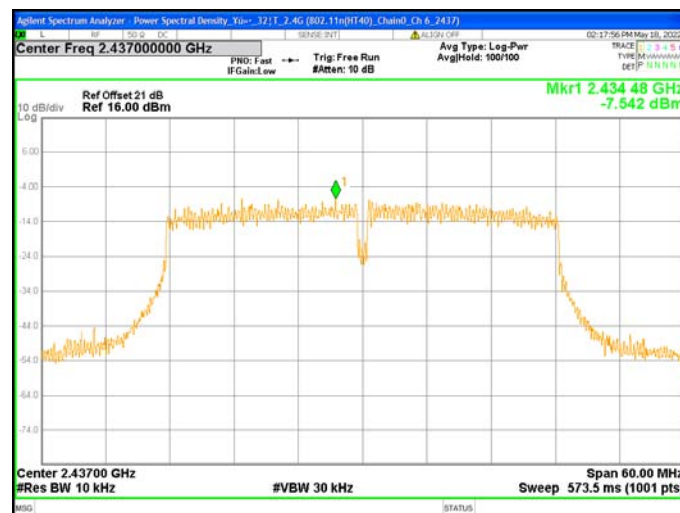

Chain0 : Power Spectral Density @ 802.11n(HT40) Mode Ch 9




Chain1 : Power Spectral Density @ 802.11n(HT40) Mode Ch 3

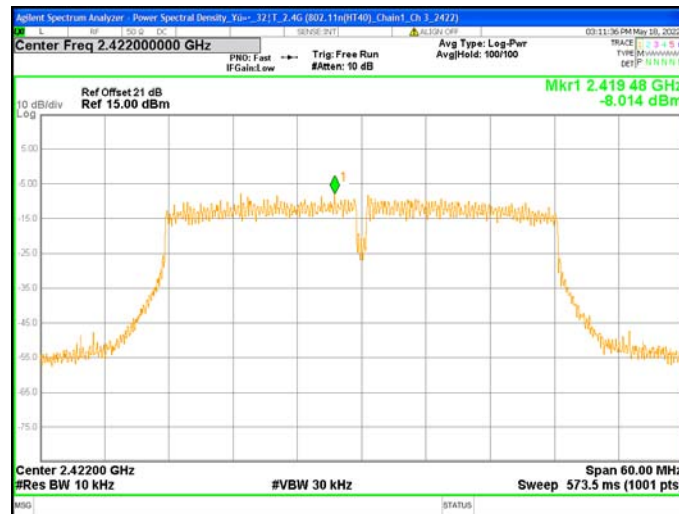

Chain1 : Power Spectral Density @ 802.11n(HT40) Mode Ch 6



Chain1 : Power Spectral Density @ 802.11n(HT40) Mode Ch 9

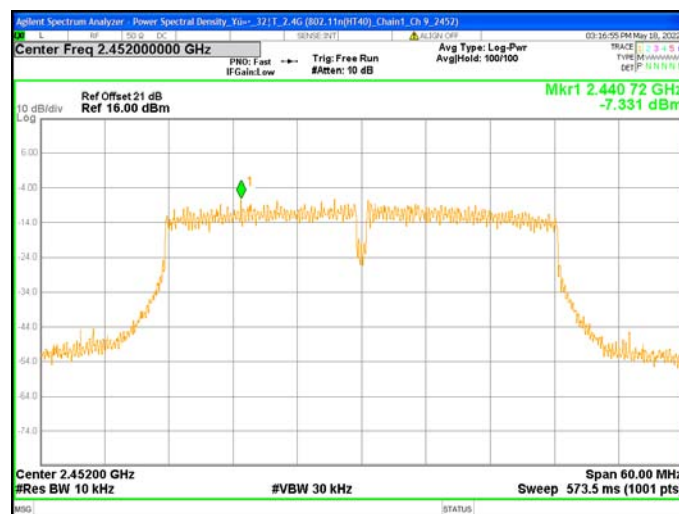

5. Emissions in Non-Restricted Frequency Bands


5.1 Instruments Setting

Spectrum Function	Setting (Reference Level)	Setting (Emission Level)
Detector	Peak	Peak
RBW	≥ 100 kHz	≥ 100 kHz
VBW	$\geq 3 \times$ RBW	$\geq 3 \times$ RBW
Sweep	Auto couple	Auto couple
Trace	Max hold	Max hold
Span	≥ 1.5 time 6dB bandwidth	
Attenuation	Auto	Auto

5.2 Test Procedure

- Step 1 The procedure was used in antenna-port conducted and connected to the spectrum analyzer.
- Step 2 Set instrument center frequency to center frequency.
- Step 3 Use the parameter configured in subclause 11.11 of ANSI C63.10 to measure.
- Step 4 Use the peak marker function to determine the maximum amplitude level.

5.3 Test Diagram

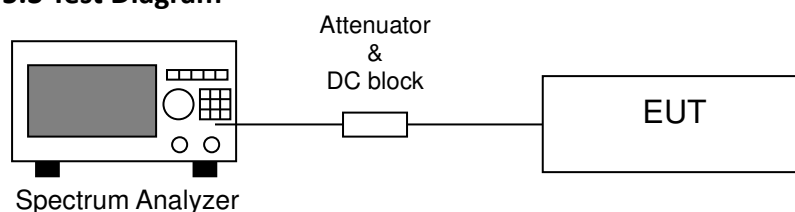

5.4 Limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz


5.5 Test Results

Temperature (°C) :	23
Relative Humidity (%) :	60
Test date :	2022/05/18
Host 1 :	67401


Chain0 : Conducted Spurious @ 802.11b Mode Ch 1



Chain0 : Conducted Spurious @ 802.11b Mode Ch 1

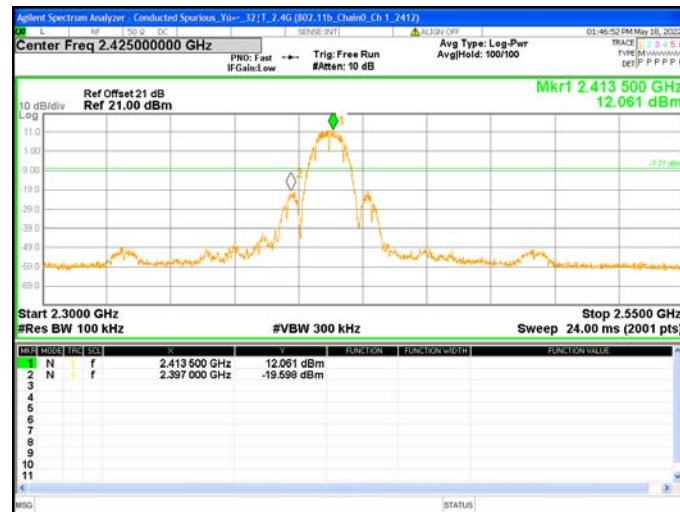

Chain0 : Conducted Spurious @ 802.11b Mode Ch 1

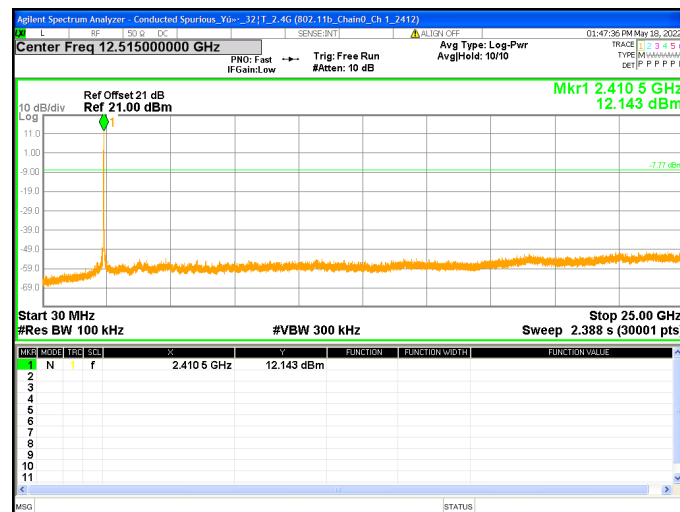


Chain0 : Conducted Spurious @ 802.11b Mode Ch 6



Chain0 : Conducted Spurious @ 802.11b Mode Ch 6




Chain0 : Conducted Spurious @ 802.11b Mode Ch 6

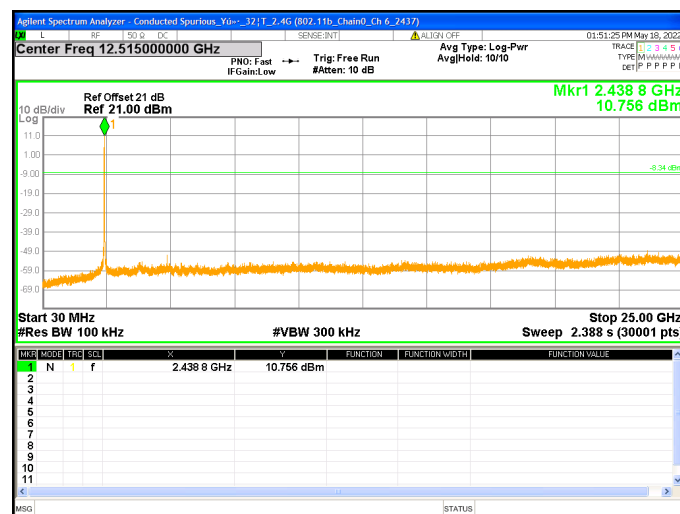


Chain0 : Conducted Spurious @ 802.11b Mode Ch11




Chain0 : Conducted Spurious @ 802.11b Mode Ch11

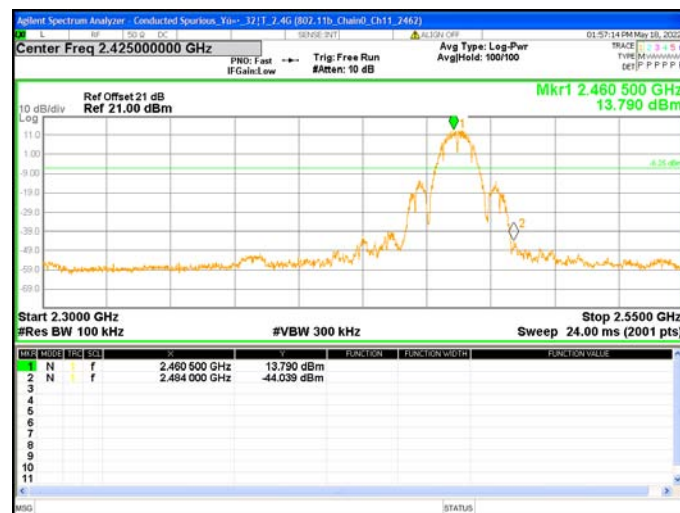


Chain0 : Conducted Spurious @ 802.11b Mode Ch11

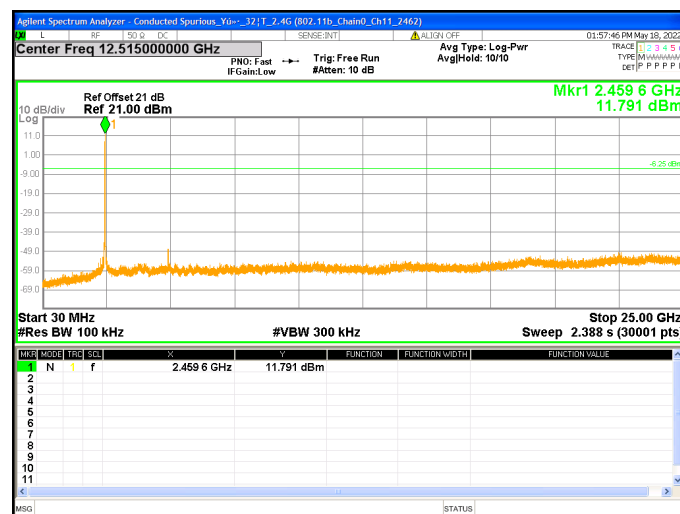


Chain1 : Conducted Spurious @ 802.11b Mode Ch 1

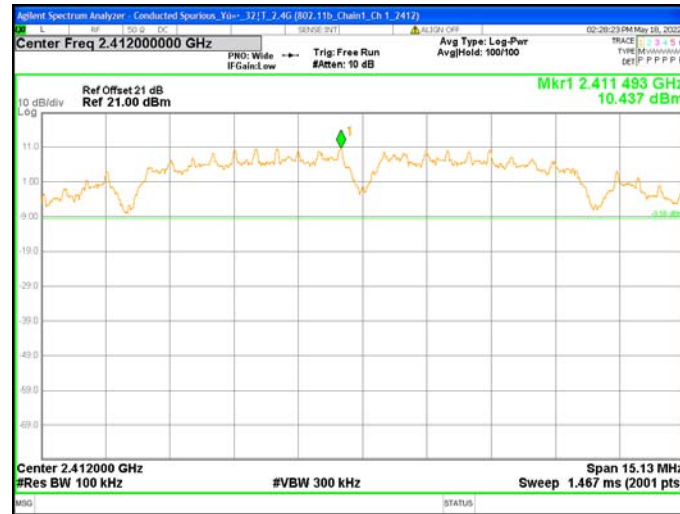

Chain1 : Conducted Spurious @ 802.11b Mode Ch 1

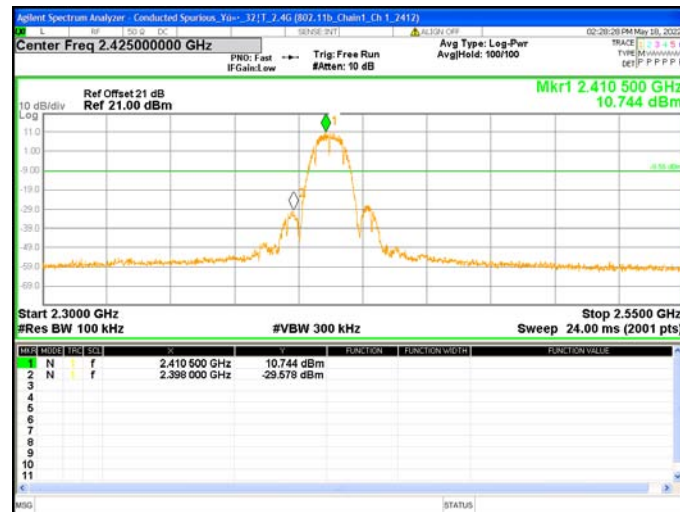


Chain1 : Conducted Spurious @ 802.11b Mode Ch 1

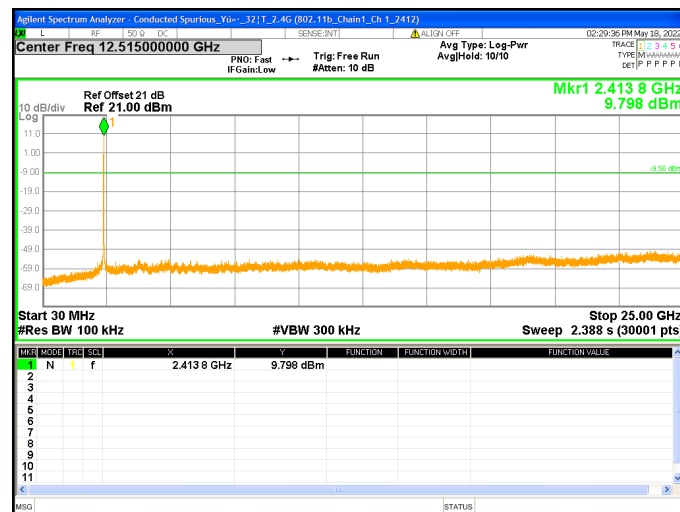


Chain1 : Conducted Spurious @ 802.11b Mode Ch 6



Chain1 : Conducted Spurious @ 802.11b Mode Ch 6

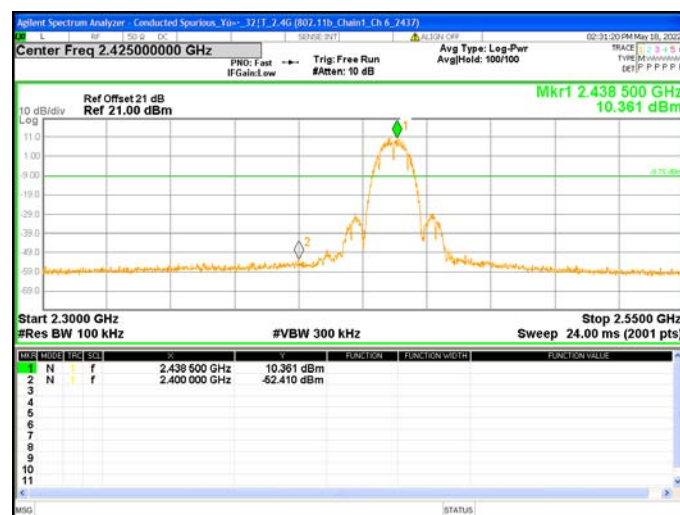


Chain1 : Conducted Spurious @ 802.11b Mode Ch 6

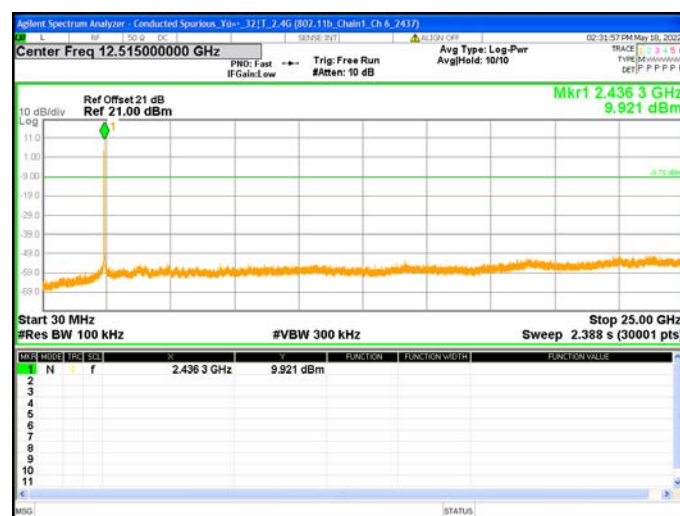


Chain1 : Conducted Spurious @ 802.11b Mode Ch11




Chain1 : Conducted Spurious @ 802.11b Mode Ch11

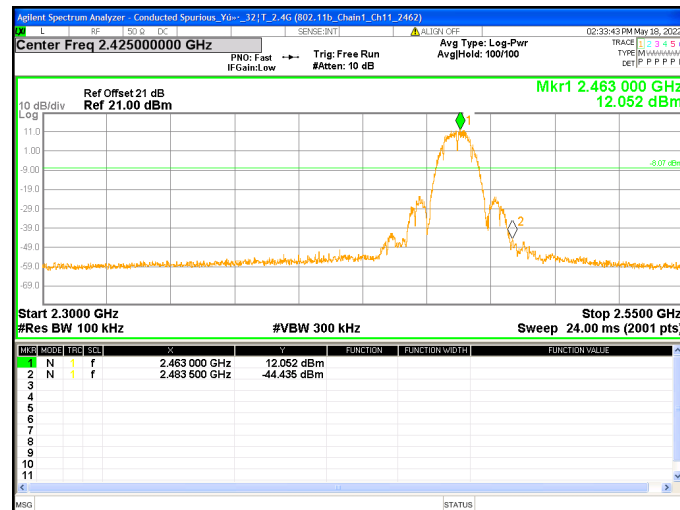


Chain1 : Conducted Spurious @ 802.11b Mode Ch11

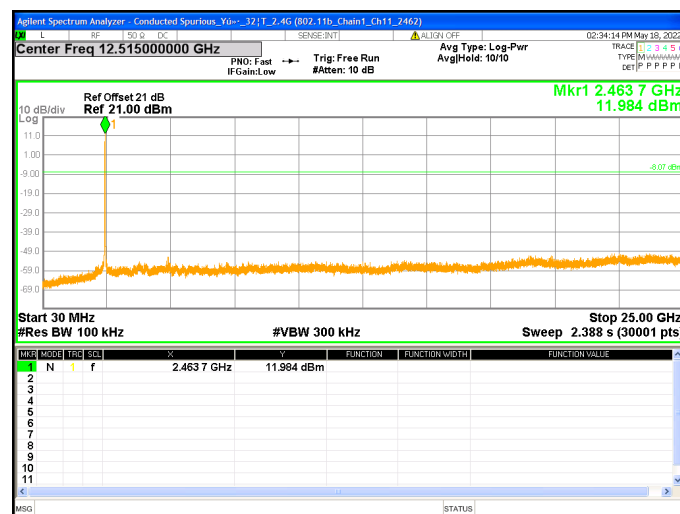


Chain0 : Conducted Spurious @ 802.11g Mode Ch 1

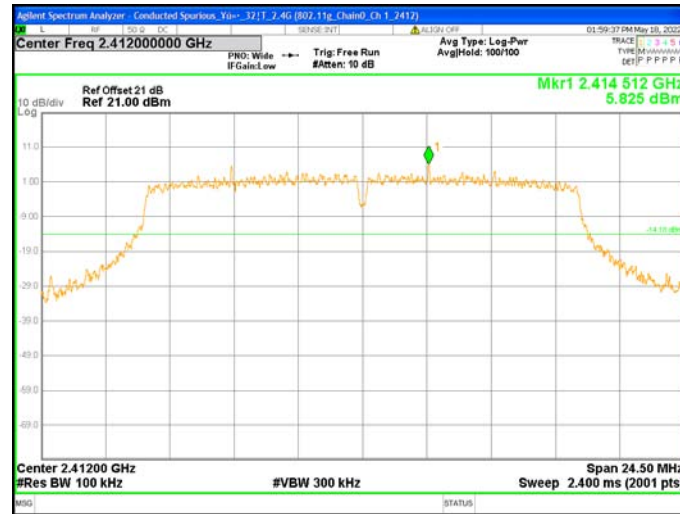

Chain0 : Conducted Spurious @ 802.11g Mode Ch 1

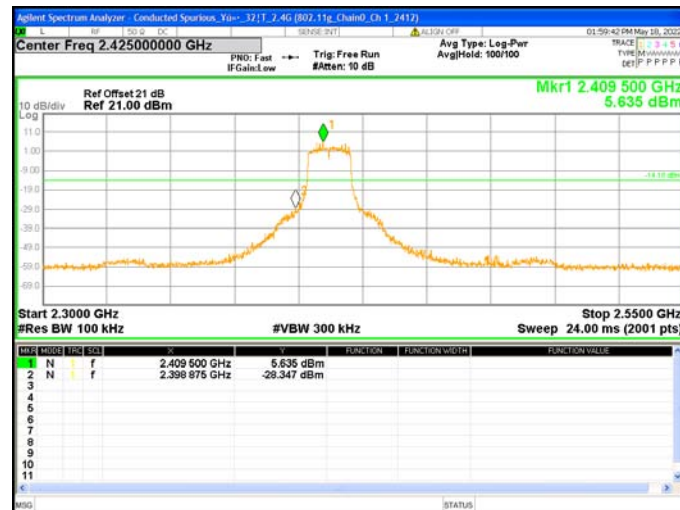


Chain0 : Conducted Spurious @ 802.11g Mode Ch 1

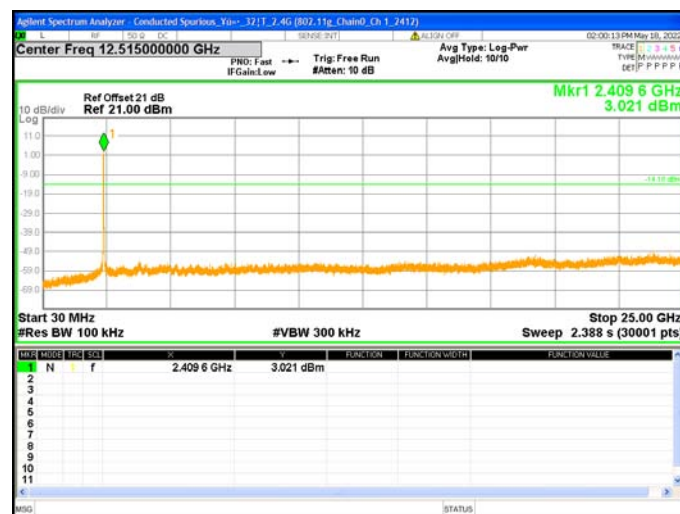


Chain0 : Conducted Spurious @ 802.11g Mode Ch 6



Chain0 : Conducted Spurious @ 802.11g Mode Ch 6

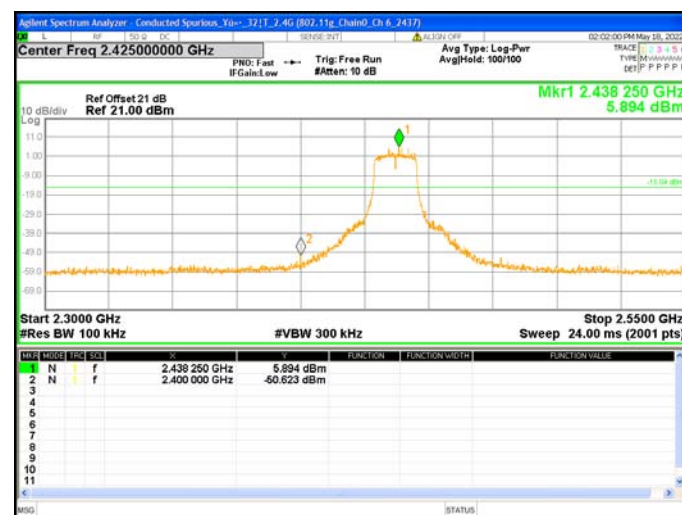


Chain0 : Conducted Spurious @ 802.11g Mode Ch 6

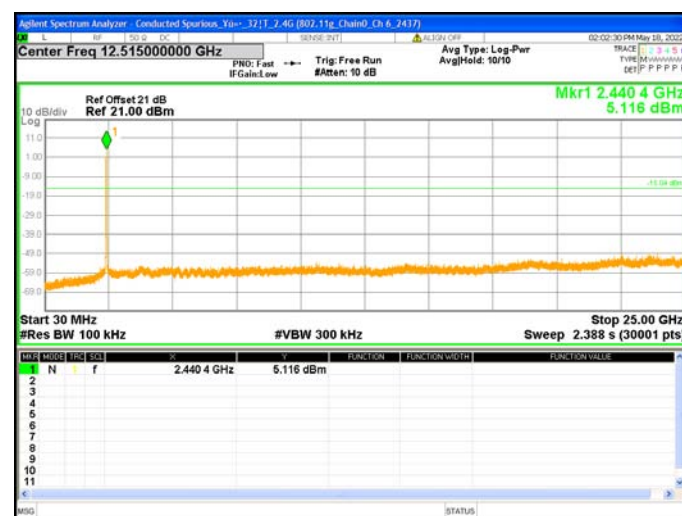


Chain0 : Conducted Spurious @ 802.11g Mode Ch11




Chain0 : Conducted Spurious @ 802.11g Mode Ch11

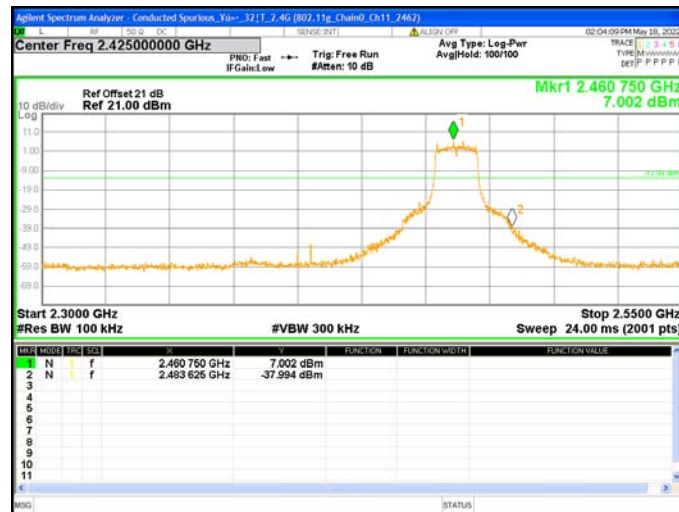


Chain0 : Conducted Spurious @ 802.11g Mode Ch11

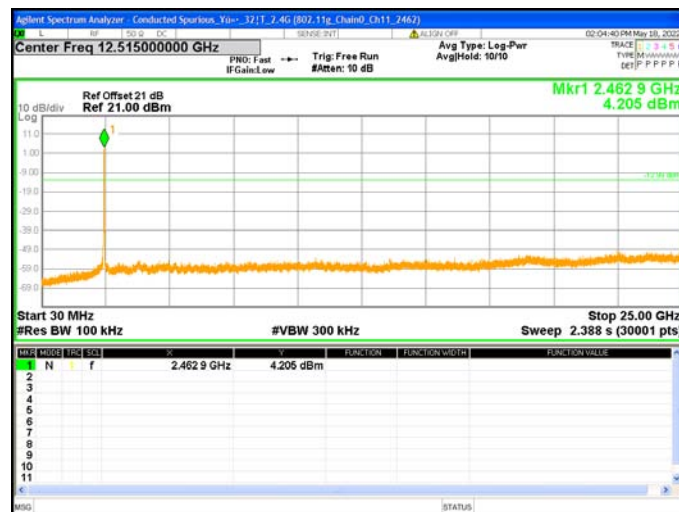


Chain1 : Conducted Spurious @ 802.11g Mode Ch 1

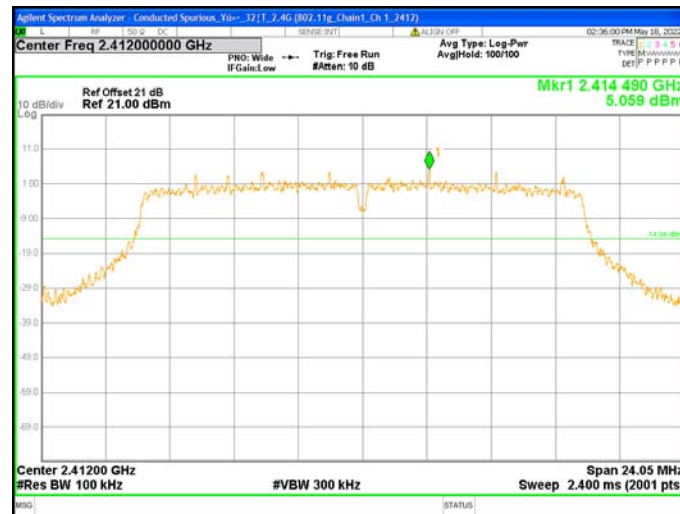

Chain1 : Conducted Spurious @ 802.11g Mode Ch 1

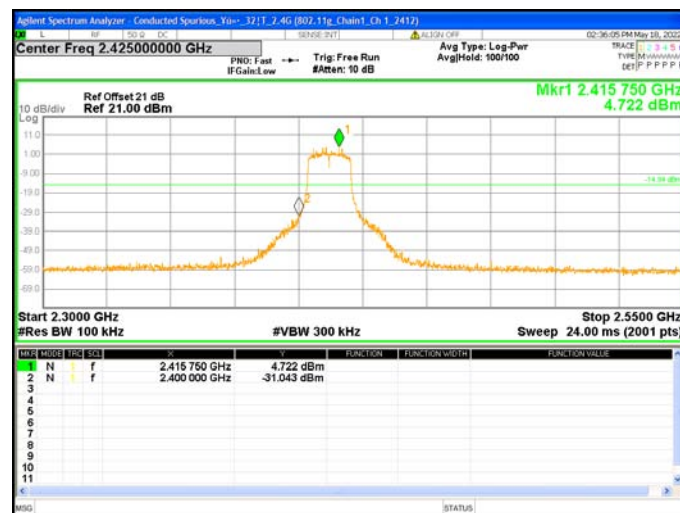


Chain1 : Conducted Spurious @ 802.11g Mode Ch 1

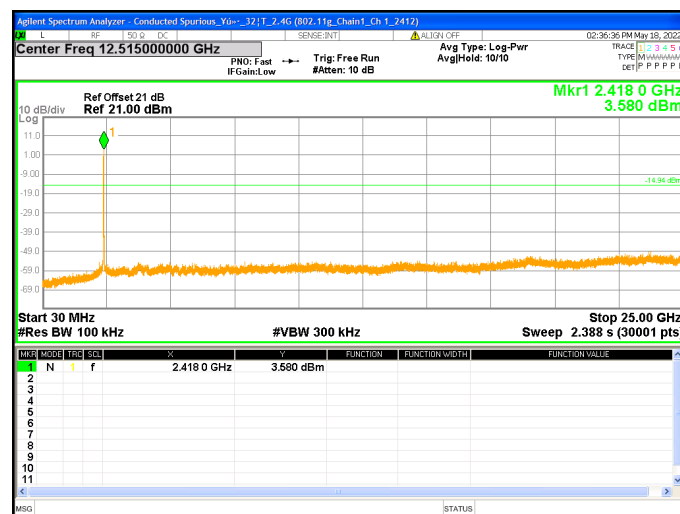


Chain1 : Conducted Spurious @ 802.11g Mode Ch 6




Chain1 : Conducted Spurious @ 802.11g Mode Ch 6

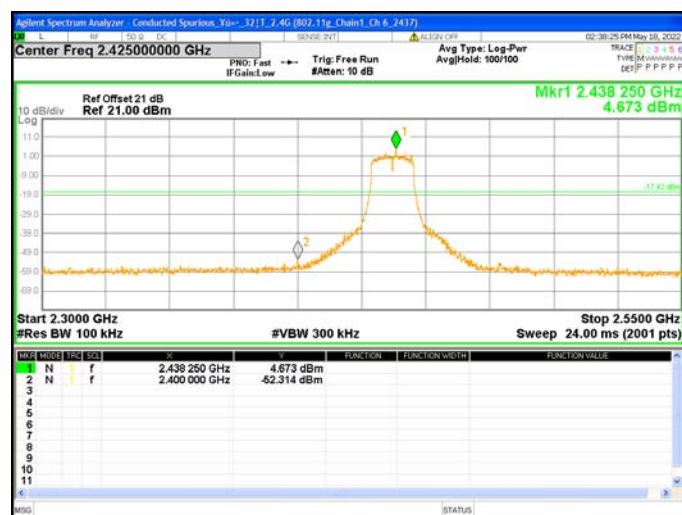


Chain1 : Conducted Spurious @ 802.11g Mode Ch 6

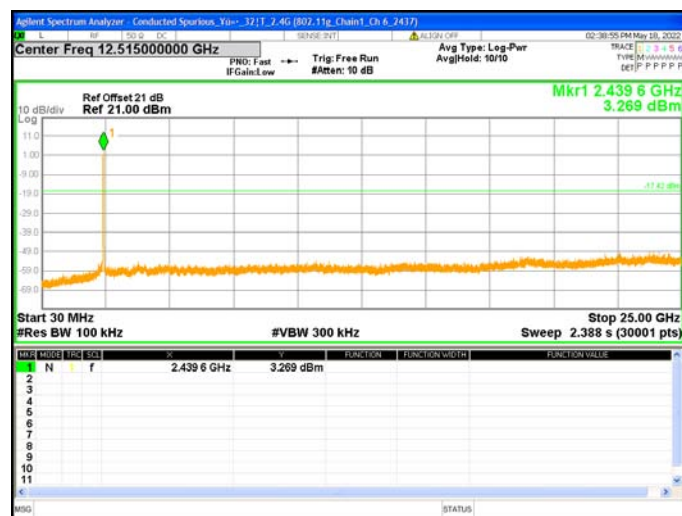


Chain1 : Conducted Spurious @ 802.11g Mode Ch11

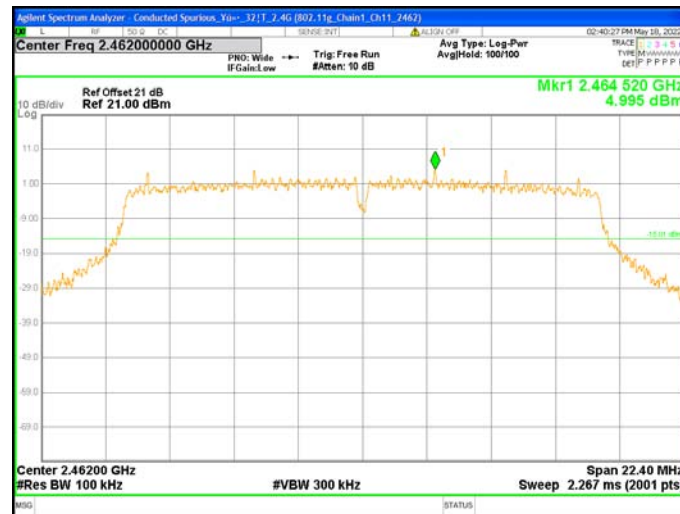

Chain1 : Conducted Spurious @ 802.11g Mode Ch11

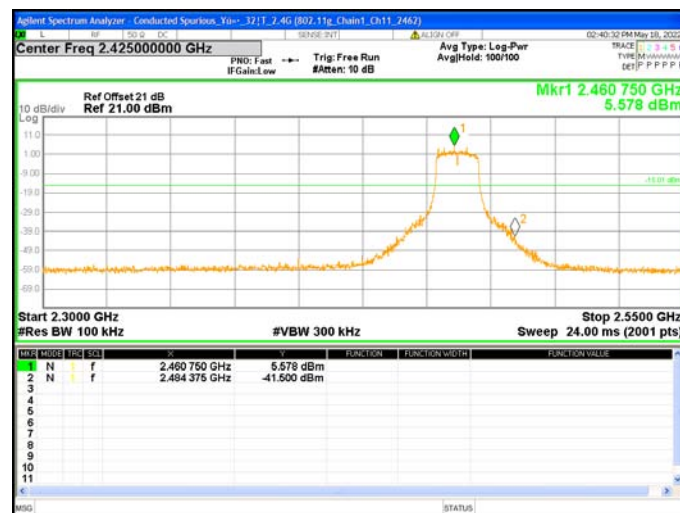


Chain1 : Conducted Spurious @ 802.11g Mode Ch11

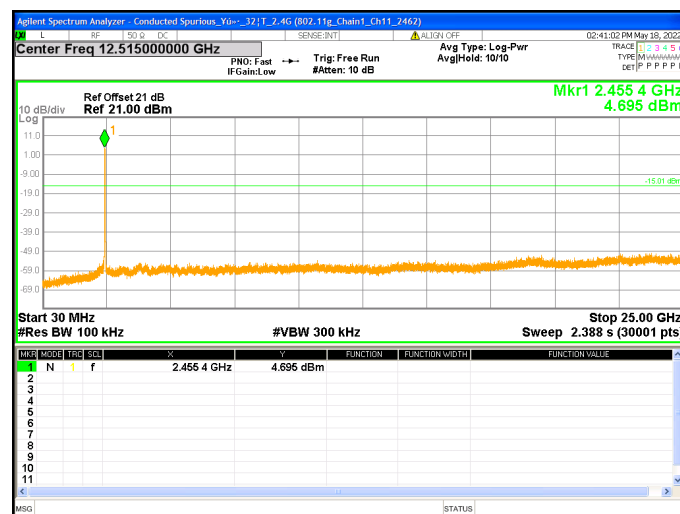


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1



Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

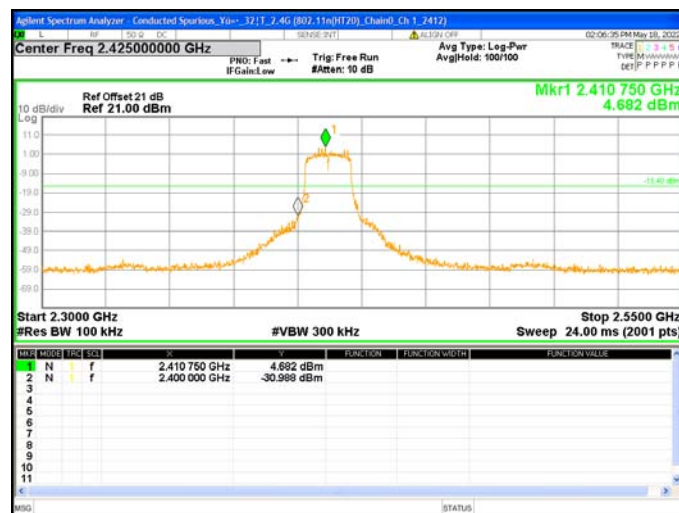


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

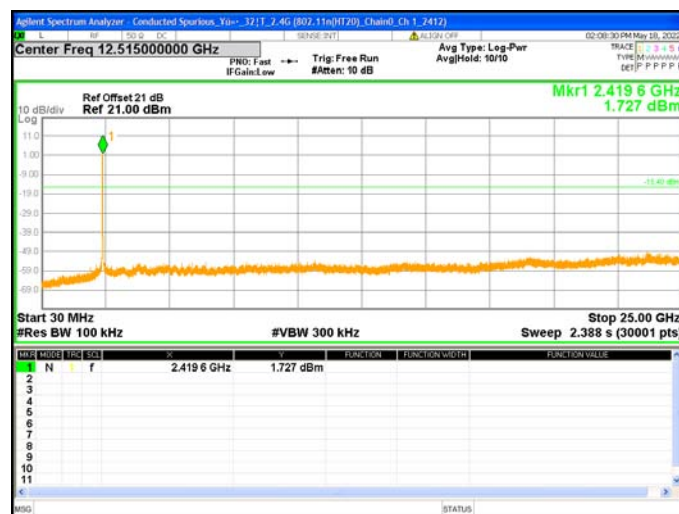


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6




Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

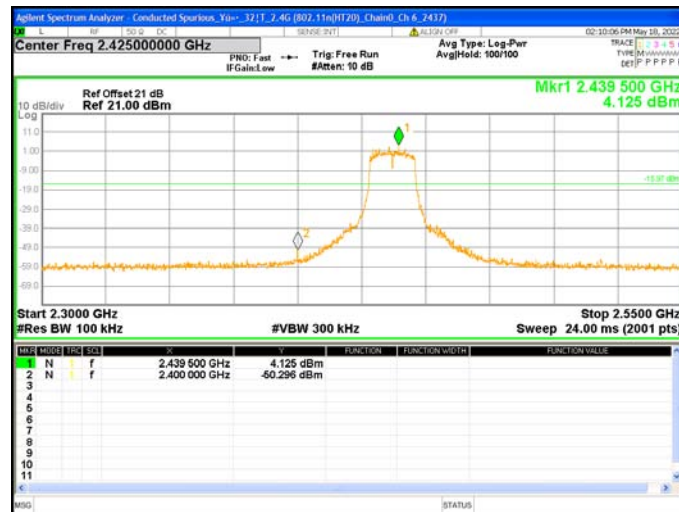


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

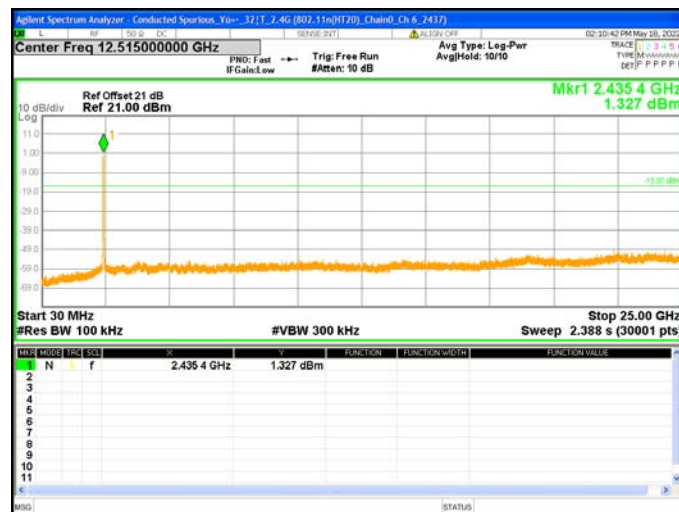


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

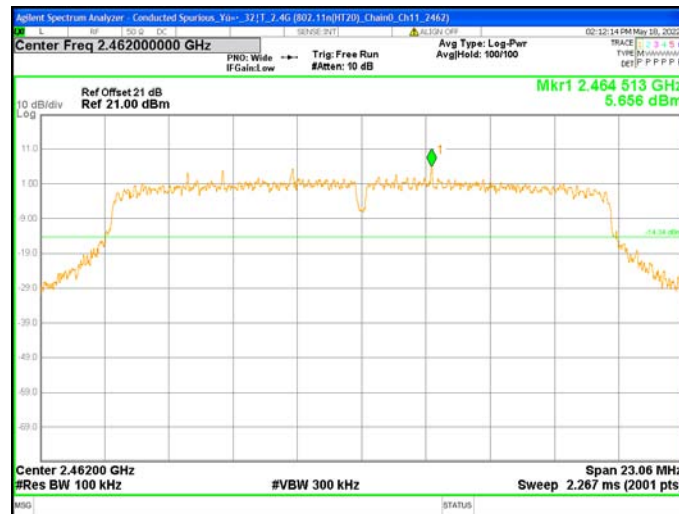


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

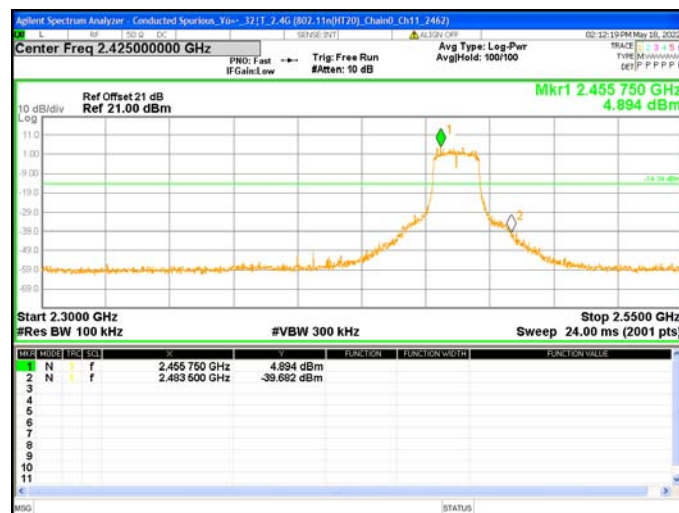


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

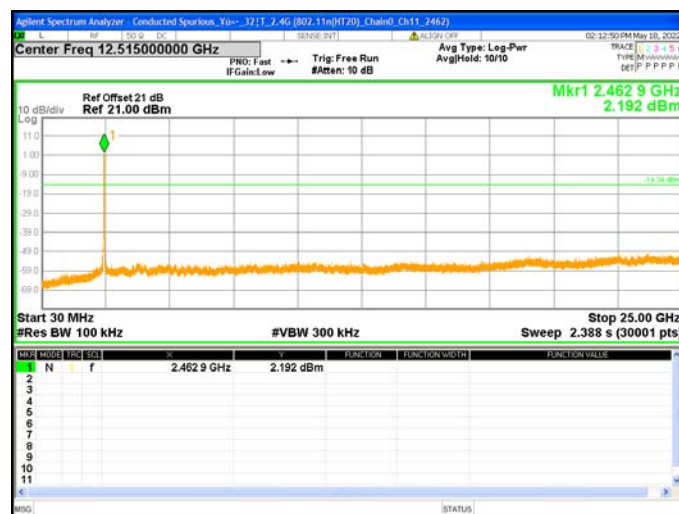


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

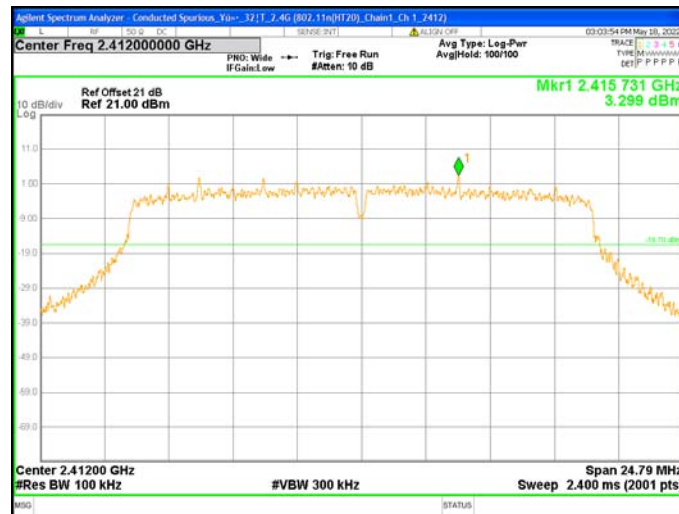

Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

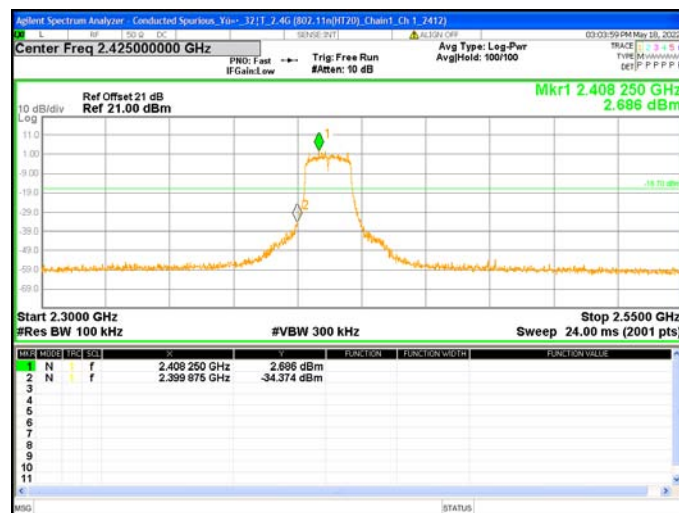


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

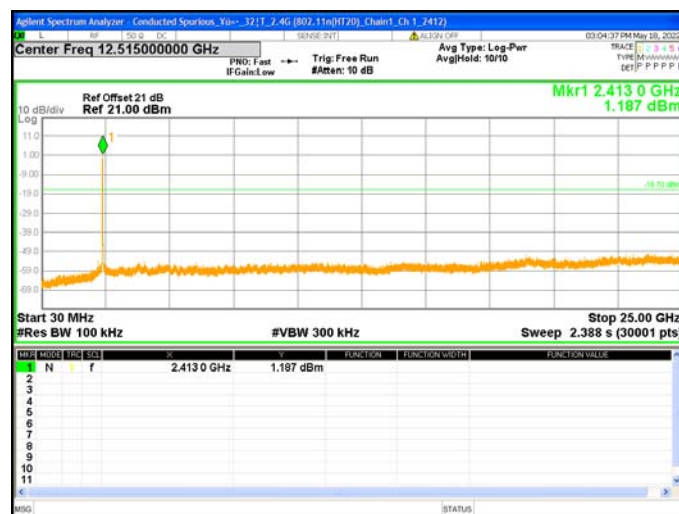


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6



Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

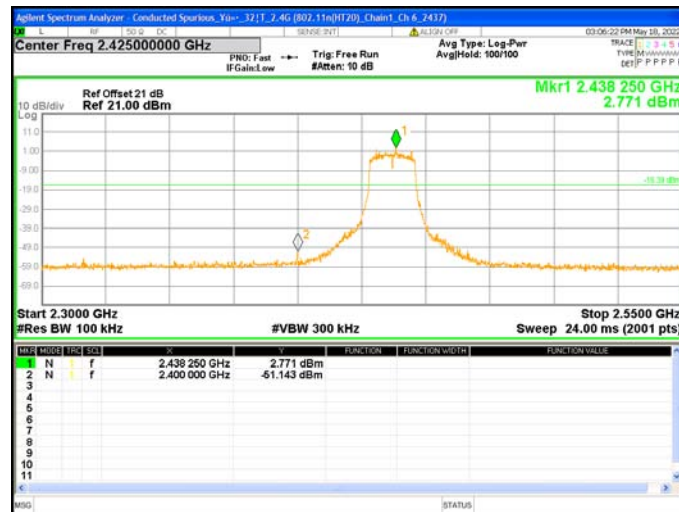


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

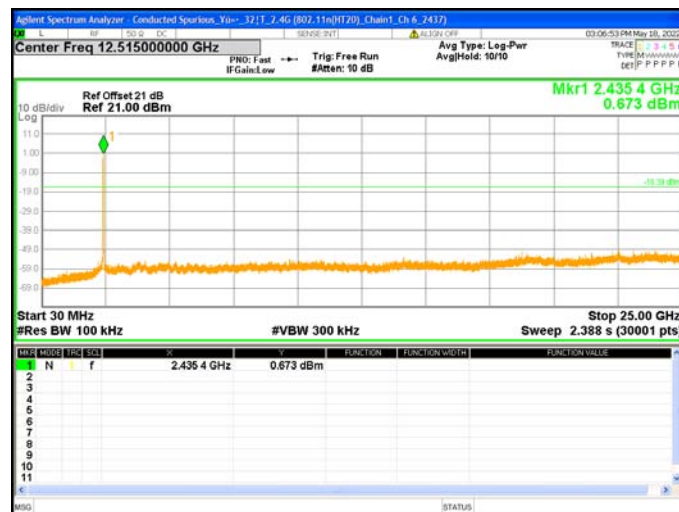


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch11



Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

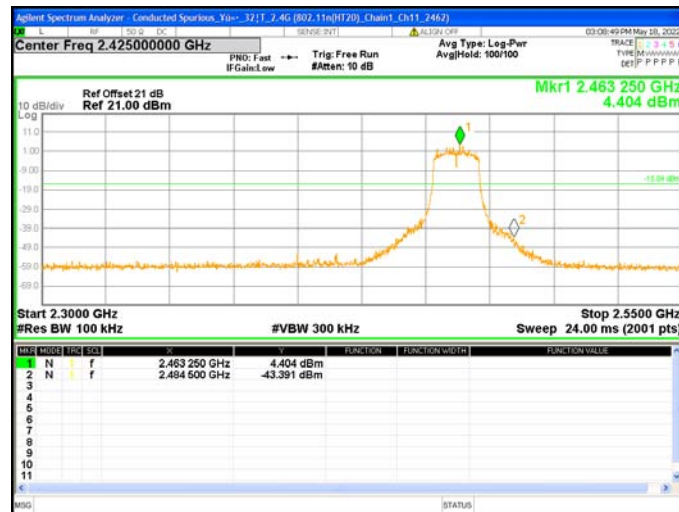


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

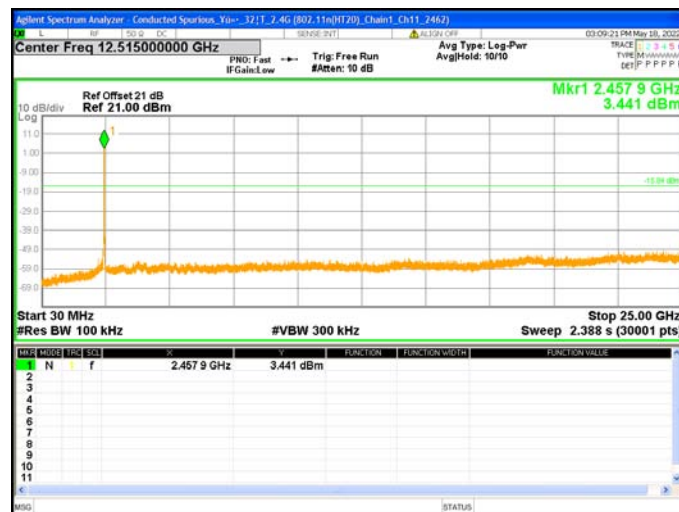


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3



Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3

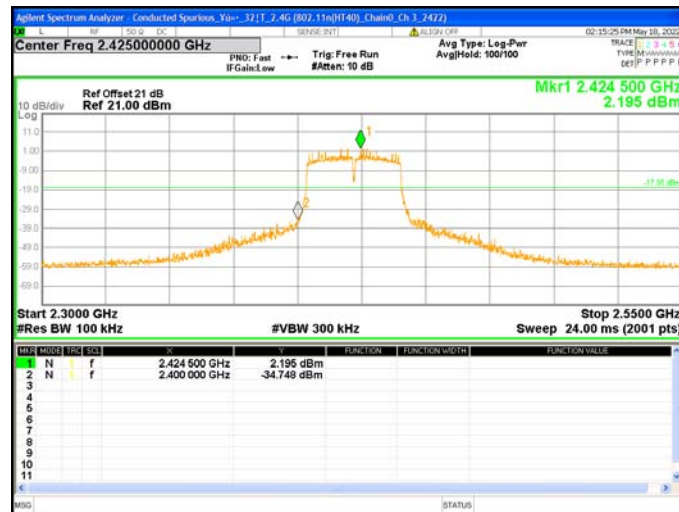


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3

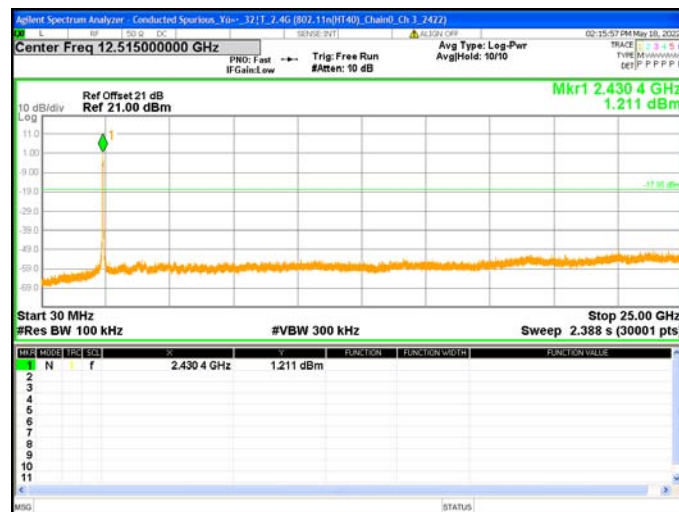


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6




Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6

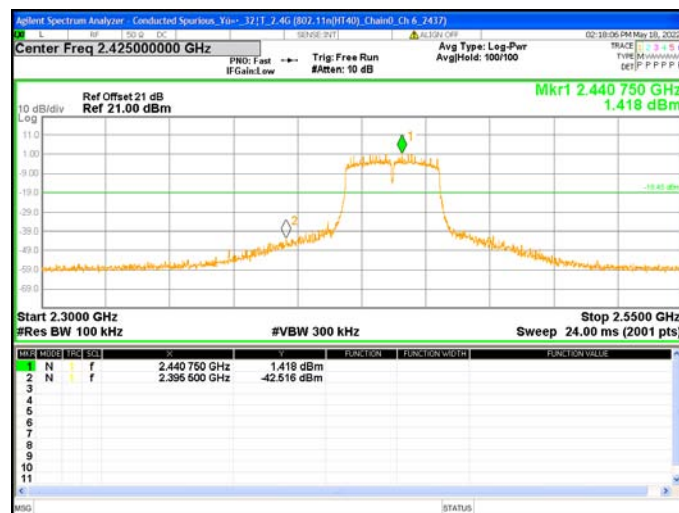


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6

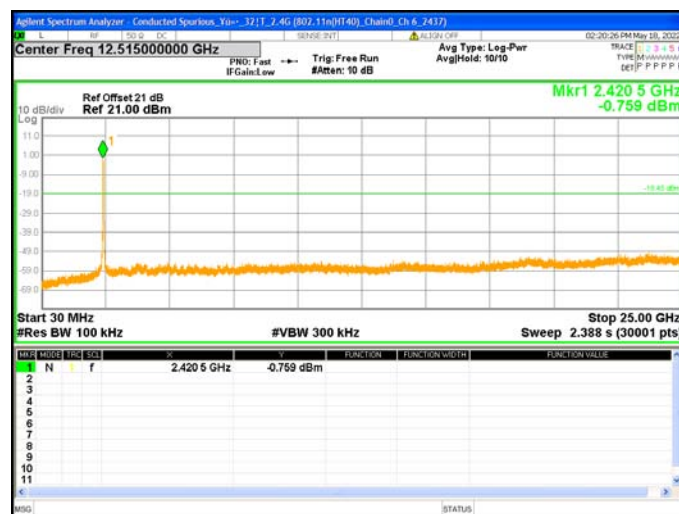


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

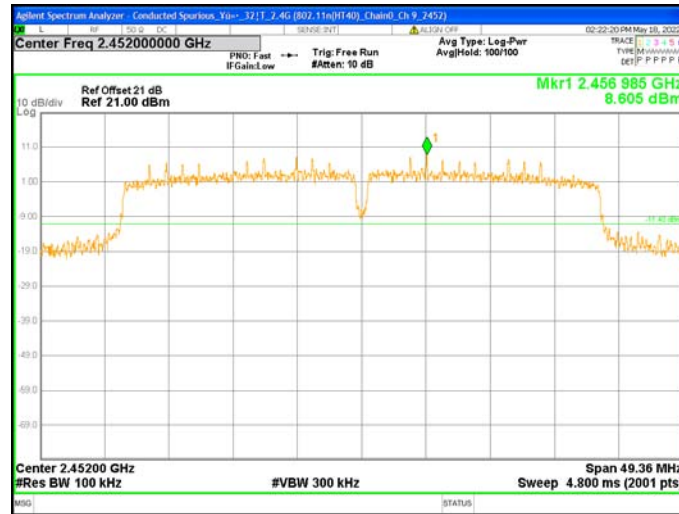


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

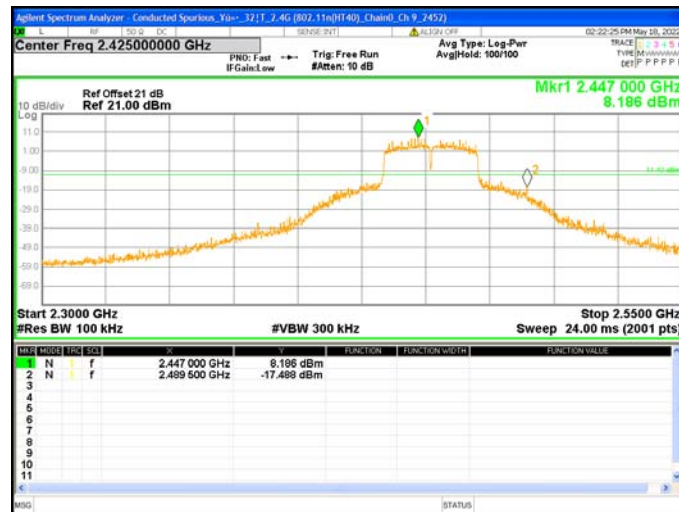


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

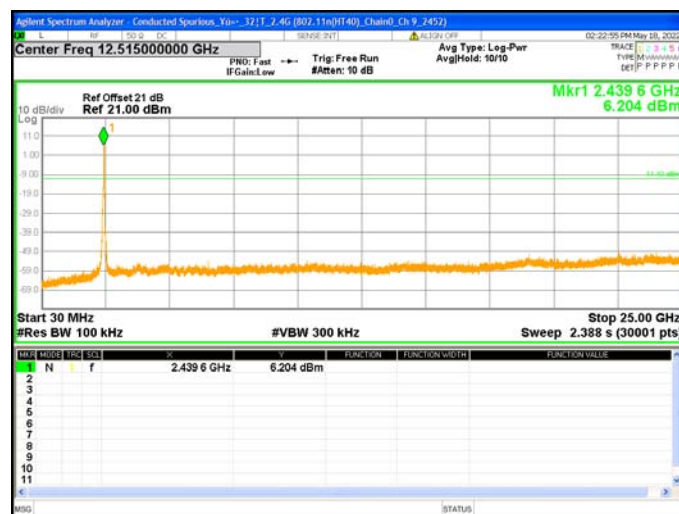


Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3

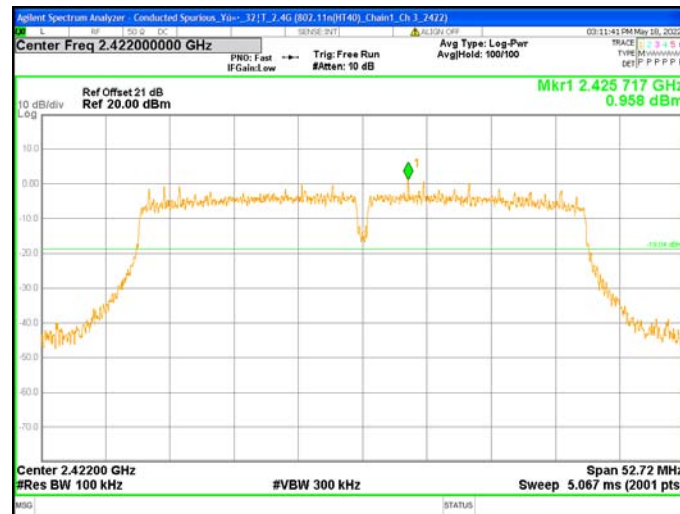

Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3

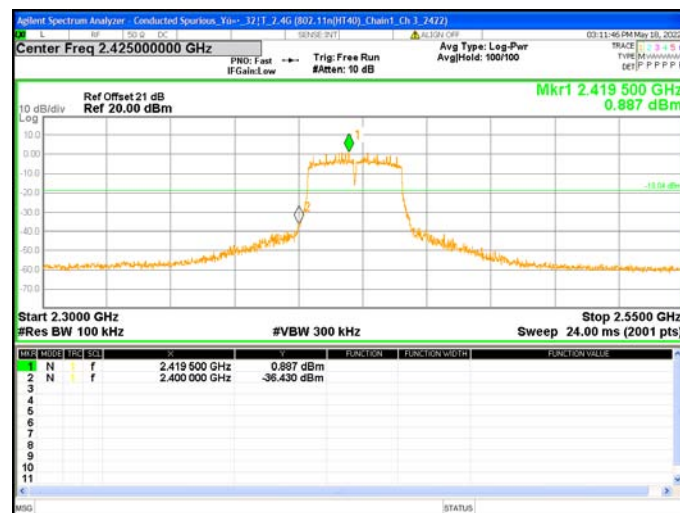


Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3

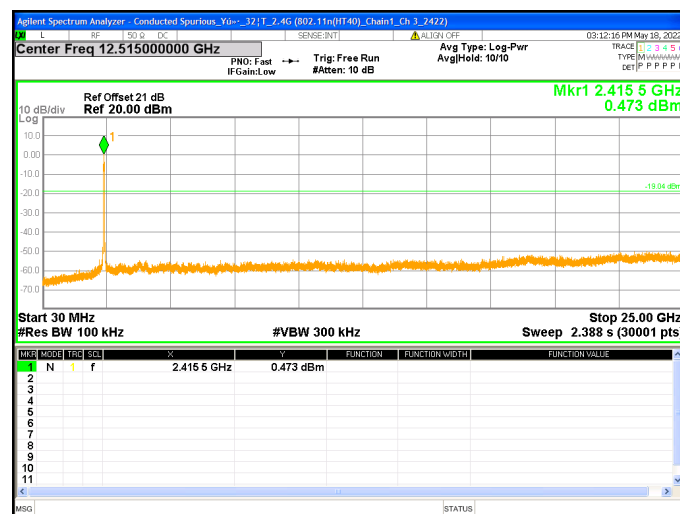


Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6




Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6

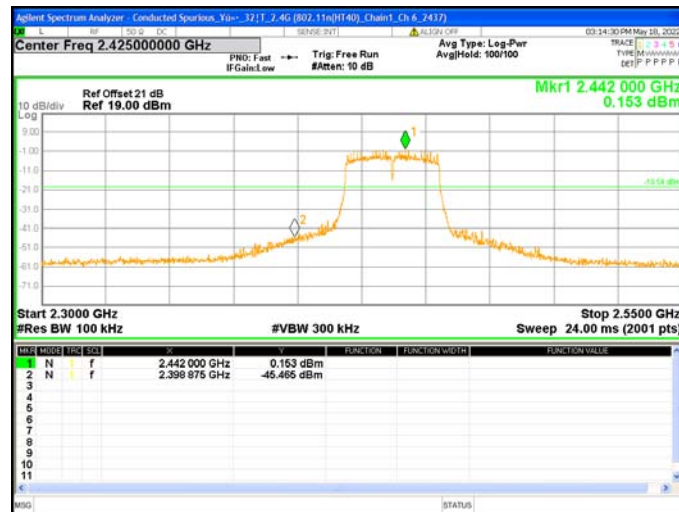


Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6

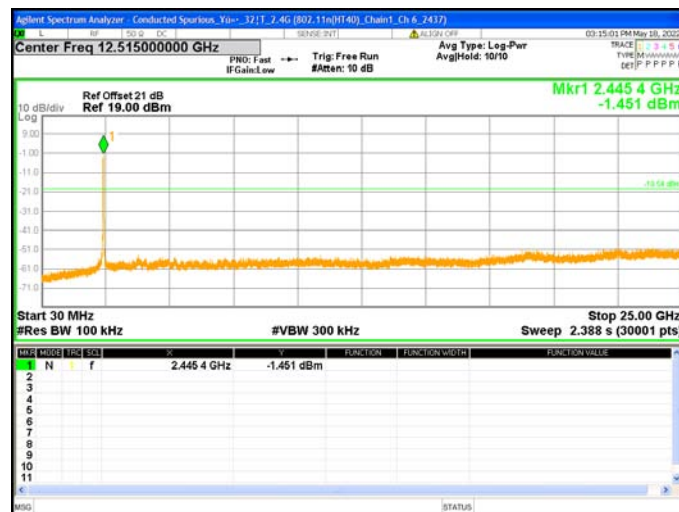


Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

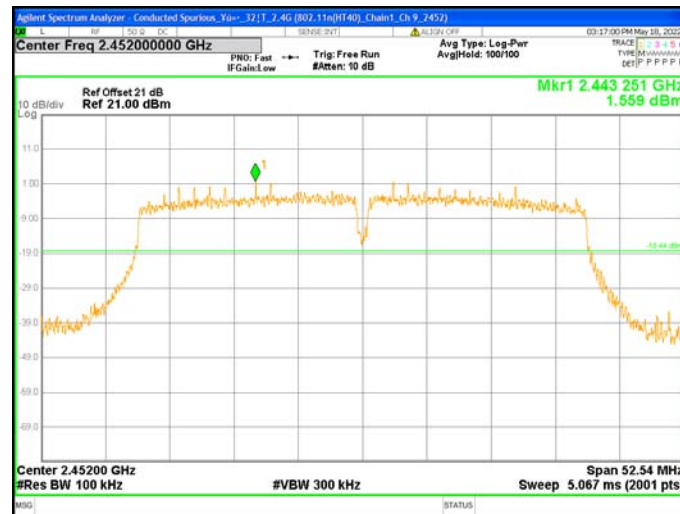

Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

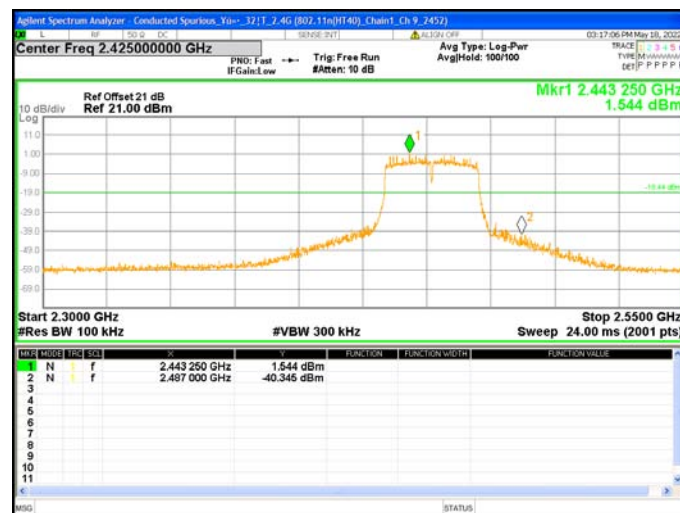

Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

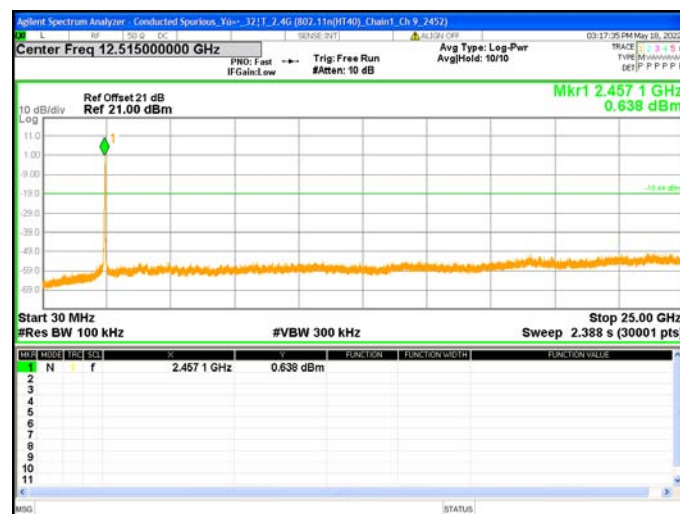


6. Emissions in Restricted Frequency Bands (Radiated emission measurements)

6.1 Instrument Setting


Receiver Function	Setting (Below 1GHz)	Setting (Above 1GHz)
Detector	QP	Peak and Average
RBW	9-150 kHz ; 200-300 Hz 0.15-30 MHz; 9-10 kHz 30-1000 MHz; 100-120 kHz	1MHz
VBW	$\geq 3 \times \text{RBW}$	3MHz & 1/T minimum kHz
Sweep	Auto couple	Auto couple
Start Frequency	9 kHz	1GHz
Stop Frequency	1 GHz	Tenth harmonic
Attenuation	Auto	Auto

6.2 Test setup & procedure


Radiated emission from 9kHz to 30MHz uses Loop Antenna:

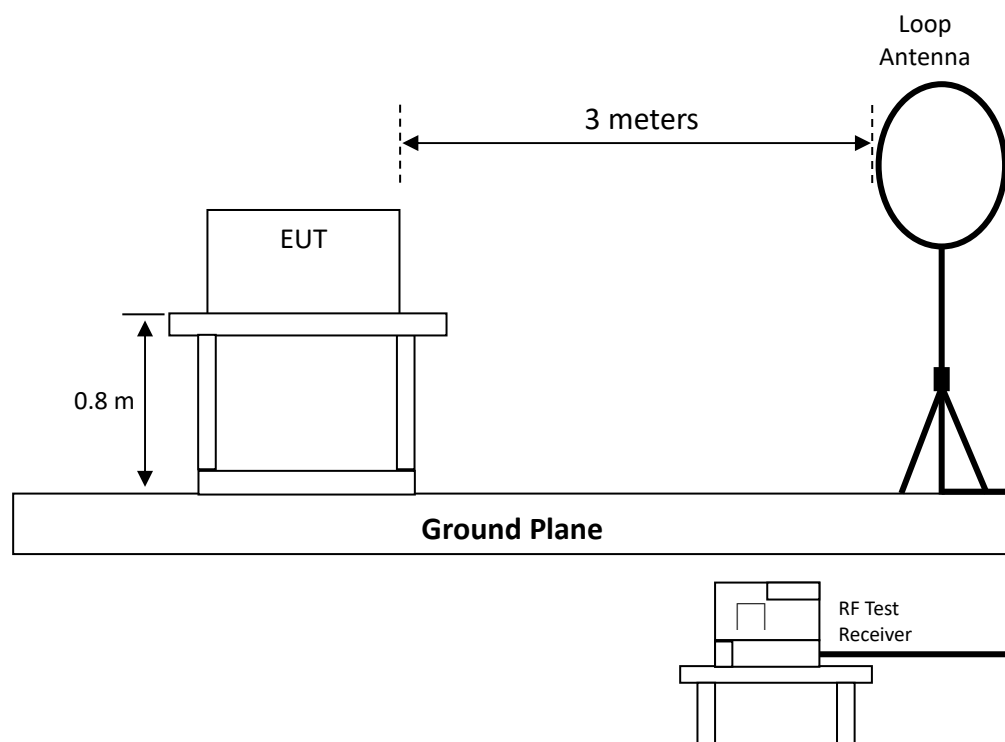

Radiated emission below 1GHz using Bilog Antenna

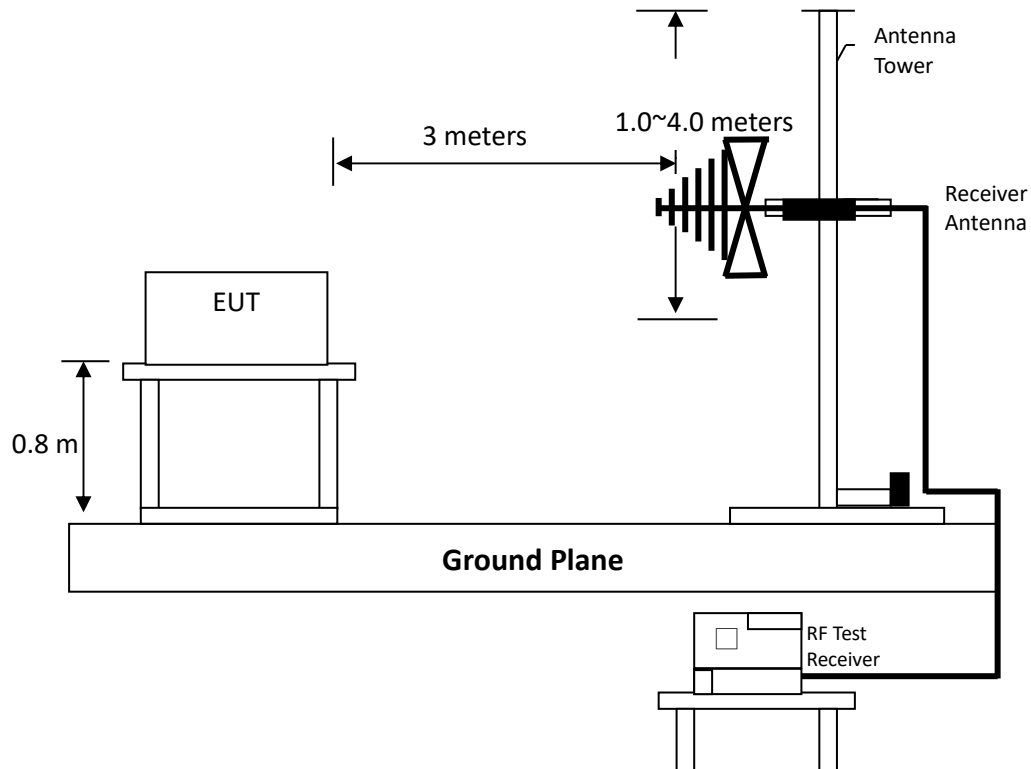

Radiated emission above 1GHz using Horn Antenna

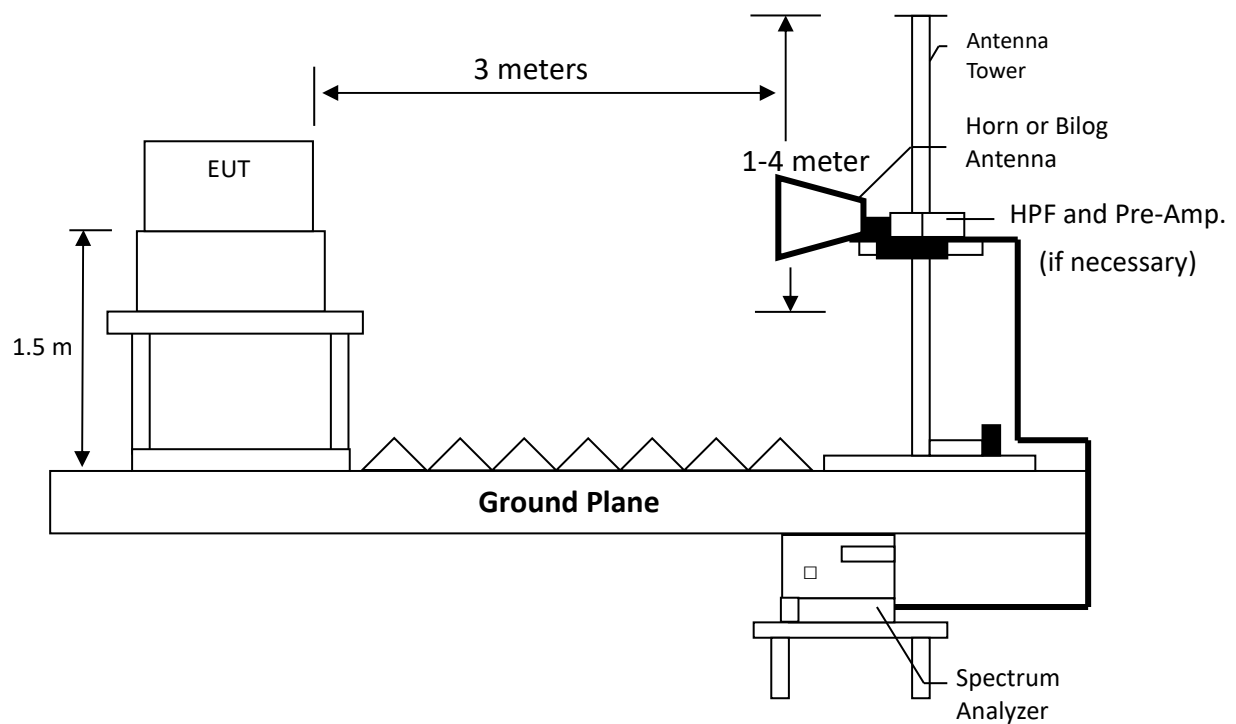

TEST REPORT

Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 1/T minimum kHz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/ 3 MHz VBW) recorded also on the report.

The EUT for testing is arranged on a turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

6.3 Limit

Frequency(MHz)	Field Strength(uV/m)	Measurement distance(m)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

TEST REPORT

6.4 Test Result

6.4.1 Measurement results from 9kHz to 30MHz

Temperature (°C) :	25
Relative Humidity (%) :	63
Test date :	2022/05/18
Host 1 :	67401

The test was performed on EUT under continuously transmitting mode. The worst case occurred at 802.11b Chain0+1 Channel 1.

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Perpendicular	0.129	AV	18.04	49.52	67.56	105.56	-38.00
Perpendicular	0.219	AV	18.35	44.20	62.55	100.85	-38.30
Perpendicular	0.339	AV	18.66	42.36	61.02	97.02	-36.00
Perpendicular	0.459	AV	18.76	37.72	56.48	94.38	-37.90
Perpendicular	0.639	QP	18.89	25.47	44.36	71.55	-27.19
Perpendicular	0.789	QP	18.98	29.87	48.85	69.68	-20.83

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Parallel	0.099	QP	17.97	50.33	68.30	107.84	-39.54
Parallel	0.189	AV	18.24	45.14	63.38	102.13	-38.75
Parallel	0.369	AV	18.68	40.76	59.44	96.28	-36.84
Parallel	0.489	AV	18.79	34.69	53.48	93.82	-40.34
Parallel	0.639	QP	18.89	27.42	46.31	71.55	-25.24
Parallel	0.759	QP	18.95	30.20	49.15	70.06	-20.91

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Ground-parallel	0.009	AV	18.11	50.70	68.81	128.52	-59.71
Ground-parallel	0.189	AV	18.24	45.17	63.41	102.13	-38.72
Ground-parallel	0.429	AV	18.74	40.71	59.45	94.97	-35.52
Ground-parallel	0.489	AV	18.79	36.67	55.46	93.82	-38.36
Ground-parallel	0.639	QP	18.89	25.31	44.20	71.55	-27.35
Ground-parallel	0.789	QP	18.98	31.14	50.12	69.68	-19.56

TEST REPORT

Temperature (°C) :	25
Relative Humidity (%) :	64
Test date :	2022/5/31
Host 2:	67301

The test was performed on EUT under continuously transmitting mode. The worst case occurred at 802.11b Chain0+1 Channel 1.

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Perpendicular	0.159	AV	18.14	53.68	71.82	103.63	-31.81
Perpendicular	0.249	AV	18.45	47.21	65.66	99.69	-34.03
Perpendicular	0.339	AV	18.66	39.74	58.40	97.02	-38.62
Perpendicular	0.369	AV	18.68	37.17	55.85	96.28	-40.43
Perpendicular	0.489	AV	18.79	31.65	50.44	93.82	-43.38
Perpendicular	0.609	QP	18.86	26.42	45.28	71.93	-26.65

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Parallel	0.129	AV	18.04	52.13	70.17	105.56	-35.39
Parallel	0.189	AV	18.24	49.58	67.82	102.13	-34.31
Parallel	0.249	AV	18.45	45.21	63.66	99.69	-36.03
Parallel	0.279	AV	18.55	40.76	59.31	98.73	-39.42
Parallel	0.369	AV	18.68	32.17	50.85	96.28	-45.43
Parallel	0.459	AV	18.76	28.72	47.48	94.38	-46.90

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Ground-parallel	0.159	AV	18.14	53.68	71.82	103.63	-31.81
Ground-parallel	0.249	AV	18.45	47.21	65.66	99.69	-34.03
Ground-parallel	0.369	AV	18.68	36.17	54.85	96.28	-41.43
Ground-parallel	0.759	QP	18.95	20.96	39.91	70.06	-30.15
Ground-parallel	0.939	QP	19.07	16.83	35.90	68.19	-32.29
Ground-parallel	1.239	QP	19.10	15.48	34.58	65.76	-31.18

TEST REPORT

6.4.2 Measurement results from 30 MHz to 1 GHz

Temperature (°C) :	25
Relative Humidity (%) :	63
Test date :	2022/05/17
Host 1 :	67401

The test was performed on EUT under continuously transmitting mode. The worst case occurred at 802.11b Chain0+1 Channel 1.

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Vertical	159.01	QP	20.69	15.12	35.81	43.50	-7.69
Vertical	224.97	QP	17.82	13.47	31.29	46.00	-14.71
Vertical	277.35	QP	21.03	10.58	31.61	46.00	-14.39
Vertical	331.67	QP	22.58	11.75	34.33	46.00	-11.67
Vertical	381.14	QP	23.87	10.17	34.04	46.00	-11.96
Vertical	676.99	QP	29.89	8.28	38.17	46.00	-7.83

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Horizontal	110.51	QP	17.03	17.46	34.49	43.50	-9.01
Horizontal	159.01	QP	20.69	18.51	39.20	43.50	-4.30
Horizontal	307.42	QP	21.86	12.52	34.38	46.00	-11.62
Horizontal	331.67	QP	22.58	15.10	37.68	46.00	-8.32
Horizontal	676.99	QP	29.89	9.02	38.91	46.00	-7.09
Horizontal	752.65	QP	31.56	7.54	39.10	46.00	-6.90

Remark: Corr. Factor = Antenna Factor + Cable Loss

TEST REPORT

Temperature (°C) :	25
Relative Humidity (%) :	64
Test date :	2022/5/31
Host 2 :	67301

The test was performed on EUT under continuously transmitting mode. The worst case occurred at 802.11b Chain0+1 Channel 1.

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Vertical	275.41	QP	20.95	16.19	37.14	46.00	-8.86
Vertical	376.29	QP	23.76	14.13	37.89	46.00	-8.11
Vertical	395.69	QP	24.20	17.00	41.20	46.00	-4.80
Vertical	450.98	QP	25.87	14.35	40.22	46.00	-5.78
Vertical	526.64	QP	27.07	8.94	36.01	46.00	-9.99
Vertical	564.47	QP	27.87	9.20	37.07	46.00	-8.93

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Horizontal	275.41	QP	20.95	13.02	33.97	46.00	-12.03
Horizontal	299.66	QP	21.53	11.10	32.63	46.00	-13.37
Horizontal	395.69	QP	24.20	10.28	34.48	46.00	-11.52
Horizontal	450.98	QP	25.87	6.39	32.26	46.00	-13.74
Horizontal	676.99	QP	29.89	6.21	36.10	46.00	-9.90
Horizontal	732.28	QP	31.10	5.39	36.49	46.00	-9.51

Remark: Corr. Factor = Antenna Factor + Cable Loss

TEST REPORT

6.4.3 Measurement results from 1 GHz to 25 GHz

Temperature (°C) :	25
Relative Humidity (%) :	63
Test date :	2022/05/17
Host 1 :	67401

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11b_Ch1 Chain0+1	4824	PK	H	-5.54	46.25	40.71	74	-33.29
	4824	PK	V	-5.54	45.02	39.48	74	-34.52
802.11b_Ch6 Chain0+1	4874	PK	H	-5.23	43.98	38.75	74	-35.25
	4874	PK	V	-5.23	45.20	39.97	74	-34.03
802.11b_Ch11 Chain0+1	4924	PK	H	-5.10	45.59	40.49	74	-33.51
	4924	PK	V	-5.10	41.47	36.37	74	-37.63
802.11g_Ch1 Chain0+1	4824	PK	H	-5.54	44.70	39.16	74	-34.84
	4824	PK	V	-5.54	45.53	39.99	74	-34.01
802.11g_Ch6 Chain0+1	4874	PK	H	-5.23	45.01	39.78	74	-34.22
	4874	PK	V	-5.23	45.13	39.90	74	-34.10
802.11g_Ch11 Chain0+1	4924	PK	H	-5.10	44.18	39.08	74	-34.92
	4924	PK	V	-5.10	43.60	38.50	74	-35.50
802.11n(HT20)_Ch1 Chain0+1	4824	PK	H	-5.54	44.20	38.66	74	-35.34
	4824	PK	V	-5.54	44.98	39.44	74	-34.56
802.11n(HT20)_Ch6 Chain0+1	4874	PK	H	-5.23	44.20	38.97	74	-35.03
	4874	PK	V	-5.23	44.51	39.28	74	-34.72
802.11n(HT20)_Ch11 Chain0+1	4924	PK	H	-5.10	42.22	37.12	74	-36.88
	4924	PK	V	-5.10	42.84	37.74	74	-36.26
802.11n(HT40)_Ch3 Chain0+1	4844	PK	H	-5.41	44.75	39.34	74	-34.66
	4844	PK	V	-5.41	45.79	40.38	74	-33.62
802.11n(HT40)_Ch6 Chain0+1	4874	PK	H	-5.23	44.76	39.53	74	-34.47
	4874	PK	V	-5.23	44.82	39.59	74	-34.41
802.11n(HT40)_Ch9 Chain0+1	4904	PK	H	-5.07	43.30	38.23	74	-35.77
	4904	PK	V	-5.07	45.05	39.98	74	-34.02

Remark: Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

TEST REPORT

Temperature (°C) :	24
Relative Humidity (%) :	60
Test date :	2022/5/30
Host 2 :	67301

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11b_Ch1 Chain0+1	4824	PK	H	-6.47	55.99	49.52	74	-24.48
	4824	PK	V	-6.47	53.94	47.47	74	-26.53
802.11b_Ch6 Chain0+1	4874	PK	H	-6.15	48.52	42.37	74	-31.63
	4874	PK	V	-6.15	48.10	41.95	74	-32.05
802.11b_Ch11 Chain0+1	4924	PK	H	-6.02	47.72	41.70	74	-32.30
	4924	PK	V	-6.02	46.87	40.85	74	-33.15
802.11g_Ch1 Chain0+1	4824	PK	H	-6.47	46.17	39.70	74	-34.30
	4824	PK	V	-6.47	47.90	41.43	74	-32.57
802.11g_Ch6 Chain0+1	4874	PK	H	-6.15	47.01	40.86	74	-33.14
	4874	PK	V	-6.15	47.20	41.05	74	-32.95
802.11g_Ch11 Chain0+1	4924	PK	H	-6.02	45.90	39.88	74	-34.12
	4924	PK	V	-6.02	45.54	39.52	74	-34.48
802.11n(HT20)_Ch1 Chain0+1	4824	PK	H	-6.47	47.51	41.04	74	-32.96
	4824	PK	V	-6.47	47.67	41.20	74	-32.80
802.11n(HT20)_Ch6 Chain0+1	4874	PK	H	-6.15	47.42	41.27	74	-32.73
	4874	PK	V	-6.15	46.89	40.74	74	-33.26
802.11n(HT20)_Ch11 Chain0+1	4924	PK	H	-6.02	45.73	39.71	74	-34.29
	4924	PK	V	-6.02	46.64	40.62	74	-33.38
802.11n(HT40)_Ch3 Chain0+1	4844	PK	H	-6.34	47.02	40.68	74	-33.32
	4844	PK	V	-6.34	47.79	41.45	74	-32.55
802.11n(HT40)_Ch6 Chain0+1	4874	PK	H	-6.15	47.06	40.91	74	-33.09
	4874	PK	V	-6.15	47.60	41.45	74	-32.55
802.11n(HT40)_Ch9 Chain0+1	4904	PK	H	-5.99	46.82	40.83	74	-33.17
	4904	PK	V	-5.99	46.35	40.36	74	-33.64

Remark: Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

7. Emission on Band Edge

7.1 Instrument Setting

Spectrum Function	Setting
Detector	Peak and Average
RBW	1MHz
VBW	3MHz & 1/T minimum kHz
Sweep	Auto couple
Restrict bands	2310 MHz ~ 2390 MHz 2483.5 MHz ~ 2500 MHz
Attenuation	Auto

7.2 Test Procedure

The test procedure is the same as Emissions in Restricted Frequency Bands (Radiated emission measurements).

TEST REPORT


7.3 Test Results

Temperature (°C) :	25
Relative Humidity (%) :	63
Test date :	2022/05/17
Host 1 :	67401


Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
802.11b Chain0+1	2390.00	PK	H	34.25	23.40	57.65	74	-16.35	2310~2390
	2386.19	AV	H	34.27	19.17	53.44	54	-0.56	
	2488.03	PK	H	34.62	25.47	60.09	74	-13.91	2483.5~2500
	2487.84	AV	H	34.62	18.19	52.81	54	-1.19	
802.11g Chain0+1	2390.00	PK	H	34.25	30.67	64.92	74	-9.08	2310~2390
	2390.00	AV	H	34.25	19.09	53.34	54	-0.66	
	2483.50	PK	H	34.58	30.48	65.06	74	-8.94	2483.5~2500
	2483.50	AV	H	34.58	18.39	52.97	54	-1.03	
802.11n (HT20) Chain0+1	2389.99	PK	H	34.25	31.66	65.91	74	-8.09	2310~2390
	2389.99	AV	H	34.25	18.35	52.60	54	-1.40	
	2483.50	PK	H	34.58	24.73	59.31	74	-14.69	2483.5~2500
	2483.50	AV	H	34.58	17.44	52.02	54	-1.98	
802.11n (HT40) Chain0+1	2390.00	PK	H	34.25	31.33	65.58	74	-8.42	2310~2390
	2388.66	AV	H	34.26	18.67	52.93	54	-1.07	
	2483.50	PK	H	34.58	27.09	61.67	74	-12.33	2483.5~2500
	2483.50	AV	H	34.58	17.58	52.16	54	-1.84	

Remark: Correction Factor = Antenna Factor + Cable Loss


Chain0+1 : Restricted Band Bandedge @ 802.11b Mode Ch1 PK

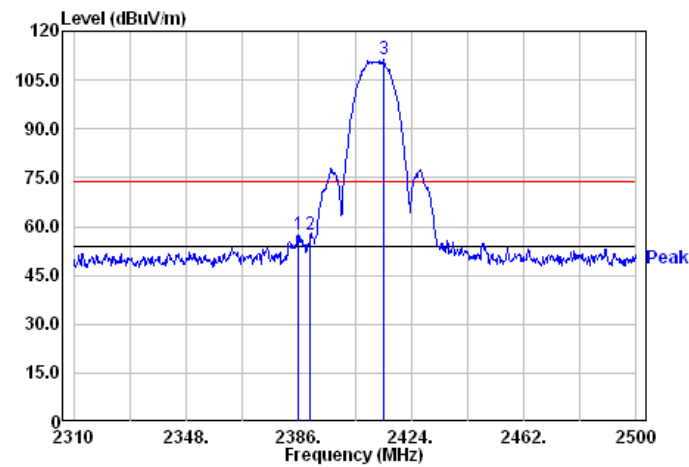


Chain0+1 : Restricted Band Bandedge @ 802.11b Mode Ch1 AV

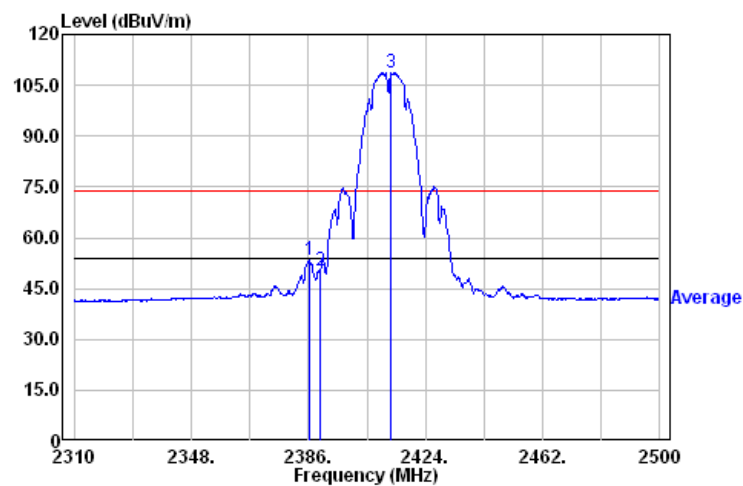


Chain0 +1: Restricted Band Bandedge @ 802.11b Mode Ch11 PK

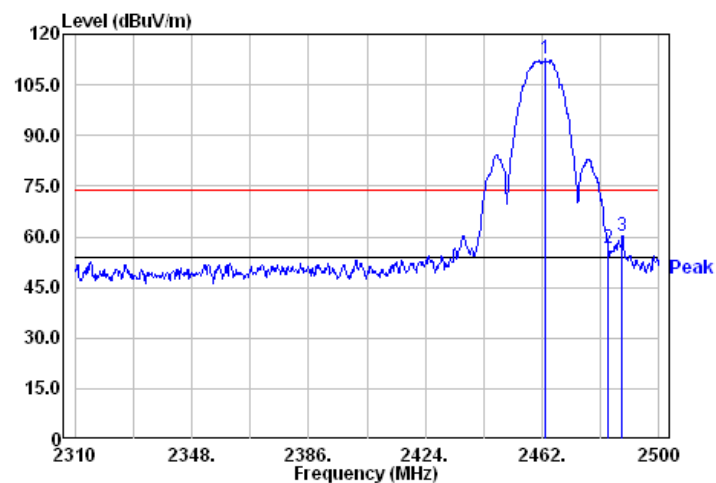


Chain0+1 : Restricted Band Bandedge @ 802.11b Mode Ch11 AV

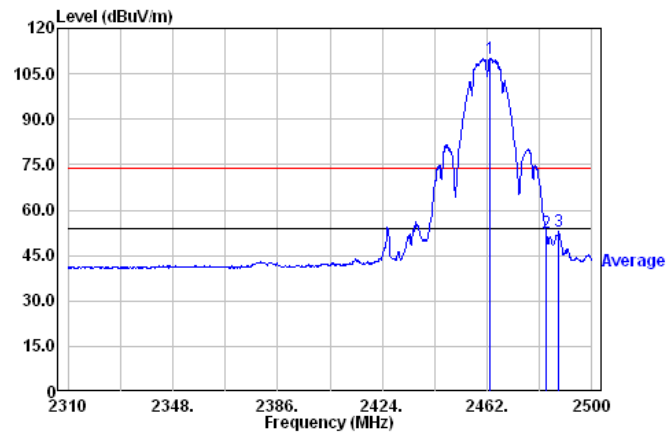


Chain0+1 : Restricted Band Bandedge @ 802.11g Mode Ch1 PK

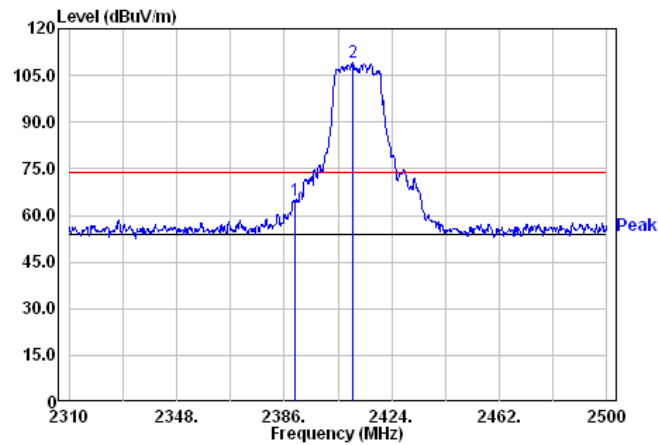


Chain0+1 : Restricted Band Bandedge @ 802.11g Mode Ch1 AV

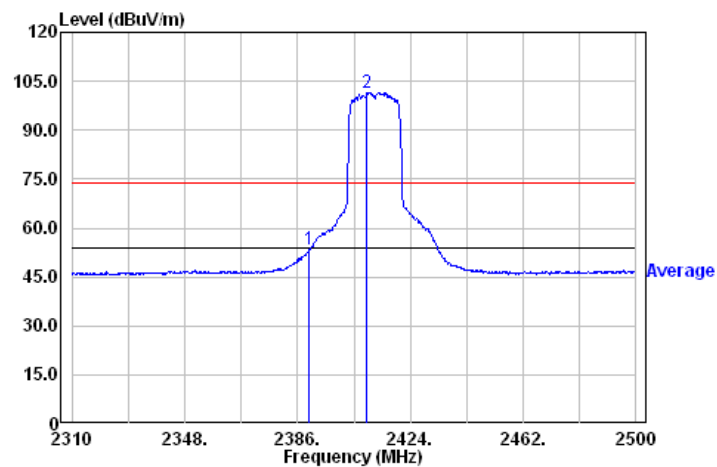


Chain0+1 : Restricted Band Bandedge @ 802.11g Mode Ch11 PK

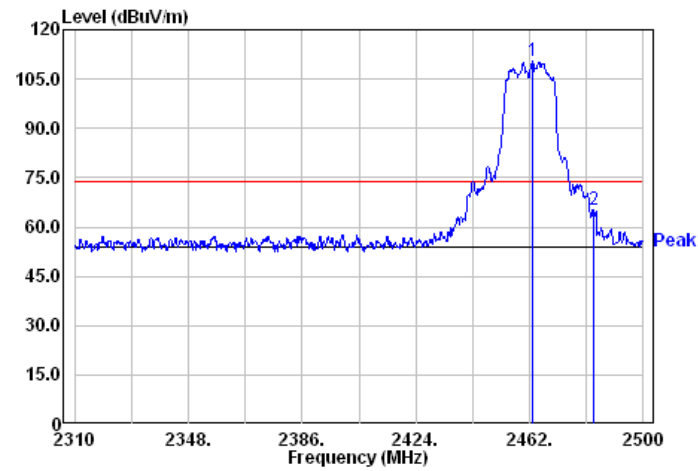


Chain0+1 : Restricted Band Bandedge @ 802.11g Mode Ch11 AV

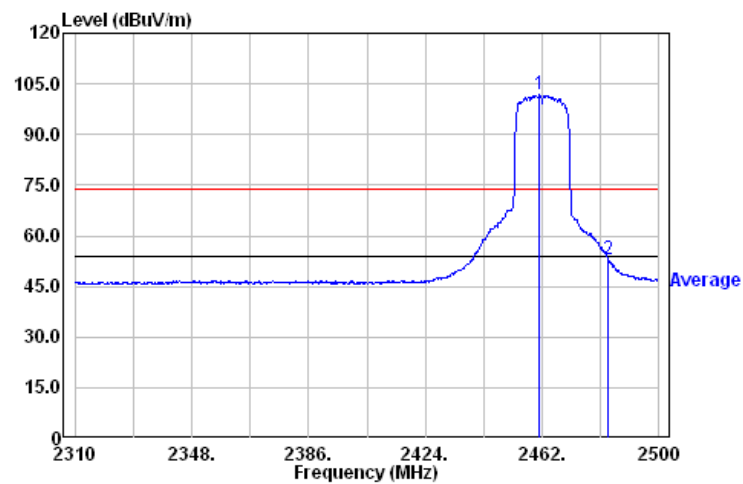


Chain0+1 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch1 PK

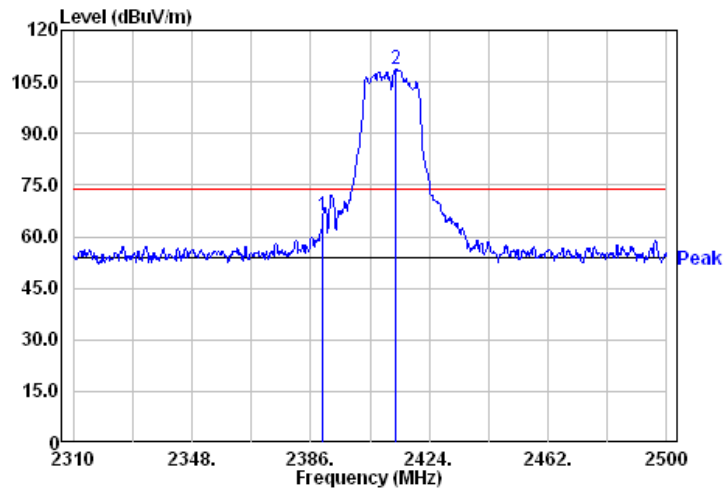


Chain0+1 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch1 AV

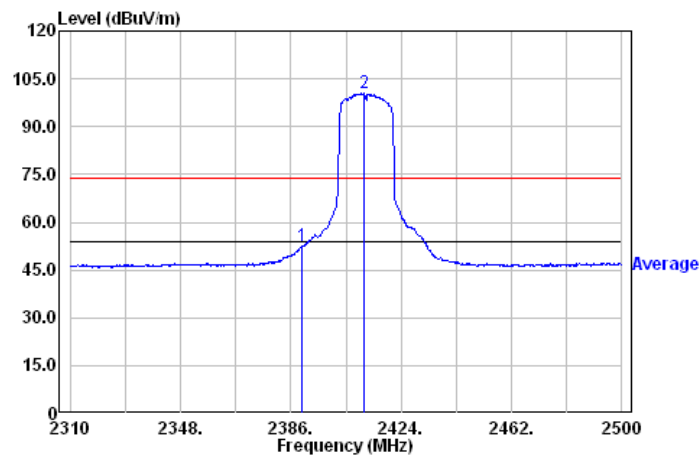


Chain0+1 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch11 PK

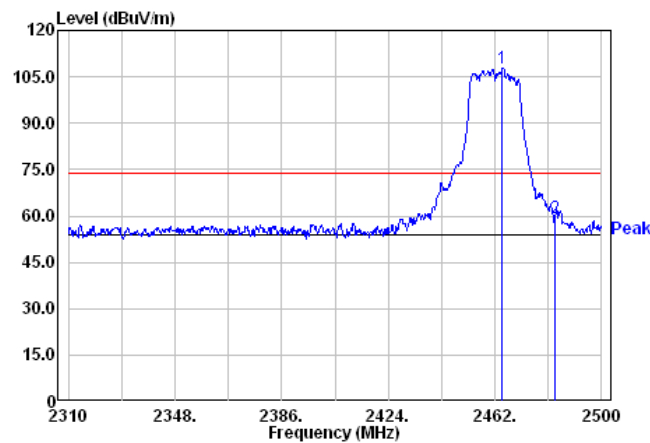


Chain0+1 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch11 AV

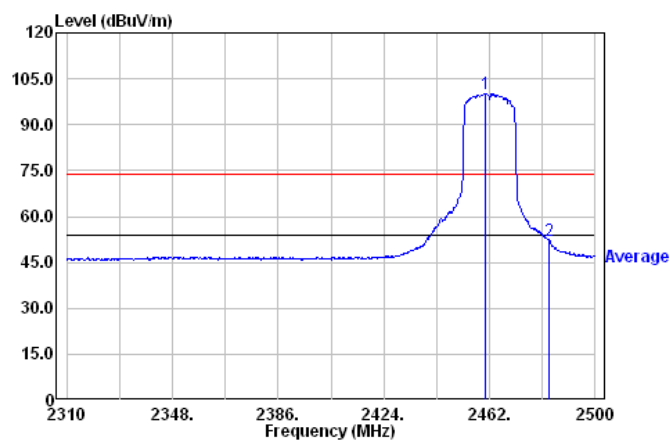


Chain0+1 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch3 PK

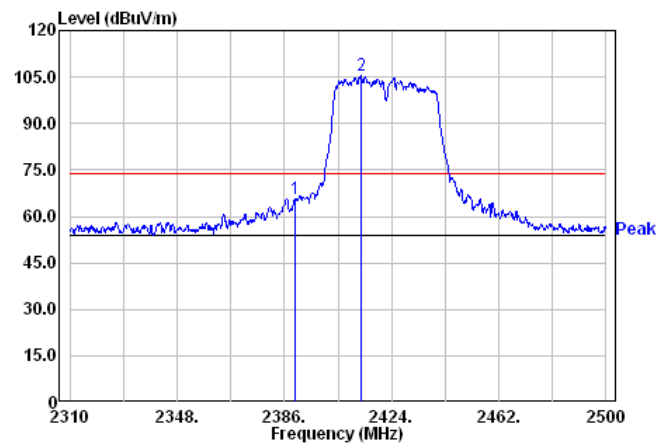


Chain0+1 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch3 AV

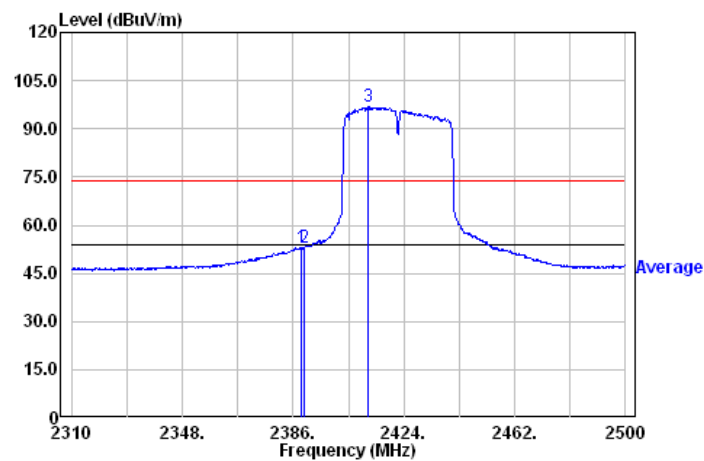

Chain0+1 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch9 PK

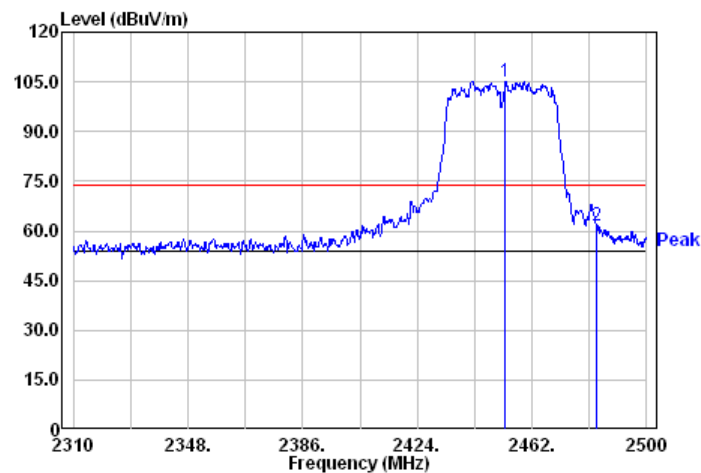

Chain0+1 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch9 AV

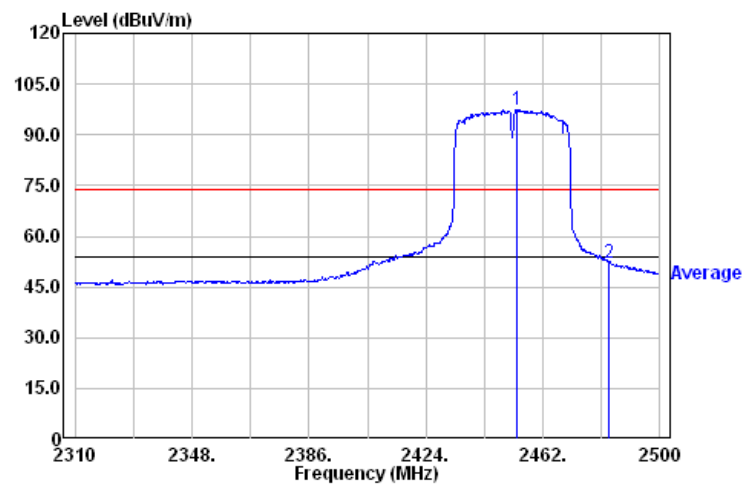


TEST REPORT

Temperature (°C) :	24
Relative Humidity (%) :	60
Test date :	2022/05/24
Host 2 :	67301


Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
802.11b Chain0+1	2386.38	PK	H	34.27	23.06	57.33	74	-16.67	2310~2390
	2386.19	AV	H	34.27	18.19	52.46	54	-1.54	
	2483.50	PK	H	34.58	22.79	57.37	74	-16.63	2483.5~2500
	2483.50	AV	H	34.58	17.41	51.99	54	-2.01	
802.11g Chain0+1	2390.00	PK	H	34.25	28.17	62.42	74	-11.58	2310~2390
	2390.00	AV	H	34.25	17.88	52.13	54	-1.87	
	2483.50	PK	H	34.58	30.22	64.80	74	-9.20	2483.5~2500
	2483.50	AV	H	34.58	17.47	52.05	54	-1.95	
802.11n (HT20) Chain0+1	2389.04	PK	H	34.26	35.17	69.43	74	-4.57	2310~2390
	2390.00	AV	H	34.25	18.15	52.40	54	-1.60	
	2483.50	PK	H	34.58	36.12	70.70	74	-3.30	2483.5~2500
	2483.50	AV	H	34.58	17.86	52.44	54	-1.56	
802.11n (HT40) Chain0+1	2386.76	PK	H	34.27	37.69	71.96	74	-2.04	2310~2390
	2390.00	AV	H	34.25	18.23	52.48	54	-1.52	
	2483.50	PK	H	34.58	29.93	64.51	74	-9.49	2483.5~2500
	2483.50	AV	H	34.58	18.34	52.92	54	-1.08	

Remark: Correction Factor = Antenna Factor + Cable Loss


Chain0+1 : Restricted Band Bandedge @ 802.11b Mode Ch1 PK

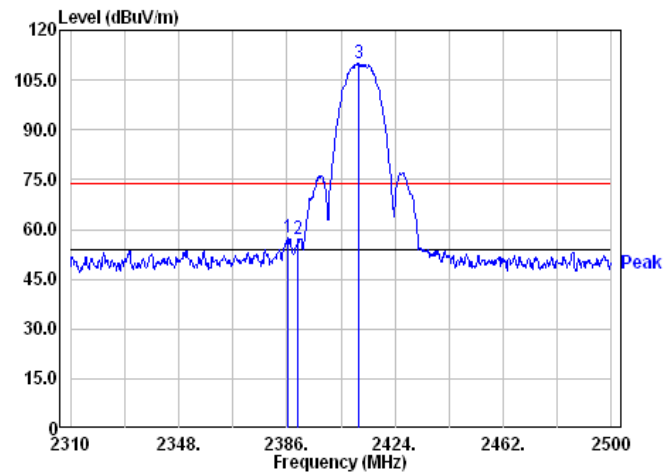


Chain0+1 : Restricted Band Bandedge @ 802.11b Mode Ch1 AV

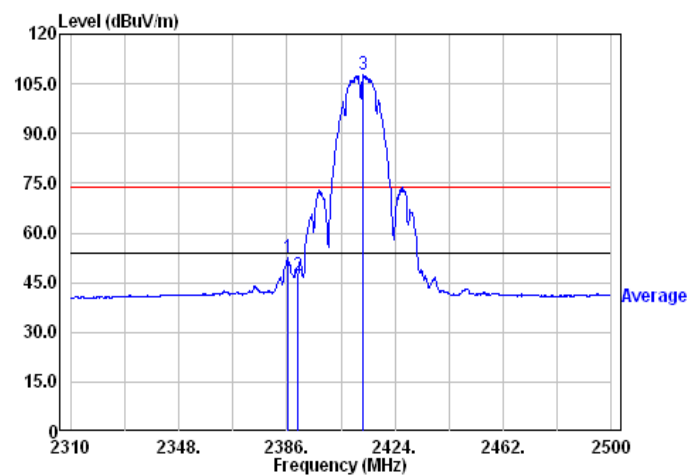


Chain0 +1: Restricted Band Bandedge @ 802.11b Mode Ch11 PK

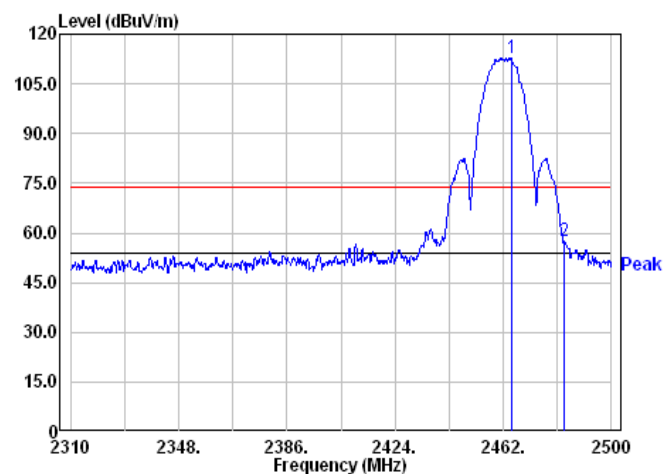


Chain0+1 : Restricted Band Bandedge @ 802.11b Mode Ch11 AV

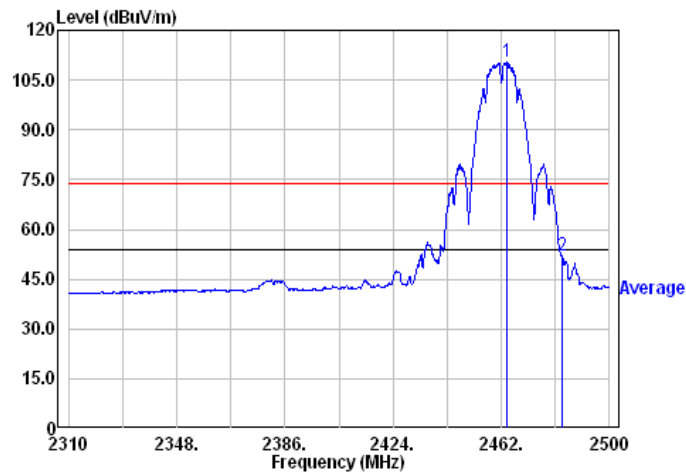


Chain0+1 : Restricted Band Bandedge @ 802.11g Mode Ch1 PK

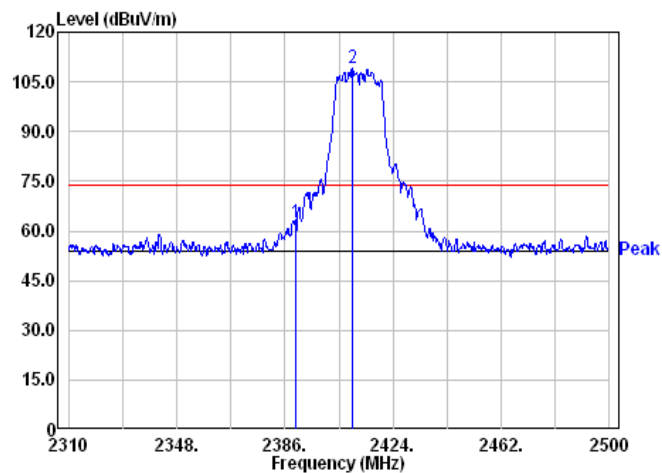


Chain0+1 : Restricted Band Bandedge @ 802.11g Mode Ch1 AV

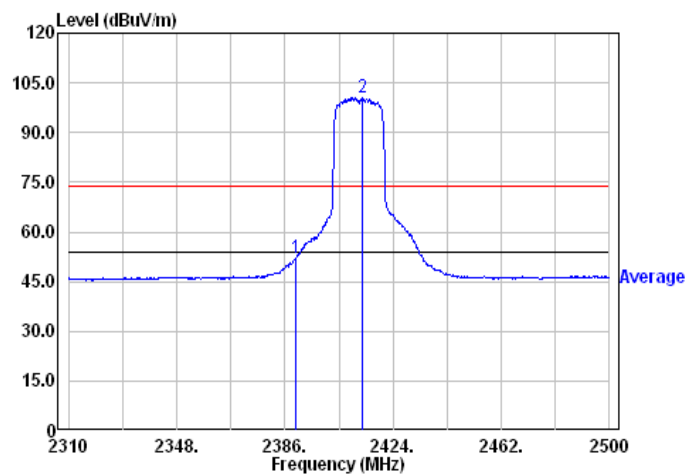


Chain0+1 : Restricted Band Bandedge @ 802.11g Mode Ch11 PK

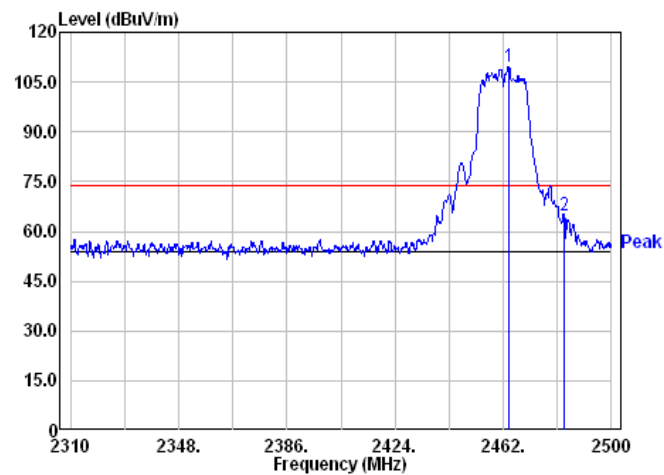


Chain0+1 : Restricted Band Bandedge @ 802.11g Mode Ch11 AV

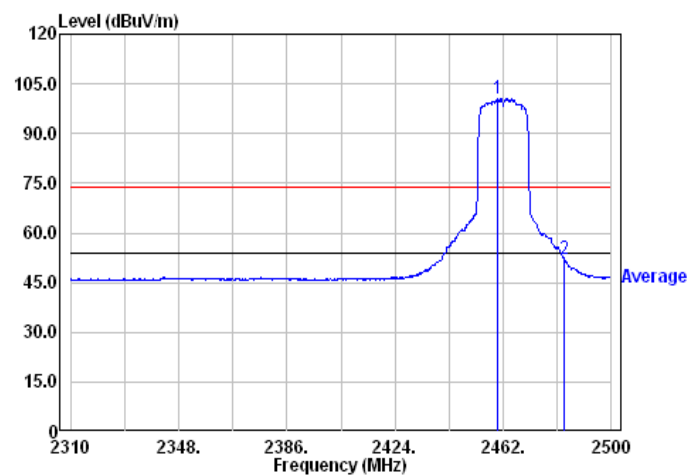


Chain0+1 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch1 PK

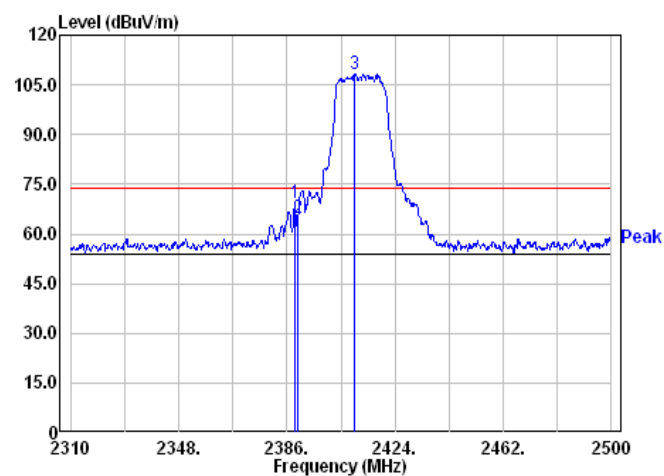


Chain0+1 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch1 AV

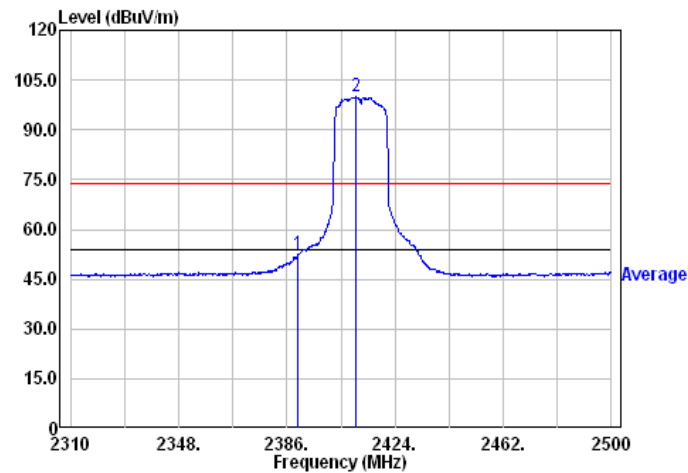


Chain0+1 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch11 PK

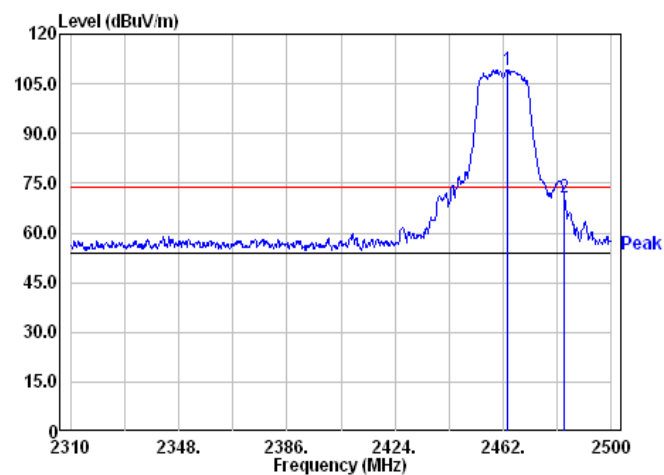


Chain0+1 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch11 AV

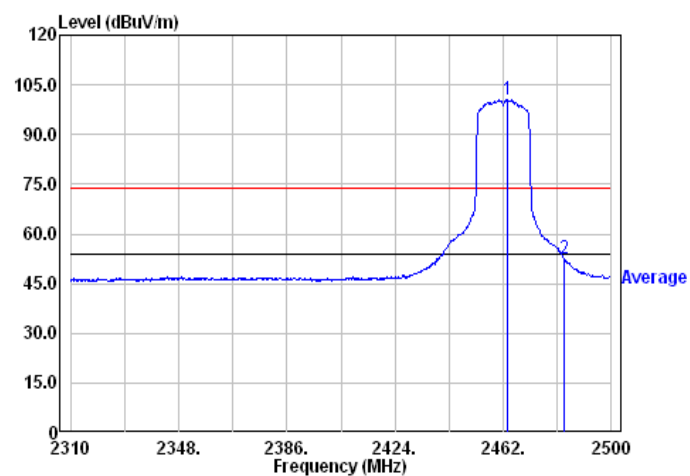


Chain0+1 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch3 PK

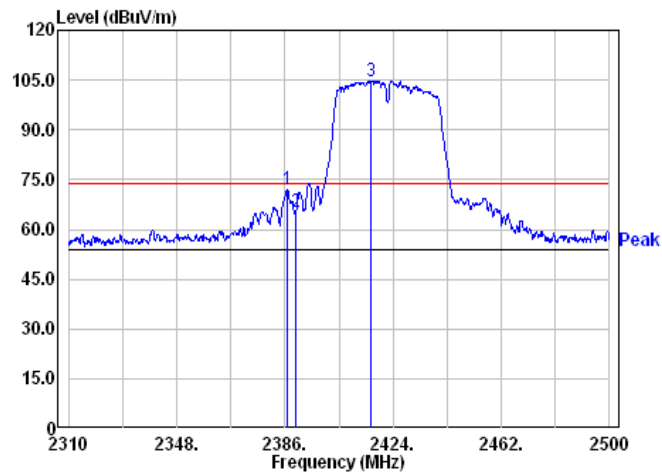


Chain0+1 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch3 AV

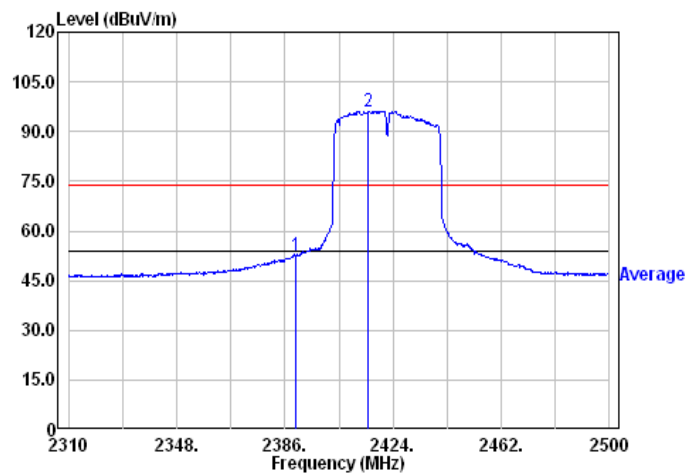

Chain0+1 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch9 PK

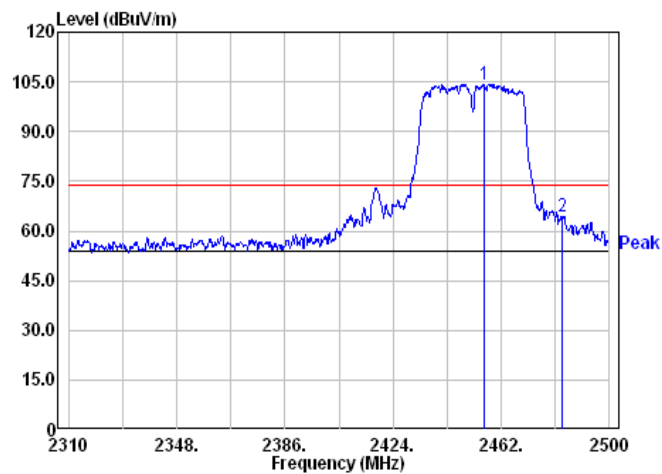

Chain0+1 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch9 AV

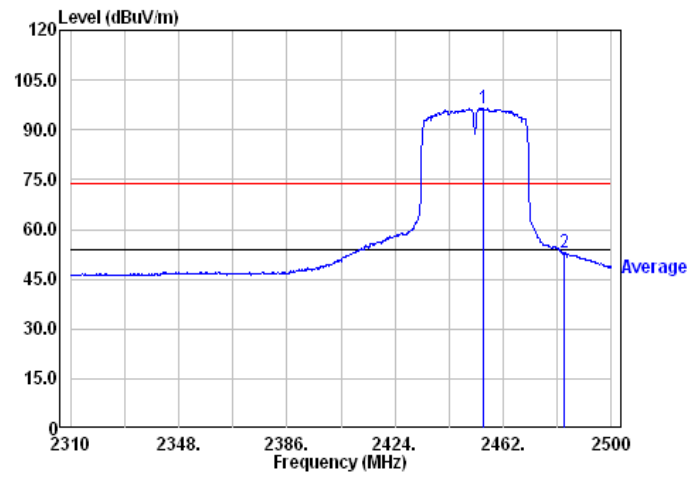

TEST REPORT

Temperature (°C) :	24
Relative Humidity (%) :	60
Test date :	2022/05/24
Host 2 :	67301

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
802.11b Chain0+1	2386.38	PK	H	34.27	23.06	57.33	74	-16.67	2310~2390
	2386.19	AV	H	34.27	18.19	52.46	54	-1.54	
	2483.50	PK	H	34.58	22.79	57.37	74	-16.63	2483.5~2500
	2483.50	AV	H	34.58	17.41	51.99	54	-2.01	
802.11g Chain0+1	2390.00	PK	H	34.25	28.17	62.42	74	-11.58	2310~2390
	2390.00	AV	H	34.25	17.88	52.13	54	-1.87	
	2483.50	PK	H	34.58	30.22	64.80	74	-9.20	2483.5~2500
	2483.50	AV	H	34.58	17.47	52.05	54	-1.95	
802.11n (HT20) Chain0+1	2389.04	PK	H	34.26	35.17	69.43	74	-4.57	2310~2390
	2390.00	AV	H	34.25	18.15	52.40	54	-1.60	
	2483.50	PK	H	34.58	36.12	70.70	74	-3.30	2483.5~2500
	2483.50	AV	H	34.58	17.86	52.44	54	-1.56	
802.11n (HT40) Chain0+1	2386.76	PK	H	34.27	37.69	71.96	74	-2.04	2310~2390
	2390.00	AV	H	34.25	18.23	52.48	54	-1.52	
	2483.50	PK	H	34.58	29.93	64.51	74	-9.49	2483.5~2500
	2483.50	AV	H	34.58	18.34	52.92	54	-1.08	

Remark: Correction Factor = Antenna Factor + Cable Loss

8. AC Power Line Conducted Emission


8.1 Measuring instrument setting

Receiver Function	Setting
Detector	QP
Start frequency	0.15MHz
Stop frequency	30MHz
IF bandwidth	9 kHz
Attenuation	10dB

8.2 Test Procedure

Step 1	Configure the EUT according to ANSI C63.10:2013. The EUT or host of EHT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
Step 2	Connect EUT or host of EUT to the power mains through a line impedance stabilization network.
Step 3	All the companion devices are connected to the other LISN. The LISN should provide 50U _h /50ohms coupling impedance.
Step 4	The frequency range from 150 kHz to 30MHz was searched.
Step 5	Set the test-receiver system to peak detector and specified bandwidth with maximum hold mode.
Step 6	The measurement has to be done between each power line and ground at the power terminal.

8.3 Test Diagram

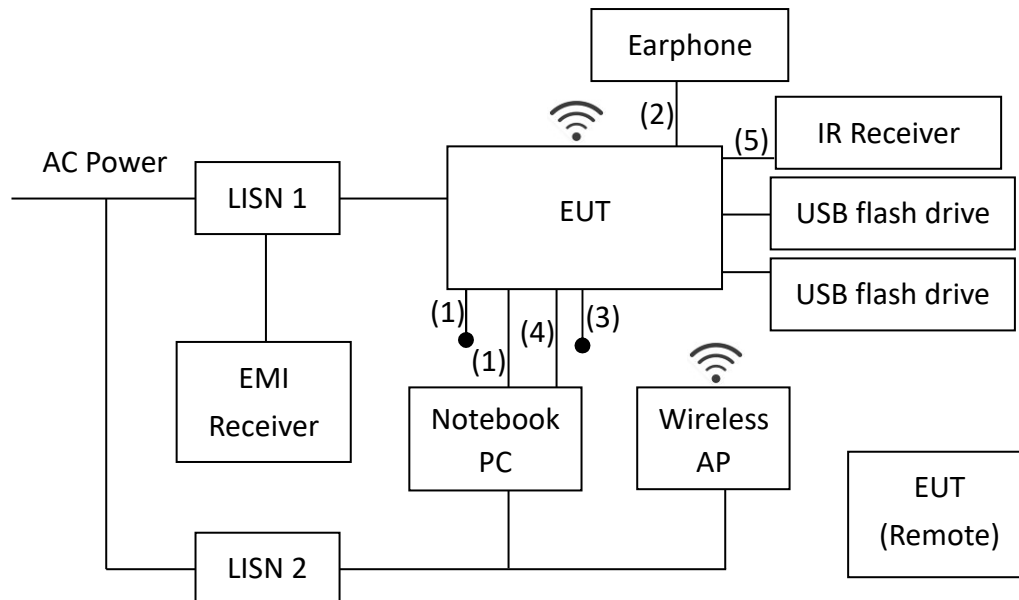

- (1) Shielded HDMI cable 1.5m
- (2) Unshielded audio 3.5mm cable 2m
- (3) RS-232 cable 1.5m
- (4) RJ45 UTP CAT.5 cable 2m
- (5) IR cable 2m


8.4 Limit

Frequency (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56	56 – 46
0.50~5.00	56	46
5.00~30.0	60	50

TEST REPORT

8.5 Test Results

Model No.:	FBP205
Host 1 :	67401

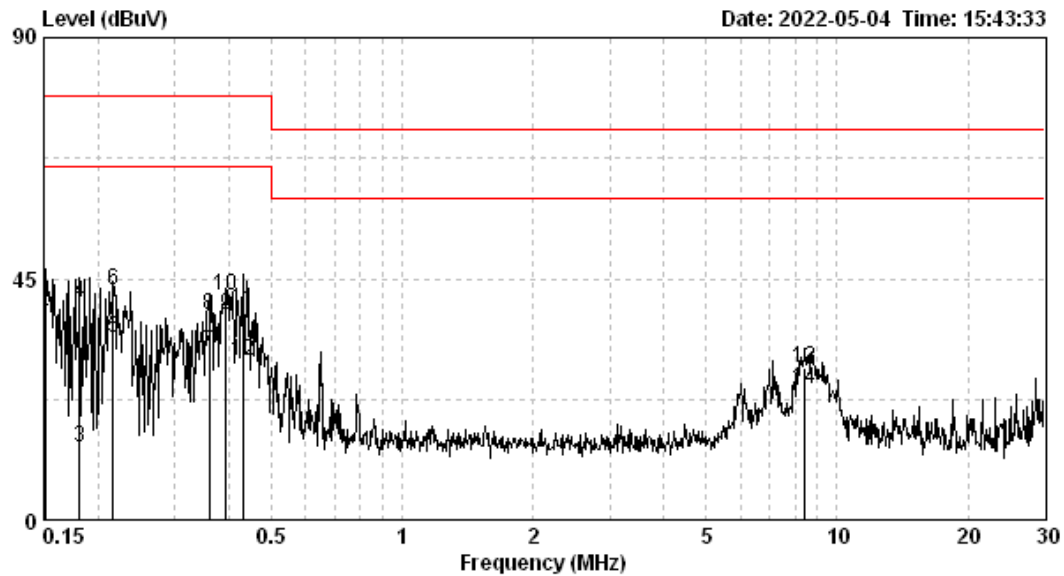


Test voltage : AC 120V/60Hz
Temp. / R.H. : 23°C / 52%RH
Atmospheric pressure : 1008hPa

Phase	Frequency (MHz)	Corr. Factor (dB)	Reading QP (dBuV)	Level QP (dBuV)	Limit QP (dBuV)	Reading AV (dBuV)	Level AV (dBuV)	Limit AV (dBuV)	Margin (dB)	
									QP	AV
LINE	0.151	9.62	34.55	44.17	79.00	29.38	39.00	66.00	-34.83	-27.00
LINE	0.182	9.63	30.95	40.58	79.00	3.87	13.51	66.00	-38.42	-52.49
LINE	0.216	9.66	33.16	42.82	79.00	24.20	33.85	66.00	-36.18	-32.15
LINE	0.360	9.76	28.47	38.24	79.00	21.47	31.23	66.00	-40.76	-34.77
LINE	0.393	9.78	32.03	41.81	79.00	28.38	38.16	66.00	-37.19	-27.84
LINE	0.433	9.80	29.37	39.17	79.00	19.89	29.69	66.00	-39.83	-36.31
LINE	8.456	9.84	18.58	28.42	73.00	14.47	24.31	60.00	-44.58	-35.69

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dBuV) = Corr. Factor (dB) + Reading (dBuV)
3. Margin (dB) = Level (dBuV) – Limit (dBuV)

TEST REPORT

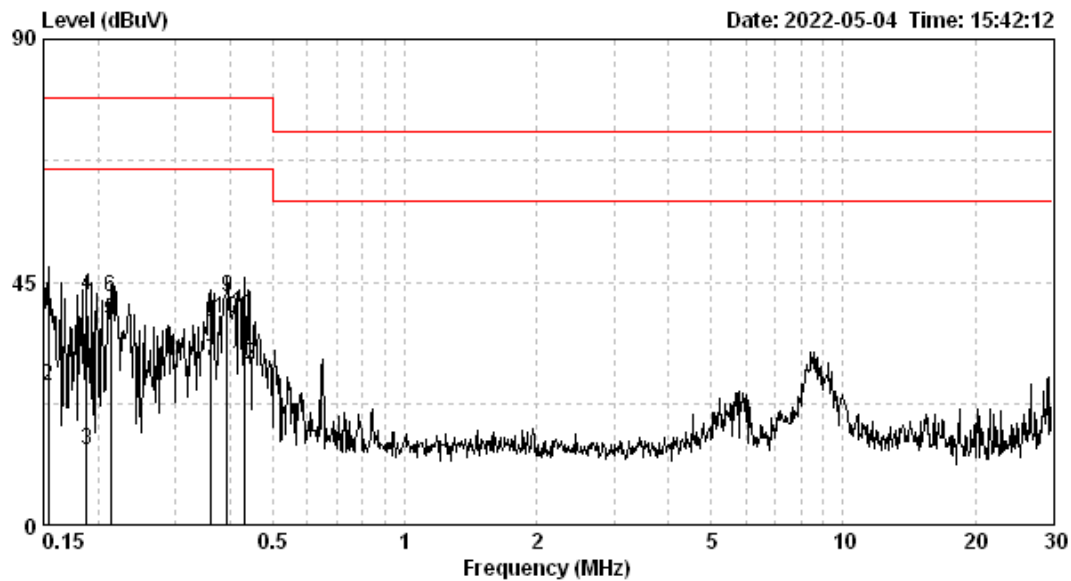

Test voltage : AC 120V/60Hz
Temp. / R.H. : 23°C / 52%RH
Atmospheric pressure : 1008hPa


Phase	Frequency (MHz)	Corr. Factor (dB)	Reading QP (dBuV)	Level QP (dBuV)	Limit QP (dBuV)	Reading AV (dBuV)	Level AV (dBuV)	Limit AV (dBuV)	Margin (dB)	
									QP	AV
NEUTRAL	0.154	9.63	29.91	39.53	79.00	15.99	25.61	66.00	-39.47	-40.39
NEUTRAL	0.188	9.64	33.05	42.68	79.00	4.31	13.95	66.00	-36.32	-52.05
NEUTRAL	0.214	9.66	32.45	42.10	79.00	28.26	37.92	66.00	-36.90	-28.08
NEUTRAL	0.361	9.76	27.80	37.56	79.00	20.59	30.35	66.00	-41.44	-35.65
NEUTRAL	0.393	9.78	32.47	42.25	79.00	28.56	38.34	66.00	-36.75	-27.66
NEUTRAL	0.433	9.80	29.29	39.09	79.00	19.81	29.61	66.00	-39.91	-36.39

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dBuV) = Corr. Factor (dB) + Reading (dBuV)
3. Margin (dB) = Level (dBuV) – Limit (dBuV)

TEST REPORT

Model No.:	FBP205
Host 2 :	67301

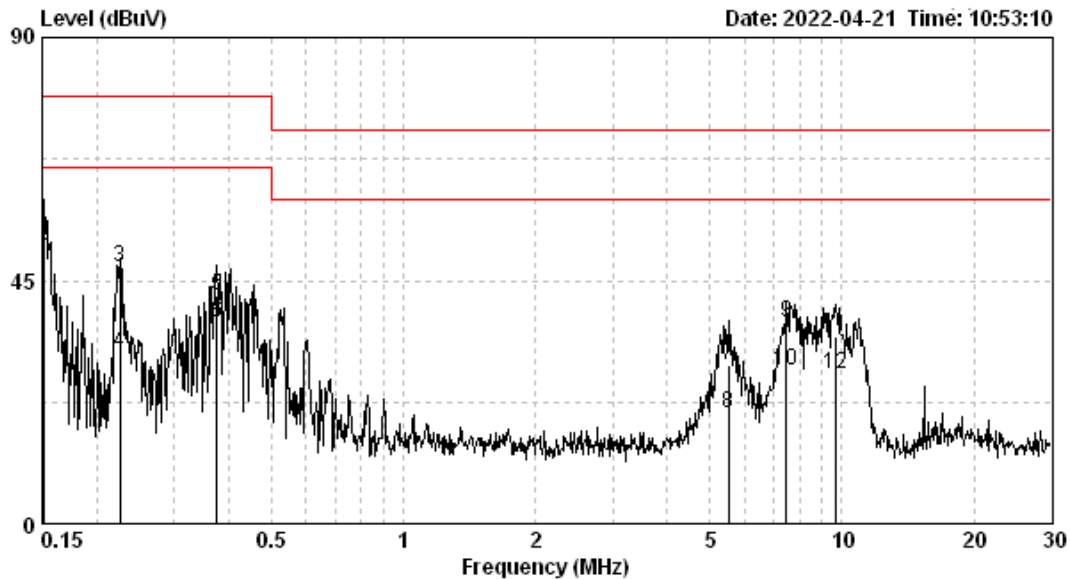


Test voltage :AC 120V/60Hz
Temp. / R.H. :23°C / 61%RH
Atmospheric pressure :1008hPa

Phase	Frequency (MHz)	Corr. Factor (dB)	Reading QP (dBuV)	Level QP (dBuV)	Limit QP (dBuV)	Reading AV (dBuV)	Level AV (dBuV)	Limit AV (dBuV)	Margin (dB)	
									QP	AV
LINE	0.151	9.62	48.36	57.98	79.00	41.93	51.55	66.00	-21.02	-14.45
LINE	0.226	9.67	37.66	47.33	79.00	22.07	31.74	66.00	-31.67	-34.26
LINE	0.375	9.77	32.53	42.30	79.00	27.49	37.26	66.00	-36.70	-28.74
LINE	5.505	9.82	19.68	29.50	73.00	10.68	20.51	60.00	-43.50	-39.49
LINE	7.486	9.84	27.26	37.10	73.00	18.62	28.46	60.00	-35.90	-31.54
LINE	9.654	9.85	24.90	34.75	73.00	17.97	27.82	60.00	-38.25	-32.18

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dBuV) = Corr. Factor (dB) + Reading (dBuV)
3. Margin (dB) = Level (dBuV) – Limit (dBuV)

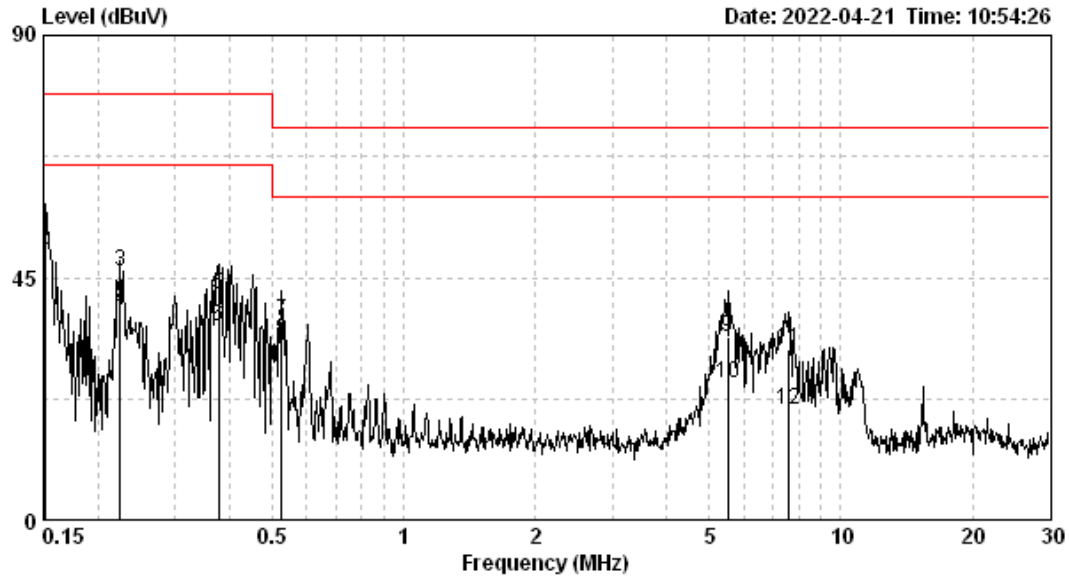

Test voltage : AC 120V/60Hz
 Temp. / R.H. : 23°C / 61%RH
 Atmospheric pressure : 1008hPa

Phase	Frequency (MHz)	Corr. Factor (dB)	Reading QP (dBuV)	Level QP (dBuV)	Limit QP (dBuV)	Reading AV (dBuV)	Level AV (dBuV)	Limit AV (dBuV)	Margin (dB)	
									QP	AV
NEUTRAL	0.151	9.62	47.73	57.35	79.00	40.33	49.96	66.00	-21.65	-16.04
NEUTRAL	0.224	9.67	36.50	46.16	79.00	29.16	38.82	66.00	-32.84	-27.18
NEUTRAL	0.377	9.77	32.15	41.93	79.00	26.17	35.94	66.00	-37.07	-30.06
NEUTRAL	0.527	9.83	27.01	36.84	73.00	23.39	33.22	60.00	-36.16	-26.78
NEUTRAL	5.505	9.83	24.03	33.86	73.00	15.56	25.39	60.00	-39.14	-34.61
NEUTRAL	7.606	9.84	21.89	31.73	73.00	10.70	20.54	60.00	-41.27	-39.46

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dBuV) = Corr. Factor (dB) + Reading (dBuV)
3. Margin (dB) = Level (dBuV) – Limit (dBuV)

Appendix A: Test equipment list

Test Equipment/ Test site	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	Rohde & Schwarz	ESR7	101822	2021/08/16	2022/08/15
Signal Analyzer	Agilent	N9030A	MY51380492	2021/08/17	2022/08/16
Active Loop Antenna	SCHWARZBECK MESS-ELEKTRONIK	FMZB1519	1519-067	2022/04/13	2023/04/12
Broadband Antenna	SHWARZBECK	VULB 9168	9168-172	2022/01/20	2023/01/19
Horn Antenna	EMCO	BBHA 9120 D	9120D-456	2022/01/21	2023/01/20
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170159	2021/04/08	2024/04/07
Broadband Amplifier	SGH	SGH118(45dB)	20220105-1	2022/01/07	2023/01/06
Pre-amplifier	SGH	SGH184	20201124-1	2021/12/06	2022/12/05
Power Meter	Anritsu	ML2495A	0844001	2021/10/17	2022/10/16
Power Sensor	Anritsu	MA2491A	031543	2022/03/07	2023/03/06
966-2(A) Cable	SUHNER	SMA / EX 100	N/A	2022/03/04	2023/03/03
966-2(B) Cable	SUHNER	SUCOFLEX 104P	CB0005	2022/03/04	2023/03/03
966-2 Cable	SUHNER	SUCOFLEX 104P	9403/4P	2021/11/30	2022/11/29
966-2_3m Semi-Anechoic Chamber	966_2	CEM-966_2	N/A	2022/01/14	2023/01/13
Hight Pass Filter	Reactel	7HS-3G/18G-S11	N/A	2021/05/26	2022/05/25
20dB Attenuator	Mini-Circuits	BW-S20W5+	N/A	2021/05/26	2022/05/25
Test software	Audix	e3	V9	NCR	NCR

Note: No Calibration Required (NCR).

Test Equipment	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	R&S	ESCI	100018	2021/11/16	2022/11/15
LISN	R&S	ENV216	101160	2021/07/14	2022/07/13
LISN	R&S	ESH3-Z5	835239/023	2021/09/22	2022/09/21
CON-2 Cable	SUHNER	EMCCFD300-B M-NM-6000	170502	2021/04/29	2022/04/28
Test software	Audix	e3	V4.20040112L	NCR	NCR

Note: No Calibration Required (NCR).

Appendix B: Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

Item	Uncertainty
Vertically polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.16 dB
Horizontally polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.02 dB
Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	5.17 dB
Vertically polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.39 dB
Horizontally polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.39 dB
Radiated disturbances from 9kHz~30MHz in a semi-anechoic chamber at a distance of 3m	3.70 dB
Emission on the Band Edge Test	4.32 dB
Occupied Bandwidth	7.78 %
Maximum Peak Conducted Output Power	0.44 dB
Power Spectral Density	1.27 dB
Emissions In Non-Restricted Frequency Bands	1.27 dB
AC Power Line Conducted Emission	3.08 dB