


**Test Mode** Mode 1, Band 3

Test Mode : 1TX 11a CH100 6Mbps
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

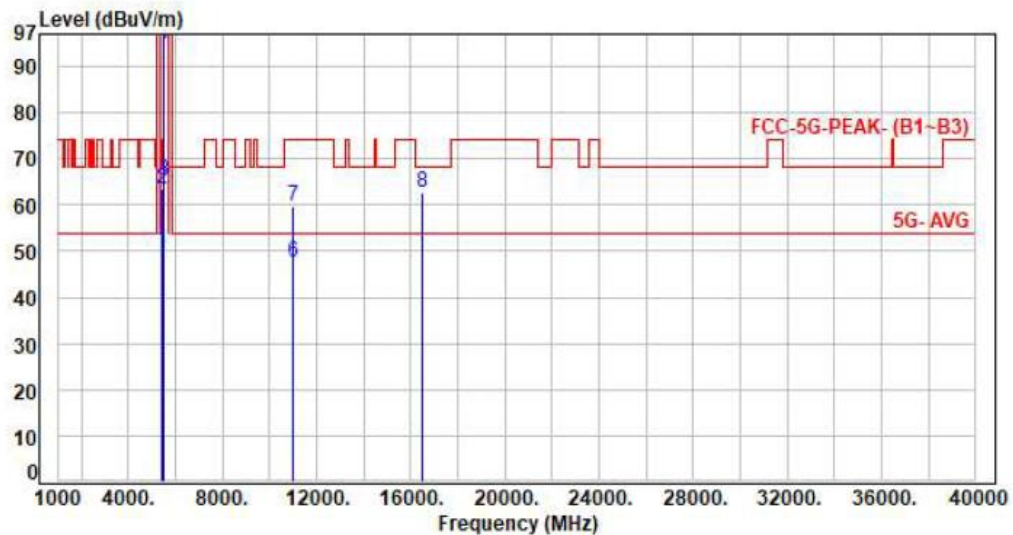

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.51	50.06	54.00	-3.94	Average	367	291	P
2	5460.00	7.55	55.91	63.46	74.00	-10.54	Peak	367	291	P
3	5470.00	7.58	57.84	65.42	68.20	-2.78	Peak	367	291	P
4	5500.00	7.68	87.20	94.88	200.00	-105.12	Average	367	291	P
5	5500.00	7.68	96.28	103.96	200.00	-96.04	Peak	367	291	P
6	11000.00	17.78	29.74	47.52	54.00	-6.48	Average	100	174	P
7	11000.00	17.78	42.11	59.89	74.00	-14.11	Peak	100	174	P
8	16500.00	20.78	41.88	62.66	68.20	-5.54	Peak	100	262	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** | Mode 1, Band 3

Test Mode : 1TX 11a CH120 6Mbps
Voltage : From System(AC120V/60Hz)
Pol : Vertical

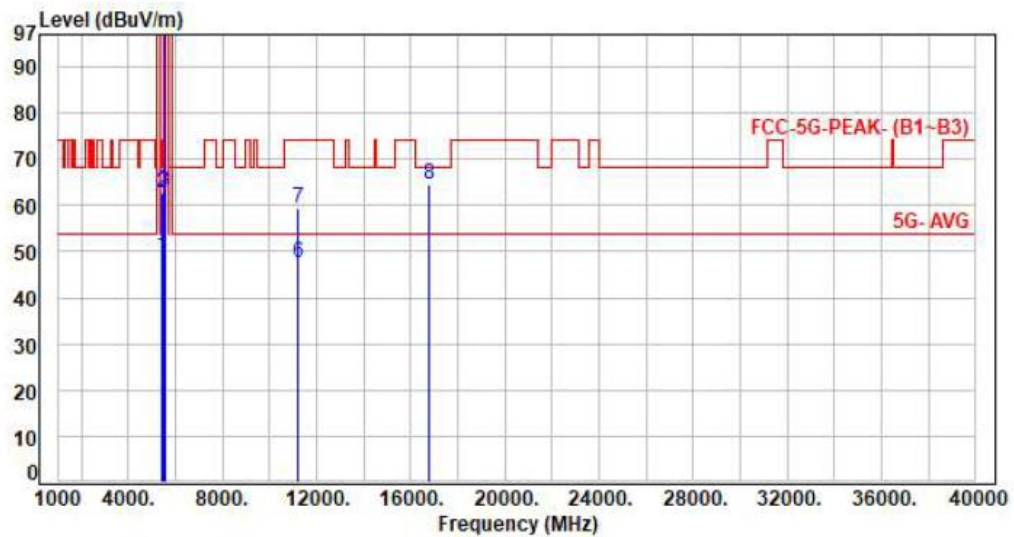


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	41.38	48.93	54.00	-5.07	Average	301	153	P
2	5460.00	7.55	55.13	62.68	74.00	-11.32	Peak	301	153	P
3	5470.00	7.58	55.48	63.06	68.20	-5.14	Peak	301	153	P
4	5600.00	7.51	96.52	104.03	200.00	-95.97	Average	301	153	P
5	5600.00	7.51	105.77	113.28	200.00	-86.72	Peak	301	153	P
6	11200.00	17.89	29.74	47.63	54.00	-6.37	Average	100	192	P
7	11200.00	17.89	41.46	59.35	74.00	-14.65	Peak	100	192	P
8	16800.00	22.29	42.33	64.62	68.20	-3.58	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3

Test Mode : 1TX 11a CH120 6Mbps
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

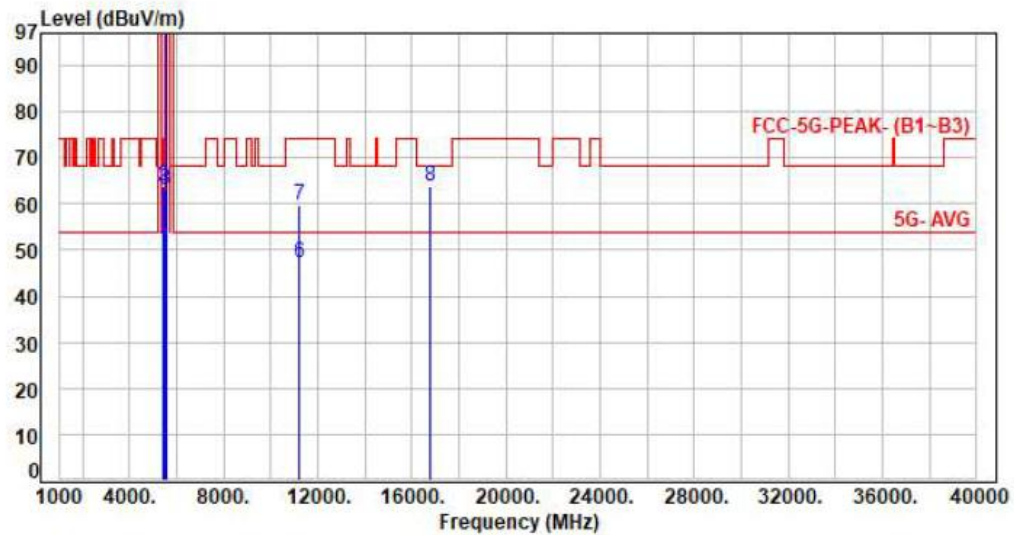


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.46	50.01	54.00	-3.99	Average	232	256	P
2	5460.00	7.55	56.29	63.84	74.00	-10.16	Peak	232	256	P
3	5470.00	7.58	55.62	63.20	68.20	-5.00	Peak	232	256	P
4	5600.00	7.51	90.11	97.62	200.00	-102.38	Average	232	256	P
5	5600.00	7.51	99.51	107.02	200.00	-92.98	Peak	232	256	P
6	11200.00	17.89	29.47	47.36	54.00	-6.64	Average	100	212	P
7	11200.00	17.89	41.99	59.88	74.00	-14.12	Peak	100	212	P
8	16800.00	22.29	41.66	63.95	68.20	-4.25	Peak	100	132	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3

Test Mode : 1TX 11a CH140 6Mbps
Voltage : From System(AC120V/60Hz)
Pol : Vertical

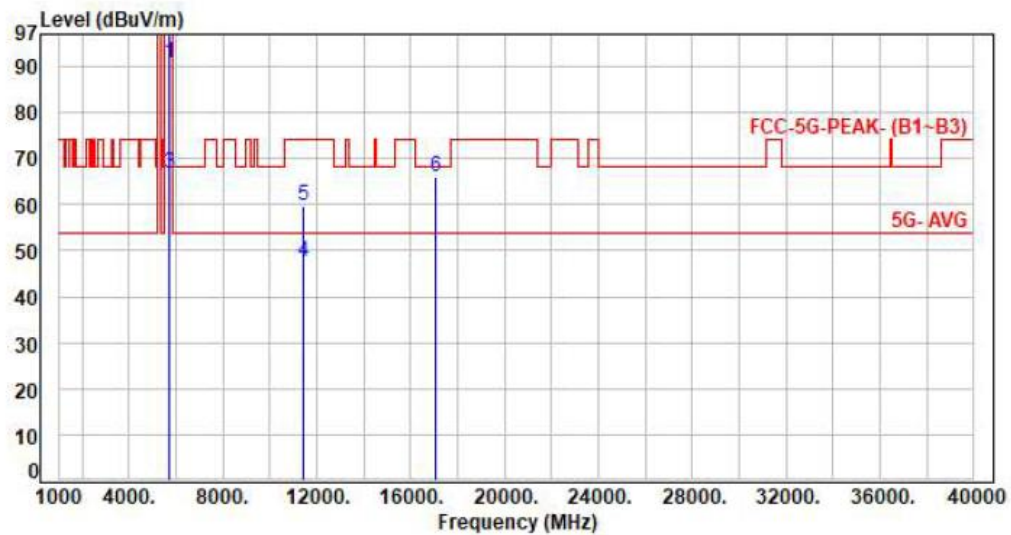


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	83.46	90.89	200.00	-109.11	Average	383	170	P
2	5700.00	7.43	92.18	99.61	200.00	-100.39	Peak	383	170	P
3	5725.00	7.43	59.42	66.85	68.20	-1.35	Peak	383	170	P
4	11400.00	18.08	29.47	47.55	54.00	-6.45	Average	100	131	P
5	11400.00	18.08	41.66	59.74	74.00	-14.26	Peak	100	131	P
6	17100.00	24.04	42.15	66.19	68.20	-2.01	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3

Test Mode : 1TX 11a CH140 6Mbps
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

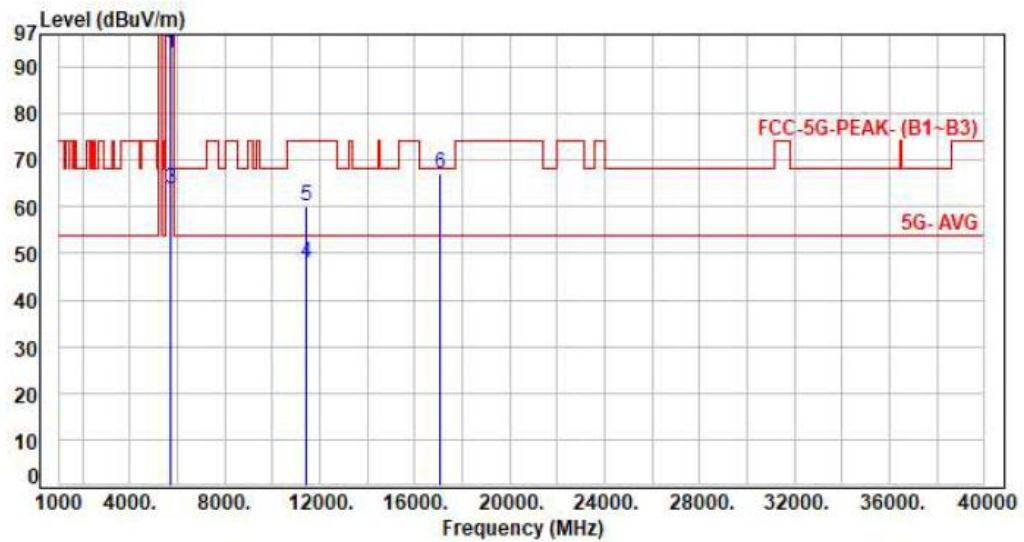


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	85.34	92.77	200.00	-107.23	Average	240	246	P
2	5700.00	7.43	95.67	103.10	200.00	-96.90	Peak	240	246	P
3	5725.00	7.43	56.30	63.73	68.20	-4.47	Peak	240	246	P
4	11400.00	18.08	29.74	47.82	54.00	-6.18	Average	100	135	P
5	11400.00	18.08	41.99	60.07	74.00	-13.93	Peak	100	135	P
6	17100.00	24.04	42.96	67.00	68.20	-1.20	Peak	100	195	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** | Mode 2, Band 3

Test Mode : 1TX 11ac20 CH100 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Vertical

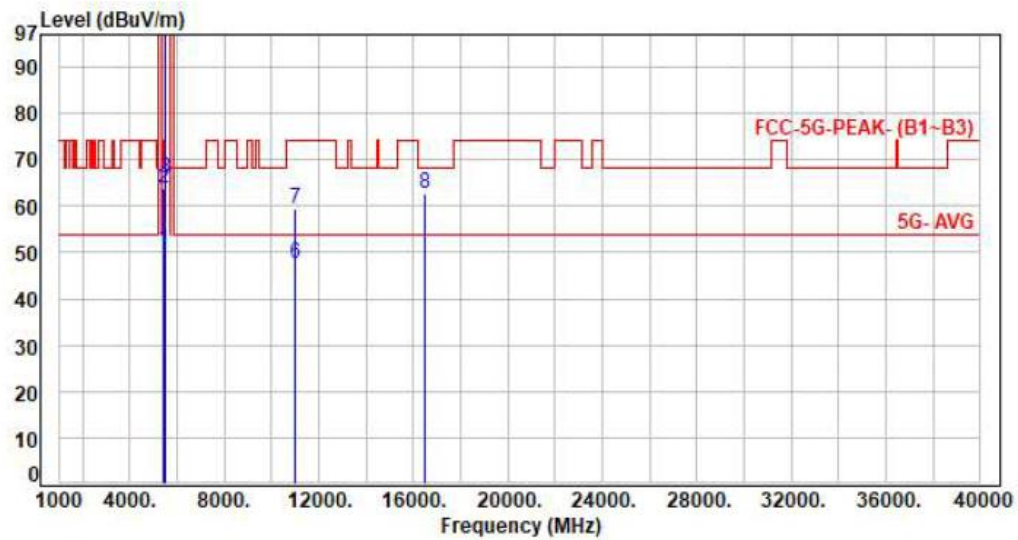


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.04	50.59	54.00	-3.41	Average	328	175	P
2	5460.00	7.55	56.13	63.68	74.00	-10.32	Peak	328	175	P
3	5470.00	7.58	58.52	66.10	68.20	-2.10	Peak	328	175	P
4	5500.00	7.68	90.15	97.83	200.00	-102.17	Average	328	175	P
5	5500.00	7.68	100.41	108.09	200.00	-91.91	Peak	328	175	P
6	11000.00	17.78	29.64	47.42	54.00	-6.58	Average	100	198	P
7	11000.00	17.78	41.77	59.55	74.00	-14.45	Peak	100	198	P
8	16500.00	20.78	41.99	62.77	68.20	-5.43	Peak	100	216	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH100 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

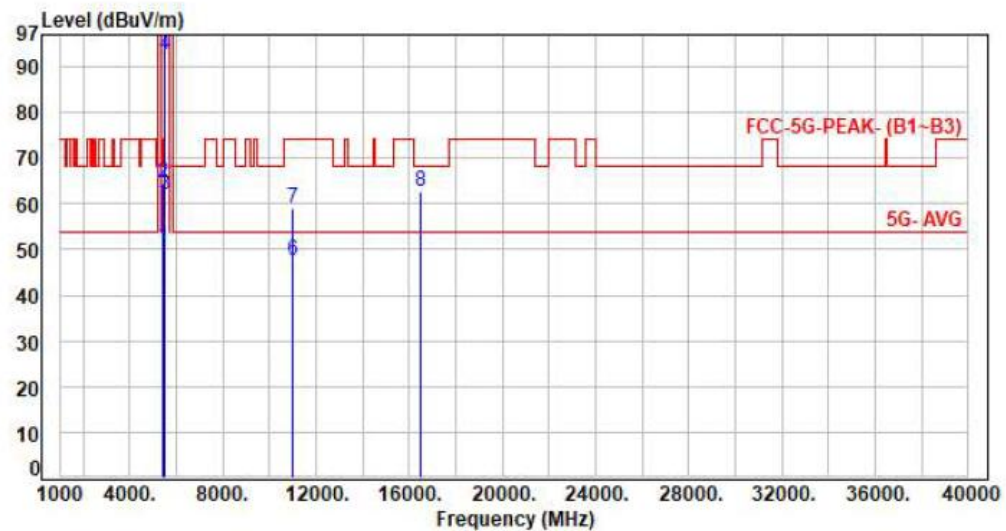

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.95	50.50	54.00	-3.50	Average	367	292	P
2	5460.00	7.55	56.83	64.38	74.00	-9.62	Peak	367	292	P
3	5470.00	7.58	54.25	61.83	68.20	-6.37	Peak	367	292	P
4	5500.00	7.68	84.89	92.57	200.00	-107.43	Average	367	292	P
5	5500.00	7.68	94.45	102.13	200.00	-97.87	Peak	367	292	P
6	11000.00	17.78	29.74	47.52	54.00	-6.48	Average	100	221	P
7	11000.00	17.78	41.36	59.14	74.00	-14.86	Peak	100	221	P
8	16500.00	20.78	41.96	62.74	68.20	-5.46	Peak	100	149	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH120 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Vertical

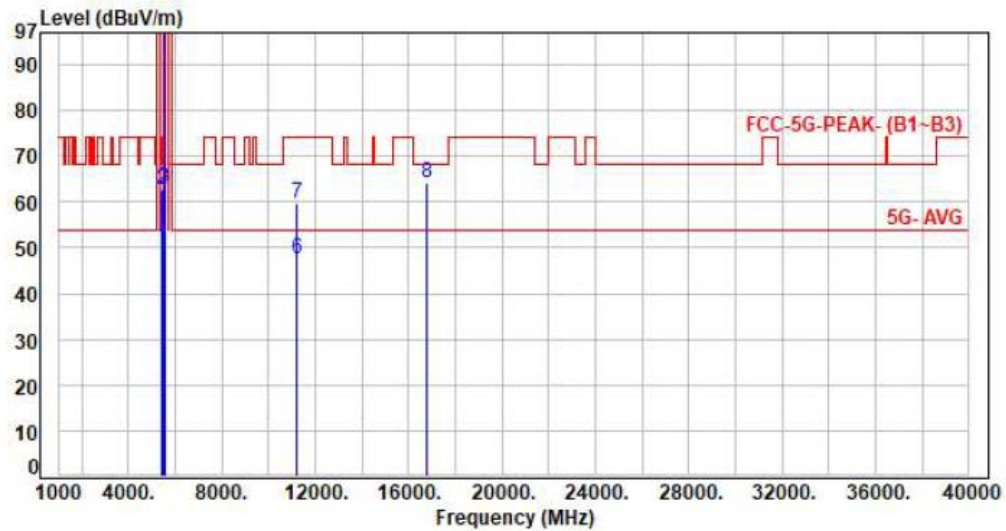

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.49	50.04	54.00	-3.96	Average	366	172	P
2	5460.00	7.55	55.00	62.55	74.00	-11.45	Peak	366	172	P
3	5470.00	7.58	55.59	63.17	68.20	-5.03	Peak	366	172	P
4	5600.00	7.51	95.94	103.45	200.00	-96.55	Average	366	172	P
5	5600.00	7.51	95.94	103.45	200.00	-96.55	Peak	366	172	P
6	11200.00	17.89	29.67	47.56	54.00	-6.44	Average	100	174	P
7	11200.00	17.89	41.94	59.83	74.00	-14.17	Peak	100	174	P
8	16800.00	22.29	41.88	64.17	68.20	-4.03	Peak	100	252	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH120 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

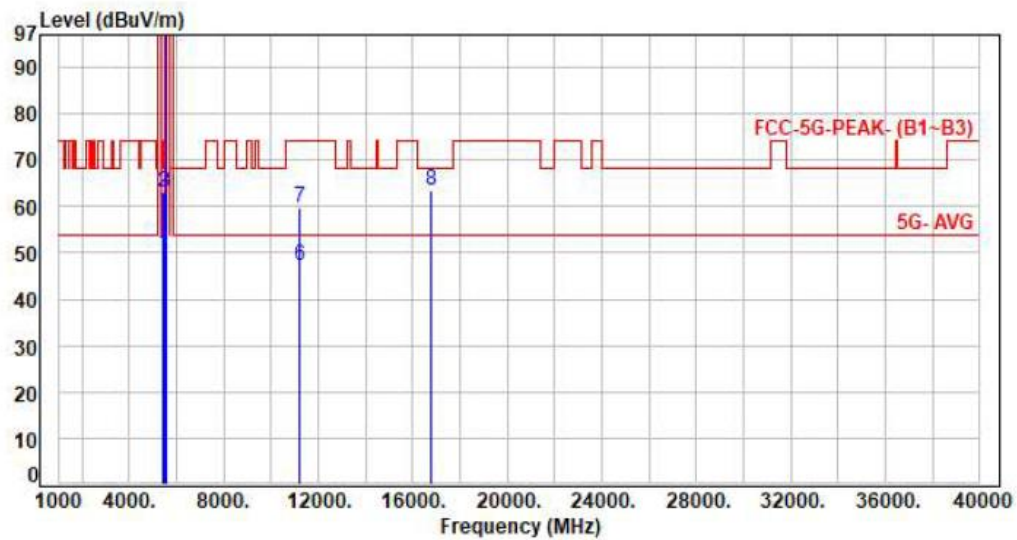

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.40	49.95	54.00	-4.05	Average	246	249	P
2	5460.00	7.55	55.40	62.95	74.00	-11.05	Peak	246	249	P
3	5470.00	7.58	55.31	62.89	68.20	-5.31	Peak	246	249	P
4	5600.00	7.51	91.37	98.88	200.00	-101.12	Average	246	249	P
5	5600.00	7.51	101.11	108.62	200.00	-91.38	Peak	246	249	P
6	11200.00	17.89	29.47	47.36	54.00	-6.64	Average	100	123	P
7	11200.00	17.89	41.96	59.85	74.00	-14.15	Peak	100	123	P
8	16800.00	22.29	41.33	63.62	68.20	-4.58	Peak	100	187	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH140 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Vertical

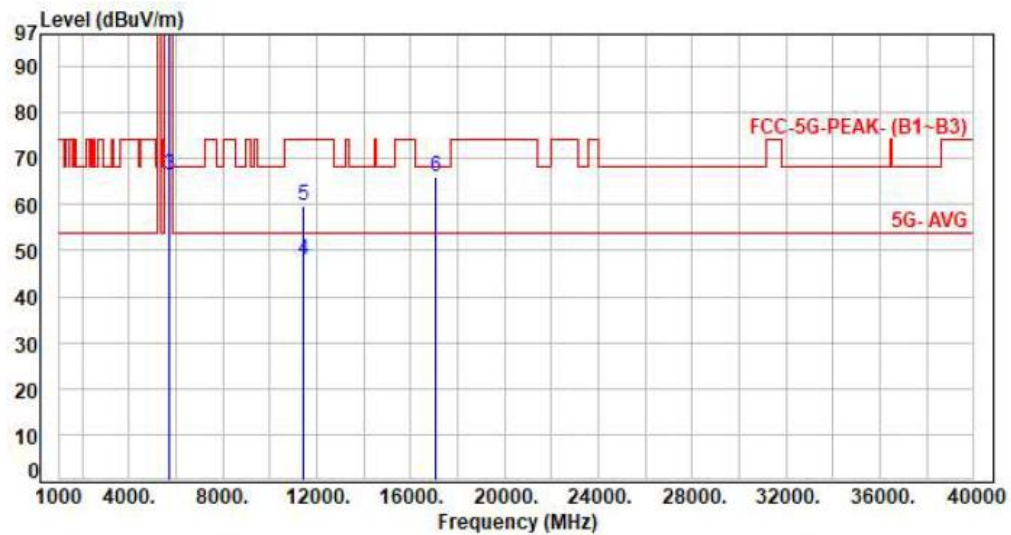

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	89.81	97.24	200.00	-102.76	Average	353	172	P
2	5700.00	7.43	100.47	107.90	200.00	-92.10	Peak	353	172	P
3	5725.00	7.43	59.01	66.44	68.20	-1.76	Peak	353	172	P
4	11400.00	18.08	29.74	47.82	54.00	-6.18	Average	100	188	P
5	11400.00	18.08	41.66	59.74	74.00	-14.26	Peak	100	188	P
6	17100.00	24.04	41.99	66.03	68.20	-2.17	Peak	100	132	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3

Test Mode : 1TX 11ac20 CH140 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

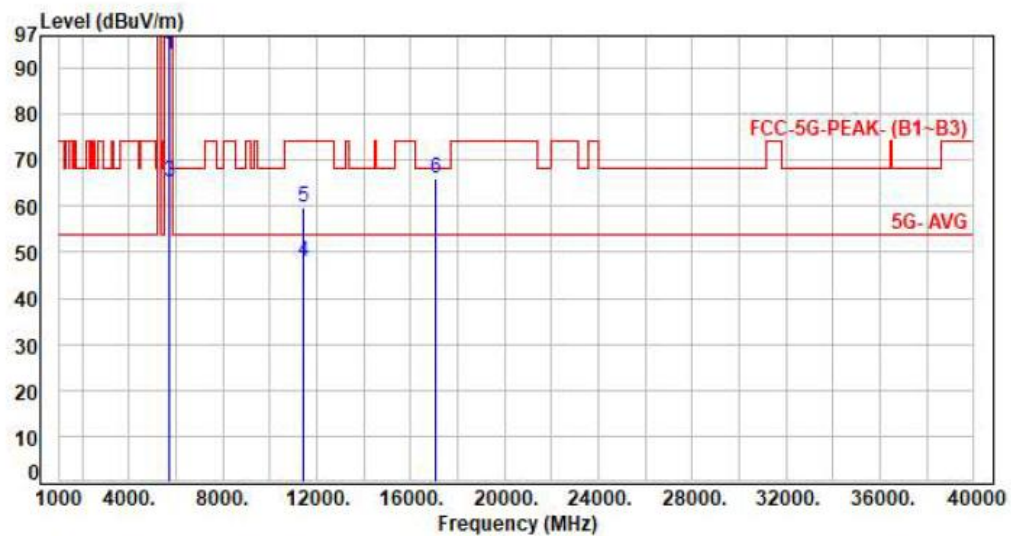

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	85.44	92.87	200.00	-107.13	Average	246	254	P
2	5700.00	7.43	95.40	102.83	200.00	-97.17	Peak	246	254	P
3	5725.00	7.43	57.82	65.25	68.20	-2.95	Peak	246	254	P
4	11400.00	18.08	29.77	47.85	54.00	-6.15	Average	100	174	P
5	11400.00	18.08	41.76	59.84	74.00	-14.16	Peak	100	174	P
6	17100.00	24.04	41.96	66.00	68.20	-2.20	Peak	100	123	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH102 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Vertical

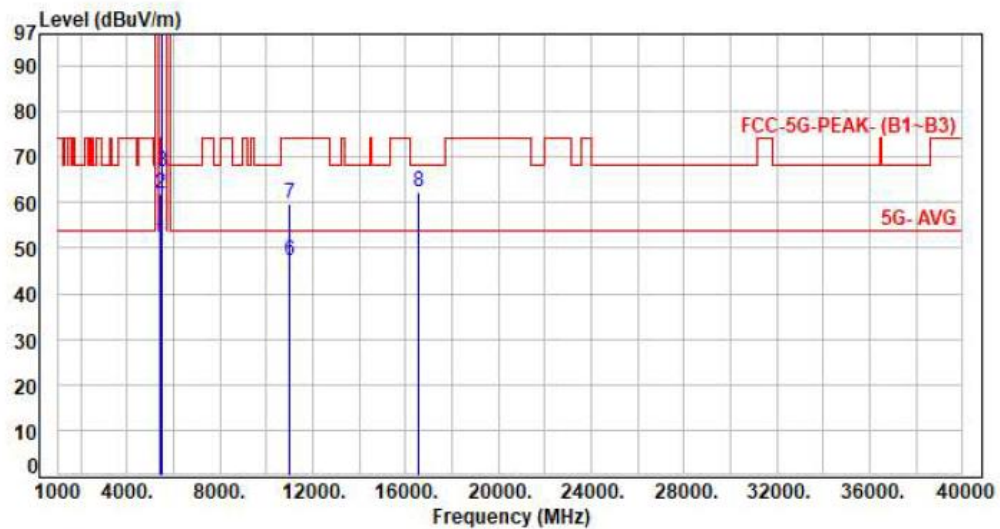

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.18	51.73	54.00	-2.27	Average	362	178	P
2	5460.00	7.55	54.26	61.81	74.00	-12.19	Peak	362	178	P
3	5470.00	7.58	59.09	66.67	68.20	-1.53	Peak	362	178	P
4	5510.00	7.66	88.33	95.99	200.00	-104.01	Average	362	178	P
5	5510.00	7.66	97.77	105.43	200.00	-94.57	Peak	362	178	P
6	11020.00	17.81	29.46	47.27	54.00	-6.73	Average	100	165	P
7	11020.00	17.81	41.98	59.79	74.00	-14.21	Peak	100	165	P
8	16530.00	21.02	41.32	62.34	68.20	-5.86	Peak	100	212	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH102 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

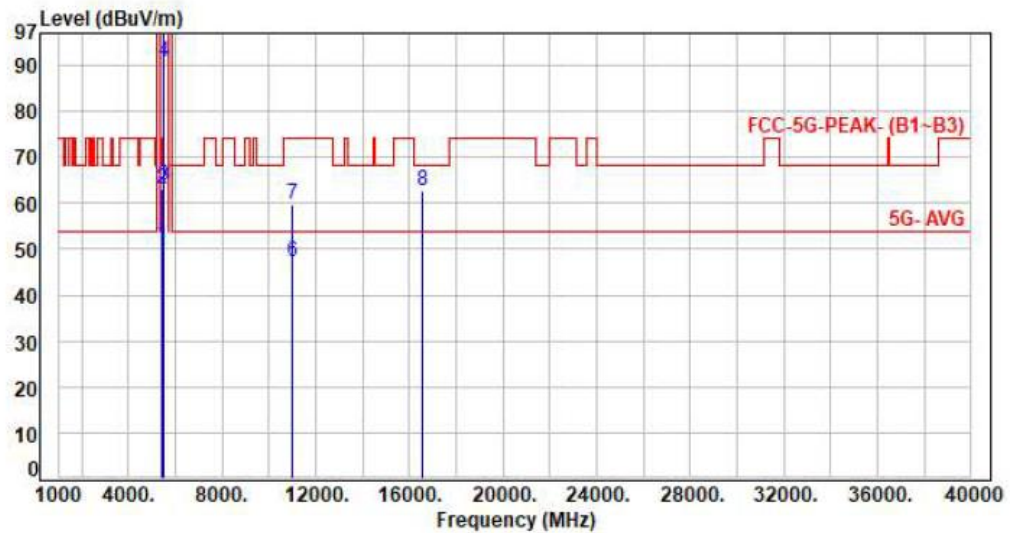

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.30	50.85	54.00	-3.15	Average	400	232	P
2	5460.00	7.55	55.42	62.97	74.00	-11.03	Peak	400	232	P
3	5470.00	7.58	56.10	63.68	68.20	-4.52	Peak	400	232	P
4	5510.00	7.66	82.95	90.61	200.00	-109.39	Average	400	232	P
5	5510.00	7.66	91.23	98.89	200.00	-101.11	Peak	400	232	P
6	11020.00	17.81	29.45	47.26	54.00	-6.74	Average	100	178	P
7	11020.00	17.81	41.94	59.75	74.00	-14.25	Peak	100	178	P
8	16530.00	21.02	41.65	62.67	68.20	-5.53	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH118 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Vertical

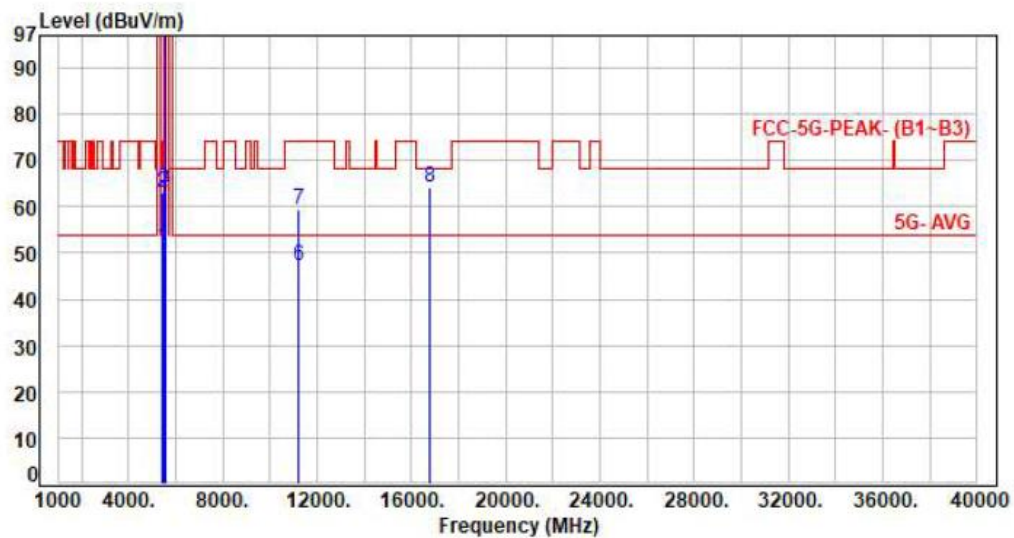

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.64	51.19	54.00	-2.81	Average	317	168	P
2	5460.00	7.55	55.46	63.01	74.00	-10.99	Peak	317	168	P
3	5470.00	7.58	56.09	63.67	68.20	-4.53	Peak	317	168	P
4	5590.00	7.53	93.37	100.90	200.00	-99.10	Average	317	168	P
5	5590.00	7.53	102.47	110.00	200.00	-90.00	Peak	317	168	P
6	11180.00	17.87	29.47	47.34	54.00	-6.66	Average	100	114	P
7	11180.00	17.87	41.68	59.55	74.00	-14.45	Peak	100	114	P
8	16770.00	22.21	41.87	64.08	68.20	-4.12	Peak	100	232	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH118 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

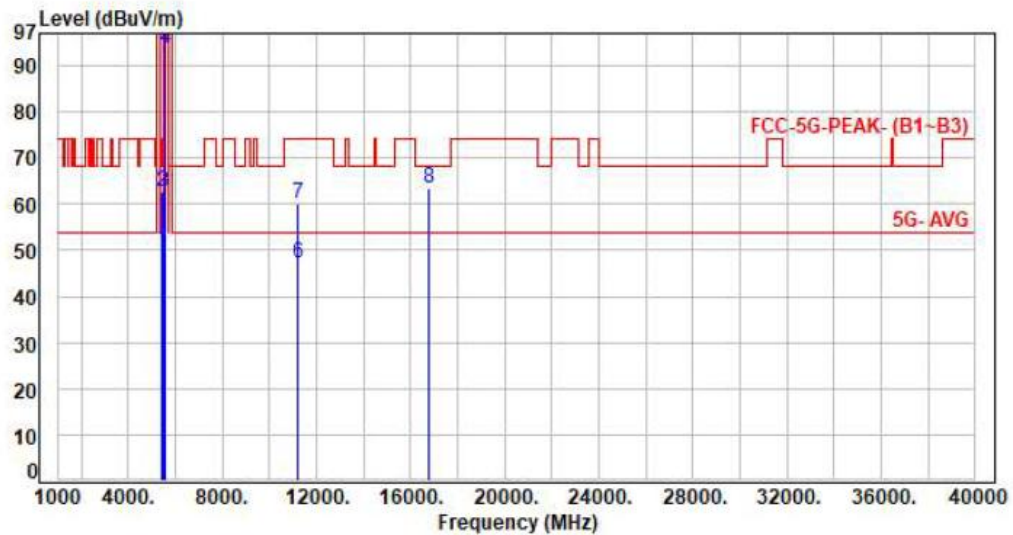


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.79	50.34	54.00	-3.66	Average	391	309	P
2	5460.00	7.55	55.18	62.73	74.00	-11.27	Peak	391	309	P
3	5470.00	7.58	55.25	62.83	68.20	-5.37	Peak	391	309	P
4	5590.00	7.53	86.18	93.71	200.00	-106.29	Average	391	309	P
5	5590.00	7.53	95.98	103.51	200.00	-96.49	Peak	391	309	P
6	11180.00	17.87	29.47	47.34	54.00	-6.66	Average	100	275	P
7	11180.00	17.87	42.11	59.98	74.00	-14.02	Peak	100	275	P
8	16770.00	22.21	41.40	63.61	68.20	-4.59	Peak	100	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH134 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Vertical

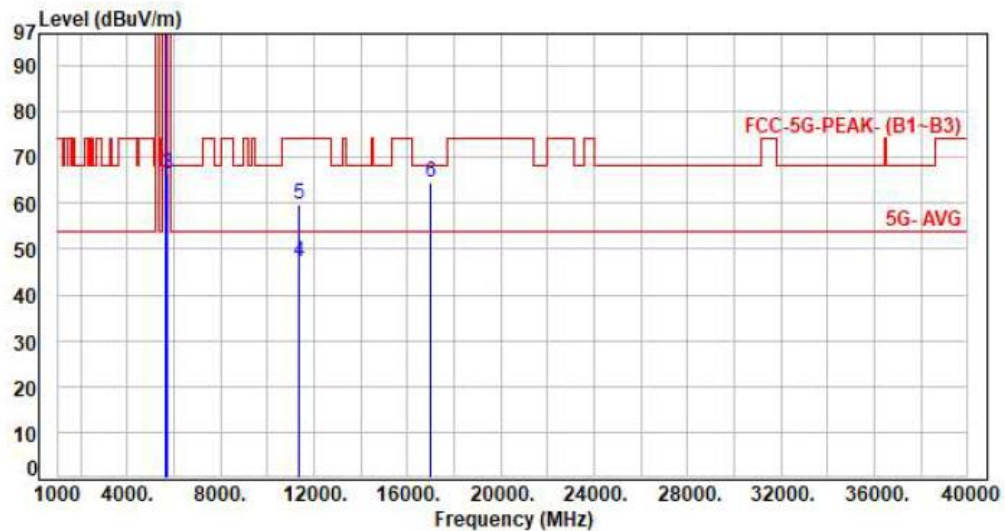

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	90.12	97.60	200.00	-102.40	Average	323	172	P
2	5670.00	7.48	99.39	106.87	200.00	-93.13	Peak	323	172	P
3	5725.00	7.43	58.90	66.33	68.20	-1.87	Peak	323	172	P
4	11340.00	17.96	29.40	47.36	54.00	-6.64	Average	100	174	P
5	11340.00	17.96	41.95	59.91	74.00	-14.09	Peak	100	174	P
6	17010.00	23.47	41.06	64.53	68.20	-3.67	Peak	100	214	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3

Test Mode : 1TX 11ac40 CH134 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

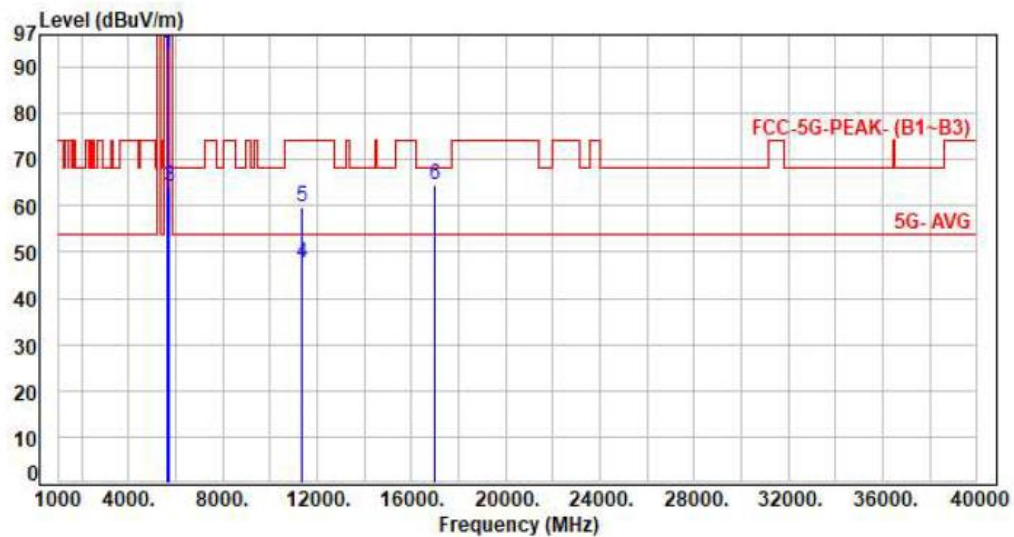

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	85.43	92.91	200.00	-107.09	Average	215	260	P
2	5670.00	7.48	95.74	103.22	200.00	-96.78	Peak	215	260	P
3	5725.00	7.43	56.61	64.04	68.20	-4.16	Peak	215	260	P
4	11340.00	17.96	29.47	47.43	54.00	-6.57	Average	100	118	P
5	11340.00	17.96	41.74	59.70	74.00	-14.30	Peak	100	262	P
6	17010.00	23.47	41.08	64.55	68.20	-3.65	Peak	100	62	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3

Test Mode : 1TX 11ac80 CH106 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Vertical

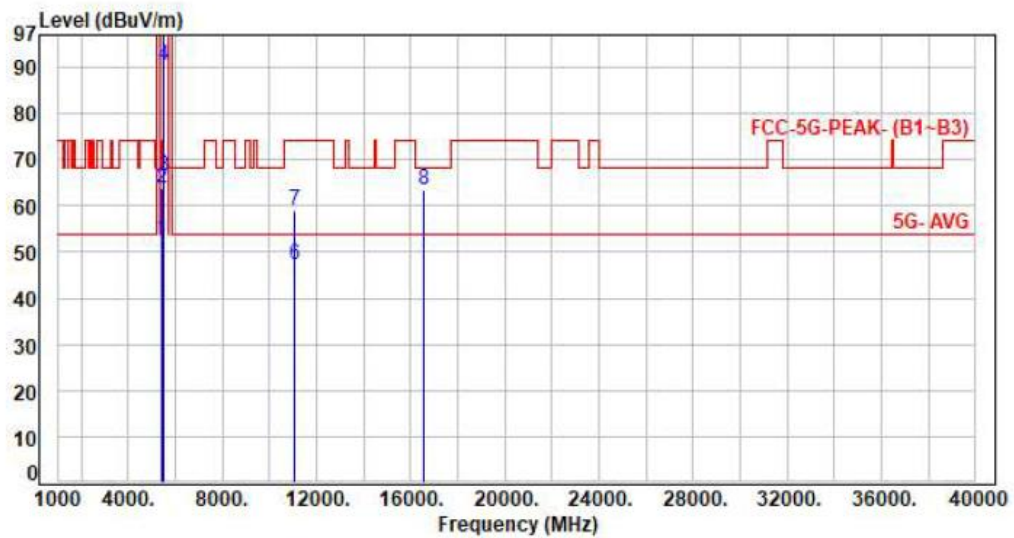


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	45.19	52.74	54.00	-1.26	Average	325	171	P
2	5460.00	7.55	56.33	63.88	74.00	-10.12	Peak	325	171	P
3	5470.00	7.58	58.67	66.25	68.20	-1.95	Peak	325	171	P
4	5530.00	7.63	82.67	90.30	200.00	-109.70	Average	325	171	P
5	5530.00	7.63	91.97	99.60	200.00	-100.40	Peak	325	171	P
6	11060.00	17.87	29.44	47.31	54.00	-6.69	Average	100	177	P
7	11060.00	17.87	41.19	59.06	74.00	-14.94	Peak	100	177	P
8	16590.00	21.59	41.87	63.46	68.20	-4.74	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3

Test Mode : 1TX 11ac80 CH106 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

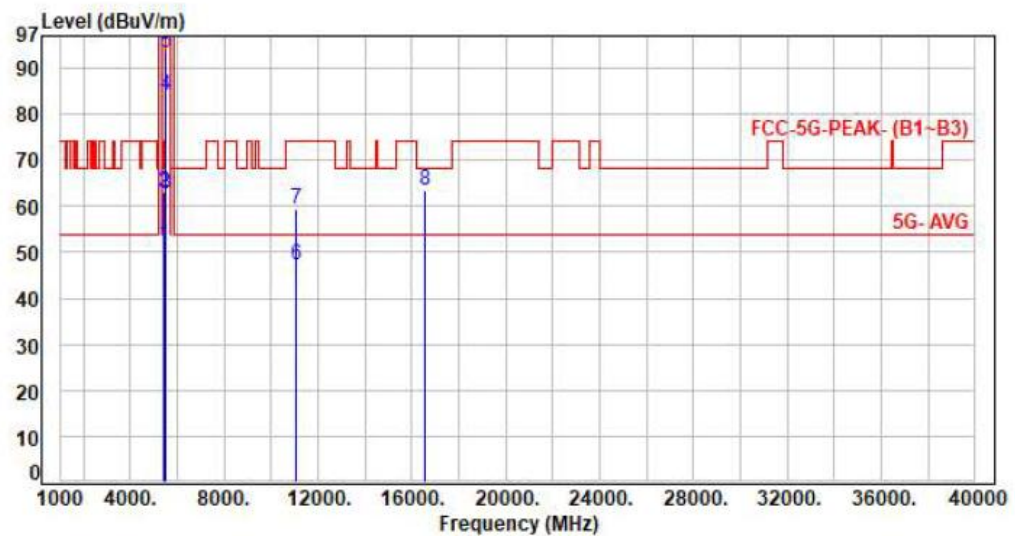

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.98	51.53	54.00	-2.47	Average	400	221	P
2	5460.00	7.55	55.69	63.24	74.00	-10.76	Peak	400	221	P
3	5470.00	7.58	55.27	62.85	68.20	-5.35	Peak	400	221	P
4	5530.00	7.63	76.40	84.03	200.00	-115.97	Average	400	221	P
5	5530.00	7.63	85.78	93.41	200.00	-106.59	Peak	400	221	P
6	11060.00	17.87	29.47	47.34	54.00	-6.66	Average	100	285	P
7	11060.00	17.87	41.63	59.50	74.00	-14.50	Peak	100	285	P
8	16590.00	21.59	41.85	63.44	68.20	-4.76	Peak	100	175	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3

Test Mode : 1TX 11ac80 CH122 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Vertical

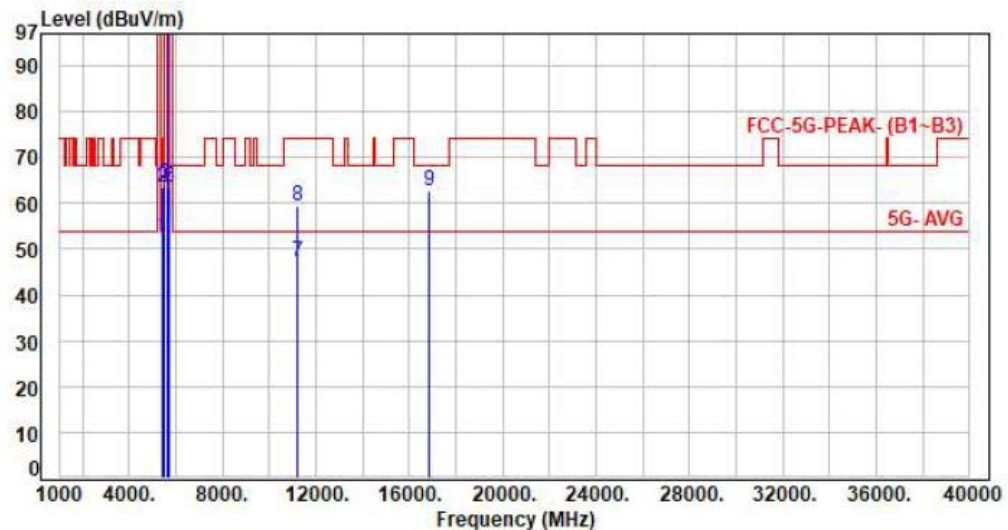

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	45.21	52.76	54.00	-1.24	Average	366	173	P
2	5460.00	7.55	55.75	63.30	74.00	-10.70	Peak	366	173	P
3	5470.00	7.58	56.66	64.24	68.20	-3.96	Peak	366	173	P
4	5610.00	7.51	88.02	95.53	200.00	-104.47	Average	366	173	P
5	5610.00	7.51	97.31	104.82	200.00	-95.18	Peak	366	173	P
6	5725.00	7.43	55.99	63.42	68.20	-4.78	Peak	366	173	P
7	11220.00	17.88	29.47	47.35	54.00	-6.65	Average	100	188	P
8	11220.00	17.88	41.47	59.35	74.00	-14.65	Peak	100	188	P
9	16830.00	22.58	40.18	62.76	68.20	-5.44	Peak	100	221	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3

Test Mode : 1TX 11ac80 CH122 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

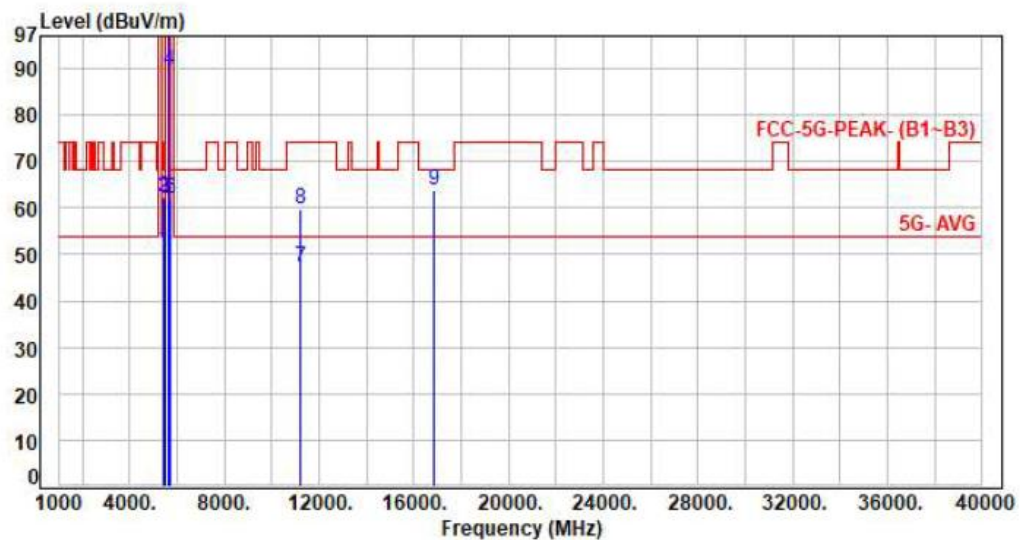


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.37	50.92	54.00	-3.08	Average	391	314	P
2	5460.00	7.55	54.68	62.23	74.00	-11.77	Peak	391	314	P
3	5470.00	7.58	54.56	62.14	68.20	-6.06	Peak	391	314	P
4	5610.00	7.51	82.06	89.57	200.00	-110.43	Average	391	314	P
5	5610.00	7.51	91.99	99.50	200.00	-100.50	Peak	391	314	P
6	5725.00	7.43	54.36	61.79	68.20	-6.41	Peak	391	314	P
7	11220.00	17.88	29.47	47.35	54.00	-6.65	Average	100	196	P
8	11220.00	17.88	41.74	59.62	74.00	-14.38	Peak	100	196	P
9	16830.00	22.58	41.07	63.65	68.20	-4.55	Peak	100	147	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3: Straddle Channel

Test Mode : 1TX 11a CH144 6Mbps
Voltage : From System(AC120V/60Hz)
Pol : Vertical

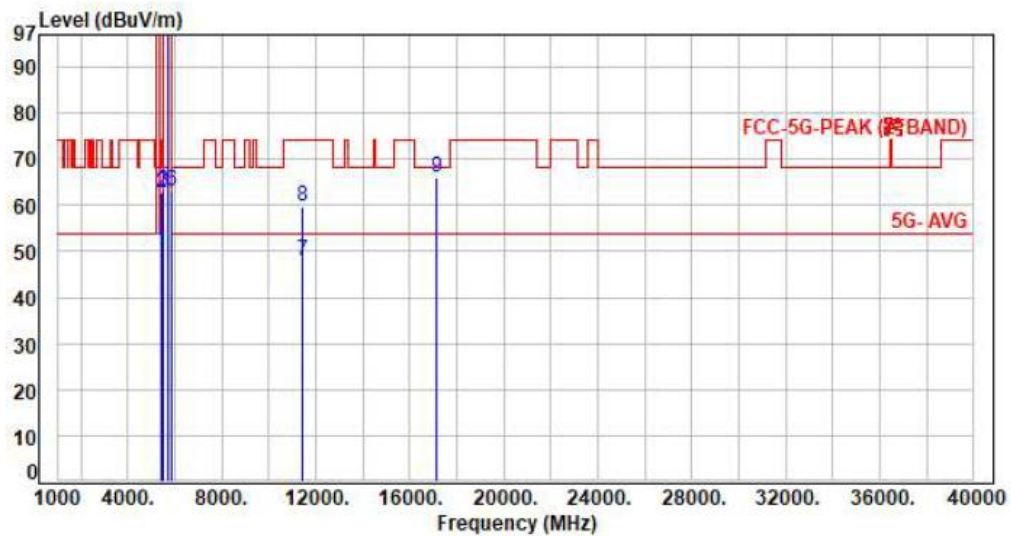


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.43	49.98	54.00	-4.02	Average	319	150	P
2	5460.00	7.55	55.30	62.85	74.00	-11.15	Peak	319	150	P
3	5470.00	7.58	55.45	63.03	68.20	-5.17	Peak	319	150	P
4	5720.00	7.43	95.39	102.82	200.00	-97.18	Average	319	150	P
5	5720.00	7.43	104.19	111.62	200.00	-88.38	Peak	319	150	P
6	5850.00	7.47	55.64	63.11	68.20	-5.09	Peak	319	150	P
7	11440.00	18.20	29.62	47.82	54.00	-6.18	Average	100	118	P
8	11440.00	18.20	41.65	59.85	74.00	-14.15	Peak	100	118	P
9	17160.00	24.13	41.77	65.90	68.20	-2.30	Peak	100	127	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 3: Straddle Channel

Test Mode : 1TX 11a CH144 6Mbps
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

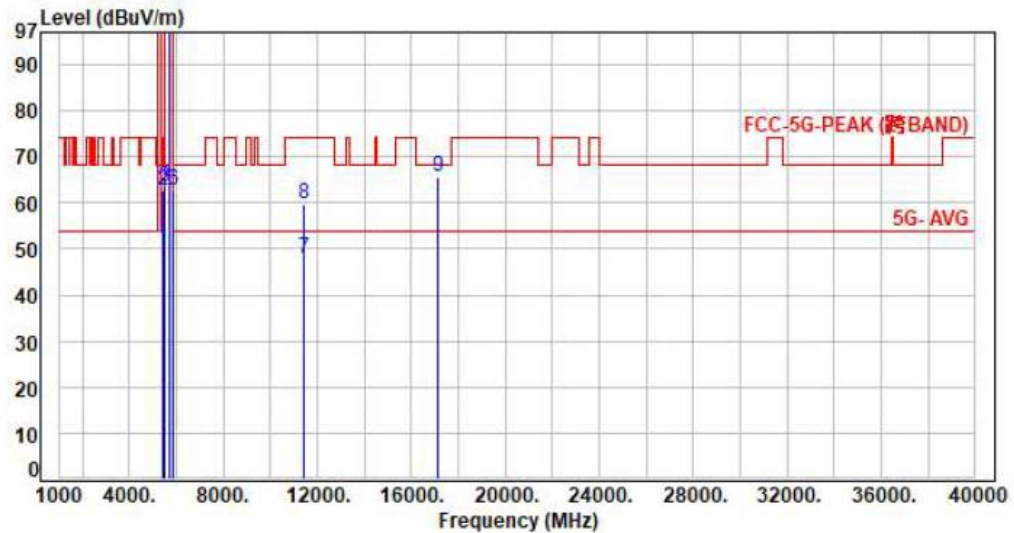

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.46	50.01	54.00	-3.99	Average	251	248	P
2	5460.00	7.55	55.23	62.78	74.00	-11.22	Peak	251	248	P
3	5470.00	7.58	55.81	63.39	68.20	-4.81	Peak	251	248	P
4	5720.00	7.43	91.63	99.06	200.00	-100.94	Average	251	248	P
5	5720.00	7.43	100.66	108.09	200.00	-91.91	Peak	251	248	P
6	5850.00	7.47	55.20	62.67	68.20	-5.53	Peak	251	248	P
7	11440.00	18.20	29.65	47.85	54.00	-6.15	Average	100	231	P
8	11440.00	18.20	41.73	59.93	74.00	-14.07	Peak	100	231	P
9	17160.00	24.13	41.66	65.79	68.20	-2.41	Peak	100	188	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3: Straddle Channel

Test Mode : 1TX 11ac20 CH144 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Vertical

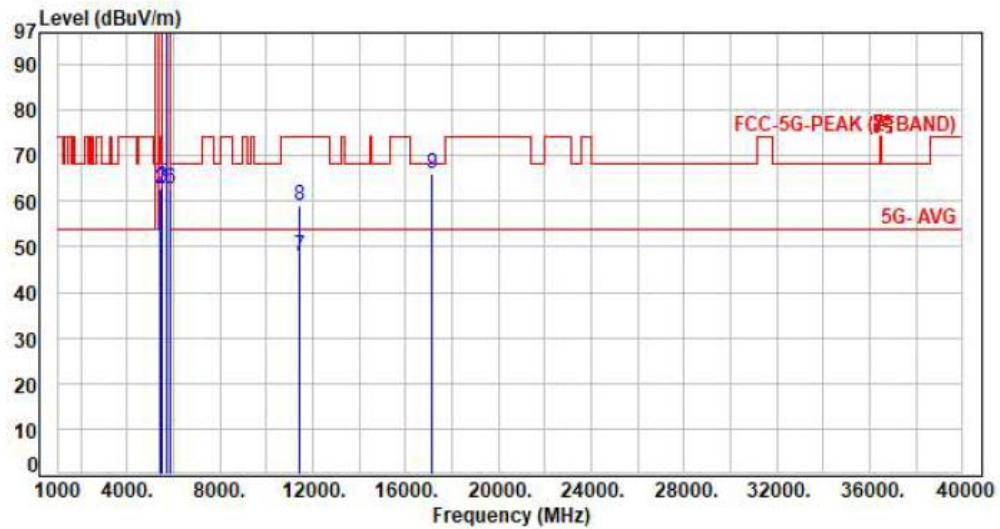

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.44	49.99	54.00	-4.01	Average	370	175	P
2	5460.00	7.55	55.01	62.56	74.00	-11.44	Peak	370	175	P
3	5470.00	7.58	55.56	63.14	68.20	-5.06	Peak	370	175	P
4	5720.00	7.43	94.73	102.16	200.00	-97.84	Average	370	175	P
5	5720.00	7.43	104.12	111.55	200.00	-88.45	Peak	370	175	P
6	5850.00	7.47	55.06	62.53	68.20	-5.67	Peak	370	175	P
7	11440.00	18.20	29.73	47.93	54.00	-6.07	Average	100	123	P
8	11440.00	18.20	40.98	59.18	74.00	-14.82	Peak	100	123	P
9	17160.00	24.13	41.87	66.00	68.20	-2.20	Peak	100	118	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 3: Straddle Channel

Test Mode : 1TX 11ac20 CH144 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

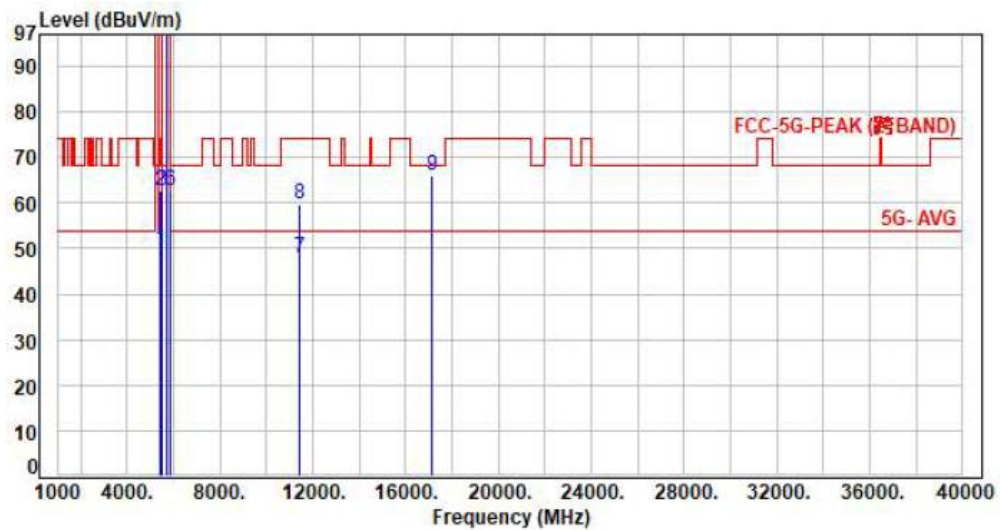

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.40	49.95	54.00	-4.05	Average	229	250	P
2	5460.00	7.55	55.19	62.74	74.00	-11.26	Peak	229	250	P
3	5470.00	7.58	55.28	62.86	68.20	-5.34	Peak	229	250	P
4	5720.00	7.43	90.75	98.18	200.00	-101.82	Average	229	250	P
5	5720.00	7.43	100.40	107.83	200.00	-92.17	Peak	229	250	P
6	5850.00	7.47	55.23	62.70	68.20	-5.50	Peak	229	250	P
7	11440.00	18.20	29.63	47.83	54.00	-6.17	Average	100	185	P
8	11440.00	18.20	41.73	59.93	74.00	-14.07	Peak	100	185	P
9	17160.00	24.13	41.88	66.01	68.20	-2.19	Peak	100	149	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3: Straddle Channel

Test Mode : 1TX 11ac40 CH142 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Vertical

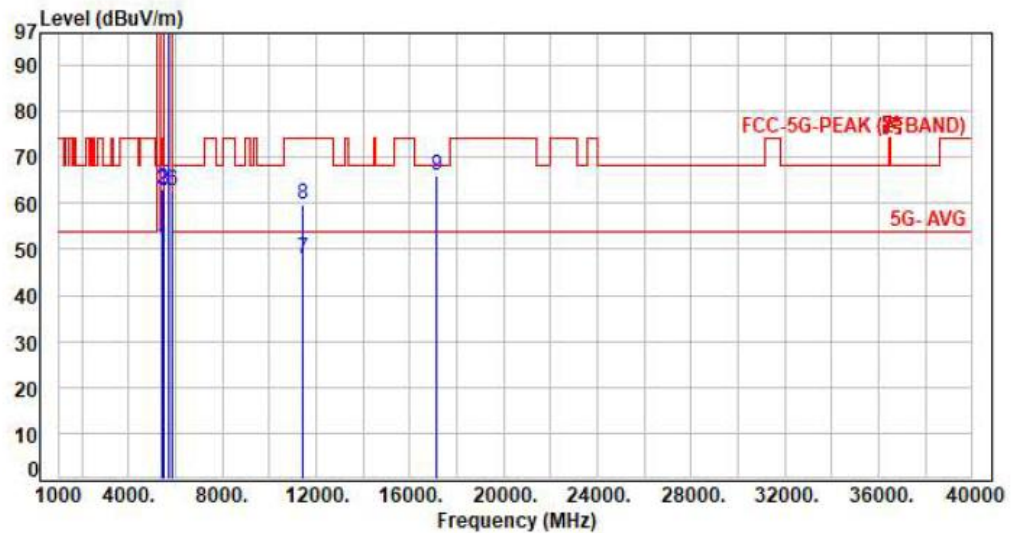

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.86	50.41	54.00	-3.59	Average	336	164	P
2	5460.00	7.55	55.38	62.93	74.00	-11.07	Peak	336	164	P
3	5470.00	7.58	55.26	62.84	68.20	-5.36	Peak	336	164	P
4	5710.00	7.43	92.84	100.27	200.00	-99.73	Average	336	164	P
5	5710.00	7.43	103.14	110.57	200.00	-89.43	Peak	336	164	P
6	5850.00	7.47	55.13	62.60	68.20	-5.60	Peak	336	164	P
7	11420.00	18.14	29.66	47.80	54.00	-6.20	Average	100	119	P
8	11420.00	18.14	41.75	59.89	74.00	-14.11	Peak	100	119	P
9	17130.00	24.09	41.77	65.86	68.20	-2.34	Peak	100	254	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 3, Band 3: Straddle Channel

Test Mode : 1TX 11ac40 CH142 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

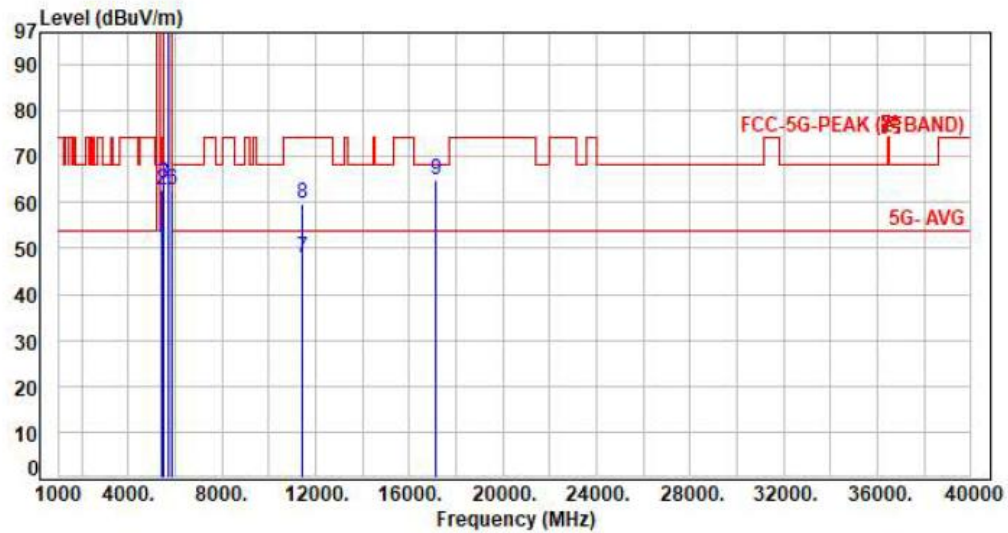

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.76	50.31	54.00	-3.69	Average	252	255	P
2	5460.00	7.55	55.11	62.66	74.00	-11.34	Peak	252	255	P
3	5470.00	7.58	56.44	64.02	68.20	-4.18	Peak	252	255	P
4	5710.00	7.43	88.39	95.82	200.00	-104.18	Average	252	255	P
5	5710.00	7.43	98.03	105.46	200.00	-94.54	Peak	252	255	P
6	5850.00	7.47	55.17	62.64	68.20	-5.56	Peak	252	255	P
7	11420.00	18.14	29.67	47.81	54.00	-6.19	Average	100	119	P
8	11420.00	18.14	41.62	59.76	74.00	-14.24	Peak	100	119	P
9	17130.00	24.09	40.99	65.08	68.20	-3.12	Peak	100	232	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3: Straddle Channel

Test Mode : 1TX 11ac80 CH138 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Vertical

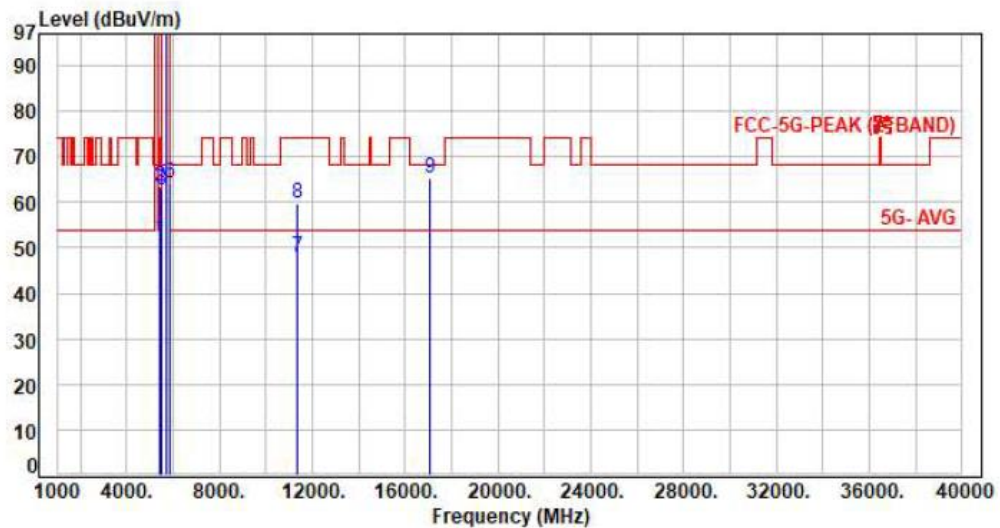

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.27	51.82	54.00	-2.18	Average	322	166	P
2	5460.00	7.55	55.71	63.26	74.00	-10.74	Peak	322	166	P
3	5470.00	7.58	55.11	62.69	68.20	-5.51	Peak	322	166	P
4	5690.00	7.44	90.14	97.58	200.00	-102.42	Average	322	166	P
5	5690.00	7.44	98.96	106.40	200.00	-93.60	Peak	322	166	P
6	5850.00	7.47	56.52	63.99	68.20	-4.21	Peak	322	166	P
7	11380.00	18.06	29.75	47.81	54.00	-6.19	Average	100	188	P
8	11380.00	18.06	41.75	59.81	74.00	-14.19	Peak	100	188	P
9	17070.00	23.85	41.32	65.17	68.20	-3.03	Peak	100	168	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 4, Band 3: Straddle Channel

Test Mode : 1TX 11ac80 CH138 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

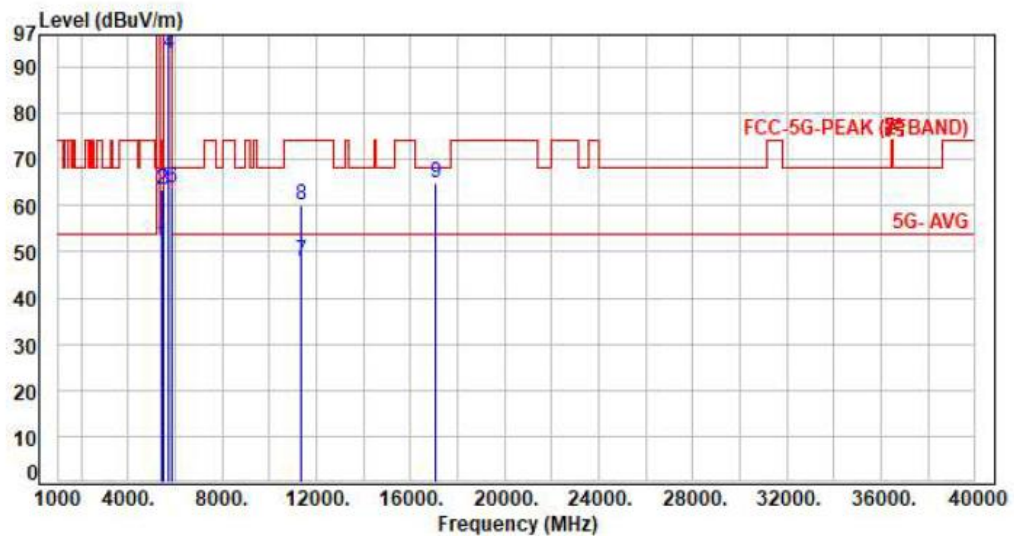


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.22	51.77	54.00	-2.23	Average	233	248	P
2	5460.00	7.55	55.97	63.52	74.00	-10.48	Peak	233	248	P
3	5470.00	7.58	55.87	63.45	68.20	-4.75	Peak	233	248	P
4	5690.00	7.44	85.43	92.87	200.00	-107.13	Average	233	248	P
5	5690.00	7.44	94.82	102.26	200.00	-97.74	Peak	233	248	P
6	5850.00	7.47	56.23	63.70	68.20	-4.50	Peak	233	248	P
7	11380.00	18.06	29.75	47.81	54.00	-6.19	Average	100	224	P
8	11380.00	18.06	41.94	60.00	74.00	-14.00	Peak	100	224	P
9	17070.00	23.85	40.88	64.73	68.20	-3.47	Peak	100	195	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 4

Test Mode : 1TX 11a CH149 6Mbps
Voltage : From System(AC120V/60Hz)
Pol : Vertical

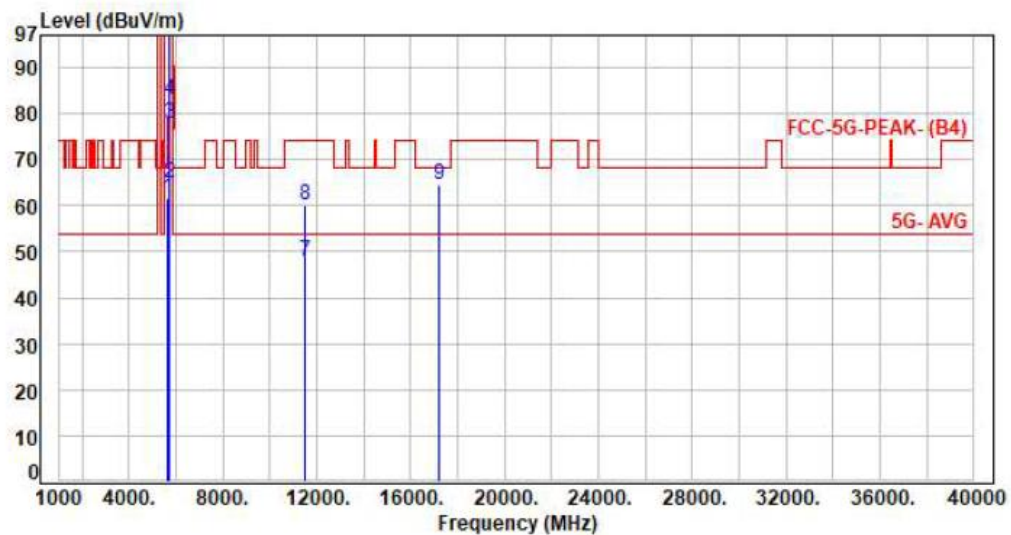

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.21	61.72	68.20	-6.48	Peak	367	171	P
2	5700.00	7.43	57.63	65.06	105.20	-40.14	Peak	367	171	P
3	5720.00	7.43	70.31	77.74	110.80	-33.06	Peak	367	171	P
4	5725.00	7.43	75.56	82.99	122.20	-39.21	Peak	367	171	P
5	5745.00	7.44	95.02	102.46	200.00	-97.54	Average	367	171	P
6	5745.00	7.44	103.91	111.35	200.00	-88.65	Peak	367	171	P
7	11490.00	18.33	29.44	47.77	54.00	-6.23	Average	100	225	P
8	11490.00	18.33	41.96	60.29	74.00	-13.71	Peak	100	158	P
9	17235.00	24.37	40.19	64.56	68.20	-3.64	Peak	100	195	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 4

Test Mode : 1TX 11a CH149 6Mbps
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

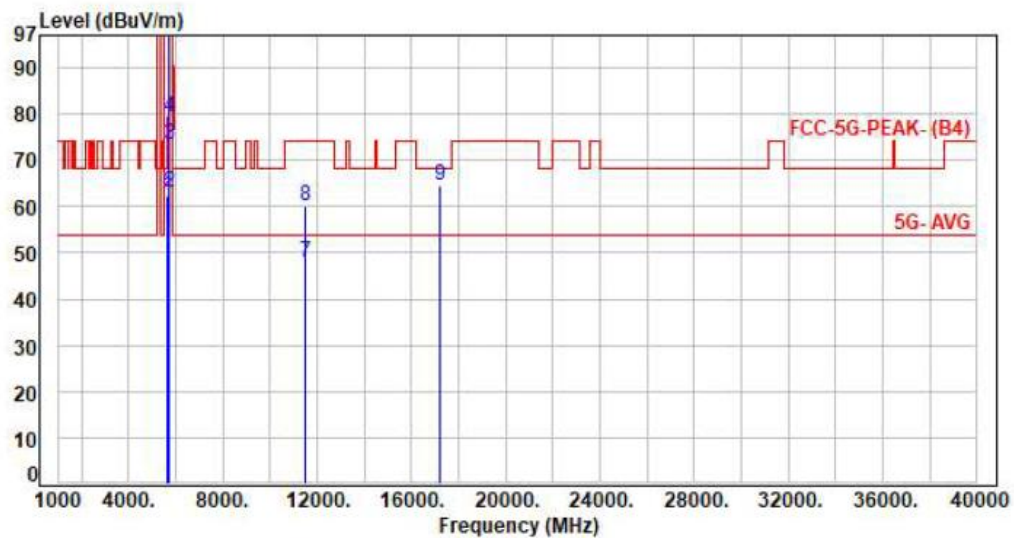


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.78	62.29	68.20	-5.91	Peak	247	255	P
2	5700.00	7.43	55.47	62.90	105.20	-42.30	Peak	247	255	P
3	5720.00	7.43	65.95	73.38	110.80	-37.42	Peak	247	255	P
4	5725.00	7.43	71.82	79.25	122.20	-42.95	Peak	247	255	P
5	5745.00	7.44	91.54	98.98	200.00	-101.02	Average	247	255	P
6	5745.00	7.44	100.52	107.96	200.00	-92.04	Peak	247	255	P
7	11490.00	18.33	29.47	47.80	54.00	-6.20	Average	100	157	P
8	11490.00	18.33	41.62	59.95	74.00	-14.05	Peak	100	157	P
9	17235.00	24.37	40.18	64.55	68.20	-3.65	Peak	100	155	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 4

Test Mode : 1TX 11a CH157 6Mbps
Voltage : From System(AC120V/60Hz)
Pol : Vertical

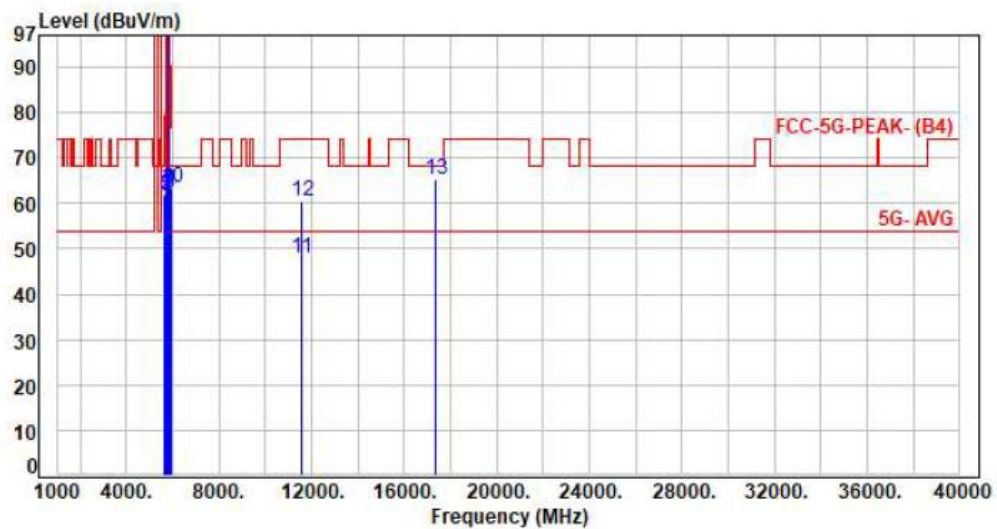

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.61	62.12	68.20	-6.08	Peak	360	171	P
2	5700.00	7.43	54.58	62.01	105.20	-43.19	Peak	360	171	P
3	5720.00	7.43	54.30	61.73	110.80	-49.07	Peak	360	171	P
4	5725.00	7.43	55.14	62.57	122.20	-59.63	Peak	360	171	P
5	5785.00	7.45	95.04	102.49	200.00	-97.51	Average	360	171	P
6	5785.00	7.45	104.00	111.45	200.00	-88.55	Peak	360	171	P
7	5850.00	7.47	55.20	62.67	122.20	-59.53	Peak	360	171	P
8	5855.00	7.49	54.90	62.39	110.80	-48.41	Peak	360	171	P
9	5875.00	7.57	55.55	63.12	105.20	-42.08	Peak	360	171	P
10	5925.00	7.73	55.64	63.37	68.20	-4.83	Peak	360	171	P
11	11570.00	18.58	29.47	48.05	54.00	-5.95	Average	100	116	P
12	11570.00	18.58	41.95	60.53	74.00	-13.47	Peak	100	116	P
13	17355.00	25.24	40.17	65.41	68.20	-2.79	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 4

Test Mode : 1TX 11a CH157 6Mbps
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

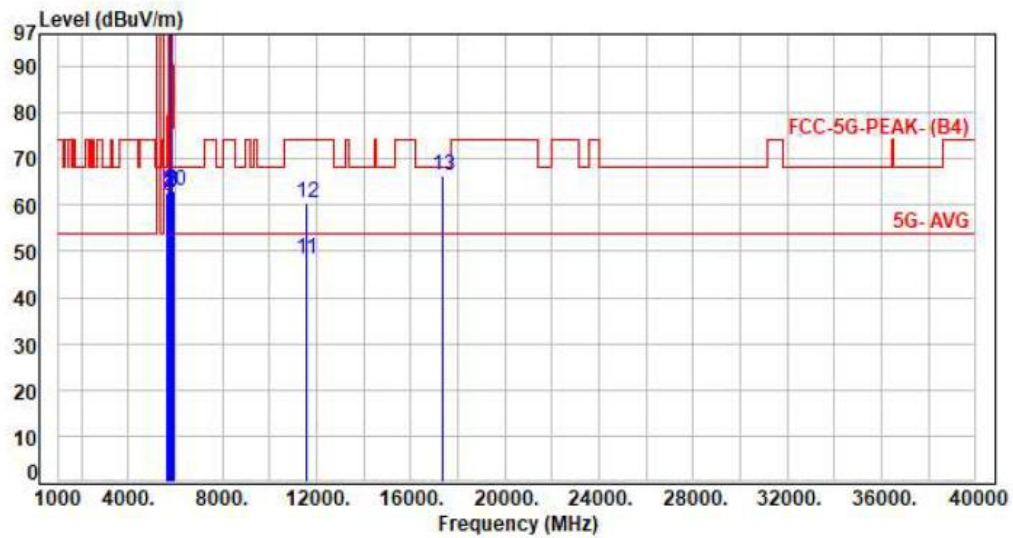

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.12	62.63	68.20	-5.57	Peak	245	254	P
2	5700.00	7.43	55.77	63.20	105.20	-42.00	Peak	245	254	P
3	5720.00	7.43	54.50	61.93	110.80	-48.87	Peak	245	254	P
4	5725.00	7.43	54.64	62.07	122.20	-60.13	Peak	245	254	P
5	5785.00	7.45	91.74	99.19	200.00	-100.81	Average	245	254	P
6	5785.00	7.45	100.68	108.13	200.00	-91.87	Peak	245	254	P
7	5850.00	7.47	55.05	62.52	122.20	-59.68	Peak	245	254	P
8	5855.00	7.49	55.71	63.20	110.80	-47.60	Peak	245	254	P
9	5875.00	7.57	55.02	62.59	105.20	-42.61	Peak	245	254	P
10	5925.00	7.73	55.24	62.97	68.20	-5.23	Peak	245	254	P
11	11570.00	18.58	29.74	48.32	54.00	-5.68	Average	100	227	P
12	11570.00	18.58	41.95	60.53	74.00	-13.47	Peak	100	227	P
13	17355.00	25.24	41.09	66.33	68.20	-1.87	Peak	100	112	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 4

Test Mode : 1TX 11a CH165 6Mbps
Voltage : From System(AC120V/60Hz)
Pol : Vertical

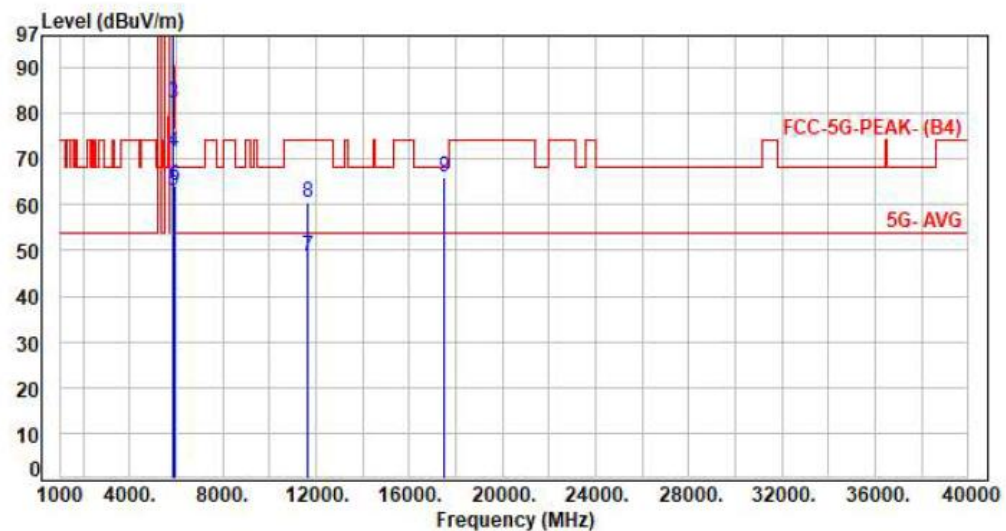

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	94.70	102.16	200.00	-97.84	Average	375	173	P
2	5825.00	7.46	103.64	111.10	200.00	-88.90	Peak	375	173	P
3	5850.00	7.47	74.66	82.13	122.20	-40.07	Peak	375	173	P
4	5855.00	7.49	64.22	71.71	110.80	-39.09	Peak	375	173	P
5	5875.00	7.57	55.63	63.20	105.20	-42.00	Peak	375	173	P
6	5925.00	7.73	56.44	64.17	68.20	-4.03	Peak	375	173	P
7	11650.00	18.67	29.88	48.55	54.00	-5.45	Average	100	195	P
8	11650.00	18.67	41.95	60.62	74.00	-13.38	Peak	100	195	P
9	17475.00	25.92	40.18	66.10	68.20	-2.10	Peak	100	177	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 1, Band 4

Test Mode : 1TX 11a CH165 6Mbps
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

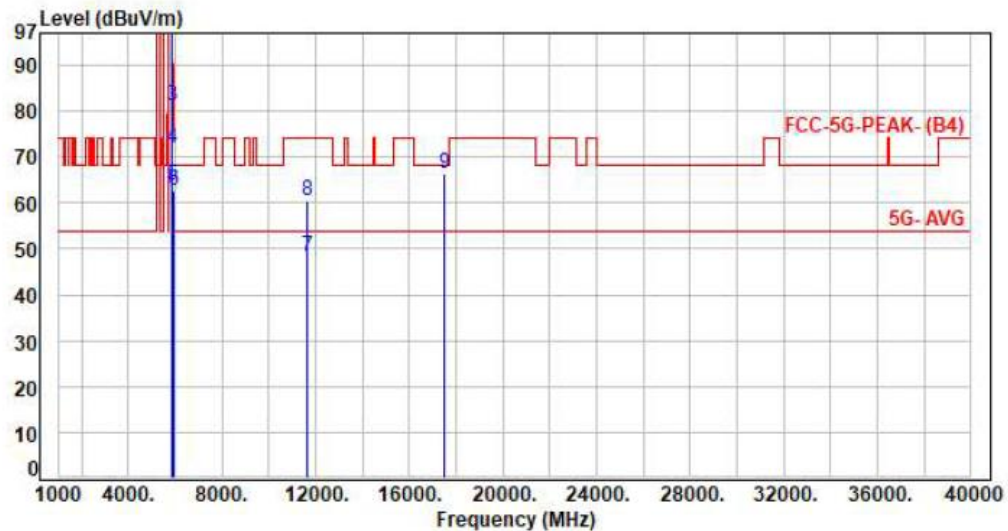

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	92.07	99.53	200.00	-100.47	Average	225	255	P
2	5825.00	7.46	101.17	108.63	200.00	-91.37	Peak	225	255	P
3	5850.00	7.47	73.64	81.11	122.20	-41.09	Peak	225	255	P
4	5855.00	7.49	64.39	71.88	110.80	-38.92	Peak	225	255	P
5	5875.00	7.57	56.08	63.65	105.20	-41.55	Peak	225	255	P
6	5925.00	7.73	54.84	62.57	68.20	-5.63	Peak	225	255	P
7	11650.00	18.67	29.47	48.14	54.00	-5.86	Average	100	274	P
8	11650.00	18.67	41.96	60.63	74.00	-13.37	Peak	100	274	P
9	17475.00	25.92	40.61	66.53	68.20	-1.67	Peak	100	117	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 4

Test Mode : 2TX 11ac20 CH149 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Vertical

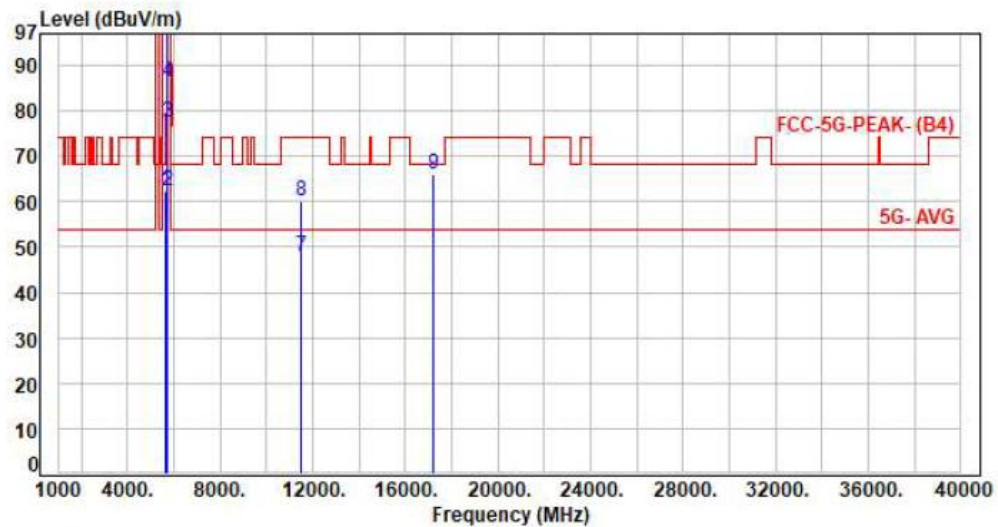

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.69	62.20	68.20	-6.00	Peak	367	170	P
2	5700.00	7.43	54.96	62.39	105.20	-42.81	Peak	367	170	P
3	5720.00	7.43	70.05	77.48	110.80	-33.32	Peak	367	170	P
4	5725.00	7.43	78.93	86.36	122.20	-35.84	Peak	367	170	P
5	5745.00	7.44	94.80	102.24	200.00	-97.76	Average	367	170	P
6	5745.00	7.44	104.03	111.47	200.00	-88.53	Peak	367	170	P
7	11490.00	18.33	29.74	48.07	54.00	-5.93	Average	100	195	P
8	11490.00	18.33	41.96	60.29	74.00	-13.71	Peak	100	195	P
9	17235.00	24.37	41.55	65.92	68.20	-2.28	Peak	100	123	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 4

Test Mode : 2TX 11ac20 CH149 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

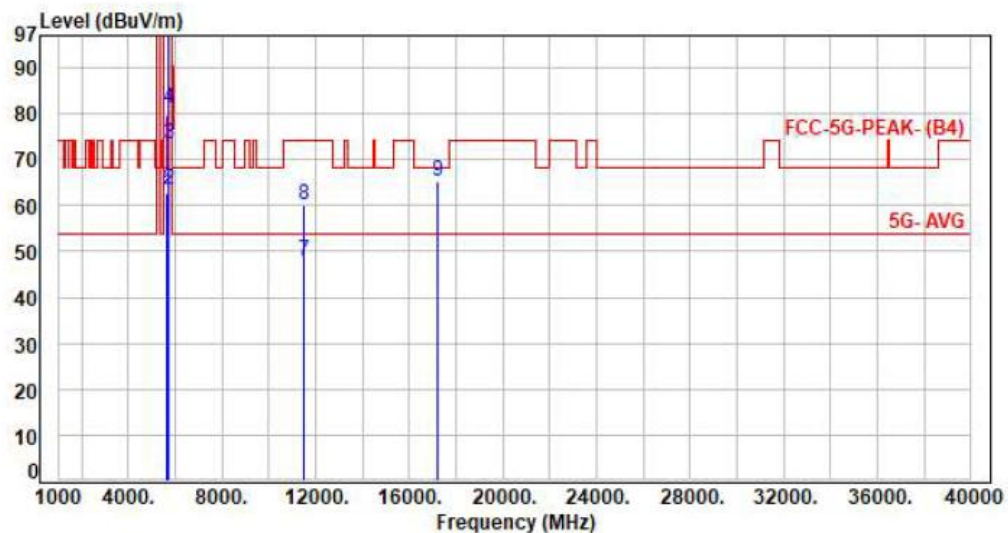

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.05	62.56	68.20	-5.64	Peak	246	255	P
2	5700.00	7.43	55.86	63.29	105.20	-41.91	Peak	246	255	P
3	5720.00	7.43	65.84	73.27	110.80	-37.53	Peak	246	255	P
4	5725.00	7.43	73.78	81.21	122.20	-40.99	Peak	246	255	P
5	5745.00	7.44	91.13	98.57	200.00	-101.43	Average	246	255	P
6	5745.00	7.44	101.02	108.46	200.00	-91.54	Peak	246	255	P
7	11490.00	18.33	29.66	47.99	54.00	-6.01	Average	100	274	P
8	11490.00	18.33	41.75	60.08	74.00	-13.92	Peak	100	274	P
9	17235.00	24.37	40.74	65.11	68.20	-3.09	Peak	100	199	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 4

Test Mode : 2TX 11ac20 CH157 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Vertical

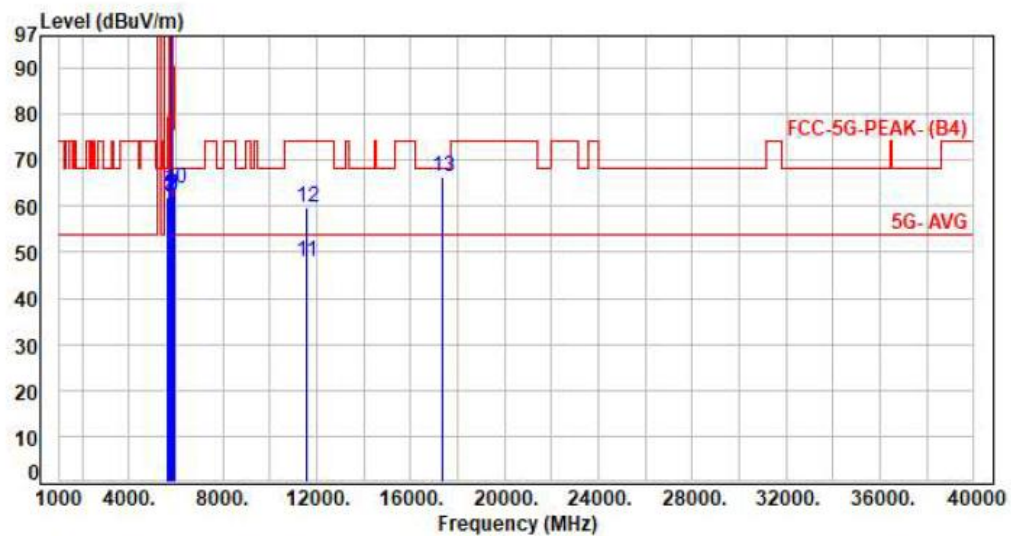


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.61	62.12	68.20	-6.08	Peak	377	158	P
2	5700.00	7.43	55.02	62.45	105.20	-42.75	Peak	377	158	P
3	5720.00	7.43	54.53	61.96	110.80	-48.84	Peak	377	158	P
4	5725.00	7.43	55.93	63.36	122.20	-58.84	Peak	377	158	P
5	5785.00	7.45	94.49	101.94	200.00	-98.06	Average	377	158	P
6	5785.00	7.45	104.04	111.49	200.00	-88.51	Peak	377	158	P
7	5850.00	7.47	54.97	62.44	122.20	-59.76	Peak	377	158	P
8	5855.00	7.49	54.76	62.25	110.80	-48.55	Peak	377	158	P
9	5875.00	7.57	54.71	62.28	105.20	-42.92	Peak	377	158	P
10	5925.00	7.73	56.16	63.89	68.20	-4.31	Peak	377	158	P
11	11570.00	18.58	29.46	48.04	54.00	-5.96	Average	100	188	P
12	11570.00	18.58	41.32	59.90	74.00	-14.10	Peak	100	188	P
13	17355.00	25.24	40.96	66.20	68.20	-2.00	Peak	100	213	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 4

Test Mode : 2TX 11ac20 CH157 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Horizontal

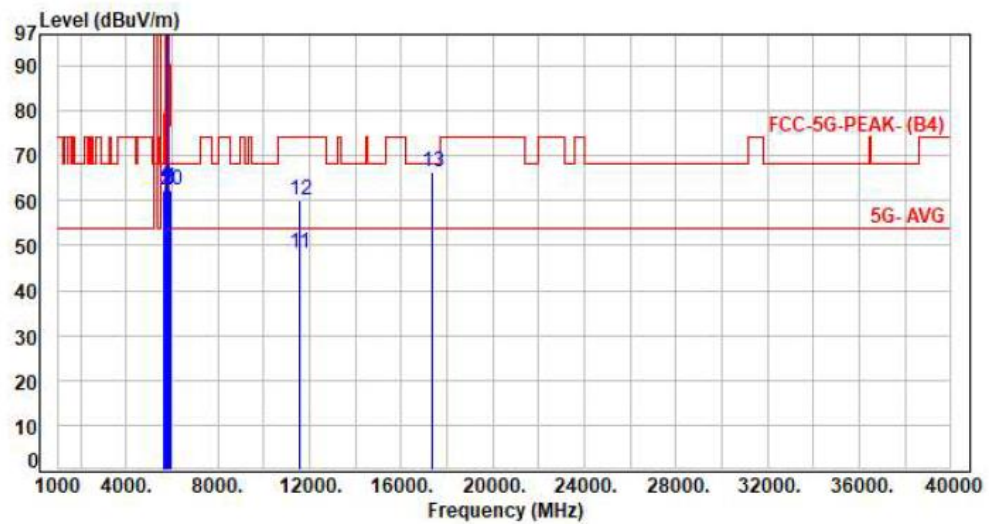


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	54.98	62.49	68.20	-5.71	Peak	241	255	P
2	5700.00	7.43	54.96	62.39	105.20	-42.81	Peak	241	255	P
3	5720.00	7.43	54.73	62.16	110.80	-48.64	Peak	241	255	P
4	5725.00	7.43	55.91	63.34	122.20	-58.86	Peak	241	255	P
5	5785.00	7.45	91.91	99.36	200.00	-100.64	Average	241	255	P
6	5785.00	7.45	101.80	109.25	200.00	-90.75	Peak	241	255	P
7	5850.00	7.47	55.21	62.68	122.20	-59.52	Peak	241	255	P
8	5855.00	7.49	54.82	62.31	110.80	-48.49	Peak	241	255	P
9	5875.00	7.57	55.00	62.57	105.20	-42.63	Peak	241	255	P
10	5925.00	7.73	54.67	62.40	68.20	-5.80	Peak	241	255	P
11	11570.00	18.58	29.62	48.20	54.00	-5.80	Average	100	174	P
12	11570.00	18.58	41.62	60.20	74.00	-13.80	Peak	100	174	P
13	17355.00	25.24	41.32	66.56	68.20	-1.64	Peak	100	199	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Test Mode** Mode 2, Band 4

Test Mode : 2TX 11ac20 CH165 NSS1 MCS0
Voltage : From System(AC120V/60Hz)
Pol : Vertical

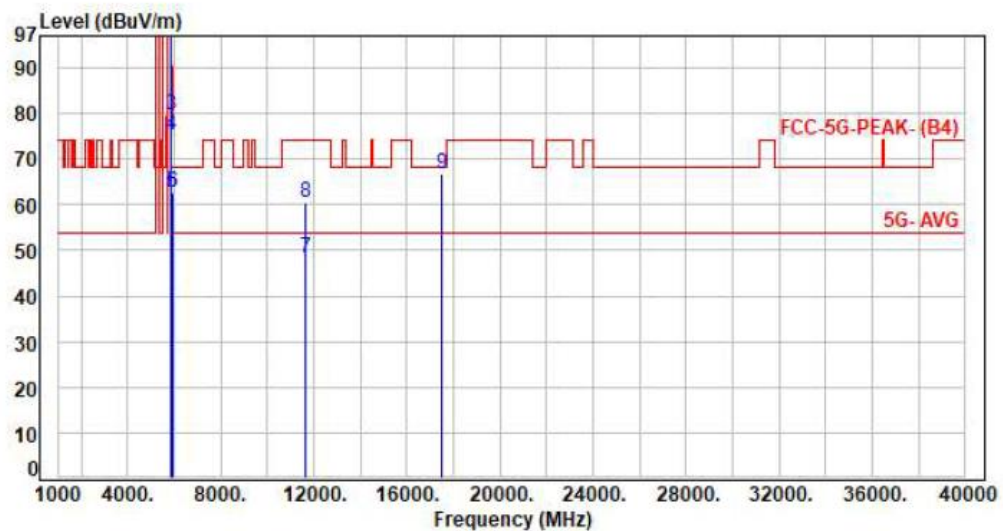

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	94.72	102.18	200.00	-97.82	Average	357	157	P
2	5825.00	7.46	104.22	111.68	200.00	-88.32	Peak	357	157	P
3	5850.00	7.47	72.17	79.64	122.20	-42.56	Peak	357	157	P
4	5855.00	7.49	67.70	75.19	110.80	-35.61	Peak	357	157	P
5	5875.00	7.57	55.00	62.57	105.20	-42.63	Peak	357	157	P
6	5925.00	7.73	54.95	62.68	68.20	-5.52	Peak	357	157	P
7	11650.00	18.67	29.65	48.32	54.00	-5.68	Average	100	119	P
8	11650.00	18.67	41.95	60.62	74.00	-13.38	Peak	100	119	P
9	17475.00	25.92	41.00	66.92	68.20	-1.28	Peak	100	221	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor