

EVALUATION REPORT

for Certification of Conformity

FCC Part 18(Class II Permissive change)

Applicant: LG Electronics USA, Inc.
111 Sylvan Avenue North Building
Englewood Cliffs New Jersey United States 07632,
Attn: David Kim / Team leader

Date of Issue: Mar. 21, 2024
Order Number: GETEC-C1-24-155
Test Report Number: GETEC-E3-24-038
Test Site: GUMI UNIVERSITY EMC CENTER
CAB Designation Number: KR0033

FCC ID. : BEJZ65143B

Applicant: LG Electronics USA, Inc.

Rule Part(s)	: FCC Part 18
Test Method	: FCC/OET MP-5
EUT Type	: HOUSEHOLD DUAL FUEL RANGE
Equipment Class	: Part 18 Consumer Device(8CC)
Type of Authority	: Certification
Model Name	: SKSDR480SIS
Trade Mark	: LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC/OET MP-5 (1986)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,



Tak Dong Kim, Associate Engineer
GUMI UNIVERSITY EMC CENTER

Reviewed by,




Sung Joo Park, Technical Manager
GUMI UNIVERSITY EMC CENTER



Revision list

Test Report No.	Issue Date	Description
GETEC-E3-24-038	Mar. 21, 2024	First Approval Test Report

※ This test report is not related to the accredited test result by ISO/IEC 17025 and KOLAS

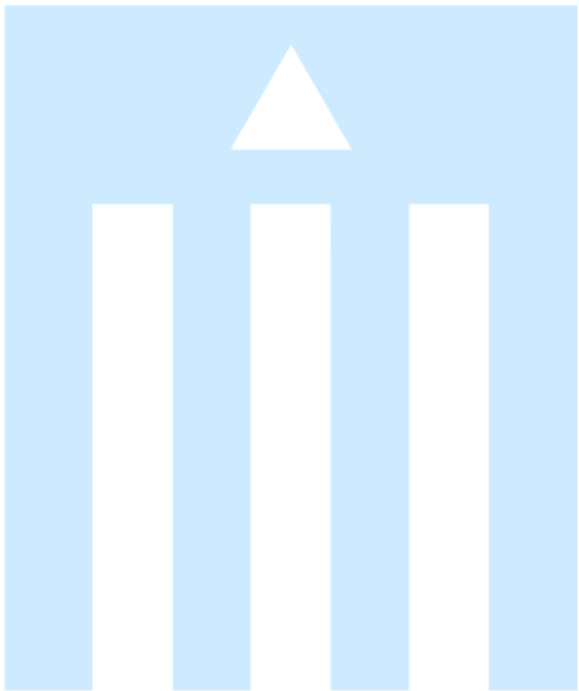



CONTENTS

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
3. PRODUCT INFORMATION	6
3.1 DESCRIPTION OF EUT.....	6
3.2 SUPPORT EQUIPMENT / CABLES USED	6
3.3 MODIFICATION ITEM(S).....	7
4. DESCRIPTION OF TESTS.....	8
4.1 TEST CONDITION.....	8
5. SUMMARY OF TEST RESULTS	8
6. CONDUCTED EMISSION.....	9
6.1 OPERATING ENVIRONMENT	10
6.2 TEST SET-UP	10
6.3 MEASUREMENT UNCERTAINTY.....	10
6.4 LIMIT	11
6.5 TEST EQUIPMENT USED.....	11
6.6 TEST DATA FOR CONDUCTED EMISSION	11
7. RADIATED EMISSION	16
7.1 OPERATING ENVIRONMENT	16
7.2 TEST SET-UP	16
7.3 MEASUREMENT UNCERTAINTY.....	18
7.4 LIMIT	19
7.5 TEST EQUIPMENT USED.....	19
7.6 TEST DATA FOR RADIATED EMISSION.....	20
8. SAMPLE CALCULATIONS.....	29
8.1 EXAMPLE 1 :	29
8.2 EXAMPLE 2 :	29
9. RECOMMENDATION & CONCLUSION.....	29
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – INFORMATION OF CLASS II PERMISSIVE CHANGE	
APPENDIX C – SCHEMATIC DIAGRAM	
APPENDIX D – TEST SETUP PHOTOGRAPH	
APPENDIX E – INTERNAL PHOTOGRAPH	
APPENDIX F – RF EXPOSURE EVALUATION	



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics USA, Inc.

Applicant Address: 111 Sylvan Avenue North Building
Englewood Cliffs New Jersey United States 07632

Manufacturer: LG Electronics Inc.

Manufacturer Address: 170, Sungsanpaechong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, 51533, Korea

Contact Person: David Kim / Team leader

Telephone Number: 1-201-266-2443

●	FCC ID.	BEJZ65143B			
●	EUT Type	HOUSEHOLD DUAL FUEL RANGE			
●	Model Name	SKSDR480SIS			
●	Rule Part(s)	FCC Part 18			
●	Test Method	FCC/OET MP-5			
●	Type of Authority	Certification			
●	Test Procedure(s)	FCC/OET MP-5			
●	Dates of Test	Mar. 18, 2024 ~ Mar. 21, 2024			
●	Place of Test	GUMI UNIVERSITY EMC CENTER (FCC Test Firm Registration Number: 269701) 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 39213, Republic of Korea.			
●	Test Report Number	GETEC-E3-24-038			
●	Dates of Issue	Mar. 21, 2024			



2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2014) was used in determining radiated and conducted emissions emanating from **HOUSEHOLD DUAL FUEL RANGE (Model name: SKSDR480SIS).**

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER**

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 39213, Republic of Korea.

This test site is one of the highest point of Gumi UNIVERSITY at about 200 km away from Seoul city and 40 km away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2017)

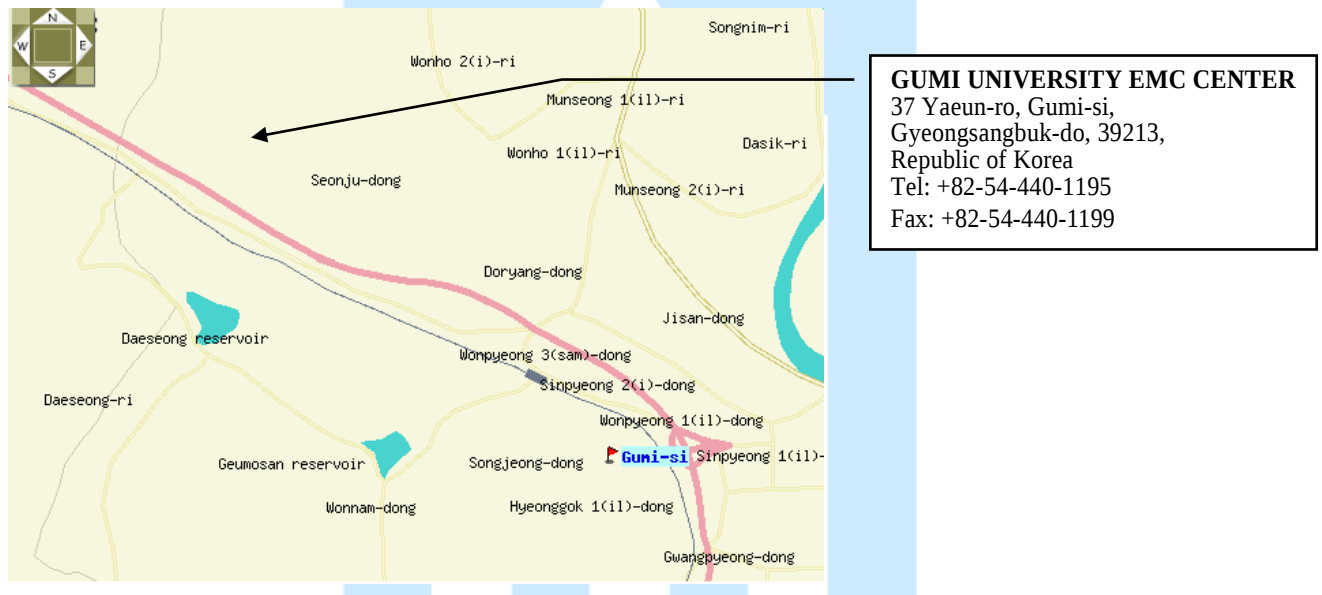


Fig 1. The map above shows the GUMI UNIVERSITY in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **HOUSEHOLD DUAL FUEL RANGE (Model Name: SKSDR480SIS)**
FCC ID.: BEJZ65143B

Oven Range Models	SKSDR480SIS
Description	48" Duel Fuel Pro Range
Electrical requirements	13.5 kW 120/240 VAC, 10.5 kW 120/208 VAC
Exterior Dimensions	47 ⁷ / ₈ " (W) x 35 ¹ / ₄ " (H) x 26 ³ / ₄ " (D) (D with door closed) 121.6 cm (W) x 89.6 cm (H) x 67.9 cm (D) (D with door closed)
Height to cooking surface	36" (91.4 cm)
Net weight	529.1 lb (240 kg)
Total capacity	Right Oven : 5.2 cu.ft Left Oven : 2.7 cu.ft Total : 7.9 cu.ft

Wireless LAN Module Specifications

Wireless LAN Module Specifications	
Model	LCW-009
Frequency Range	2412 MHz – 2462 MHz
Output Power (Max)	< 30 dBm

Induction heating mode

Cooking Element	Low frequency (Maximum power)	High frequency (Minimum power)
#1 Front Hob	25 kHz	75 kHz
#2 Rear Hob	25 kHz	75 kHz



3.2 Support Equipment / Cables used

3.3.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
None	-	-	S/N: - FCC ID.: -

See “Appendix D – Test Setup Photographs” for actual system test set-up

3.3.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
WLAN module	LG Electronics Inc.	LCW-009	S/N: - FCC ID.: BEJ-LCW009

3.3.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the EUT and AC power	1.80 m Unshielded.

3.3 Modification Item(s)

-. None



4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency: AC 208 V / 240 V, 60 Hz
- Operating condition during the test(s) :
This device has been tested in the configurations of Induction mode with WLAN module operating.
Induction mode: This device has been operated (boost mode) with an enameled steel vessel filled with tap water up to 80 % of its maximum capacity.

Cooking element "1"= front hob , "2"= rear hob,
"1","2"(W*D*H) = 215mm *180 mm * 100mm

4.2 General Test Procedures

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 (2017) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which Fixed at 2 m above the ground plane to find out the highest emission.

And also, each emission was to be maximized by the table was turned from 0 degrees to 360 degrees. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4 (2017).

5. Summary of Test Results

FCC Part Section(s)	Test Description	Test Result
§18.305	Radiated Emission	Pass
§18.307	Conducted Emission	Pass



6. Conducted Emission

-Test Description

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure.

(FCC Test Firm Registration No.: 269701)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN and the support equipment is powered from the Rohde & Schwarz LISN Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

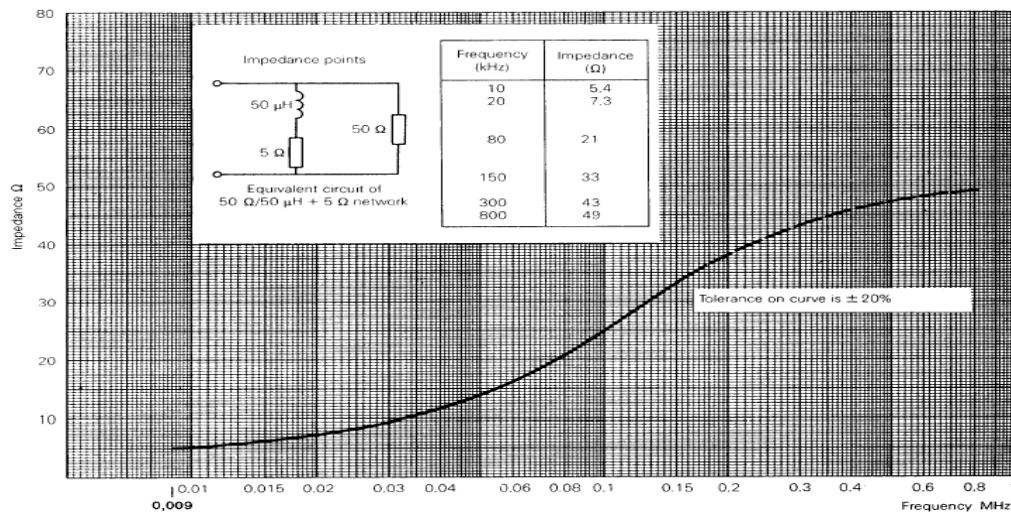


Fig 2. Impedance of LISN



6.1 Operating Environment

Temperature : 20.6 °C
Relative Humidity : 37.3 %
Air Pressure : 101.5 kPa

6.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement.”

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	3.69 dB	Confidence level of approximately 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	3.32 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results



6.4 Limit

RFI Conducted	FCC Limit(dBμV/m)	
Freq. Range	Quasi-Peak	Average
0.009 MHz ~ 0.05 MHz	110	-
0.05 MHz ~ 0.15 MHz	90 ~ 80*	-
0.15 MHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

6.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Calibration Date
■ - ESCI	Rohde & Schwarz	EMI Test Receiver	100237	Apr. 05, 2023
□ - ENV216	Rohde & Schwarz	LISN	100173	Apr. 05, 2023
□ - ENV216	Rohde & Schwarz	LISN	100172	Apr. 05, 2023
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	Apr. 06, 2023
■ - VTSD 9561-D	SCHWARZBECK	Pulse Limiter	32	Apr. 06, 2023
■ - EMC 32	Rohde & Schwarz	Software	Ver.8.53	N/A

6.6 Test data for Conducted Emission


- Test Date	: Mar. 18, 2024 ~ Mar. 20, 2024
- Resolution Bandwidth	: 200 Hz (9 kHz ~ 0.15 MHz) / 9 kHz (0.15 MHz ~ 30 MHz)
- Frequency Range	: 9 kHz ~ 30 MHz
- Line	: L1: Live, N: Neutral
- Comment	: None



▪ Operating condition: Induction mode with WLAN

AC 208 V / 60 Hz

Cooking element #1

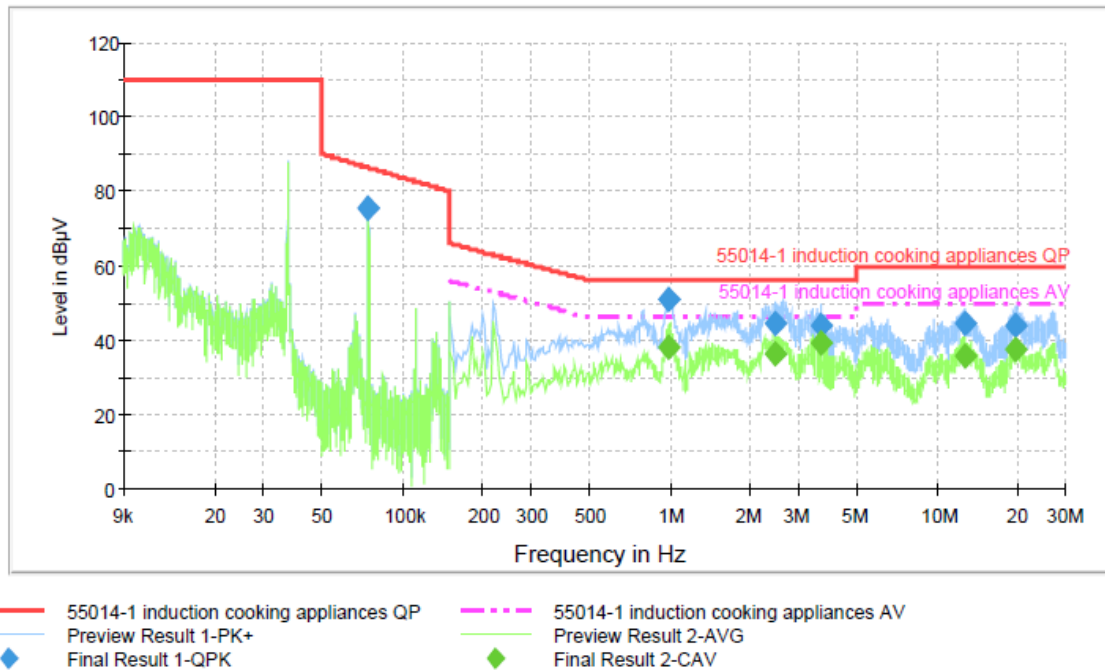

Final Result 1


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.073265	75.5	1000.0	0.200	GND	L2	20.1	11.0	86.5	
0.989069	50.9	1000.0	9.000	GND	N	20.6	5.1	56.0	
2.453300	44.4	1000.0	9.000	GND	N	20.7	11.6	56.0	
3.649181	44.2	1000.0	9.000	GND	N	20.7	11.8	56.0	
12.542062	44.8	1000.0	9.000	GND	N	20.8	15.2	60.0	
19.542425	44.0	1000.0	9.000	GND	N	20.8	16.0	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.989069	37.9	1000.0	9.000	GND	N	20.6	8.1	46.0	
2.453300	36.0	1000.0	9.000	GND	N	20.7	10.0	46.0	
3.649181	39.1	1000.0	9.000	GND	N	20.7	6.9	46.0	
12.542062	35.7	1000.0	9.000	GND	N	20.8	14.3	50.0	
19.542425	37.4	1000.0	9.000	GND	N	20.8	12.6	50.0	



Cooking element #2

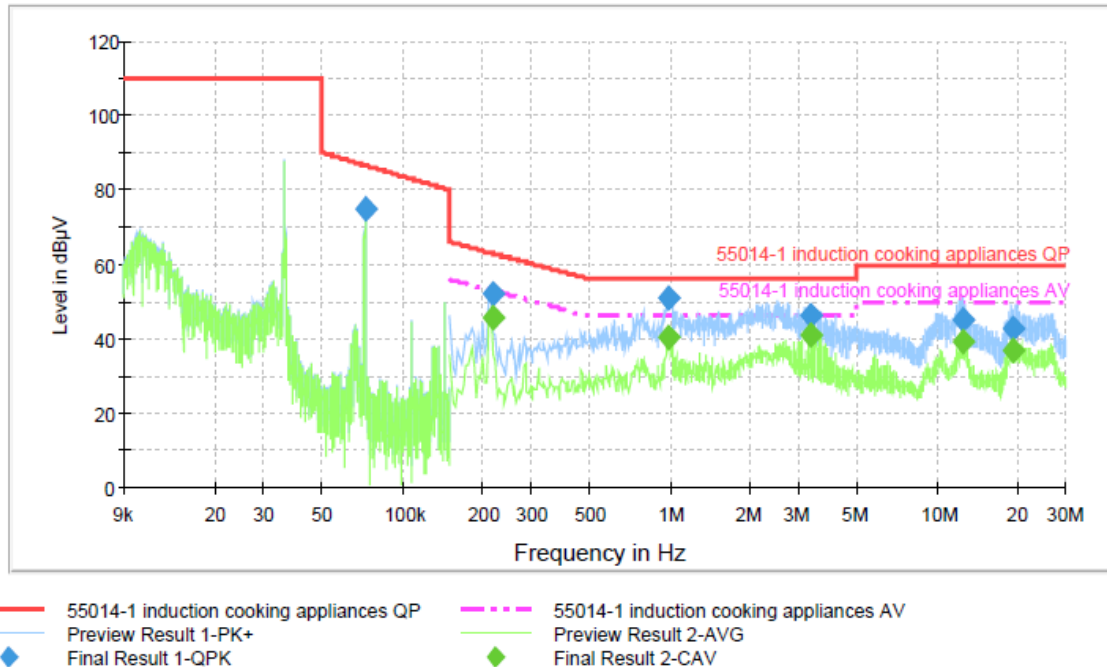

Final Result 1


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.073009	75.1	1000.0	0.200	GND	L2	20.1	11.5	86.6	
0.216431	51.9	1000.0	9.000	GND	L2	20.6	11.1	63.0	
0.989338	51.1	1000.0	9.000	GND	N	20.6	4.9	56.0	
3.350681	46.4	1000.0	9.000	GND	N	20.7	9.6	56.0	
12.367800	44.8	1000.0	9.000	GND	N	20.8	15.2	60.0	
19.278075	43.0	1000.0	9.000	GND	N	20.9	17.0	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.216431	45.5	1000.0	9.000	GND	L2	20.6	7.5	53.0	
0.989338	40.6	1000.0	9.000	GND	N	20.6	5.4	46.0	
3.350681	40.7	1000.0	9.000	GND	N	20.7	5.3	46.0	
12.367800	39.5	1000.0	9.000	GND	N	20.8	10.5	50.0	
19.278075	36.8	1000.0	9.000	GND	N	20.9	13.2	50.0	



AC 240 V / 60 Hz
Cooking element #1

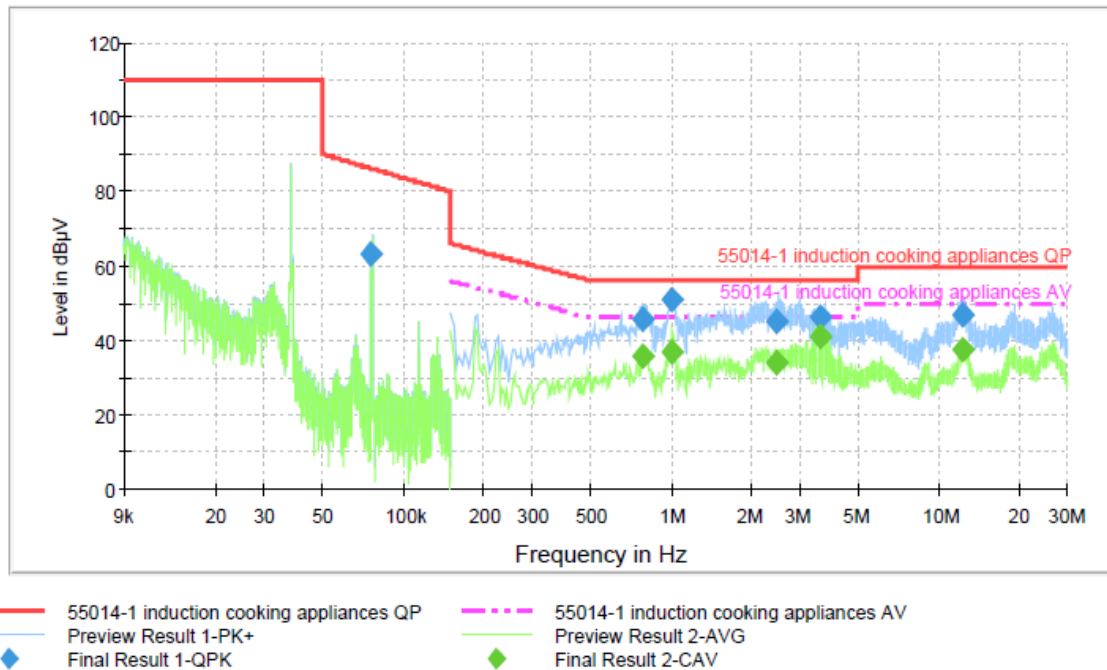

Final Result 1


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.075098	63.2	1000.0	0.200	GND	N	20.1	23.1	86.3	
0.782238	45.6	1000.0	9.000	GND	N	20.6	10.4	56.0	
1.007725	50.9	1000.0	9.000	GND	N	20.6	5.1	56.0	
2.483956	44.8	1000.0	9.000	GND	L1	20.7	11.2	56.0	
3.603600	46.3	1000.0	9.000	GND	N	20.7	9.7	56.0	
12.220369	46.7	1000.0	9.000	GND	N	20.8	13.3	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.782238	36.0	1000.0	9.000	GND	N	20.6	10.0	46.0	
1.007725	36.7	1000.0	9.000	GND	N	20.6	9.3	46.0	
2.483956	34.0	1000.0	9.000	GND	L1	20.7	12.0	46.0	
3.603600	41.2	1000.0	9.000	GND	N	20.7	4.8	46.0	
12.220369	37.3	1000.0	9.000	GND	N	20.8	12.7	50.0	



Cooking element #2

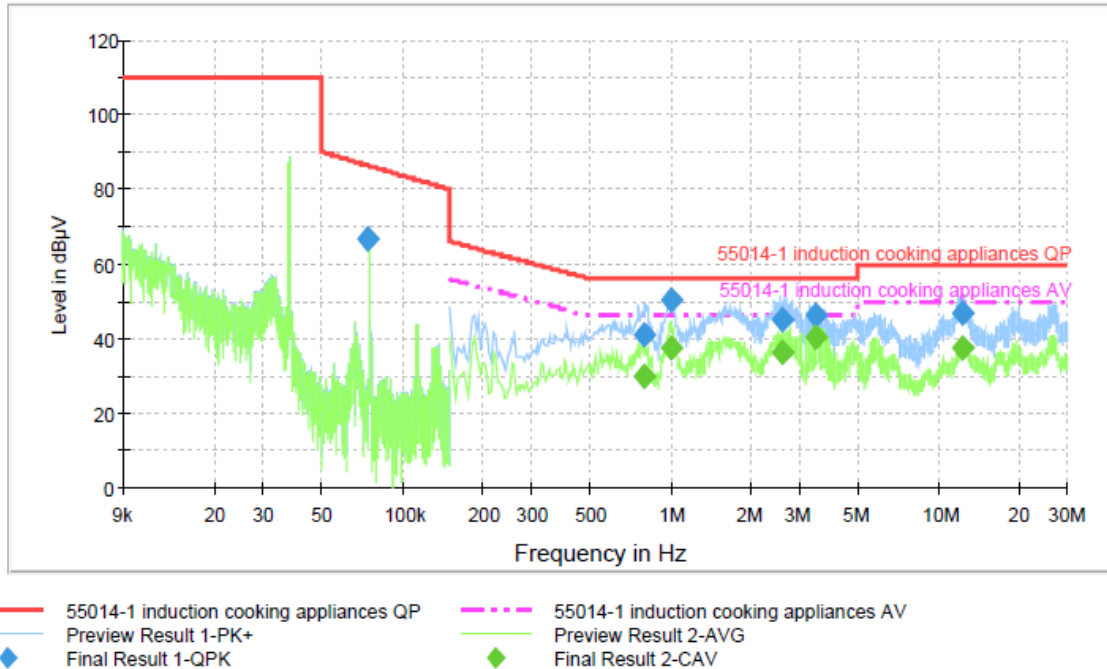

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.074234	66.8	1000.0	0.200	GND	L1	20.1	19.6	86.4	
0.791775	41.0	1000.0	9.000	GND	L1	20.6	15.0	56.0	
1.007994	50.2	1000.0	9.000	GND	L1	20.6	5.8	56.0	
2.622012	45.1	1000.0	9.000	GND	N	20.7	10.9	56.0	
3.439694	46.2	1000.0	9.000	GND	N	20.7	9.8	56.0	
12.128969	46.9	1000.0	9.000	GND	N	20.8	13.1	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.791775	29.7	1000.0	9.000	GND	L1	20.6	16.3	46.0	
1.007994	37.4	1000.0	9.000	GND	L1	20.6	8.6	46.0	
2.622012	36.4	1000.0	9.000	GND	N	20.7	9.6	46.0	
3.439694	40.2	1000.0	9.000	GND	N	20.7	5.8	46.0	
12.128969	37.6	1000.0	9.000	GND	N	20.8	12.4	50.0	



7. Radiated Emission

7.1 Operating Environment

Temperature : 20.2 °C
Relative Humidity : 38.3 %
Air Pressure : 101.5 kPa

7.2 Test Set-up

The Radiated emission measurements were conducted at the worst test conditions.

The measurements of below 1 GHz were made at 3 m Semi Anechoic Chamber or 10 m Semi Anechoic Chamber (FCC Test Firm Registration No.: 269701) that complies with CISPR 16 / ANSI C63.4.

The frequency range of 9 kHz to 30 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and the receive antenna was fixed 2.0 m on the ground plane.

The frequency range of 30 MHz to 1 000 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

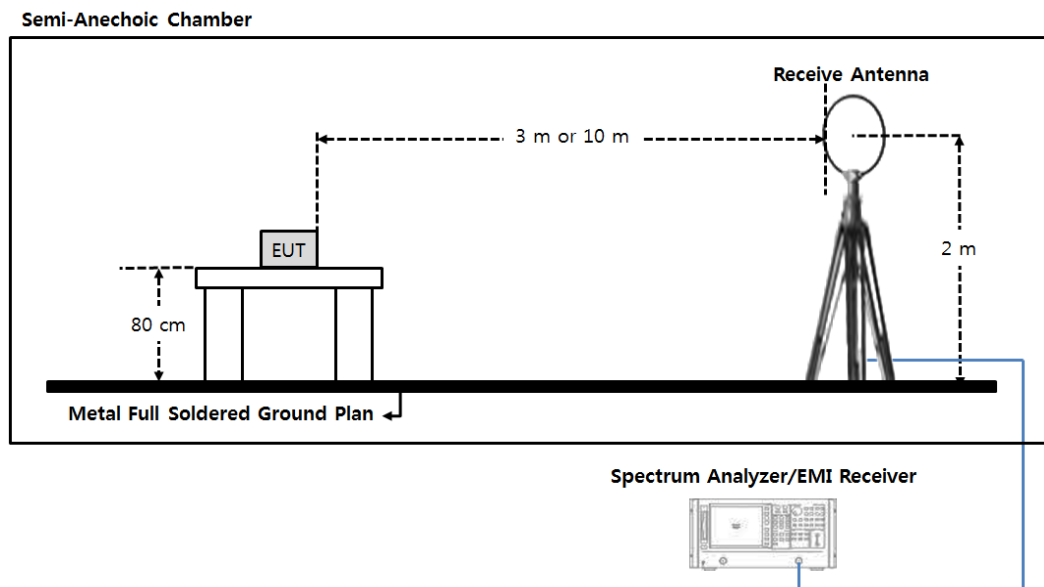


Fig 3. Configurations of Radiated emission test (9 kHz to 30 MHz)

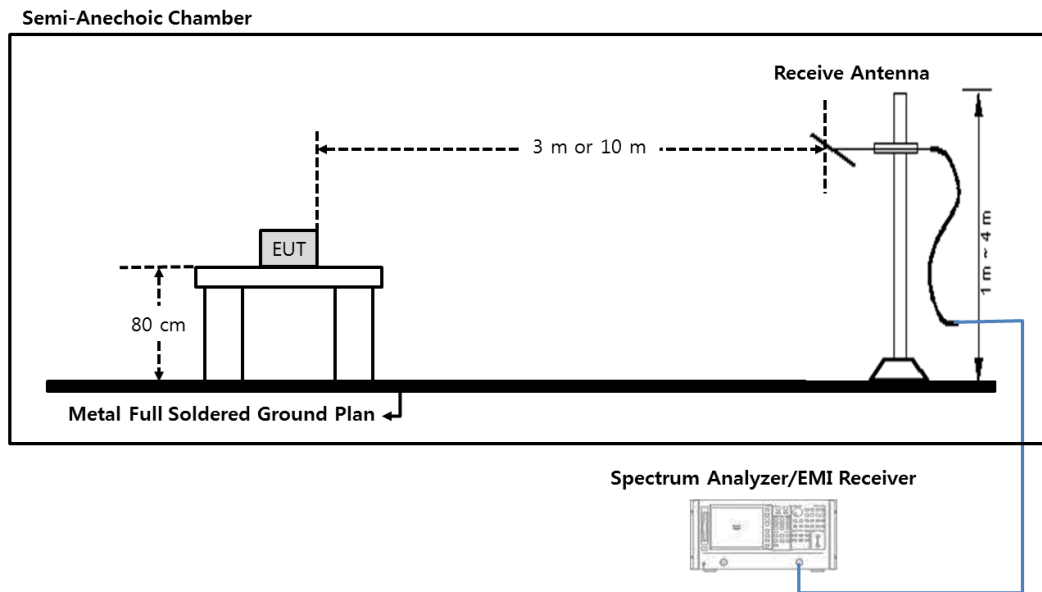


Fig 4. Configurations of Radiated emission test (30 MHz to 1 000 MHz)



7.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(10 m Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 10 m, Vertical)	4.77 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 10 m, Horizontal)	4.79 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Vertical)	4.91 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Horizontal)	4.90 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m)	4.63 dB	Confidence level of approximately 95 % ($k = 2$)
Test items (3 m Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	4.90 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	4.79 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	6.23 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	5.16 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 GHz ~ 6 GHz, 3 m)	4.56 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (6 GHz ~ 18 GHz, 3 m)	4.88 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (18 GHz ~ 26 GHz, 3 m)	5.16 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results



7.4 Limit

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500 500 or more	25 $25 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
	Any non-ISM frequency	Below 500 500 or more	15 $15 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
Industrial heaters and RF stabilized arc welders	On or below 5,725 MHz Above 5,725 MHz	Any Any	10 (²)	1,600 (²)
Medical diathermy	Any ISM frequency Any non-ISM frequency	Any Any	25 15	300 300
Ultrasonic	Below 490 kHz	Below 500 500 or more	$2,400/\text{F}(\text{kHz})$ $2,400/\text{F}(\text{kHz}) \times \text{SQRT}(\text{power}/500)$	300 ³ 300
	490 to 1,600 kHz Above 1,600 kHz	Any Any	$24,000/\text{F}(\text{kHz})$ 15	30 30
Induction cooking ranges	Below 90 kHz On or above 90 kHz	Any Any	1,500 300	⁴ 30 ⁴ 30

Note.

- 1) Field strength may not exceed 10 $\mu\text{V}/\text{m}$ at 1600 meters. Consumer equipment operating below 1000 MHz is not permitted the increase in field strength otherwise permitted here for power over 500 watts.
- 2) Reduced to the greatest extent possible.
- 3) Field strength may not exceed 10 $\mu\text{V}/\text{m}$ at 1600 meters. Consumer equipment is not permitted the increase in field strength otherwise permitted here for over 500 watts.
- 4) Induction cooking ranges manufactured prior to February 1, 1980, shall be subject to the field strength limits for miscellaneous ISM equipment.

7.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Calibration Date
■ - ESR7	Rohde & Schwarz	EMI Test Receiver	101382	Apr. 05, 2023
■ - HFH2-Z2	Rohde & Schwarz	Loop ANT	100041	Apr. 15, 2022
■ - CO3000	Innco system GmbH	Position Controller	CO3000/779/330 50314/L	N/A
■ - DT3000	Innco system GmbH	Turntable	1280314	N/A
□ - MA4000-EP	Innco system GmbH	Antenna Mast	4420314	N/A
□ - MA4640-XP-ET	Innco system GmbH	Antenna Mast	MA4640/558	N/A
■ - EMC 32	Rohde & Schwarz	Software	Ver.10.40.10	N/A

All test equipment used is calibrated on a regular basis.




7.6 Test data for Radiated Emission

- Test Date : Mar. 18, 2024 ~ Mar. 21, 2024
- Measurement Distance : 10 m
- Note : frequency range to be scanned up to 30 MHz, because the frequency band in which the EUT operates less than 1.705 MHz

- Measurement setting

Frequency range	9 kHz ~ 150 kHz	0.15 MHz ~ 30 MHz
Detector mode	Average	Average
Resolution bandwidth	200 Hz	9 kHz


- Measurement Data: Induction mode with WLAN

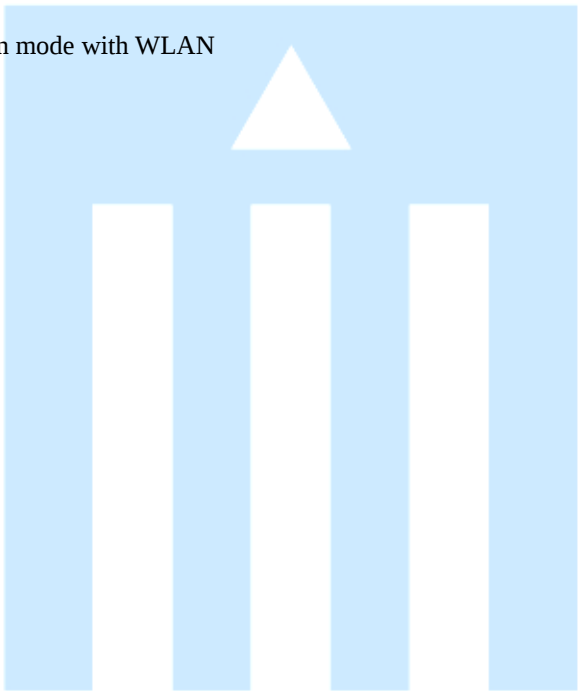



[208V , 60 Hz]

Cooking Element #1_H

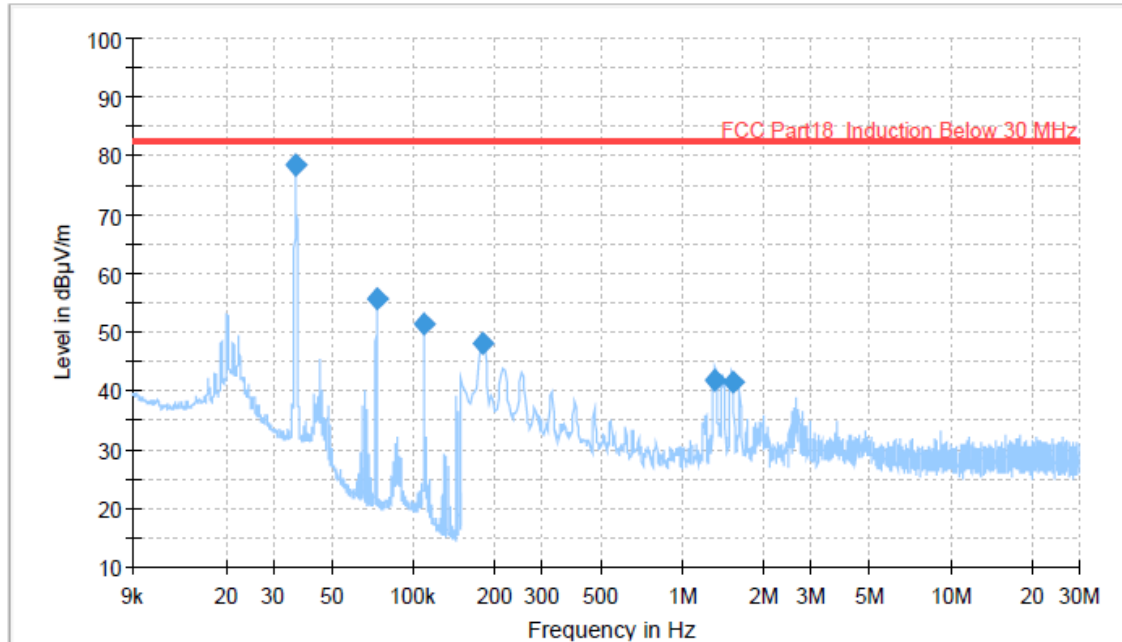


Preview Result 1H-AVG FCC Part18_Induction Below 30 MHz Final_Result AVC

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036098	78.35	82.60	4.25	1000.0	0.200	H	320.0	19.8
0.073069	55.52	82.60	27.08	1000.0	0.200	H	286.0	19.7
0.109630	51.43	82.60	31.17	1000.0	0.200	H	320.0	19.7
0.179850	48.10	82.60	34.50	1000.0	9.000	H	320.0	19.7
1.316075	41.76	82.60	40.84	1000.0	9.000	H	242.0	19.8
1.535055	41.39	82.60	41.21	1000.0	9.000	H	70.0	19.9



Cooking Element #1_V

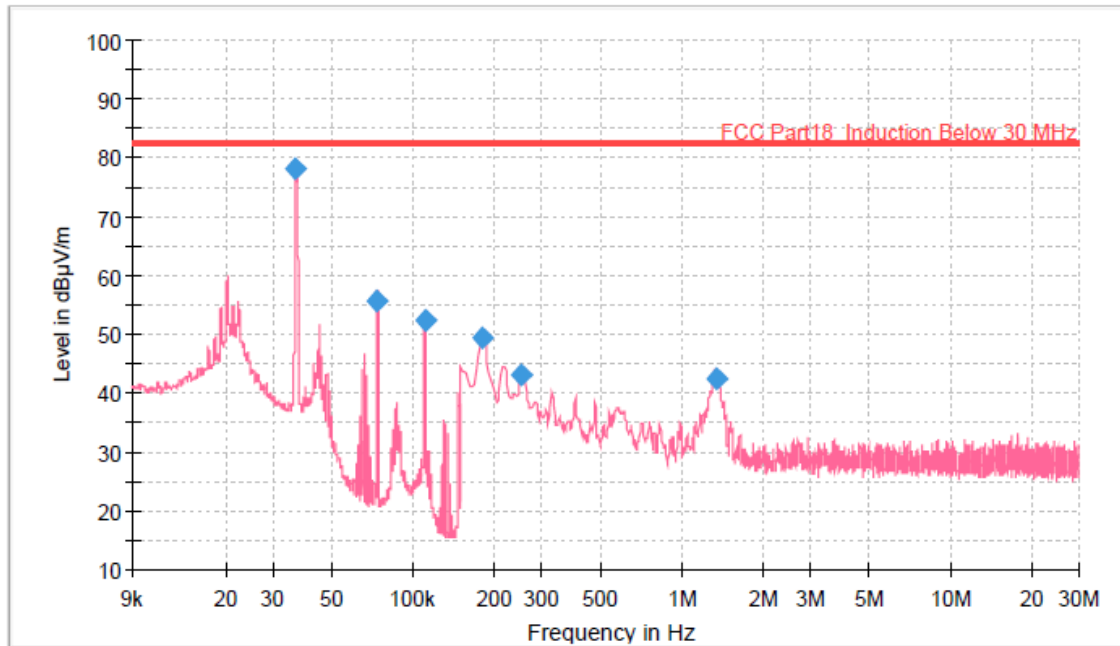

Preview Result 1V-AVG FCC Part18 Induction Below 30 MHz Final_Result AVG


Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036299	78.21	82.60	4.39	1000.0	0.200	V	21.0	19.8
0.072686	55.72	82.60	26.88	1000.0	0.200	V	331.0	19.7
0.110570	52.47	82.60	30.13	1000.0	0.200	V	21.0	19.7
0.182000	49.38	82.60	33.22	1000.0	9.000	V	239.0	19.7
0.253475	43.11	82.60	39.49	1000.0	9.000	V	239.0	19.7
1.344075	42.47	82.60	40.13	1000.0	9.000	V	125.0	19.9





Cooking Element #2_H

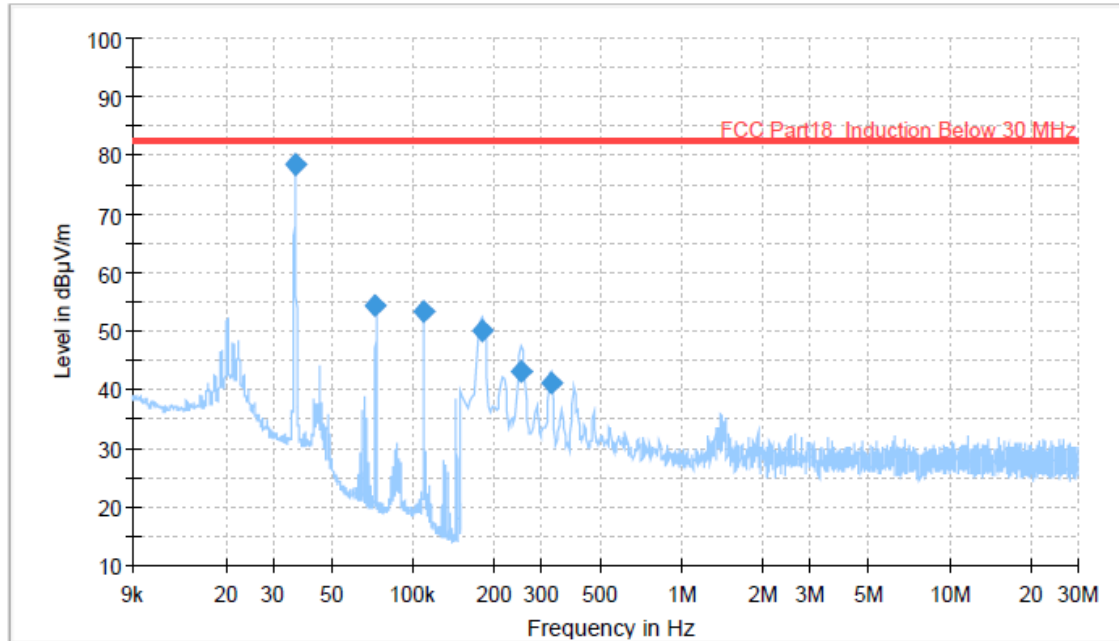


Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036324	78.38	82.60	4.22	1000.0	0.200	H	7.0	19.8
0.072189	54.36	82.60	28.24	1000.0	0.200	H	258.0	19.7
0.108830	53.50	82.60	29.10	1000.0	0.200	H	7.0	19.7
0.179850	50.14	82.60	32.46	1000.0	9.000	H	7.0	19.7
0.253475	43.24	82.60	39.36	1000.0	9.000	H	7.0	19.7
0.325115	41.04	82.60	41.56	1000.0	9.000	H	0.0	19.7





Cooking Element #2_V

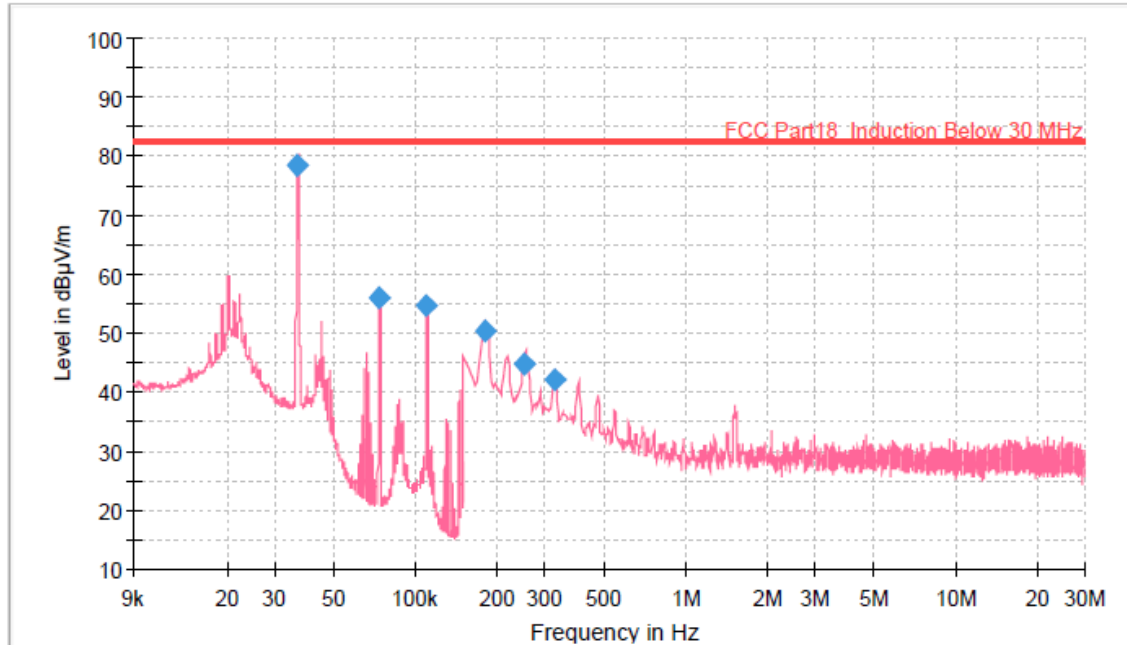

— Preview Result 1V-AVG — FCC Part18_Induction Below 30 MHz ◆ Final_Result AVG

Final Result


Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036375	78.57	82.60	4.03	1000.0	0.200	V	302.0	19.8
0.072691	56.09	82.60	26.51	1000.0	0.200	V	339.0	19.7
0.109558	54.76	82.60	27.84	1000.0	0.200	V	302.0	19.7
0.182000	50.24	82.60	32.36	1000.0	9.000	V	257.0	19.7
0.253475	44.77	82.60	37.83	1000.0	9.000	V	82.0	19.7
0.325115	42.24	82.60	40.36	1000.0	9.000	V	94.0	19.7





[240V , 60 Hz]

Cooking Element #1_H

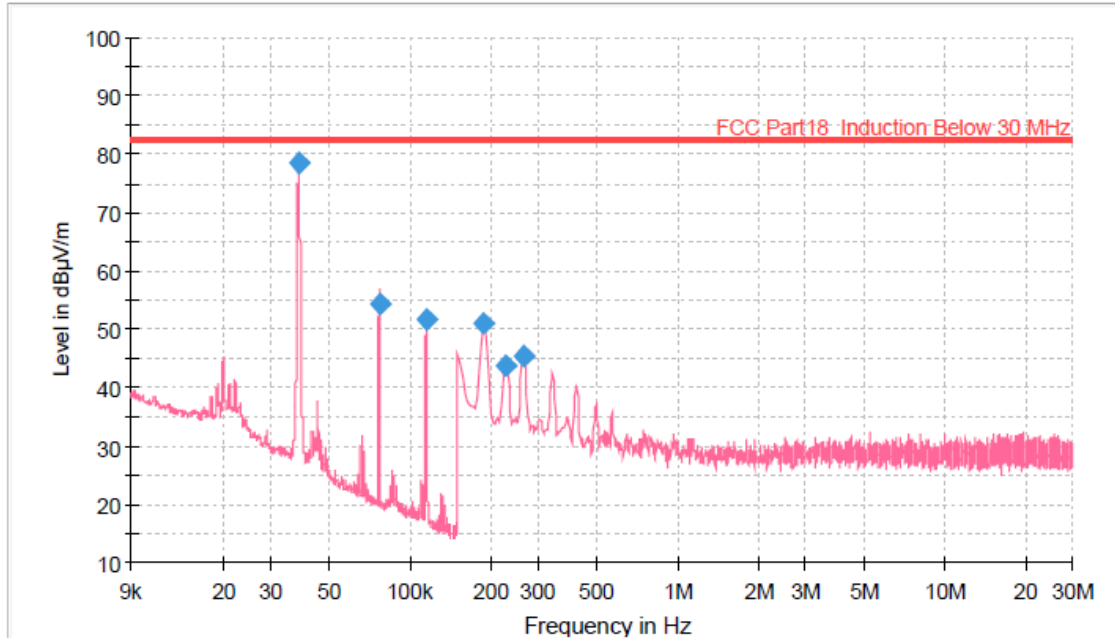


Preview Result 1V-AVG FCC Part18_Induction Below 30 MHz Final_Result AVG

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.038215	78.38	82.60	4.22	1000.0	0.200	H	190.0	19.8
0.076598	54.30	82.60	28.30	1000.0	0.200	H	138.0	19.7
0.115077	51.53	82.60	31.07	1000.0	0.200	H	235.0	19.7
0.188805	50.99	82.60	31.61	1000.0	9.000	H	219.0	19.7
0.227610	43.84	82.60	38.76	1000.0	9.000	H	231.0	19.7
0.263430	45.51	82.60	37.09	1000.0	9.000	H	215.0	19.7



Cooking Element #1_V

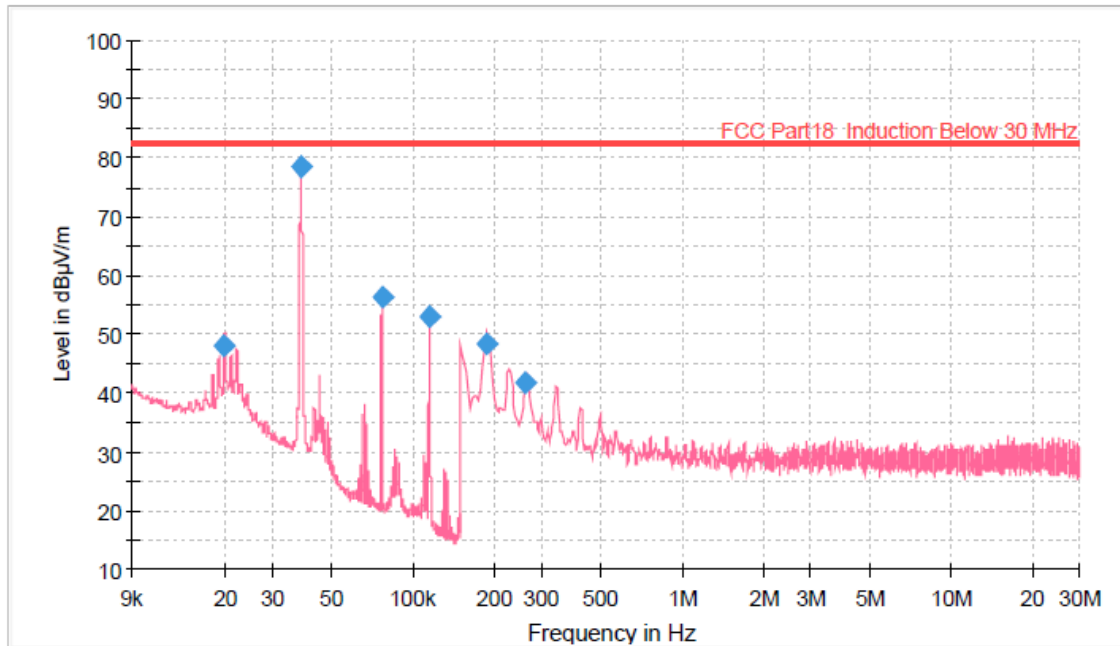


Preview Result 1V-AVG FCC Part18 Induction Below 30 MHz Final_Result AVG

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019850	47.96	82.60	34.64	1000.0	0.200	V	6.0	20.1
0.038055	78.57	82.60	4.03	1000.0	0.200	V	249.0	19.8
0.076490	56.31	82.60	26.29	1000.0	0.200	V	212.0	19.7
0.115077	52.87	82.60	29.73	1000.0	0.200	V	249.0	19.7
0.186000	48.29	82.60	34.31	1000.0	9.000	V	256.0	19.7
0.261415	41.75	82.60	40.85	1000.0	9.000	V	256.0	19.7



Cooking Element #2_H

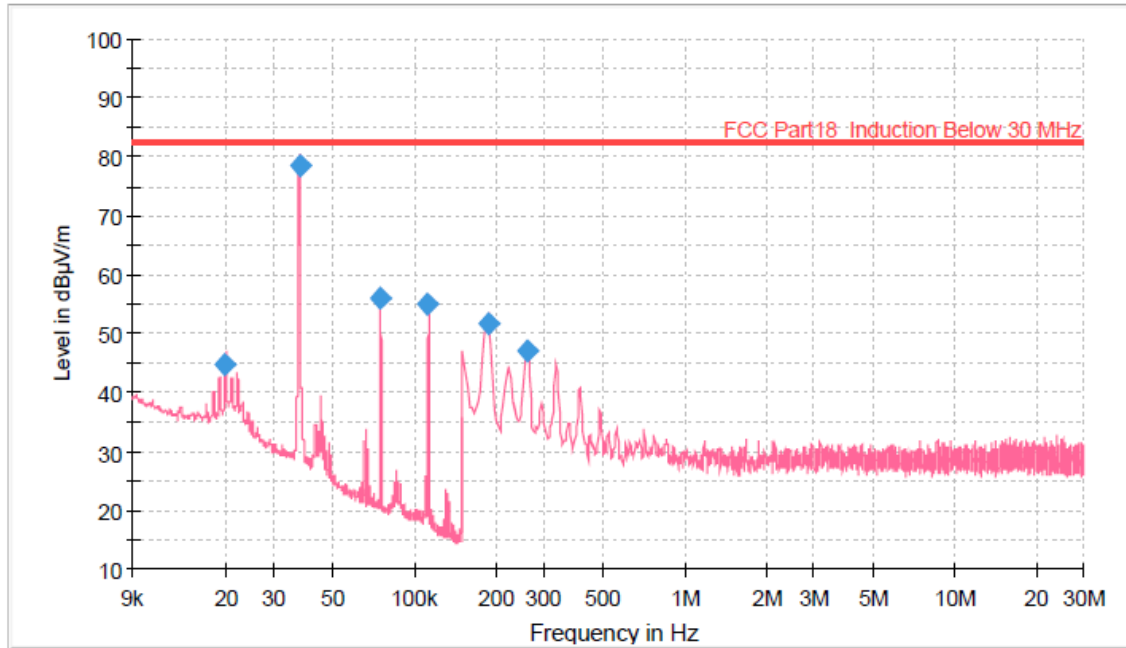


Preview Result 1V-AVG FCC Part18 Induction Below 30 MHz Final_Result AVG

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019850	44.78	82.60	37.82	1000.0	0.200	H	170.0	20.1
0.037555	78.52	82.60	4.08	1000.0	0.200	H	246.0	19.8
0.074652	55.90	82.60	26.70	1000.0	0.200	H	139.0	19.7
0.111071	55.11	82.60	27.49	1000.0	0.200	H	246.0	19.7
0.185820	51.66	82.60	30.94	1000.0	9.000	H	239.0	19.7
0.260445	46.95	82.60	35.65	1000.0	9.000	H	239.0	19.7



Cooking Element #2_V

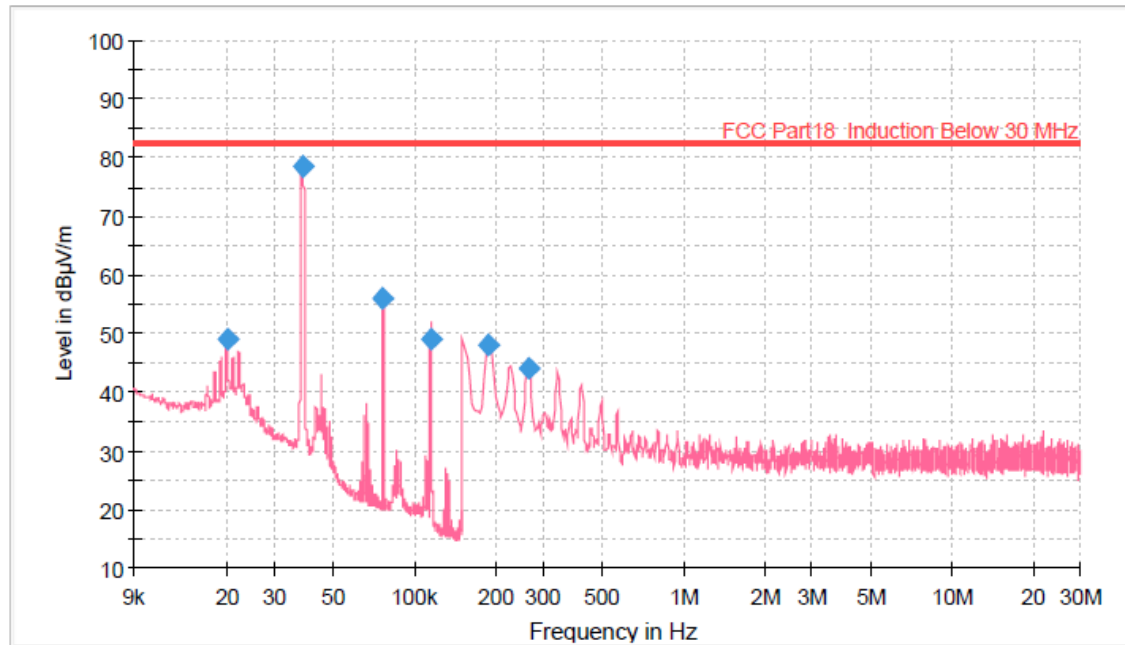

— Preview Result 1V-AVG — FCC Part18 Induction Below 30 MHz ◆ Final Result AVG

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019930	48.95	82.60	33.65	1000.0	0.200	V	230.0	20.1
0.038095	78.52	82.60	4.08	1000.0	0.200	V	180.0	19.8
0.075774	56.15	82.60	26.45	1000.0	0.200	V	226.0	19.7
0.113999	48.99	82.60	33.61	1000.0	0.200	V	292.0	19.7
0.188805	47.91	82.60	34.69	1000.0	9.000	V	282.0	19.7
0.263430	43.93	82.60	38.67	1000.0	9.000	V	161.0	19.7

Note.1 The worst case data were reported

And no other spurious and harmonic emissions were reported greater than listed emission above table

Note.2 “F”=Fundamental / “S”=Spurious / “*” = Noise Floor

Note.3 All measurements were recorded using a spectrum analyzer employing a Average detector for below 30 MHz

Note.4 Distance Correction Factor (D.C.F.)

For 30 m: $40\log(30/10) = 19.08$ dB

Note.5 Sample calculation

Field Strength = Reading – D.C.F

Margin = Limit – Field Strength

Where, D.C.F = Distance Correction Factor

Note.6 “V1”= Vertical and perpendicular to the centerline / “V2”=vertical and parallel to the centerline

“H” = horizontal (parallel to the ground)

Note.7 Cooking element

“1”= front hob ,”2”= rear hob



8. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

8.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV = 8.8 dB

8.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss	= 5.8 dB
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$ = 3.2 dB

9. Recommendation & Conclusion

The data collected shows that the **HOUSEHOLD DUAL FUEL RANGE(Model Name: SKSDR480SIS)** was complies with §18.305 and 18.307 of the FCC Rules.

- The end -