



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2135-1
FCC ID : IHDT56ZS3
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Nov. 25, 2020 and testing was completed on Jan. 22, 2021. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Specification of Accessory.....	6
1.7 Testing Location	7
1.8 Test Software.....	7
1.9 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT.....	12
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	12
3.2 Maximum Conducted Output Power Measurement	15
3.3 Power Spectral Density Measurement	17
3.4 Unwanted Emissions Measurement.....	20
3.5 AC Conducted Emission Measurement.....	24
3.6 Automatically Discontinue Transmission	26
3.7 Antenna Requirements.....	27
4 LIST OF MEASURING EQUIPMENT	28
5 UNCERTAINTY OF EVALUATION	29
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR0N2517-01F	Rev. 01	Initial issue of report	Feb. 18, 2021

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 9.82 dB at 5965.600 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 4.65 dB at 8.105 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-
Remark: Not required means after assessing, test items are not necessary to carry out.					

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2135-1
FCC ID	IHDT56ZS3
EUT supports Radios application	GSM/WCDMA/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR / EDR / LE FM Receiver / GNSS
IMEI Code	Conducted: 355866890010130 Conduction: 359218650004539 Radiation: 359218650004521
HW Version	DVT2
SW Version	RRI31.Q1-10
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<5745 MHz ~ 5825 MHz> 802.11a : 16.86 dBm / 0.0485 W 802.11n HT20 : 16.84 dBm / 0.0483 W 802.11n HT40 : 16.24 dBm / 0.0421 W 802.11ac VHT20: 16.65 dBm / 0.0462 W 802.11ac VHT40: 16.05 dBm / 0.0403 W 802.11ac VHT80: 15.70 dBm / 0.0372 W

99% Occupied Bandwidth	<5745 MHz ~ 5825 MHz> 802.11a : 17.43 MHz 802.11n HT20 : 18.63 MHz 802.11n HT40 : 36.56 MHz 802.11ac VHT80 : 75.64 MHz
Antenna Type / Gain	PIFA Antenna with gain -5.0 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 2(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-201
AC Adapter 2(IN)	Brand Name	Motorola (Chenyang)	Model Name	MC-204
AC Adapter 2(BR)	Brand Name	Motorola (Chenyang)	Model Name	MC-207
AC Adapter 1(US)	Brand Name	Motorola (Acbel)	Model Name	MC-201
AC Adapter 3 (BR Local build)	Brand Name	Motorola (Flex)	Model Name	MC-207
AC Adapter 4 (BR Local build)	Brand Name	Motorola (Salcomp)	Model Name	MC-207
Battery	Brand Name	Motorola (ATL)	Model Name	MC50
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name	SC18C24367
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18C24368
USB Cable 3	Brand Name	Motorola (Cabletech)	Model Name	SC18C49697
USB Cable 4	Brand Name	Motorola (I SHENG)	Model Name	SC18C28955
Earphone 1	Brand Name	Motorola(LIANYUN)	Model Name	(MH191)SH38C81577
Earphone 2	Brand Name	Motorola(Lianchuang)	Model Name	(MH191) SH38C81576

1.7 Testing Location

<FCC>-KS

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link(5G) + USB Cable4(Charging from Adapter4) + Earphone
Remark: For Radiated Test Cases, The tests were performance with Adapter, Battery, Earphone, USB Cable and Sample 1	

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

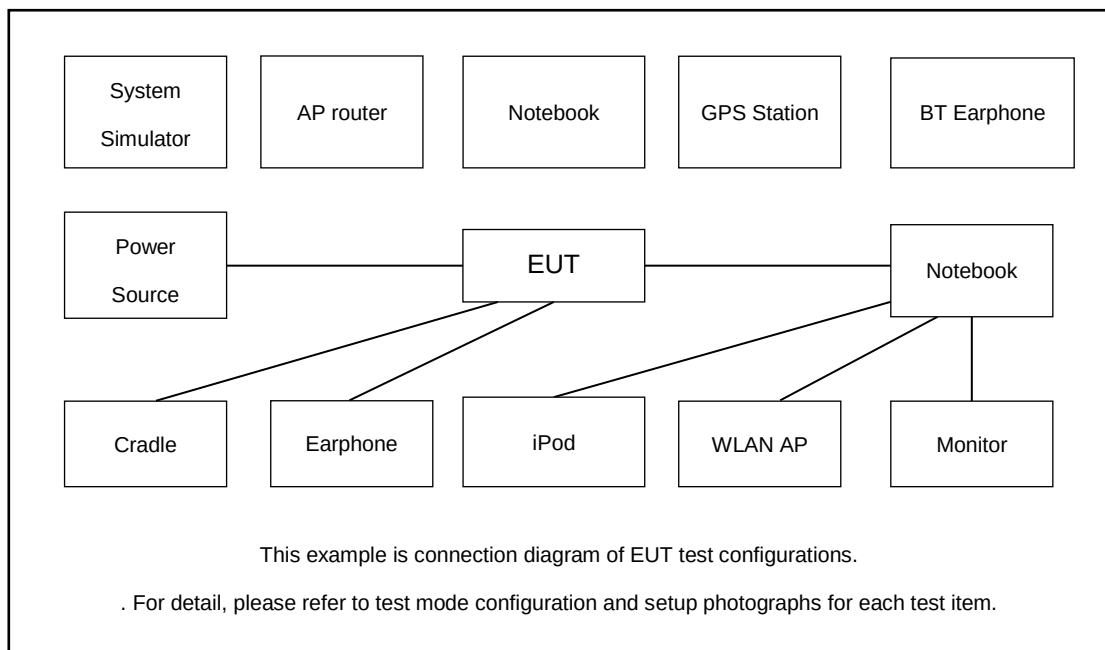

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
5.	SD Card	Kingston	8GB	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 7.20 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 7.20 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

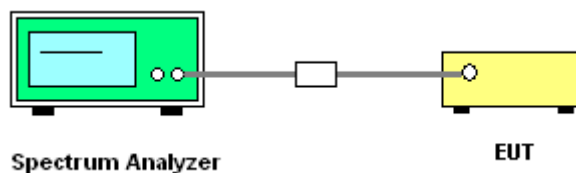

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

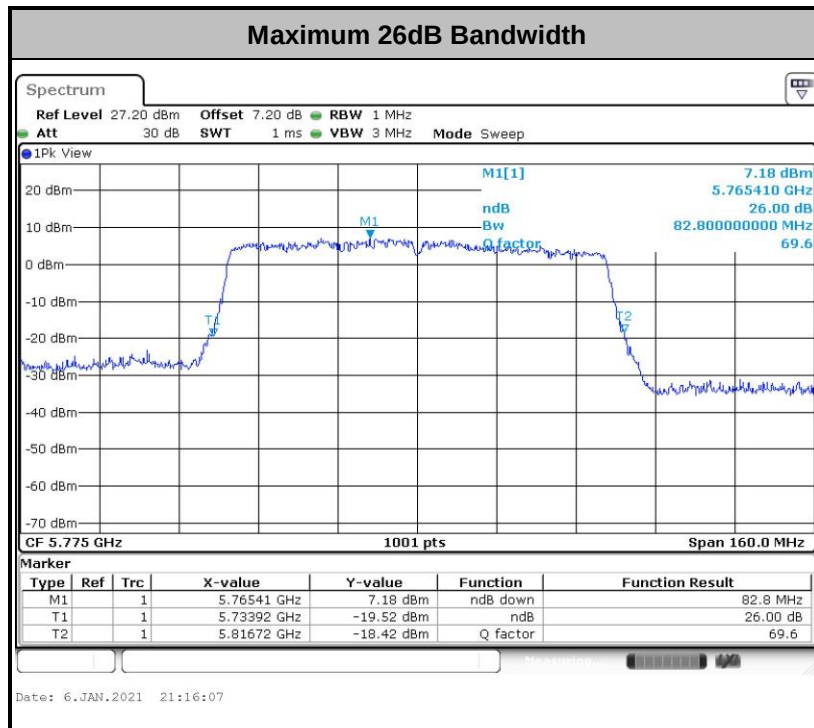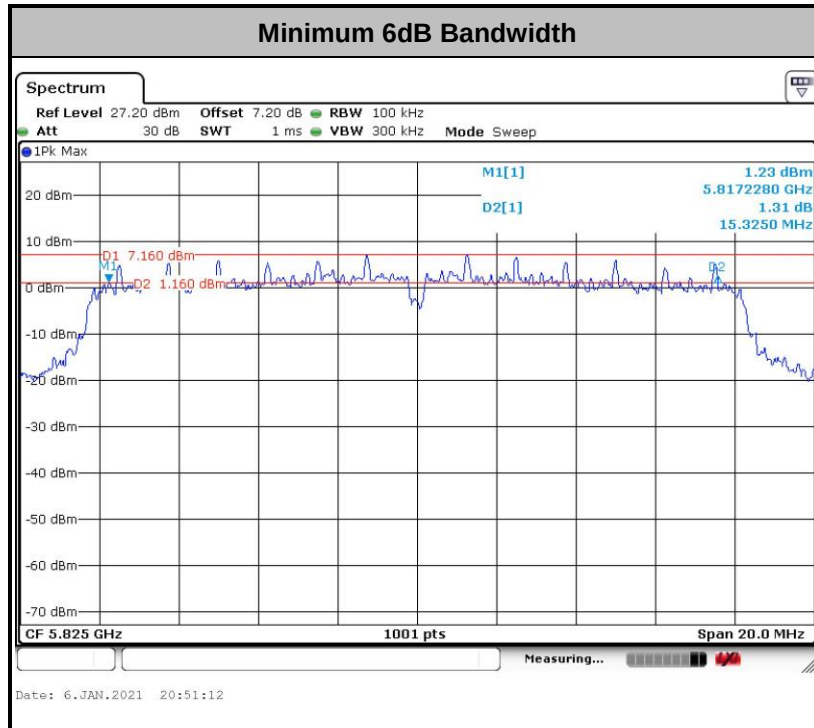

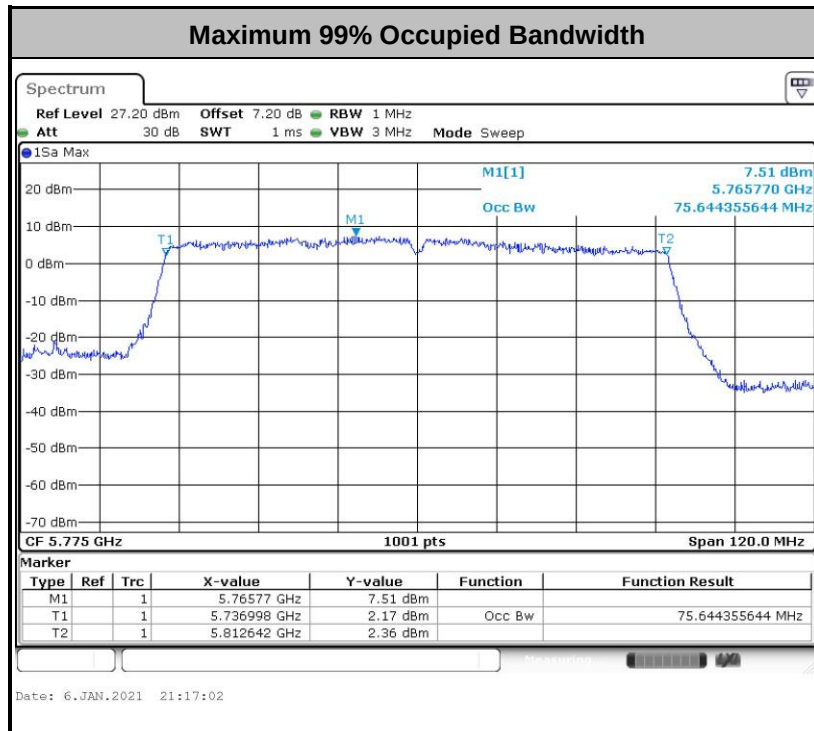

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

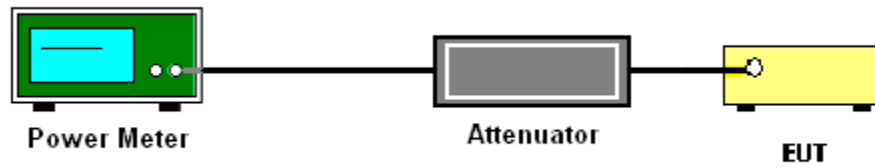

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


3.3.4 Test Setup

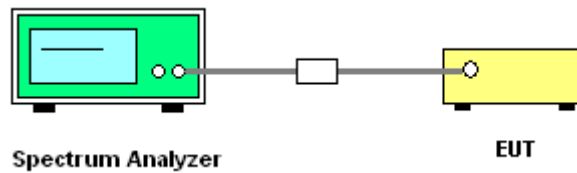



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

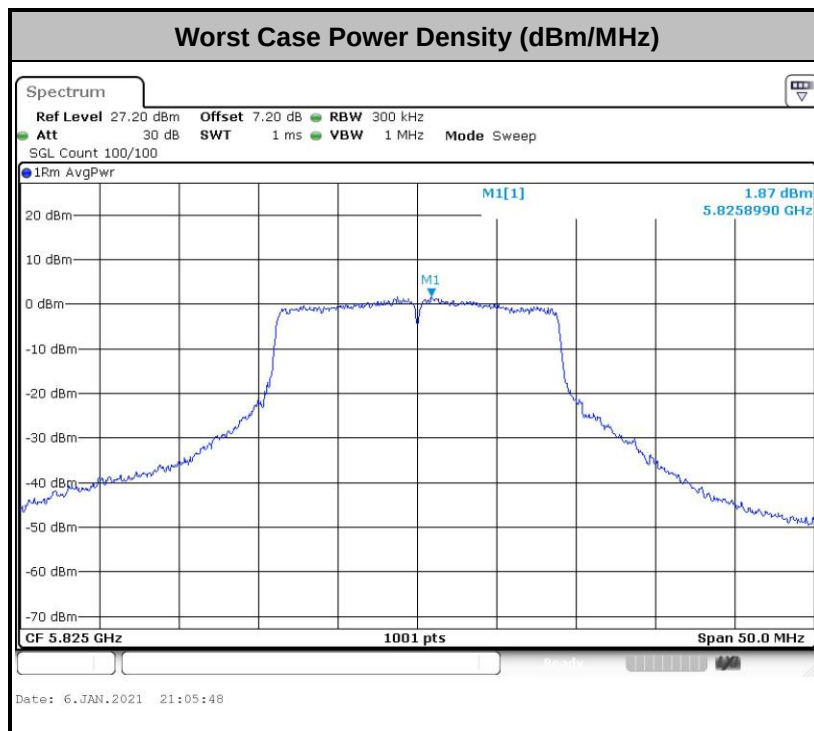

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

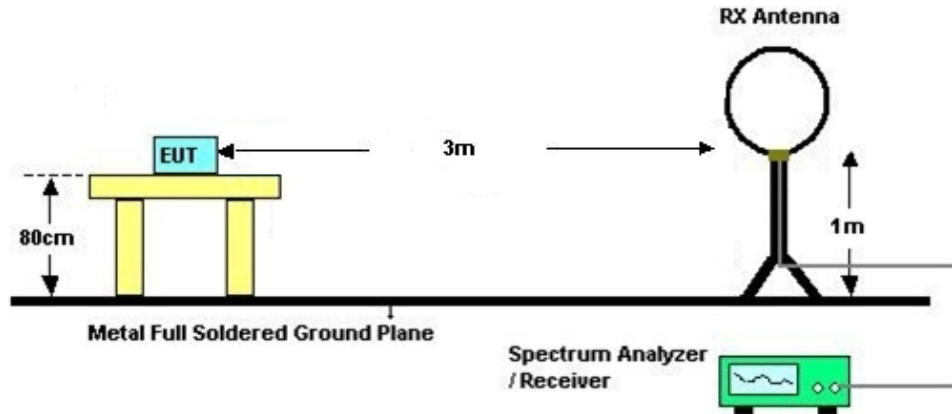

For radiated emissions from 30MHz to 1GHz

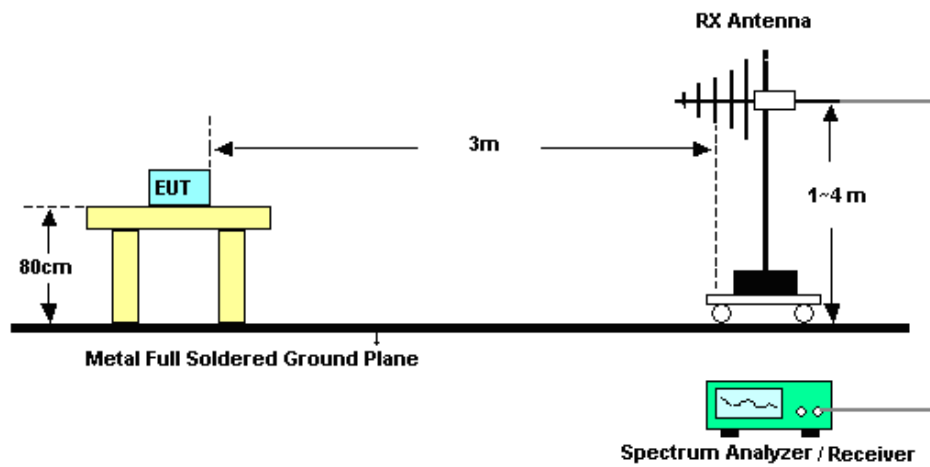

For radiated emissions above 1GHz

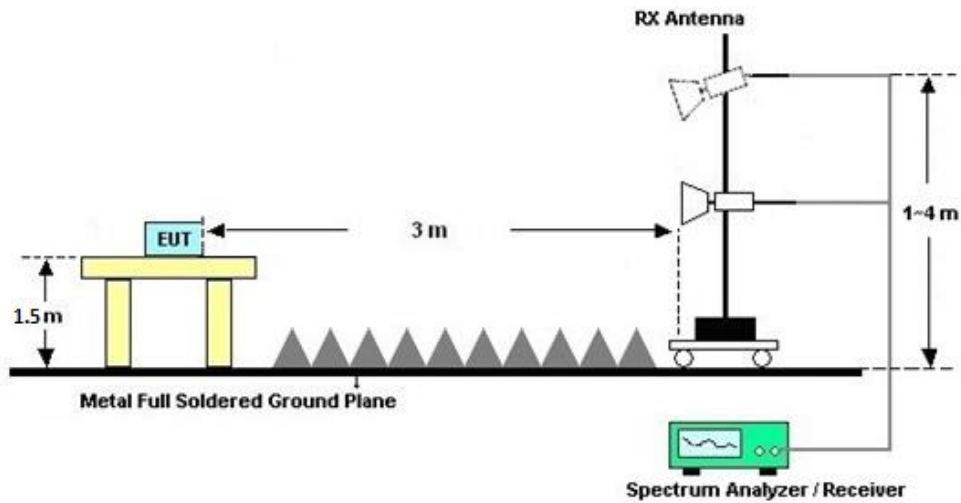

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

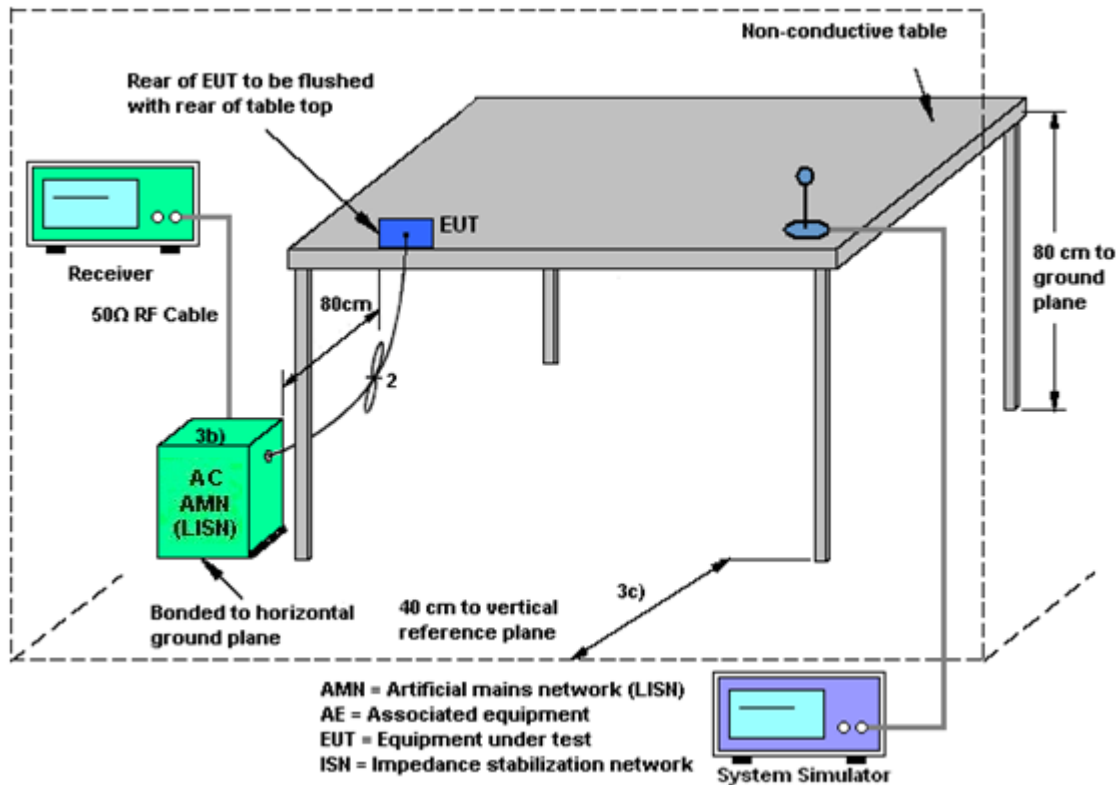

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	Jan. 06, 2021~ Jan. 19, 2021	Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	1339163	300MHz~40GHz	Nov. 18, 2020	Jan. 06, 2021~ Jan. 19, 2021	Nov. 19, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1435004	50MHz Bandwidth	Oct. 27, 2020	Jan. 06, 2021~ Jan. 19, 2021	Oct. 26, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 17, 2020	Jan. 22, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G, MAX 30dB	Apr.15, 2020	Jan. 22, 2021	Apr. 14, 2021	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 1, 2020	Jan. 22, 2021	Oct. 31, 2021	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 30, 2020	Jan. 22, 2021	May 29, 2021	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 26, 2020	Jan. 22, 2021	Apr. 25, 2021	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2020	Jan. 22, 2021	Nov. 09, 2021	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Apr. 14, 2020	Jan. 22, 2021	Apr. 13, 2021	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 07, 2021	Jan. 22, 2021	Jan. 06, 2022	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2012228	1Ghz~18Ghz	Oct. 17, 2020	Jan. 22, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 17, 2020	Jan. 22, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jan. 22, 2021	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 22, 2021	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 22, 2021	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	Jan. 21, 2021	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Jan. 21, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 27, 2020	Jan. 21, 2021	Oct. 26, 2021	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Jan. 21, 2021	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	Rise Liu	Temperature:	21~25	°C
Test Date:	2020/1/6~2020/1/19	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	17.43	23.377	15.3447	0.5	Pass
11a	6Mbps	1	157	5785	17.38	23.227	15.3447	0.5	Pass
11a	6Mbps	1	165	5825	17.38	22.727	15.325	0.5	Pass
HT20	MCS 0	1	149	5745	18.58	24.426	15.944	0.5	Pass
HT20	MCS 0	1	157	5785	18.63	24.076	15.944	0.5	Pass
HT20	MCS 0	1	165	5825	18.58	23.626	15.445	0.5	Pass
HT40	MCS 0	1	151	5755	36.56	41.538	35.325	0.5	Pass
HT40	MCS 0	1	159	5795	35.66	41.628	35.684	0.5	Pass
VHT80	MCS 0	1	155	5775	75.64	82.8	75.125	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.08	16.50	30.00	-5.00		Pass
11a	6Mbps	1	157	5785	0.08	16.60	30.00	-5.00		Pass
11a	6Mbps	1	165	5825	0.08	16.86	30.00	-5.00		Pass
HT20	MCS 0	1	149	5745	0.08	16.53	30.00	-5.00		Pass
HT20	MCS 0	1	157	5785	0.08	16.71	30.00	-5.00		Pass
HT20	MCS 0	1	165	5825	0.08	16.84	30.00	-5.00		Pass
HT40	MCS 0	1	151	5755	0.16	16.24	30.00	-5.00		Pass
HT40	MCS 0	1	159	5795	0.16	16.06	30.00	-5.00		Pass
VHT20	MCS 0	1	149	5745	0.08	16.52	30.00	-5.00		Pass
VHT20	MCS 0	1	157	5785	0.08	16.51	30.00	-5.00		Pass
VHT20	MCS 0	1	165	5825	0.08	16.65	30.00	-5.00		Pass
VHT40	MCS 0	1	151	5755	0.16	16.05	30.00	-5.00		Pass
VHT40	MCS 0	1	159	5795	0.16	15.87	30.00	-5.00		Pass
VHT80	MCS 0	1	155	5775	0.31	15.70	30.00	-5.00		Pass


TEST RESULTS DATA
Power Spectral Density

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.08	2.22	3.27	30.00	-5.00	Pass
11a	6Mbps	1	157	5785	0.08	2.22	3.09	30.00	-5.00	Pass
11a	6Mbps	1	165	5825	0.08	2.22	3.15	30.00	-5.00	Pass
HT20	MCS 0	1	149	5745	0.08	2.22	3.92	30.00	-5.00	Pass
HT20	MCS 0	1	157	5785	0.08	2.22	3.81	30.00	-5.00	Pass
HT20	MCS 0	1	165	5825	0.08	2.22	4.17	30.00	-5.00	Pass
HT40	MCS 0	1	151	5755	0.16	2.22	-0.17	30.00	-5.00	Pass
HT40	MCS 0	1	159	5795	0.16	2.22	-0.26	30.00	-5.00	Pass
VHT80	MCS 0	1	155	5775	0.31	2.22	-3.69	30.00	-5.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

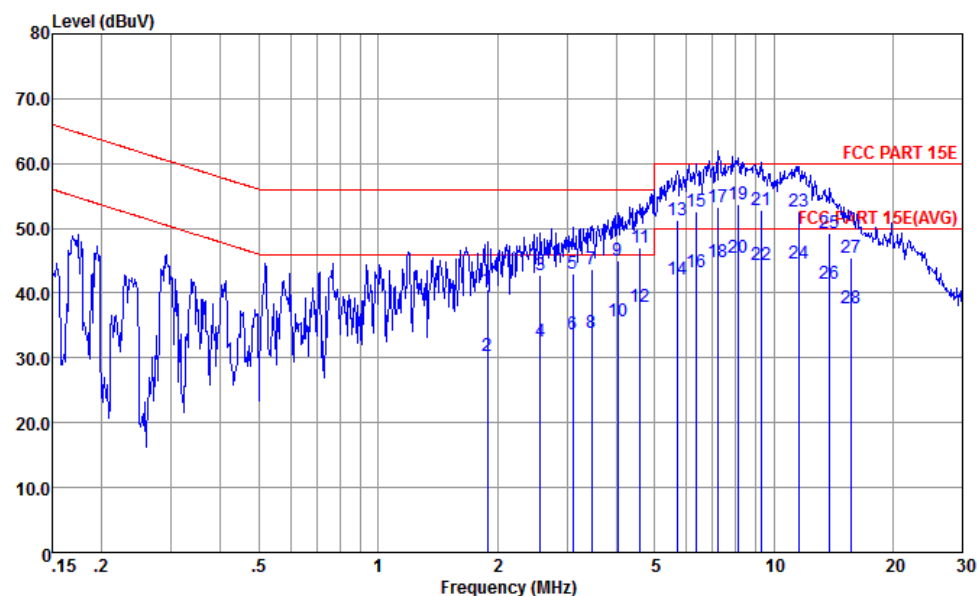


Site : CO01-KS
Condition : FCC PART 15E TWO-LISN-CN02-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	1.888	40.64	-15.36	56.00	20.49	9.92	10.23	QP
2	1.888	30.34	-15.66	46.00	10.19	9.92	10.23	Average
3	2.567	42.85	-13.15	56.00	22.60	10.01	10.24	QP
4	2.567	32.55	-13.45	46.00	12.30	10.01	10.24	Average
5	3.107	42.92	-13.08	56.00	22.61	10.07	10.24	QP
6	3.107	33.62	-12.38	46.00	13.31	10.07	10.24	Average
7	3.472	43.66	-12.34	56.00	23.30	10.11	10.25	QP
8	3.472	33.96	-12.04	46.00	13.60	10.11	10.25	Average
9	4.027	44.92	-11.08	56.00	24.51	10.16	10.25	QP
10	4.027	35.62	-10.38	46.00	15.21	10.16	10.25	Average
11	4.598	46.98	-9.02	56.00	26.51	10.21	10.26	QP
12	4.598	37.78	-8.22	46.00	17.31	10.21	10.26	Average
13	5.713	51.18	-8.82	60.00	30.60	10.30	10.28	QP
14	5.713	42.18	-7.82	50.00	21.60	10.30	10.28	Average
15	6.352	52.54	-7.46	60.00	31.90	10.35	10.29	QP
16	6.352	43.24	-6.76	50.00	22.60	10.35	10.29	Average
17	7.252	53.31	-6.69	60.00	32.60	10.40	10.31	QP
18	7.252	44.81	-5.19	50.00	24.10	10.40	10.31	Average
19	8.105	53.65	-6.35	60.00	32.90	10.43	10.32	QP
20 *	8.105	45.35	-4.65	50.00	24.60	10.43	10.32	Average
21	9.302	52.71	-7.29	60.00	31.90	10.48	10.33	QP
22	9.302	44.31	-5.69	50.00	23.50	10.48	10.33	Average
23	11.621	52.61	-7.39	60.00	31.61	10.64	10.36	QP
24	11.621	44.61	-5.39	50.00	23.61	10.64	10.36	Average
25	13.841	49.31	-10.69	60.00	28.10	10.82	10.39	QP
26	13.841	41.51	-8.49	50.00	20.30	10.82	10.39	Average
27	15.718	45.45	-14.55	60.00	24.10	10.94	10.41	QP
28	15.718	37.65	-12.35	50.00	16.30	10.94	10.41	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

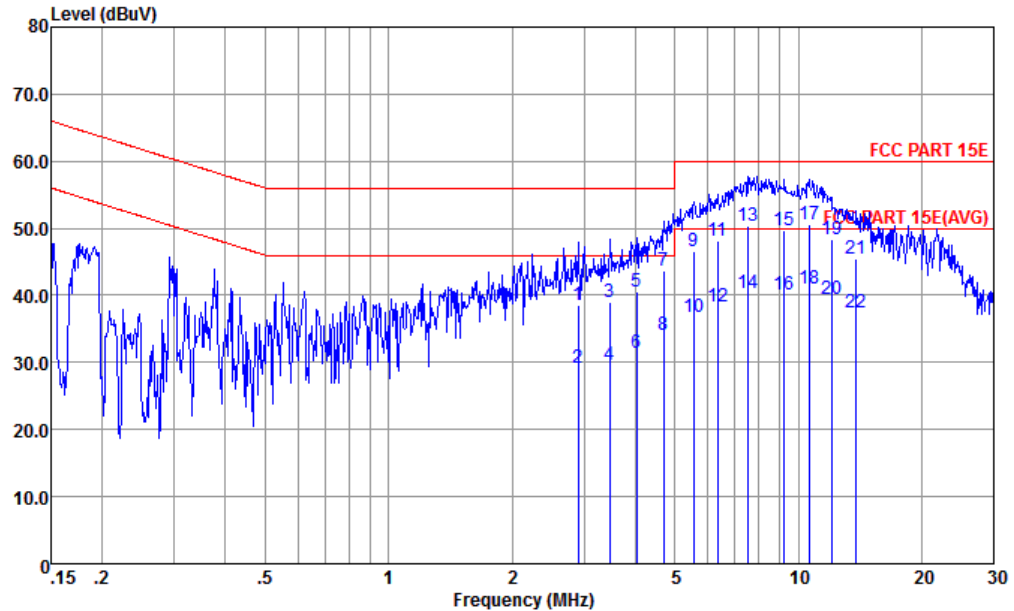

Site : CO01-KS
Condition : FCC PART 15E TWO-LISN-CN02-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBμV	Limit	Line	Level	Factor	Loss	
			dB	dBμV	dBμV	dB	dB	
1	2.900	38.50	-17.50	56.00	18.20	10.06	10.24	QP
2	2.900	29.20	-16.80	46.00	8.90	10.06	10.24	Average
3	3.472	38.97	-17.03	56.00	18.60	10.12	10.25	QP
4	3.472	29.67	-16.33	46.00	9.30	10.12	10.25	Average
5	4.027	40.63	-15.37	56.00	20.21	10.17	10.25	QP
6	4.027	31.33	-14.67	46.00	10.91	10.17	10.25	Average
7	4.696	43.69	-12.31	56.00	23.19	10.23	10.27	QP
8	4.696	34.09	-11.91	46.00	13.59	10.23	10.27	Average
9	5.564	46.68	-13.32	60.00	26.10	10.30	10.28	QP
10	5.564	36.78	-13.22	50.00	16.20	10.30	10.28	Average
11	6.352	48.16	-11.84	60.00	27.50	10.37	10.29	QP
12	6.352	38.26	-11.74	50.00	17.60	10.37	10.29	Average
13	7.526	50.36	-9.64	60.00	29.60	10.45	10.31	QP
14	7.526	40.36	-9.64	50.00	19.60	10.45	10.31	Average
15	9.253	49.75	-10.25	60.00	28.90	10.52	10.33	QP
16	9.253	40.15	-9.85	50.00	19.30	10.52	10.33	Average
17	10.620	50.57	-9.43	60.00	29.60	10.62	10.35	QP
18 *	10.620	41.07	-8.93	50.00	20.10	10.62	10.35	Average
19	12.060	48.35	-11.65	60.00	27.20	10.78	10.37	QP
20	12.060	39.45	-10.55	50.00	18.30	10.78	10.37	Average
21	13.841	45.54	-14.46	60.00	24.20	10.95	10.39	QP
22	13.841	37.54	-12.46	50.00	16.20	10.95	10.39	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5633.2	56.85	-11.45	68.3	41.09	34.81	11.72	30.77	101	286	P	H
		5660.4	56.58	-19.44	76.02	40.76	34.86	11.74	30.78	101	286	P	H
		5718	58.16	-52.18	110.34	42.05	35.08	11.84	30.81	101	286	P	H
		5722.8	62.75	-54.53	117.28	46.65	35.08	11.84	30.82	101	286	P	H
		5746	102.71	-----	-----	86.53	35.14	11.87	30.83	101	286	P	H
		5746	95.46	-----	-----	79.28	35.14	11.87	30.83	101	286	A	H
		5620	57.03	-11.27	68.3	41.36	34.75	11.69	30.77	104	313	P	V
		5691.6	56.47	-42.64	99.11	40.51	34.97	11.79	30.8	104	313	P	V
		5716	57.51	-52.27	109.78	41.47	35.03	11.82	30.81	104	313	P	V
		5724.8	60.21	-61.63	121.84	44.11	35.08	11.84	30.82	104	313	P	V
		5746	101.73	-----	-----	85.55	35.14	11.87	30.83	104	313	P	V
		5746	94.4	-----	-----	78.22	35.14	11.87	30.83	104	313	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz		5850	57.19	-65.11	122.3	40.74	35.35	11.97	30.87	101	289	P	H
		5864	57.75	-50.63	108.38	41.28	35.37	11.98	30.88	101	289	P	H
		5888	55.92	-39.73	95.65	39.41	35.4	12	30.89	101	289	P	H
		5957.2	58.46	-9.84	68.3	41.86	35.47	12.04	30.91	101	289	P	H
		5824	101.25	-----	-----	84.82	35.33	11.96	30.86	101	289	P	H
		5824	94.06	-----	-----	77.63	35.33	11.96	30.86	101	289	A	H
		5850	56.32	-65.98	122.3	39.87	35.35	11.97	30.87	101	293	P	V
		5855.2	56.6	-54.24	110.84	40.13	35.37	11.98	30.88	101	293	P	V
		5908.8	57.08	-23.17	80.25	40.54	35.42	12.01	30.89	101	293	P	V
		5978	57.31	-10.99	68.3	40.7	35.48	12.05	30.92	101	293	P	V
		5830	99.53	-----	-----	83.1	35.33	11.96	30.86	101	293	P	V
		5830	93.32	-----	-----	76.89	35.33	11.96	30.86	101	293	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149		11490	46.54	-27.46	74	51.71	38.19	17.07	60.43	300	0	P	H
5745MHz		11490	46.75	-27.25	74	51.92	38.19	17.07	60.43	300	0	P	V
802.11a CH 157		11570	45.22	-28.78	74	50.17	38.3	17.13	60.38	300	0	P	H
5785MHz		11570	46.26	-27.74	74	51.21	38.3	17.13	60.38	300	0	P	V
802.11a CH 165		11650	45.03	-28.97	74	49.79	38.39	17.18	60.33	100	360	P	H
5825MHz		11650	45.11	-28.89	74	49.87	38.39	17.18	60.33	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5629.6	56.18	-12.12	68.3	40.51	34.75	11.69	30.77	101	286	P	H
		5652	56.72	-13.07	69.79	40.9	34.86	11.74	30.78	101	286	P	H
		5719.2	61.96	-48.72	110.68	45.85	35.08	11.84	30.81	101	286	P	H
		5723.6	67.89	-51.22	119.11	51.79	35.08	11.84	30.82	101	286	P	H
		5746	103.04	-----	-----	86.86	35.14	11.87	30.83	101	286	P	H
		5746	95.94	-----	-----	79.76	35.14	11.87	30.83	101	286	A	H
		5638	55.6	-12.7	68.3	39.84	34.81	11.72	30.77	395	40	P	V
		5674.8	56.57	-30.12	86.69	40.67	34.92	11.77	30.79	395	40	P	V
		5716.4	59.91	-49.98	109.89	43.87	35.03	11.82	30.81	395	40	P	V
		5723.6	67.45	-51.66	119.11	51.35	35.08	11.84	30.82	395	40	P	V
		5746	102	-----	-----	85.82	35.14	11.87	30.83	395	40	P	V
		5746	95.43	-----	-----	79.25	35.14	11.87	30.83	395	40	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz		5850	57.47	-64.83	122.3	41.02	35.35	11.97	30.87	100	292	P	H
		5857.2	57.11	-53.17	110.28	40.64	35.37	11.98	30.88	100	292	P	H
		5888	56.45	-39.2	95.65	39.94	35.4	12	30.89	100	292	P	H
		5949.6	56.91	-11.39	68.3	40.34	35.45	12.03	30.91	100	292	P	H
		5824	102.1	-----	-----	85.67	35.33	11.96	30.86	100	292	P	H
		5824	94.71	-----	-----	78.28	35.33	11.96	30.86	100	292	A	H
		5850.8	58.16	-62.32	120.48	41.71	35.35	11.97	30.87	100	294	P	V
		5855.2	56.39	-54.45	110.84	39.92	35.37	11.98	30.88	100	294	P	V
		5878.8	56.75	-45.73	102.48	40.27	35.38	11.99	30.89	100	294	P	V
		5932	56.65	-11.65	68.3	40.11	35.43	12.02	30.91	100	294	P	V
		5824	100.6	-----	-----	84.17	35.33	11.96	30.86	100	294	P	V
		5824	93.63	-----	-----	77.2	35.33	11.96	30.86	100	294	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11490	45.89	-28.11	74	51.06	38.19	17.07	60.43	100	360	P	H
CH 149 5745MHz		11490	45.7	-28.3	74	50.87	38.19	17.07	60.43	100	360	P	V
802.11n HT20		11570	45.42	-28.58	74	50.37	38.3	17.13	60.38	100	360	P	H
CH 157 5785MHz		11570	44.24	-29.76	74	49.19	38.3	17.13	60.38	100	360	P	V
802.11n HT20		11650	44.98	-29.02	74	49.74	38.39	17.18	60.33	100	360	P	H
CH 165 5825MHz		11650	45.49	-28.51	74	50.25	38.39	17.18	60.33	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5648	56.38	-11.92	68.3	40.63	34.81	11.72	30.78	100	281	P	H
		5699.6	59.54	-45.47	105.01	43.58	34.97	11.79	30.8	100	281	P	H
		5719.6	67.63	-43.16	110.79	51.52	35.08	11.84	30.81	100	281	P	H
		5723.2	66.51	-51.69	118.2	50.41	35.08	11.84	30.82	100	281	P	H
		5850.8	56.01	-64.47	120.48	39.56	35.35	11.97	30.87	100	281	P	H
		5855.2	56.11	-54.73	110.84	39.64	35.37	11.98	30.88	100	281	P	H
		5903.6	57.16	-26.94	84.1	40.65	35.4	12	30.89	100	281	P	H
		5950.4	57.78	-10.52	68.3	41.21	35.45	12.03	30.91	100	281	P	H
		5758	100.29	-----	-----	84.04	35.19	11.89	30.83	100	281	P	H
		5758	93.03	-----	-----	76.78	35.19	11.89	30.83	100	281	A	H
		5626.4	56.19	-12.11	68.3	40.52	34.75	11.69	30.77	100	34	P	V
		5696	59.57	-42.78	102.35	43.61	34.97	11.79	30.8	100	34	P	V
		5719.2	67.03	-43.65	110.68	50.92	35.08	11.84	30.81	100	34	P	V
		5723.6	66.89	-52.22	119.11	50.79	35.08	11.84	30.82	100	34	P	V
		5850.4	58.09	-63.3	121.39	41.64	35.35	11.97	30.87	100	34	P	V
		5864	56.08	-52.3	108.38	39.61	35.37	11.98	30.88	100	34	P	V
		5911.2	56.28	-22.2	78.48	39.74	35.42	12.01	30.89	100	34	P	V
		5951.2	57.41	-10.89	68.3	40.84	35.45	12.03	30.91	100	34	P	V
		5752	99.36	-----	-----	83.11	35.19	11.89	30.83	100	34	P	V
		5752	91.68	-----	-----	75.43	35.19	11.89	30.83	100	34	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5632.4	56.78	-11.52	68.3	41.11	34.75	11.69	30.77	291	108	P	H
		5690	56.87	-41.06	97.93	40.91	34.97	11.79	30.8	291	108	P	H
		5701.6	57.05	-48.7	105.75	41	35.03	11.82	30.8	291	108	P	H
		5721.2	56.55	-57.09	113.64	40.44	35.08	11.84	30.81	291	108	P	H
		5850	57.19	-65.11	122.3	40.74	35.35	11.97	30.87	291	108	P	H
		5863.2	56.82	-51.78	108.6	40.35	35.37	11.98	30.88	291	108	P	H
		5916.4	57.04	-17.6	74.64	40.51	35.42	12.01	30.9	291	108	P	H
		5992.8	57.53	-10.77	68.3	40.9	35.5	12.06	30.93	291	108	P	H
		5794	101.15	-----	-----	84.75	35.3	11.94	30.84	291	108	P	H
		5794	93.61	-----	-----	77.21	35.3	11.94	30.84	291	108	A	H
		5638.8	56.96	-11.34	68.3	41.2	34.81	11.72	30.77	101	246	P	V
		5678.4	55.96	-33.4	89.36	40.06	34.92	11.77	30.79	101	246	P	V
		5719.8	55.65	-55.19	110.84	39.54	35.08	11.84	30.81	101	246	P	V
		5721.2	56.45	-57.19	113.64	40.34	35.08	11.84	30.81	101	246	P	V
		5851.6	56.04	-62.61	118.65	39.59	35.35	11.97	30.87	101	246	P	V
		5872.8	58.39	-47.53	105.92	41.9	35.38	11.99	30.88	101	246	P	V
		5896.8	56.76	-32.37	89.13	40.25	35.4	12	30.89	101	246	P	V
		5965.6	58.48	-9.82	68.3	41.88	35.47	12.04	30.91	101	246	P	V
		5794	97.3	-----	-----	80.9	35.3	11.94	30.84	101	246	P	V
		5794	89.92	-----	-----	73.52	35.3	11.94	30.84	101	246	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40		11510	44.83	-29.17	74	49.98	38.2	17.08	60.43	300	0	P	H
CH 151 5755MHz		11510	46.09	-27.91	74	51.24	38.2	17.08	60.43	300	0	P	V
802.11n HT40		11590	44.18	-29.82	74	49.09	38.32	17.14	60.37	100	360	P	H
CH 159 5795MHz		11590	44.16	-29.84	74	49.07	38.32	17.14	60.37	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5608.4	57.59	-10.71	68.3	41.99	34.7	11.67	30.77	100	286	P	H
		5699.6	65.59	-39.42	105.01	49.63	34.97	11.79	30.8	100	286	P	H
		5716.8	68.01	-42	110.01	51.97	35.03	11.82	30.81	100	286	P	H
		5720.4	69.66	-42.15	111.81	53.55	35.08	11.84	30.81	100	286	P	H
		5853.2	60.07	-54.93	115	43.62	35.35	11.97	30.87	100	286	P	H
		5862.4	60.72	-48.11	108.83	44.25	35.37	11.98	30.88	100	286	P	H
		5886	57	-40.13	97.13	40.52	35.38	11.99	30.89	100	286	P	H
		5959.6	56.96	-11.34	68.3	40.36	35.47	12.04	30.91	100	286	P	H
		5758	97.34	-----	-----	81.09	35.19	11.89	30.83	100	286	P	H
		5758	89.22	-----	-----	72.97	35.19	11.89	30.83	100	286	A	H
		5641.2	57.71	-10.59	68.3	41.95	34.81	11.72	30.77	391	38	P	V
		5697.6	62.41	-41.12	103.53	46.45	34.97	11.79	30.8	391	38	P	V
		5718.8	64.04	-46.52	110.56	47.93	35.08	11.84	30.81	391	38	P	V
		5722.4	64.39	-51.98	116.37	48.29	35.08	11.84	30.82	391	38	P	V
		5852	59.04	-58.7	117.74	42.59	35.35	11.97	30.87	391	38	P	V
		5867.6	58.8	-48.57	107.37	42.33	35.37	11.98	30.88	391	38	P	V
		5922.8	57.14	-12.78	69.92	40.59	35.43	12.02	30.9	391	38	P	V
		5946.8	57.11	-11.19	68.3	40.54	35.45	12.03	30.91	391	38	P	V
		5764	96.38	-----	-----	80.14	35.19	11.89	30.84	391	38	P	V
		5764	88.96	-----	-----	72.72	35.19	11.89	30.84	391	38	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11550	45.4	-28.6	74	50.4	38.27	17.12	60.39	300	0	P	H
CH 155 5775MHz		11550	44.46	-29.54	74	49.46	38.27	17.12	60.39	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11n HT40 LF		32.91	17.76	-22.24	40	27.83	22.22	0.71	33	-----	-----	P	H
		104.69	18.16	-25.34	43.5	33.28	16.22	1.55	32.89	-----	-----	P	H
		186.17	21.31	-22.19	43.5	36.56	15.7	2.07	33.02	-----	-----	P	H
		302.57	18.97	-27.03	46	29.84	19.38	2.65	32.9	-----	-----	P	H
		534.4	22.61	-23.39	46	26.82	24.92	3.53	32.66	-----	-----	P	H
		727.43	26.13	-19.87	46	27.12	27.63	4.13	32.75	100	0	P	H
		34.85	26.52	-13.48	40	36.81	21.7	0.71	32.7	100	0	P	V
		83.35	21.77	-18.23	40	39.17	14.06	1.38	32.84	-----	-----	P	V
		186.17	20.56	-22.94	43.5	35.81	15.7	2.07	33.02	-----	-----	P	V
		460.68	21.58	-24.42	46	27.71	23.31	3.28	32.72	-----	-----	P	V
		626.55	24.96	-21.04	46	27.43	26.32	3.82	32.61	-----	-----	P	V
		750.71	27.26	-18.74	46	27.37	28.4	4.19	32.7	-----	-----	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.62	-	-	10Hz
802.11n HT20	97.79	1.928	0.519	1KHz
802.11n HT40	96.32	0.949	1.053	1.1KHz
802.11ac VHT80	92.75	0.464	2.156	2.2KHz

802.11a

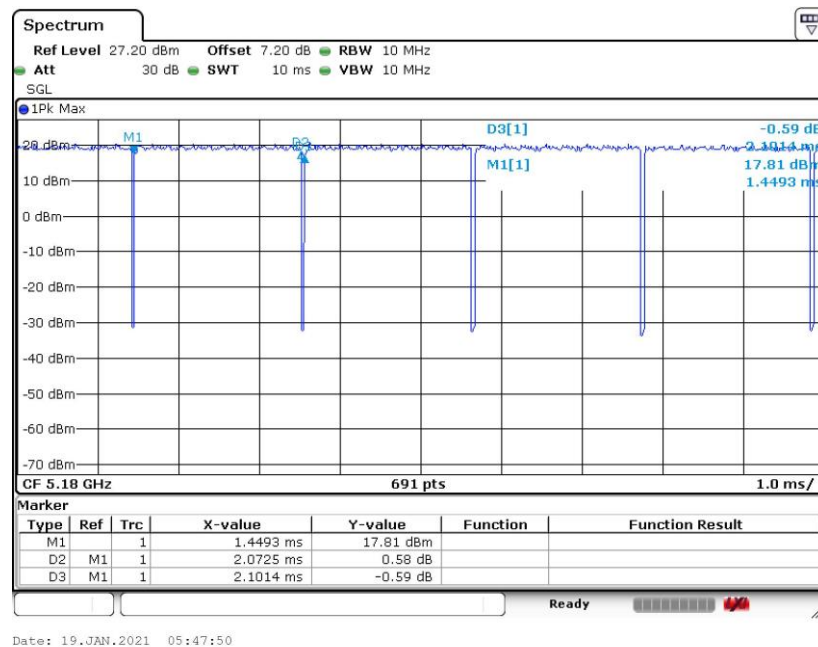




802.11n HT20

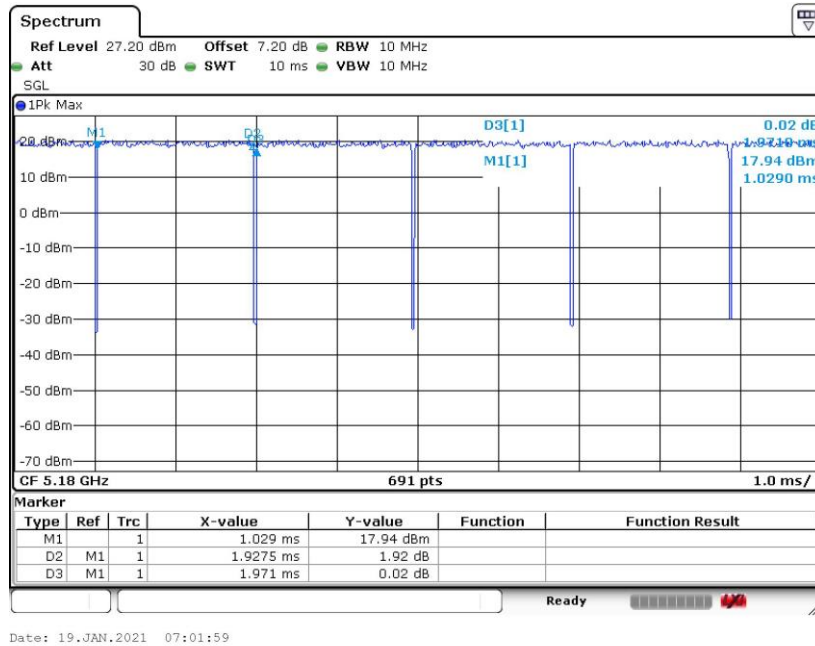


802.11n HT40

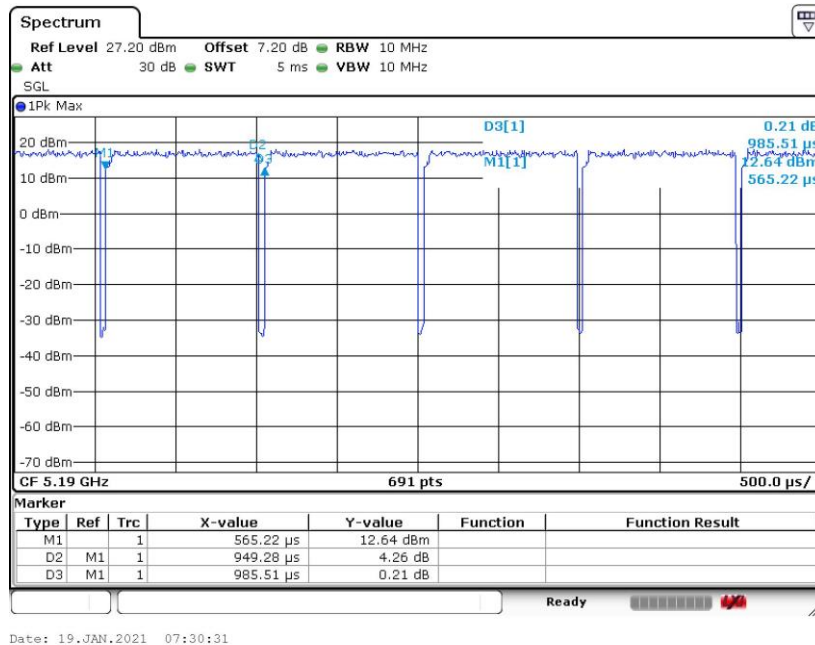



802.11ac VHT80

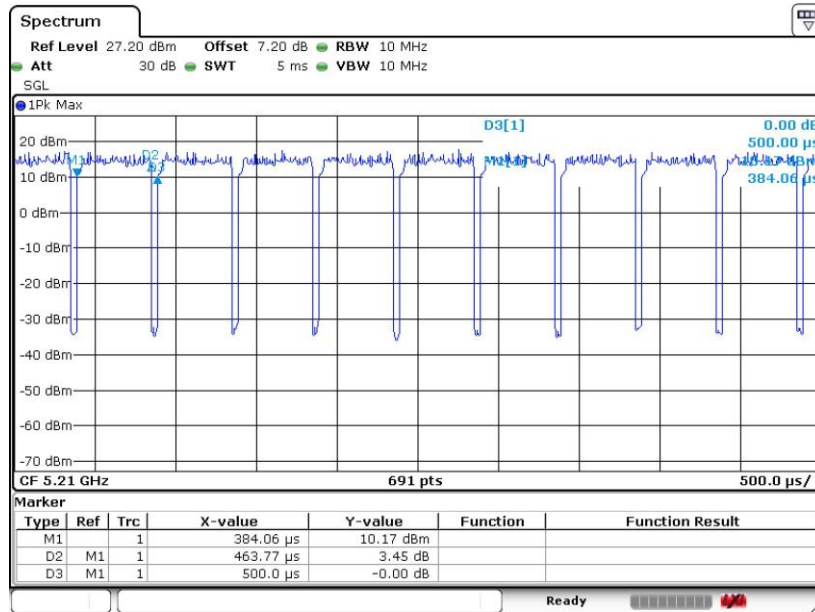

Date: 19.JAN.2021 07:42:36