



Test report No.: 2350302R-RFUSV03S-A

TEST REPORT (Class II Permissive Change)

Product Name	Host-based multiradio modules with WiFi, Bluetooth and NFC
Trademark	u-blox
Model and /or type reference	EMMY-W163
FCC ID	XPYEMMYW163
Applicant's name / address	u-blox AG Zürcherstrasse 68. Thalwil, 8800. Switzerland
Manufacturer's name	u-blox AG
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart E ANSI C63.4: 2014, ANSI C63.10: 2013 KDB Publication 789033
Verdict Summary	IN COMPLIANCE
Documented By (Senior Project Specialist / Genie Chang)	Genie Chang
Tested By (Senior Engineer / Bill Lin)	Bill Lin
Approved By (Senior Engineer / Jack Hsu)	Jack Hsu
Date of Receipt	2022/11/07
Date of Issue	2023/06/26
Report Version	V1.0

INDEX

Page

1. General Information.....	5
1.1. EUT Description.....	5
1.2. Tested System Details.....	7
1.3. Configuration of tested System	7
1.4. EUT Exercise Software	8
1.5. Test Facility	9
1.6. List of Test Equipment.....	10
1.7. Uncertainty	11
2. Maximum conducted output power	12
2.1. Test Setup	12
2.2. Limits.....	13
2.3. Test Procedure	14
2.4. Test Result of Maximum conducted output power.....	15
3. Radiated Emission	19
3.1. Test Setup	19
3.2. Limits.....	20
3.3. Test Procedure	21
3.4. Test Result of Radiated Emission	22
4. Band Edge	32
4.1. Test Setup	32
4.2. Limits.....	33
4.3. Test Procedure	34
4.4. Test Result of Band Edge	35
5. Duty Cycle	43
5.1. Test Setup	43
5.2. Test Procedure	43
5.3. Test Result of Duty Cycle.....	44

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 2350302R-Product Photos

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General conditions


1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Report No.	Version	Description	Issued Date
2350302R-RFUSV03S-A	V1.0	Initial issue of report.	2023/06/26

1. General Information

1.1. EUT Description

Product Name	Host-based multiradio modules with WiFi, Bluetooth and NFC
Trademark	u-blox
Model and /or type reference	EMMY-W163
EUT Rated Voltage	DC 3.3V
EUT Test Voltage	DC 3.3V
Frequency Range	802.11a/n/ac-20 MHz: 5180-5240 MHz, 5745-5825 MHz 802.11n/ac-40 MHz: 5190-5230 MHz, 5755-5795 MHz 802.11ac-80 MHz: 5210 MHz, 5775 MHz
Number of Channels	802.11a/n/ac-20 MHz: 9, 802.11n/ac-40 MHz: 4 802.11ac-80 MHz: 2
Data Rate	802.11a: 6 – 54 Mbps 802.11n: up to 150 Mbps 802.11ac-80 MHz: up to 433.3 Mbps
Type of Modulation	OFDM, BPSK, QPSK, 16QAM, 64QAM, 256QAM
Channel Control	Auto
Blockchain verified QR code	

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Mercedes	A1779052902	PIFA	5.0 dBi For 5180~5850 MHz

Note: The antenna of EUT is conforming to FCC 15.203.

802.11a/n/ac-20 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	44	5220	48	5240
149	5745	153	5765	157	5785	161	5805
165	5825	165	5825	--	--	--	--

802.11n/ac-40 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	151	5755	159	5795

802.11ac-80 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	155	5775	--	--	--	--

Note:

1. This device is a Host-based multiradio modules with WiFi, Bluetooth and NFC with built-in WLAN and Bluetooth transceiver, this report for 5GHz WLAN.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report.
4. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance of transmitter with Part 15 Subpart E for Unlicensed National Information Infrastructure devices.
5. This is to request a Class II permissive change for FCC ID: XPYEMMYW163, originally granted on 09/09/2016.

The major change filed under this application is:

Change #1: Addition a PIFA Antenna, the antenna type is different with the original application.

Host information		
Brand	Product Name	Model No.
ART	Car Infotainment Unit	ICC

Test Mode	Mode 1	Transmit (802.11a)
		Transmit (802.11ac-20MHz)
		Transmit (802.11ac-40MHz)
		Transmit (802.11ac-80MHz)


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Battery	YUASA	55B24L-CMF II	N/A	N/A
2 Notebook PC	DELL	Latitude E5440	FS9TK32	N/A
3 HSD Double 8mm Housing Code Z	Rosenberger	D4Z0009-000Z	N/A	N/A
4 USB 3.0 Ethernet LAN Adapter	Manhattan	506847	N/A	N/A
5 Test Fixture	ART	ICC	N/A	N/A

Cable Type	Cable Description
A Power Cable	Non-shielded, 1.8m
B Power Cable	Non-shielded, 1m
C HSD Cable Jack to HSD Dacar 566	Non-shielded, 0.8m
D USB 3.0 Ethernet LAN Adapter Cable	Non-shielded, 0.2m
E ETH Cable	Non-shielded, 1m
F CSM 2 HSD to USB 3.0 Cable	Non-shielded, 1.5m

1.3. Configuration of tested System

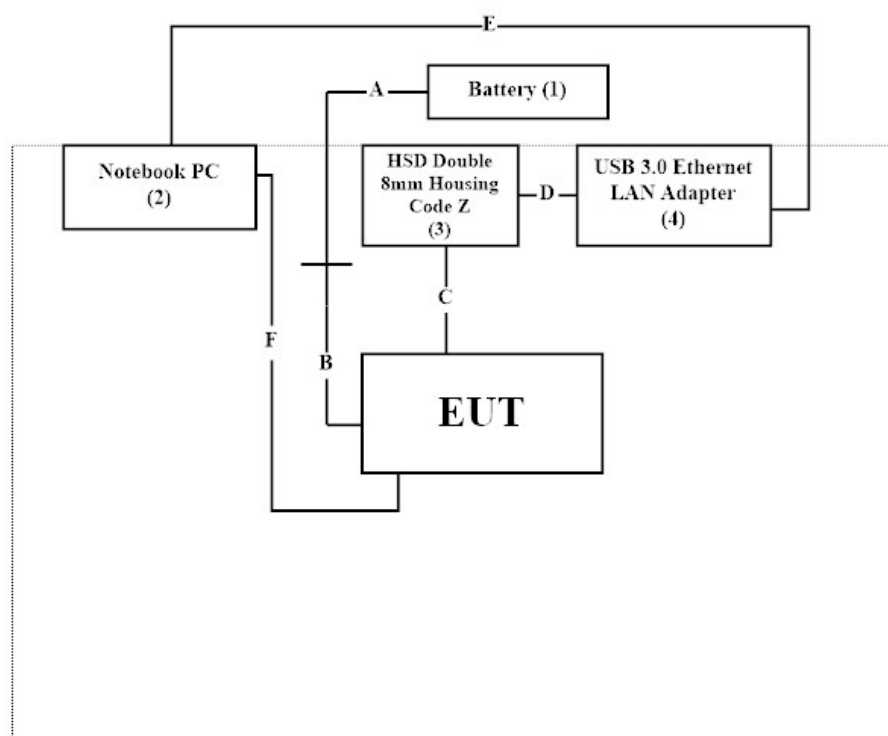

1.4. EUT Exercise Software

1.	Setup the EUT as shown in Section 1.4.
2.	Execute software “PuTTY Configuration version Release 0.73” on the Notebook PC.
3.	Configure the test mode, the test channel, and the data rate.
4.	Press “OK” to start the continuous Transmit.
5.	Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Radiated Emission	Temperature (°C)	10~40 °C	23.4°C
	Humidity (%RH)	10~90 %	58.6%
Conductive	Temperature (°C)	10~40 °C	22.0 °C
	Humidity (%RH)	10~90 %	55.0 %

USA	FCC Registration Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
	Linkou Laboratory
Address	No.5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan, R.O.C.
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

1.6. List of Test Equipment

For Conducted Measurements / HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2022/06/23	2023/06/22
V	Two-Line V-Network	R&S	ENV216	101306	2022/05/23	2023/05/22
V	Two-Line V-Network	R&S	ENV216	101307	2022/07/04	2023/07/03
V	Coaxial Cable	SUHNER	RG400_BNC	RF001	2022/05/24	2023/05/23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: RF Conducted Test Tools R3 V3.0.0.14.

For Radiated Measurements / HY-CB03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Loop Antenna	AMETEK	HLA6121	49611	2022/03/18	2023/03/17
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2021/08/11	2023/08/10
V	Horn Antenna	Com-Power	AH-840	101100	2021/10/04	2023/10/03
V	Horn Antenna	RF SPIN	DRH18-E	210508A18ES	2022/06/08	2023/06/07
V	Pre-Amplifier	SGH	0301	20211007-10	2023/01/10	2024/01/09
V	Pre-Amplifier	SGH	PRAMP118	20200701	2023/01/10	2024/01/09
V	Pre-Amplifier	EMCI	EMC05820SE	980310	2023/01/10	2024/01/09
V	Pre-Amplifier	EMCI	EMC184045SE	980369	2023/01/10	2024/01/09
	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242		
	Filter	MICRO TRONICS	BRM50702	G269	2022/07/31	2023/07/30
V	Filter	MICRO TRONICS	BRM50716	G196	2022/07/27	2023/07/26
V	EMI Test Receiver	R&S	ESR3	102793	2022/12/05	2023/12/04
V	Spectrum Analyzer	R&S	FSV3044	101113	2023/02/04	2024/02/03
V	Coaxial Cable	SGH	SGH18	2021005-1	2023/01/10	2024/01/09
	Coaxial Cable	SGH	SGH18	202108-4		
	Coaxial Cable	SGH	HA800	GD20110223-1		
	Coaxial Cable	SGH	HA800	GD20110222-3		

Note:

1. Bi-Log Antenna and Horn Antenna(AH-840) is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: E3 210616 dekra V9.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.


Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty	
Maximum conducted output power	Power Meter ± 0.89 dB	Spectrum Analyzer ± 2.06 dB
Radiated Emission	Under 1 GHz ± 4.05 dB	Above 1 GHz ± 3.73 dB
Band Edge	Under 1 GHz ± 4.05 dB	Above 1 GHz ± 3.73 dB
Duty Cycle	± 2.31 msec	

2. Maximun conducted output power


2.1. Test Setup

99% Occupied Bandwidth

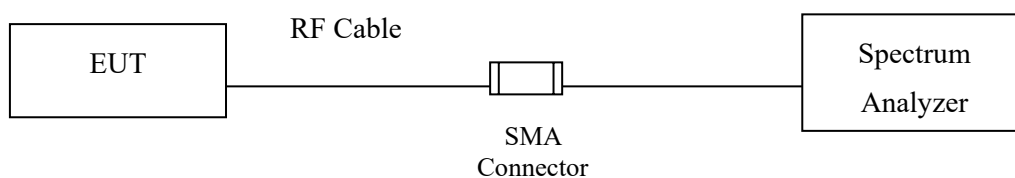


Conduction Power Measurement

Conduction Power Measurement (for 802.11an)

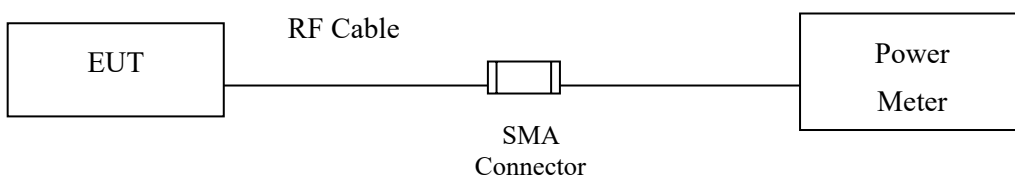

Conduction Power Measurement (for 802.11ac)

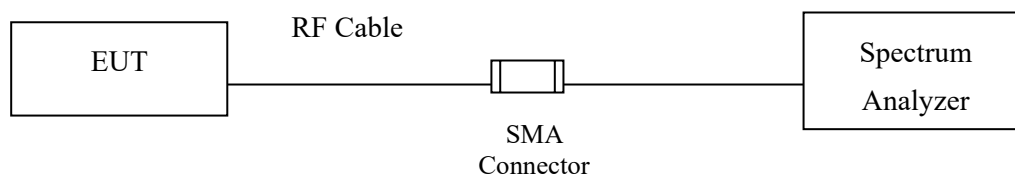

2.2. Limits

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

2.3. Test Procedure

As an alternative to FCC KDB-789033, the EUT maximum conducted output power was measured with an average power meter employing a video bandwidth greater the 6dB BW of the emission under test. Maximum conducted output power was read directly from the meter across all data rates, and across three channels within each sub-band. Special care was used to make sure that the EUT was transmitting in continuous mode. This method exceeds the limitations of FCC KDB-789033, and provides more accurate measurements.

802.11an (BW \leq 40MHz) Maximum conducted output power using KDB 789033 section E)3)b) Method PM-G (Measurement using a gated RF average power meter)

Note: the power meter have a video bandwidth that is greater than or equal to the measurement bandwidth, (Anritsu/ MA2411B video bandwidth: 65MHz)

802.11ac (BW=80MHz) Maximum conducted output power using KDB 789033 section E)2)b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep).

When transmitted signals consist of two or more non-contiguous spectrum segments (e.g., 80+80 MHz mode) or when a single spectrum segment of a transmission crosses the boundary between two adjacent U-NII bands, KDB 644545 D03 section D) procedure is used for measurements.

2.4. Test Result of Maximum conducted output power

Product : Host-based multiradio modules with WiFi, Bluetooth and NFC
Test Item : Maximum conducted output power
Test Mode : Transmit (802.11a)
Test Date : 2023/01/18

Channel No.	Frequency (MHz)	Output Power (dBm)	Output Power Limit (dBm)
36	5180	9.40	24
44	5220	13.67	24
48	5240	13.51	24
149	5745	13.03	30
157	5785	12.72	30
165	5825	12.35	30

Product : Host-based multiradio modules with WiFi, Bluetooth and NFC
Test Item : Maximum conducted output power
Test Mode : Transmit (802.11ac-20MHz)
Test Date : 2023/01/18

Channel No.	Frequency (MHz)	Output Power (dBm)	Output Power Limit (dBm)
149	5745	11.06	30
157	5785	12.68	30
165	5825	12.54	30

Product : Host-based multiradio modules with WiFi, Bluetooth and NFC
Test Item : Maximum conducted output power
Test Mode : Transmit (802.11ac-40MHz)
Test Date : 2023/01/18

Channel No.	Frequency (MHz)	Output Power (dBm)	Output Power Limit (dBm)
151	5755	10.07	30
159	5795	10.71	30


Product : Host-based multiradio modules with WiFi, Bluetooth and NFC
Test Item : Maximum conducted output power
Test Mode : Transmit (802.11ac-80MHz)
Test Date : 2023/01/18

Channel No.	Frequency (MHz)	Output Power (dBm)	Output Power Limit (dBm)
42	5210	3.75	24
155	5775	7.75	30


3. Radiated Emission

3.1. Test Setup


Radiated Emission Under 30 MHz

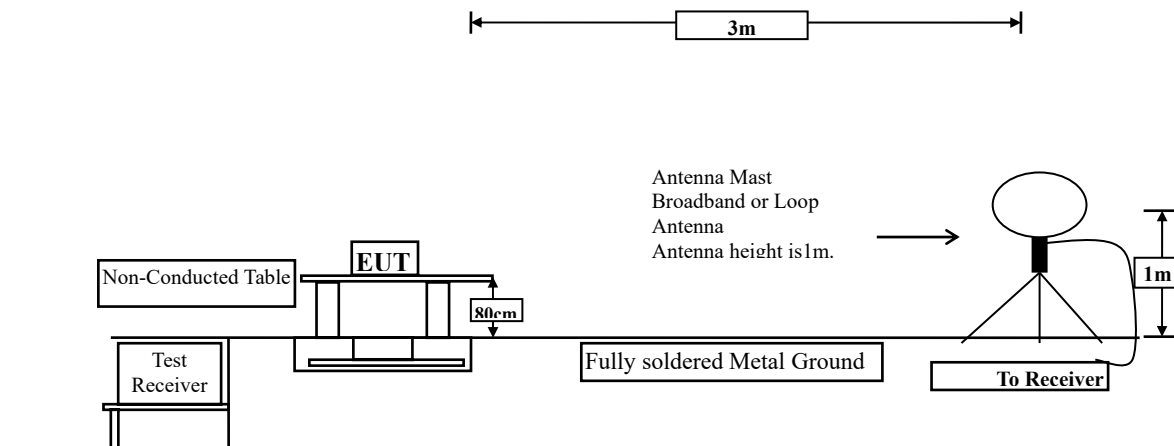

Radiated Emission Below 1 GHz

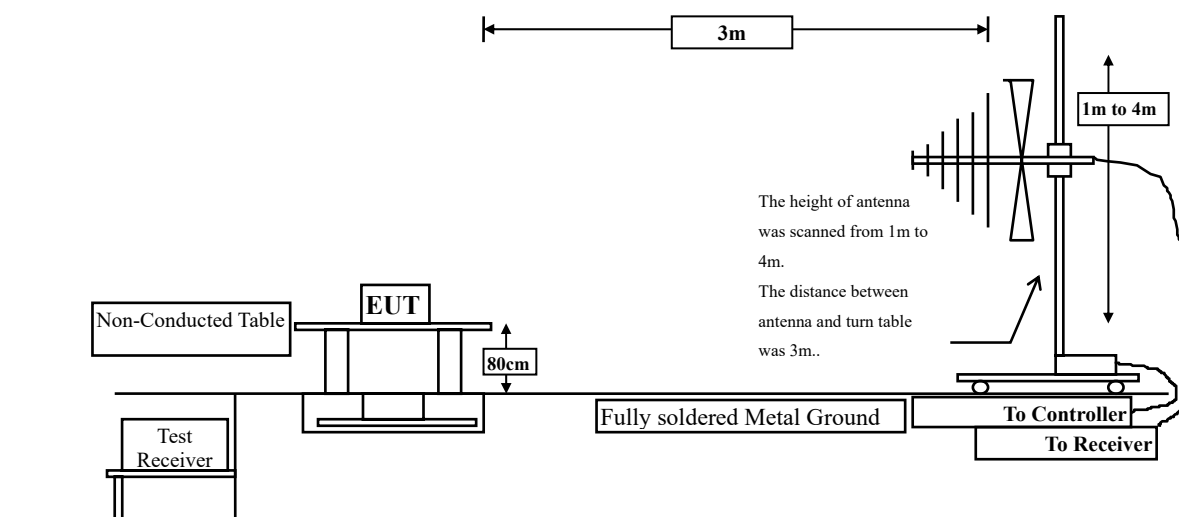

Radiated Emission Above 1 GHz

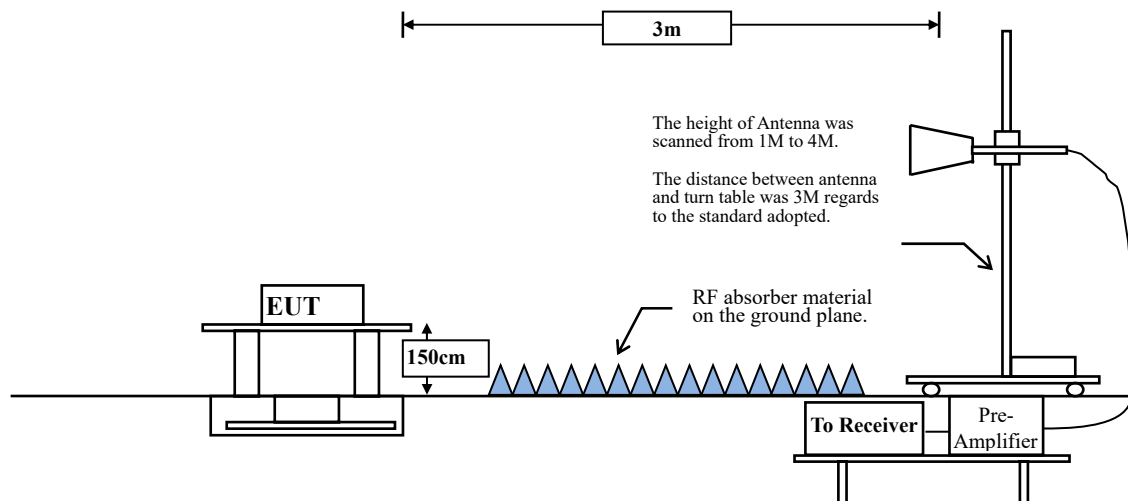

3.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dB μ V/m) = 20 log E field strength (uV/m)

- For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- For transmitters operating in the 5.725-5.85 GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Based on ANSI C63.10-2013 Section 12.7.3 d) provides the conversion formula between field strength and EIRP, if distance is 3m, -27dBm is equivalent to 68.22dBuV/m.

3.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to FCC KDB-789033 test procedure for compliance to FCC 47CFR 15. 407 requirements.

Measuring the frequency range below 1 GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1 GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30 MHz setting on the field strength meter is 9kHz and 30 MHz~1 GHz is 120 kHz and above 1 GHz is 1 MHz.

Radiated emission measurements below 30 MHz are made using Loop Antenna and 30 MHz~1 GHz are made using broadband Bilog antenna and above 1 GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9 kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz.

RBW = 1 MHz.

VBW \geq 3 MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz.

RBW = 1 MHz.

VBW = 10 Hz, when duty cycle \geq 98 %


VBW \geq 1/T, when duty cycle < 98 %

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


5 GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11 a	40.23	2.1000	476	500
802.11 ac20	37.98	1.9600	510	1000
802.11 ac40	18.60	0.9600	1042	2000
802.11 ac80	8.56	0.4400	2273	3000

Note: Duty Cycle Refer to Section 8

3.4. Test Result of Radiated Emission

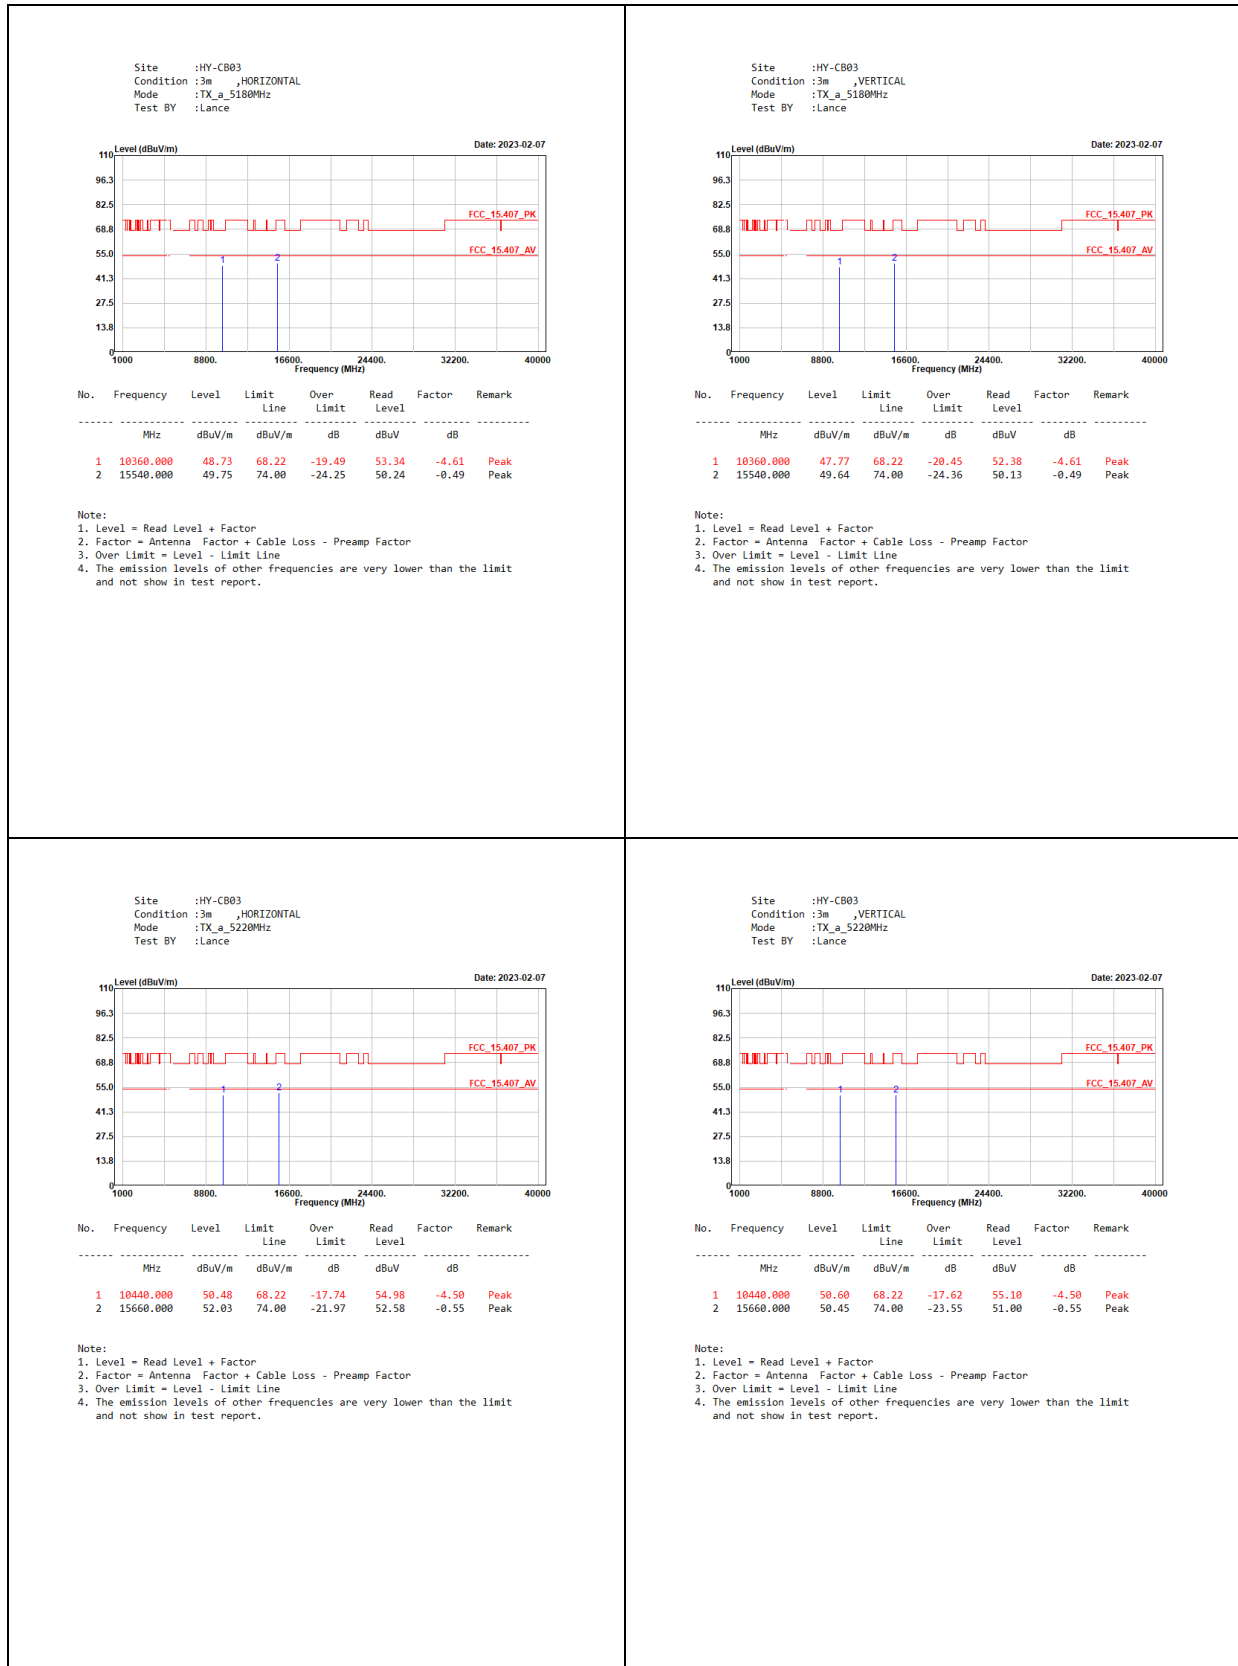


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_a_5240MHz
Test BY :Lance

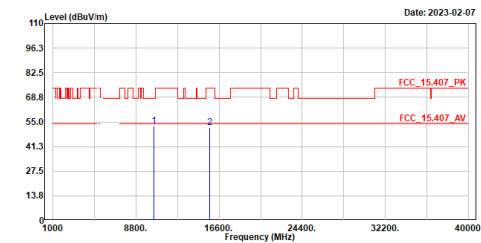

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10480.000	52.56	68.22	-15.66	56.96	-4.40	Peak
2	15720.000	51.79	74.00	-22.21	52.59	-0.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_a_5240MHz
Test BY :Lance

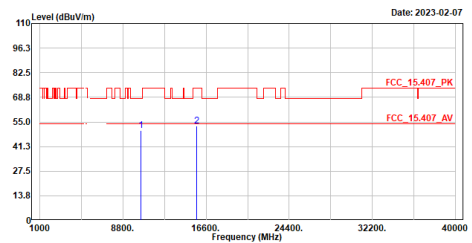

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10480.000	50.42	68.22	-17.80	54.82	-4.40	Peak
2	15720.000	52.89	74.00	-21.11	53.68	-0.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_a_5745MHz
Test BY :Lance

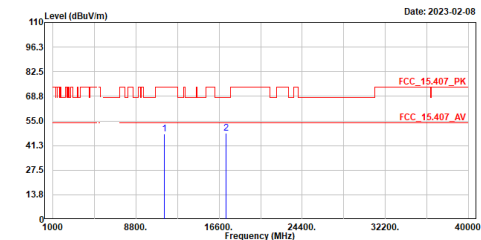

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11490.000	47.88	74.00	-26.12	49.87	-1.99	Peak
2	17235.000	47.95	68.22	-20.27	49.12	-1.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_a_5745MHz
Test BY :Lance

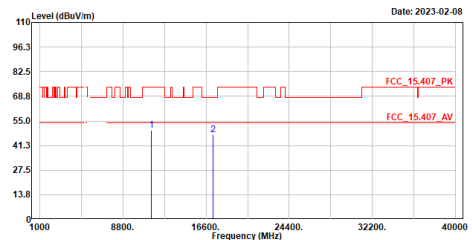

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11490.000	49.84	74.00	-24.16	51.83	-1.99	Peak
2	17235.000	47.34	68.22	-20.88	48.51	-1.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_a_5785MHz
Test BY :Lance

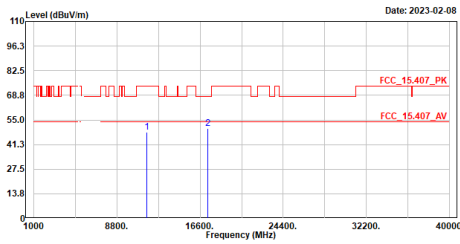


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11570.000	48.30	74.00	-25.70	50.11	-1.81	Peak
2	17355.000	50.12	68.22	-18.10	50.88	-0.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_a_5785MHz
Test BY :Lance

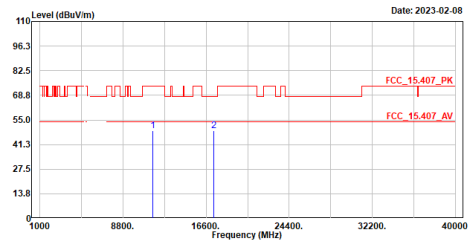


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11570.000	49.16	74.00	-24.84	50.97	-1.81	Peak
2	17355.000	49.06	68.22	-19.16	49.83	-0.77	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_a_5825MHz
Test BY :Lance

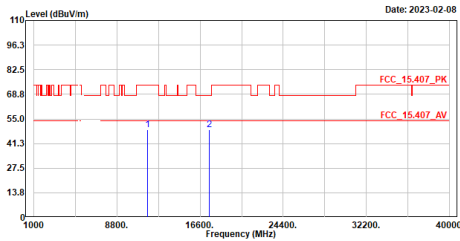


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11650.000	48.99	74.00	-25.01	50.80	-1.81	Peak
2	17475.000	48.89	68.22	-19.33	49.63	-0.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_a_5825MHz
Test BY :Lance

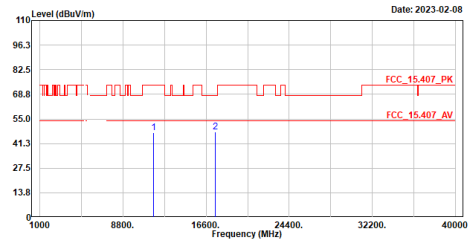


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11650.000	47.19	74.00	-26.81	49.00	-1.81	Peak
2	17475.000	47.58	68.22	-20.64	48.32	-0.74	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5180MHz
Test BY :Lance

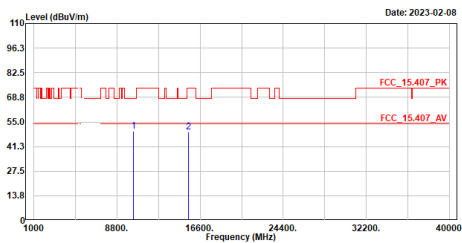

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10360.000	49.81	68.22	-18.41	54.42	-4.61	Peak
2	15540.000	49.32	74.00	-24.68	49.81	-0.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ac20_5180MHz
Test BY :Lance

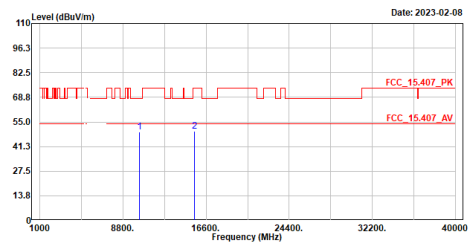

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10360.000	49.42	68.22	-18.80	54.03	-4.61	Peak
2	15540.000	49.70	74.00	-24.30	50.19	-0.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5220MHz
Test BY :Lance

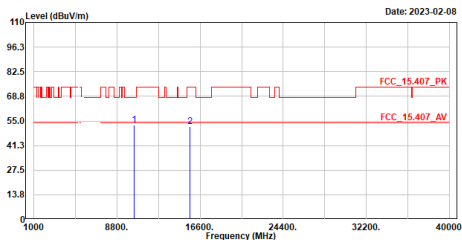

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10440.000	52.77	68.22	-15.45	57.27	-4.50	Peak
2	15660.000	51.80	74.00	-22.20	52.35	-0.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ac20_5220MHz
Test BY :Lance

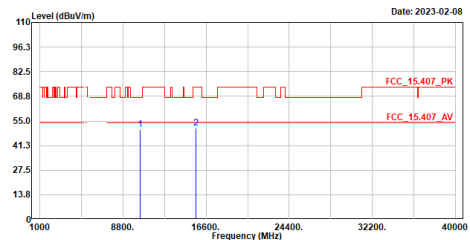

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10440.000	50.08	68.22	-18.14	54.58	-4.50	Peak
2	15660.000	51.01	74.00	-22.99	51.56	-0.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5240MHz
Test BY :Lance

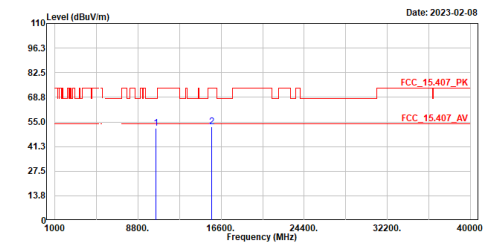

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	10489.000	51.44	68.22	-16.78	55.84	-4.40	Peak
2	15720.000	52.43	74.00	-21.57	53.23	-0.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ac20_5240MHz
Test BY :Lance

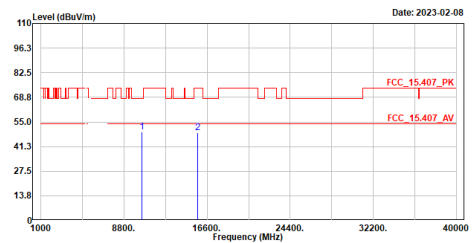

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	10489.000	49.23	68.22	-18.99	53.63	-4.40	Peak
2	15720.000	49.15	74.00	-24.85	49.95	-0.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5745MHz
Test BY :Ashton

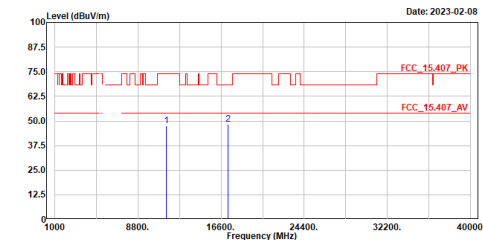

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	11490.000	47.67	74.00	-26.33	49.66	-1.99	Peak
2	17235.000	48.40	68.22	-19.82	49.57	-1.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ac20_5745MHz
Test BY :Ashton

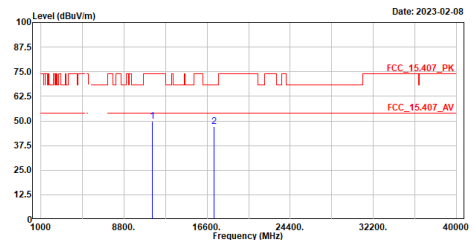

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	11490.000	49.76	74.00	-24.24	51.75	-1.99	Peak
2	17235.000	47.14	68.22	-21.08	48.31	-1.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5785MHz
Test BY :Ashton

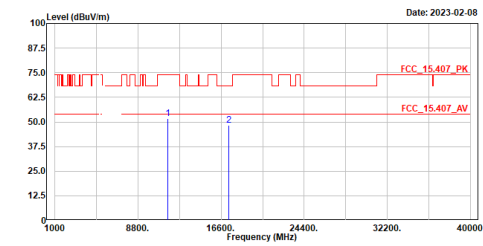

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11570.000	51.70	74.00	-22.30	53.51	-1.81	Peak
2	17355.000	48.41	68.22	-19.81	49.17	-0.76	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ac20_5785MHz
Test BY :Ashton

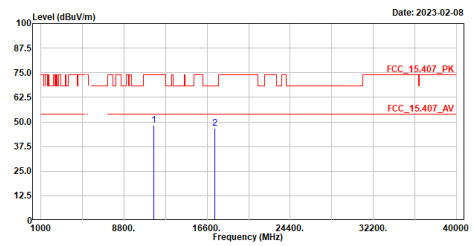

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11570.000	48.18	74.00	-25.82	49.99	-1.81	Peak
2	17355.000	46.93	68.22	-21.29	47.69	-0.76	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5825MHz
Test BY :Ashton

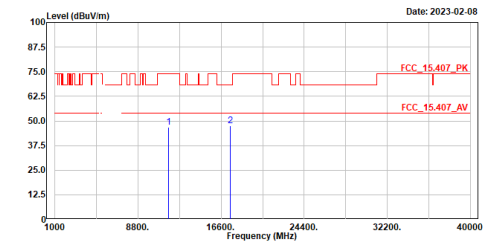

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11650.000	46.84	74.00	-27.16	48.66	-1.82	Peak
2	17475.000	47.38	68.22	-20.84	48.12	-0.74	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ac20_5825MHz
Test BY :Ashton

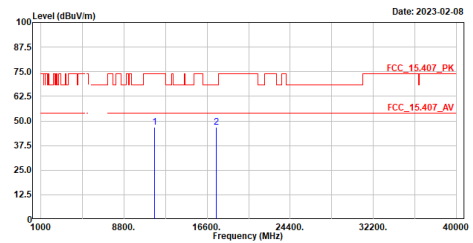

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11650.000	46.89	74.00	-27.11	48.71	-1.82	Peak
2	17475.000	46.94	68.22	-21.28	47.68	-0.74	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5190MHz
Test BY :Lance

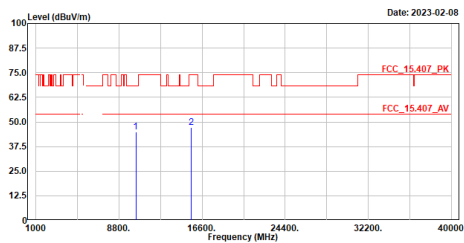

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	10380.000	44.98	68.22	-23.24	49.57	-4.59	Peak
2	15570.000	47.32	74.00	-26.68	47.76	-0.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ac40_5190MHz
Test BY :Lance

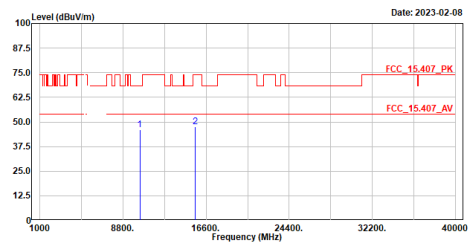

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	10380.000	46.17	68.22	-22.05	50.76	-4.59	Peak
2	15570.000	47.38	74.00	-26.62	47.82	-0.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5230MHz
Test BY :Lance

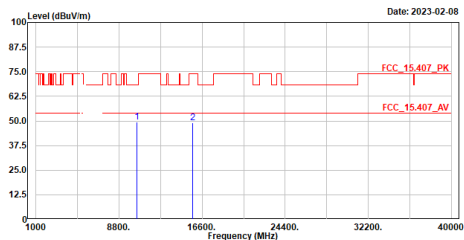

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	10460.000	49.35	68.22	-18.87	53.79	-4.44	Peak
2	15690.000	48.98	74.00	-25.02	49.72	-0.74	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ac40_5230MHz
Test BY :Lance

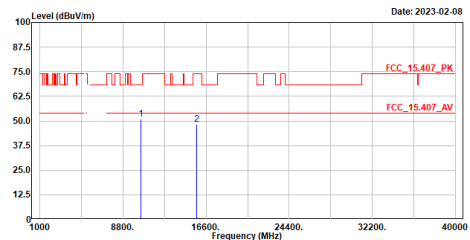


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB	
1	10460.000	50.86	68.22	-17.36	55.30	-4.44	Peak
2	15690.000	48.12	74.00	-25.88	48.86	-0.74	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

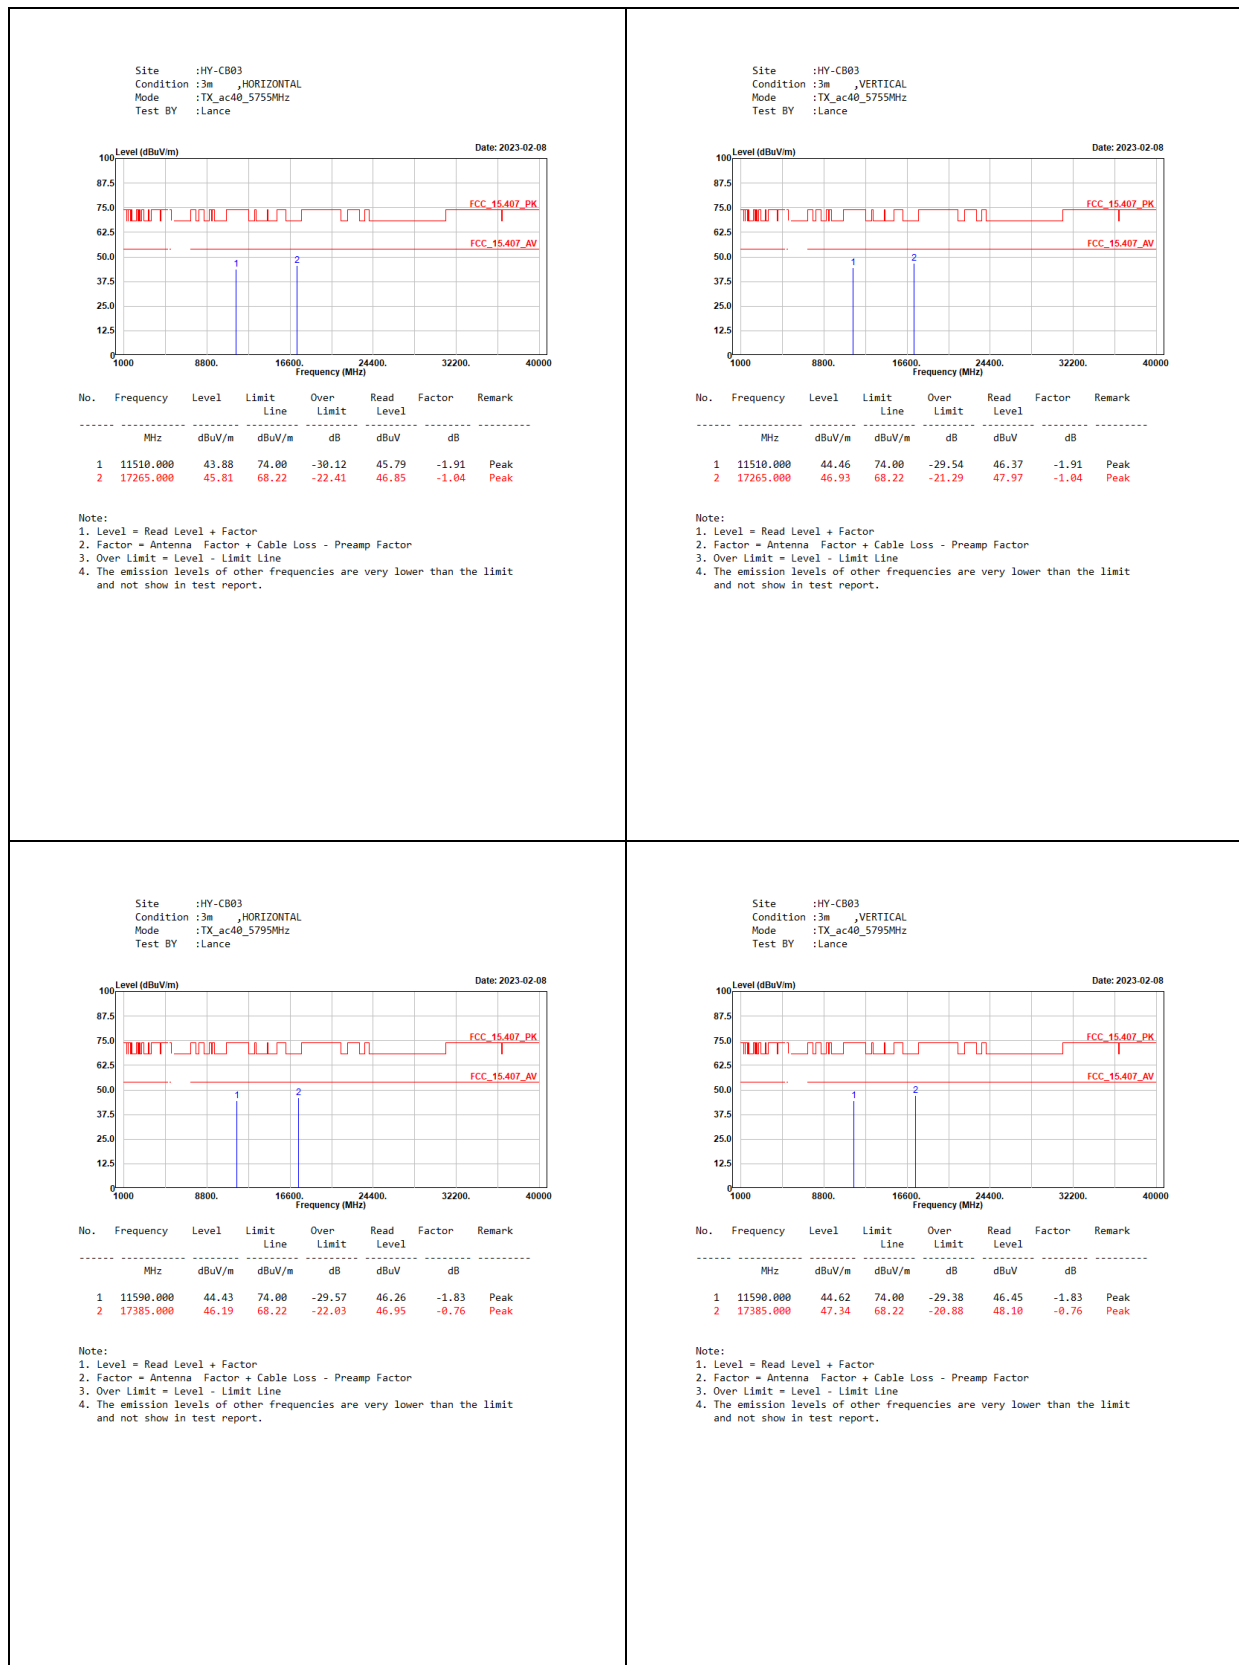


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5210MHz
Test BY :Lance

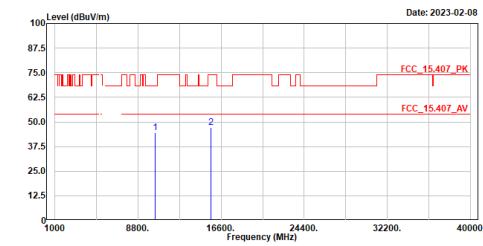

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	10420.000	44.34	68.22	-23.88	48.87	-4.53	Peak
2	15630.000	47.34	74.00	-26.66	47.70	-0.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ac80_5210MHz
Test BY :Lance

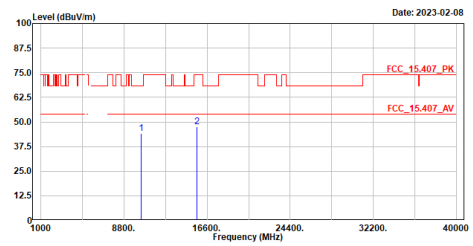

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	10420.000	44.28	68.22	-23.94	48.81	-4.53	Peak
2	15630.000	47.43	74.00	-26.57	47.79	-0.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5775MHz
Test BY :Lance

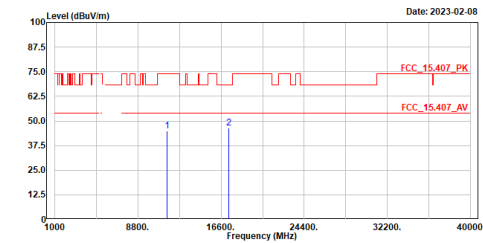

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11550.000	44.81	74.00	-29.19	46.60	-1.79	Peak
2	17325.000	46.45	68.22	-21.77	47.23	-0.78	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ac80_5775MHz
Test BY :Lance

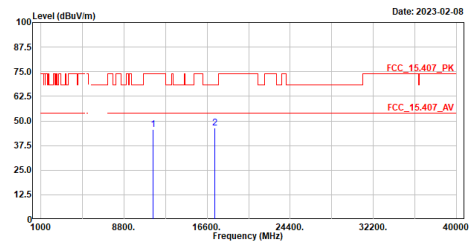

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11550.000	45.66	74.00	-28.34	47.45	-1.79	Peak
2	17325.000	46.32	68.22	-21.90	47.10	-0.78	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5775MHz
Test BY :Ashton Chiu

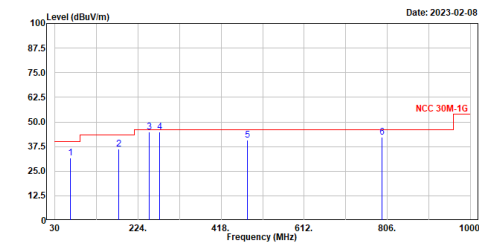


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	65.890	31.59	40.00	-8.41	57.60	-26.01	QP
2	179.380	36.39	43.50	-7.11	61.84	-25.45	QP
3	250.190	44.81	46.00	-1.19	70.29	-25.48	QP
4	274.440	44.98	46.00	-1.02	69.43	-24.45	QP
5	480.080	40.94	46.00	-5.06	60.11	-19.17	QP
6	794.360	42.09	46.00	-3.91	55.40	-13.31	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ac80_5775MHz
Test BY :Ashton Chiu

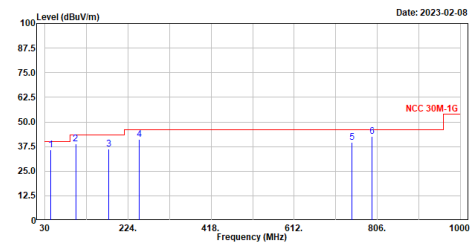

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	43.580	35.78	40.00	-4.22	59.00	-24.02	QP
2	101.700	39.01	43.50	-4.49	67.50	-28.57	QP
3	179.380	36.17	43.50	-7.33	61.62	-25.45	QP
4	250.190	41.13	46.00	-4.87	66.61	-25.48	QP
5	746.830	39.47	46.00	-6.53	53.35	-13.88	QP
6	794.360	42.62	46.00	-3.38	55.93	-13.31	QP


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


4. Band Edge

4.1. Test Setup

RF Conducted Measurement:

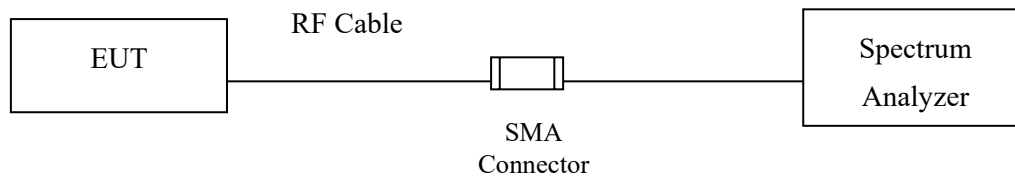

RF Radiated Measurement:

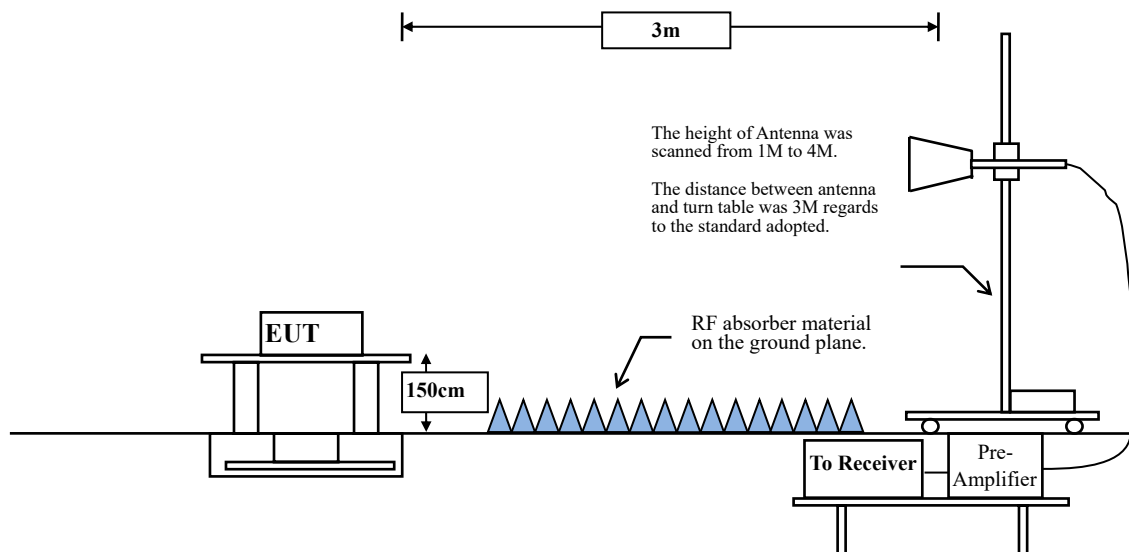

4.2. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section. Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBμV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dBμV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 - For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 - For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 - For transmitters operating in the 5.725-5.85 GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Based on ANSI C63.10-2013 Section 12.7.3 d) provides the conversion formula between field strength and EIRP, if distance is 3m, -27dBm is equivalent to 68.22dBuV/m.

4.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated measurement.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz, above 1 GHz are 1 MHz.

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

RBW and VBW Parameter setting:

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz.

RBW = 1 MHz.

VBW \geq 3 MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz.

RBW = 1 MHz.

VBW = 10 Hz, when duty cycle \geq 98 %


VBW \geq 1/T, when duty cycle < 98 %

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


5 GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11 a	40.23	2.1000	476	500
802.11 ac20	37.98	1.9600	510	1000
802.11 ac40	18.60	0.9600	1042	2000
802.11 ac80	8.56	0.4400	2273	3000

Note: Duty Cycle Refer to Section 8

4.4. Test Result of Band Edge

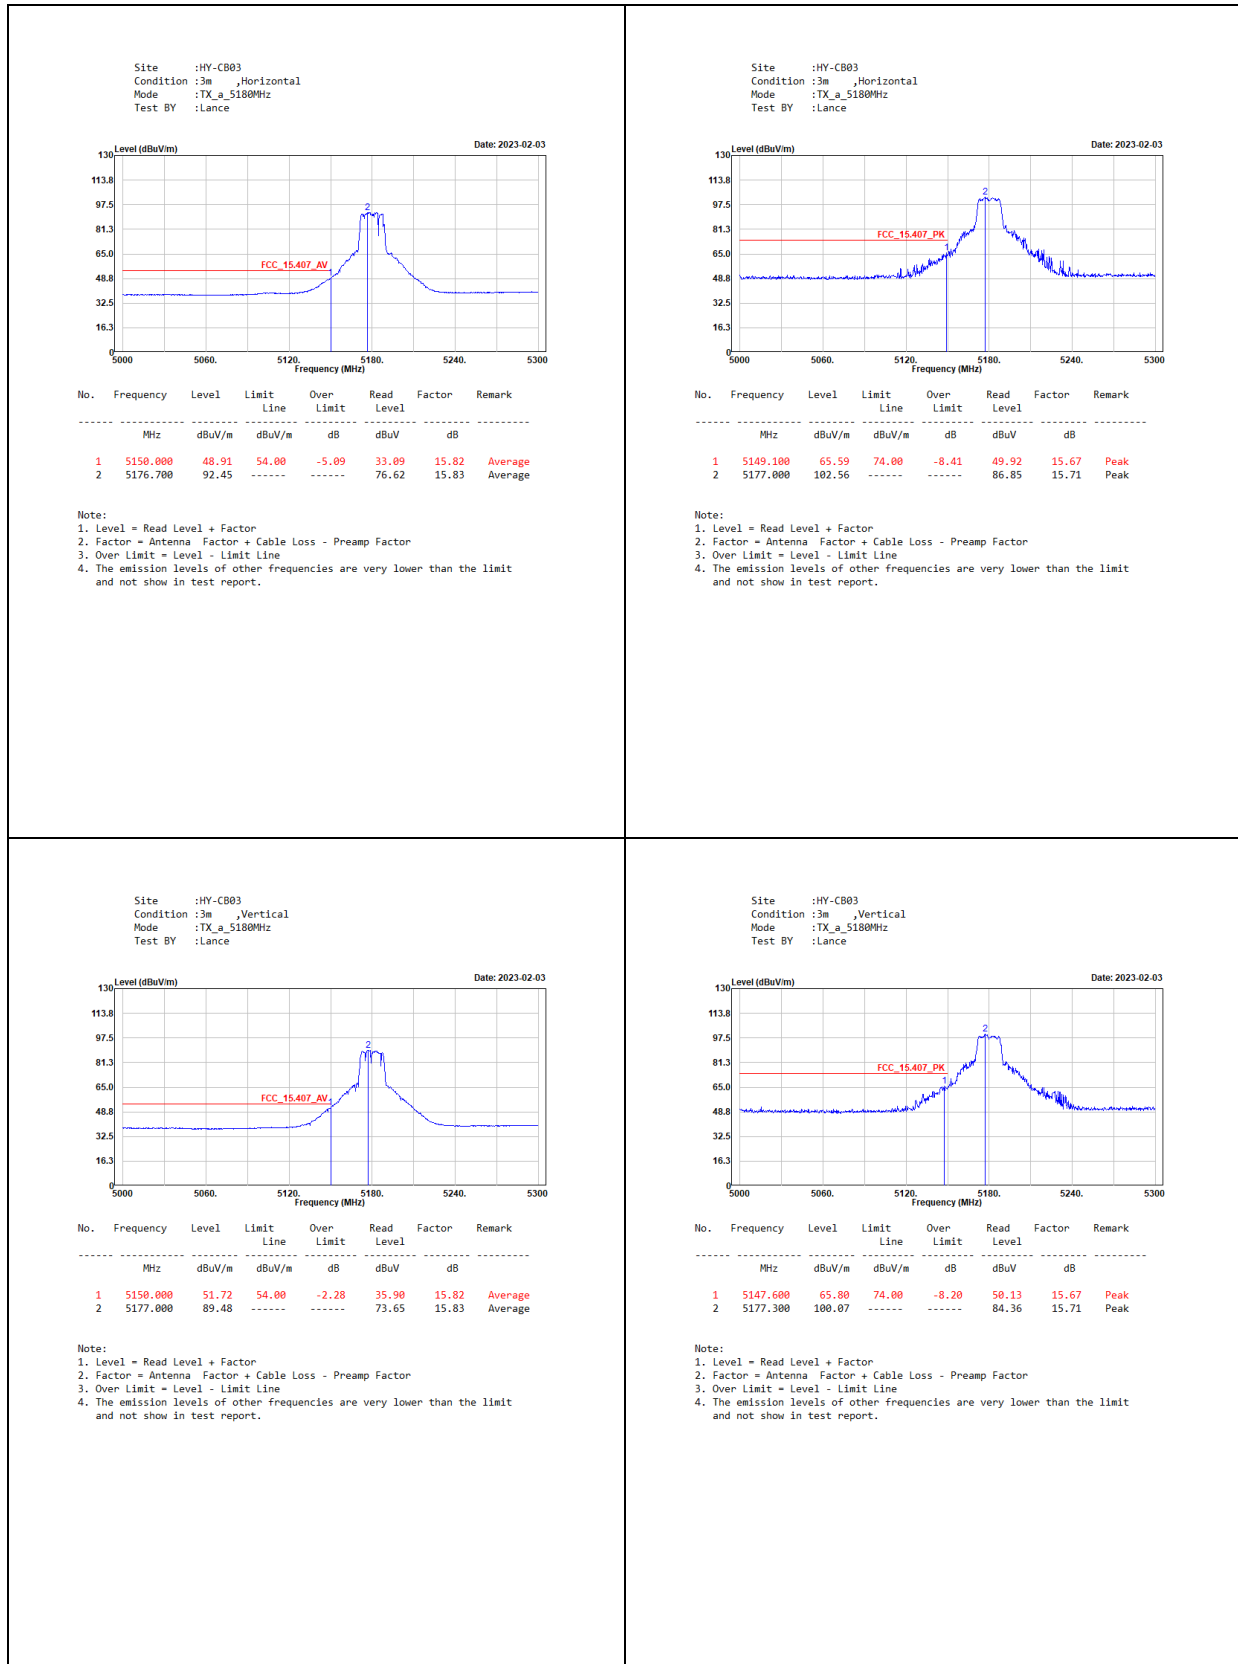


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5745MHz
Test BY :Lance

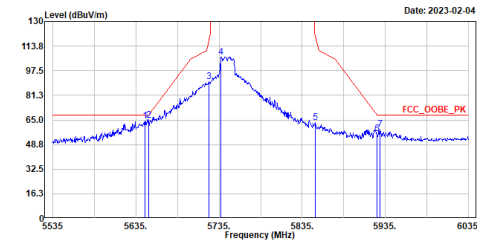

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5646.000	64.06	68.20	-4.14	46.99	17.07	Peak
2	5658.000	64.86	68.21	-3.35	47.79	17.07	Peak
3	5723.000	90.50	117.64	-27.14	73.12	17.38	Peak
4	5737.500	106.46	-----	-----	89.04	17.42	Peak
5	5850.500	63.17	121.06	-57.89	45.57	17.60	Peak
6	5925.000	55.81	68.21	-12.40	38.13	17.68	Peak
7	5928.500	58.93	68.20	-9.27	41.26	17.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5745MHz
Test BY :Lance

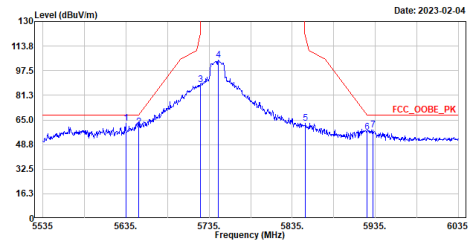

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5635.000	62.60	68.20	-5.60	45.56	17.04	Peak
2	5658.000	60.23	68.21	-7.98	43.16	17.07	Peak
3	5725.000	88.30	122.20	-33.90	70.92	17.38	Peak
4	5746.500	104.25	-----	-----	86.80	17.45	Peak
5	5851.000	63.03	119.92	-56.89	45.43	17.60	Peak
6	5925.000	56.77	68.21	-11.44	39.09	17.68	Peak
7	5932.000	58.28	68.20	-9.92	40.61	17.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5825MHz
Test BY :Lance

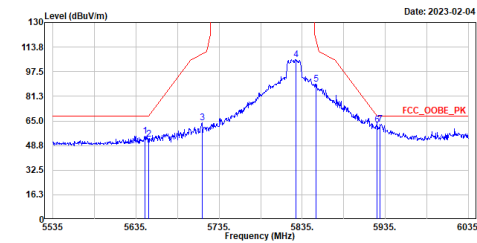

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5645.500	55.18	68.20	-13.02	38.12	17.06	Peak
2	5658.000	52.83	68.21	-15.38	35.76	17.07	Peak
3	5714.500	63.59	109.26	-45.67	46.24	17.35	Peak
4	5827.500	105.46	-----	-----	87.81	17.65	Peak
5	5851.500	89.07	118.78	-29.71	71.47	17.60	Peak
6	5925.000	62.16	68.21	-6.05	44.48	17.68	Peak
7	5929.000	62.62	68.20	-5.58	44.95	17.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5825MHz
Test BY :Lance

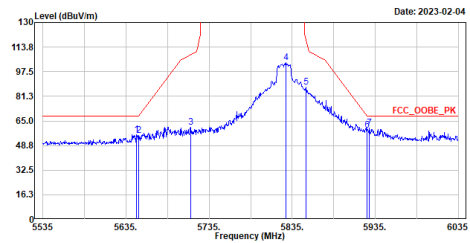

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5647.500	56.12	68.20	-12.08	39.06	17.06	Peak
2	5658.000	55.22	68.21	-12.99	38.15	17.07	Peak
3	5713.000	60.77	108.84	-48.07	43.43	17.34	Peak
4	5827.500	103.46	-----	-----	85.81	17.65	Peak
5	5851.500	87.47	118.78	-31.31	69.87	17.60	Peak
6	5925.000	59.01	68.21	-9.20	41.33	17.68	Peak
7	5928.000	60.11	68.20	-8.09	42.44	17.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
Test BY :Lance

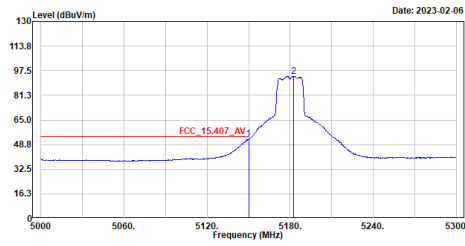


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	52.56	54.00	-1.44	36.74	15.82	Average
2	5182.700	93.78	-----	-----	77.97	15.81	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
Test BY :Lance

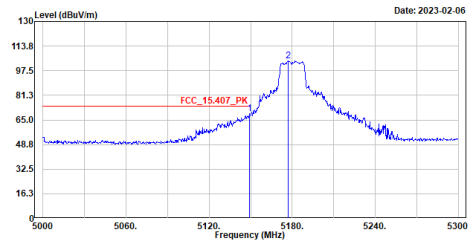


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.400	69.36	74.00	-4.64	53.55	15.81	Peak
2	5177.300	104.06	-----	-----	88.23	15.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
Test BY :Lance

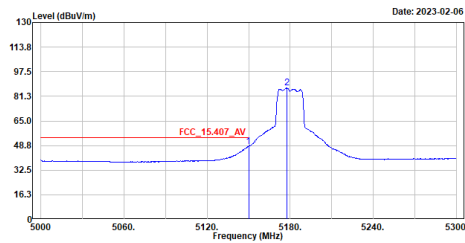


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5150.000	48.29	54.00	-5.71	32.47	15.82	Average
2	5177.600	86.72	-----	-----	70.90	15.82	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
Test BY :Lance

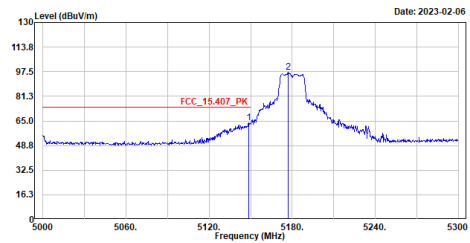


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5148.500	63.62	74.00	-10.38	47.82	15.80	Peak
2	5177.000	97.19	-----	-----	81.36	15.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

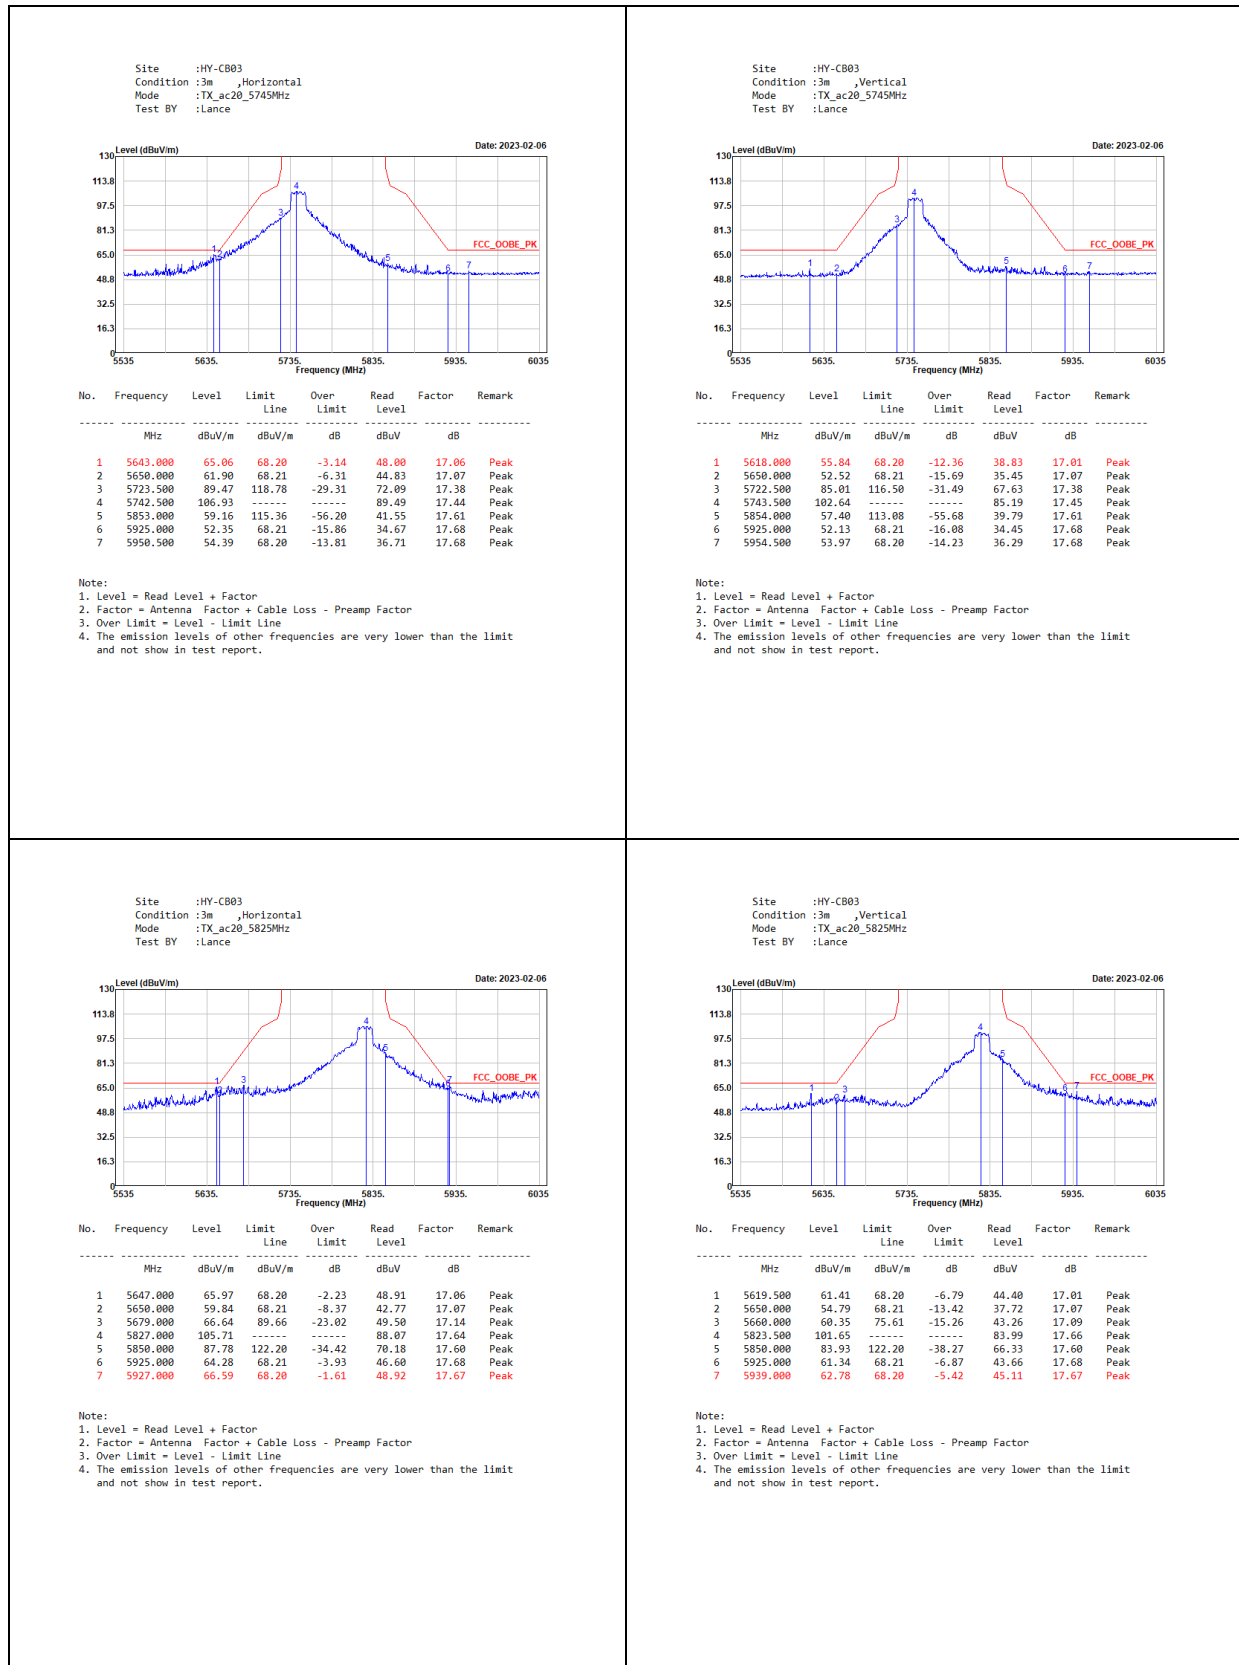

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5190MHz
Test BY :Ashton

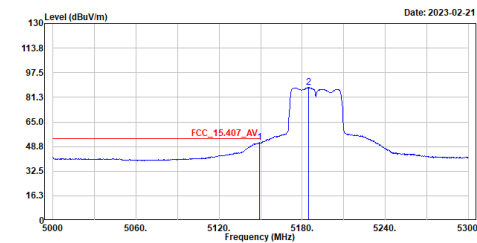


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.400	51.34	54.00	-2.66	35.53	15.81	Average
2	5184.800	87.71	-----	-----	71.89	15.82	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5190MHz
Test BY :Ashton

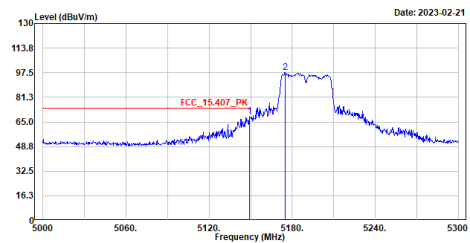


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5149.100	68.57	74.00	-5.43	52.77	15.80	Peak
2	5174.900	97.63	-----	-----	81.80	15.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
Test BY :Ashton

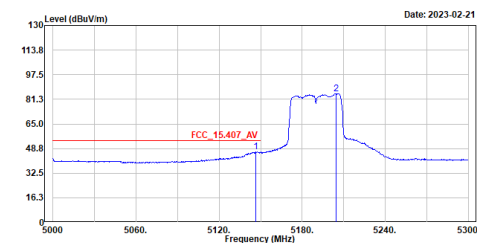


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5146.700	46.57	54.00	-7.43	30.76	15.81	Average
2	5204.300	85.04	-----	-----	69.25	15.79	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
Test BY :Ashton

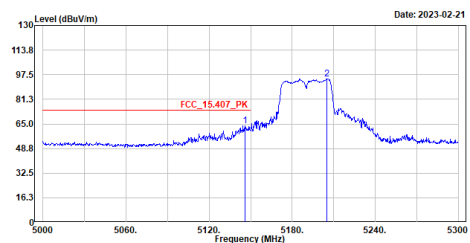


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5146.100	63.68	74.00	-10.32	47.87	15.81	Peak
2	5205.200	94.70	-----	-----	78.91	15.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

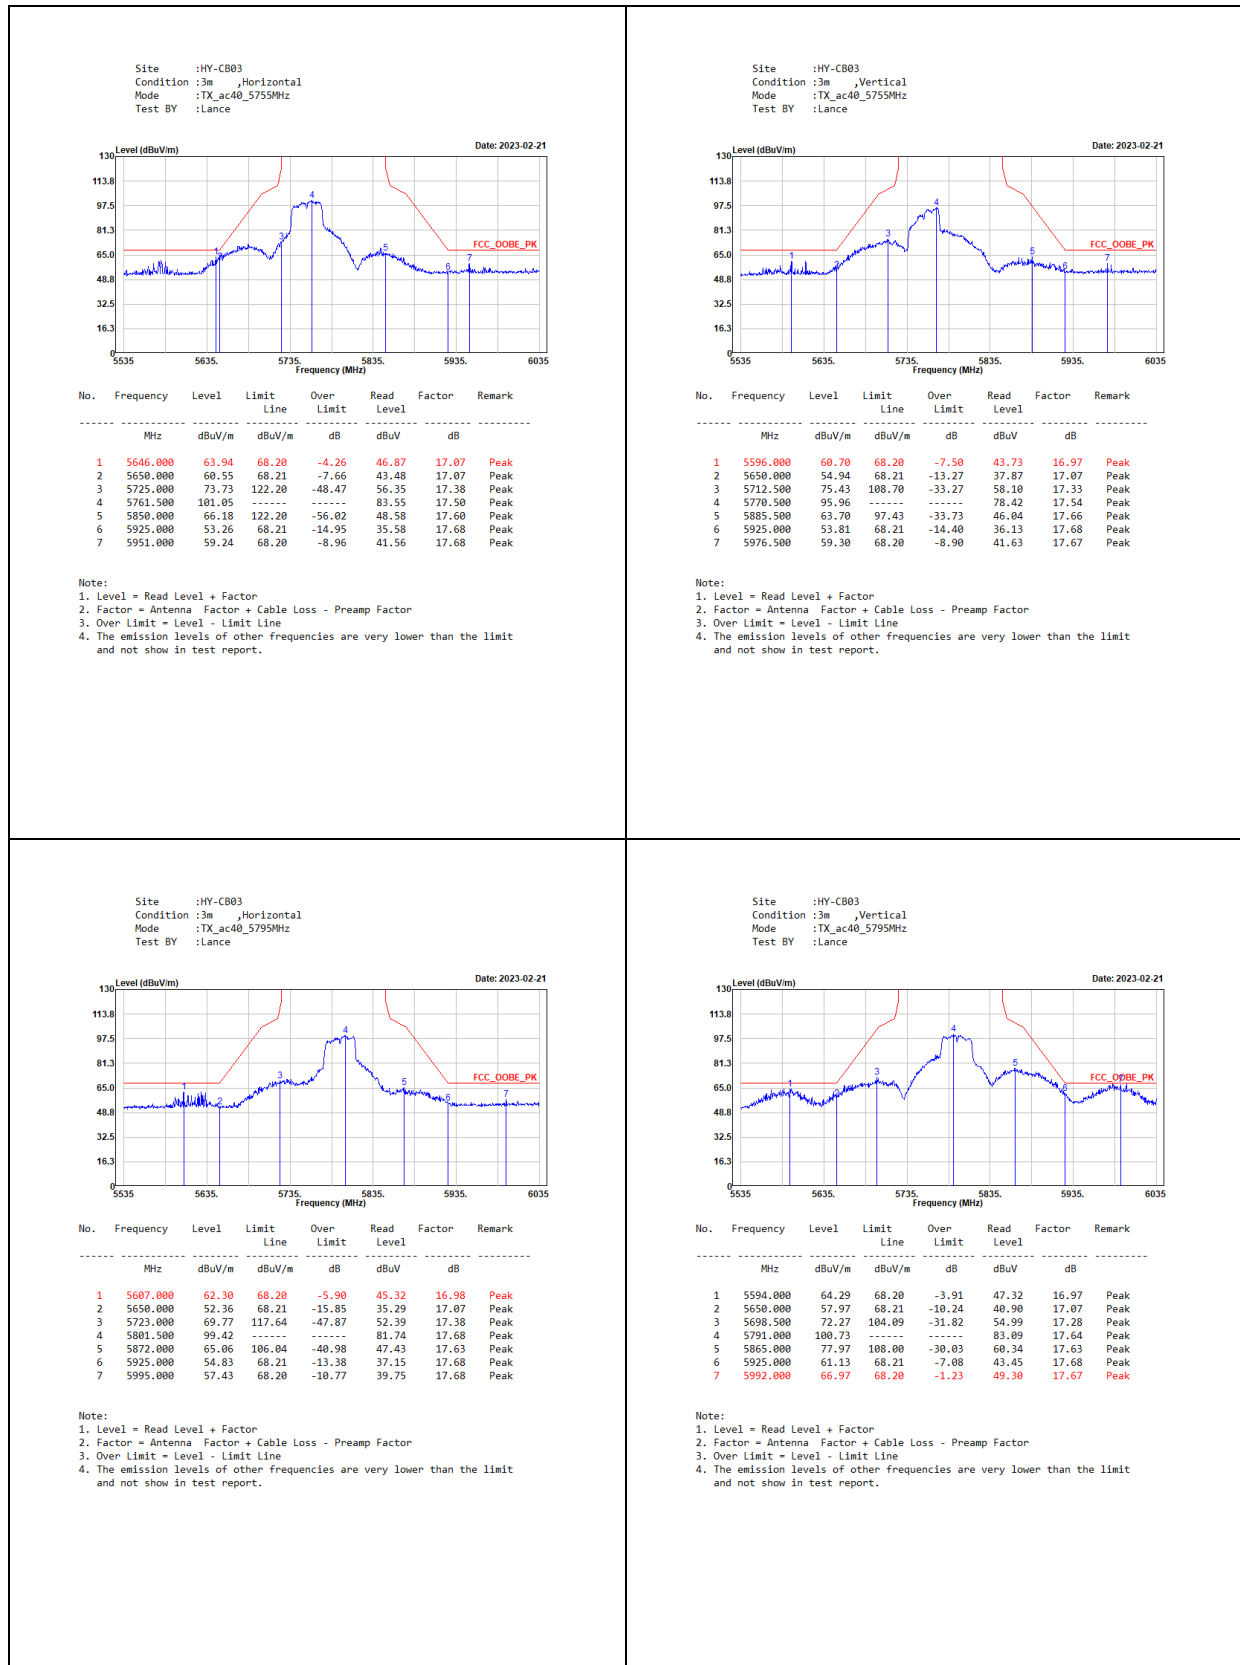

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test BY :Lance

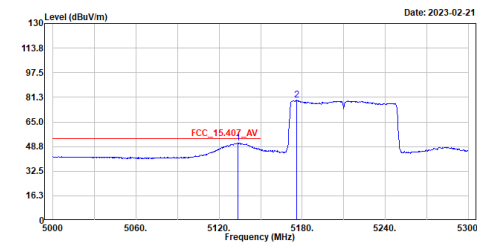


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5133.800	51.26	54.00	-2.74	35.47	15.79	Average
2	5175.800	79.28	-----	-----	63.45	15.83	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test BY :Lance

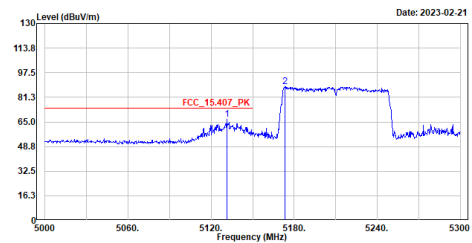


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5131.400	66.81	74.00	-7.19	51.02	15.79	Peak
2	5173.400	88.44	-----	-----	72.61	15.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Lance

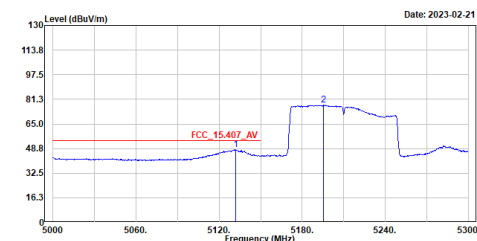


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5132.000	48.09	54.00	-5.91	32.29	15.80	Average
2	5195.600	77.58	-----	-----	61.76	15.82	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Lance

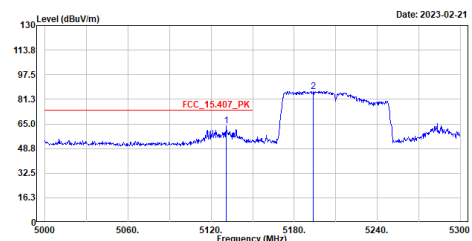


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5130.800	63.87	74.00	-10.13	48.08	15.79	Peak
2	5193.800	86.45	-----	-----	70.64	15.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5775MHz
Test BY :Lance

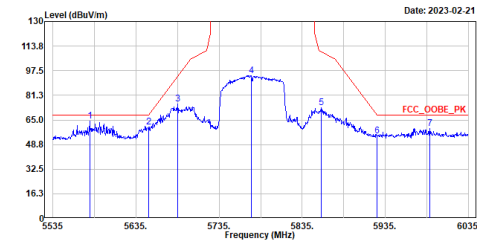


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5579.500	64.21	68.20	-3.99	47.33	16.88	Peak
2	5650.000	60.44	68.21	-7.77	43.37	17.07	Peak
3	5685.500	75.30	94.47	-19.17	58.10	17.20	Peak
4	5773.500	94.41	-----	-----	76.84	17.57	Peak
5	5858.000	72.88	109.96	-37.08	55.26	17.62	Peak
6	5925.000	54.55	68.21	-13.66	36.87	17.68	Peak
7	5989.000	59.35	68.20	-8.85	41.67	17.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
Test BY :Lance

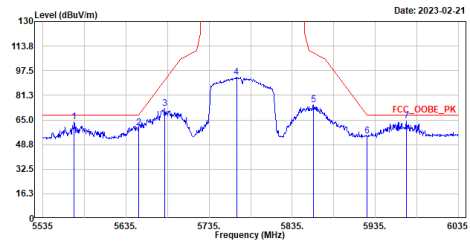


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5572.500	63.55	68.20	-4.65	46.73	16.82	Peak
2	5650.000	59.81	68.21	-8.40	42.74	17.07	Peak
3	5682.000	72.58	91.88	-19.30	55.42	17.16	Peak
4	5768.000	93.02	-----	-----	75.48	17.54	Peak
5	5861.000	75.27	109.12	-33.85	57.65	17.62	Peak
6	5925.000	54.61	68.21	-13.60	36.93	17.68	Peak
7	5972.500	64.02	68.20	-4.18	46.35	17.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

5. Duty Cycle

5.1. Test Setup

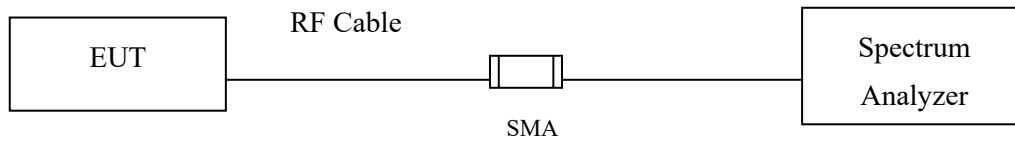

5.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to U-NII test procedure of KDB789033 for compliance to FCC 47CFR 15.407 requirements.

5.3. Test Result of Duty Cycle

Product : Host-based multiradio modules with WiFi, Bluetooth and NFC
Test Item : Duty Cycle
Test Mode : Transmit

Duty Cycle Formula:


Duty Cycle = $Ton / (Ton + Toff)$

Duty Factor = $10 \text{ Log } (1/\text{Duty Cycle})$

Results:


5 GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11 a	2.1000	5.2200	40.23	3.95
802.11 ac20	1.9600	5.1600	37.98	4.20
802.11 ac40	0.9600	5.1600	18.60	7.30
802.11 ac80	0.4400	5.1400	8.56	10.68

802.11a

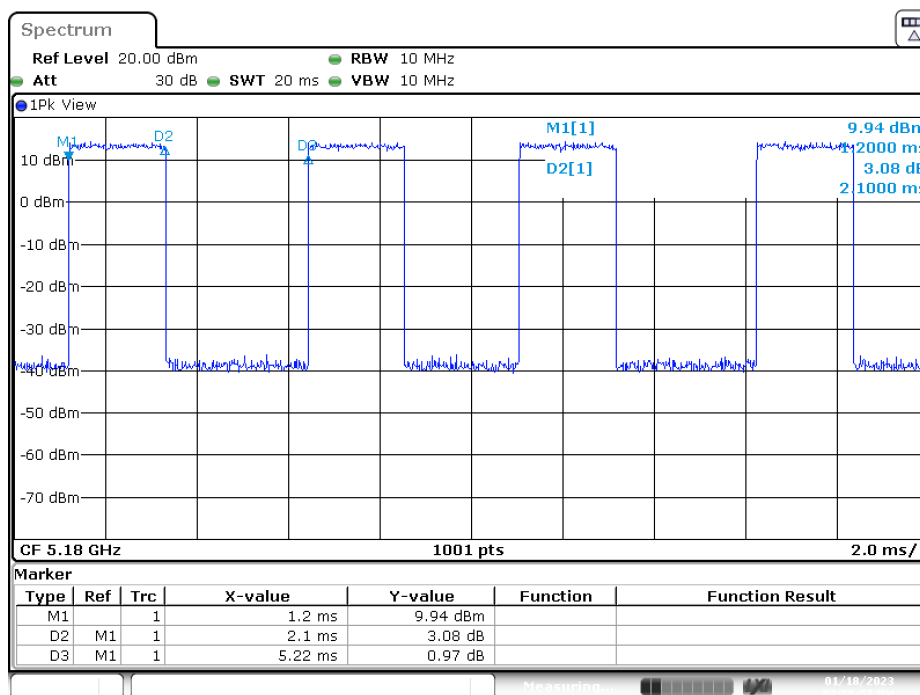


Date: 18.JAN.2023 14:58:57

802.11ac20

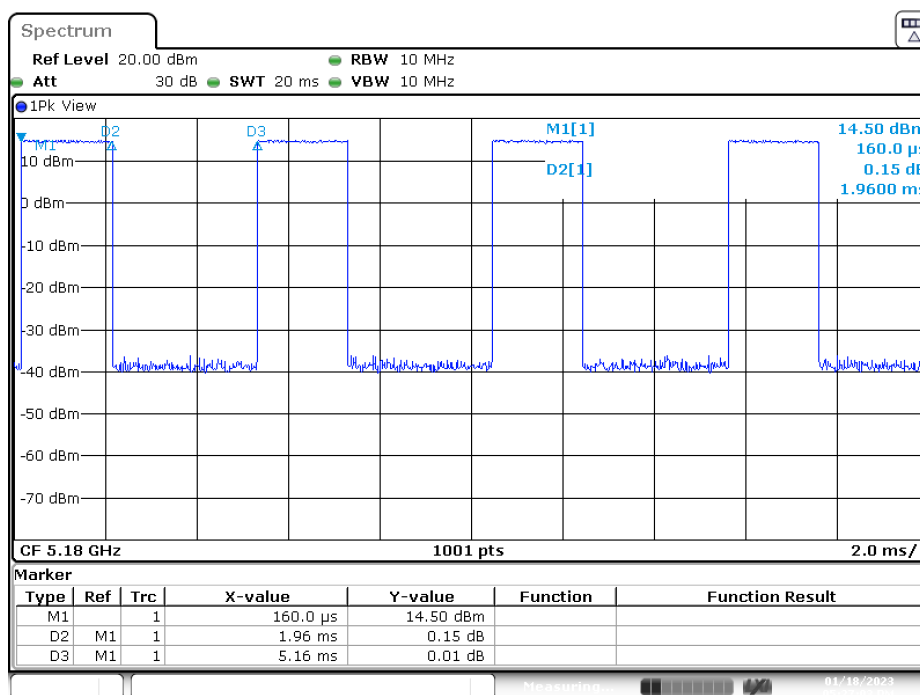


Date: 18.JAN.2023 17:27:04

802.11ac40

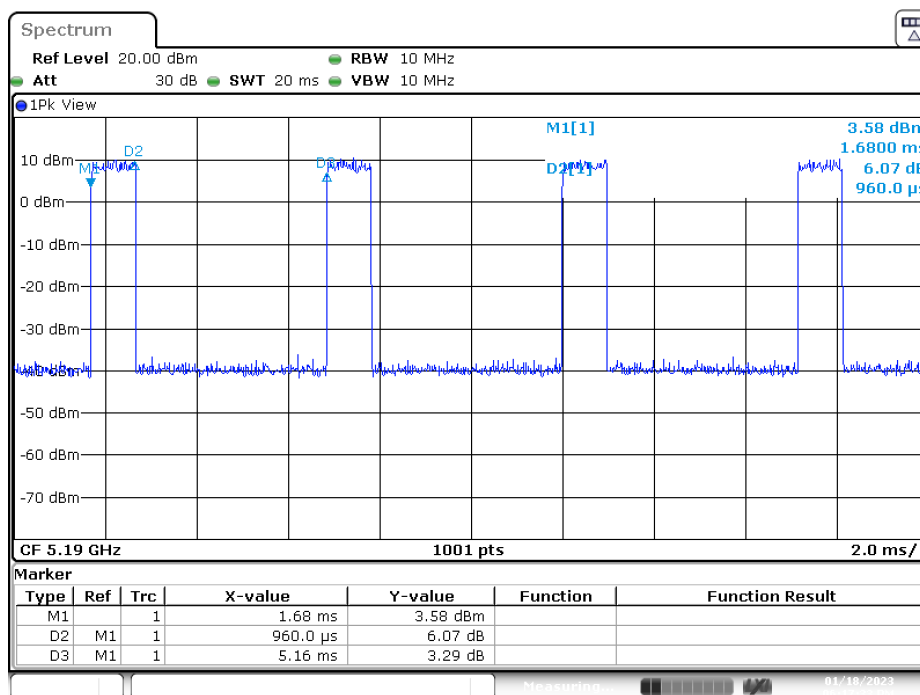

Date: 18. JAN.2023 18:17:33


802.11ac80

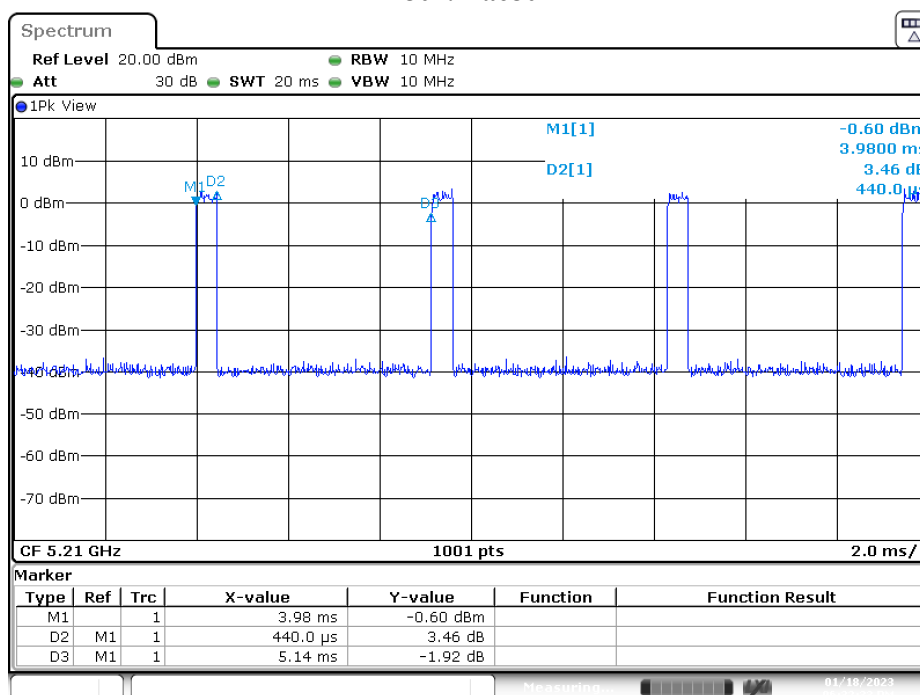


Date: 18. JAN.2023 18:32:34

Appendix 1: EUT Test Setup Photographs

Radiated Test

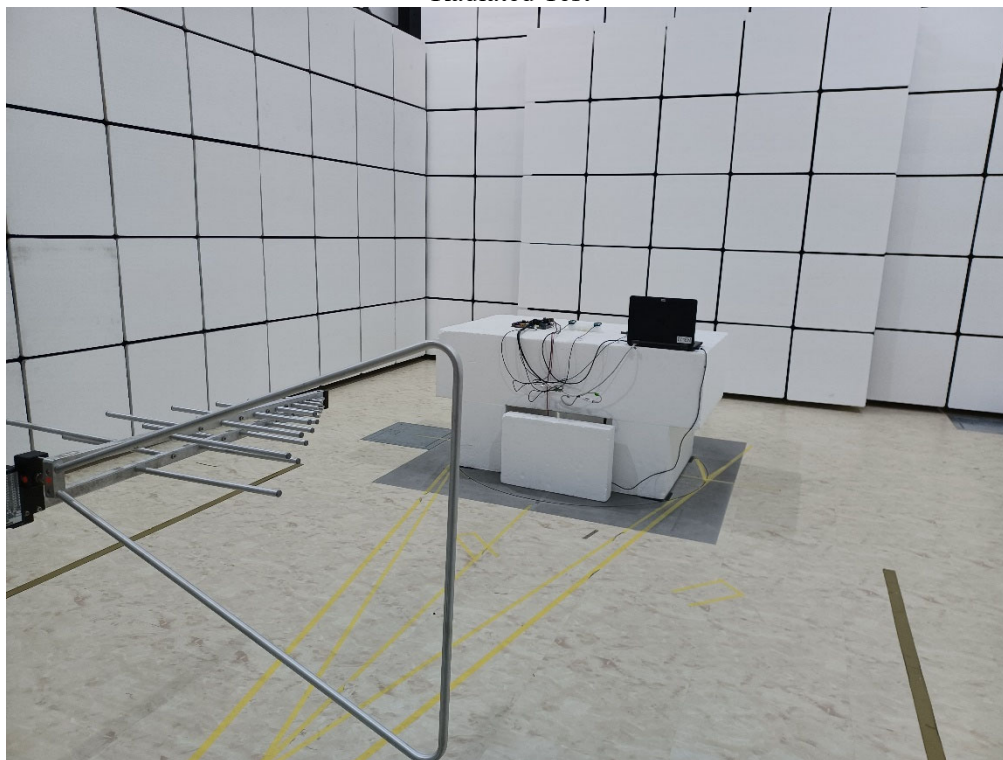

Radiated Test (Horn)

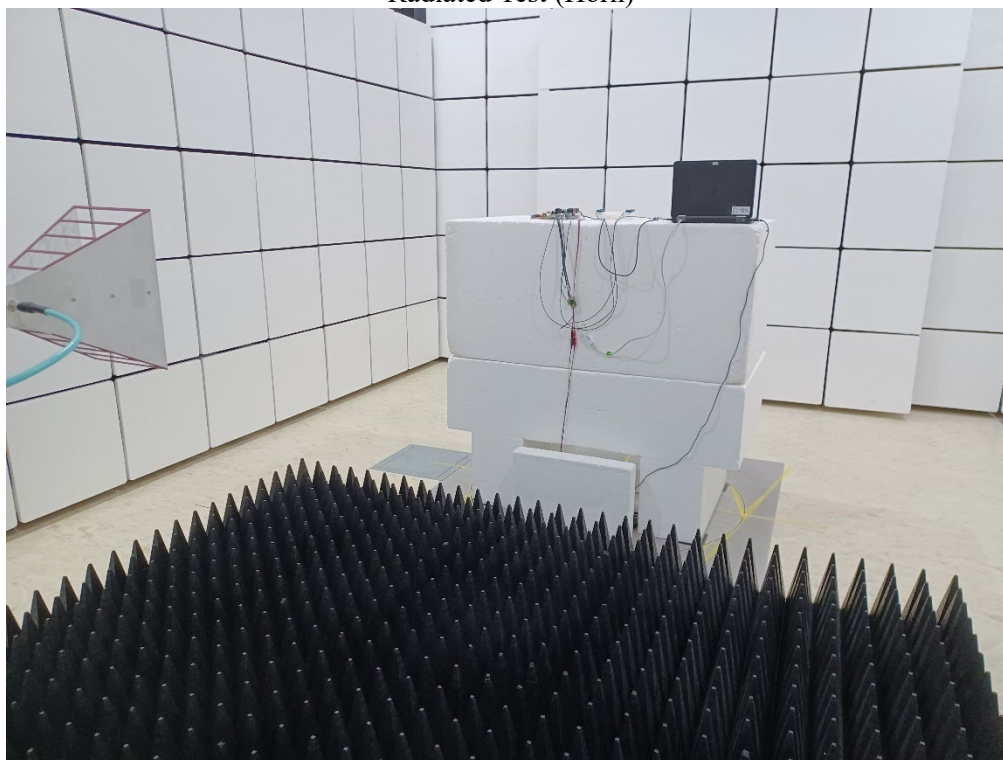

Radiated Test (Horn)

