

6MHz CW

Frequency: 6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 6$ MHz; $\sigma = 0.779$ S/m; $\epsilon_r = 49.936$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1544; Calibrated: 3/19/2019
- Probe: EX3DV4 - SN3885; ConvF(18.2, 18.2, 18.2) @ 6 MHz; Calibrated: 9/18/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI Back; Type: QDOVA002AA; Serial: TP:1248

Standalone/6MHz_CW_Edge 1_5cm/Area Scan (14x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0648 W/kg



Standalone/6MHz_CW_Edge 1_5cm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.548 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0750 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0668 W/kg

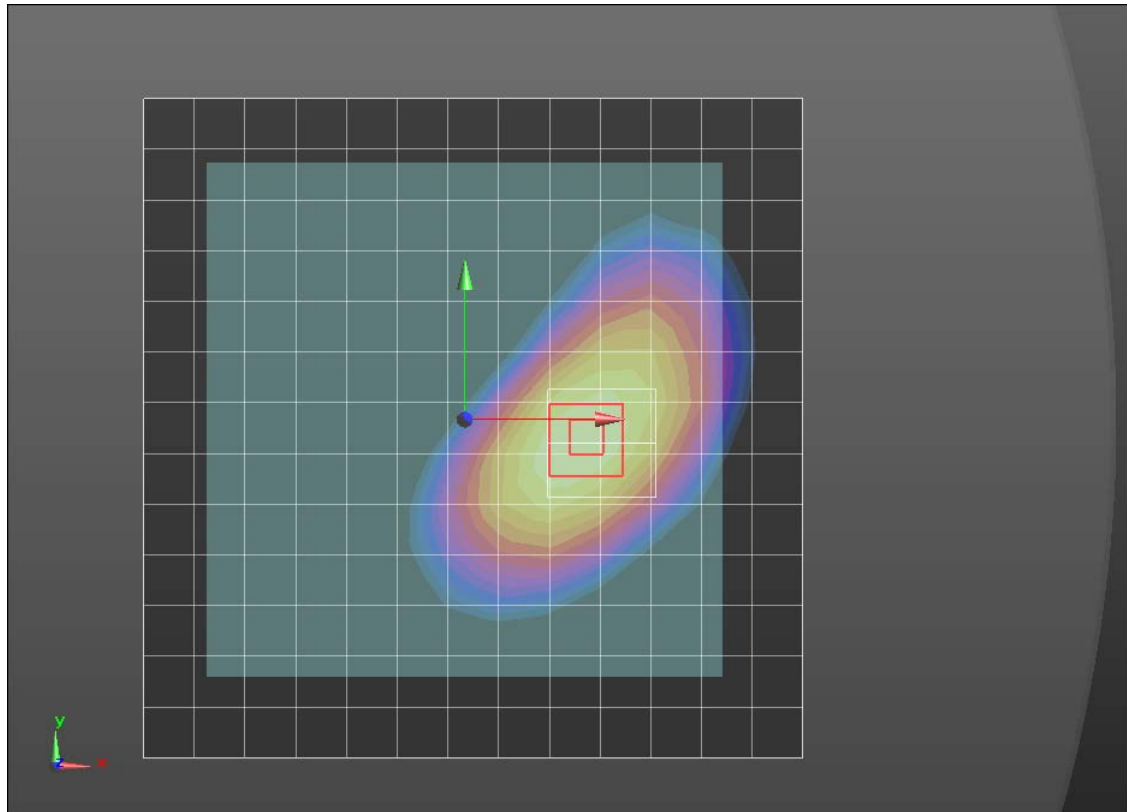

0 dB = 0.0668 W/kg = -11.75 dBW/kg

6MHz CW

Frequency: 6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 6$ MHz; $\sigma = 0.779$ S/m; $\epsilon_r = 49.936$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1544; Calibrated: 3/19/2019
- Probe: EX3DV4 - SN3885; ConvF(18.2, 18.2, 18.2) @ 6 MHz; Calibrated: 9/18/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI Back; Type: QDOVA002AA; Serial: TP:1248

Standalone/6MHz_CW_Edge 2_5cm/Area Scan (14x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0674 W/kg


Standalone/6MHz_CW_Edge 2_5cm/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.625 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0760 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0666 W/kg

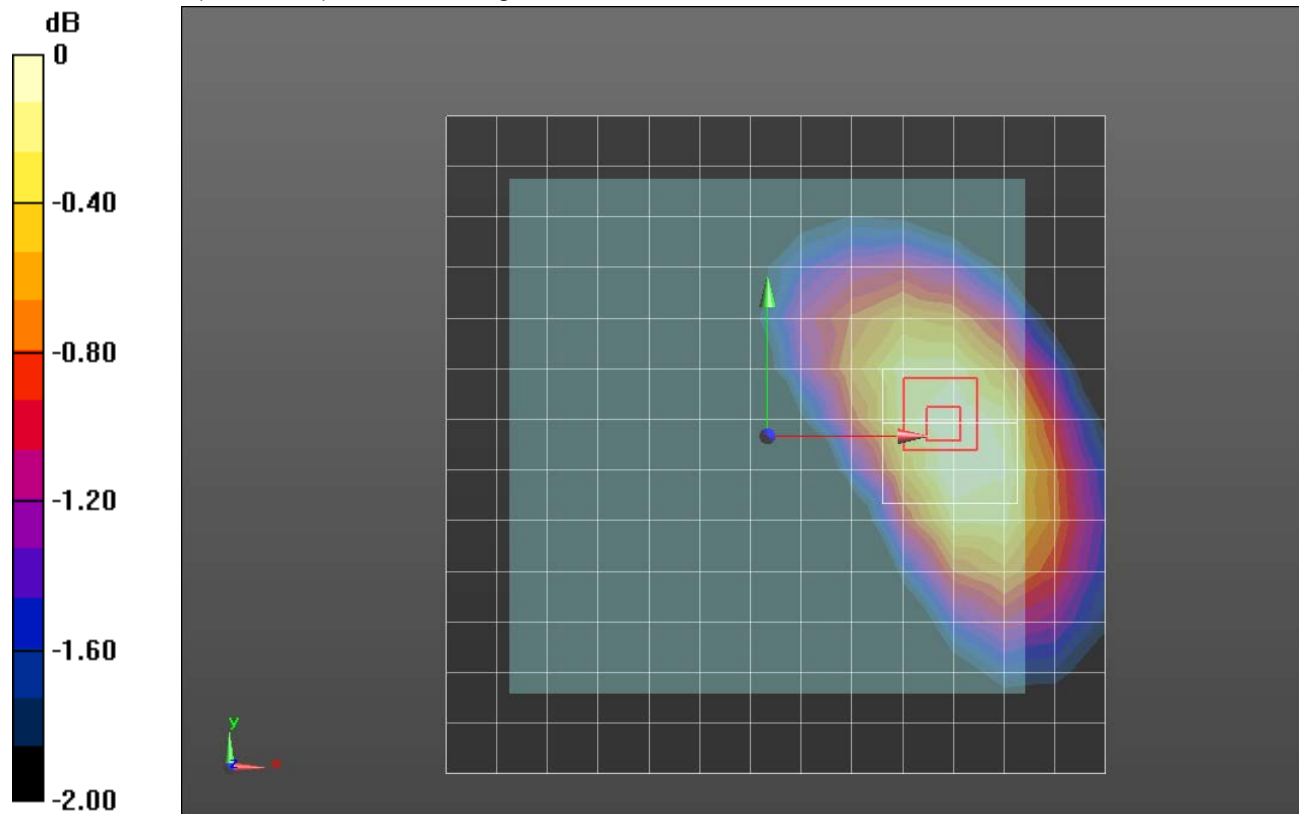

0 dB = 0.0666 W/kg = -11.77 dBW/kg

6MHz CW

Frequency: 6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 6$ MHz; $\sigma = 0.779$ S/m; $\epsilon_r = 49.936$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1544; Calibrated: 3/19/2019
- Probe: EX3DV4 - SN3885; ConvF(18.2, 18.2, 18.2) @ 6 MHz; Calibrated: 9/18/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI Back; Type: QDOVA002AA; Serial: TP:1248

Standalone/6MHz_CW_Edge 3_5cm/Area Scan (14x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0526 W/kg


Standalone/6MHz_CW_Edge 3_5cm/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.541 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0513 W/kg

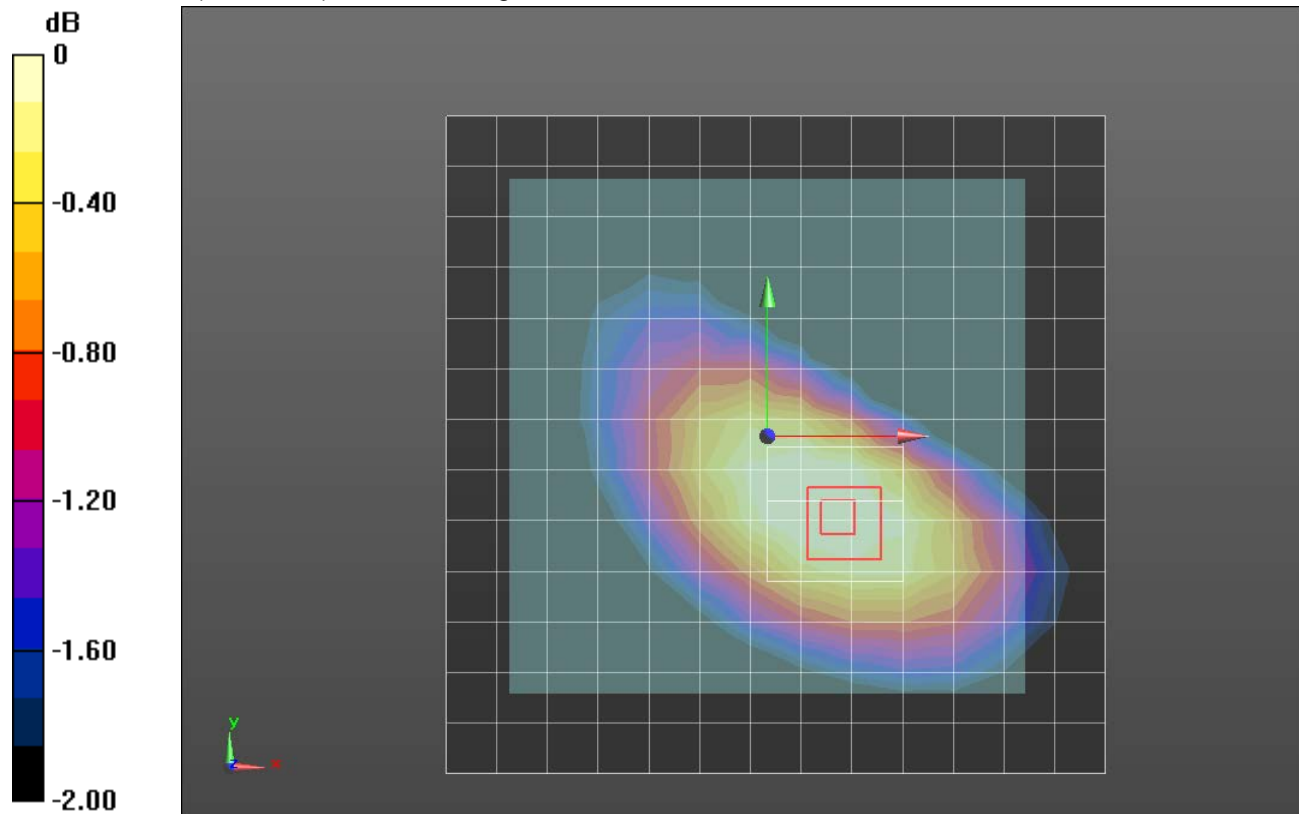

0 dB = 0.0513 W/kg = -12.90 dBW/kg

6MHz CW

Frequency: 6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 6$ MHz; $\sigma = 0.779$ S/m; $\epsilon_r = 49.936$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1544; Calibrated: 3/19/2019
- Probe: EX3DV4 - SN3885; ConvF(18.2, 18.2, 18.2) @ 6 MHz; Calibrated: 9/18/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI Back; Type: QDOVA002AA; Serial: TP:1248

Standalone/6MHz_CW_Edge 4_5cm/Area Scan (14x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0682 W/kg


Standalone/6MHz_CW_Edge 4_5cm/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.555 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0750 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0655 W/kg

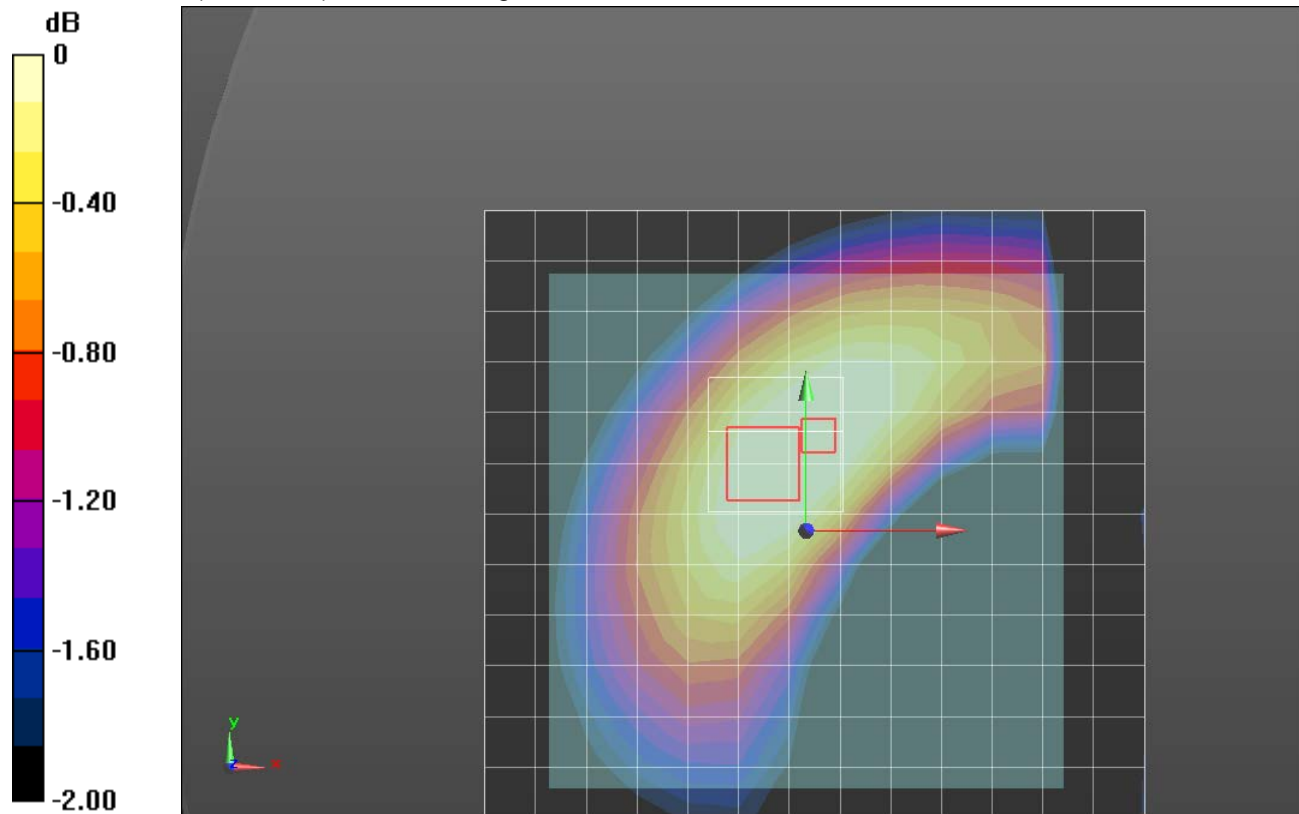

0 dB = 0.0655 W/kg = -11.84 dBW/kg

6MHz CW

Frequency: 6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 6$ MHz; $\sigma = 0.779$ S/m; $\epsilon_r = 49.936$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1544; Calibrated: 3/19/2019
- Probe: EX3DV4 - SN3885; ConvF(18.2, 18.2, 18.2) @ 6 MHz; Calibrated: 9/18/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI Back; Type: QDOVA002AA; Serial: TP:1248

Standalone/6MHz_CW_Edge 4_5cm w/ MB-1 Receiver/Area Scan (18x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0646 W/kg

Standalone/6MHz_CW_Edge 4_5cm w/ MB-1 Receiver/Zoom Scan (8x7x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.494 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0549 W/kg

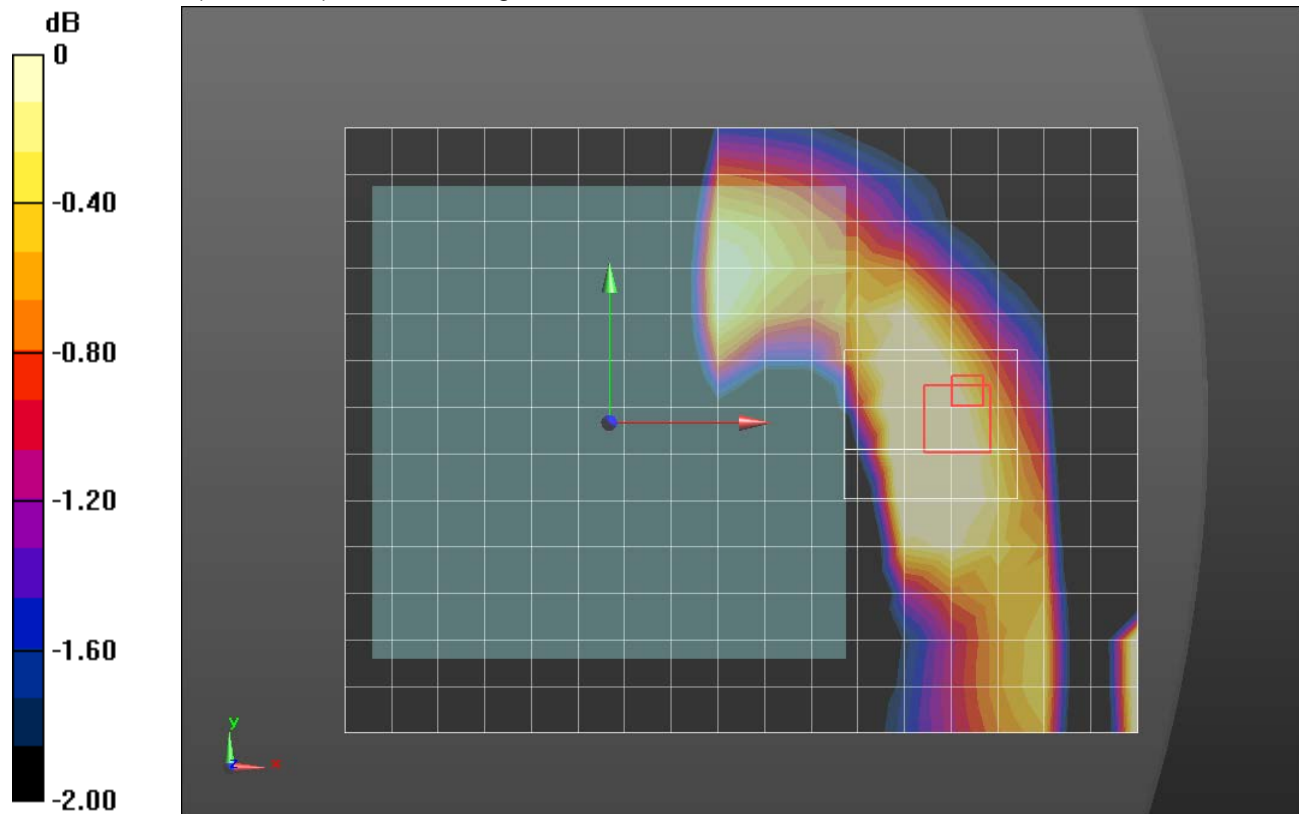

0 dB = 0.0549 W/kg = -12.60 dBW/kg