

RF Exposure Report

Report No.: AGC11758240501FH01

FCC ID : 2A482-W536

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Wireless Charger

BRAND NAME: baseus

MODEL NAME : BSW-536

APPLICANT: Shenzhen Baseus Technology Co., Ltd.

DATE OF ISSUE : May 31, 2024

STANDARD(S) : DB 680106 D01 Wireless Power Transfer v04

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 13

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 31, 2024	Valid	Initial Release







Table of Contents

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
3. Test Environment	
3.1 Address of The Test Laboratory	6
3.2 Test Facility	
3.3 Environmental Conditions	7
3.4 Measurement Uncertainty	7
3.5 List of Equipment Used	
4. Equipment Used in Tested System	8
5. Description of Test Modes	8
6. RF Exposure Measurement	
6.1 Refer Evaluation Method	9
6.2 Measurement Limits	9
6.3 Measurement Setup	
6.4 Measurement Procedure	
6.5 Measurement Results	12
Appendix I: Photographs of Test Setup	13





1. General Information

]			
Applicant	Shenzhen Baseus Technology Co., Ltd.			
Address	2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China			
Manufacturer	Shenzhen Baseus Technology Co., Ltd.			
Address	2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China			
Factory	N/A			
Address	N/A			
Product Designation	Wireless Charger			
Brand Name	baseus			
Test Model	BSW-536			
Series Model(s)	N/A			
Difference Description	N/A			
Date of receipt of test item	May 08, 2024			
Date of Test	May 08, 2024 to May 31, 2024			
Deviation from Standard	No any deviation from the test method			
Condition of Test Sample	Normal			
Test Result	Pass			
Test Report Form No	AGCER-FCC-RF Exposure (WPT)-V1			

The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jack Gai	
	Jack Gui (Project Engineer)	May 31, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	May 31, 2024
Approved By	Max Zhang	
-	Max Zhang (Authorized Officer)	May 31, 2024



Page 5 of 13

2. Product Information

2.1 Product Technical Description

Equipment Specification	WPT
Operation Frequency	WPT 1: 115kHz-205kHz WPT 2: 115kHz-205kHz; 360kHz±5kHz
Hardware Version	V1.0
Software Version	V1.0
Modulation Type	ASK
Field Strength of Fundamental	66.67dBuV/m@3m (Max)
Antenna Designation	Coil Antenna
Input Rating	DC 9V 3A
Wireless Charging Power	WPT 1: Wireless Output for TWS: 2.5W/5W Max WPT 2: Wireless Output for phone: 5W/7.5W/15W Max
Adapter Information	N/A



Page 6 of 13

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to FOLLOW CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 7 of 13

3.3 Environmental Conditions

	Normal Conditions
Temperature range (℃)	15 - 35
Relative humidity range	20% - 75%
Pressure range (kPa)	86 - 106
Power supply	

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
E-Field Strength(0.003-0.4MHz)	±1.5dB
E-Field Strength(0.4-10MHz)	±1.3dB
B-Field (0.003-0.4MHz)	±1.3dB
B-Field (0.4-10MHz)	±1.2dB

3.5 List of Equipment Used

	Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	\boxtimes	AGC-RF-011	Broadband Field Meter	WAVECONTROL	SMP2	19SN1101	2023-02-24	2025-02-23
Ī	\boxtimes	AGC-RF-012	Probe FHP	WAVECONTROL	WP400	19WP100558	2023-02-24	2025-02-23



Page 8 of 13

4. Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

Z restricted come remaining and and a						
	No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
	1	Wireless Charging Load	N/A	HUAWEI	Support 5W,7.5W,10W,15W	
	2	Adapter	HW-200440C 00	HUAWEI	Input(AC):100V-240V 50/60Hz 2.4A Output(DC):USB-C(5V/3A;9V/3A;10V/4 A;11V/6A;12V/3A;15V/3A;20V4.4A) USB-A(5V/2A;10V/4A;11V/6A;20V/4.4A)	

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Wireless Charger	BSW-536	Shenzhen Baseus Technology Co., Ltd.		

5. Description of Test Modes

NO.	Test Mode Description	Exposure Conditions				
1	AC/DC Adapter Input 9V 3A + EUT + WPT1 load+ WPT2 load (Full load)	Mobile				
2	AC/DC Adapter Input 9V 3A + EUT + WPT1 load+ WPT2 load (Half load)	Mobile				
3	3 AC/DC Adapter Input 9V 3A + EUT + WPT1 load+ WPT2 load (Null load) Mobile					
Note: All test modes were pre-tested, but we only recorded the worst case in this report.						

Report No.: AGC11758240501FH01 Page 9 of 13

6. RF Exposure Measurement

6.1 Refer Evaluation Method

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

FCC KDB publication KDB680106 D01 RF Exposure Wireless Charging Apps v04: RF Exposure

Considerations for Low Power Consumer Wireless Power Transfer Applications

FCC CFR 47 part1 1.1310: Radiofrequency radiation exposure limits.

FCC CFR 47 part2 2.1091: Radiofrequency radiation exposure evaluation: mobile devices.

FCC CFR 47 part 18.107: Indusial, Scientific, and Medical Equipment.

6.2 Measurement Limits

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency	Electric Field	Magnetic Field	Power Density	Averaging Time		
Range(MHz)	Strength(V/m)	Strength(A/m)	(mW/cm²)	(minute)		
	Limits for Occupational/Controlled Exposure					
0.3-3.0	614	1.63	*100	6		
3.0-30	1842/f	4.89/f	*900/f²	6		
30-300	61.4	0.163	1.0	6		
300-1,500	/	/	f/300	6		
1,500-100,000	/	/	5	6		

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency	Electric Field	Magnetic Field	Power Density	Averaging Time		
Range(MHz)	Strength(V/m)	Strength(A/m)	(mW/cm²)	(minute)		
Limits for General Population/Uncontrolled Exposure						
0.3-1.34	614	1.63	*100	30		
1.34-30	824/f	2.19/f	*180/f²	30		
30-300	27.5	0.073	0.2	30		
300-1,500	/	/	f/1500	30		
1,500-100,000	/	/	1.0	30		

F=frequency in MHz

According to FCC KDB 680106 D01v04 Section 3. RF Exposure Requirements clause 3.2 the Emission-Limits in the frequency range from 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of CFR 47 – Section 1.1310 as following:


	E-Field	*/*	B-Field	
Frequency	V/m	A/m	uT	
0.3 MHz – 3.0 MHz	614	1.613	2.0	
3.0 MHz – 30 MHz	824/f (=27.5 _{30MHz})	2.19/f (=0.073 _{30MHz})		

A KDB inquire was required to determine/confirm the applicable limits below 100 KHz.

^{*=}Plane-wave equivalent power density



6.3 Measurement Setup

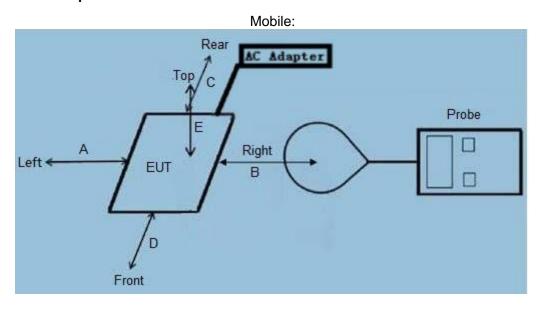

Note:

- -- RF exposure assessment tests are conducted in a shielded room.
- -- Refer to the following test method description for the test distance between the edge of the charger and the measuring probe.
- -- As shown in the above picture, the test layout is not for the real object, only the requirements of the test layout listed in the standard requirements are presented, for reference only.
- -- The actual test EUT distinguishes the test type according to the requirements as shown in the figure above.



Page 11 of 13

6.4 Measurement Procedure

6.4.1 For mobile RF exposure:

- a) The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- b) E-field and H-field measurements should be taken with the probe geometric center located 20cm around the EUT and 20cm above the top surface of the master/client pair.
- c) The highest emission level was recorded and compared with limit as soon as measurement of each point (A, B, C, D, E) were completed.
- d) The EUT were measured according to the dictates of KDB 680106 D01v04
- Equipment Approval Considerations of KDB 680106 D01v04

Requirements of KDB 680106	Description
(1) The power transfer frequency is below 1MHz.	The device operates in the frequency range 115kHz-205kHz and 360kHz±5kHz.
(2) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.	The maximum output power of the primary coil is 15W.
(3) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)	Client device is placed directly in contactwith the transmitter.
(4) Only \$2.1091-Mobile exposure conditions apply (i.e., this provision does not cover \$2.1093-Portable exposure conditions).	Device can be used in Mobile conditions.
(5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a I/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.	The EUT H-field strengths at 20cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
(6) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested.	The transfer system includes single coil that is able to detect receiver device.



Page 12 of 13

6.5 Measurement Results

Mobile devices are evaluated as follows:

WPT 1: 127.9 kHz

Operate Field	Measured H-Field Strength Values (A/m) Measured E-Field Strength Values (V/m)					FCC Limit	50%_FCC	
Mode	Strength	Position A	Position B	Position C	Position D	Position E	1 CO LITTIC	limit
Mode 1	nT	163.32	188.44	226.13	276.38	314.07		
Mode 1	A/m	0.13	0.15	0.18	0.22	0.25	1.63	0.815
Mode 1	V/m	0.667	0.652	0.658	0.684	0.679	614	307

Note: Unit conversion formula: 1ut=1.25A/m

WPT 2: 138.9 kHz

Operate Field	Measured H-Field Strength Values (A/m) Measured E-Field Strength Values (V/m)					FCC Limit	50%_FCC	
Mode	Strength	Position A	Position B	Position C	Position D	Position E	PCC LIIIII	limit
Mode 1	nT	201.01	263.82	213.57	238.69	288.94		
Mode 1	A/m	0.16	0.21	0.17	0.19	0.23	1.63	0.815
Mode 1	V/m	0.689	0.641	0.674	0.656	0.662	614	307

Note: Unit conversion formula: 1ut=1.25A/m

WPT 2: 360 kHz

Operate Field		Measured H-I Measured E-I	FCC Limit	50%_FCC				
Mode	Strength	Position A	Position B	Position C	Position D	Position E	FOO LIIIII	limit
Mode 1	nT	163.32	213.57	276.38	213.57	263.82		
Mode 1	A/m	0.13	0.17	0.22	0.17	0.21	1.63	0.815
Mode 1	V/m	0.645	0.669	0.675	0.669	0.652	614	307

Note: Unit conversion formula: 1ut=1.25A/m



Page 13 of 13

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC11758240406AP02

----End of Report----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.