

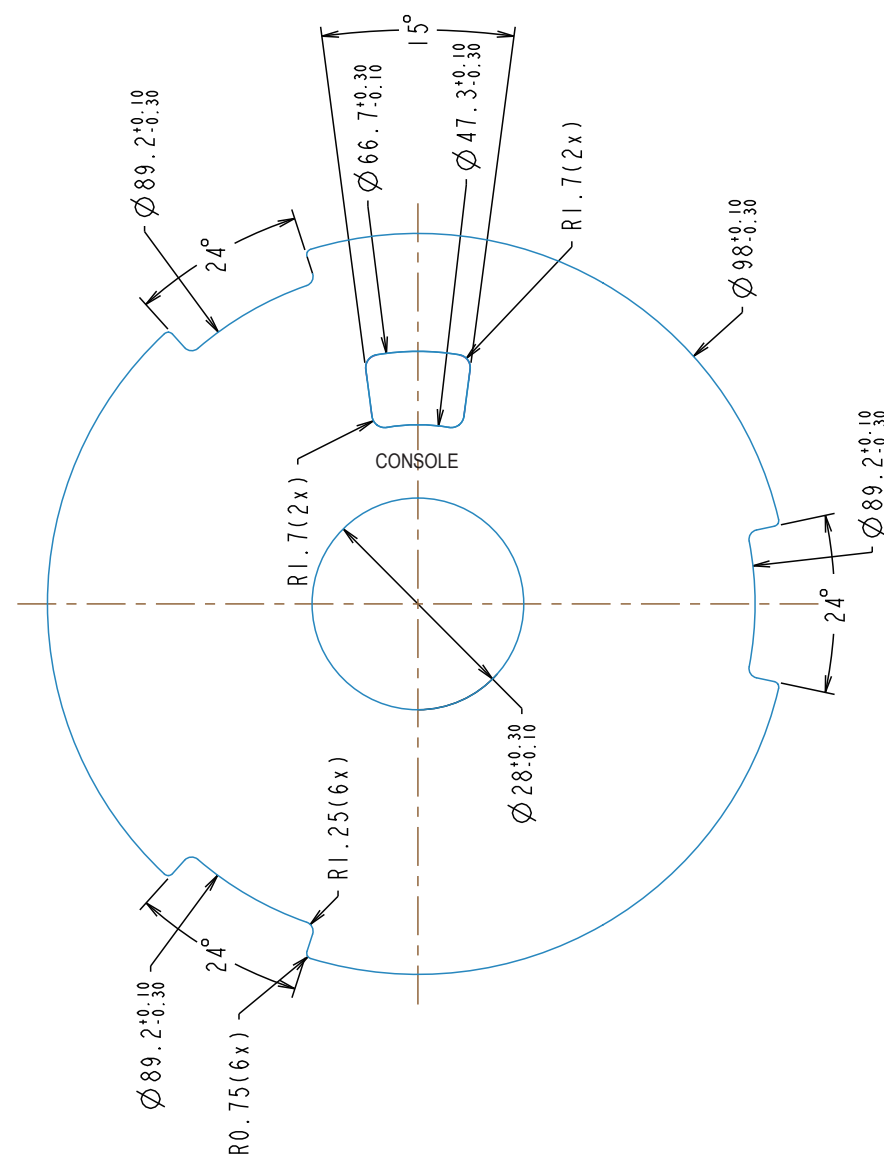


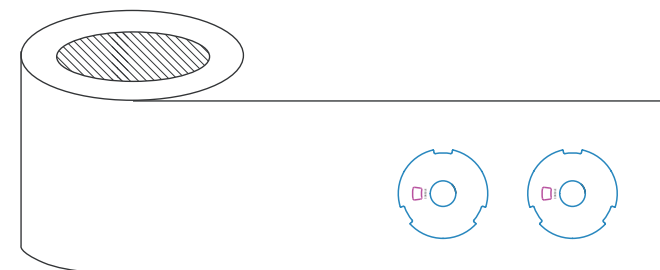


NOTE:


1. MATERIAL: WHITE MATTE PET, T=0.1
ADHESIVE: ACRYLIC 網紋背膠
2. FINISH: FINISH: ,T=0.025
3. COLOR: ORIGINAL MATERIAL COLOR
印刷: BLACK, 刀模:  斷刀線: 
4. UL APPROVED, PGJ12,PRINTED,.
- 5.被貼物:鋁件
- 6.TEMPERATURE RESISTANT= 120° C
- 7.印刷公差:尺寸30mm以下為±0.2mm,30~120mm為±0.3mm,120~315mm為±0.5mm,315以上±0.8mm
- 8.捲料出貨,離型紙左右間距各3±0.5mm, 上下間距各3±0.3mm
- 9.中間圓孔排廢
- 10.TEST REQUIREMENTS

	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

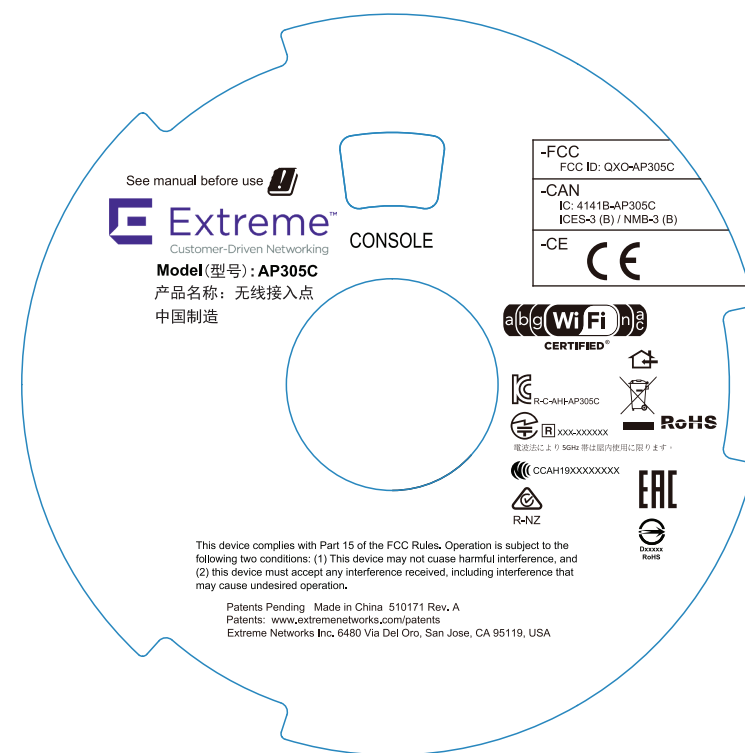

DONOTSCALEDRAWING



MODEL	AP610	NAME	Label / AEROHIVE		SCALE	1 / 1
DSN		PART. NO			SHEET	OF
CHK		MATERIAL	white PET	Q' TY	PC	REV. 1
APV					REV. DATE	
FILE					2019. 04. 23	

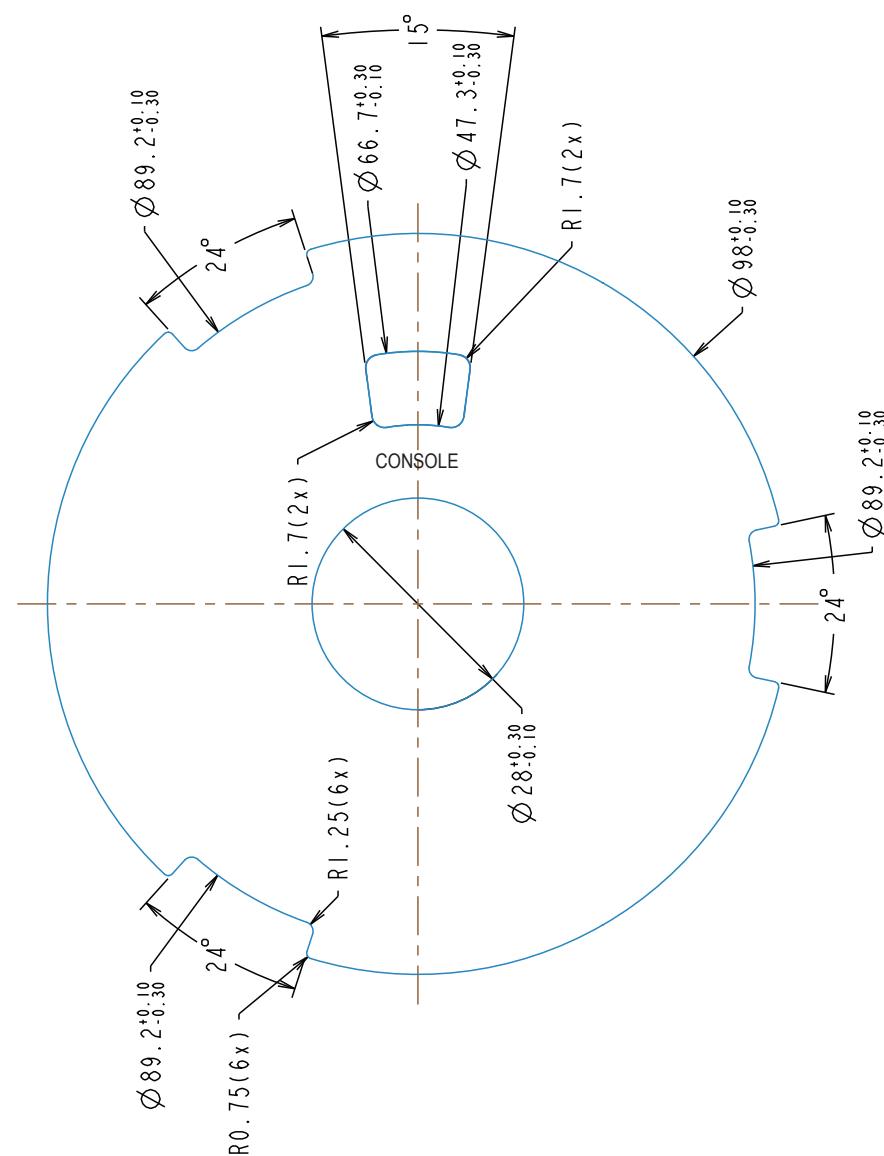


NOTE:

1. MATERIAL: WHITE MATTE PET, T=0.1
ADHESIVE: ACRYLIC 網紋背膠
2. FINISH: FINISH: ,T=0.025
3. COLOR: ORIGINAL MATERIAL COLOR
印刷: BLACK, 刀模:  斷刀線: 
4. UL APPROVED, PGJ12,PRINTED,.
- 5.被貼物:鋁件
- 6.TEMPERATURE RESISTANT= 120° C
- 7.印刷公差:尺寸30mm以下為±0.2mm,30~120mm為±0.3mm,120~315mm為±0.5mm,315以上±0.8mm
- 8.捲料出貨,離型紙左右間距各3±0.5mm, 上下間距各3±0.3mm
- 9.中間圓孔排廢
- 10.TEST REQUIREMENTS

	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

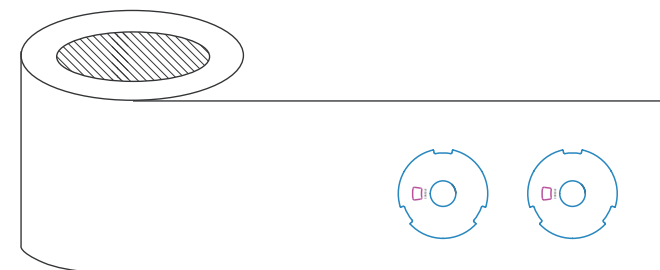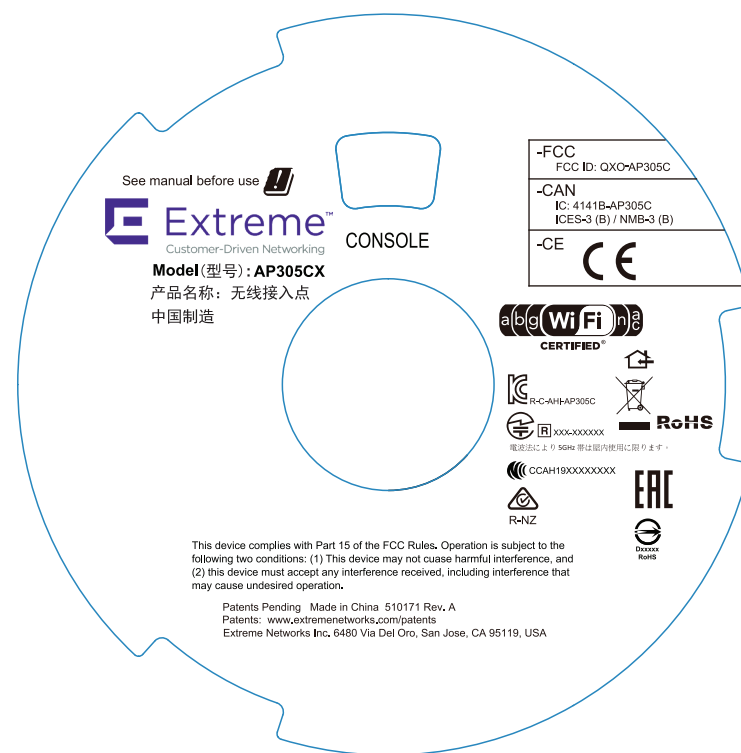

DONOTSCALEDRAWING

MODEL	AP610	NAME	Label / AEROHIVE		SCALE	1 / 1
DSN		PART. NO			SHEET	OF
CHK		MATERIAL	white PET	Q' TY	PC	REV. 1
APV					REV. DATE	
FILE					2019. 04. 23	

USED