



FCC PART 15.247

TEST REPORT

For

AKUVOX (XIAMEN) NETWORKS CO., LTD.

10/F, No.56 Guanri Road, Software Park II, Xiamen 361009, China

FCC ID: 2AHCR-A08S

Report Type: Original Report	Product Name: Access Control Terminal
Report Number:	XMDN240311-12032E-RF-03
Report Date:	2024-08-25
Reviewed By:	Ash Lin 
Approved By:	Miles Chen
Prepared By:	Bay Area Compliance Laboratories Corp. (Xiamen) Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone XiaMen Tel: +86-592-3200111 www.baclcorp.com.cn

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY.....	6
SYSTEM TEST CONFIGURATION.....	7
TEST MODE AND VOLTAGE.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
★EUT EXERCISE SOFTWARE	7
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS.....	13
TEST EQUIPMENT LIST	14
FCC §15.203 - ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	17
RESULT & MARGIN CALCULATION.....	17
TEST DATA	18
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	22
APPLICABLE STANDARD	22
EUT SETUP	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	23
TEST PROCEDURE	24
RESULT & MARGIN CALCULATION.....	24
TEST DATA	25
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	51
APPLICABLE STANDARD	51
EUT SETUP	51
TEST PROCEDURE	51
TEST DATA	51
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	54
APPLICABLE STANDARD	54
EUT SETUP	54
TEST PROCEDURE	54
TEST DATA	54
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	57
APPLICABLE STANDARD	57

EUT SETUP	57
TEST PROCEDURE	57
TEST DATA	57
FCC §15.247(e) - POWER SPECTRAL DENSITY	59
APPLICABLE STANDARD	59
EUT SETUP	59
TEST PROCEDURE	59
TEST DATA	59
EUT PHOTOGRAPHS	62
TEST SETUP PHOTOGRAPHS	63

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	XMDN240311-12032E-RF-03	R1V1	2024-08-25	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	AKUVOX (XIAMEN) NETWORKS CO., LTD.
Product Name:	Access Control Terminal
Tested Model:	A08S
Firmware version:	0000
Software version:	108.30.1.17
Power Supply:	DC 48V from PoE or DC 12V from USB port
Maximum Conducted Output Peak Power:	BLE: 9.95dBm
Frequency Range:	BLE: 2402~2480MHz
Modulation Technique:	BLE: GFSK
Antenna Type:	FPC
★Maximum Antenna Gain:	-3dBi
EUT Received Status:	Good
<i>Note:</i> 1. The Maximum Antenna Gain was declared by the manufacturer. 2. All measurement and test data in this report was gathered from production sample serial number: XMDN240311-12032E-RF-1. (Assigned by the BACL(Xiamen). The EUT supplied by the applicant was received on 2024-04-16)	

Objective

This report is prepared on behalf of *AKUVOX (XIAMEN) NETWORKS CO., LTD.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Xiamen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Xiamen) to collect test data is located on the Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone XiaMen.

Bay Area Compliance Laboratories Corp. (Xiamen) Lab is accredited to ISO/IEC 17025 by A2LA (Certificate Number: 7134.01) and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN1384.

Measurement Uncertainty

Item		U_{lab}
Conducted Emission	150kHz-30MHz	2.33 dB
Radiated Emission	9kHz-30MHz	2.59 dB
	30MHz~200MHz	4.38dB
	200MHz~1GHz	4.50dB
	1GHz~6GHz	4.58dB
	6GHz-18GHz	5.43dB
	18GHz~26.5GHz	5.47dB
Occupied Channel Bandwidth		0.053kHz
Transmitter Conducted Power(Conducted RF power)		0.624 dB
Conducted Spurious Emission		2.52 dB
Power Spectral Density		0.61dB
Duty Cycle		1%
Temperature		1°C
Humidity		5%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Test Mode and Voltage

The system was configured for testing in a typical mode (as normally used by a typical user).	
Test mode:	Transmitting
Test voltage:	DC 12V from adapter(AC 120V/60Hz) or DC 48V from PoE(AC 120V/60Hz)
Remark:	During all emission tests, the EUT was configured to measure its highest possible emission level and the worst case's test data was presented in this test report.

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

★EUT Exercise Software

RF Test Tool: EMI_Test_Tool


Mode	Power level		
	Low channel	Middle channel	High channel
BLE 1Mbps	10.5	10.5	10.5

Note: the applicant declared the power level.

Duty cycle

Test Modes	Test Frequency (MHz)	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	VBW Setting (KHz)
BLE 1Mbps	2440	100	100	100.00	10	0.01

BLE 1Mbps: Middle Channel

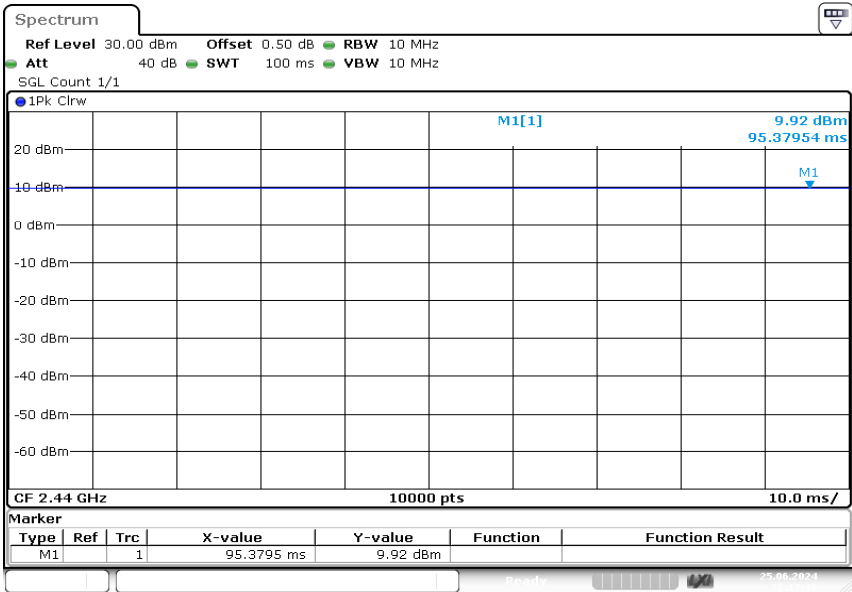

ProjectNo.:XMDN240311-12032E-RF Tester:Stein Peng
Date: 25.JUN.2024 22:13:36

Support Equipment List and Details

For Adapter

Manufacturer	Description	Model	Serial Number
SWITCHING ADAPTER	Adapter	FJ-SW126K1201000DU	Unknown
BACL	Relay Load	Unknown	Unknown
BACL	RS 485 Load	Unknown	Unknown
Unknown	Exit Button	Unknown	Unknown
Unknown	Exit Button	Unknown	Unknown
Honor	Router	WS831	W6E7S15B09001200

For PoE

Manufacturer	Description	Model	Serial Number
NETGEAR	POE	MSIP-REN-NGR-GS108Ev3	3UJD1756006EB
BACL	Relay Load	Unknown	Unknown
BACL	RS 485 Load	Unknown	Unknown
Unknown	Exit Button	Unknown	Unknown
Unknown	Exit Button	Unknown	Unknown
Honor	Router	WS831	W6E7S15B09001200

External I/O Cable

For Adapter



Cable Description	Length (m)	From Port	To
Network cable	10	EUT	Router
Power cable	2	EUT	Adapter
Load cable	10	EUT	Relay Load
Load cable	10	EUT	RS 485 Load
Load cable	10	EUT	Exit Button
Load cable	10	EUT	Exit Button

For PoE



Cable Description	Length (m)	From Port	To
Network cable	1	EUT	PoE
Network cable	10	PoE	Router
Load cable	10	EUT	Relay Load
Load cable	10	EUT	RS 485 Load
Load cable	10	EUT	Exit Button
Load cable	10	EUT	Exit Button

Block Diagram of Test Setup


Conducted Emission:

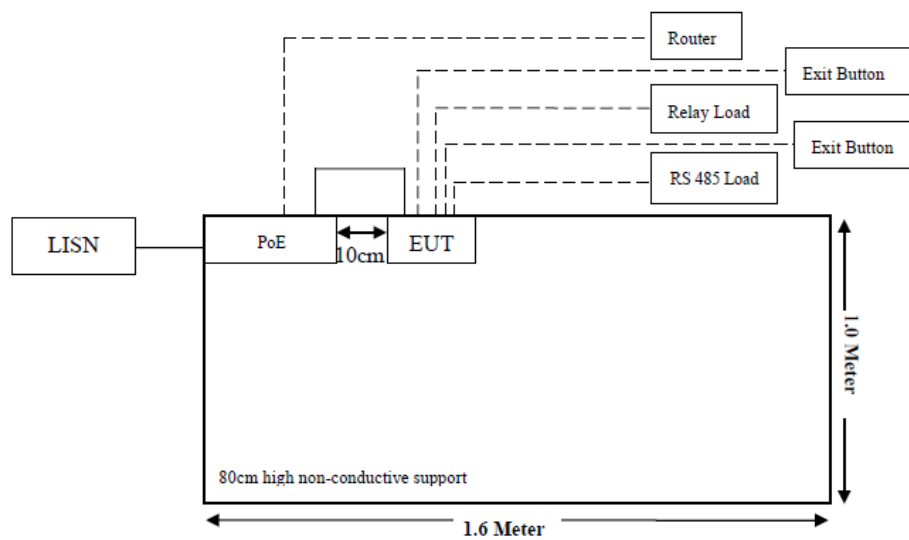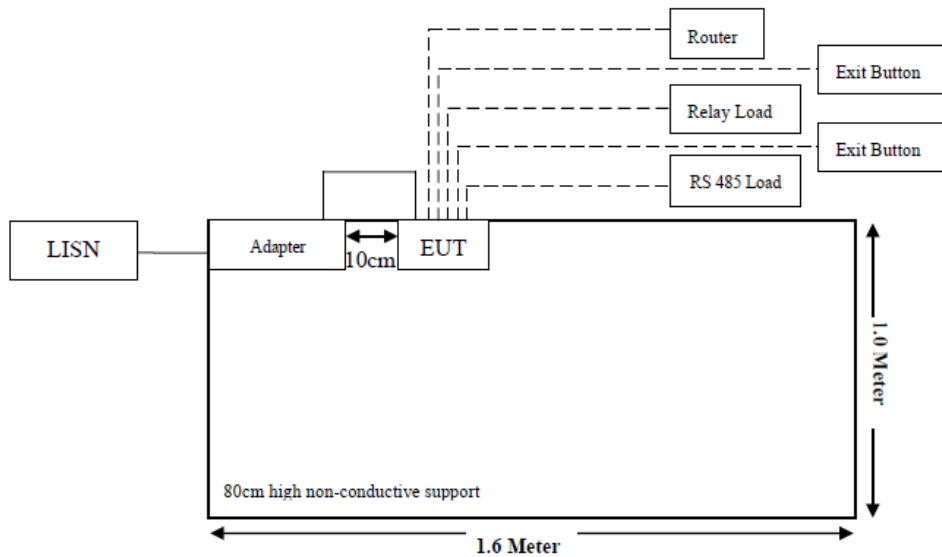

Radiated Emission:
Below 1GHz

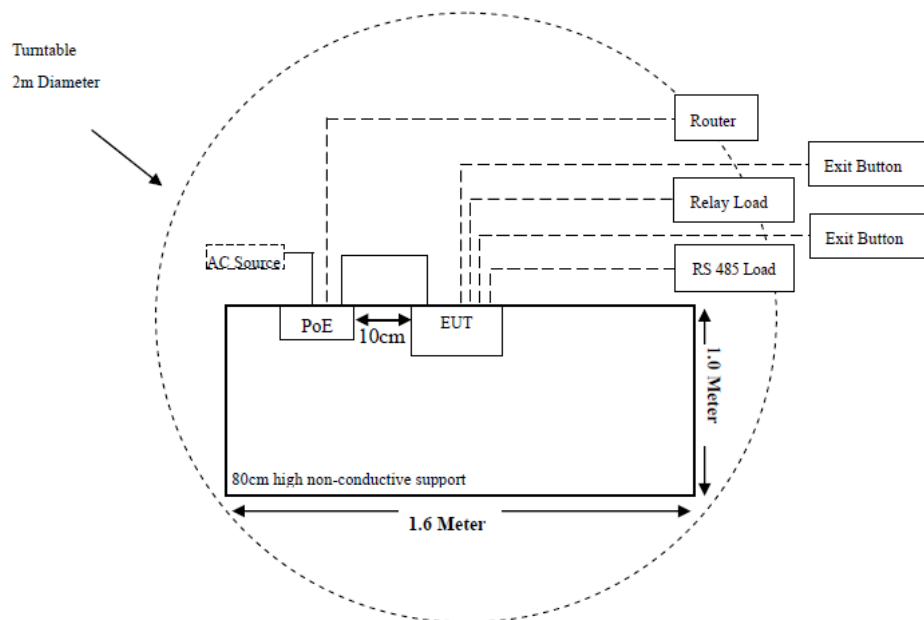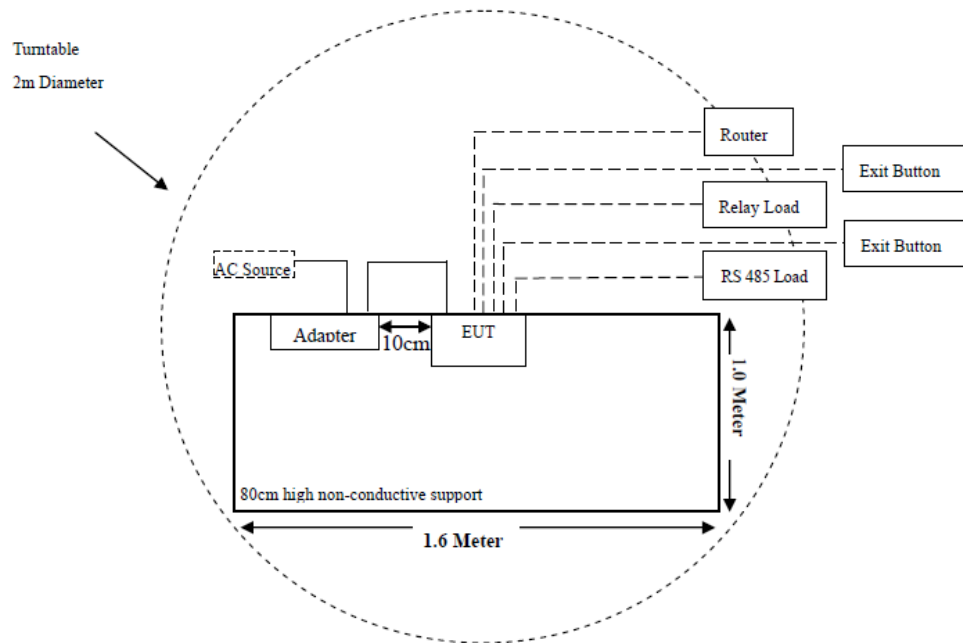

Above 1GHz

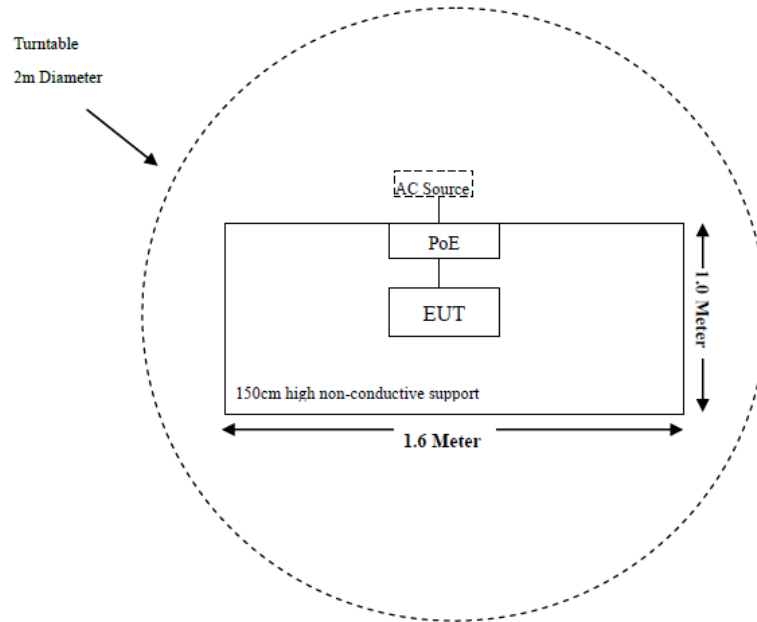

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Test Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions					
EMI Test Receiver	Rohde & Schwarz	ESR3	103105	2024/03/29	2025/03/28
LISN	Rohde & Schwarz	ENV216	100129	2024/03/29	2025/03/28
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	0357.8810.54	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC001	2024/03/29	2025/03/28
Test Software	Audix	E3	18621a	N/A	N/A
Radiated Emissions Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESR3	103103	2024/03/29	2025/03/28
Loop Antenna	Rohde & Schwarz	HFH2-Z2	830749/001	2023/07/27	2026/07/26
Antenna	Sunol Sciences	JB6	A122022-5	2023/07/27	2026/07/26
Amplifier	Sonoma	310B	120903	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC002	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH460B-N-2M	CC006	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH460B-N-12M	CC007	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	HFH2-CC	335.3609	2024/03/29	2025/03/28
Test Software	Audix	E3	18621a	N/A	N/A
Radiated Emissions Above 1 GHz					
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102051	2024/03/29	2025/03/28
Double Ridge Guide Horn Antenna	A.H.Systems	SAS-571	1980	2023/07/28	2026/07/27
Horn Antenna	EMCO	3116	9407-2232	2023/07/31	2026/07/30
Preamplifier	A.H.Systems	PAM-0118P	489	2024/03/29	2025/03/28
Preamplifier	A.H.Systems	PAM-1840	200	2024/03/29	2025/03/28
Multiplex Switch Test Control Set	Decentest	DT7220SCU	DS79901	2024/02/23	2025/02/22
Filter Switch Unit	Decentest	DT7220FSU	DS79904	2024/02/23	2025/02/22
Coaxial Cable	XINHANGWEIBO	XH800A-N-6M	CC003	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH800A-N-1M	CC005	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH360A-2.92-3M	CC008	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH360A-2.92-1M	CC009	2024/03/29	2025/03/28
Test Software	Audix	E3	18621a	N/A	N/A
RF Conducted Test					
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102051	2024/03/29	2025/03/28
Coaxial Cable	N/A	N/A	N/A	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Xiamen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one FPC antenna arrangement for BLE, which was permanently attached and the antenna gain is -3 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

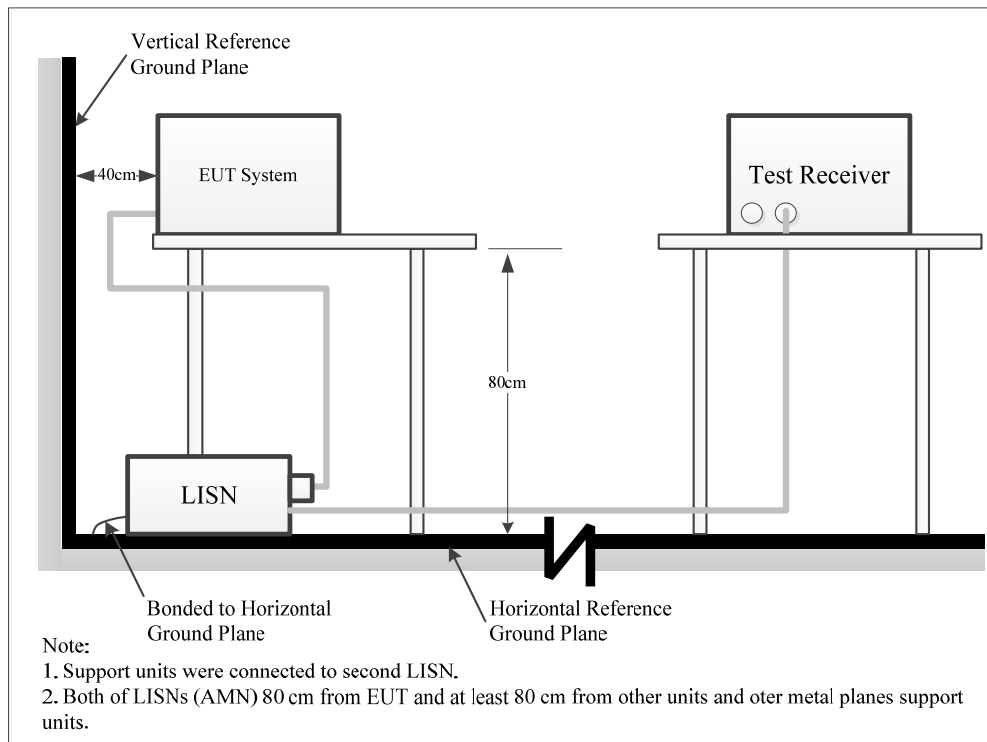

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW	Detector
150 kHz – 30 MHz	9 kHz	30 kHz	QP/AV

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Result & Margin Calculation

The Result μ is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

$$\begin{aligned}\text{Factor (dB)} &= \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)} \\ \text{Result (dB}\mu\text{V)} &= \text{Reading (dB}\mu\text{V)} + \text{Factor (dB)}\end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Result (dB}\mu\text{V)}$$

Test Data

Test Frequency:	150kHz~30MHz
Temperature:	23.7℃
Relative Humidity:	57%
ATM Pressure:	100.1kPa
Test Date:	2024-08-23
Test Engineer:	Spike Gao

EUT operation mode: Transmitting in highest channel of BLE 1Mbps in parallel (worst case)

Project No.: XMDN240311-12032E-RF Temp/Humi/ATM: 23.7℃/57%/100.1kPa
 Test Mode: BLE 2480 Tested by: Spike Gao
 EUT Model: A08S Power Source: DC 48V from PoE

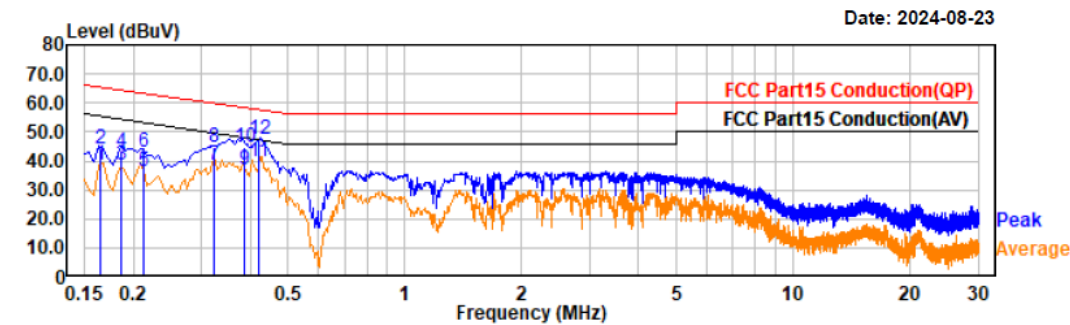

Trace: 1

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.16	17.29	21.11	38.40	55.24	16.84	Line	Average
0.16	22.88	21.11	43.99	65.24	21.25	Line	QP
0.19	17.55	21.20	38.75	54.18	15.43	Line	Average
0.19	21.96	21.20	43.16	64.18	21.02	Line	QP
0.21	15.31	21.20	36.51	53.08	16.57	Line	Average
0.21	21.72	21.20	42.92	63.08	20.16	Line	QP
0.32	18.01	20.76	38.77	49.64	10.87	Line	Average
0.32	24.04	20.76	44.80	59.64	14.84	Line	QP
0.39	16.61	20.57	37.18	48.12	10.94	Line	Average
0.39	24.12	20.57	44.69	58.12	13.43	Line	QP
0.42	19.41	20.48	39.89	47.43	7.54	Line	Average
0.42	26.98	20.48	47.46	57.43	9.97	Line	QP

Project No.: XMDN240311-12032E-RF


Test Mode: BLE 2480

EUT Model: A08S

Temp/Humi/ATM: 23.7°C/57%/100.1kPa

Tested by: Spike Gao

Power Source: DC 48V from PoE

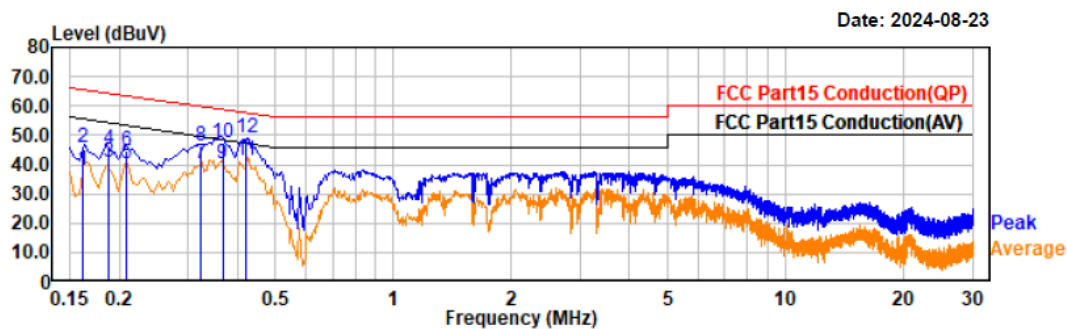


Trace: 1

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.16	17.09	20.90	37.99	55.36	17.37	Neutral	Average
0.16	24.78	20.90	45.68	65.36	19.68	Neutral	QP
0.19	19.59	21.01	40.60	54.13	13.53	Neutral	Average
0.19	24.01	21.01	45.02	64.13	19.11	Neutral	QP
0.21	18.99	21.03	40.02	53.24	13.22	Neutral	Average
0.21	23.89	21.03	44.92	63.24	18.32	Neutral	QP
0.32	19.59	20.66	40.25	49.61	9.36	Neutral	Average
0.32	25.66	20.66	46.32	59.61	13.29	Neutral	QP
0.37	19.74	20.56	40.30	48.57	8.27	Neutral	Average
0.37	26.78	20.56	47.34	58.57	11.23	Neutral	QP
0.42	21.02	20.44	41.46	47.42	5.96	Neutral	Average
0.42	28.56	20.44	49.00	57.42	8.42	Neutral	QP

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S

Temp/Humi/ATM: 23.7°C/57%/100.1kPa
Tested by: Spike Gao
Power Source: DC 12V from Adapter

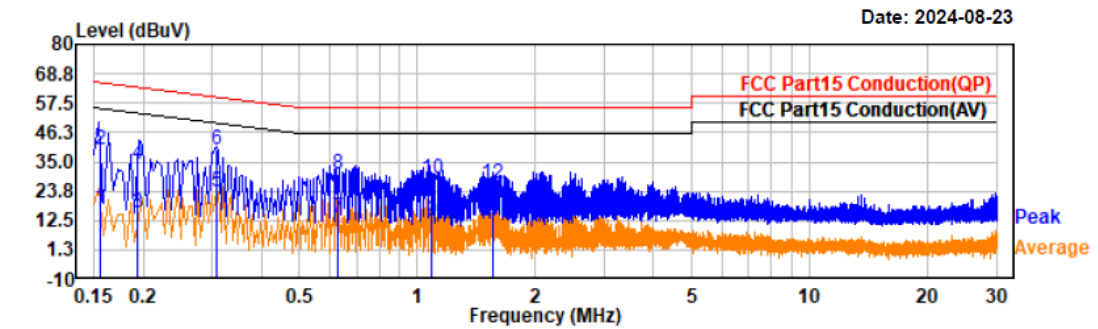


Trace: 1

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.16	-3.76	21.06	17.30	55.72	38.42	Line	Average
0.16	18.72	21.06	39.78	65.72	25.94	Line	QP
0.19	-5.73	21.24	15.51	53.90	38.39	Line	Average
0.19	12.93	21.24	34.17	63.90	29.73	Line	QP
0.31	2.53	20.81	23.34	50.00	26.66	Line	Average
0.31	19.07	20.81	39.88	60.00	20.12	Line	QP
0.63	-7.09	20.50	13.41	46.00	32.59	Line	Average
0.63	9.71	20.50	30.21	56.00	25.79	Line	QP
1.09	-8.13	20.67	12.54	46.00	33.46	Line	Average
1.09	7.62	20.67	28.29	56.00	27.71	Line	QP
1.55	-8.42	20.88	12.46	46.00	33.54	Line	Average
1.55	5.54	20.88	26.42	56.00	29.58	Line	QP

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S

Temp/Humi/ATM: 23.7°C/57%/100.1kPa
Tested by: Spike Gao
Power Source: DC 12V from Adapter


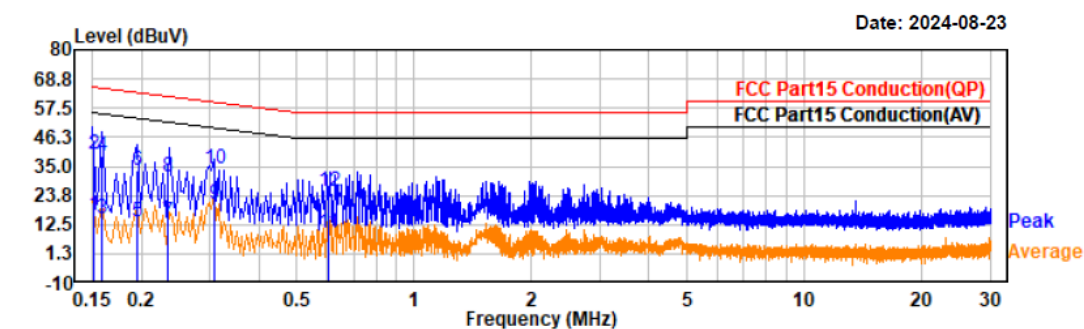



Trace: 1

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.15	-4.84	20.83	15.99	55.95	39.96	Neutral	Average
0.15	19.11	20.83	39.94	65.95	26.01	Neutral	QP
0.16	-5.84	20.89	15.05	55.56	40.51	Neutral	Average
0.16	18.13	20.89	39.02	65.56	26.54	Neutral	QP
0.20	-7.31	21.05	13.74	53.78	40.04	Neutral	Average
0.20	12.67	21.05	33.72	63.78	30.06	Neutral	QP
0.23	-7.11	20.93	13.82	52.28	38.46	Neutral	Average
0.23	10.00	20.93	30.93	62.28	31.35	Neutral	QP
0.31	-0.51	20.70	20.19	50.04	29.85	Neutral	Average
0.31	13.32	20.70	34.02	60.04	26.02	Neutral	QP
0.60	-11.23	20.35	9.12	46.00	36.88	Neutral	Average
0.60	5.17	20.35	25.52	56.00	30.48	Neutral	QP

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

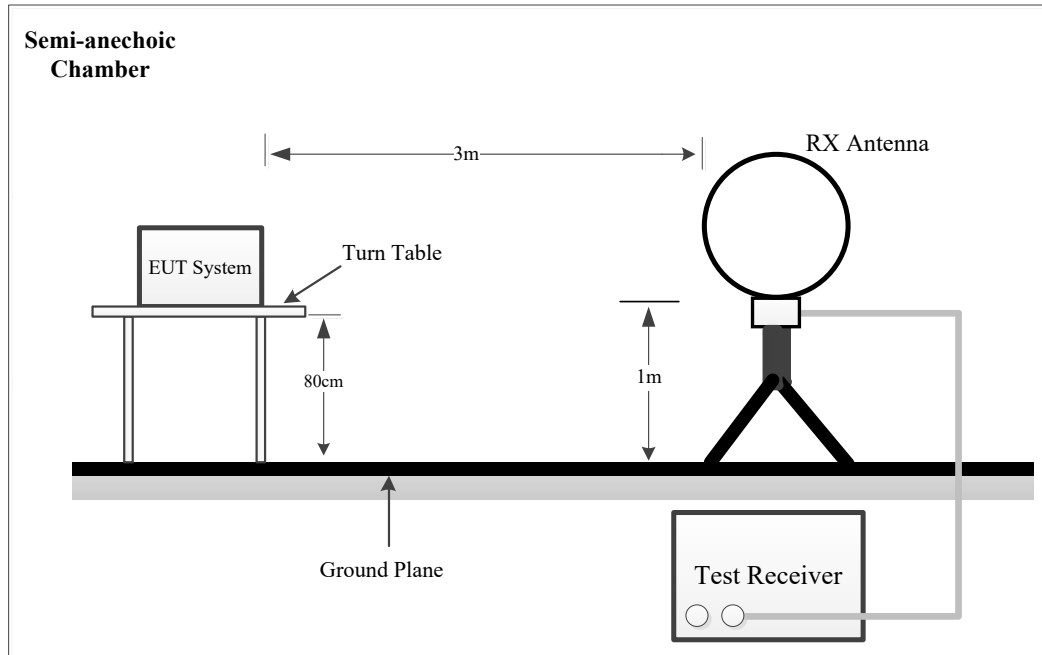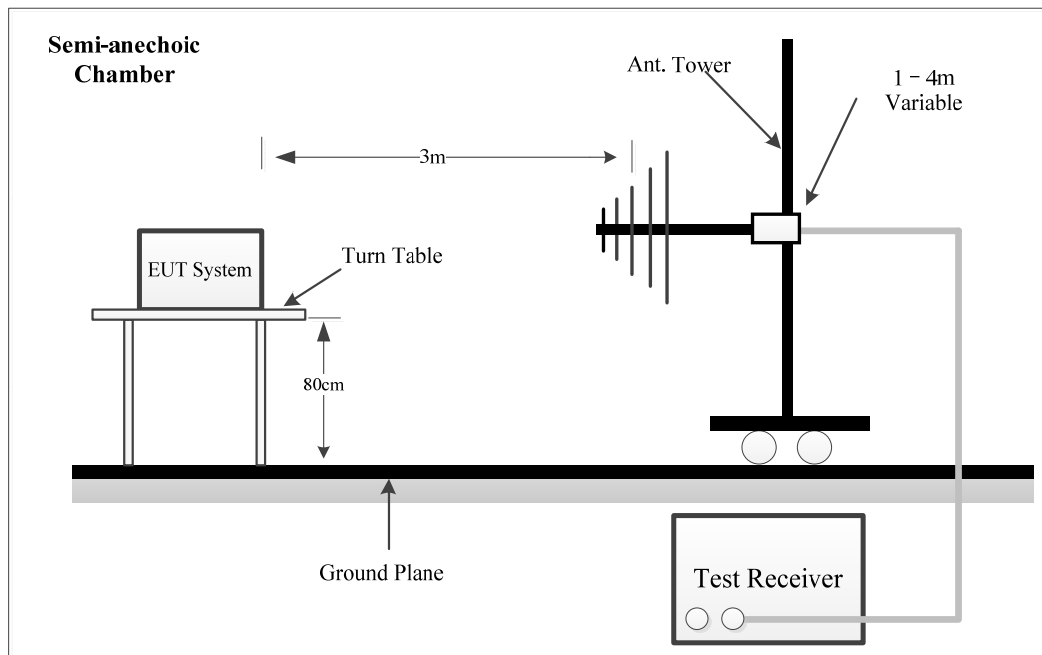EUT Setup**9 kHz-30MHz:****30MHz -1 GHz:**

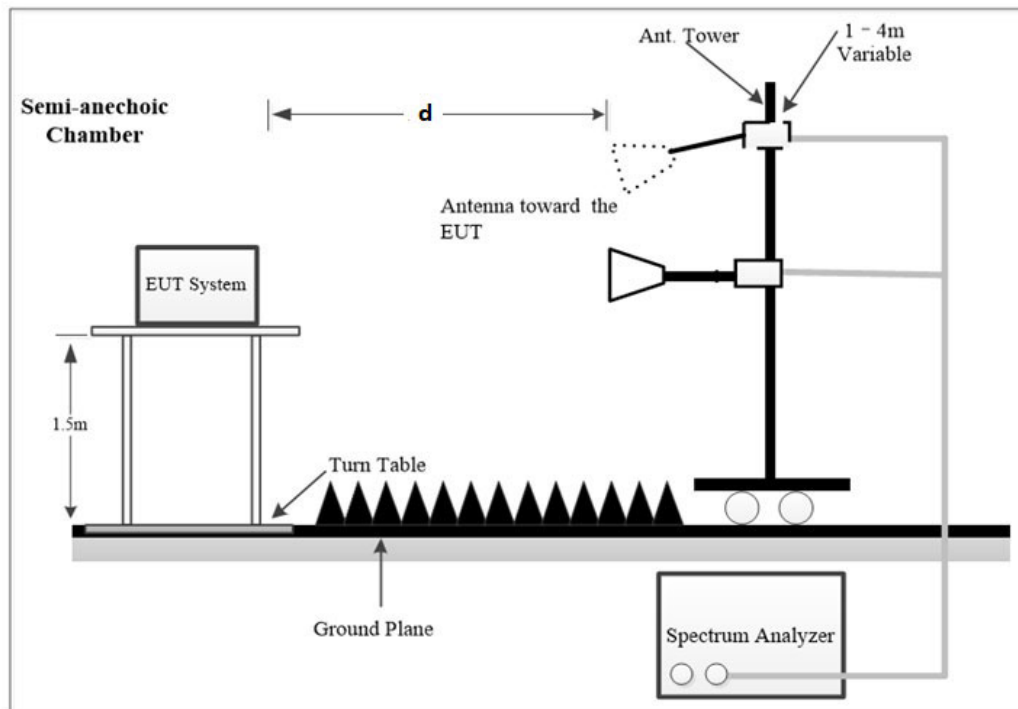Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209, and FCC 15.247 limits.

NOTE: d is testing distance;

For Radiated Emission test (1GHz-18GHz) and Bandedge Emission test, which was performed at 3 m distance.

For Radiated Emission test (18GHz-25GHz), which was performed at 1.0 m distance, according to ANSI C63.10-2020, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.0m.

Distance extrapolation Factor = $20 \log (\text{specific distance } [3\text{m}] / \text{test distance } [1.0\text{m}]) \text{ dB} = 9.54 \text{ dB}$

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Below 1GHz:

Frequency Range	RBW	VBW	Measurement
9 kHz – 150 kHz	200Hz	1 kHz	PK
	200Hz	/	QP
150 kHz – 30 MHz	10 kHz	30 kHz	PK
	9kHz	/	QP
30 MHz – 1000 MHz	100 kHz	300 kHz	PK
	120kHz	/	QP

Above 1GHz:

Pre-scan:

Duty Cycle	RBW	VBW	Measurement	Detector
Any	1MHz	3MHz	PK	PK
>98%	1MHz	5kHz	AV	PK
<98%	1MHz	1/T, not less than 5kHz	AV	PK

Final measurement for emission identified during the pre-scan:

Duty Cycle	RBW	VBW	Measurement	Detector
Any	1MHz	3MHz	PK	PK
>98%	1MHz	10Hz	AV	PK
<98%	1MHz	1/T	AV	PK

Note: T is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable. The report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground parallel) unless the margin is greater than 20 dB, then the following statement shall be made: "all emissions were greater than 20 dB below the limit."

Below 1GHz, if the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

Above 1GHz, if the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is below the AV emission limit, there's no need to record the measured AV level of the emissions in the report.

Result & Margin Calculation

The Result is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

For 9 kHz to 18GHz Radiated emission test

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

For 18GHz to 25GHz Radiated emission test and Bandedge emissions test

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB) - Extrapolation factor (dB)

Extrapolation factor = 9.54dB (distance = 1m)

Result (dBμV/m) = Reading (dBμV) + Factor (dB/m)

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Result (dB}\mu\text{V/m)}$$

Test Data

Please refer to the below table and plots.

Frequency Range:	Below 1 GHz	Above 1 GHz
Temperature:	23.5°C	24.2°C
Relative Humidity:	55 %	59%
ATM Pressure:	100.1kPa	101kPa
Test Date:	2024-07-19	2024-08-24
Test Engineer:	Wlif Wu	Wlif Wu


1) 9 kHz~30MHz

Pre-scan in parallel, ground-parallel and perpendicular of orientation of loop antenna, ground-parallel is worst case

EUT operation mode: Transmitting in highest channel of BLE 1Mbps (worst case)

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S
Test distance: 3m


Temp/Humi/ATM: 23.5°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

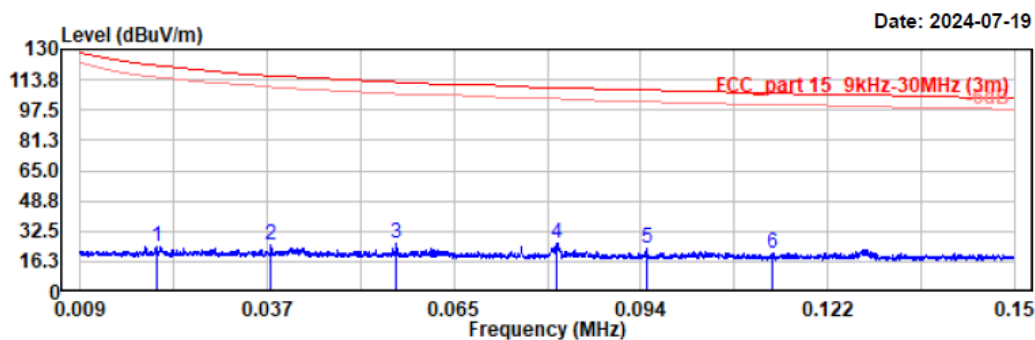

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.021	4.58	19.82	24.40	121.38	96.98	Peak
0.038	5.62	19.91	25.53	116.07	90.54	Peak
0.057	5.81	19.91	25.72	112.54	86.82	Peak
0.081	6.64	19.72	26.36	109.44	83.08	Peak
0.094	3.53	19.78	23.31	108.10	84.79	Peak
0.113	0.96	19.73	20.69	106.51	85.82	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S
Test distance: 3m


Temp/Humi/ATM: 23.5°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

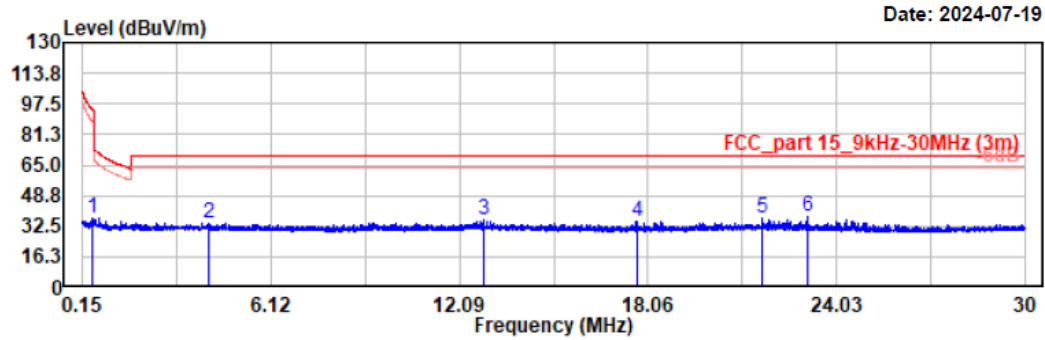

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.451	17.40	19.79	37.19	94.51	57.32	Peak
4.129	14.17	19.75	33.92	69.54	35.62	Peak
12.860	16.04	19.73	35.77	69.54	33.77	Peak
17.696	15.46	19.94	35.40	69.54	34.14	Peak
21.663	16.66	20.13	36.79	69.54	32.75	Peak
23.129	17.09	20.17	37.26	69.54	32.28	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S
Test distance: 3m


Temp/Humi/ATM: 23.5°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: DC 12V from adapter

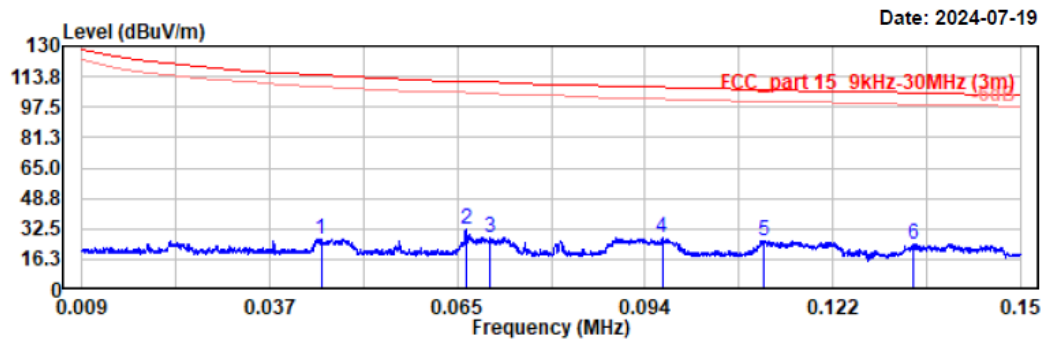

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.045	7.38	19.91	27.29	114.56	87.27	Peak
0.067	12.03	19.84	31.87	111.13	79.26	Peak
0.070	7.89	19.81	27.70	110.67	82.97	Peak
0.096	7.63	19.76	27.39	107.95	80.56	Peak
0.111	6.62	19.73	26.35	106.67	80.32	Peak
0.134	4.93	19.73	24.66	105.06	80.40	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S
Test distance: 3m

Temp/Humi/ATM: 23.5°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: DC 12V from adapter

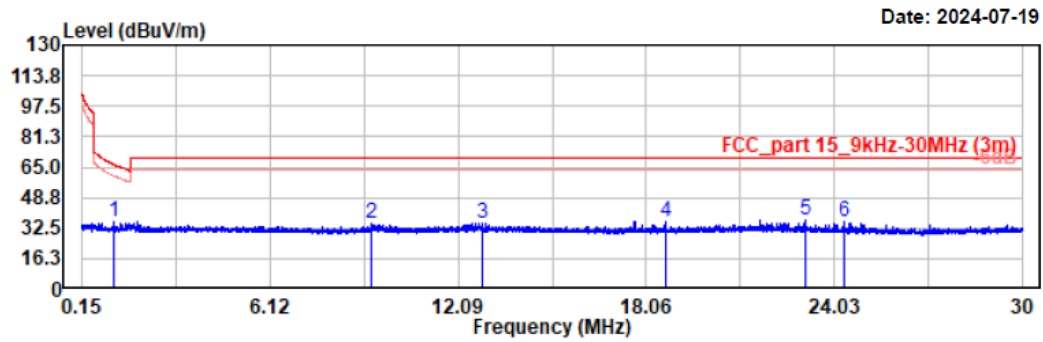


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1.174	16.57	19.71	36.28	66.21	29.93	Peak
9.329	15.17	19.70	34.87	69.54	34.67	Peak
12.863	15.61	19.73	35.34	69.54	34.20	Peak
18.666	16.01	20.00	36.01	69.54	33.53	Peak
23.129	16.95	20.17	37.12	69.54	32.42	Peak
24.352	15.39	20.21	35.60	69.54	33.94	Peak

2) 30MHz-1GHz

EUT operation mode: Transmitting in highest channel of BLE 1Mbps (worst case)

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S
Test distance: 3m


Temp/Humi/ATM: 23.5°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: DC 12V from adapter

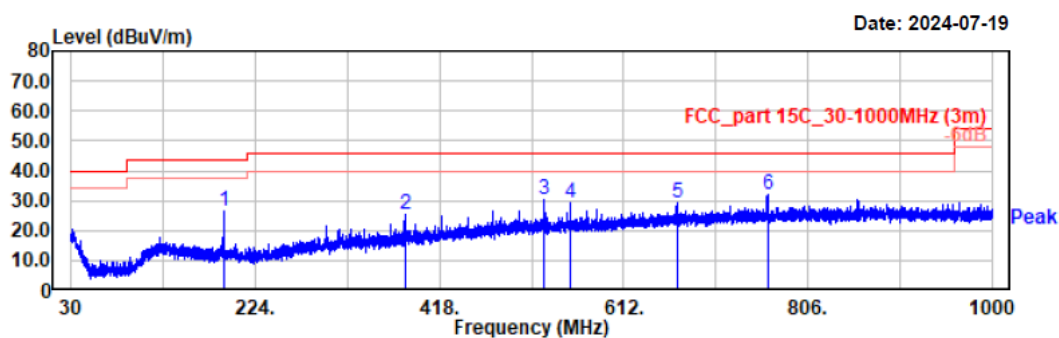

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
190.83	38.92	-12.20	26.72	43.50	16.78	Horizontal	Peak
381.72	32.55	-7.04	25.51	46.00	20.49	Horizontal	Peak
528.87	33.34	-3.27	30.07	46.00	15.93	Horizontal	Peak
555.93	31.76	-2.62	29.14	46.00	16.86	Horizontal	Peak
667.87	29.86	-0.67	29.19	46.00	16.81	Horizontal	Peak
763.42	31.34	0.68	32.02	46.00	13.98	Horizontal	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S
Test distance: 3m

Temp/Humi/ATM: 23.5°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: DC 12V from adapter

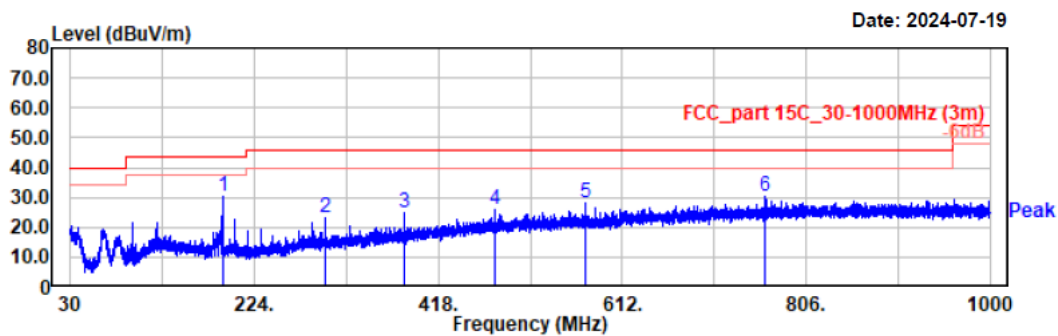

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
190.73	42.45	-12.21	30.24	43.50	13.26	Vertical	Peak
298.30	32.18	-9.21	22.97	46.00	23.03	Vertical	Peak
381.63	31.96	-7.05	24.91	46.00	21.09	Vertical	Peak
477.07	30.02	-3.97	26.05	46.00	19.95	Vertical	Peak
572.42	30.44	-2.48	27.96	46.00	18.04	Vertical	Peak
763.13	29.50	0.67	30.17	46.00	15.83	Vertical	Peak

Project No.: XMDN240311-12032E-RF

Test Mode: BLE 2480


EUT Model: A80S

Test distance: 3m

Temp/Humi/ATM: 23.5°C/55%/100.1kPa

Tested by: Wlif Wu


Power Source: DC48V from PoE

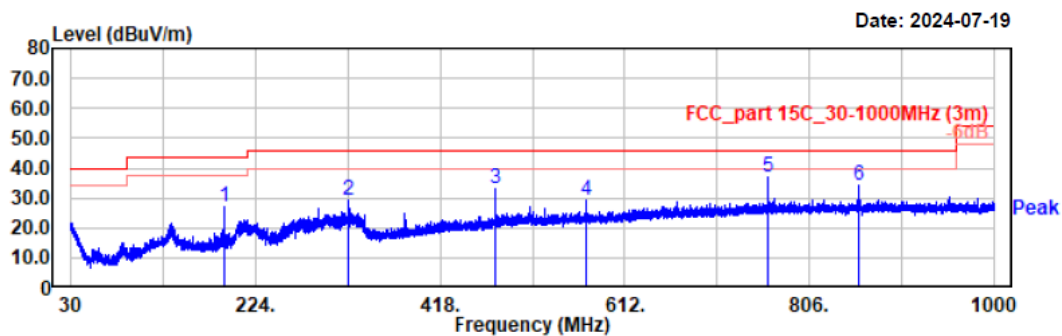

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
190.54	39.13	-12.23	26.90	43.50	16.60	Horizontal	Peak
322.16	37.88	-8.71	29.17	46.00	16.83	Horizontal	Peak
476.49	37.12	-3.99	33.13	46.00	12.87	Horizontal	Peak
571.55	31.78	-2.47	29.31	46.00	16.69	Horizontal	Peak
762.16	36.11	0.65	36.76	46.00	9.24	Horizontal	Peak
857.70	32.25	2.02	34.27	46.00	11.73	Horizontal	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A80S
Test distance: 3m

Temp/Humi/ATM: 23.5°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: DC48V from PoE

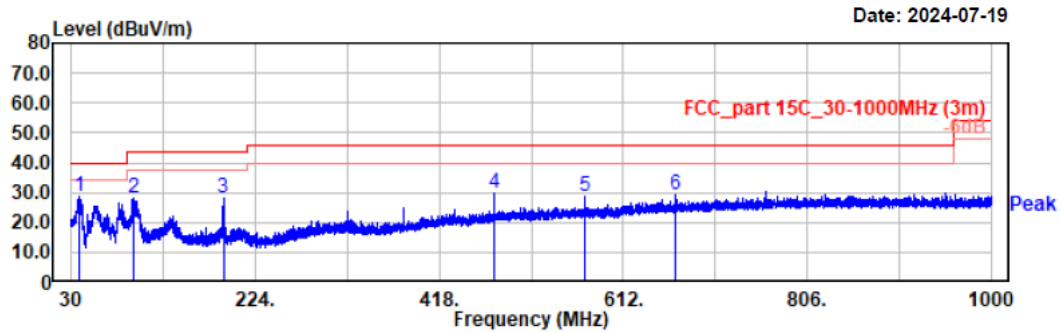


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
37.86	38.71	-10.17	28.54	40.00	11.46	Vertical	Peak
94.89	44.67	-16.36	28.31	43.50	15.19	Vertical	Peak
190.34	40.54	-12.25	28.29	43.50	15.21	Vertical	Peak
476.01	33.64	-4.01	29.63	46.00	16.37	Vertical	Peak
571.36	31.19	-2.47	28.72	46.00	17.28	Vertical	Peak
666.51	29.93	-0.71	29.22	46.00	16.78	Vertical	Peak

3) 1GHz~3GHz

Note: Both Adapter and POE have been tested the worst POE data were recorded in this report.

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2402
EUT Model: A08S
Test distance: 3m


Temp/Humi/ATM: 24.2°C/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

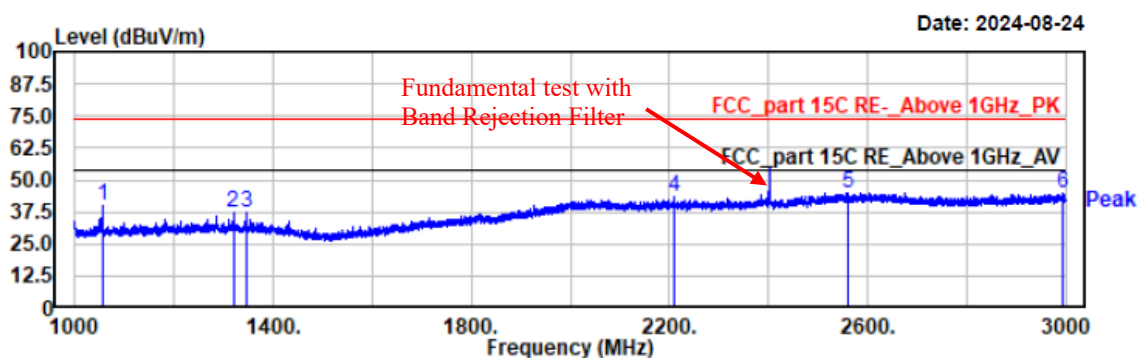

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1055.80	56.82	-16.97	39.85	74.00	34.15	horizontal	Peak
1319.80	52.60	-15.47	37.13	74.00	36.87	horizontal	Peak
1347.00	52.42	-15.43	36.99	74.00	37.01	horizontal	Peak
2208.60	49.76	-6.25	43.51	74.00	30.49	horizontal	Peak
2560.00	48.39	-3.44	44.95	74.00	29.05	horizontal	Peak
2993.40	48.73	-4.04	44.69	74.00	29.31	horizontal	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2402
EUT Model: A08S
Test distance: 3m


Temp/Humi/ATM: 24.2°C/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

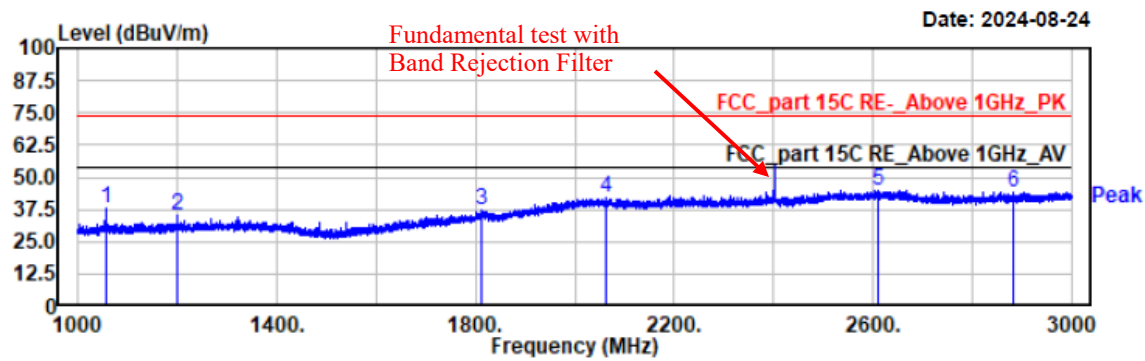

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1055.80	54.84	-16.97	37.87	74.00	36.13	vertical	Peak
1200.20	51.50	-16.05	35.45	74.00	38.55	vertical	Peak
1813.60	49.02	-11.50	37.52	74.00	36.48	vertical	Peak
2063.60	48.22	-6.18	42.04	74.00	31.96	vertical	Peak
2611.00	48.27	-3.31	44.96	74.00	29.04	vertical	Peak
2884.00	48.86	-4.44	44.42	74.00	29.58	vertical	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2440
EUT Model: A08S
Test distance: 3m


Temp/Humi/ATM: 24.2°C/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

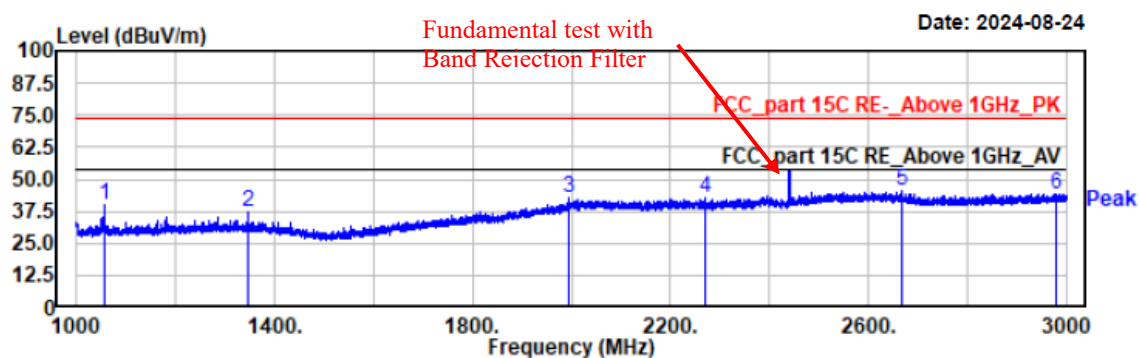

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1056.20	56.96	-16.97	39.99	74.00	34.01	horizontal	Peak
1345.60	52.81	-15.44	37.37	74.00	36.63	horizontal	Peak
1996.20	49.37	-6.88	42.49	74.00	31.51	horizontal	Peak
2271.00	48.96	-6.28	42.68	74.00	31.32	horizontal	Peak
2668.00	49.05	-3.83	45.22	74.00	28.78	horizontal	Peak
2979.20	48.46	-4.09	44.37	74.00	29.63	horizontal	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2440
EUT Model: A08S
Test distance: 3m


Temp/Humi/ATM: 24.2°C/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

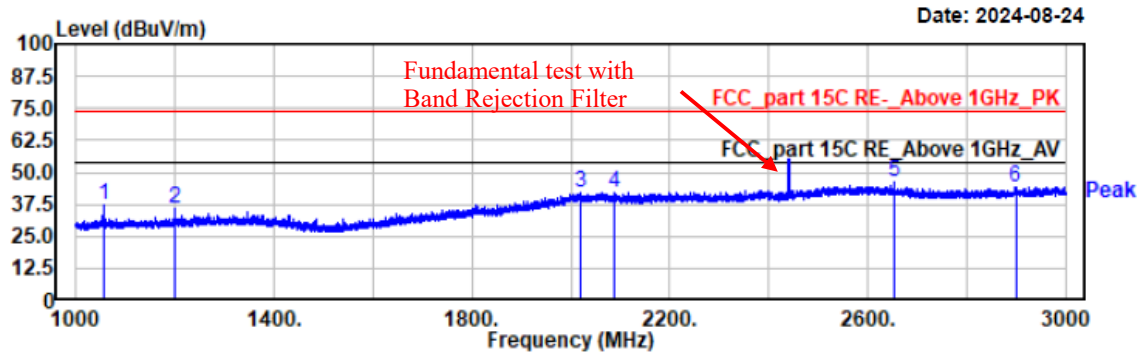

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1056.40	54.50	-16.97	37.53	74.00	36.47	vertical	Peak
1199.80	52.08	-16.05	36.03	74.00	37.97	vertical	Peak
2020.00	48.34	-6.44	41.90	74.00	32.10	vertical	Peak
2087.00	48.53	-6.53	42.00	74.00	32.00	vertical	Peak
2653.80	49.67	-3.47	46.20	74.00	27.80	vertical	Peak
2898.60	48.78	-4.39	44.39	74.00	29.61	vertical	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S
Test distance: 3m


Temp/Humi/ATM: 24.2°C/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

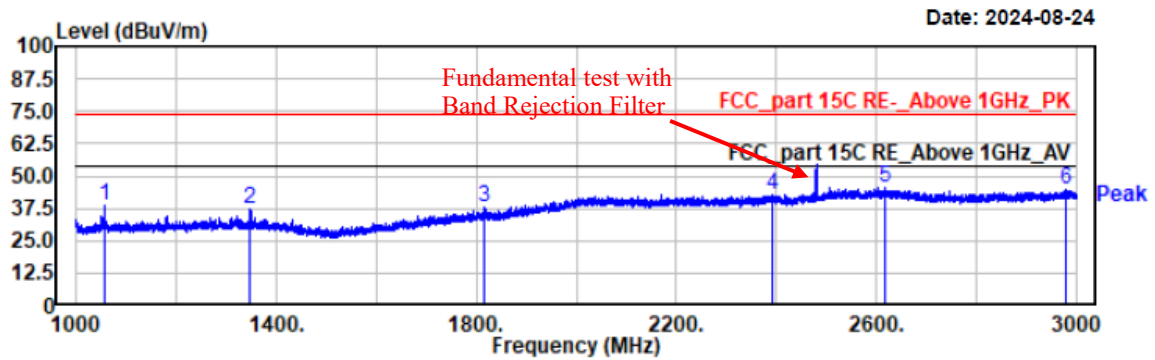

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1056.20	55.74	-16.97	38.77	74.00	35.23	horizontal	Peak
1346.80	52.35	-15.44	36.91	74.00	37.09	horizontal	Peak
1816.80	49.69	-11.47	38.22	74.00	35.78	horizontal	Peak
2390.60	48.35	-5.31	43.04	74.00	30.96	horizontal	Peak
2616.00	48.66	-3.32	45.34	74.00	28.66	horizontal	Peak
2980.20	48.99	-4.09	44.90	74.00	29.10	horizontal	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S
Test distance: 3m

Temp/Humi/ATM: 24.2°C/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

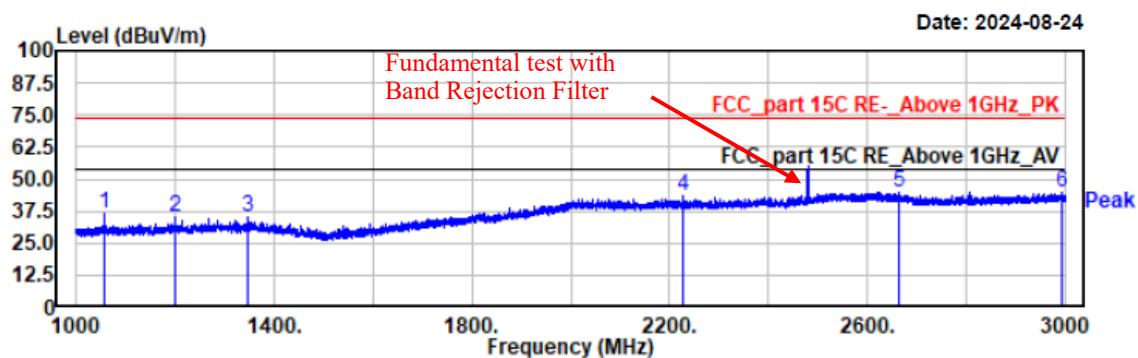


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1056.00	53.75	-16.97	36.78	74.00	37.22	vertical	Peak
1199.60	51.20	-16.05	35.15	74.00	38.85	vertical	Peak
1346.40	50.56	-15.44	35.12	74.00	38.88	vertical	Peak
2228.20	49.35	-6.24	43.11	74.00	30.89	vertical	Peak
2665.40	48.63	-3.76	44.87	74.00	29.13	vertical	Peak
2992.20	48.59	-4.04	44.55	74.00	29.45	vertical	Peak

4) 3 GHz ~18 GHz

Note: Both Adapter and POE have been tested, the worst POE data were recorded in this report.

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2402
EUT Model: A08S
Test distance: 3m

Temp/Humi/ATM: 24.2°C/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

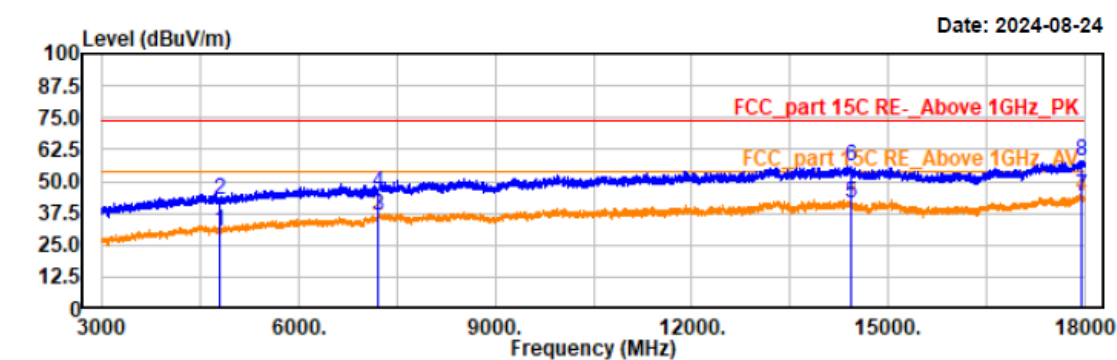


Trace: 1

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4804.00	34.65	-4.45	30.20	54.00	23.80	horizontal	Average
4804.00	47.15	-4.45	42.70	74.00	31.30	horizontal	Peak
7206.00	38.04	-1.73	36.31	54.00	17.69	horizontal	Average
7206.00	47.42	-1.73	45.69	74.00	28.31	horizontal	Peak
14422.50	36.30	5.11	41.41	54.00	12.59	horizontal	Average
14422.50	50.96	5.11	56.07	74.00	17.93	horizontal	Peak
17956.50	36.70	7.68	44.38	54.00	9.62	horizontal	Average
17956.50	50.29	7.68	57.97	74.00	16.03	horizontal	Peak


Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2402
EUT Model: A08S
Test distance: 3m

Temp/Humi/ATM: 24.2℃/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

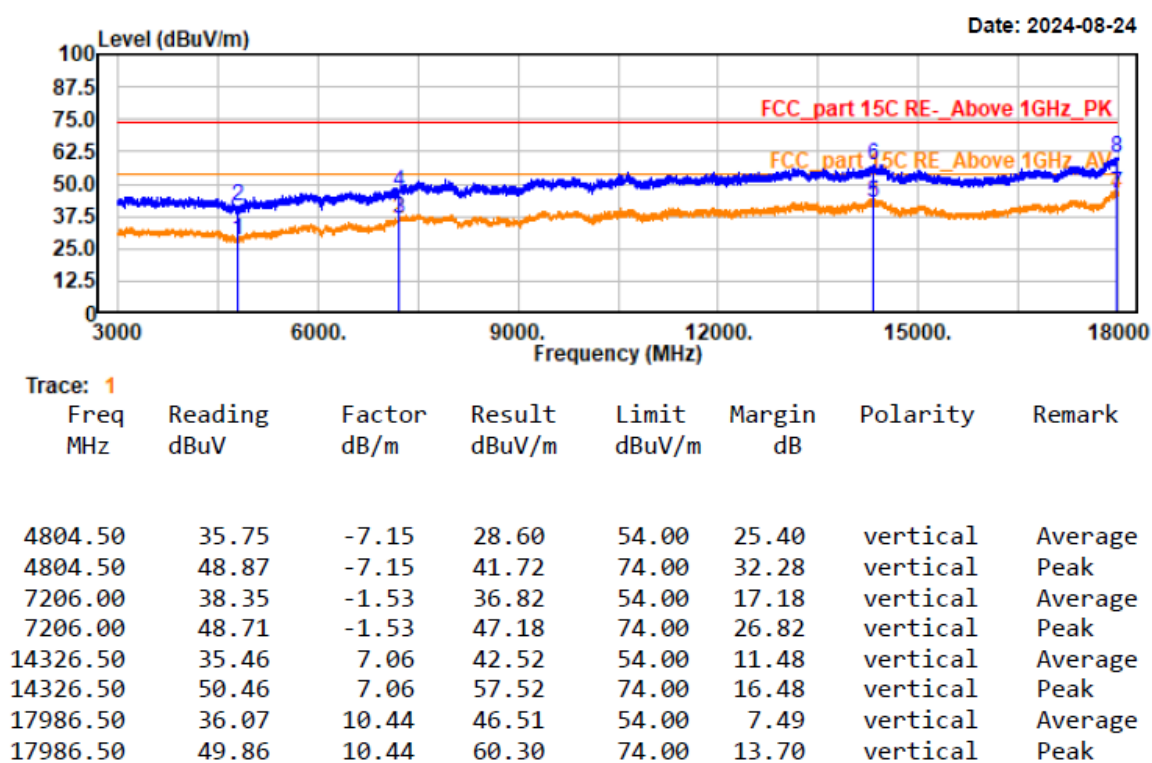

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2440
EUT Model: A08S
Test distance: 3m

Temp/Humi/ATM: 24.2℃/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

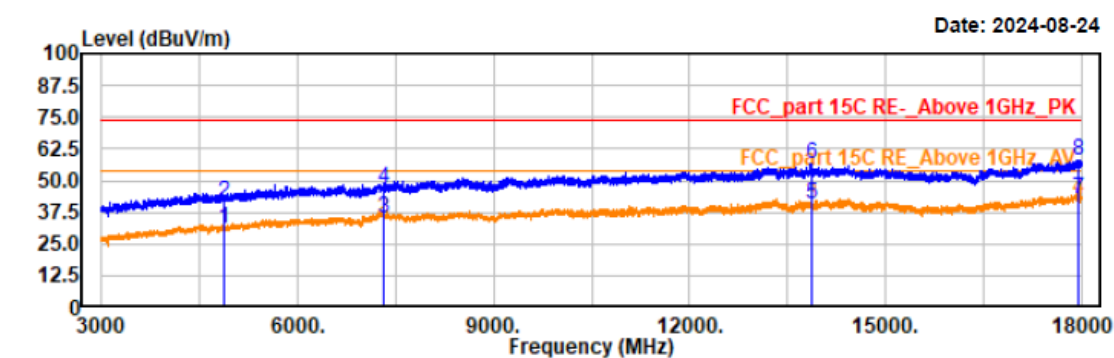


Trace: 1

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4880.00	35.29	-4.25	31.04	54.00	22.96	horizontal	Average
4880.00	45.63	-4.25	41.38	74.00	32.62	horizontal	Peak
7320.00	36.98	-1.61	35.37	54.00	18.63	horizontal	Average
7320.00	48.80	-1.61	47.19	74.00	26.81	horizontal	Peak
13863.00	35.90	5.09	40.99	54.00	13.01	horizontal	Average
13863.00	51.36	5.09	56.45	74.00	17.55	horizontal	Peak
17950.50	35.18	7.67	42.85	54.00	11.15	horizontal	Average
17950.50	50.52	7.67	58.19	74.00	15.81	horizontal	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2440
EUT Model: A08S
Test distance: 3m

Temp/Humi/ATM: 24.2°C/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

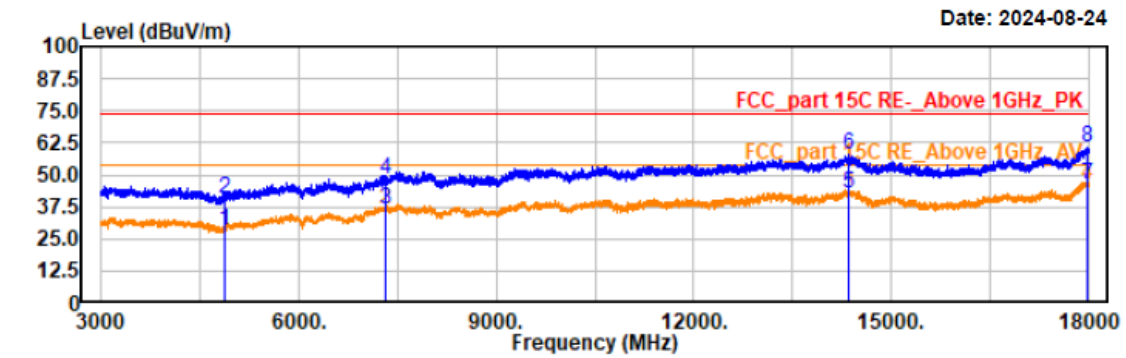


Trace: 1

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4879.50	34.57	-6.30	28.27	54.00	25.73	vertical	Average
4879.50	46.87	-6.30	40.57	74.00	33.43	vertical	Peak
7320.00	37.37	-1.13	36.24	54.00	17.76	vertical	Average
7320.00	49.19	-1.13	48.06	74.00	25.94	vertical	Peak
14358.00	36.16	6.88	43.04	54.00	10.96	vertical	Average
14358.00	50.90	6.88	57.78	74.00	16.22	vertical	Peak
17971.50	36.14	10.32	46.46	54.00	7.54	vertical	Average
17971.50	50.26	10.32	60.58	74.00	13.42	vertical	Peak


Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S
Test distance: 3m

Temp/Humi/ATM: 24.2℃/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

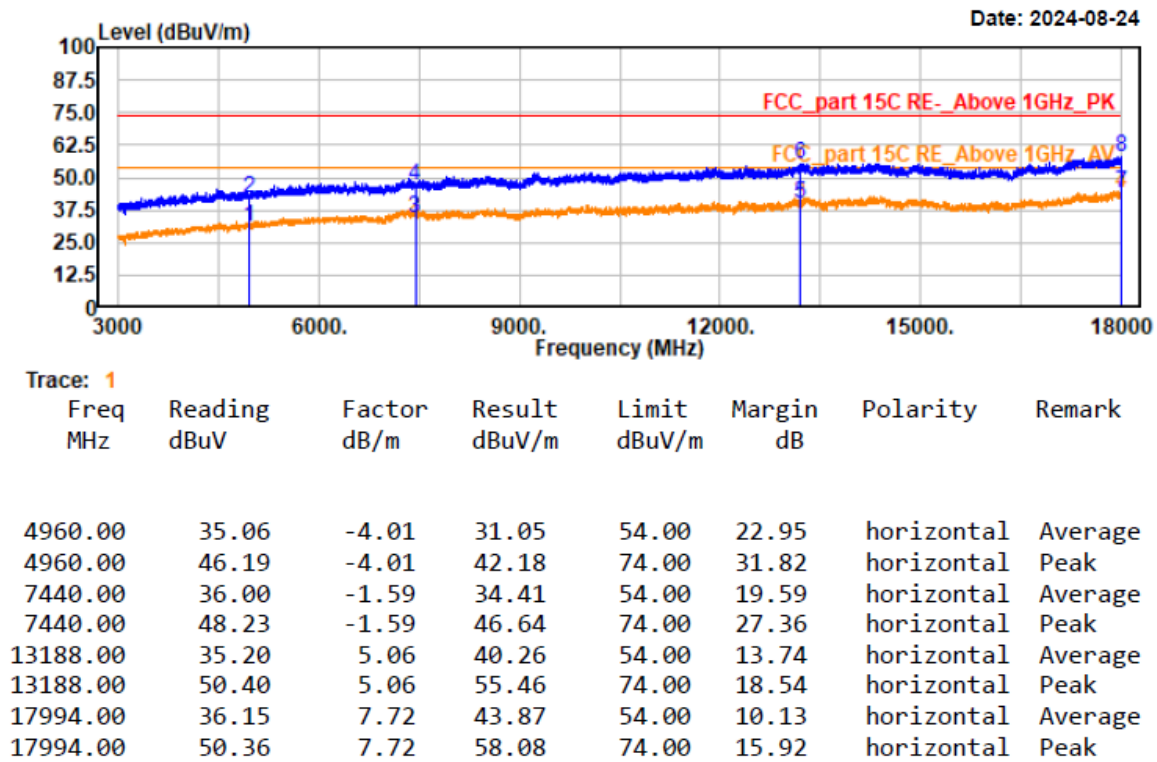

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S
Test distance: 3m

Temp/Humi/ATM: 24.2℃/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

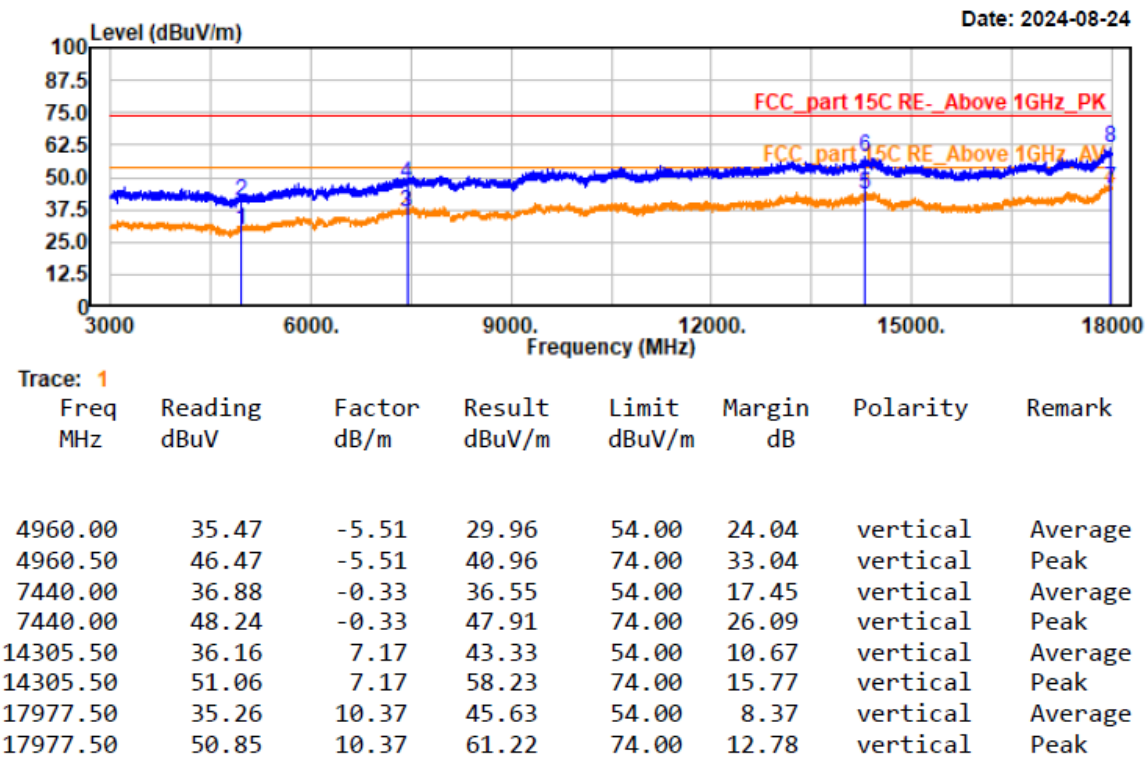

5) 18 GHz ~25 GHz

EUT operation mode: Transmitting in highest channel of BLE 1Mbps (worst case) and Both Adapter and POE have been tested, the worst POE data were recorded in this report.

Project No.: XMDN240311-12032E-RF

Test Mode: BLE 2480


EUT Model: A08S

Test distance: 1m

Temp/Humi/ATM: 24.2℃/59%/101kPa

Tested by: Wlif Wu


Power Source: DC 48V from PoE

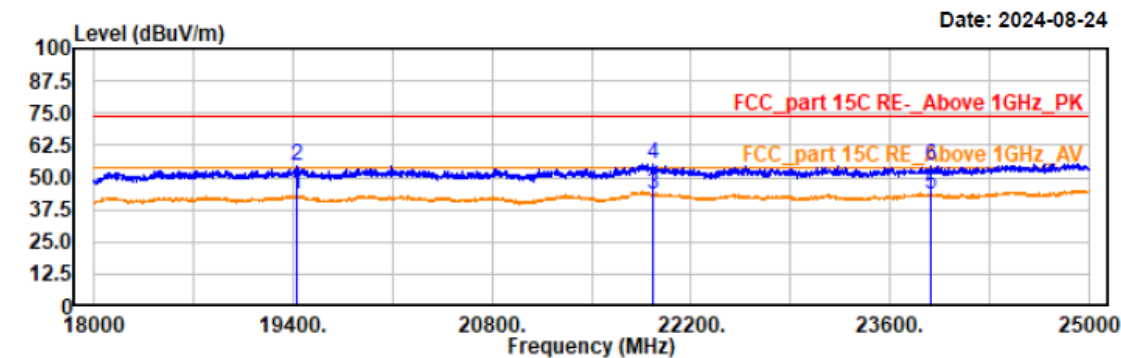

Trace: 1							
Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
19430.00	28.33	15.06	43.39	54.00	10.61	horizontal	Average
19430.00	39.33	15.06	54.39	74.00	19.61	horizontal	Peak
21929.20	26.81	16.53	43.34	54.00	10.66	horizontal	Average
21929.20	38.81	16.53	55.34	74.00	18.66	horizontal	Peak
23885.00	25.50	17.92	43.42	54.00	10.58	horizontal	Average
23885.00	36.50	17.92	54.42	74.00	19.58	horizontal	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S
Test distance: 1m

Temp/Humi/ATM: 24.2℃/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

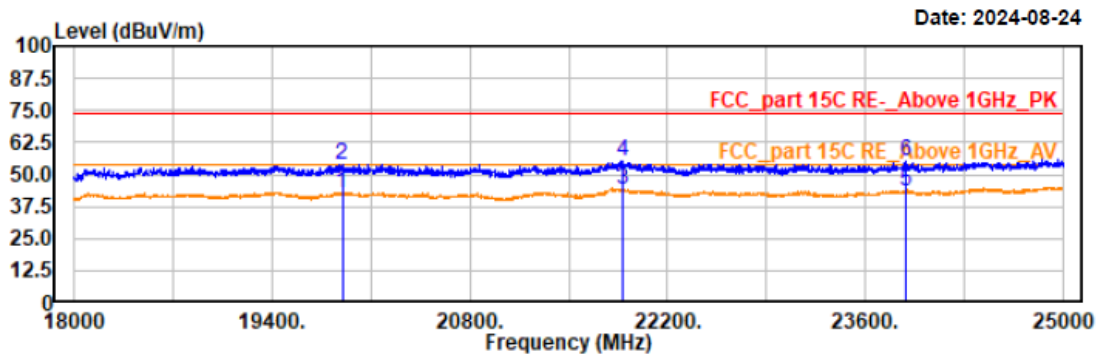

Trace: 1

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
19896.40	27.43	15.11	42.54	54.00	11.46	vertical	Average
19896.40	38.71	15.11	53.82	74.00	20.18	vertical	Peak
21878.60	27.66	16.58	44.24	54.00	9.76	vertical	Average
21878.60	38.86	16.58	55.44	74.00	18.56	vertical	Peak
23889.40	25.52	17.92	43.44	54.00	10.56	vertical	Average
23889.40	37.05	17.92	54.97	74.00	19.03	vertical	Peak

Bandedge Emissions:

Project No.: XMDN240311-12032E-RF

Test Mode: BLE 2402


EUT Model: A08S

Test distance: 3m

Temp/Humi/ATM: 24.2℃/59%/101kPa

Tested by: Wlif Wu


Power Source: DC 48V from PoE

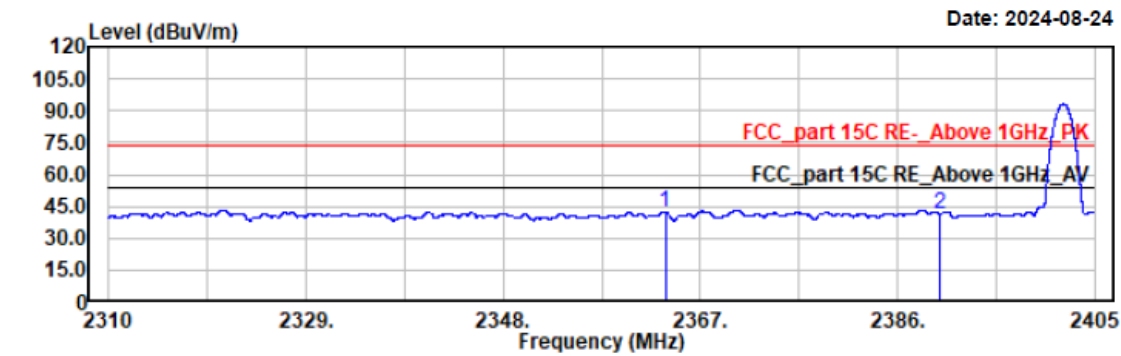

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2363.63	47.25	-4.77	42.48	74.00	31.52	horizontal	Peak
2390.00	46.29	-4.63	41.66	74.00	32.34	horizontal	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2402
EUT Model: A08S
Test distance: 3m


Temp/Humi/ATM: 24.2℃/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

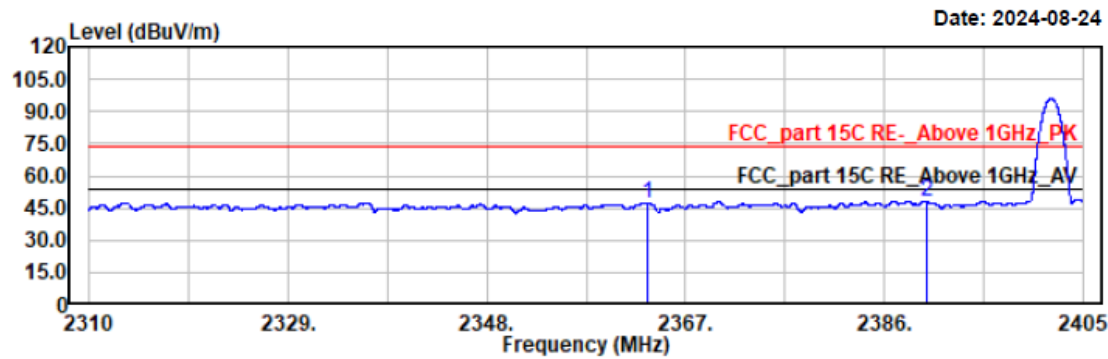

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2363.36	47.35	0.17	47.52	74.00	26.48	vertical	Peak
2390.00	47.44	0.57	48.01	74.00	25.99	vertical	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S
Test distance: 3m


Temp/Humi/ATM: 24.2℃/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

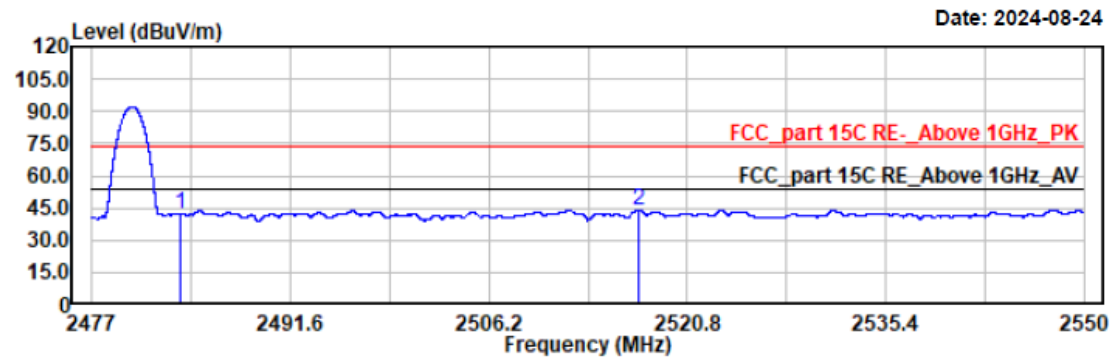

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	46.27	-4.17	42.10	74.00	31.90	horizontal	Peak
2517.17	48.04	-4.07	43.97	74.00	30.03	horizontal	Peak

Project No.: XMDN240311-12032E-RF
Test Mode: BLE 2480
EUT Model: A08S
Test distance: 3m


Temp/Humi/ATM: 24.2℃/59%/101kPa
Tested by: Wlif Wu
Power Source: DC 48V from PoE

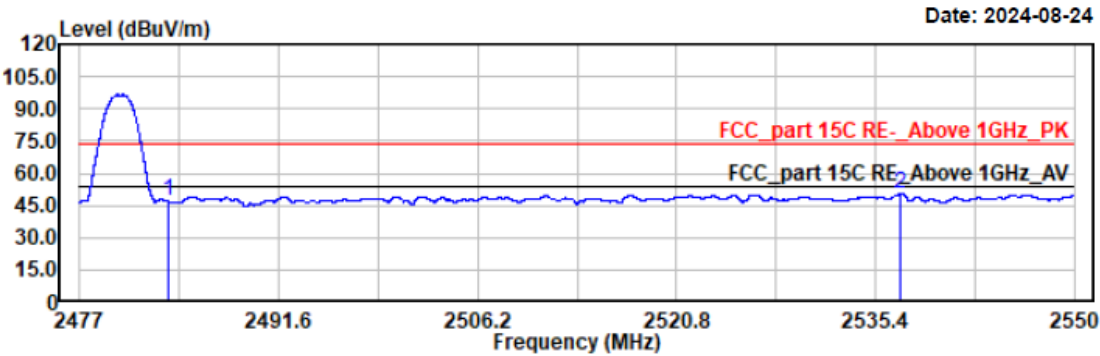

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2483.50	45.24	1.57	46.81	74.00	27.19	vertical	Peak
2537.27	48.00	2.41	50.41	74.00	23.59	vertical	Peak

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

EUT Setup**Test Procedure**

According to ANSI C63.10-2020 Section 11.8

- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “–6 dB down amplitude”. If a marker is below this “–6 dB down amplitude” value, then it shall be as close as possible to this value.


Test Data

Test Mode:	Transmitting	Test Engineer:	Stein Peng
Test Date:	2024-06-25	Environment:	Temp.:22.4°C Humi.: 57% Atm :100.2 kPa

Test Result: Compliant

Test Modes	Test Channel	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
BLE 1Mbps	Lowest	2402	0.688	≥ 0.5
	Middle	2440	0.692	≥ 0.5
	Highest	2480	0.696	≥ 0.5


1Mbps_Lowest

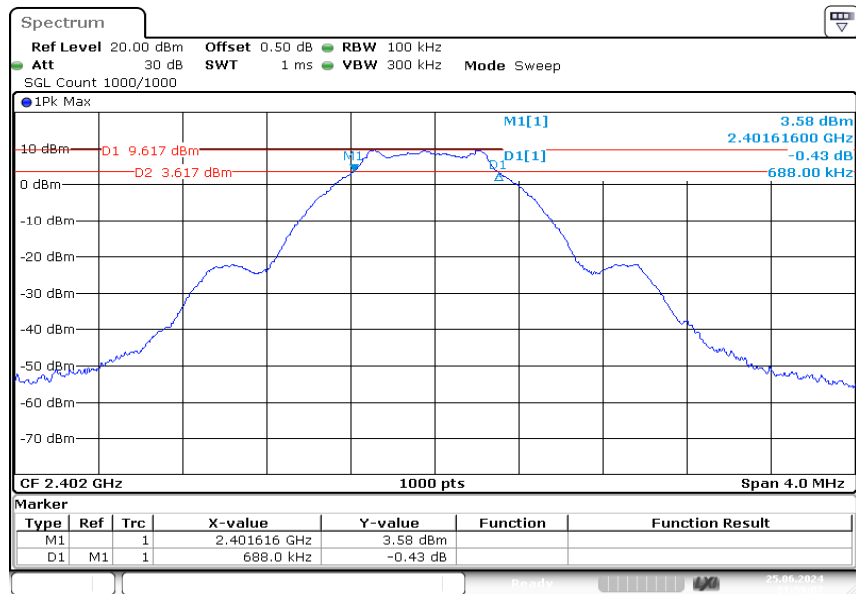

ProjectNo.:XMDN240311-12032E-RF Tester:Stein Peng

Date: 25.JUN.2024 21:59:06


1Mbps_Middle

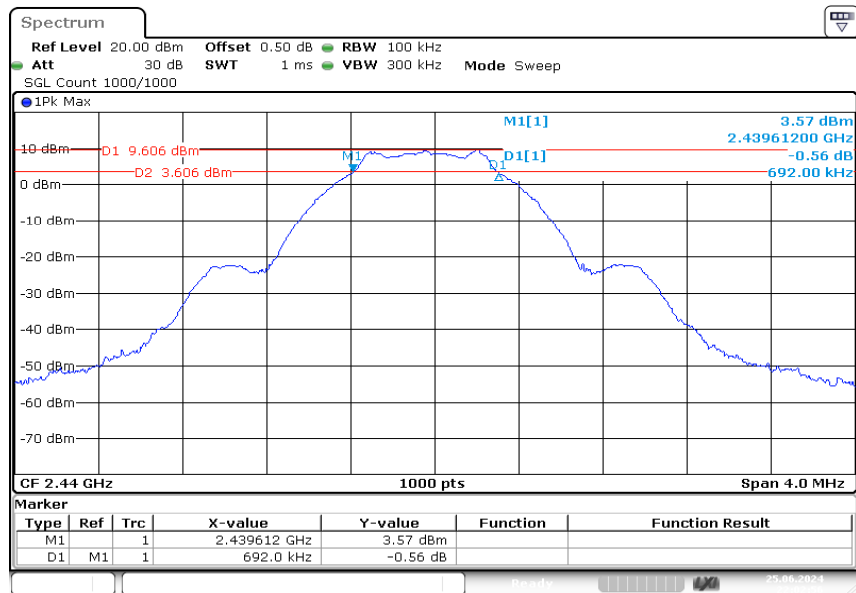

ProjectNo.:XMDN240311-12032E-RF Tester:Stein Peng

Date: 25.JUN.2024 22:02:55


1Mbps_Highest

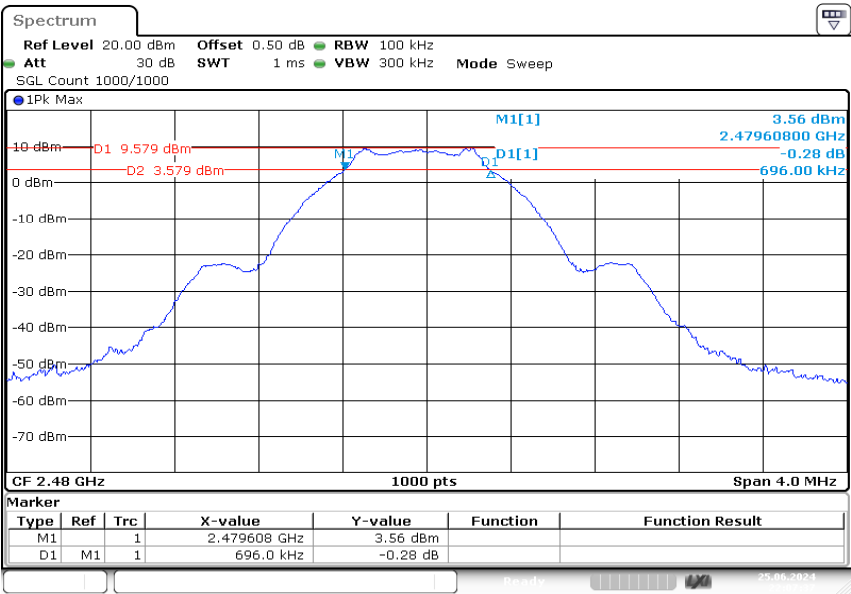

ProjectNo.:XMDN240311-12032E-RF Tester:Stein Peng
Date: 25.JUN.2024 22:07:37

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER**Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

EUT Setup**Test Procedure**

According to ANSI C63.10-2020 Section 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW \geq DTS bandwidth.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Set span $\geq [3 \times \text{RBW}]$.
- Sweep time = No faster than coupled (auto) time.
- Detector = peak.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.


Test Data

Test Mode:	Transmitting	Test Engineer:	Stein Peng
Test Date:	2024-06-25	Environment:	Temp.: 22.4°C Humi.: 57% Atm : 100.2kPa

Test Result: Compliant


Test Modes	Test Channel	Test Frequency (MHz)	Maximum Conducted Peak Output Power(dBm)	Limit (dBm)
BLE 1Mbps	Lowest	2402	9.90	≤ 30
	Middle	2440	9.88	≤ 30
	Highest	2480	9.95	≤ 30

1Mbps_Lowest

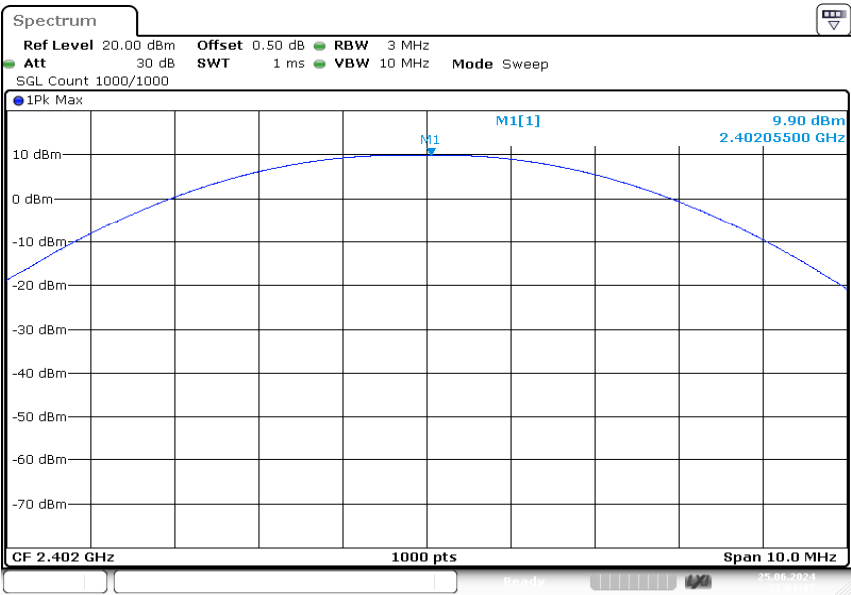


ProjectNo.:XMDN240311-12032E-RF Tester:Stein Peng
Date: 25.JUN.2024 22:01:17

1Mbps_Middle

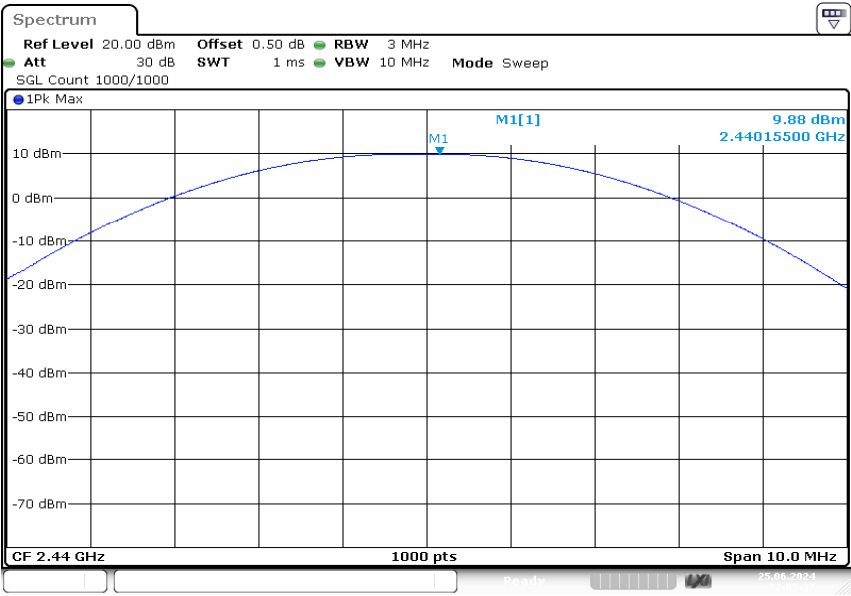

ProjectNo.:XMDN240311-12032E-RF Tester:Stein Peng
Date: 25.JUN.2024 22:05:37


1Mbps_Highest

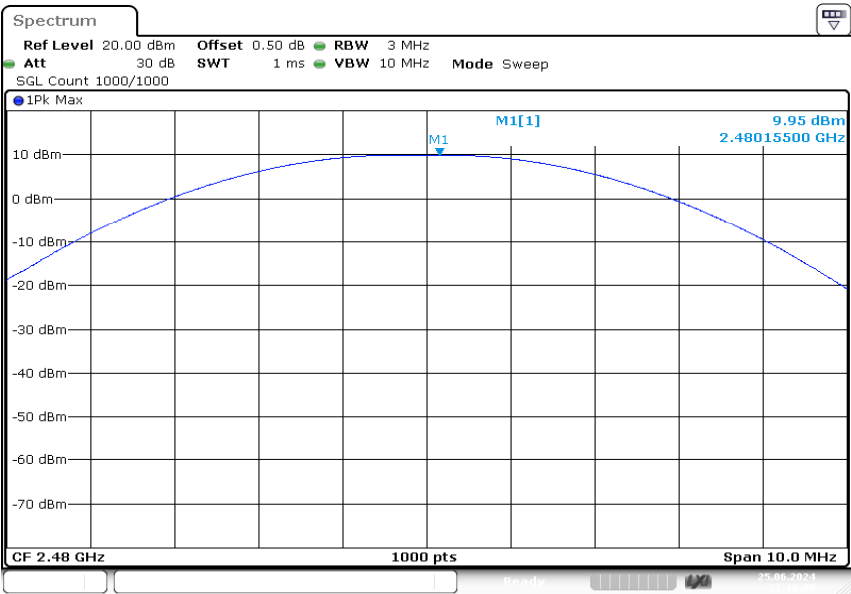

ProjectNo.:XMDN240311-12032E-RF Tester:Stein Peng
Date: 25.JUN.2024 22:10:09

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

EUT Setup**Test Procedure**

According to ANSI C63.10-2020 Section 11.11


- a) Set the center frequency and span to encompass frequency range to be measured.
 - b) Set the RBW = 100 kHz.
 - c) Set the VBW $\geq [3 \times \text{RBW}]$.
 - d) Detector = peak.
 - e) Sweep time = No faster than coupled (auto) time.
 - f) Trace mode = max hold.
 - g) Allow trace to fully stabilize.
 - h) Use the peak marker function to determine the maximum amplitude level.
- Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

Test Data


Test Mode:	Transmitting	Test Engineer:	Stein Peng
Test Date:	2024-06-25	Environment:	Temp.: 22.4°C Humi.:57% Atm:100.2kPa

Test Result: Compliant

1Mbps_Lowest

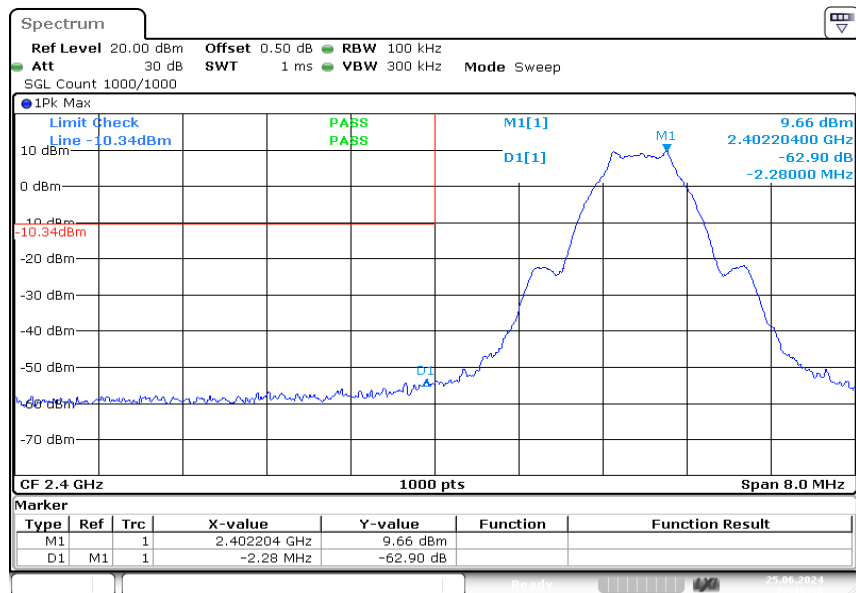


1Mbps_Highest

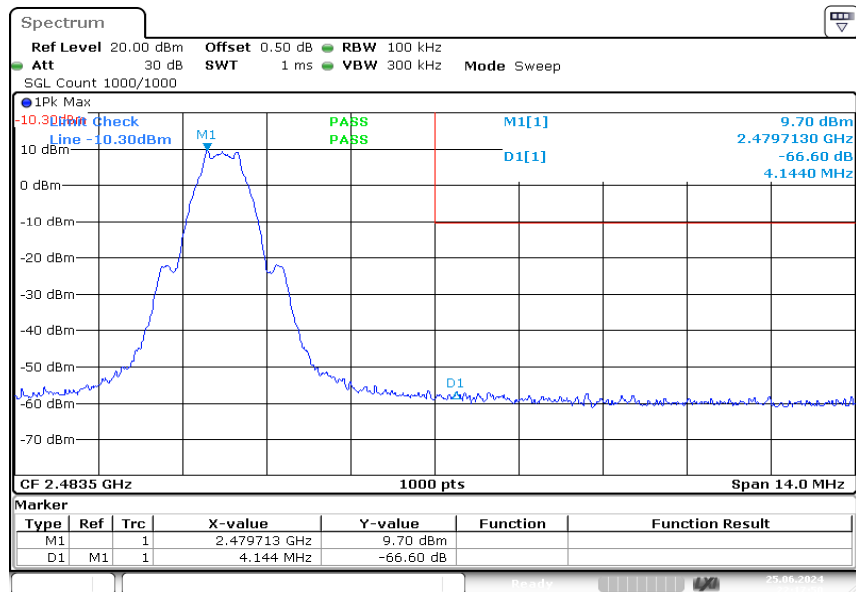

FCC §15.247(e) - POWER SPECTRAL DENSITY**Applicable Standard**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

EUT Setup**Test Procedure**

According to ANSI C63.10-2020 Section 11.10.2

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span >1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = No faster than coupled (auto) time.
- g) Trace mode = max-hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat


Test Data

Test Mode:	Transmitting	Test Engineer:	Stein Peng
Test Date:	2024-06-25	Environment:	Temp.: 22.4°C Humi.: 57% Atm :100.2kPa

Test Result: Compliant


Test Modes	Test Channel	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
BLE 1Mbps	Lowest	2402	1.38	≤ 8.00
	Middle	2440	0.63	≤ 8.00
	Highest	2480	0.41	≤ 8.00

1Mbps_Lowest

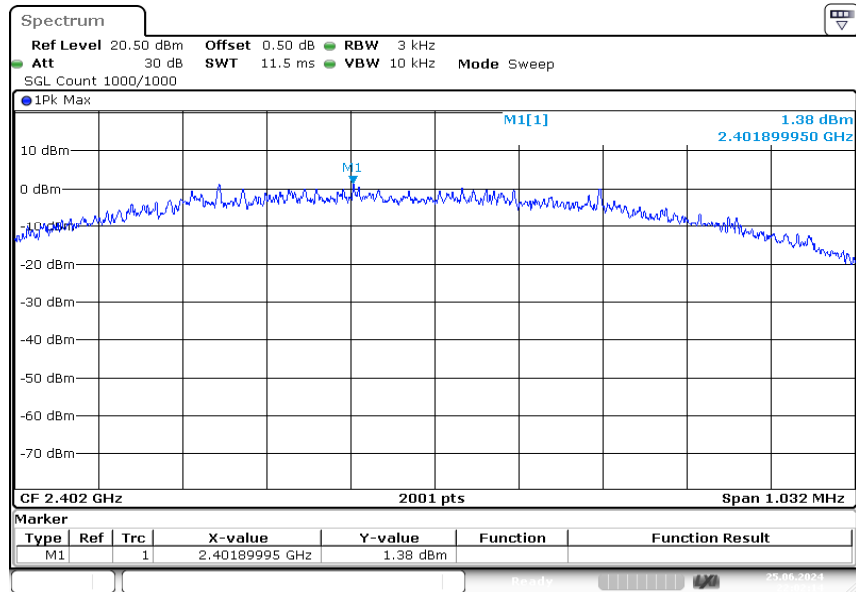


ProjectNo.:XMDN240311-12032E-RF Tester:Stein Peng
 Date: 25.JUN.2024 22:02:14

1Mbps_Middle

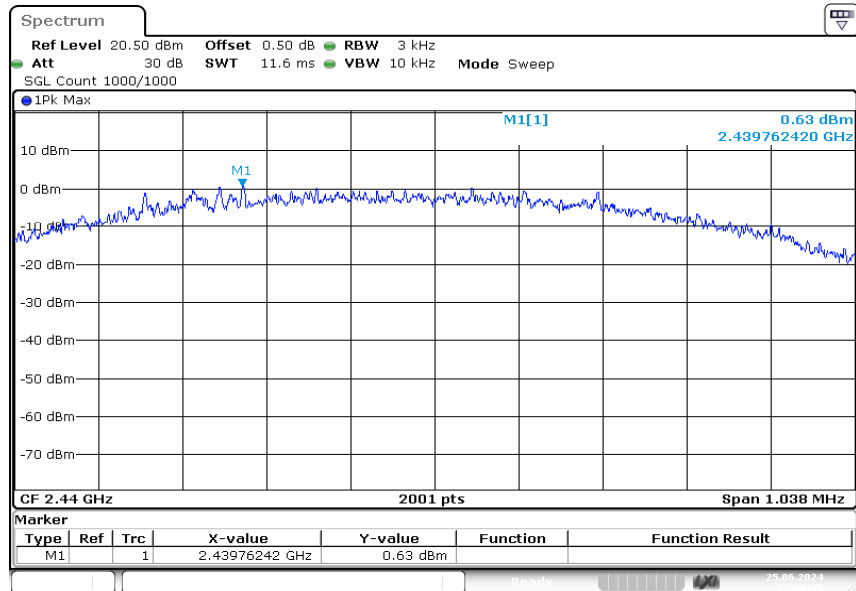

ProjectNo.:XMDN240311-12032E-RF Tester:Stein Peng
 Date: 25.JUN.2024 22:06:35

1Mbps_Highest

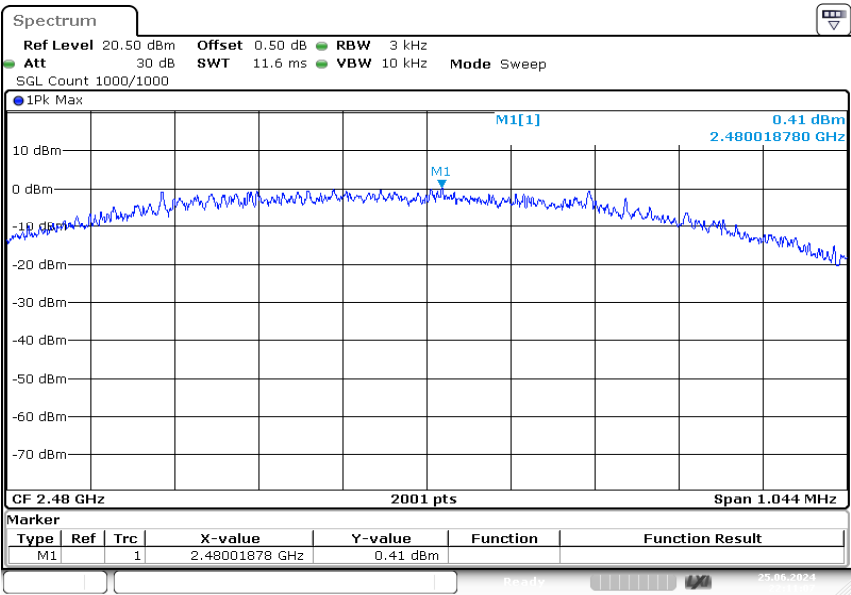

EUT PHOTOGRAPHS

Please refer to the attachment XMDN240311-12032E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and XMDN240311-12032E-RF-INP EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment XMDN240311-12032E-RF-TSP-01 SETUP PHOTOGRAPHS.

Declarations

1. Bay Area Compliance Laboratories Corp. (Xiamen) is not responsible for authenticity of any information provided by the applicant. Information from the applicant that may affect test results are marked with an asterisk “★”.
2. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested.
3. Unless required by the rule provided by the applicant or product regulations, then decision rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.
5. This report cannot be reproduced except in full, without prior written approval of Bay Area Compliance Laboratories Corp. (Xiamen).
6. This report is valid only with a valid digital signature. The digital signature may be available only under the adobe software above version 7.0.

******* END OF REPORT *******