

S

T

S

L

A

B



FCC Part 15B TEST REPORT

Report No: STS1801025E01

Issued for

UNNECTO HOLDING LIMITED

13/F HARBOUR COMMERCIAL BUILDING
122-124 CONNAUGHT ROAD CENTRAL SHEUNG WAN HK

| | |
|-----------------------|-----------------------|
| Product Name: | 4G MOBILE PHONE |
| Brand Name: | unnecto TM |
| Model Name: | U4560 |
| Series Model: | N/A |
| FCC ID: | 2ADR3U4560 |
| Test Standard: | FCC Part 15B |

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.
1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com



**TEST RESULT CERTIFICATION**

Applicant's name.....: UNNECTO HOLDING LIMITED
Address.....: 13/F HARBOUR COMMERCIAL BUILDING
122-124 CONNAUGHT ROAD CENTRAL SHEUNG WAN HK
Manufacture's Name: Shenzhen Malata Mobile Communication Co.,LTD
Address.....: 25/F,Malata Technology Building, NO.9998 Shennan
Avenue,Shenzhen,P.R. China

Product description

Product name.....: 4G MOBILE PHONE
Brand name.....: unnecto TM
Model Name: U4560
Series Model: N/A

Standards.....: FCC Part 15B

Test procedure ANSI C63.4-2014

This device described above has been tested by STS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test.....

Date of performance of tests 02 Jan. 2018~04 Jan. 2018

Date of Issue..... 05 Jan. 2018

Test Result **Pass**

Testing Engineer :

(Kyle Rao)

Technical Manager :

(Chopin Xiao)

Authorized Signatory :


(Vita Li)





Table of Contents

| | |
|---|-----------|
| 1. SUMMARY OF TEST RESULTS | 5 |
| 1.1 TEST FACTORY | 5 |
| 1.2 MEASUREMENT UNCERTAINTY | 5 |
| 2. GENERAL INFORMATION | 6 |
| 2.1 GENERAL DESCRIPTION OF EUT | 6 |
| 2.2 DESCRIPTION OF TEST MODES | 8 |
| 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 9 |
| 2.4 DESCRIPTION OF SUPPORT UNITS | 10 |
| 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS | 11 |
| 3. EMC EMISSION TEST | 12 |
| 3.1 CONDUCTED EMISSION MEASUREMENT | 12 |
| 3.2 RADIATED EMISSION MEASUREMENT | 16 |

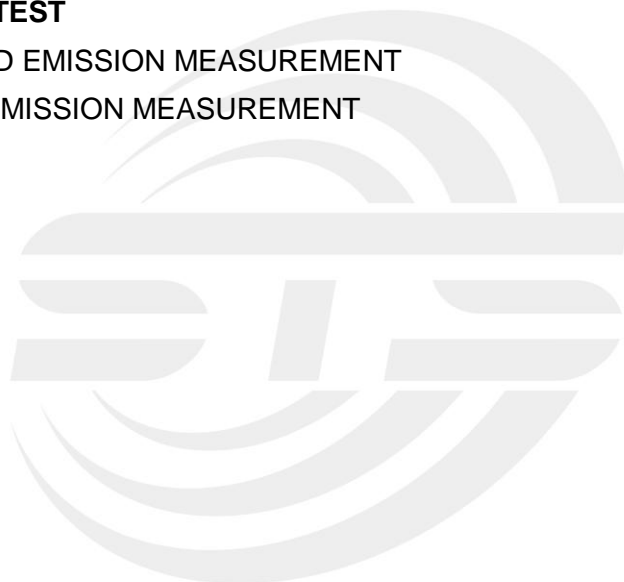

**Revision History**

| Rev. | Issue Date | Report NO. | Effect Page | Contents |
|------|--------------|---------------|-------------|---------------|
| 00 | 05 Jan. 2018 | STS1801025E01 | ALL | Initial Issue |
| | | | | |





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| EMISSION | | | |
|------------------------------|--------------------|--------|--------------------|
| Standard | Item | Result | Remarks |
| FCC 47 CFR Part 15 Subpart B | Conducted Emission | PASS | Meet Class B limit |
| | Radiated Emission | PASS | Meet Class B limit |

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACTORY

| | |
|-------------------|---|
| Company Name: | Shenzhen STS Test Services Co. Ltd. |
| Address: | 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China |
| Telephone: | +86-755 3688 6288 |
| Fax: | +86-755 3688 6277 |
| Registration No.: | CNAS Registration No.: L7649; FCC Registration No.: 625569 |
| | IC Registration No.: 12108A; A2LA Certificate No.: 4338.01; |

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

| No. | Item | Uncertainty |
|-----|---|---------------------|
| 1 | Conducted Emission (9KHz-150KHz) | $\pm 2.88\text{dB}$ |
| 2 | Conducted Emission (150KHz-30MHz) | $\pm 2.67\text{dB}$ |
| 3 | All emissions, radiated(<30M) (9KHz-30MHz) | $\pm 2.45\text{dB}$ |
| 4 | All emissions, radiated(<1G) 30MHz-200MHz | $\pm 3.73\text{dB}$ |
| 5 | All emissions, radiated(<1G) 200MHz-1000MHz | $\pm 3.92\text{dB}$ |
| 6 | All emissions, radiated(>1G) | $\pm 3.31\text{dB}$ |



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

| | | |
|------------------|--|--|
| Product Name | 4G MOBILE PHONE | |
| Brand Name | unnecto ™ | |
| Model Name | U4560 | |
| Series Model | N/A | |
| Model Difference | N/A | |
| Frequency Bands | GSM | 850: 824.2~848.8MHz 1900: 1850.2~1909.8MHz |
| | WCDMA | Band II: 1852.4~1907.6MHz Band V: 826.4~846.6MHz |
| | LTE | Band 2: 1850.7~1909.3MHz Band 4: 1710.7~1754.3MHz Band 12: 699.7~715.3MHz Band 17: 706.5~713.5MHz |
| | WLAN | 802.11b/g/n(HT20/40):2412~2462MHz |
| | Bluetooth | 2402~2480MHz |
| Modulation Mode | GSM | GMSK for GPRS; GMSK and 8PSK for EDGE |
| | WCDMA | QPSK; HSDPA:QPSK/16QAM; HSUPA:BPSK |
| | LTE | QPSK/16QAM; |
| | WLAN | CCK/OFDM/DBPSK/DAPSK |
| | Bluetooth | BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8DPSK |
| | BLE | GFSK |
| Adapter | Input: AC100-240V, 200mA, 50/60Hz Output: DC 5V, 500mA | |
| Battery | Rated Voltage: 3.7V Capacity: 1700mAh Charge Limit: 4.2V | |



| | |
|-------------------------|----------------------------|
| Hardware version number | L71_M_V3.0 |
| Software version number | U4560NA_602CNT_V1_20171123 |

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.





2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description |
|--------------|--------------------------------|
| Mode 1 | USB port communication with PC |


| For Conducted Test | |
|--------------------|--------------------------------|
| Final Test Mode | Description |
| Mode 1 | USB port communication with PC |

| For Radiated Test | |
|-------------------|--------------------------------|
| Final Test Mode | Description |
| Mode 1 | USB port communication with PC |

NOTE:

1. The test modes were carried out for all operation modes. Only worst case will be shown in this report.
2. We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz) for which the device is capable of operation.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

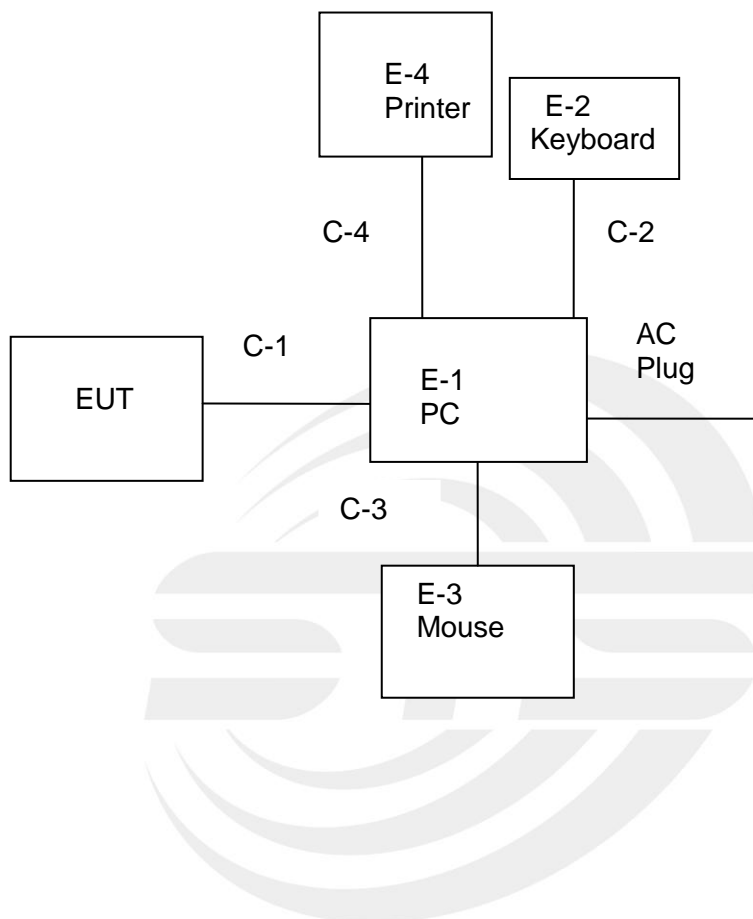



2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | Note |
|------|-----------|------------|----------------|---------------------|
| E-1 | PC | 4CV428DQXR | 500-320cx | Auxiliary equipment |
| E-2 | Keyboard | HP | PR1101U | Auxiliary equipment |
| E-3 | Mouse | MOTOSPEED | F66 | Auxiliary equipment |
| E-4 | Printer | HP | HP1020 | Auxiliary equipment |
| | | | | |
| | | | | |
| | | | | |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|-----------------|--------------|--------|---------------------|
| C-1 | USB Cable (FTP) | NO | 95cm | Auxiliary equipment |
| C-2 | USB Cable (FTP) | NO | 100cm | Auxiliary equipment |
| C-3 | USB Cable (FTP) | NO | 105cm | Auxiliary equipment |
| C-4 | USB Cable (FTP) | NO | 110cm | Auxiliary equipment |
| | | | | |
| | | | | |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.
- (4) PC is the FCC DOC is approved.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Radiation Test equipment

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Calibrated Until |
|---------------------------|--------------|------------------|------------|------------------|------------------|
| EMI Test Receiver | R&S | ESCI | 101427 | 2017.10.15 | 2018.10.14 |
| Bilog Antenna | TESEQ | CBL6111D | 34678 | 2017.10.30 | 2018.10.29 |
| Horn Antenna | SCHWARZBECK | BBHA 9120D(1201) | 9120D-1343 | 2017.10.27 | 2018.10.26 |
| Power Amplifier | Agilent | 8449B | 60538 | 2017.10.15 | 2018.10.14 |
| Spectrum Analyzer | Agilent | E4407B | MY50140340 | 2017.03.11 | 2018.03.10 |
| Pre-amplifier(1G-18 G) | Agilent | 8449B | 60538 | 2017.10.28 | 2018.10.27 |
| Spectrum Analyzer | Agilent | N9020A | MY49100060 | 2017.03.11 | 2018.03.10 |
| Pre-amplifier(0.1M-3 GHz) | EM | EM330 | 60538 | 2017.03.12 | 2018.03.11 |

Conduction Test equipment

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Calibrated Until |
|-------------------|--------------|----------|------------|------------------|------------------|
| EMI Test Receiver | R&S | ESPI | 102086 | 2017.10.15 | 2018.10.14 |
| LISN | R&S | ENV216 | 101242 | 2017.10.15 | 2018.10.14 |
| LISN | EMCO | 3810/2NM | 23625 | 2017.10.15 | 2018.10.14 |
| Absorbing clamp | R&S | MDS-21 | 100668 | 2017.10.19 | 2018.10.18 |



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits

| FREQUENCY (MHz) | Conducted Emission Limits (dBuV) | | | |
|-----------------|----------------------------------|---------|------------|-----------|
| | Class A | | Class B | |
| | Quasi-peak | Average | Quasi-peak | Average |
| 0.15 -0.5 | 79.00 | 66.00 | 66 - 56 * | 56 - 46 * |
| 0.50 -5.0 | 73.00 | 60.00 | 56.00 | 46.00 |
| 5.0 -30.0 | 73.00 | 60.00 | 60.00 | 50.00 |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |


3.1.2 TEST PROCEDURE

- The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
 - I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
 - LISN at least 80 cm from nearest part of EUT chassis.
 - For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

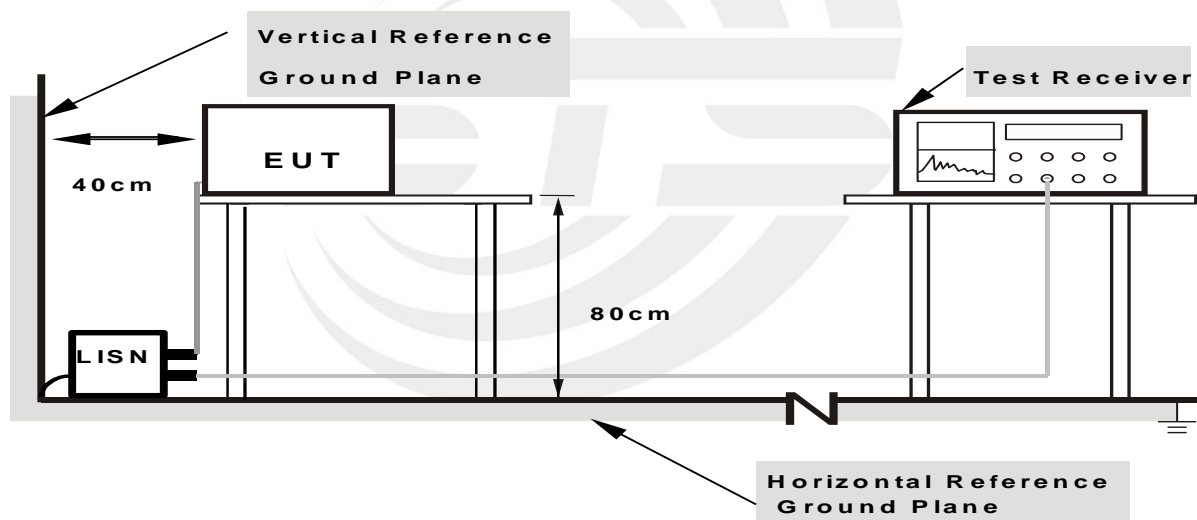

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.6 TEST RESULTS

| | | | |
|---------------|--------------|--------------------|--------|
| Temperature: | 23.5 °C | Relative Humidity: | 59% |
| Phase: | L | Test Mode: | Mode 1 |
| Test Voltage: | AC 120V/60Hz | | |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|---------------|--------------|-------------|----------|
| 1 | 0.1500 | 52.66 | 9.79 | 62.45 | 66.00 | -3.55 | QP |
| 2 | 0.1500 | 35.46 | 9.79 | 45.25 | 56.00 | -10.75 | AVG |
| 3 | 0.1820 | 47.61 | 9.78 | 57.39 | 64.39 | -7.00 | QP |
| 4 | 0.1820 | 31.94 | 9.78 | 41.72 | 54.39 | -12.67 | AVG |
| 5 | 0.5060 | 26.94 | 10.02 | 36.96 | 56.00 | -19.04 | QP |
| 6 | 0.5060 | 10.86 | 10.02 | 20.88 | 46.00 | -25.12 | AVG |
| 7 | 1.7900 | 25.30 | 9.78 | 35.08 | 56.00 | -20.92 | QP |
| 8 | 1.7900 | 9.27 | 9.78 | 19.05 | 46.00 | -26.95 | AVG |
| 9 | 3.2260 | 29.21 | 9.81 | 39.02 | 56.00 | -16.98 | QP |
| 10 | 3.2260 | 13.97 | 9.81 | 23.78 | 46.00 | -22.22 | AVG |
| 11 | 5.9180 | 34.38 | 9.87 | 44.25 | 60.00 | -15.75 | QP |
| 12 | 5.9180 | 20.93 | 9.87 | 30.80 | 50.00 | -19.20 | AVG |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV






| | | | |
|---------------|--------------|--------------------|--------|
| Temperature: | 23.5 °C | Relative Humidity: | 59% |
| Phase: | N | Test Mode: | Mode 1 |
| Test Voltage: | AC 120V/60Hz | | |

| No. | Frequency (MHz) | Reading (dBUV) | Factor (dB) | Result (dBUV) | Limit (dBUV) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|---------------|--------------|-------------|----------|
| 1 | 0.1660 | 51.61 | 9.79 | 61.40 | 65.16 | -3.76 | QP |
| 2 | 0.1660 | 34.69 | 9.79 | 44.48 | 55.16 | -10.68 | AVG |
| 3 | 0.2260 | 42.95 | 9.97 | 52.92 | 62.60 | -9.68 | QP |
| 4 | 0.2260 | 28.28 | 9.97 | 38.25 | 52.60 | -14.35 | AVG |
| 5 | 1.8460 | 25.70 | 9.86 | 35.56 | 56.00 | -20.44 | QP |
| 6 | 1.8460 | 8.98 | 9.86 | 18.84 | 46.00 | -27.16 | AVG |
| 7 | 3.3860 | 31.03 | 9.92 | 40.95 | 56.00 | -15.05 | QP |
| 8 | 3.3860 | 14.88 | 9.92 | 24.80 | 46.00 | -21.20 | AVG |
| 9 | 7.1780 | 34.58 | 9.88 | 44.46 | 60.00 | -15.54 | QP |
| 10 | 7.1780 | 19.07 | 9.88 | 28.95 | 50.00 | -21.05 | AVG |
| 11 | 8.8380 | 35.33 | 9.91 | 45.24 | 60.00 | -14.76 | QP |
| 12 | 8.8380 | 23.59 | 9.91 | 33.50 | 50.00 | -16.50 | AVG |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBUV

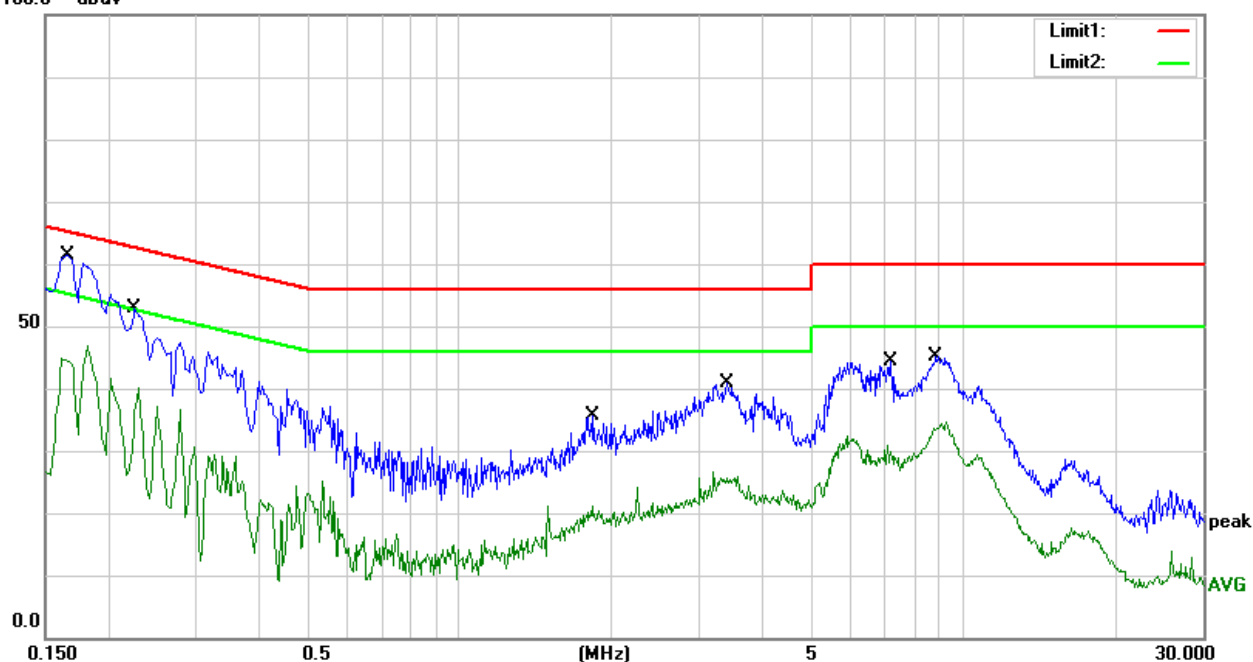

Note: The test voltage is 100-240V, both of which have assessment tests, and the worst test data is in the report.



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 Radiated Emission Limits

In case the emission fall within the restricted band specified on 15.105(a)&109(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

LIMITS OF RADIATED EMISSION MEASUREMENT

| FREQUENCY (MHz) | Class A (dBuV/m) (at 3M) | | Class B (dBuV/m) (at 3M) | |
|-----------------|--------------------------|---------|--------------------------|---------|
| | PEAK | AVERAGE | PEAK | AVERAGE |
| Above 1000 | 80 | 60 | 74 | 54 |

Note:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

| Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz) | Range (MHz) |
|---|---|
| Below 1.705 | 30 |
| 1.705 – 108 | 1000 |
| 108 – 500 | 2000 |
| 500 – 1000 | 5000 |
| Above 1000 | 5th harmonic of the highest frequency or 40 GHz, whichever is lower |



| Spectrum Parameter | Setting |
|---------------------------------------|---|
| Attenuation | Auto |
| Detector | Peak |
| Start Frequency | 1000 MHz(Peak/AV) |
| Stop Frequency | 5th harmonic (Peak/AV) |
| RB / VB (emission in restricted band) | 30MHz to 1000MHz: 100 KHz / 300 KHz Above 1000MHz: 1 MHz / 3 MHz |

| Receiver Parameter | Setting |
|------------------------|---|
| Attenuation | Auto |
| Start ~ Stop Frequency | 30MHz to 1000MHz: 100 KHz / 300 KHz Above 1000MHz: 1 MHz / 3 MHz |

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz and above 1GHz.

- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

- c. the height of the antenna shall vary between 1m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.

- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD

No deviation

3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency 30MHz~1GHz

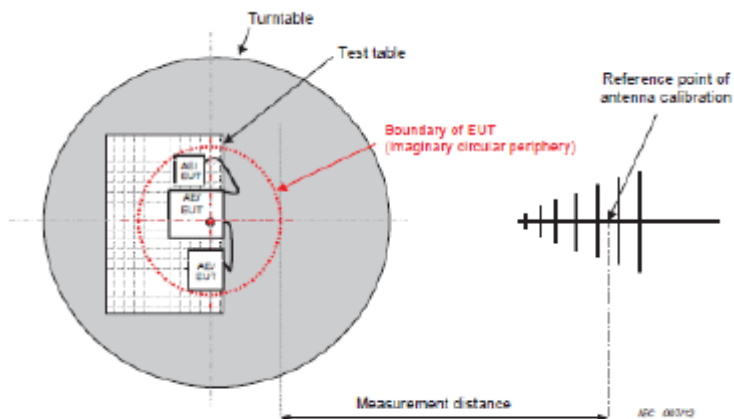


Figure C.1 – Measurement distance

(B) Radiated Emission Test-Up Frequency Above 1GHz

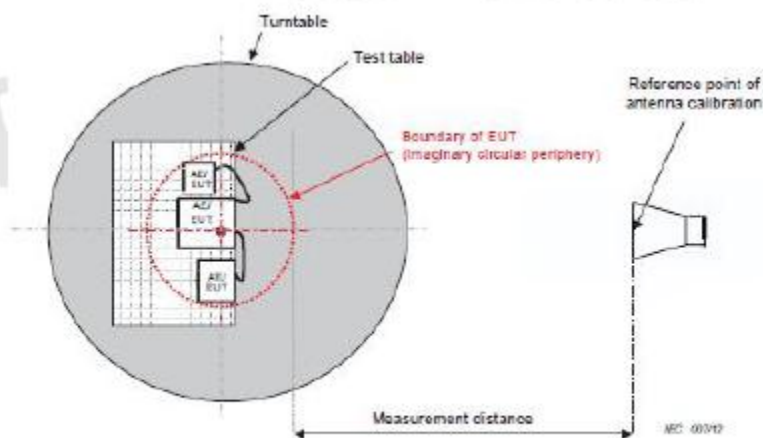


Figure C.1 – Measurement distance

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.6 TEST RESULTS


30MHz -1000MHz

| | | | |
|---------------|--------------|--------------------|--------|
| Temperature: | 24.6 °C | Relative Humidity: | 58% |
| Phase: | Horizontal | Test Mode: | Mode 1 |
| Test Voltage: | AC 120V/60Hz | | |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Results (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|------------------|----------------|-------------|----------|
| 1 | 51.8430 | 42.49 | -22.00 | 20.49 | 40.00 | -19.51 | QP |
| 2 | 82.9385 | 51.79 | -21.96 | 29.83 | 40.00 | -10.17 | QP |
| 3 | 183.8440 | 50.68 | -19.76 | 30.92 | 43.50 | -12.58 | QP |
| 4 | 238.3102 | 46.72 | -17.88 | 28.84 | 46.00 | -17.16 | QP |
| 5 | 400.4318 | 40.50 | -11.22 | 29.28 | 46.00 | -16.72 | QP |
| 6 | 574.6258 | 44.98 | -6.67 | 38.31 | 46.00 | -7.69 | QP |

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit

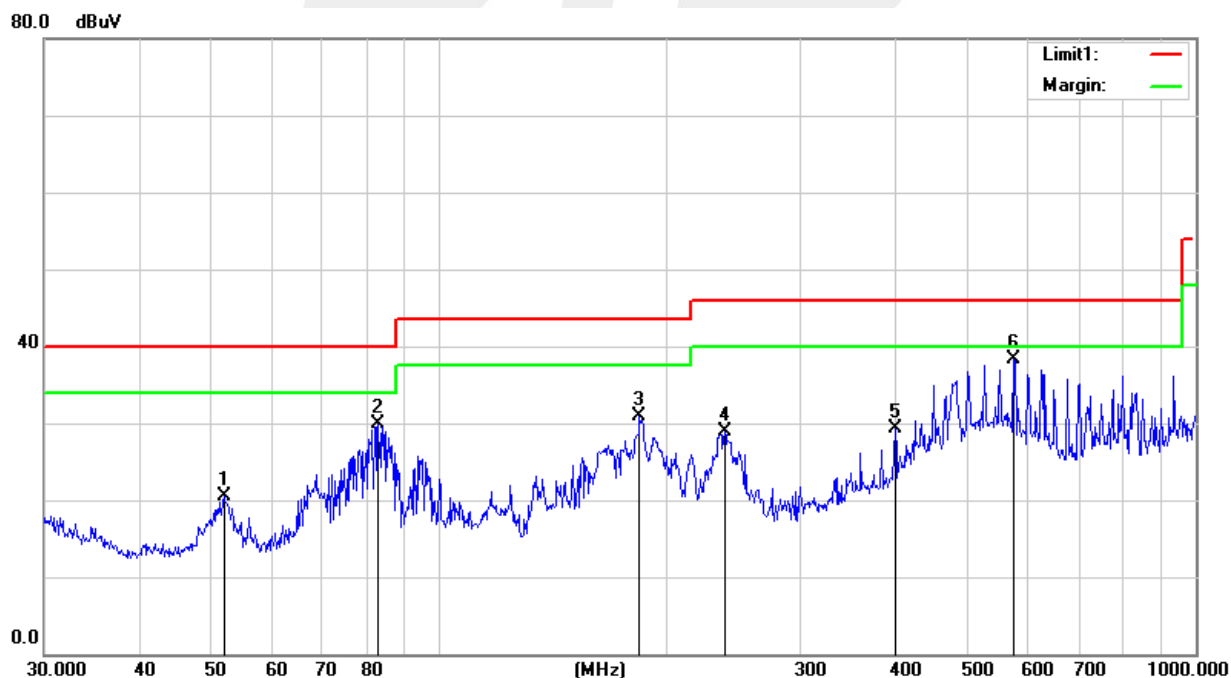




| | | | |
|---------------|--------------|--------------------|--------|
| Temperature: | 24.6 °C | Relative Humidity: | 58% |
| Phase: | Vertical | Test Mode: | Mode 1 |
| Test Voltage: | AC 120V/60Hz | | |

| No. | Frequency (MHz) | Reading (dBUV) | Factor (dB) | Results (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|------------------|----------------|-------------|----------|
| 1 | 43.9658 | 42.89 | -18.37 | 24.52 | 40.00 | -15.48 | QP |
| 2 | 82.0705 | 45.21 | -22.17 | 23.04 | 40.00 | -16.96 | QP |
| 3 | 175.6516 | 47.85 | -19.39 | 28.46 | 43.50 | -15.04 | QP |
| 4 | 237.4760 | 43.76 | -17.94 | 25.82 | 46.00 | -20.18 | QP |
| 5 | 475.4990 | 44.02 | -9.57 | 34.45 | 46.00 | -11.55 | QP |
| 6 | 625.0780 | 41.73 | -6.43 | 35.30 | 46.00 | -10.70 | QP |

Remark:

1. Margin = Result (Result = Reading + Factor)-Limit

80.0 dBUV

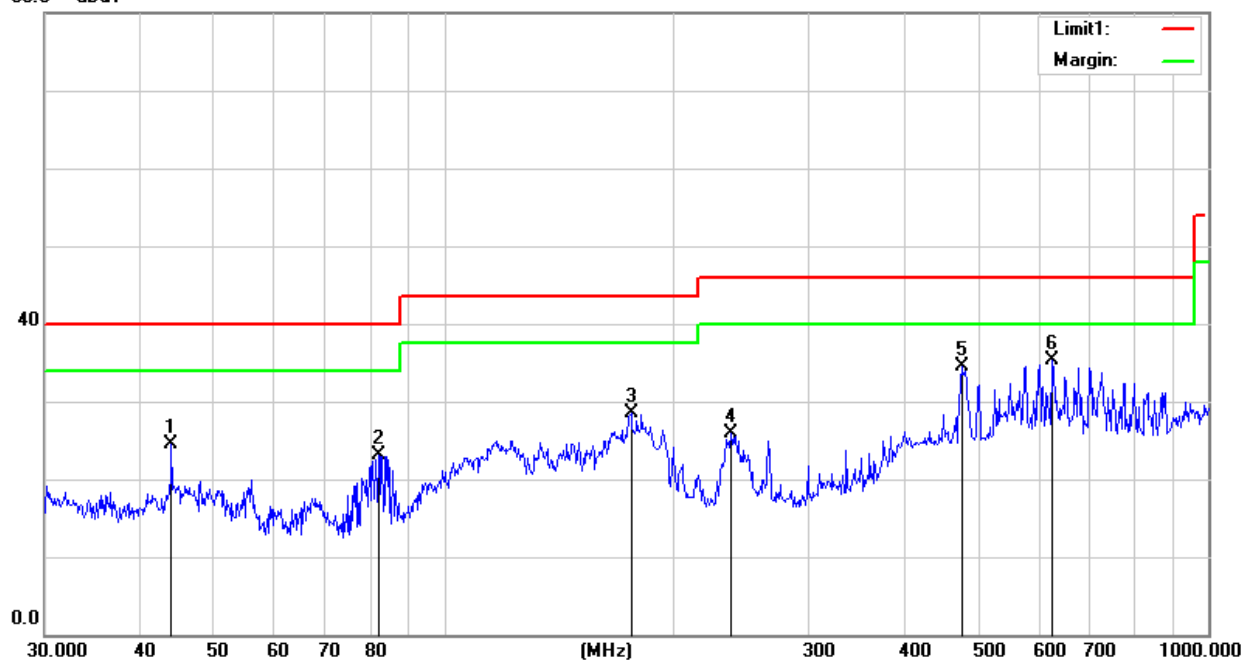



(1 GHz to 25GHz.)

| | | | |
|---------------|---------------------|--------------------|--------|
| Temperature: | 26 °C | Relative Humidity: | 54% |
| Phase: | Vertical/Horizontal | Test Mode: | Mode 1 |
| Test Voltage: | AC 120V/60Hz | | |

PK

| Freq. | Ant. Pol | Peak | Amplifier | Loss | Antenna Factor | Orrected Factor | Actual Fs | Peak | Peak |
|---------|----------|----------------|-----------|------|----------------|-----------------|---------------|----------------|-------------|
| (MHz) | H/V | Reading (dBuV) | (dB) | (dB) | (dB/m) | (dB) | Peak (dBuV/m) | Limit (dBuV/m) | margin (dB) |
| 2005.32 | H | 58.23 | 43.81 | 4.36 | 25.93 | -12.54 | 44.71 | 74.00 | -29.29 |
| 2508.61 | H | 52.35 | 44.47 | 6.32 | 27.64 | -10.81 | 41.84 | 74.00 | -32.16 |
| 3000.42 | H | 54.13 | 44.78 | 6.71 | 28.22 | -9.82 | 44.28 | 74.00 | -29.72 |
| 4400.87 | H | 53.25 | 44.35 | 8.42 | 30.44 | -5.48 | 47.76 | 74.00 | -26.24 |
| 2005.34 | V | 56.14 | 43.81 | 4.36 | 25.95 | -12.54 | 42.64 | 74.00 | -31.36 |
| 2508.61 | V | 53.25 | 44.47 | 6.32 | 27.69 | -10.83 | 42.79 | 74.00 | -31.21 |
| 3000.43 | V | 55.29 | 44.78 | 6.71 | 28.26 | -9.85 | 45.48 | 74.00 | -28.52 |
| 4400.86 | V | 51.24 | 44.35 | 8.42 | 30.45 | -5.48 | 45.76 | 74.00 | -28.24 |
| 5506.84 | V | 35.21 | 44.21 | 9.35 | 32.23 | -2.59 | 32.58 | 74.00 | -41.42 |

AV

| Freq. | Ant. Pol | AV | Amplifier | Loss | Antenna Factor | Orrected Factor | | AV | AV |
|---------|----------|----------------|-----------|------|----------------|-----------------|-------------|----------------|-------------|
| (MHz) | H/V | Reading (dBuV) | (dB) | (dB) | (dB/m) | (dB) | AV (dBuV/m) | Limit (dBuV/m) | margin (dB) |
| 1403.35 | H | 48.26 | 43.81 | 4.36 | 25.11 | -16.00 | 33.92 | 54.00 | -20.08 |
| 3000.76 | H | 47.12 | 44.47 | 6.32 | 28.26 | -9.80 | 37.23 | 54.00 | -16.77 |
| 4002.47 | H | 39.65 | 44.78 | 6.71 | 29.74 | -6.60 | 31.32 | 54.00 | -22.68 |
| 5506.84 | H | 45.26 | 44.35 | 8.42 | 32.32 | -2.50 | 41.65 | 54.00 | -12.35 |
| 1403.35 | V | 36.38 | 43.81 | 4.36 | 25.15 | -16.00 | 22.08 | 54.00 | -31.92 |
| 2508.61 | V | 49.33 | 44.47 | 6.32 | 27.69 | -10.83 | 38.87 | 54.00 | -15.13 |
| 3000.76 | V | 45.26 | 44.78 | 6.71 | 28.26 | -9.80 | 35.45 | 54.00 | -18.55 |
| 4002.47 | V | 37.25 | 44.35 | 8.42 | 29.74 | -6.60 | 31.06 | 54.00 | -22.94 |
| 5506.84 | V | 30.28 | 44.21 | 9.35 | 32.35 | -2.50 | 27.77 | 54.00 | -26.23 |



Notes:

1. Measuring frequencies from 1 GHz to 25GHz.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode of the emission shown in Actual FS column.
3. The frequency that above 5.5GHz is mainly from the environment noise.

*****END OF THE REPORT*****

