



Radio Intentional EMC Test Report: EDCS - 1424674

For
CP-DX80 Bluetooth Module
Against the following Specifications :
47 CFR 15.247, 15.205, 15.209
FCC ID: LDKDX800956
and
RSS-210 Issue 8, RSS-Gen Issue 3
IC ID: 2461B-DX800956

Cisco Systems
EMC Laboratory
170 West Tasman Drive
San Jose, CA 95134

Author:
Approved By: Dilip Patel
Title: Regulatory Compliance Manager

This report replaces any previously entered test report under EDCS -1424674

This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.



SECTION 1: OVERVIEW	3
TEST SUMMARY	3
SECTION 2: ASSESSMENT INFORMATION	4
2.3 REPORT ISSUE DATE	5
2.4 TESTING FACILITIES	5
2.6 EUT DESCRIPTION	6
2.7 SCOPE OF ASSESSMENT	6
2.8 UNITS OF MEASUREMENT	6
2.9 REPORT TEMPLATE CONTROL No.....	7
SECTION 3: RESULT SUMMARY.....	8
3.1 RESULTS SUMMARY TABLE	8
SECTION 4: SAMPLE DETAILS.....	9
4.1 SAMPLE DETAILS	9
4.2 SYSTEM DETAILS	10
4.3 MODE OF OPERATION DETAILS	10
4.4 TEST MODE, MODULATION AND DATA PACKET TYPE DESCRIPTION	10
4.4.1 TEST MODE AND WORST CASE DETERMINATION	11
SECTION 5: MODIFICATIONS	11
5.1 SAMPLE MODIFICATIONS PERFORMED DURING ASSESSMENT	11
APPENDIX A: FORMAL TEST RESULTS	12
A.1 OCCUPIED BANDWIDTH (20 DB BANDWIDTH & 99% BANDWIDTH)	12
A.2 MAXIMUM CONDUCTED OUTPUT POWER	18
A.3 CARRIER FREQUENCY SEPARATION	33
A.4 NUMBER OF HOPPING FREQUENCIES.....	34
A.5 DWELL TIME / AVERAGE TIME OF OCCUPANCY	36
A.6 BAND EDGE (CONDUCTED).....	48
A.7 CONDUCTED SPURIOUS EMISSIONS.....	61
A.8 RECEIVER SPURIOUS EMISSIONS	67
A.9 TX RADIATED SPURIOUS / RESTRICTED BANDS.	71
A.10 AC CONDUCTED EMISSIONS FOR AC POWER ADAPTER:	83
APPENDIX B: ABBREVIATION KEY AND DEFINITIONS.....	87
APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST	88
APPENDIX D: TEST PROCEDURES.....	89



Section 1: Overview

Test Summary

The samples were assessed against the tests detailed in section 3 under the requirements of the following standards:

Emissions:

CFR47 Part 15.247

CFR47 Part 15.205

RSS-210, Issue 8

RSS-Gen, Issue 3

Notes:

Measurements were made in accordance with:

- 1) FCC docket #:DA 00-0705:2000
- 2) ANSI C63.10:2009



Section 2: Assessment Information

2.1 General

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal Government.

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results, due to production tolerances and measurement uncertainties.
- b) The apparatus was set up and exercised using the defined configuration and modes of operation in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%
- e) All AC testing was performed at one or more of the following supply voltages:

110V (+/-10%) 60Hz

- f) Cisco Systems, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). The scope of accreditation, certificate number 1178-01 is referenced in appendix C, along with further details.

This report must not be reproduced except in full, without written approval of Cisco Systems, Inc.



2.2 Start Date of Testing

April 11, 2014

2.3 Report Issue Date

Cisco Systems, Inc. uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,
170 West Tasman Drive
San Jose, CA 95134,
USA

Registration Numbers for Industry Canada

Cisco System Site	Site Identifier
Building P, 10m Chamber	Company #: 4624-2
Building P, 5m Chamber	Company #: 4624-1
Building N, 5m Chamber	Company #: 6111
Building I, 5m Chamber	Company #: 6112

Test Engineers

Danh Le



2.5 Equipment Assessed (EUT)

DX80

2.6 EUT Description

The DX80 is the next generation 1080p Video Endpoint with key expansion module support. This new generation of desktop phone incorporates an Android based operating system. Three USB ports, one micro OTG USB port, one higher powered USB-proprietary connector combination (AUX) and one standard USB Port. Support HDMI with a maximum external resolution of 1920 x 1200, also includes a single 3.5mm headset jack.

WiFi (802.11 A/B/G/N) & Bluetooth 3.0 capabilities (Bluetooth operating at ver 2.1 + EDR)

Murata module, LBEH1ZNSXC-526, supports for 802.11/a/b/g/n + Bluetooth 3.0 module

SDIO interface to WLAN – Omap4 SD host controller port 5

PCM (McBSP1) interface to Bluetooth

WiFi + BT chip - Marvell 88W8787

Clocks – 38.4MHz 20ppm for main clock, 32.768KHz sleep clock

Supports 802.11i security standard

Coexistence between WiFi and BT with one antenna to both connected to the 2.4GHz radios

Single antenna for 2.4 and 5GHz bands with duplex inside the module

2.7 Scope of Assessment

Tests have been performed in accordance with the relevant Test and Assessment Plan (TAP), a copy of which is contained in Appendix F of this report, and the relevant Cisco Systems, Inc. radio test procedures (EDCS-420238). This test report may not cover all of the tests highlighted in the test plan.

2.8 Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

Emission level [dBuV] = Indicated voltage level [dBuV] + Cable Loss [dB] + Other correction factors [dB]

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

Level in uV/m = Common Antilogarithm [(X dBuV/m)/20] = Y uV/m



Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	$\pm 2.4 \times 10^{-7}$
temperature measurements	$\pm 0.54^\circ$.
humidity measurements	$\pm 2.3\%$
DC and low frequency measurements	$\pm 2.5\%$.

2.9 Report Template Control No.

EDCS#703456



Section 3: Result Summary

3.1 Results Summary Table

Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.247 (b) (1) RSS-210 A8.4 (2)	Peak Output Power: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watt.	Pass
FCC 15.247 (a) (1) RSS-210 A8.1 (b)	Carrier Separation: For frequency hopping systems according to a hopping channel carrier frequencies that are separated by 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW	Pass
FCC 15.247 (a) (1) RSS-210 A8.1 (a)	20 dB Bandwidth: The bandwidth of a frequency hopping channel is the – 20 dB emission bandwidth, measured with the hopping stopped, between upper and lower frequency from top carrier (dBc) down.	Reference
FCC 15.247 (a) (iii) RSS-210 A8.1 (d)	No. of Hopping Frequencies / Time Occupancy: Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.	Pass
FCC 15.247 (d) RSS-210 A8.5	Conducted Spurious Emissions / Band-Edge:: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required	Pass



FCC 15.247 (d) RSS-210 A8.5 FCC 15.205 (a) RSS-Gen 7.2.2	Restricted band: Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) and RSS-Gen 7.2.2 must also comply with the radiated emission limits specified in FCC 15.209 (a) and RSS-Gen 7.2.5.	Pass
---	--	------

Radiated Emissions (General requirements)

Basic Standard	Technical Requirements / Details	Result
FCC 15.209 (a) RSS-Gen 7.2.5	TX Spurious Emissions: Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the filed strength limits table in this section.	Pass
RSS-Gen 4.10	RX Spurious Emissions: Spurious emissions from the receivers shall not exceed the radiated limits of receiver spurious emissions shown in table 2 in section 6.1.	Pass
FCC 15.207 RSS-Gen 7.2.4	AC conducted Emissions: Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.	Pass

* MPE calculation is recorded in a separate report

Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. During preliminary testing all three planes (X,Y & Z) were evaluated to determine "Worst Case". The data collected determine that the orientation used for this report was deemed "Worst Case".

4.1 Sample Details

Sample Number	Equipment Details	Serial Number	Part Number
S01	DX80	FOC 1812NODH	CS068-00355-01 04

The following antennas were evaluated as part of this testing process. The antennas listed reflect the maximum gain allowed for each family type of antenna:



Fixed internal Amphenol Dual Band Antenna, Gain = 4.61dBi (no external antenna can be used)

4.2 System Details

System #	Description	Samples
1	Cisco Tele Presence System DX80	S01

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Bluetooth Test Mode	System is connected to the MT8852B Bluetooth Tester and placed in either continuous TX Mode or Duty Cycle Mode with Hopping Function Turned ON or OFF per test requirements.

4.4 Test Mode, Modulation and Data Packet Type Description

Test Mode	Modulation	Data Packet
A	GFSK	DH5
B	$\pi/4$ -DQPSK	2-H5
C	8-DPSK	3-DH5
Note1: Table above represents the worst case scenarios for all modulation and data packet type combinations.		



4.4.1 Test Mode and worst case Determination

Item	Test Item	Test Mode	Test Frequency (MHz)
A.1	20 dB Bandwidth	A, B & C	2402, 2441, 2480
A.2	Max. Conducted Output Power	All available modulation and packet type	2402, 2441, 2480
	Worst Case	Mode C (Note: 1)	
A.3	Carrier Frequency Separation	Any with hopping enable	2441, 2442
A.4	Number of Hopping Frequencies	Any with hopping enable	2402 – 2483.5
A.5	Dwell Time / Average Time Occupancy	A, B & C / A, B & C w/ hopping enable	2441 / All Channels
A.6	Band-Edge	A, B & C	2402, 2480
A.7	Conducted Spurious Emissions	C	2402, 2441, 2480
A.8	RX Radiated Emissions	Receive / Idle	-----
A.9	TX Radiated Emissions	C	2402, 2441, 2480
A.10	Conducted Emissions	C / Receive	(TX mode)
Note1: Worst case is determined as the combination of modulation and packet type with the highest output power.			

Section 5: Modifications

5.1 Sample Modifications Performed During Assessment

No modifications were performed during assessment.



Appendix A: Formal Test Results**A.1 Occupied Bandwidth (20 dB Bandwidth & 99% Bandwidth)**

20dB bandwidth is the emission bandwidth across the lower frequency and the upper frequency at -20 dB levels relatively to the top carrier reference level with hopping function disabled.

99% bandwidth is the recovered amplitude data points, beginning at the lowest frequency, are placed in running sum until 0.5% of the total is reached and that frequency recorded. The process repeated for the highest frequency data points. The span between the two recorded frequencies is the 99% occupied bandwidth.

Measurement Procedure



In accordance with KDB Publication DA 00-705

Test Data Table

Frequency (MHz)	20dB BW (MHz)	99% BW (MHz)	Modulation Type	Packet Type
2.402	1.004	0.899	GFSK	DH5
2.402	1.315	1.186	$\pi/4$ -DQPSK	2-DH5
2.402	1.316	1.190	8-DPSK	3-DH5
2.441	1.012	0.893	GFSK	DH5
2.441	1.348	1.202	$\pi/4$ -DQPSK	2-DH5
2.441	1.325	1.188	8-DPSK	3-DH5
2.480	1.045	0.897	GFSK	DH5
2.480	1.306	1.188	$\pi/4$ -DQPSK	2-DH5
2.480	1.325	1.191	8-DPSK	3-DH5





Graphical Test Results

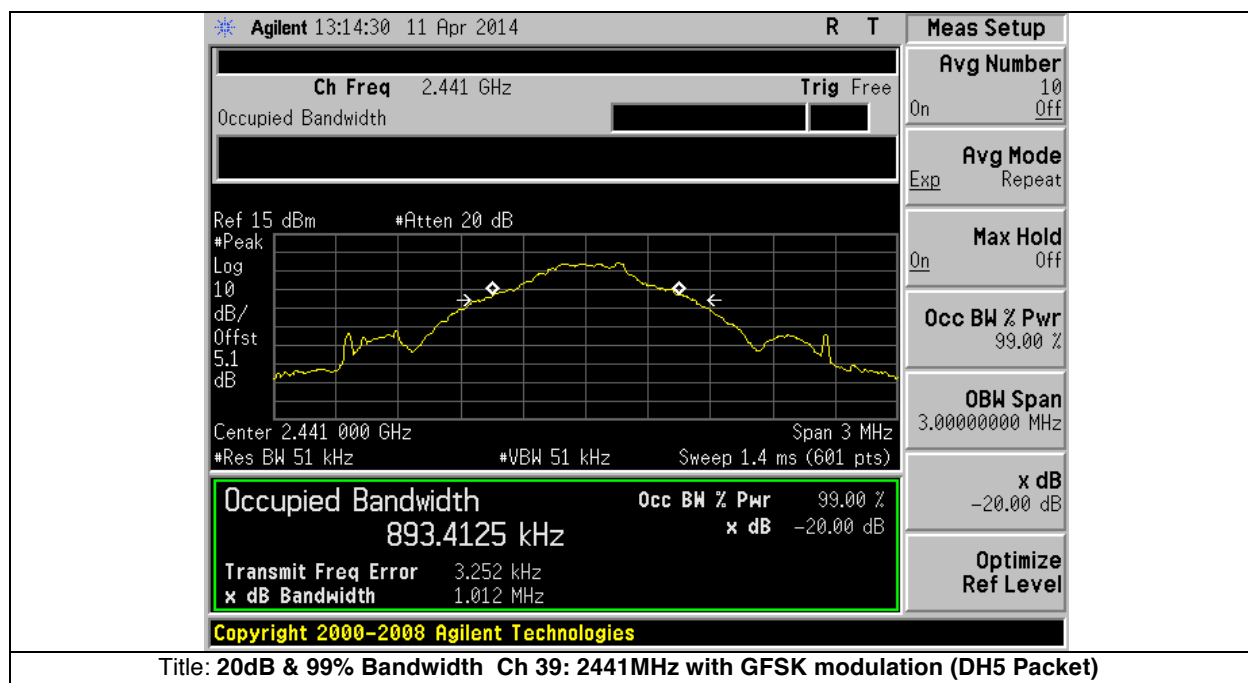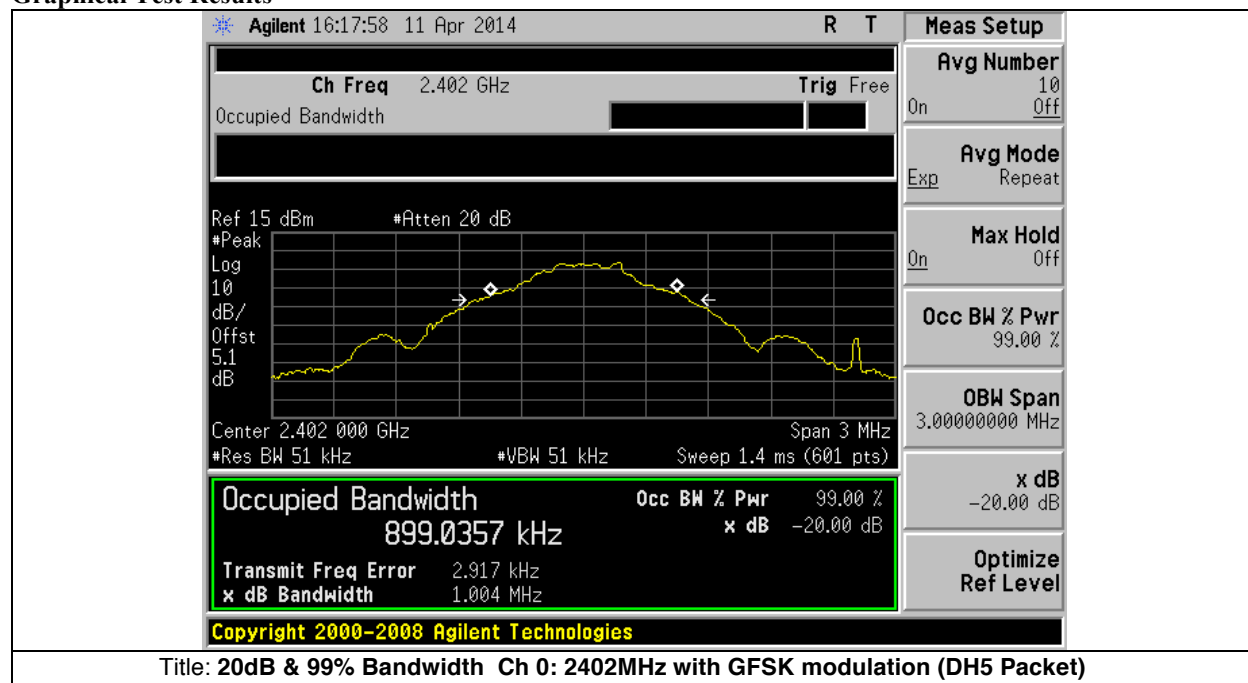





Graphical Test Results

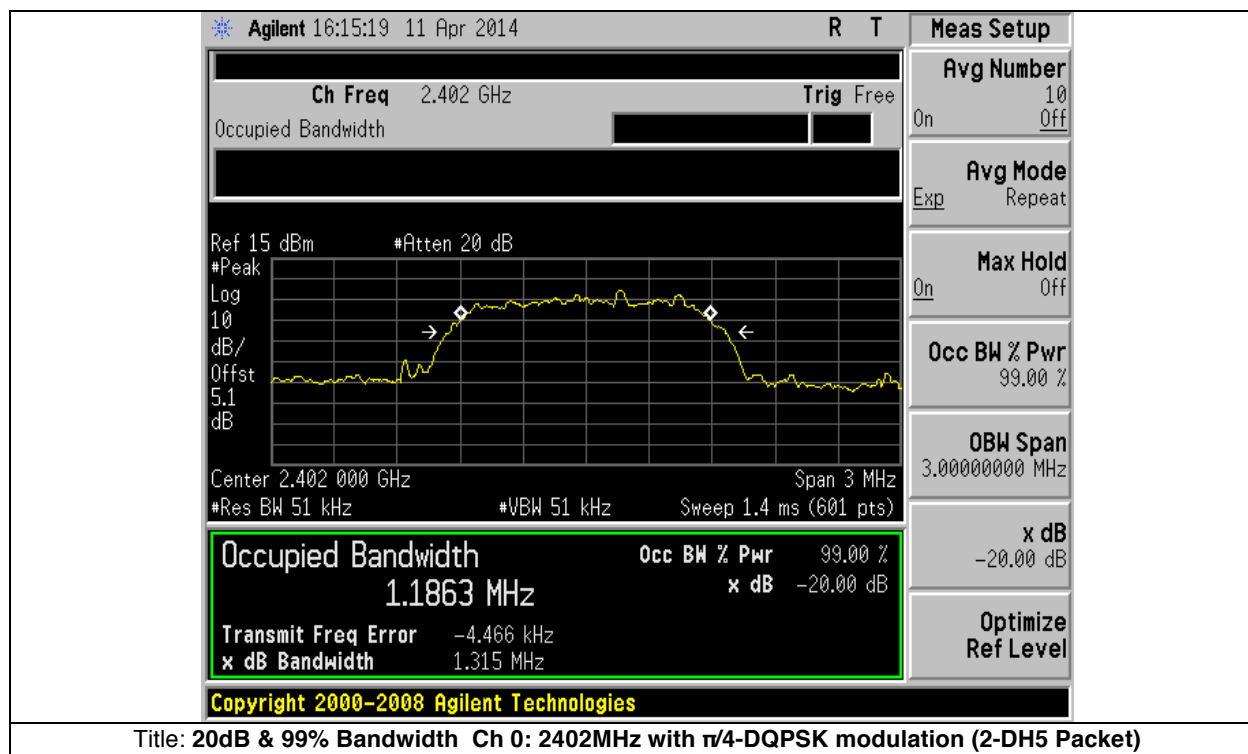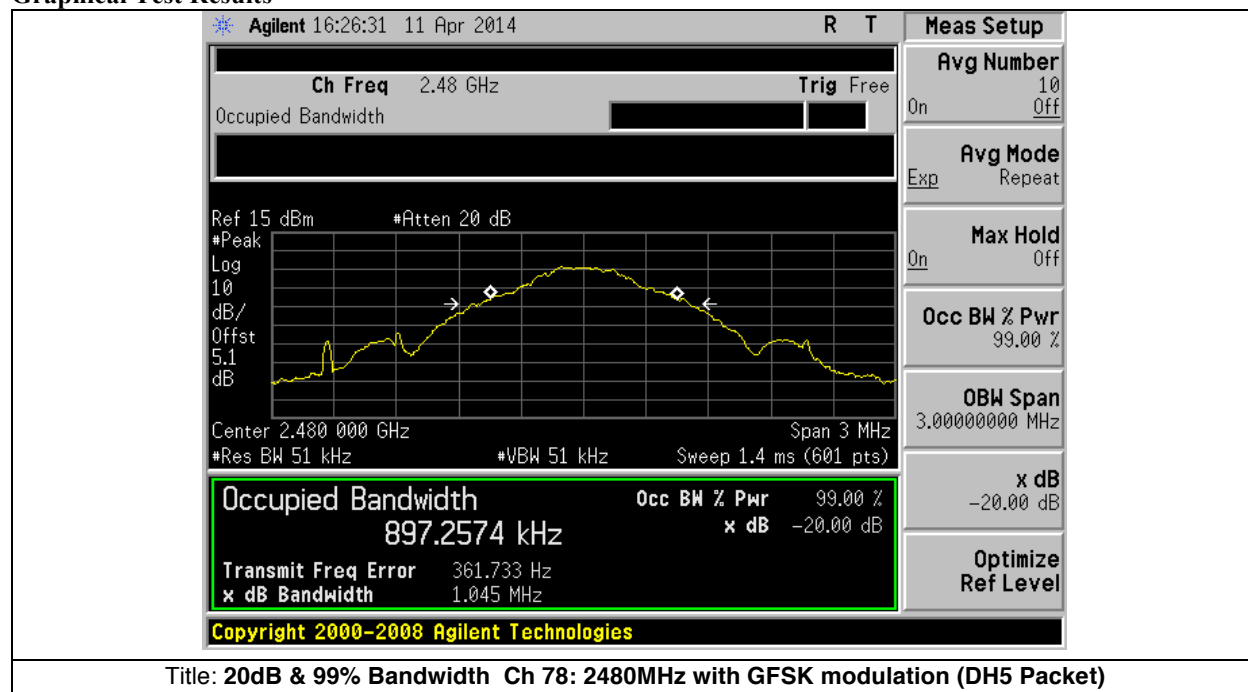






Graphical Test Results

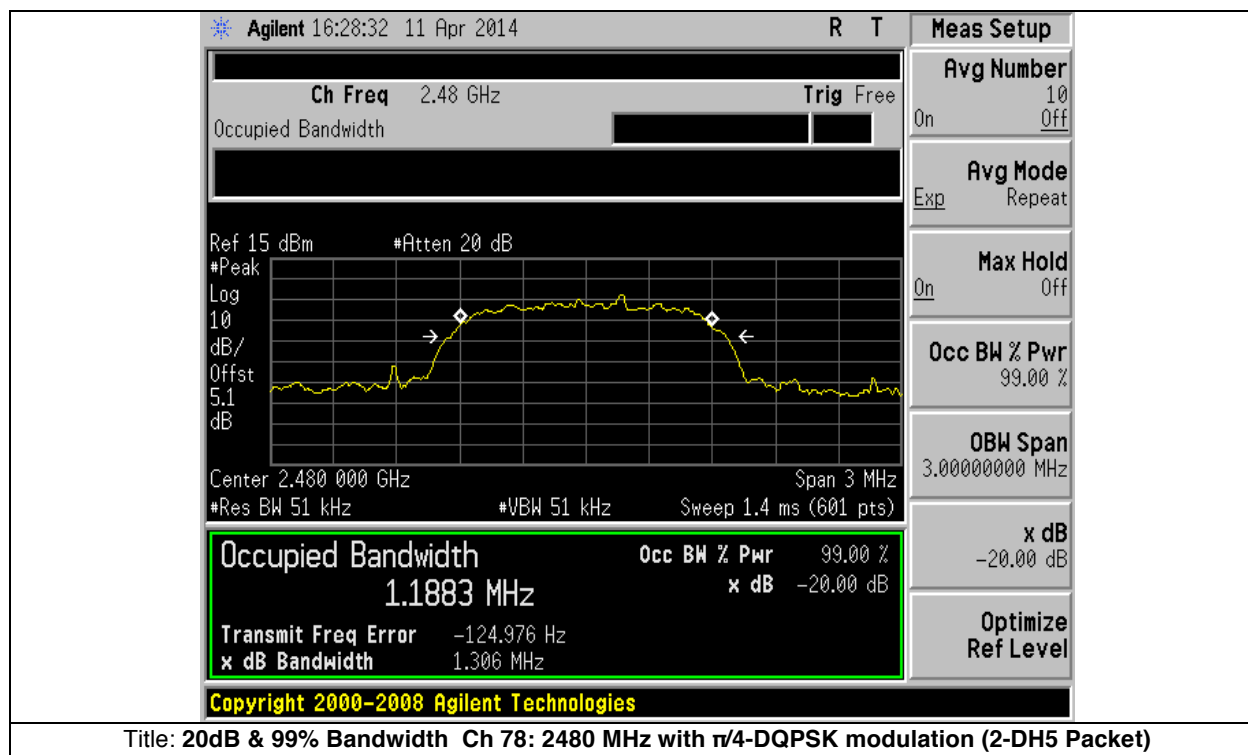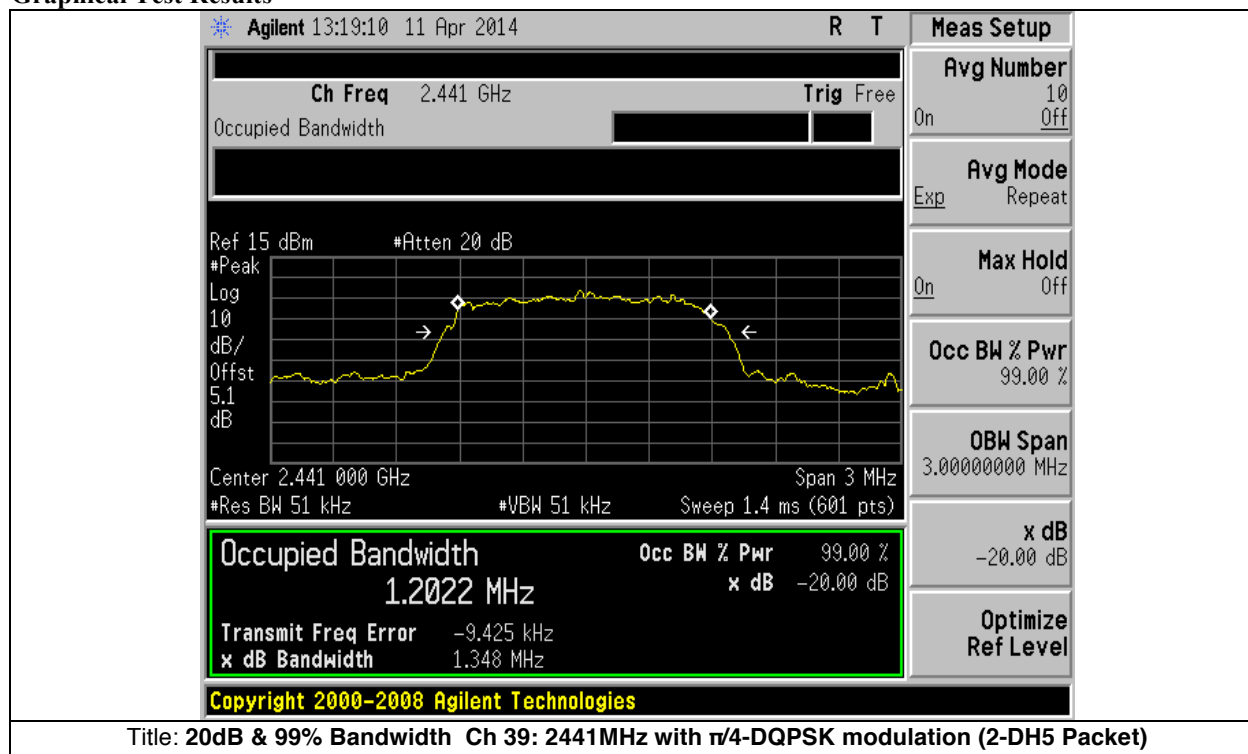



Graphical Test Results

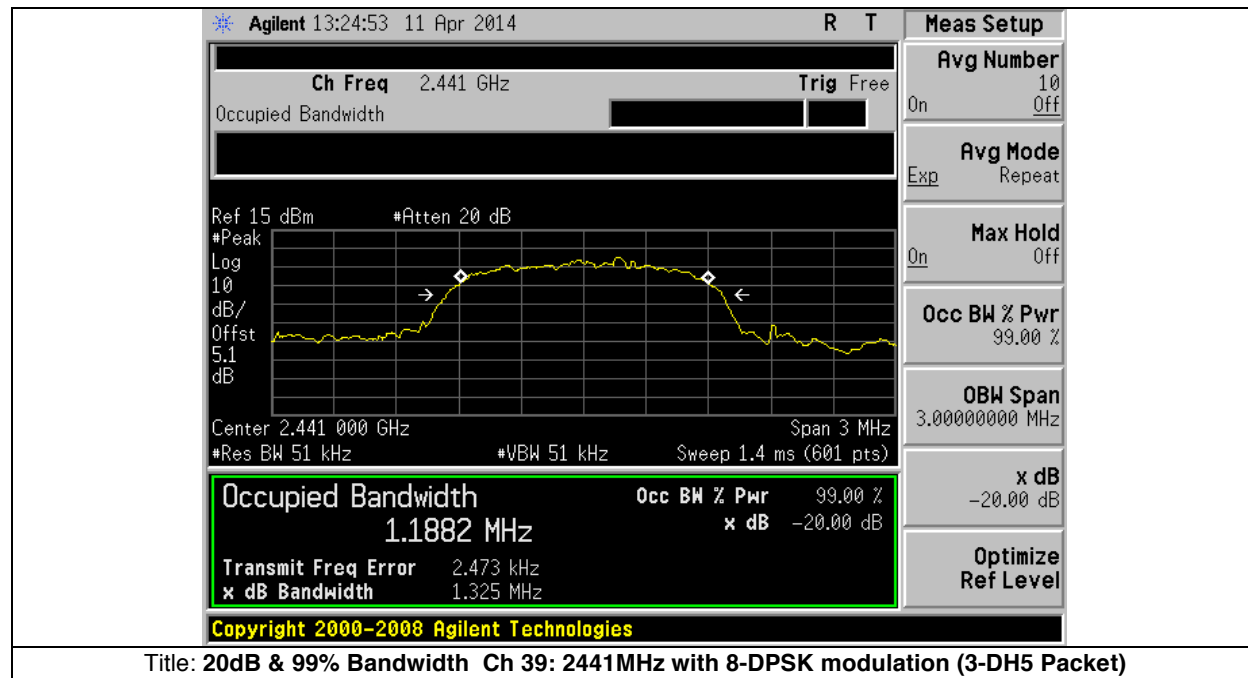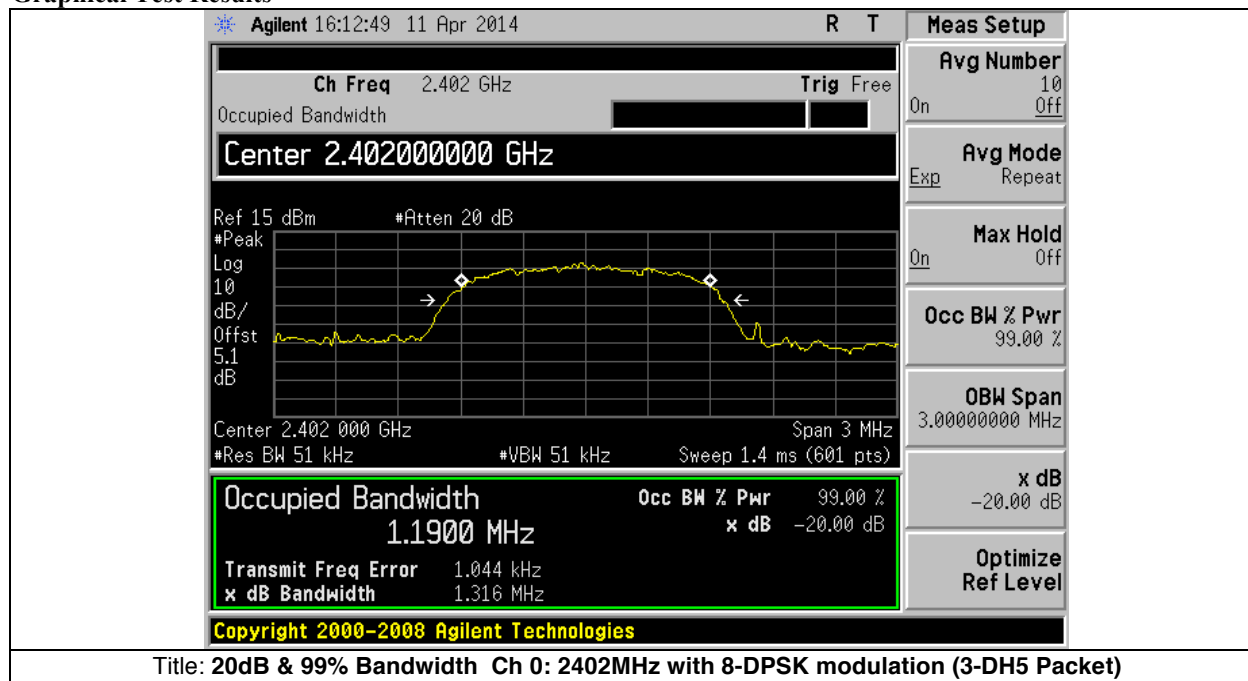

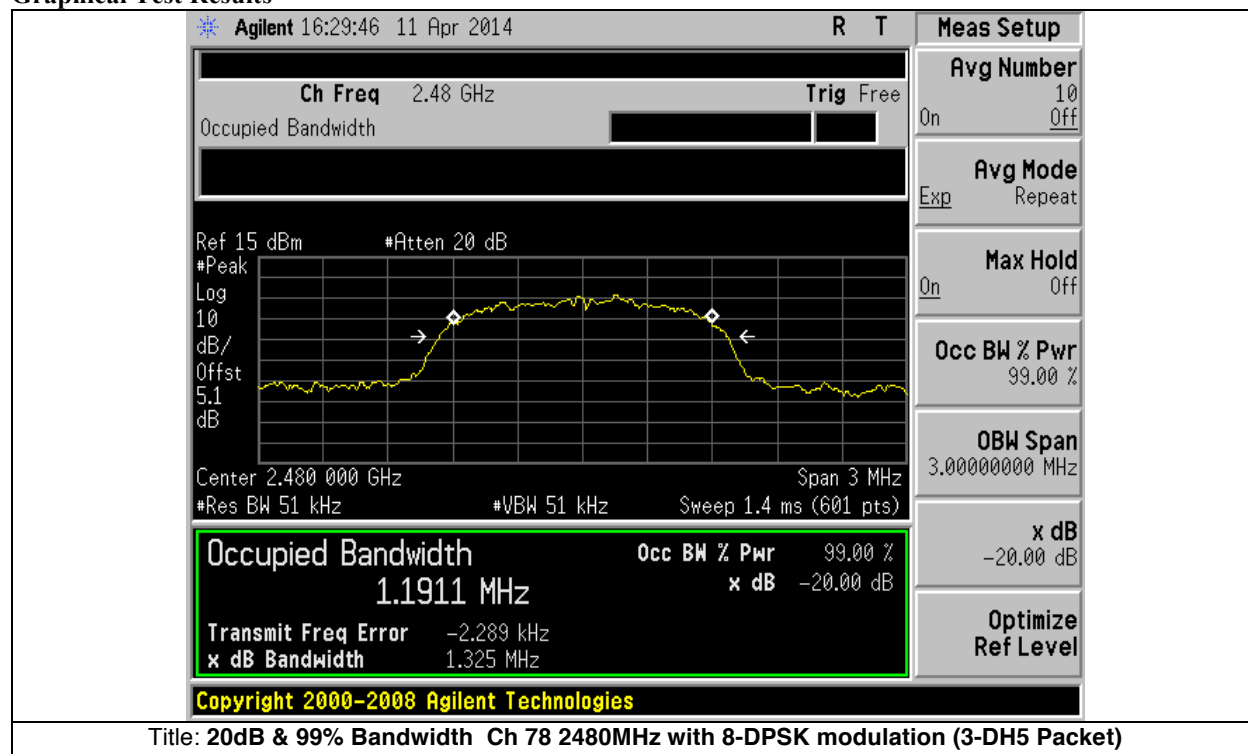**Graphical Test Results**



A.2 Maximum Conducted Output Power

15.247 & RSS-210 A8.4:

The maximum conducted output power of the intentional radiator for systems using frequency hopping systems in the 2400-2483.5MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Measurement Procedure

In accordance with KDB Publication DA 00-705



Test Data Table

Frequencies (MHz)	Modulation	Data rate (Mbps)	Packet Type	Peak Output Power (dBm)	Limits (dBm)	Results
2402	GFSK	1 Mbps	DH1	2.09	30	Pass
2402	GFSK	1 Mbps	DH3	2.11	30	Pass
2402	GFSK	1 Mbps	DH5	2.12	30	Pass
2402	$\pi/4$ -DQPSK	2 Mbps	2-DH1	4.70	30	Pass
2402	$\pi/4$ -DQPSK	2 Mbps	2-DH3	4.66	30	Pass
2402	$\pi/4$ -DQPSK	2 Mbps	2-DH5	4.92	30	Pass
2402	8-DPSK	3 Mbps	3-DH1	5.28	30	Pass
2402	8-DPSK	3 Mbps	3-DH3	5.42	30	Pass
2402	8-DPSK	3 Mbps	3-DH5	5.46	30	Pass
2441	GSFK	1 Mbps	DH1	1.75	30	Pass
2441	GSFK	1 Mbps	DH3	1.76	30	Pass
2441	GSFK	1 Mbps	DH5	1.80	30	Pass
2441	$\pi/4$ -DQPSK	2 Mbps	2-DH1	4.19	30	Pass
2441	$\pi/4$ -DQPSK	2 Mbps	2-DH3	4.29	30	Pass
2441	$\pi/4$ -DQPSK	2 Mbps	2-DH5	4.49	30	Pass
2441	8-DPSK	3 Mbps	3-DH1	4.93	30	Pass
2441	8-DPSK	3 Mbps	3-DH3	4.99	30	Pass
2441	8-DPSK	3 Mbps	3-DH5	5.01	30	Pass
2480	GSFK	1 Mbps	DH1	0.63	30	Pass
2480	GSFK	1 Mbps	DH3	0.64	30	Pass
2480	GSFK	1 Mbps	DH5	0.65	30	Pass
2480	$\pi/4$ -DQPSK	2 Mbps	2-DH1	3.42	30	Pass
2480	$\pi/4$ -DQPSK	2 Mbps	2-DH3	3.12	30	Pass
2480	$\pi/4$ -DQPSK	2 Mbps	2-DH5	3.15	30	Pass
2480	8-DPSK	3 Mbps	3-DH1	3.92	30	Pass
2480	8-DPSK	3 Mbps	3-DH3	3.95	30	Pass
2480	8-DPSK	3 Mbps	3-DH5	3.58	30	Pass

Note: Worst case is determined as the modulation with Highest Output Power (DH5, 2-DH5, 3-DH5)





Graphical Test Results

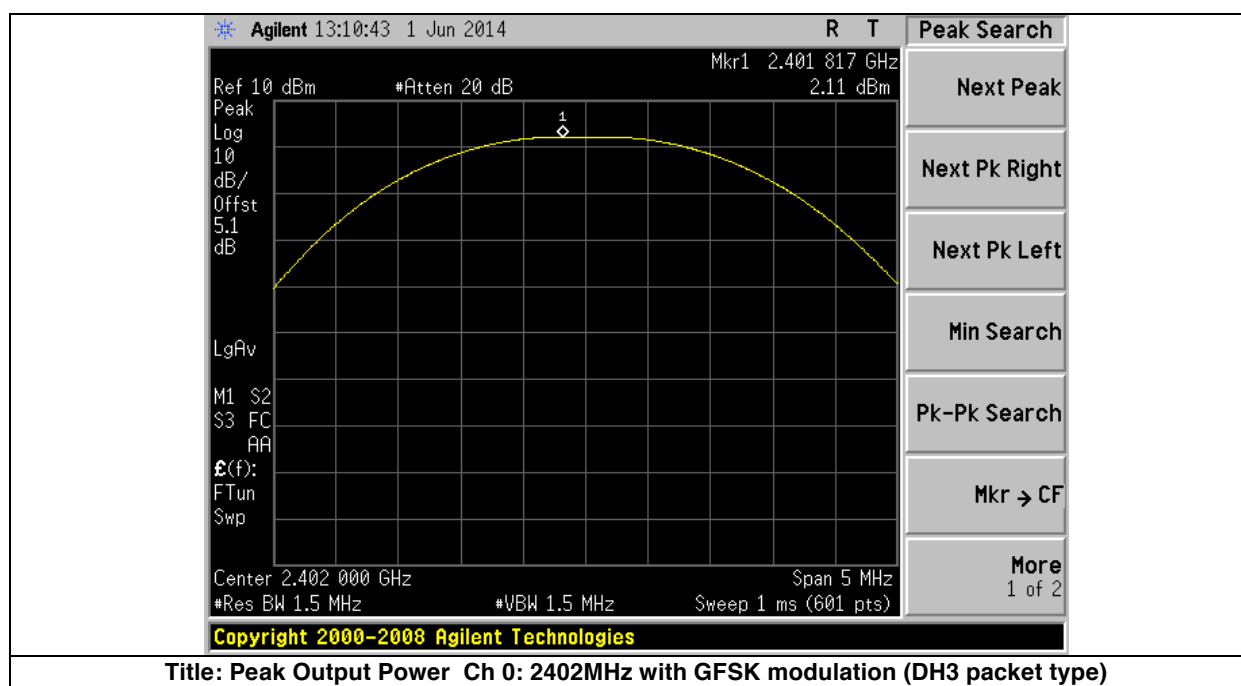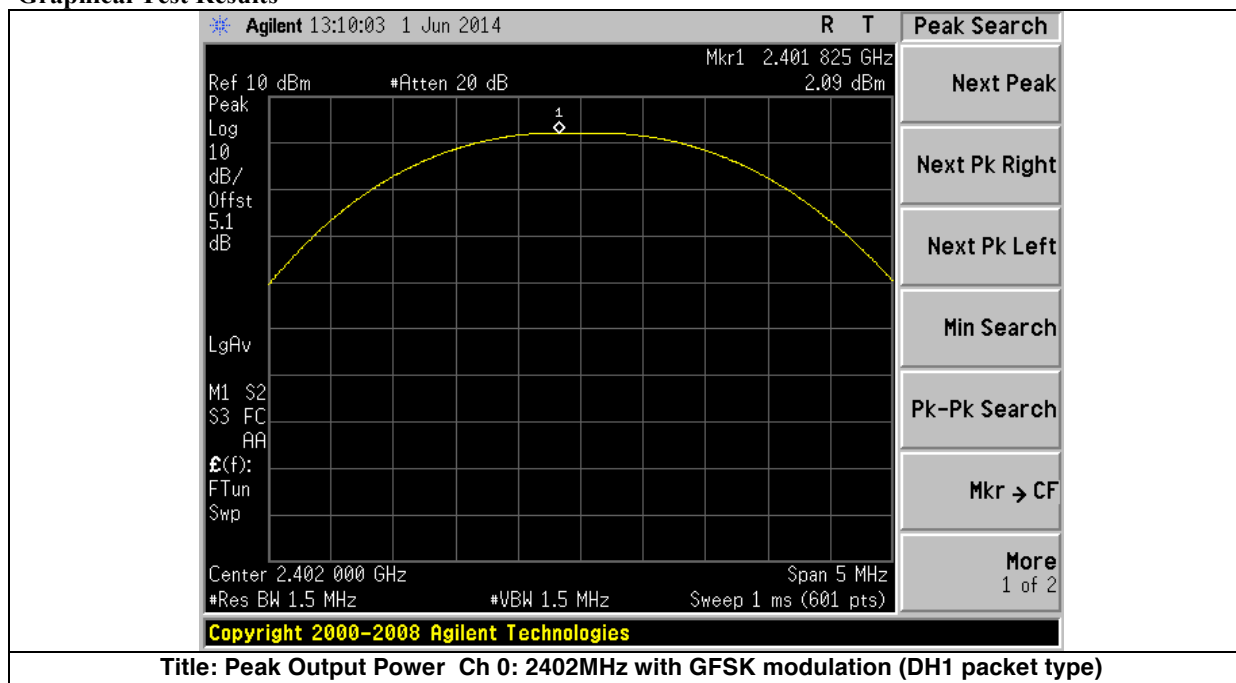





Graphical Test Results

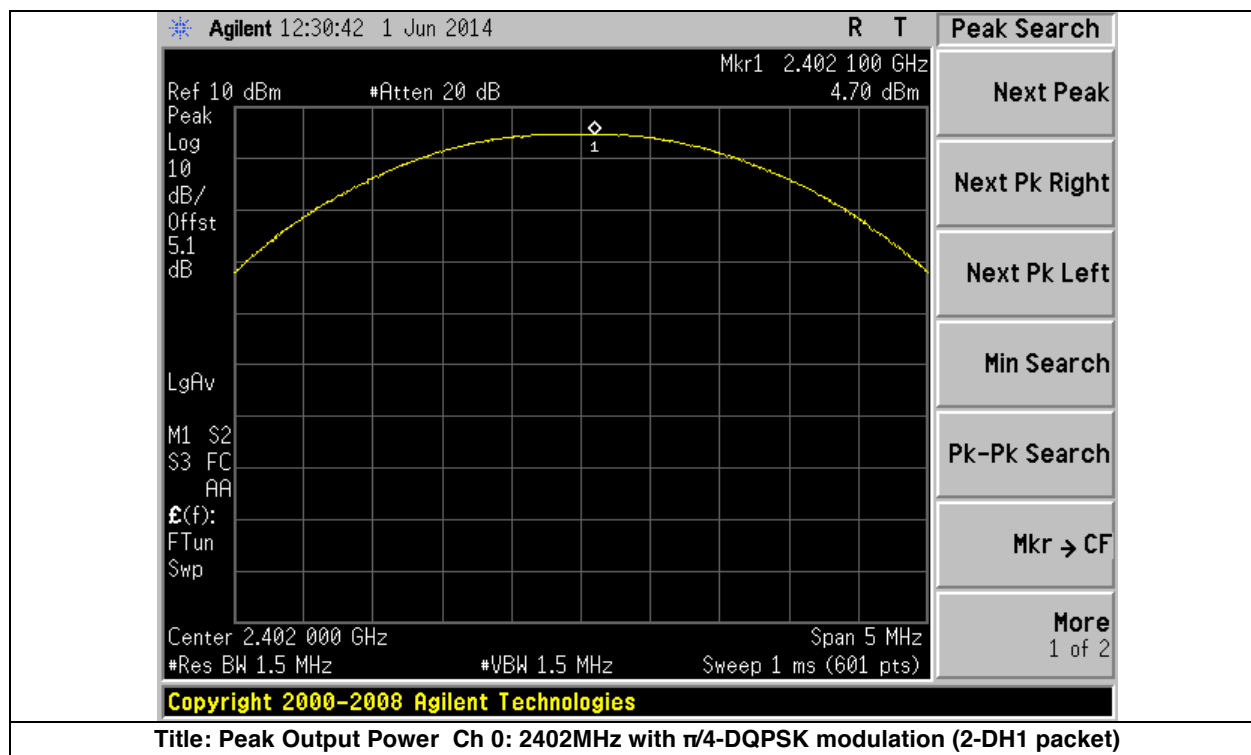
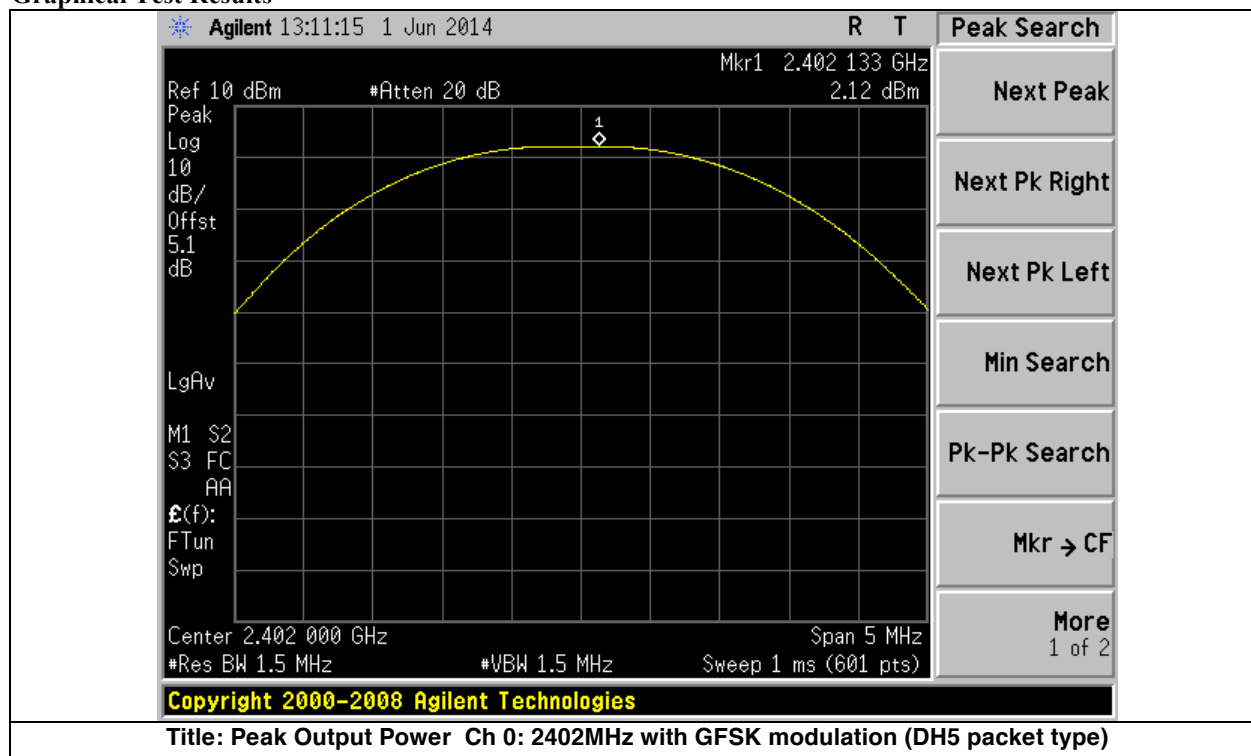






Graphical Test Results

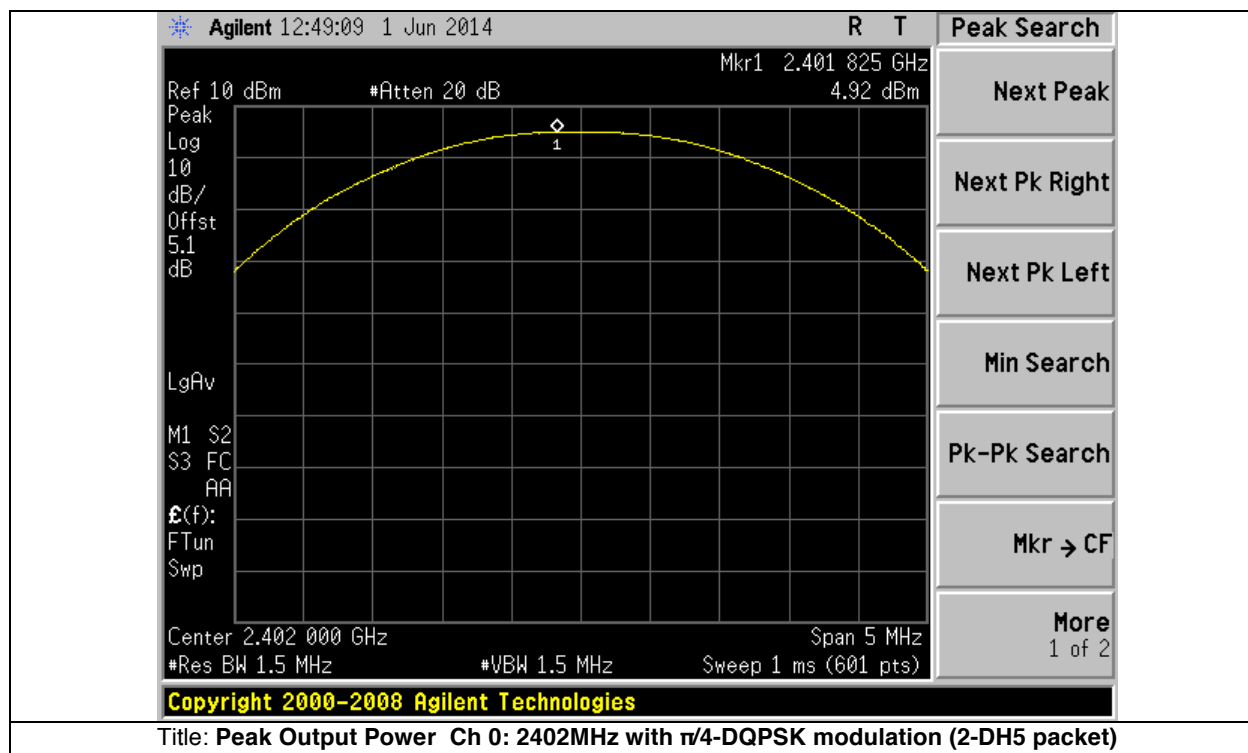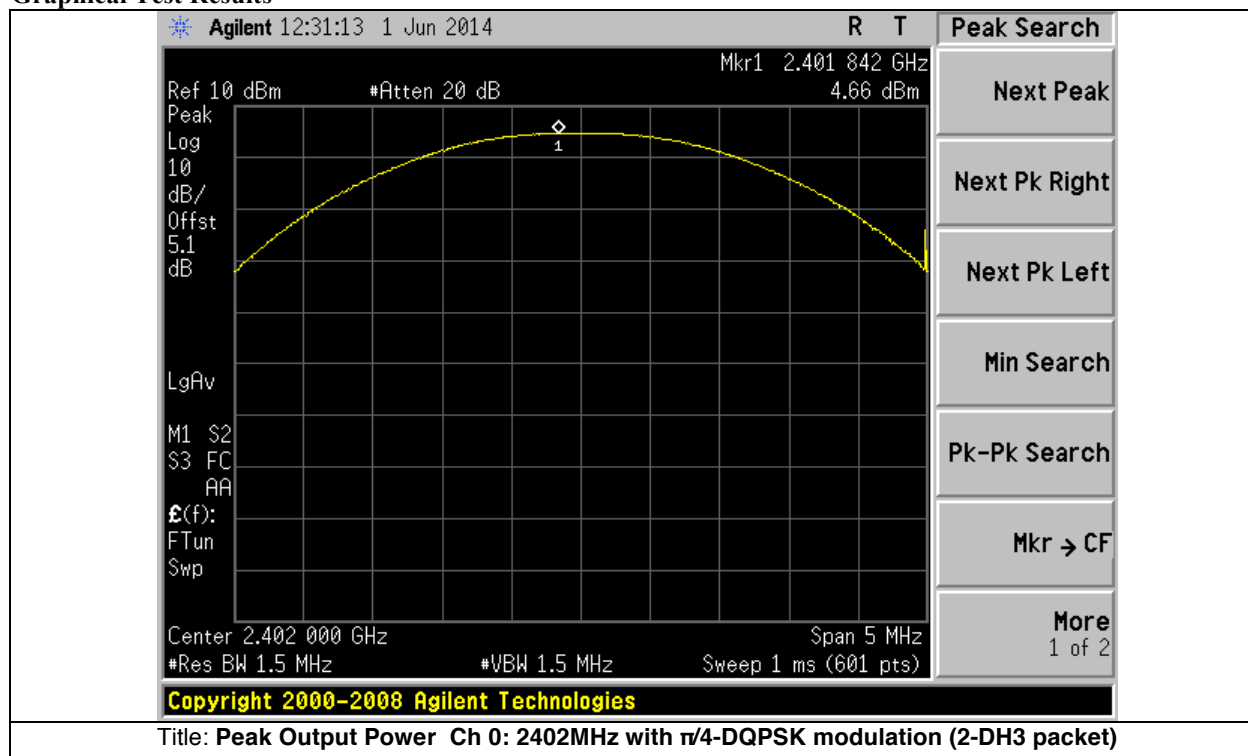



Graphical Test Results

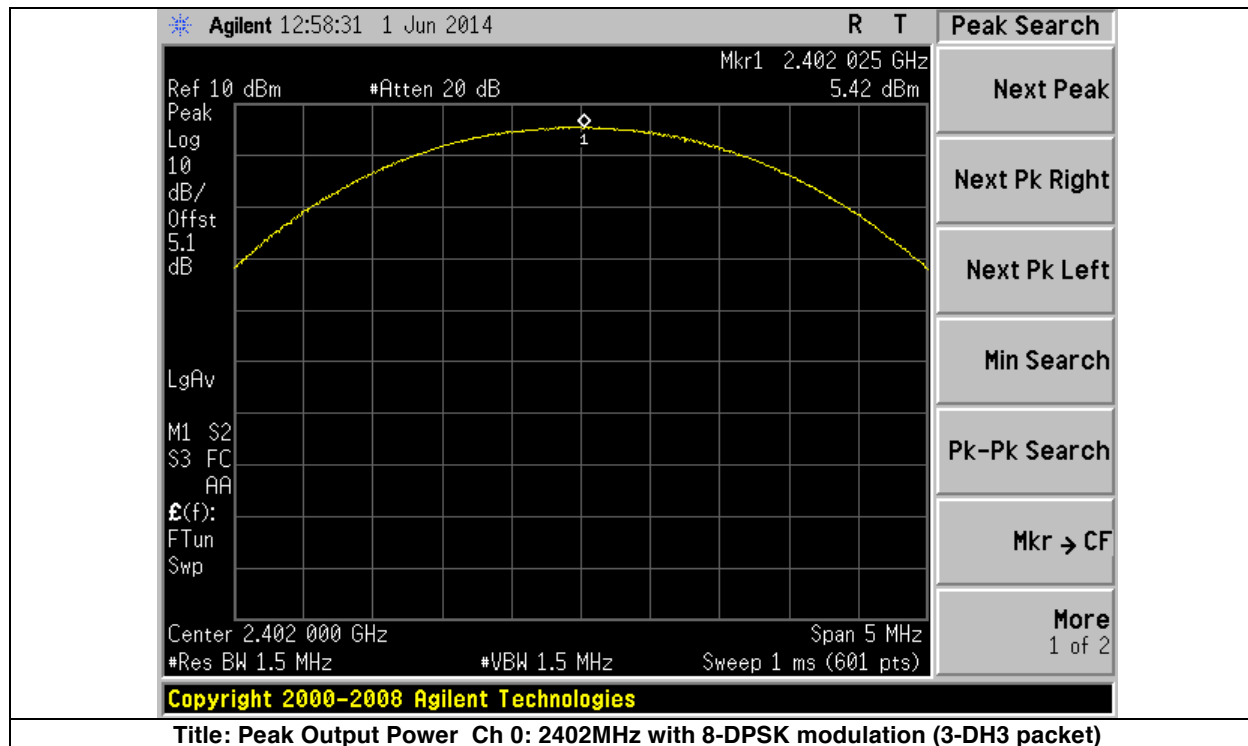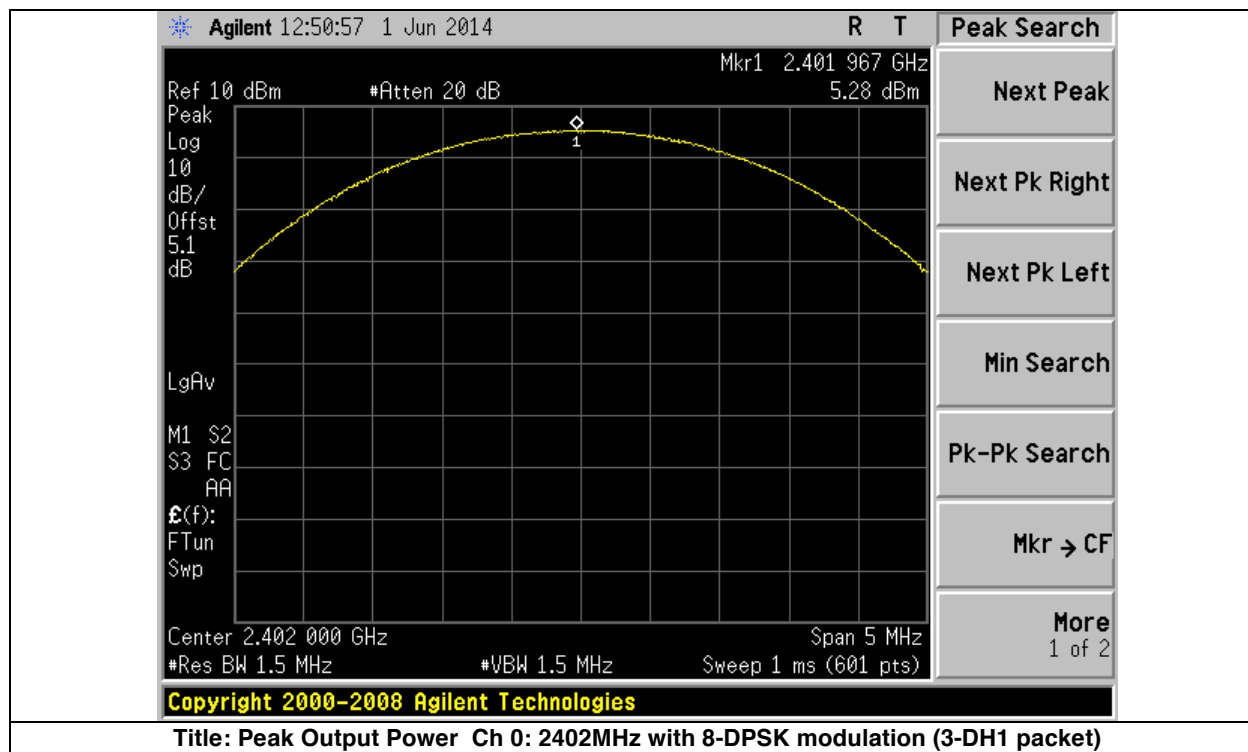



Graphical Test Results

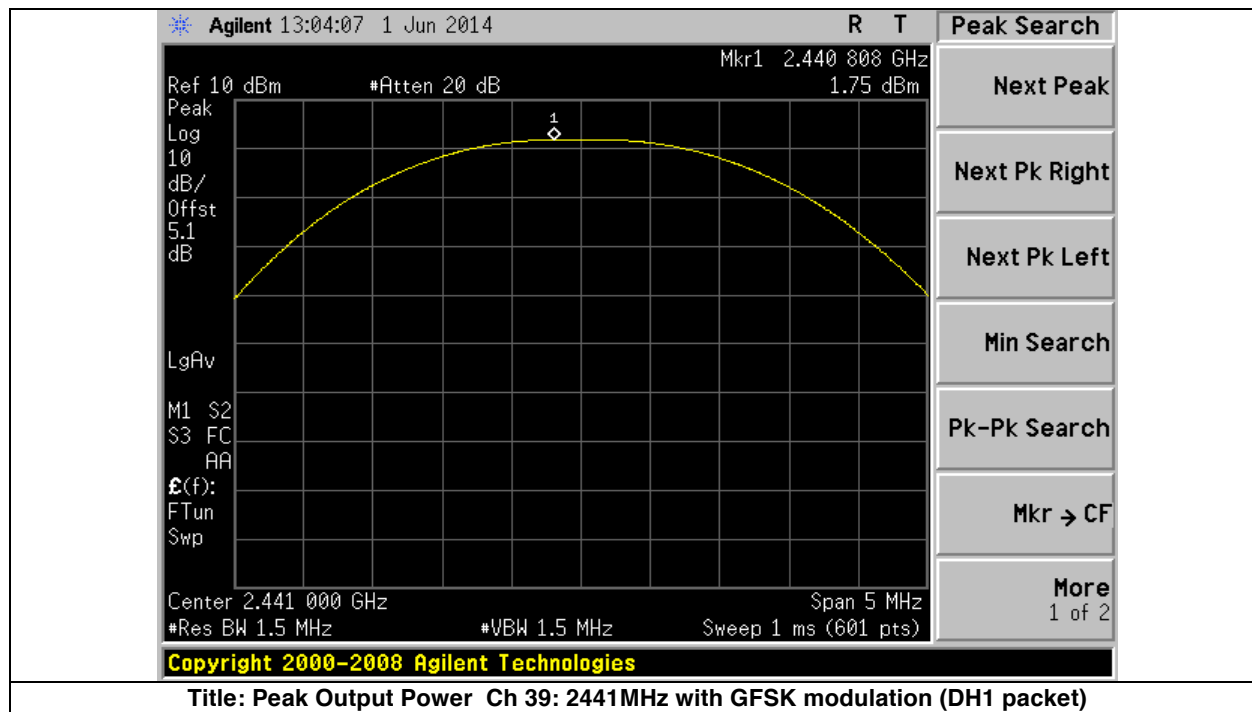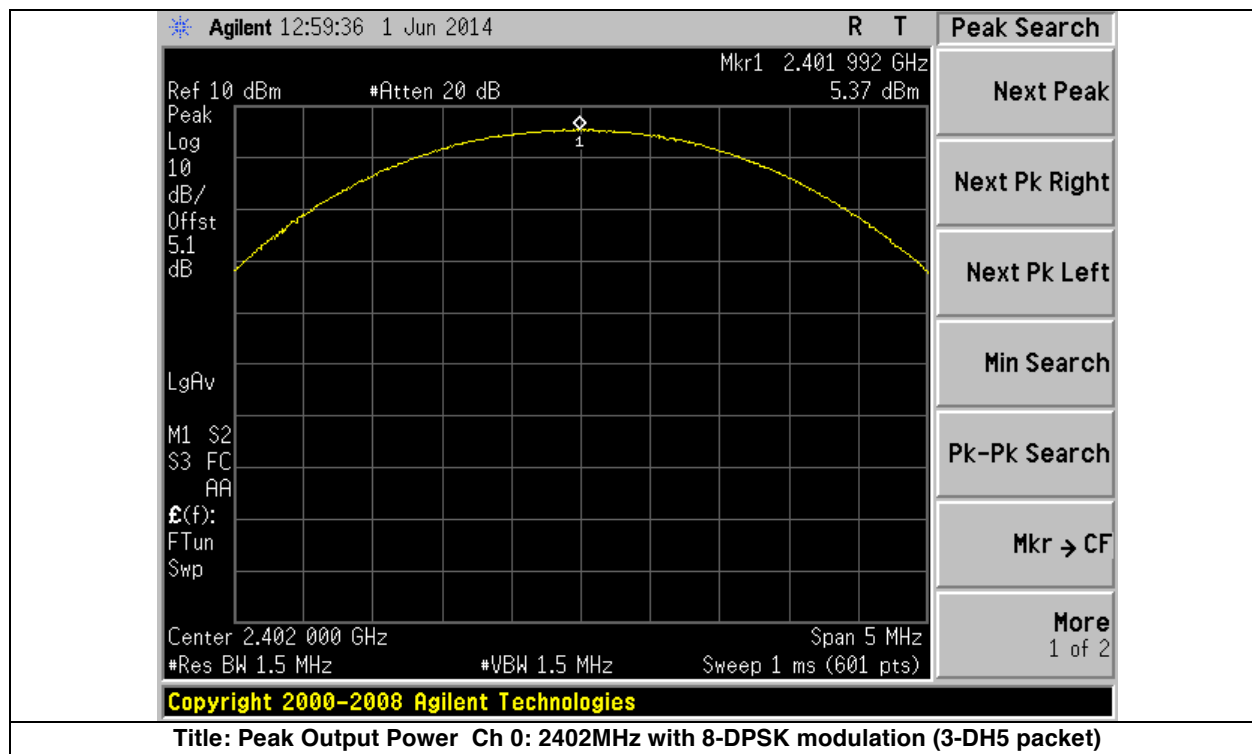



Graphical Test Results

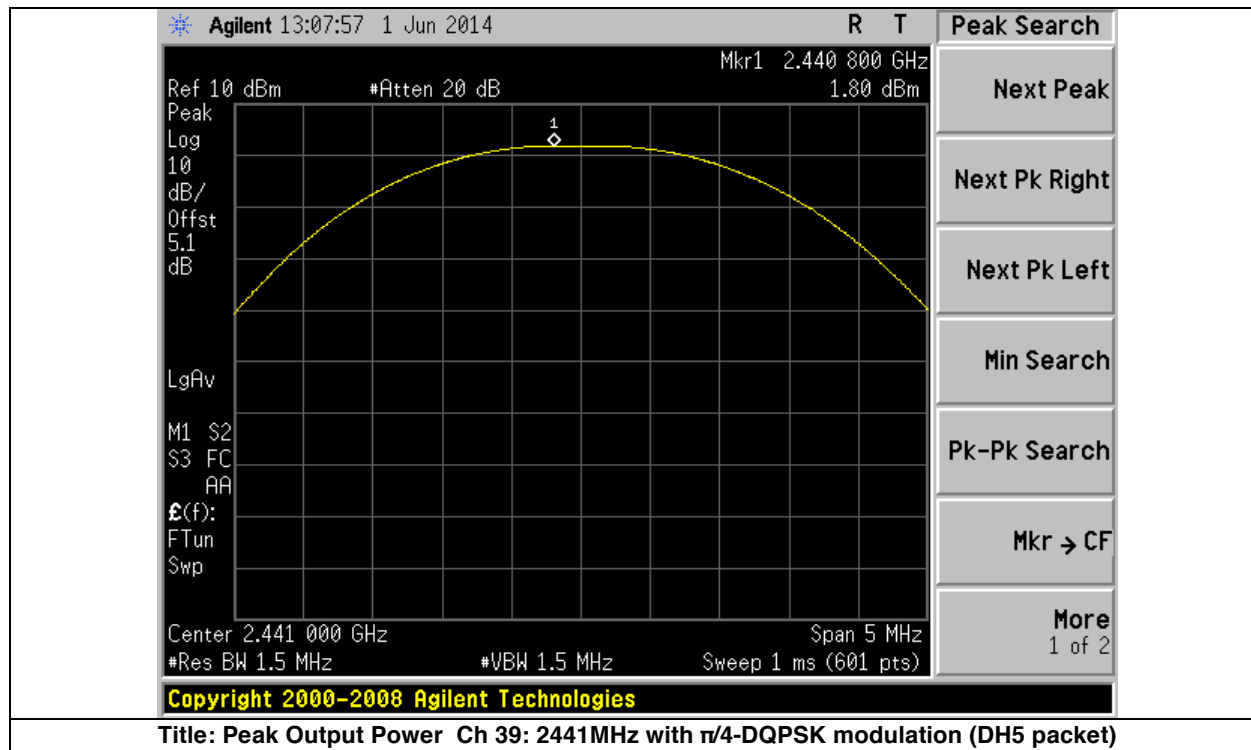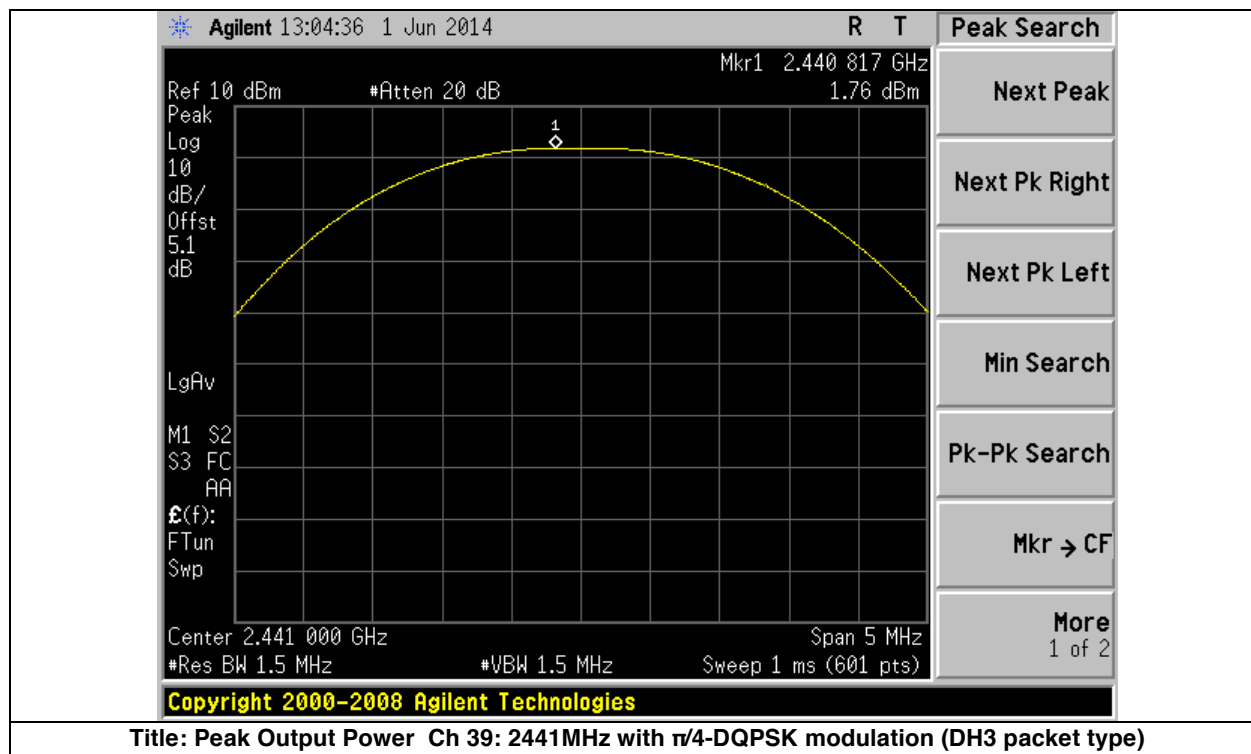



Graphical Test Results

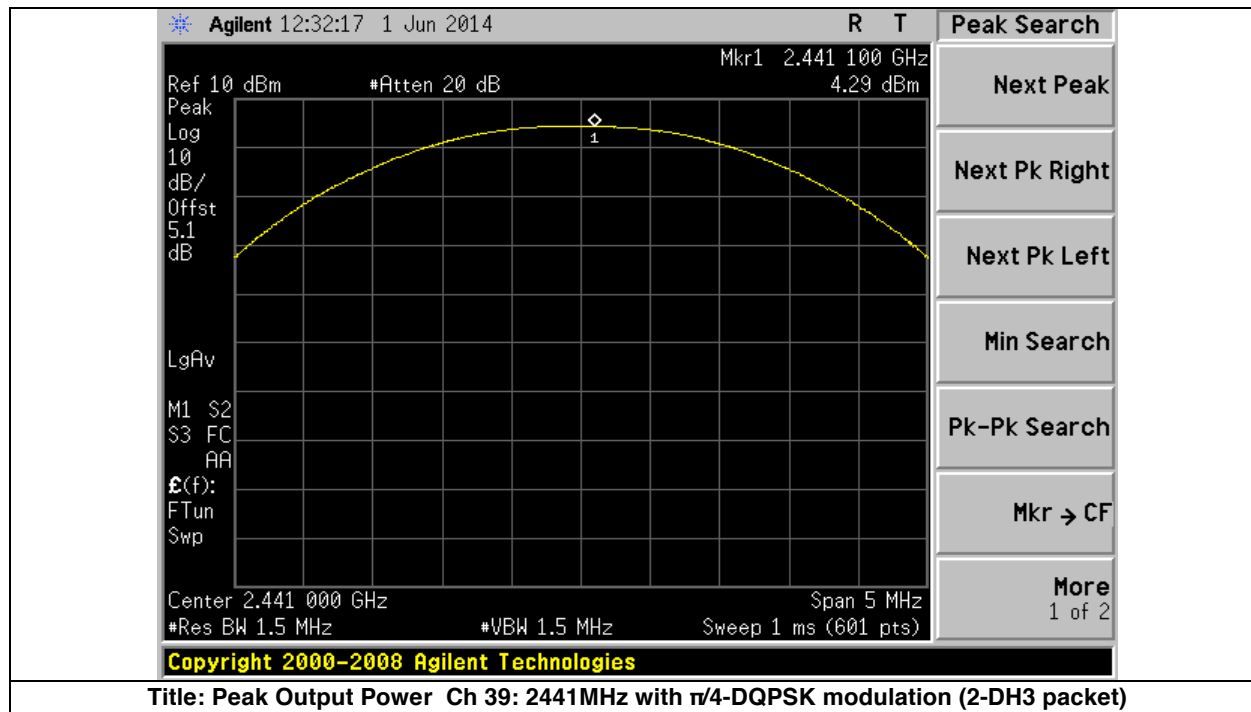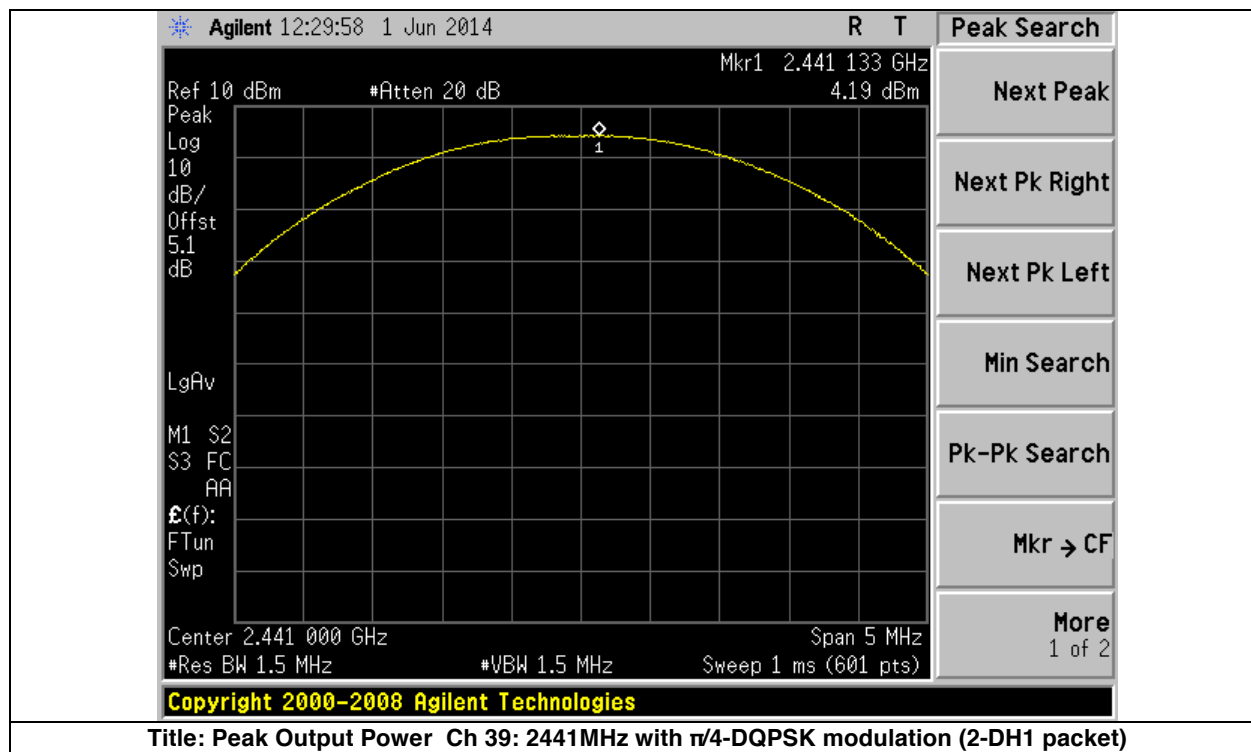


Graphical Test Results

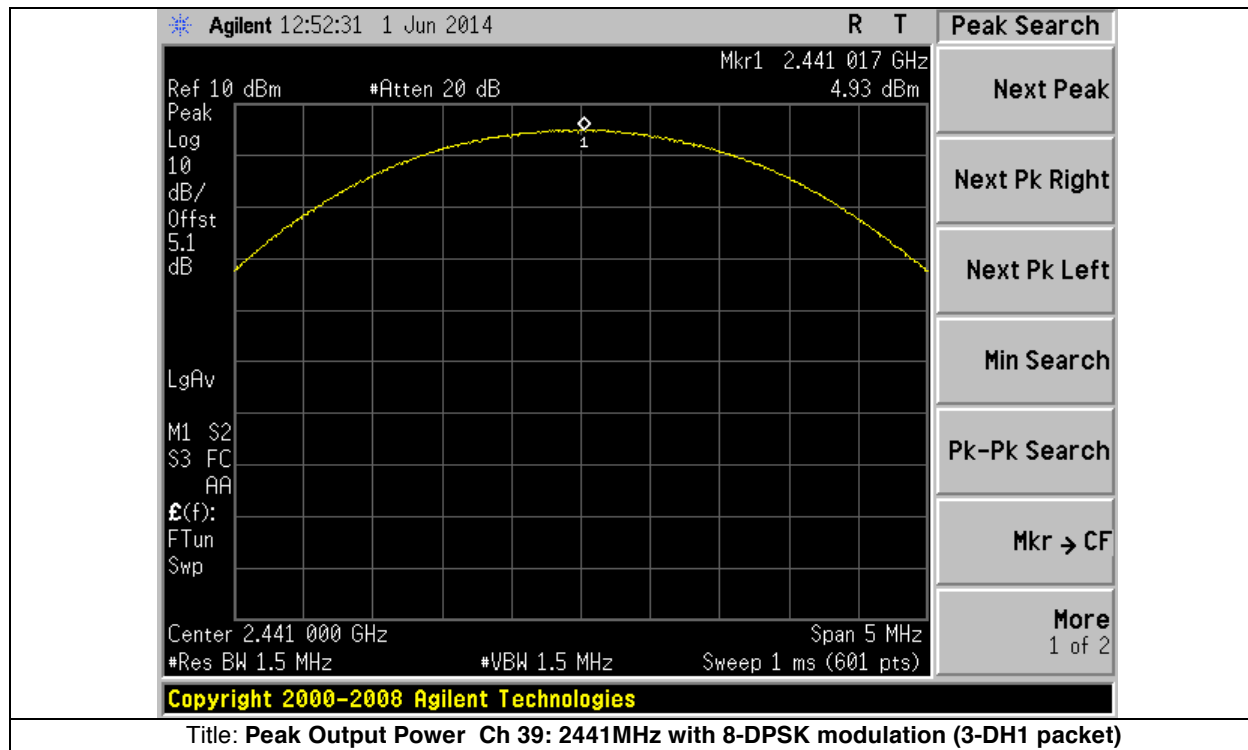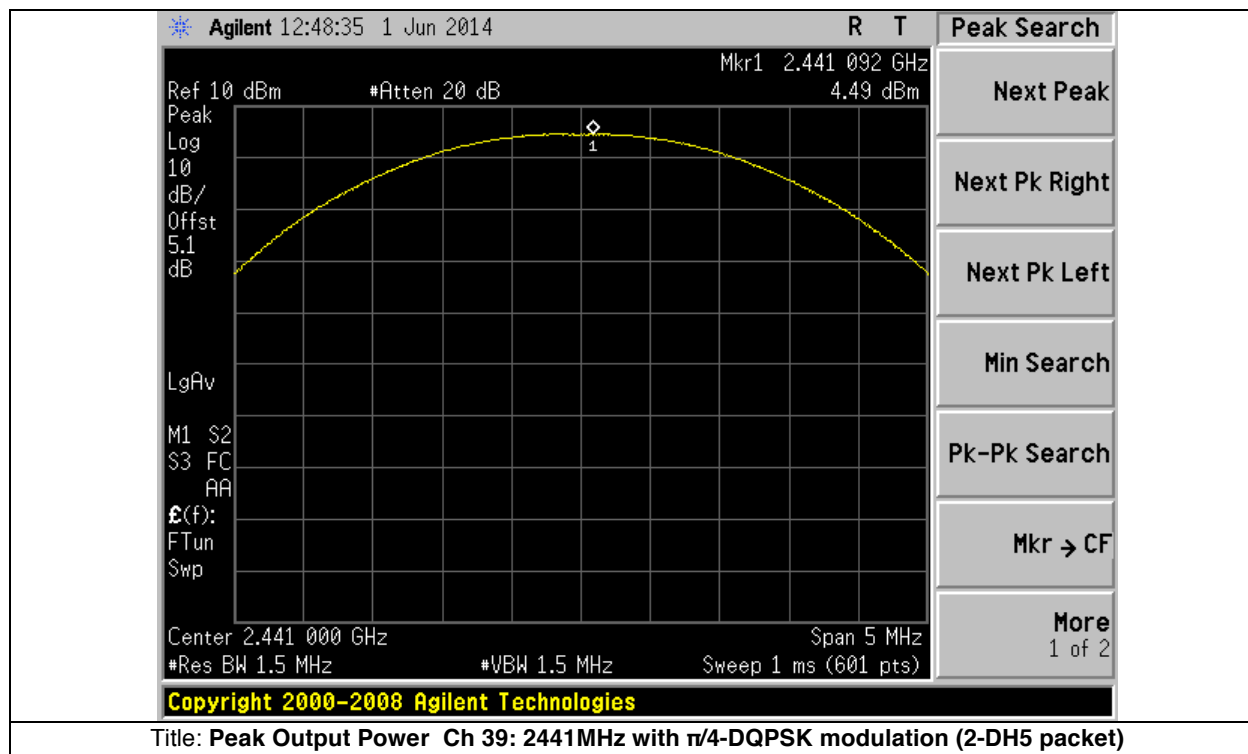


Graphical Test Results

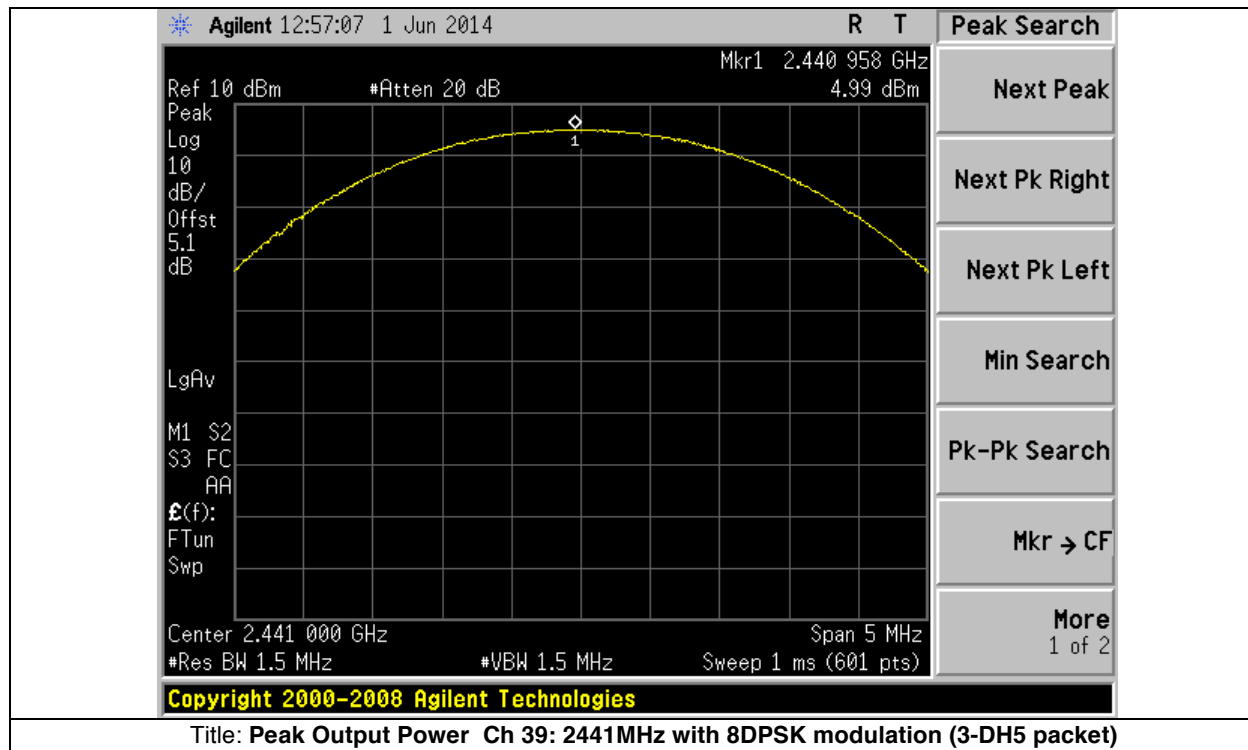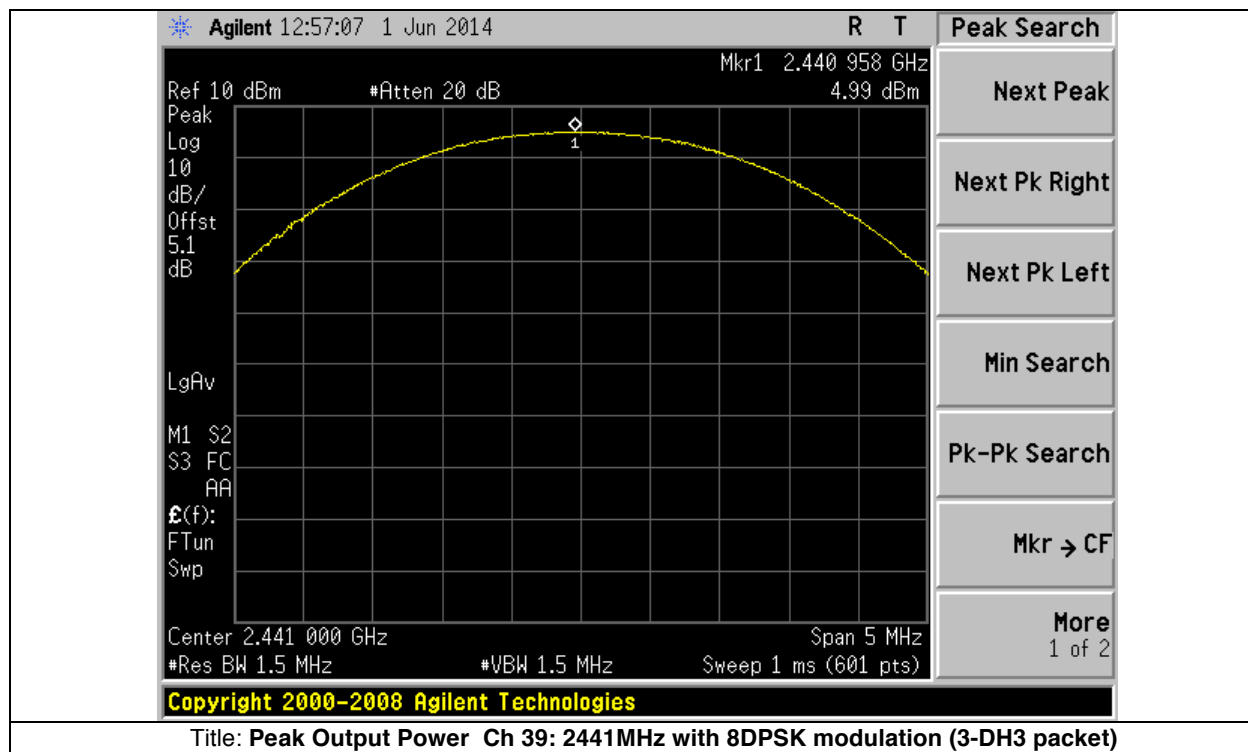

Graphical Test Results


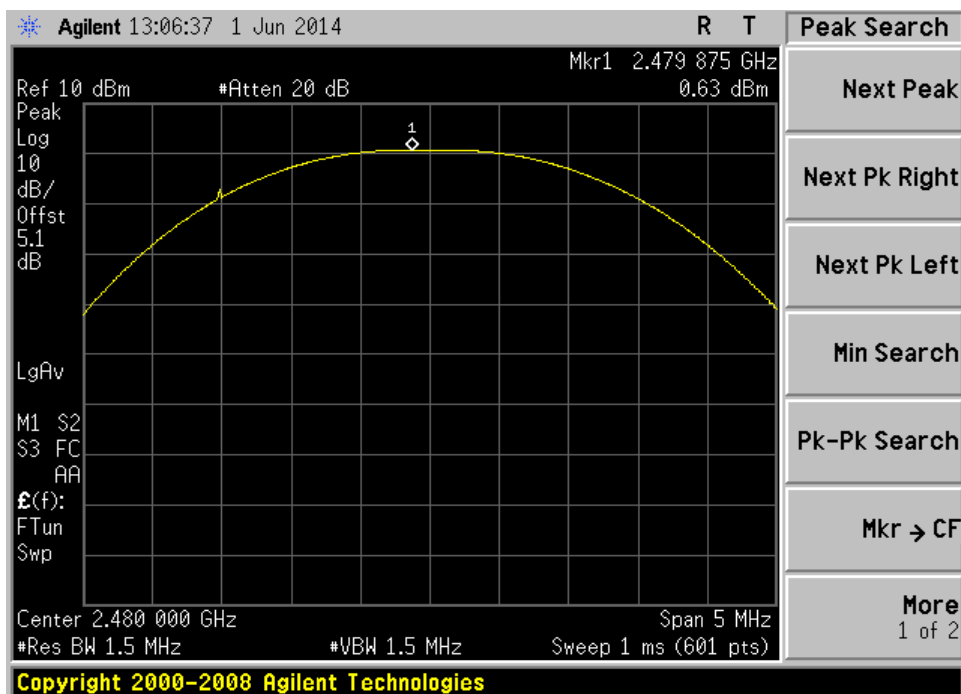


Title: Peak Output Power Ch 78: 2480MHz with GFSK modulation (DH1 packet)


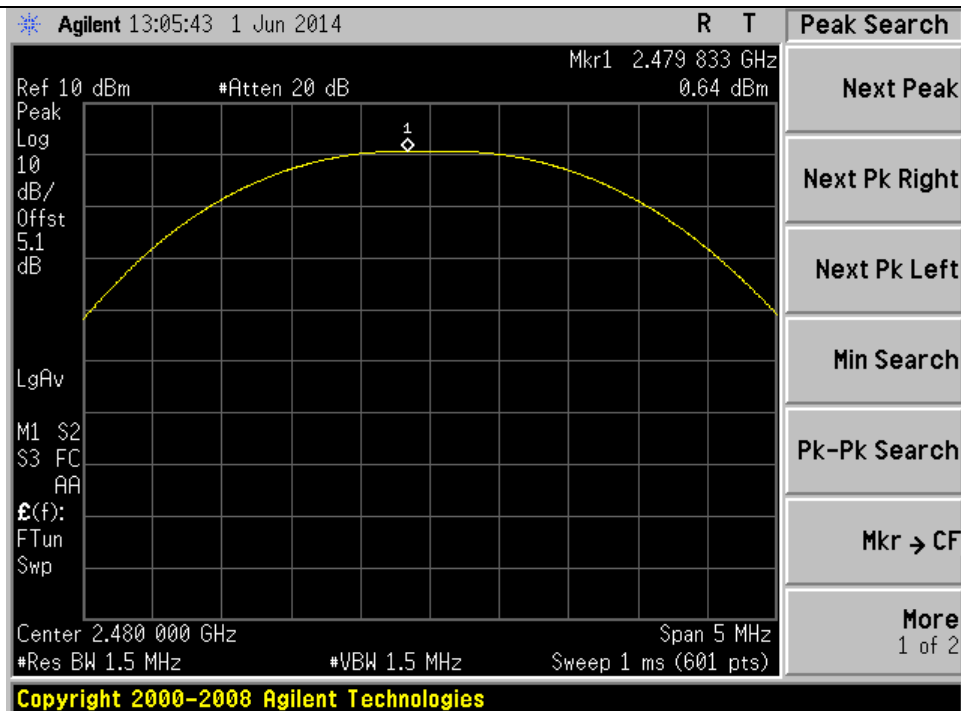


Title: Peak Output Power Ch 78: 2480MHz with GFSK modulation (DH3 packet)

Graphical Test Results

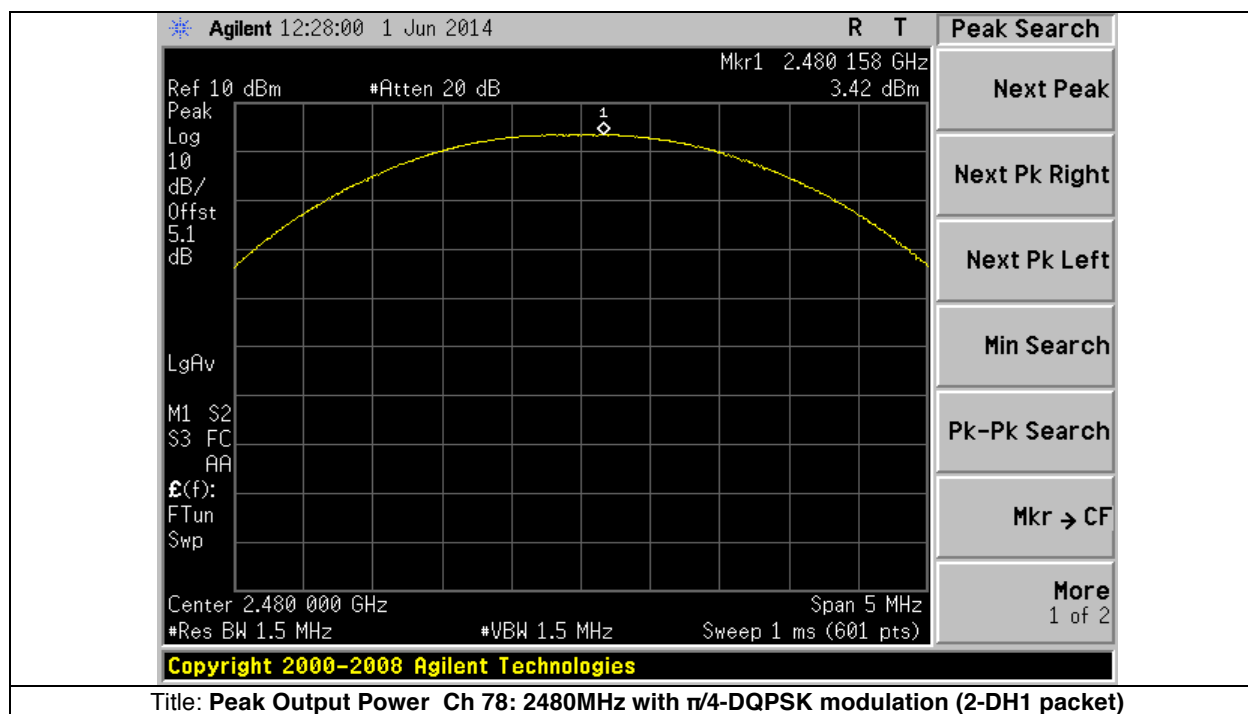
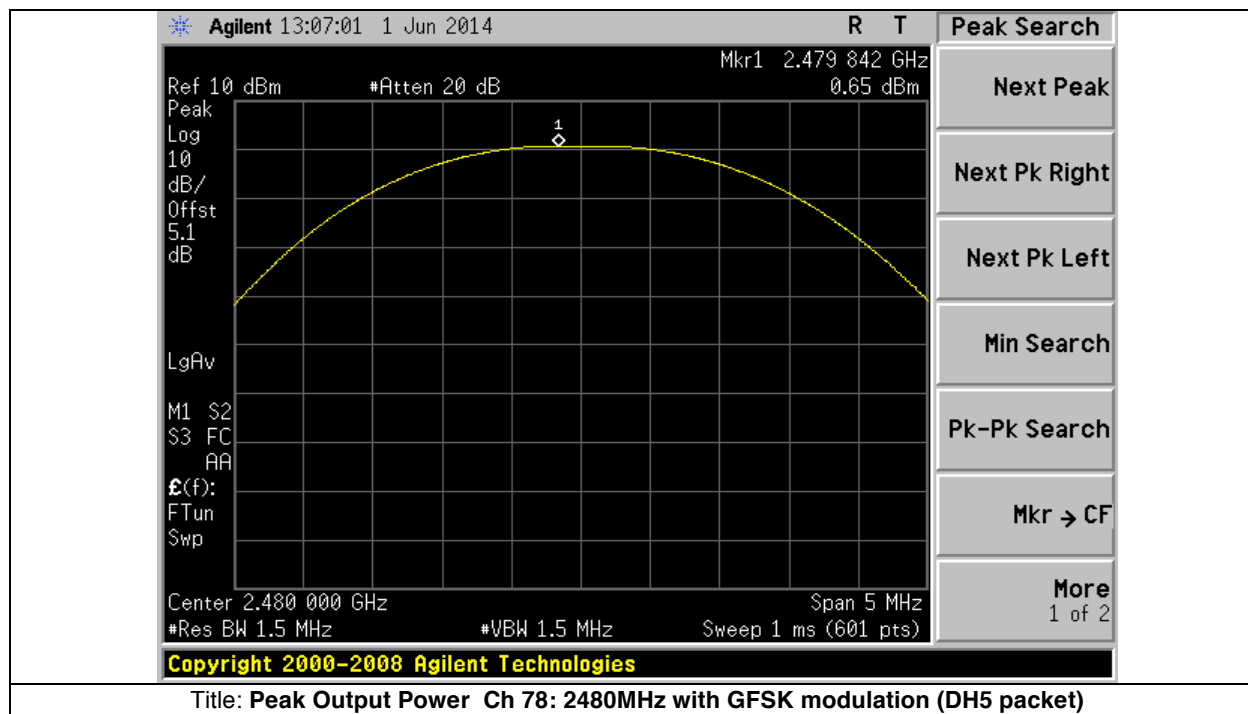



Graphical Test Results

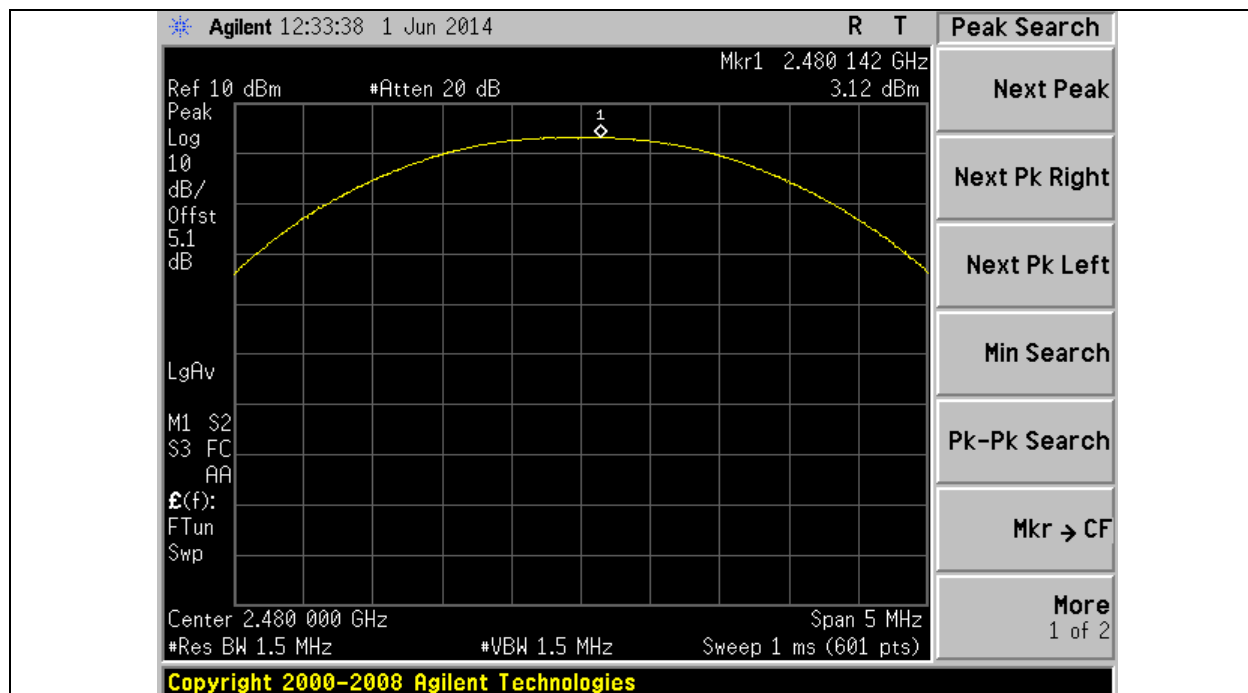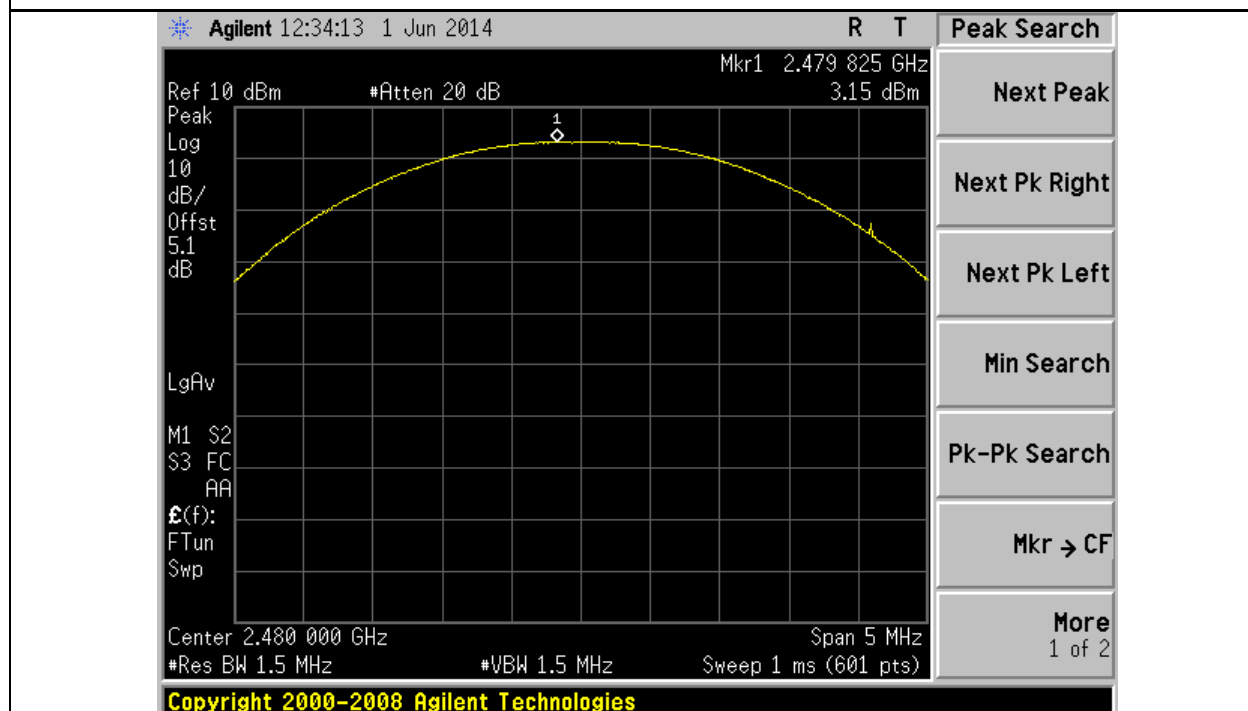Title: Peak Output Power Ch 78: 2480MHz with $\pi/4$ -DQPSK modulation (2-DH3 packet)Title: Peak Output Power Ch 78: 2480MHz with $\pi/4$ -DQPSK modulation (2-DH5 packet)



Graphical Test Results

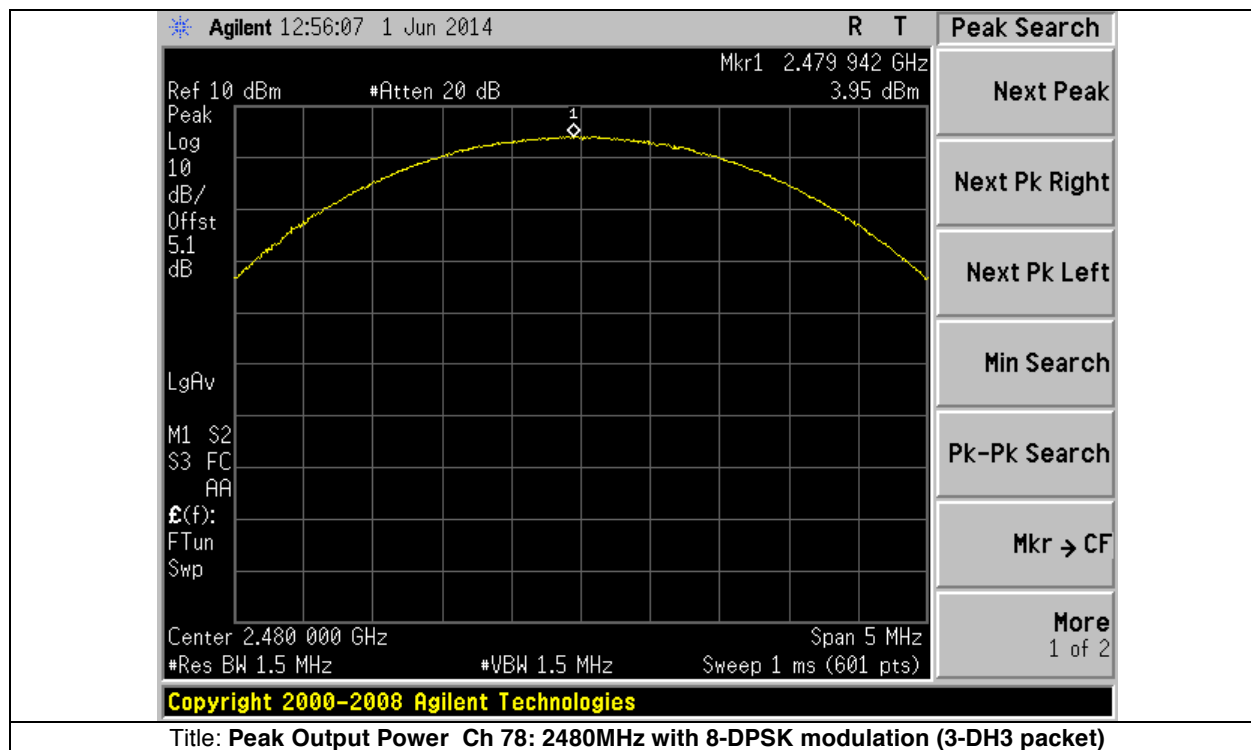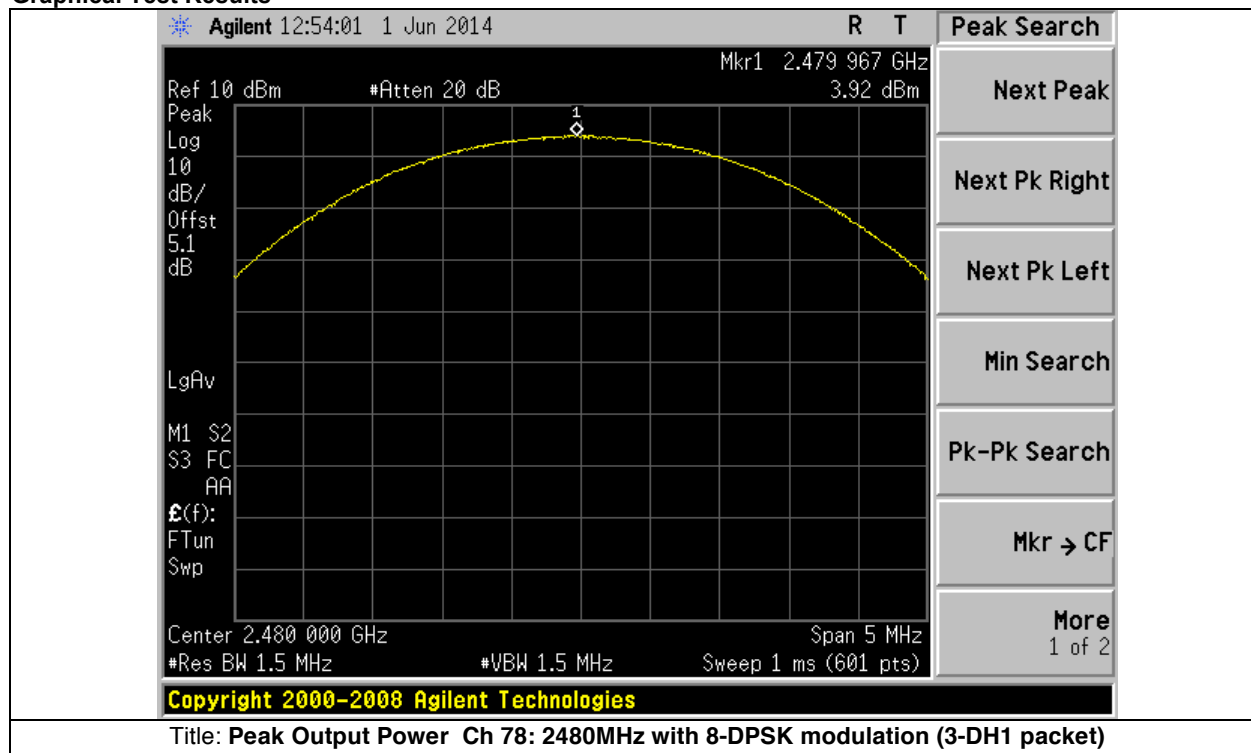

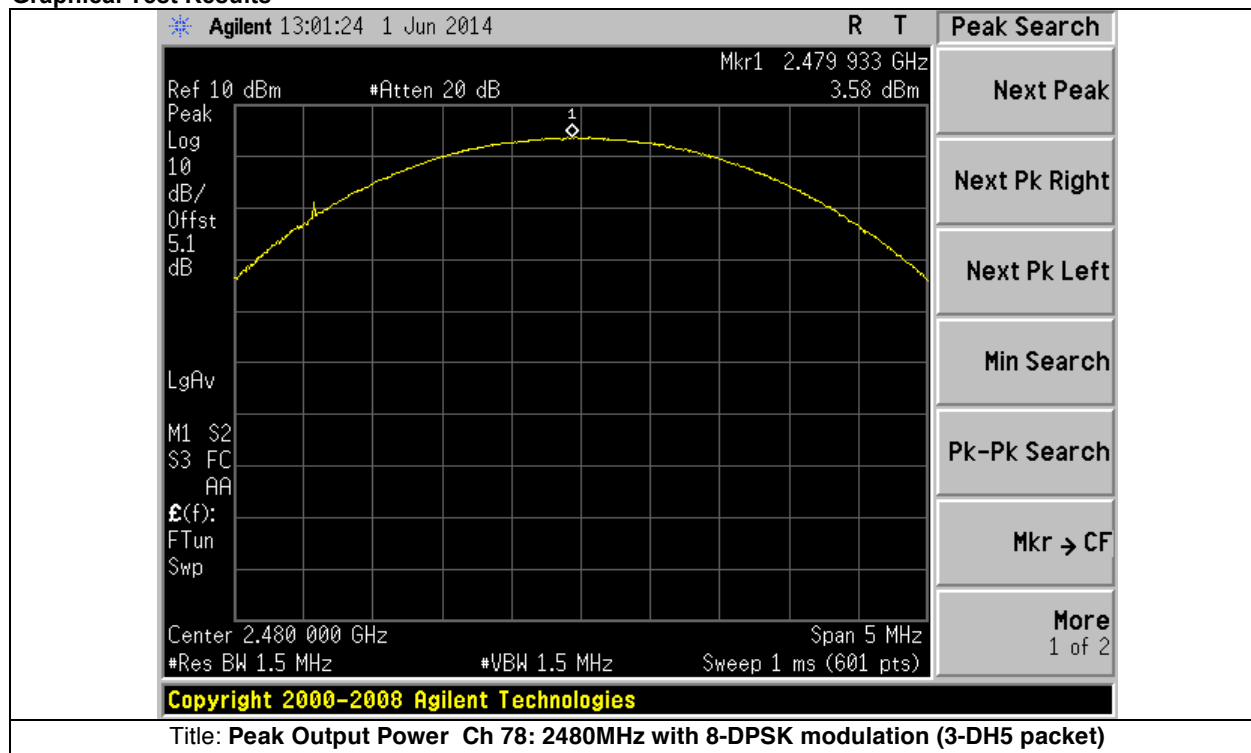**Graphical Test Results****Overall Result: PASS**

Measurement procedure as per KDB Publication DA 00-705



A.3 Carrier Frequency Separation

15.247 & RSS-210 A8.1:

For frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the system operates with an output power no greater than 0.125W.


Measurement Procedure

In accordance with KDB Publication DA 00-705

Test Data Table

Frequency (MHz)	Carrier Frequency Separation (KHz)	Limits (KHz)	Results
2440 & 2441	1000.00	$\frac{2}{3}$ of 20 dB BW	Pass

Graphical Test Results

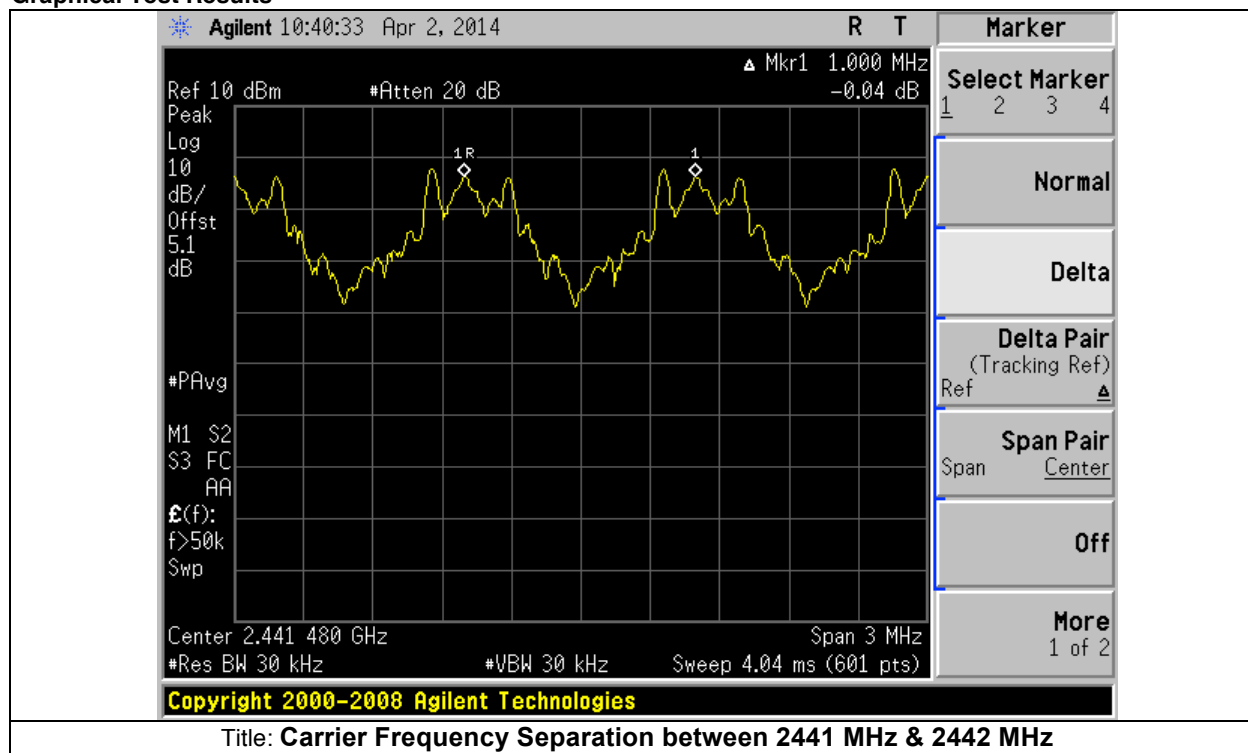

Overall Result: PASS



A.4 Number of Hopping Frequencies

15.247 & RSS-210 A8.1:

Frequency hopping systems operating in the band 2400-2483.5MHz shall use at least 15 hopping channels.

Measurement Procedure

In accordance with KDB Publication DA 00-705



Test Data Table

Frequency (MHz)	Total No. of Channels	Limits	Results
2400 – 2483.5	79	≥ 15	Pass
Total number of hopping frequencies in the 2400-2483.5MHz Band = 79 Channels			

Overall Result: PASS



Graphical Test Results

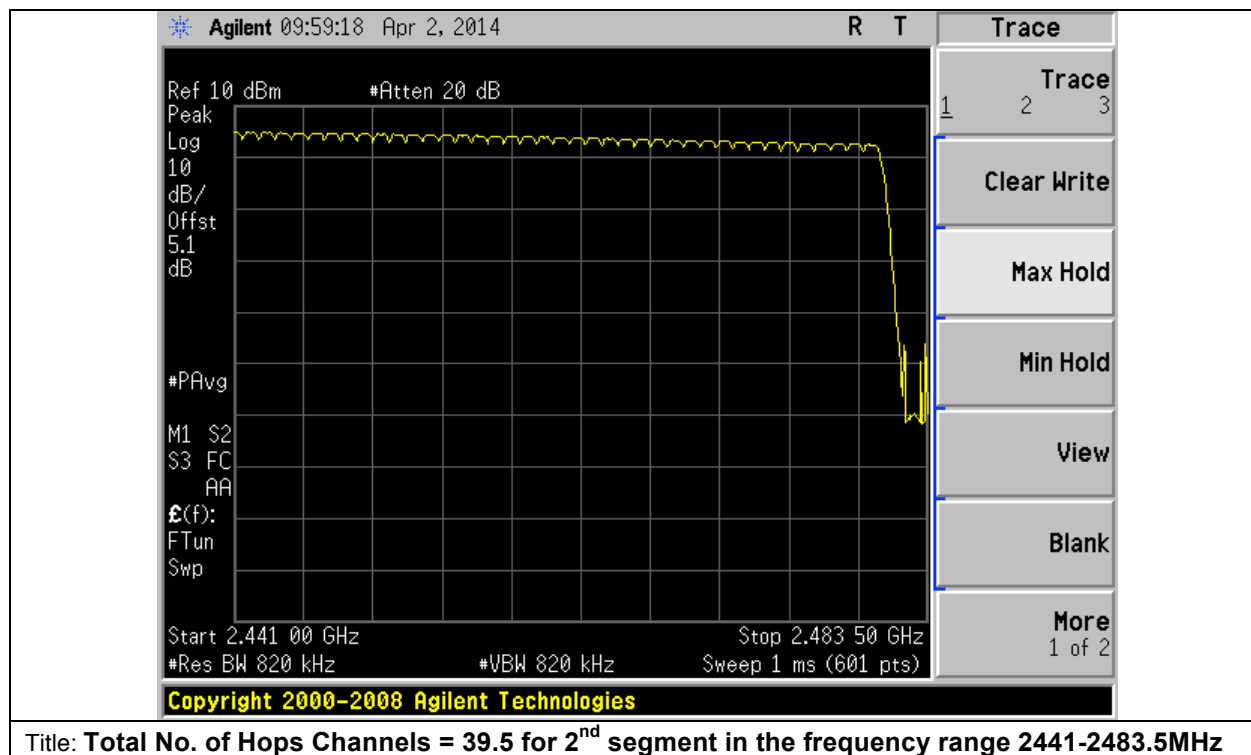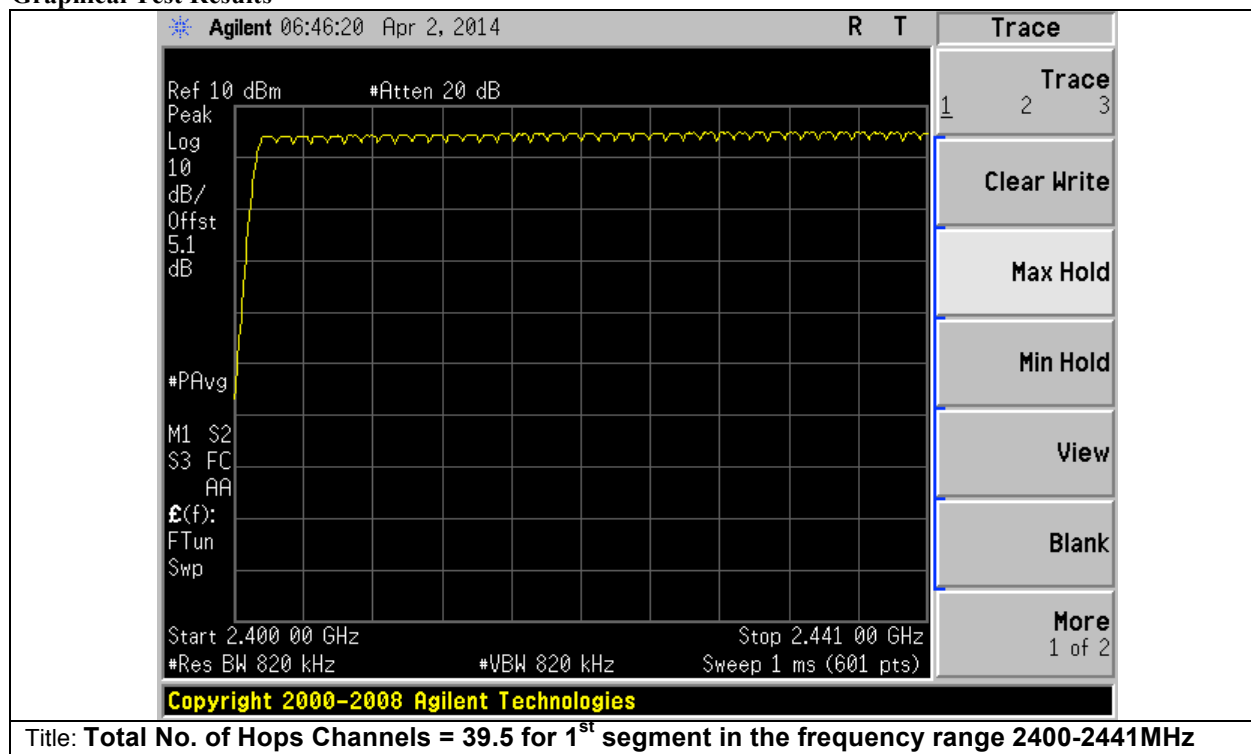



A.5 Dwell Time / Average Time of Occupancy

15.247 & RSS-210 A8.1:

Frequency hopping systems operating in the band 2400-2483.5MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

The total sweep time is $0.4(79) = 31.6$ seconds.

Due to the number of hops in the 31.6s sweep we determined to reduce the sweep time to 5 s, count the number of hops and multiply by 6.32. The total number of hops will be multiplied by the measured time of one pulse.

Example: Number of Hops in 5s = 50. Total Number of Hops in 31.6s = 50 (6.32) = 316
Single Pulse Width = 0.001s. Time of Occupancy = 316 (0.001) = 0.316s

Calculation:

Packet Type: DH1

DH1 Dwell Time = **0.383ms**

Total bins in 5 s = 49

Max. allowed time = 0.4 s x No. of available channels = 0.4s x 79 = 31.6s

Total bins in 31.6s = 49 (in 5s) x 6.32 = 309.68

Total time occupancy (in 31.6s) = 309.7 x 0.400ms = **118.6ms** or .119s

Packet Type: DH3

DH3 Dwell Time = **1.633 ms**

Total bins in 5 s = 19

Max. allowed time = 0.4 s x No. of available channels = 0.4s x 79 = 31.6s

Total bins in 31.6s = 19 (in 5s) x 6.32 = 120.1

Total time occupancy (in 31.6s) = 1120 x 1.633ms = **196ms** or .196s

Packet Type: DH5

DH5 Dwell Time = **2.883 ms**

Total bins in 5 s = 13

Max. allowed time = 0.4 s x No. of available channels = 0.4s x 79 = 31.6s

Total bins in 31.6s = 13 (in 5s) x 6.32 = 82.16 bins

Total time occupancy (in 31.6s) = 82.2 x 2.882ms = **236.9ms** or .237s

Packet Type: 2-DH1

2-DH1 Dwell Time = **0.383ms**

Total bins in 5 s = 49

Max. allowed time = 0.4 s x No. of available channels = 0.4s x 79 = 31.6s

Total bins in 31.6s = 49 (in 5s) x 6.32 = 309.68

Total time occupancy (in 31.6s) = 309.7 x 0.400ms = **118.6ms** or .119s

Calculation (continue):



Packet Type: 2-DH3

2-DH3 Dwell Time = **1.633 ms**

Total bins in 5 s = 19

Max. allowed time = 0.4 s x No. of available channels = 0.4s x 79 = 31.6s

Total bins in 31.6s = 19 (in 5s) x 6.32 = 120.1

Total time occupancy (in 31.6s) = 120 x 1.633ms = **196.1ms** or .196s

Packet Type: 2-DH5

2-DH5 Dwell Time = **2.883 ms**

Total bins in 5 s = 13

Max. allowed time = 0.4 s x No. of available channels = 0.4s x 79 = 31.6s

Total bins in 31.6s = 13 (in 5s) x 6.32 = 82.2 bins

Total time occupancy (in 31.6s) = 82.2 x 2.90ms = **238.4ms** or .238s

Packet Type: 3-DH1

3-DH1 Dwell Time = **0.383ms**

Total bins in 5 s = 48

Max. allowed time = 0.4 s x No. of available channels = 0.4s x 79 = 31.6s

Total bins in 31.6s = 48 (in 5s) x 6.32 = 303.4

Total time occupancy (in 31.6s) = 303.4 x 0.383ms = **116.2ms** or .116s

Packet Type: 3-DH3

3-DH3 Dwell Time = **1.633 ms**

Total bins in 5 s = 19

Max. allowed time = 0.4 s x No. of available channels = 0.4s x 79 = 31.6s

Total bins in 31.6s = 19 (in 5s) x 6.32 = 120.1

Total time occupancy (in 31.6s) = 120 x 1.63ms = **196.1ms** or .196s

Packet Type: 3-DH5

3-DH5 Dwell Time = **2.883 ms**

Total bins in 5 s = 14

Max. allowed time = 0.4 s x No. of available channels = 0.4s x 79 = 31.6s

Total bins in 31.6s = 14(in 5s) x 6.32 = 88.5 bins

Total time occupancy (in 31.6s) = 88.5 x 2.883ms = **255.1ms** or .255s





Test Data

Frequency (MHz)	Packet Type	Dwell Time (ms)	Time Occupancy (ms)	Limits (ms)	Results
2441	DH1	0.383	118.6	400	Pass
2441	DH3	1.633	196.0	400	Pass
2441	DH5	2.883	237.0	400	Pass
2441	2-DH1	0.383	118.6	400	Pass
2441	2-DH3	1.633	196.1	400	Pass
2441	2-DH5	2.883	238.4	400	Pass
2441	3-DH1	0.383	116.2	400	Pass
2441	3-DH3	1.633	196.1	400	Pass
2441	3-DH5	2.883	255.1	400	Pass

Overall Result: PASS





Graphical Test Results

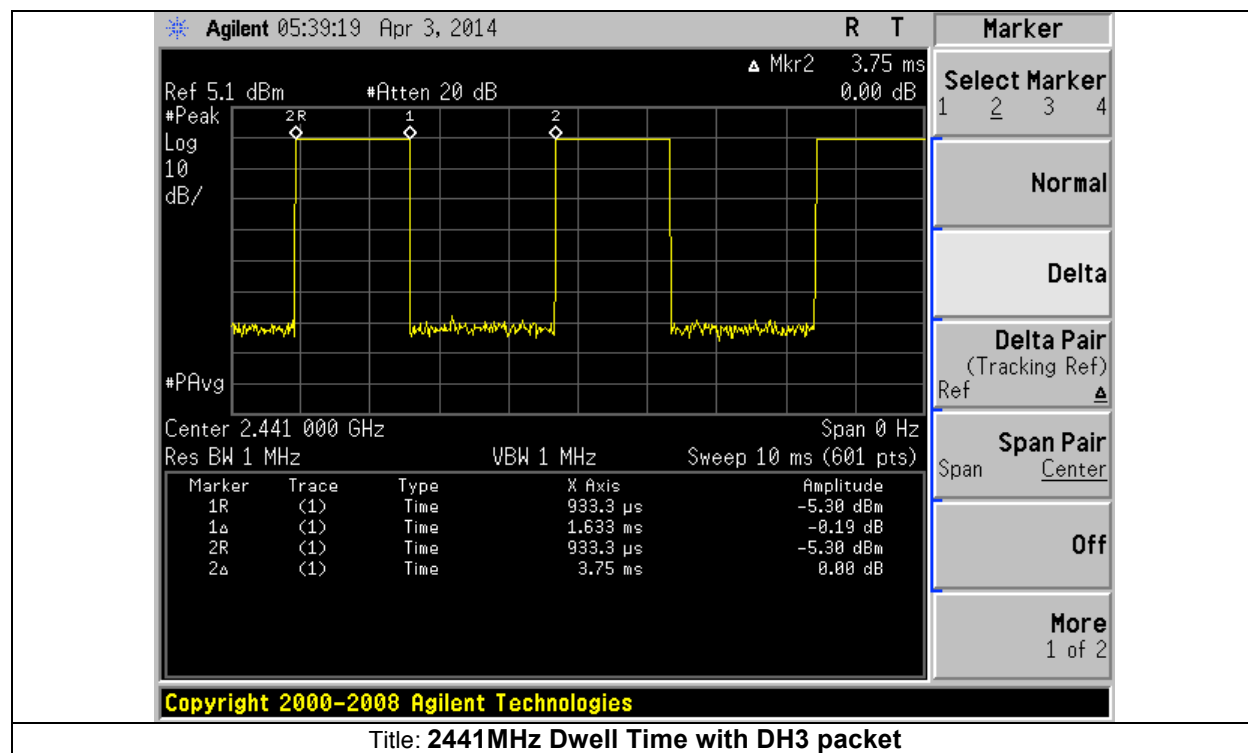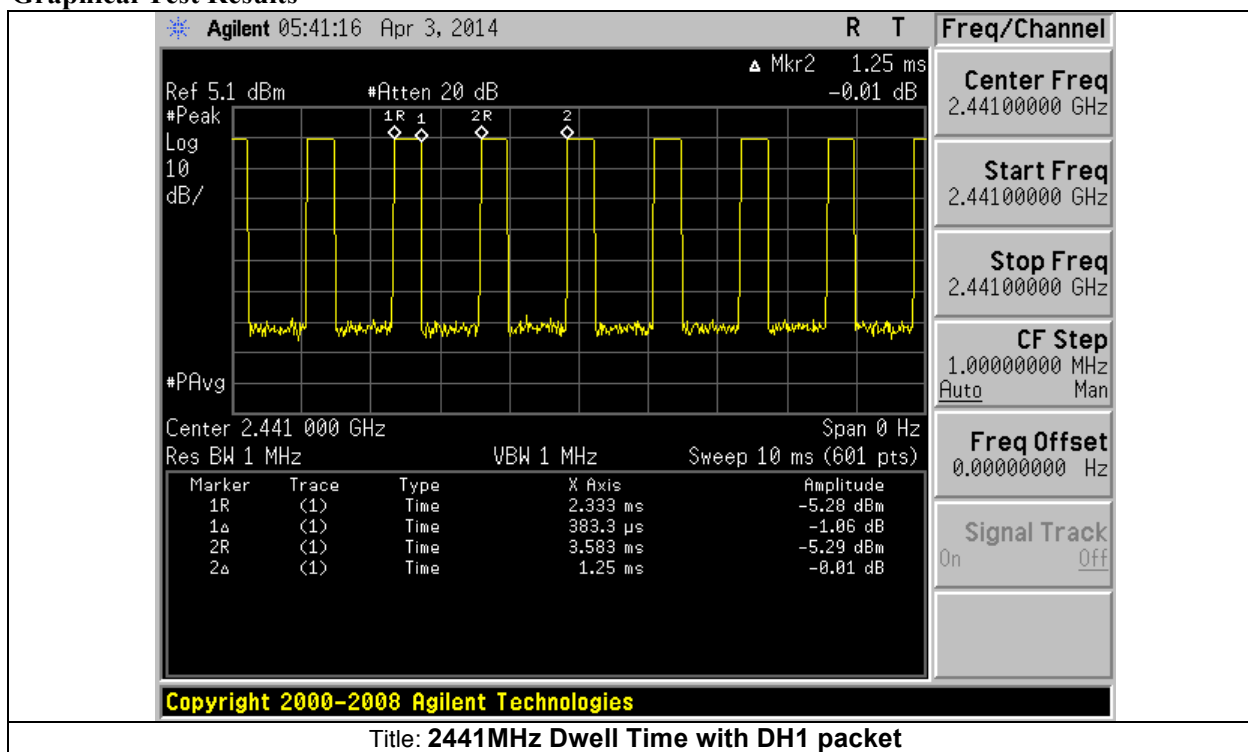





Graphical Test Results

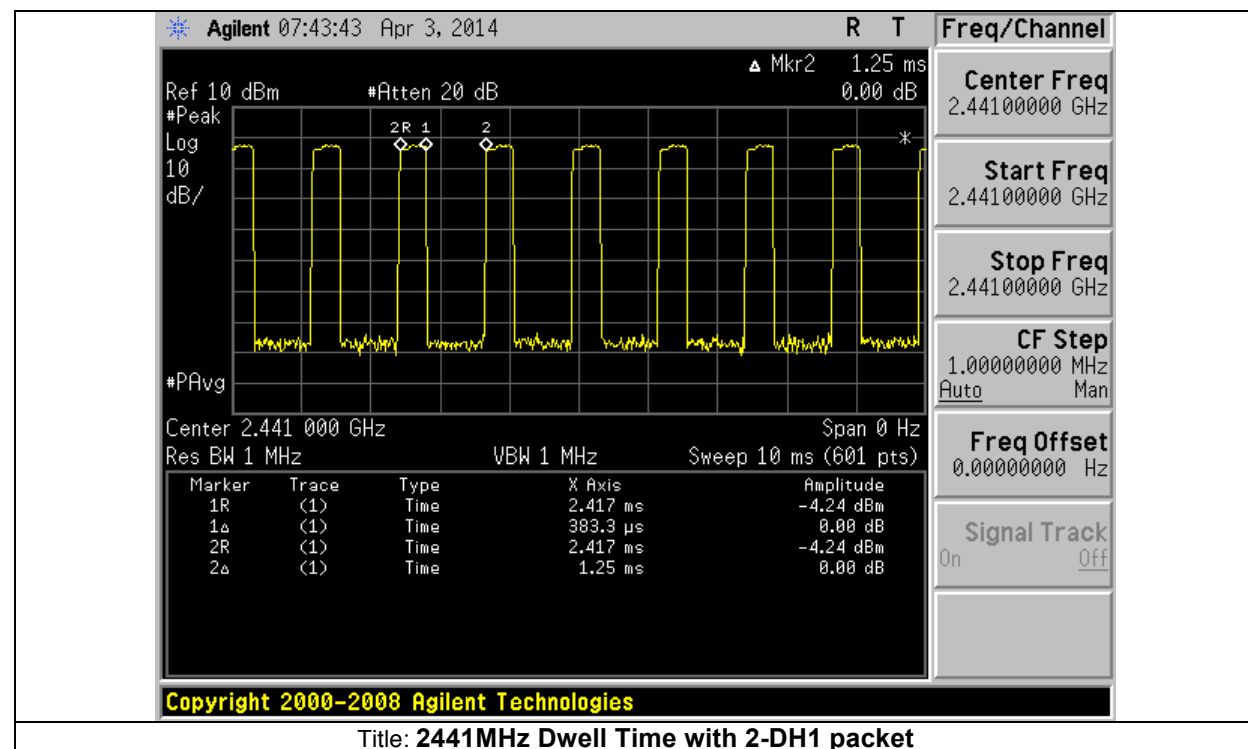
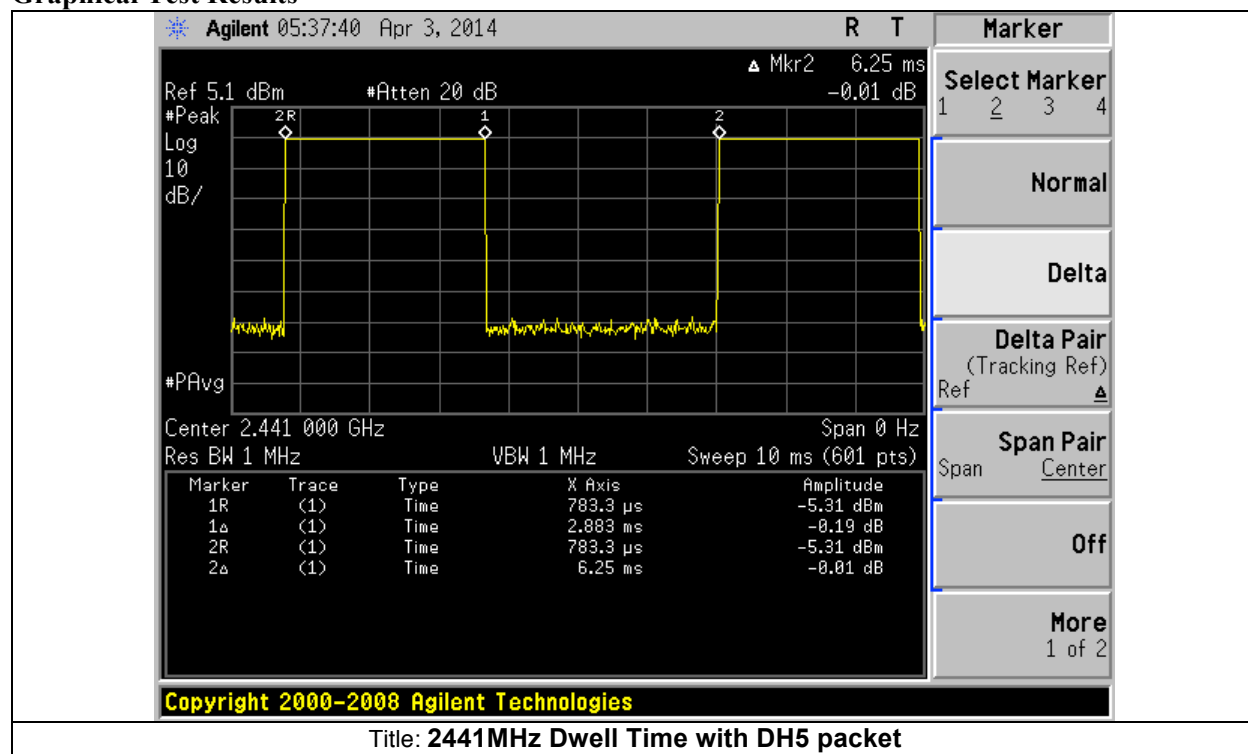




Graphical Test Results

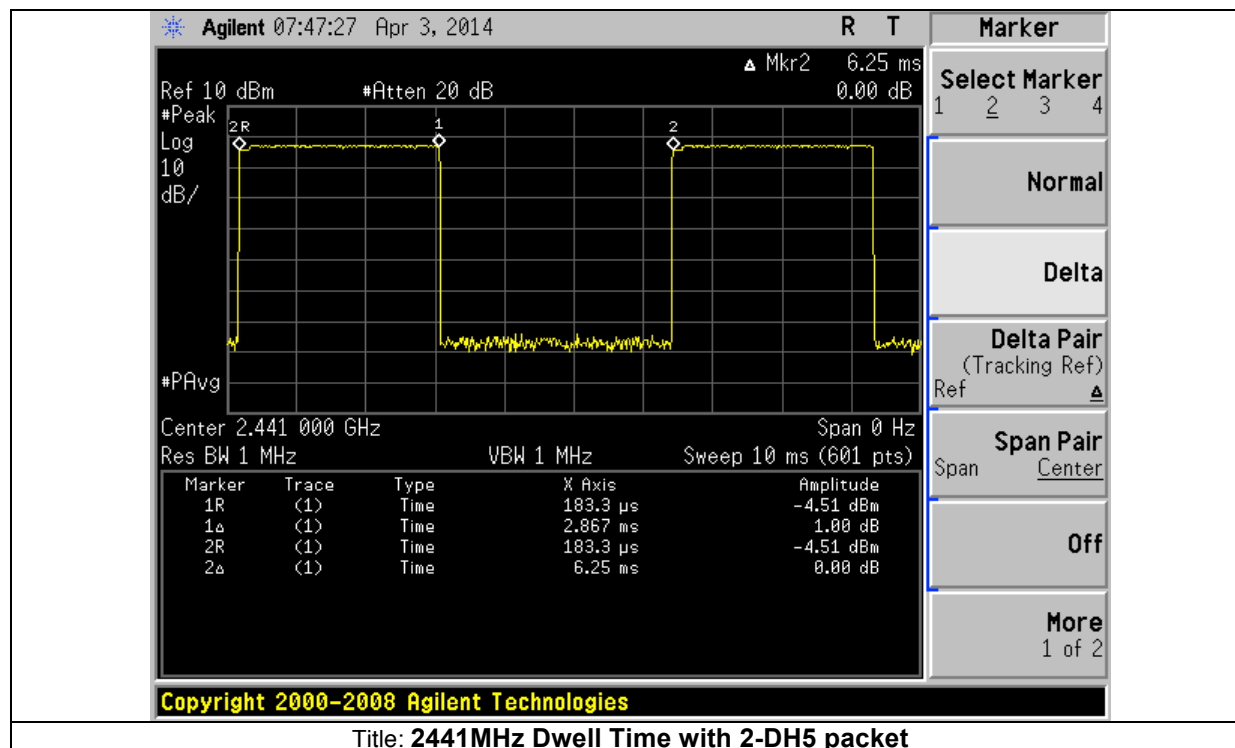
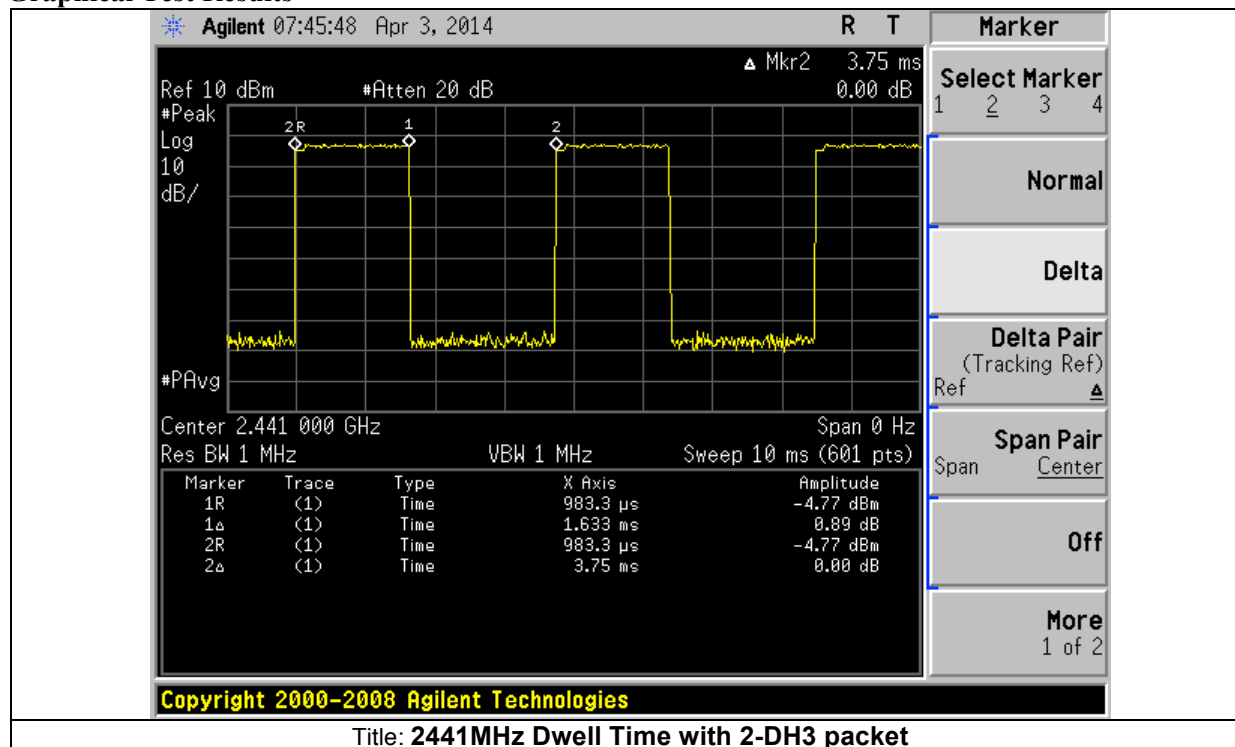




Graphical Test Results

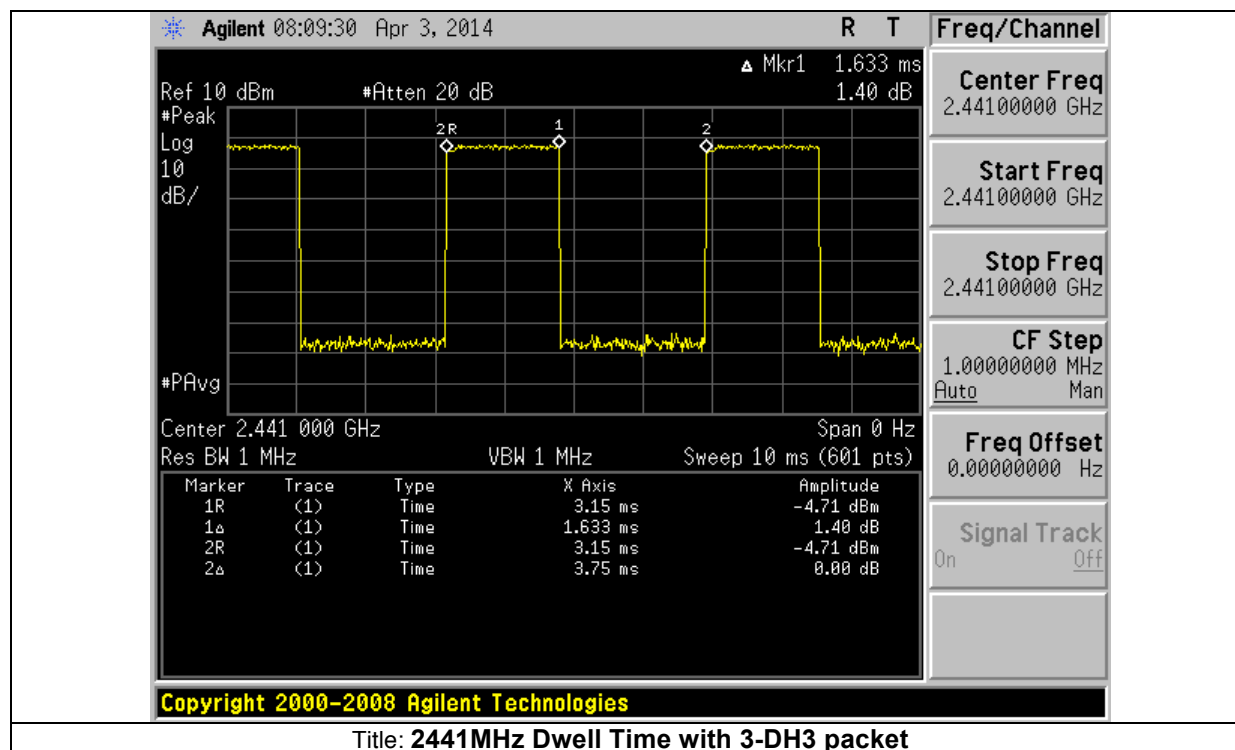
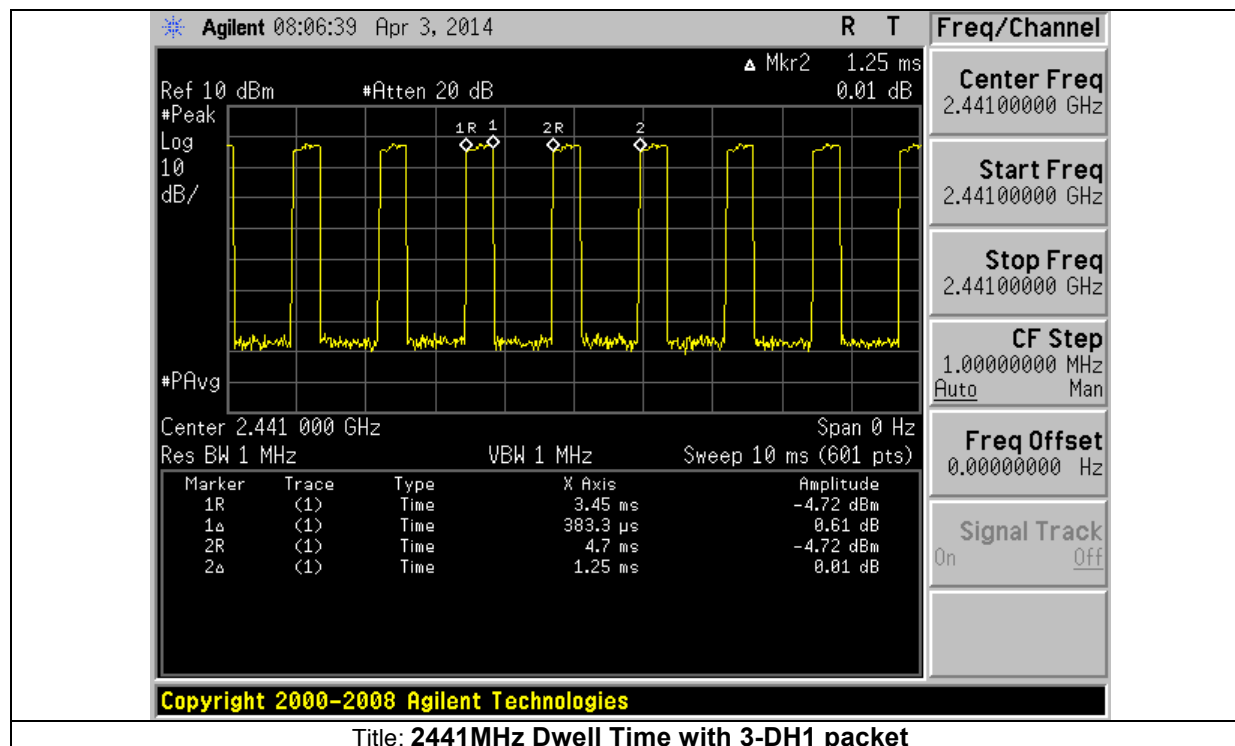








Graphical Test Results

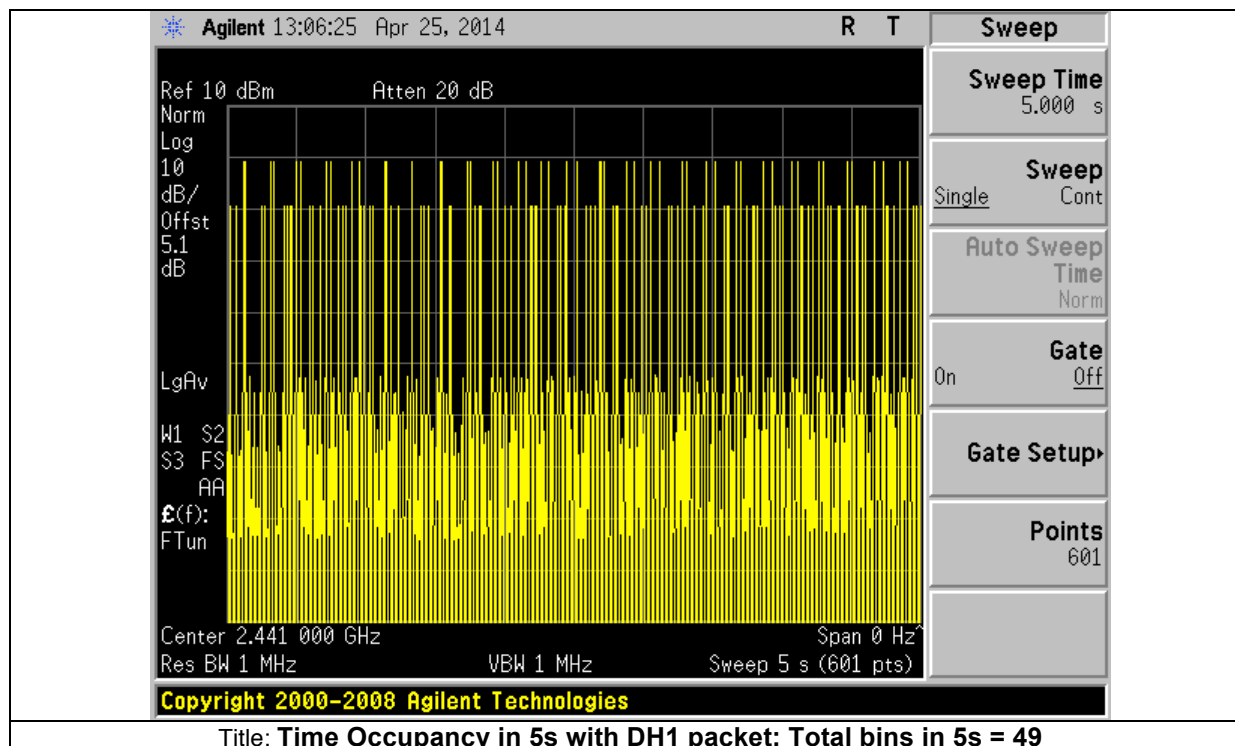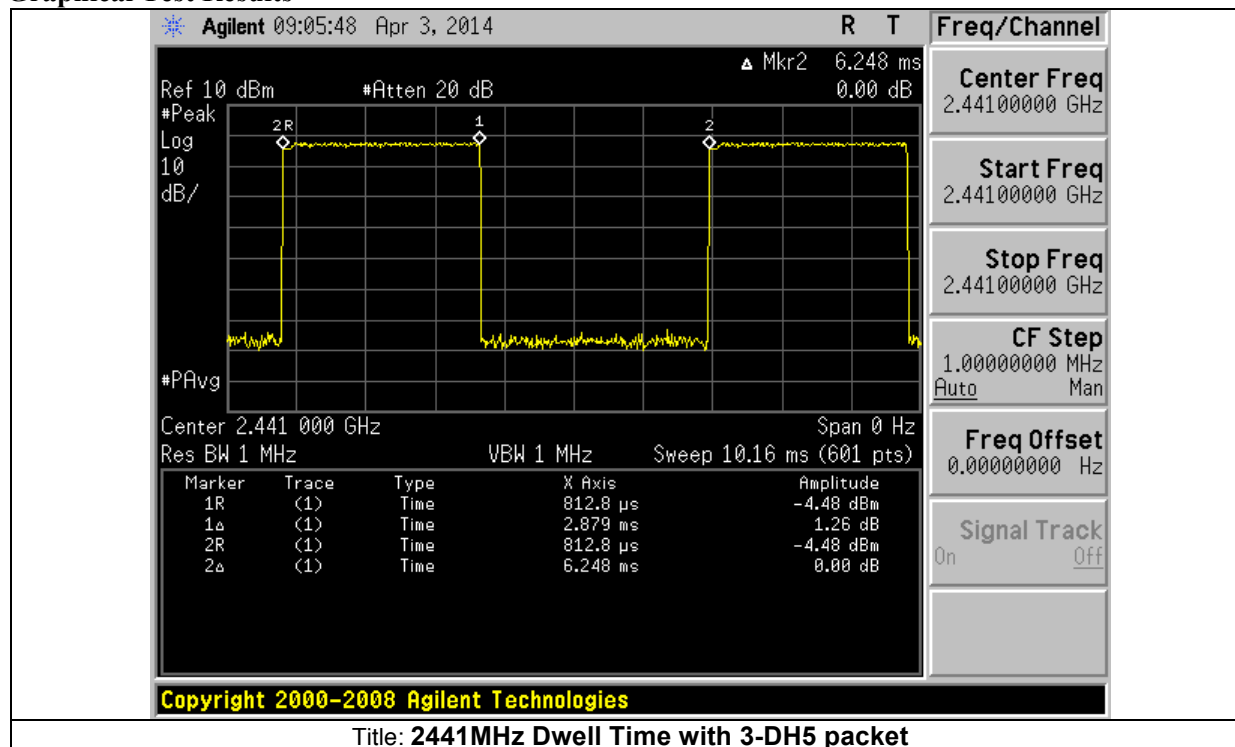

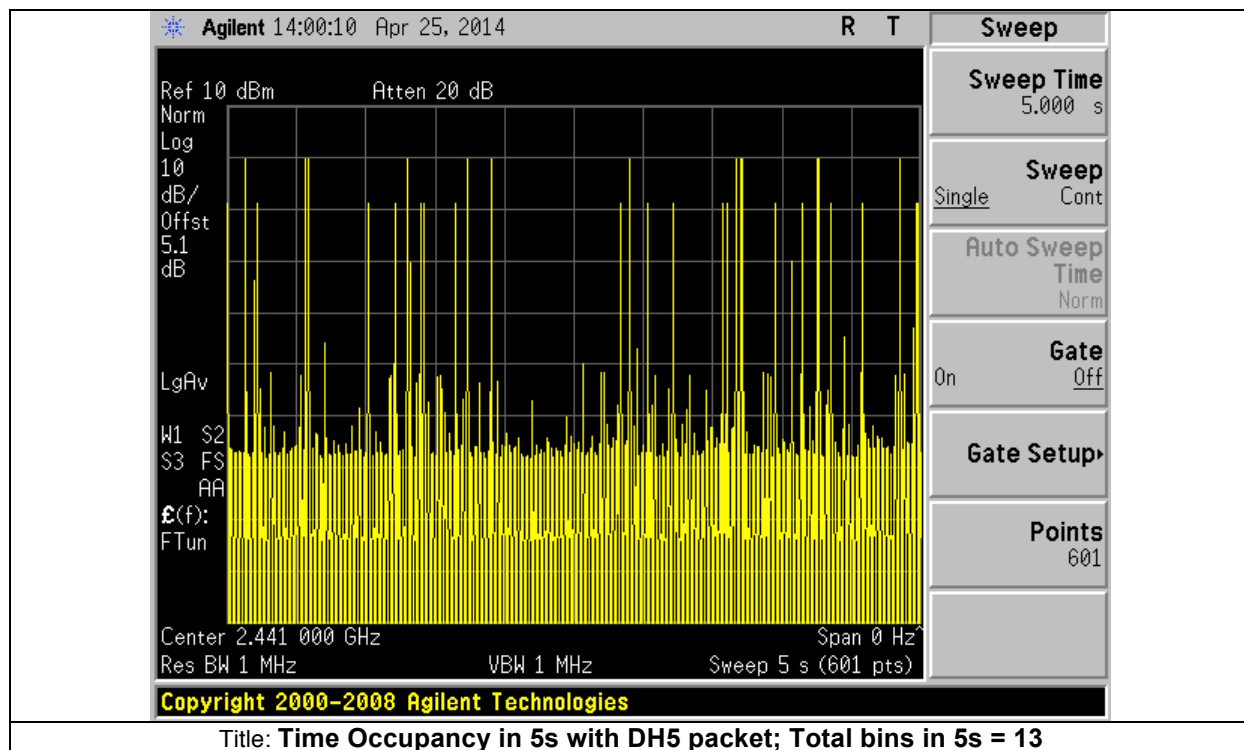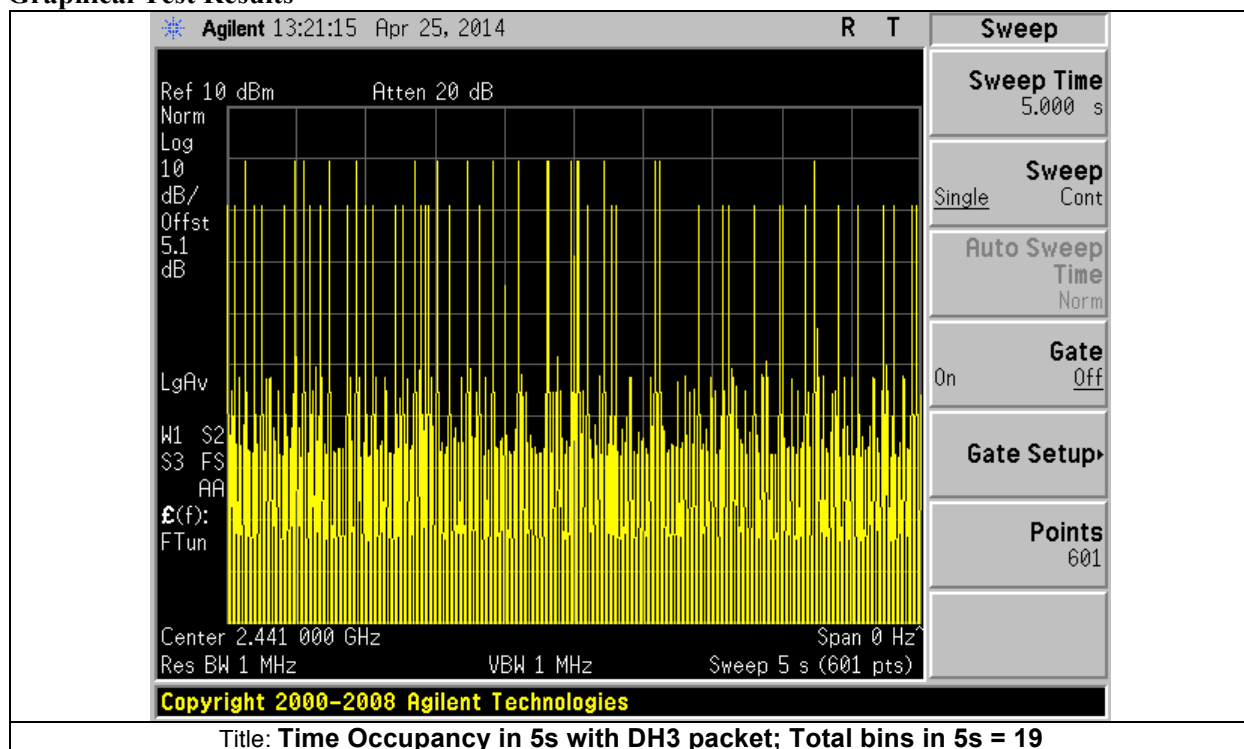**Graphical Test Results**

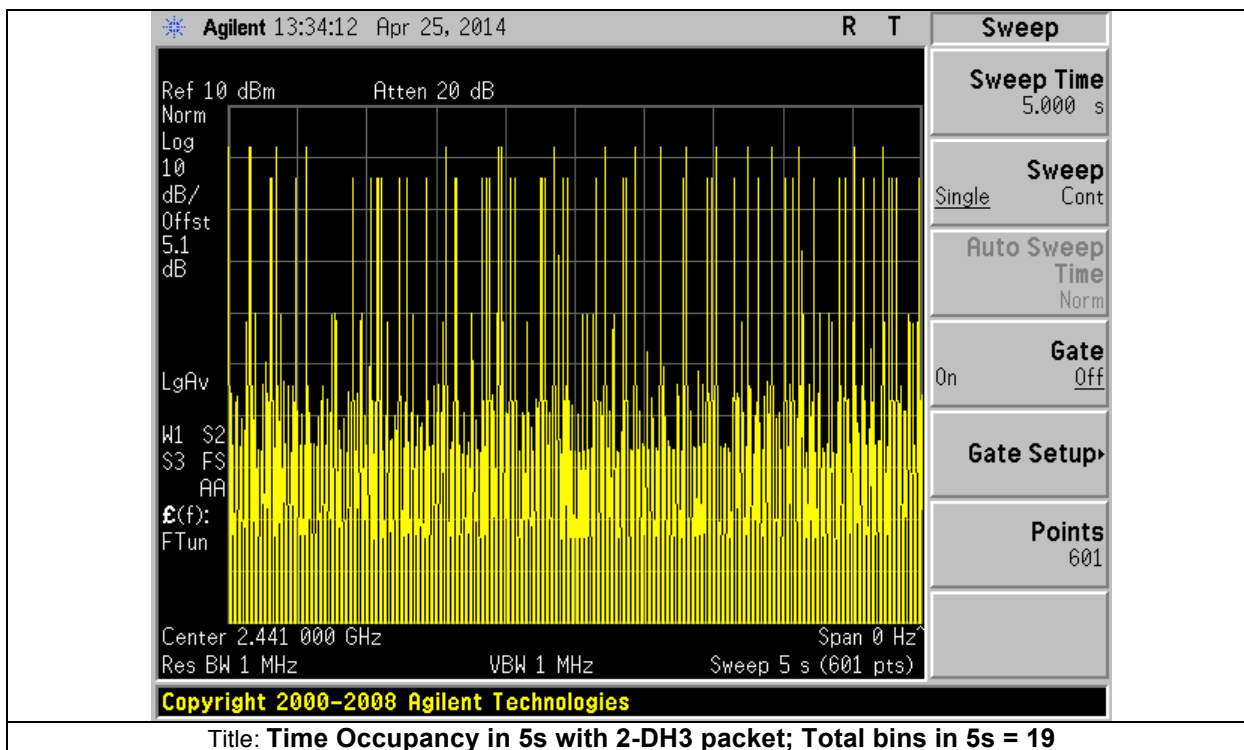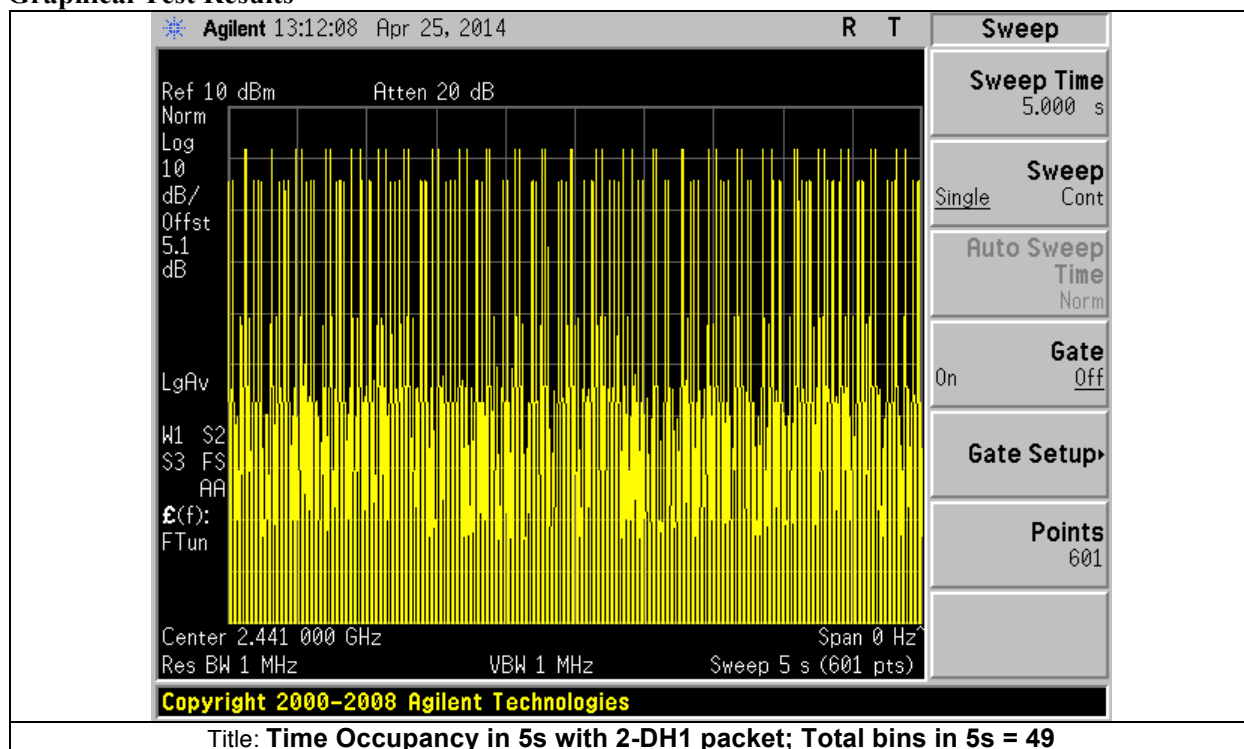**Graphical Test Results**

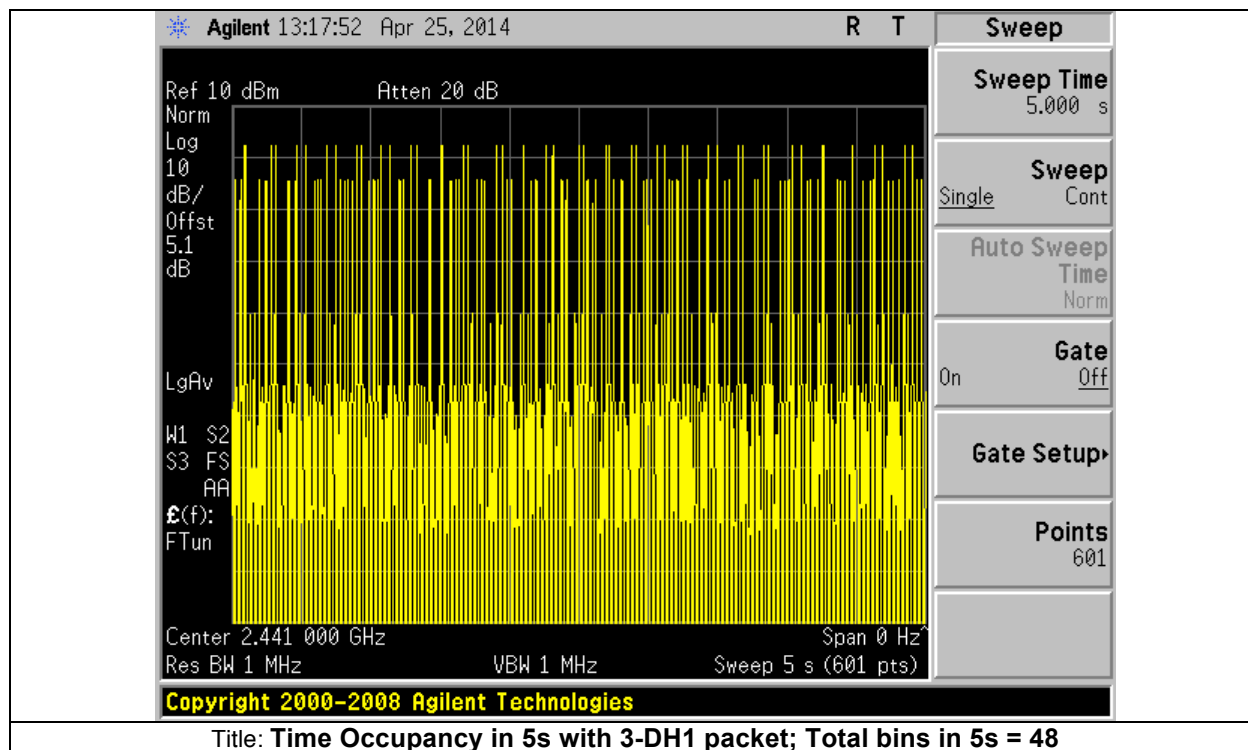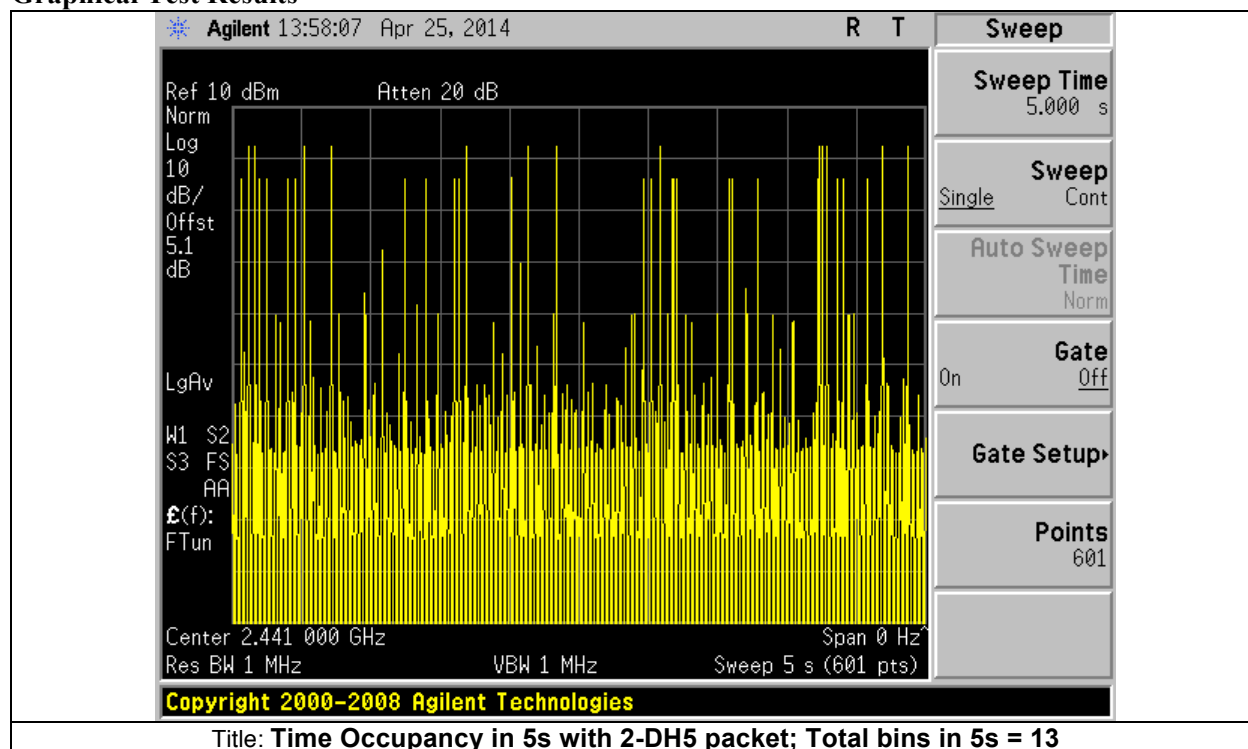**Graphical Test Results**

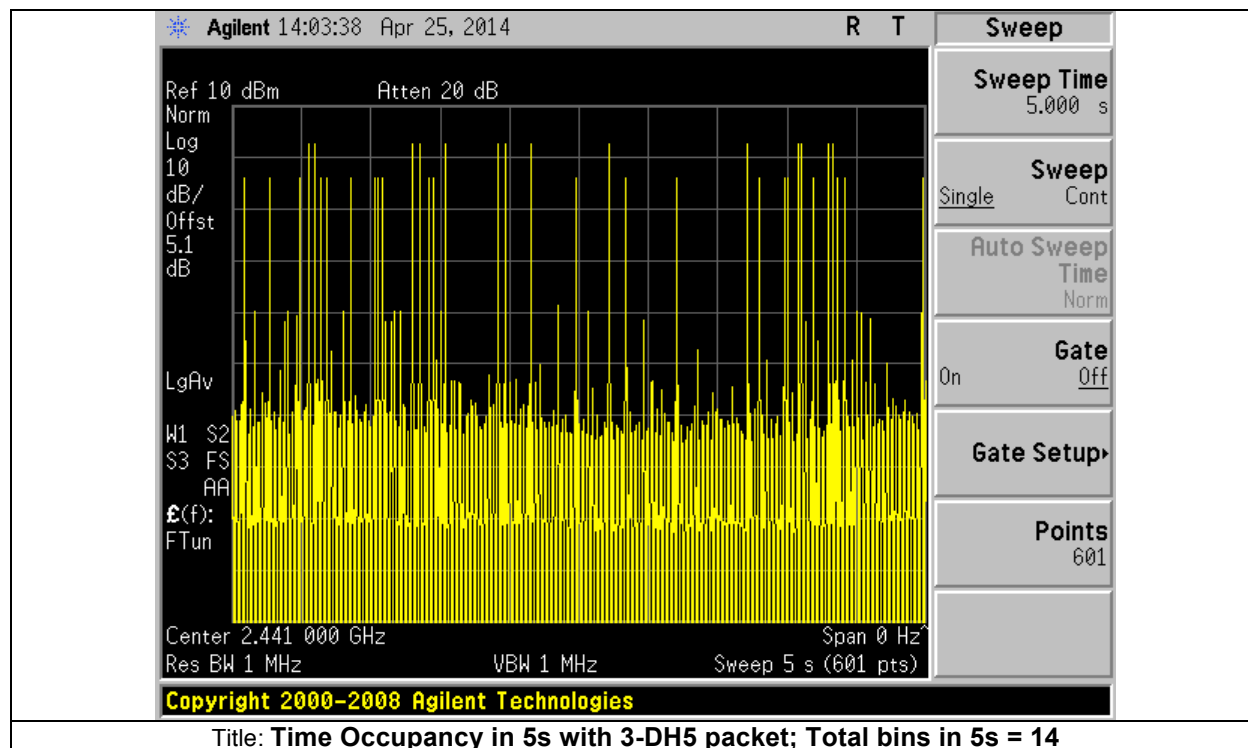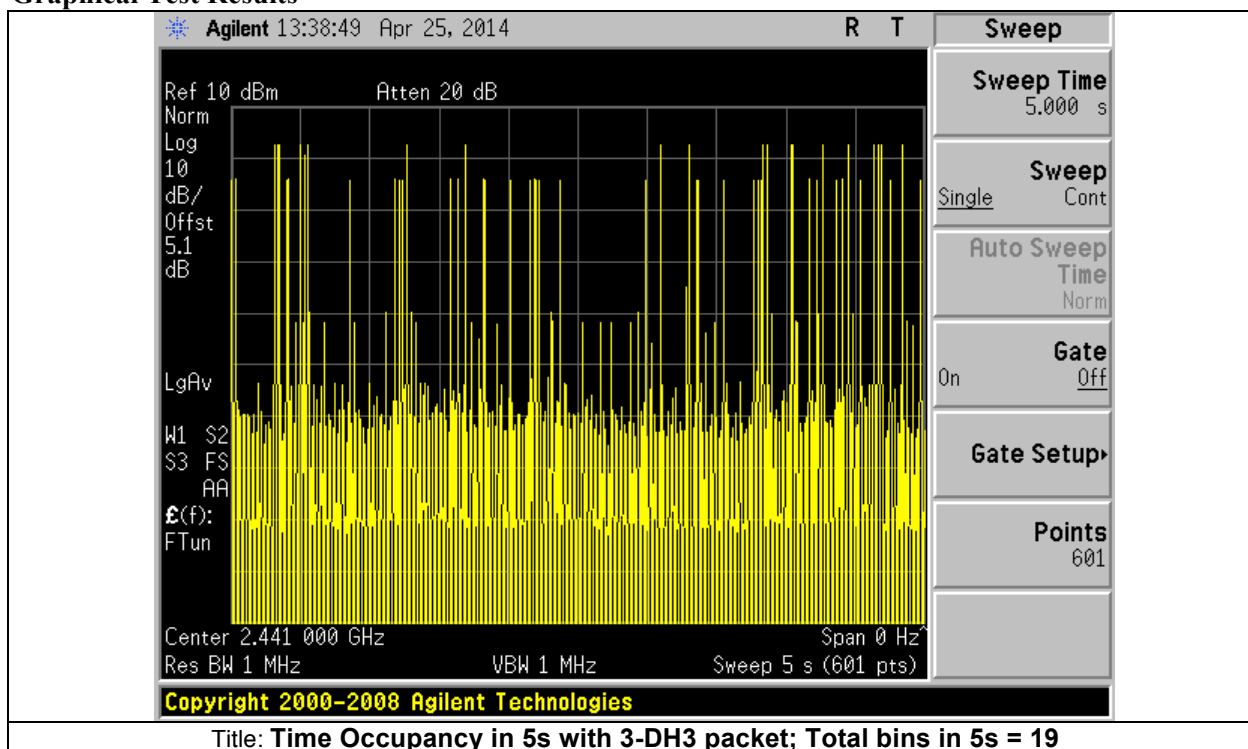**Graphical Test Results**



A.6 Band Edge (Conducted)

15.247 (d) & RSS-210 A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in FCC §15.209(a) & RSS-Gen is not required.



Measurement Procedure

In accordance with KDB Publication DA 00-705

Overall Result: PASS





Graphical Test Results

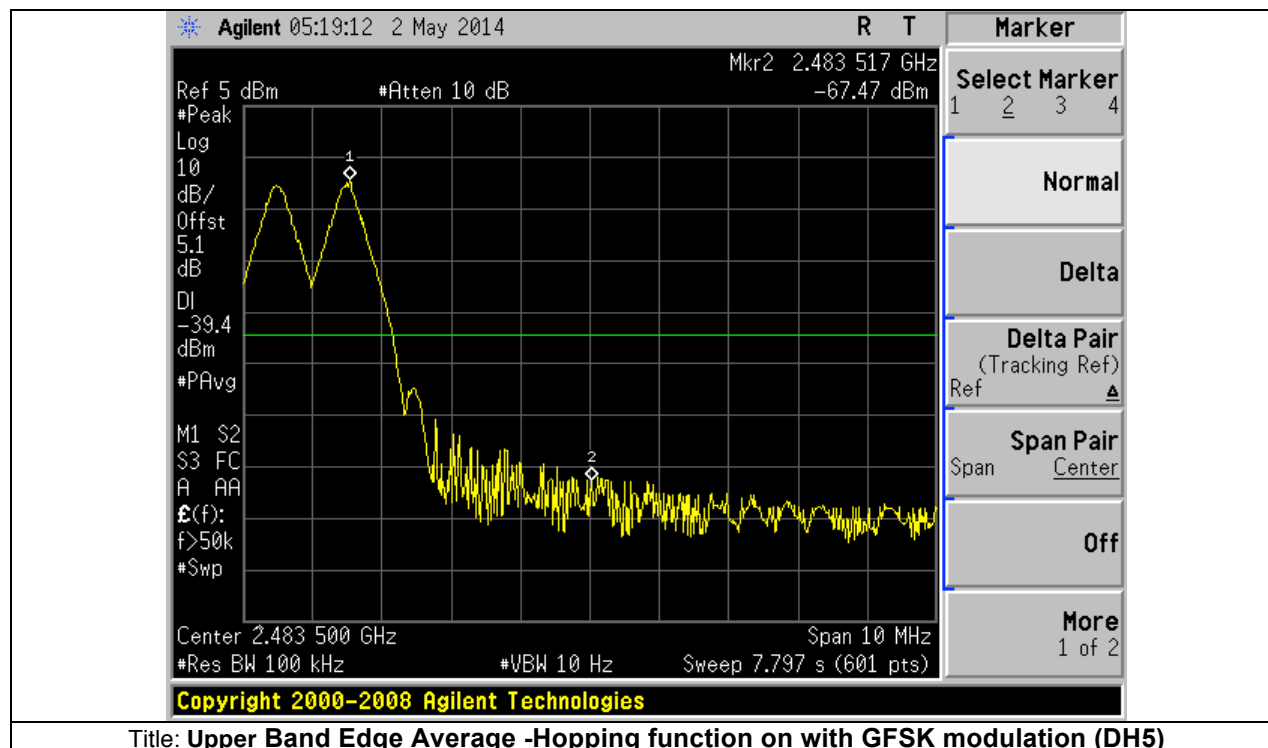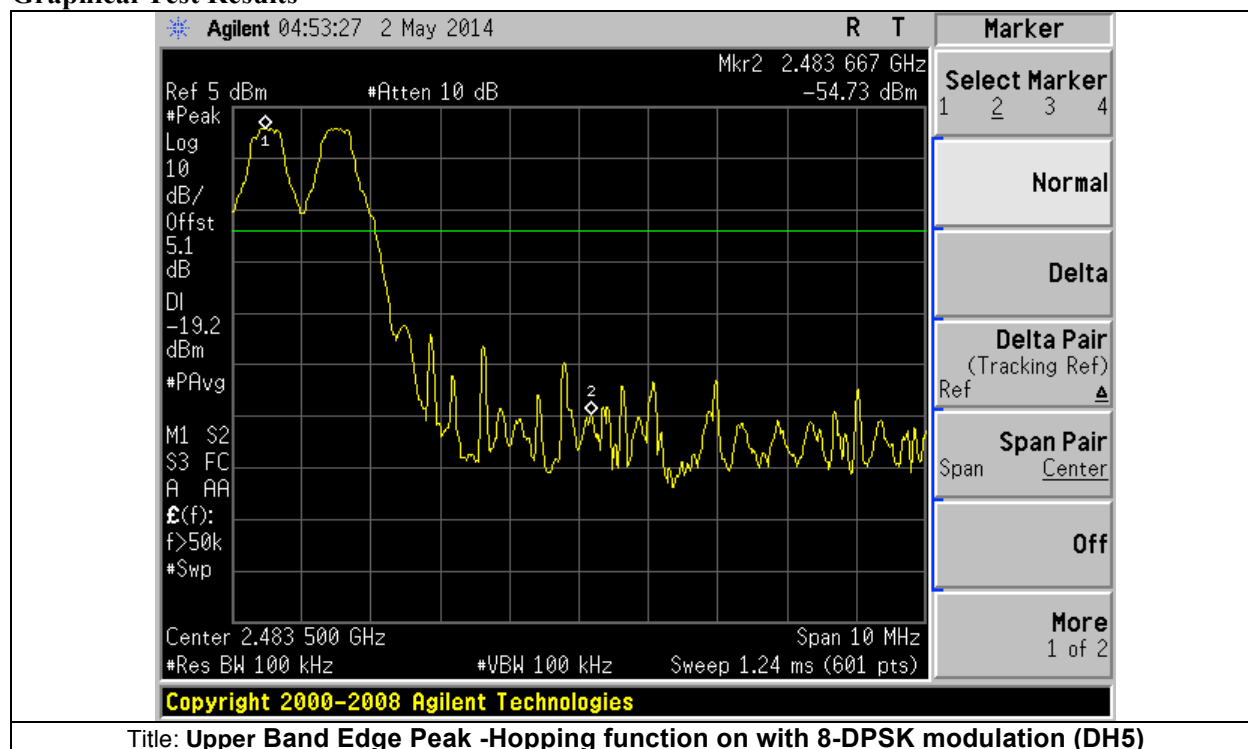





Graphical Test Results

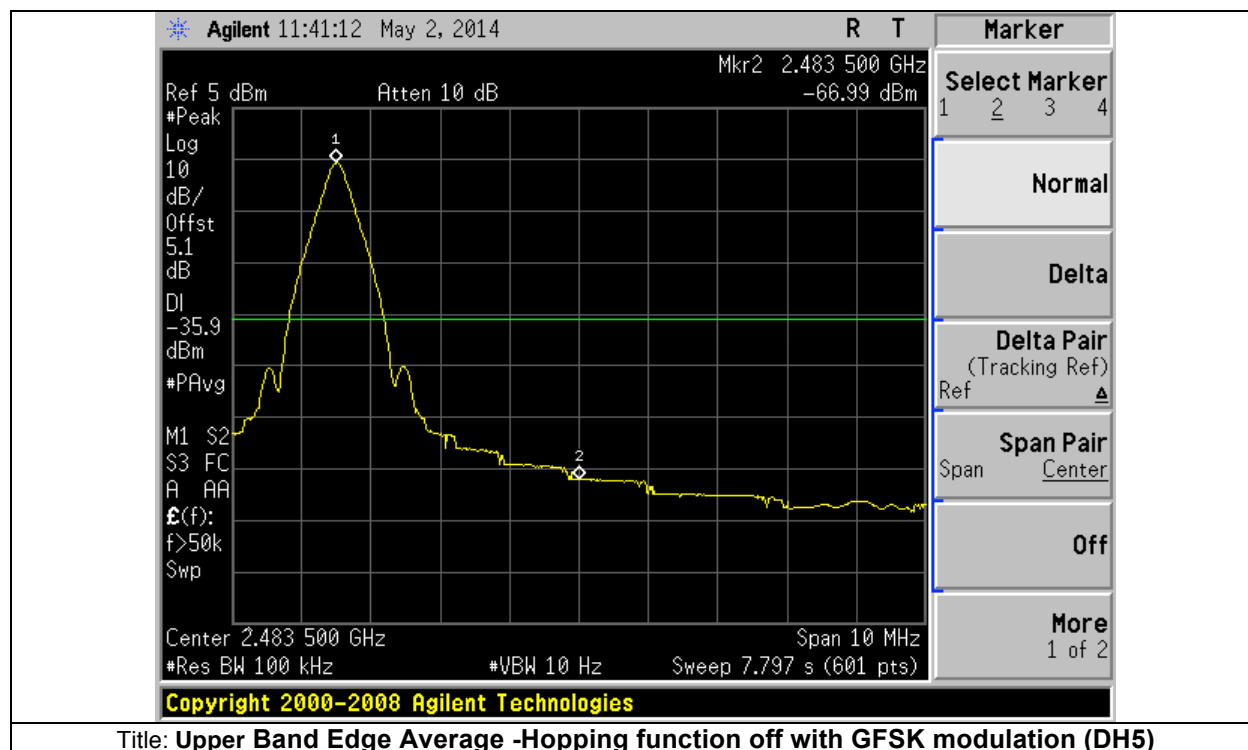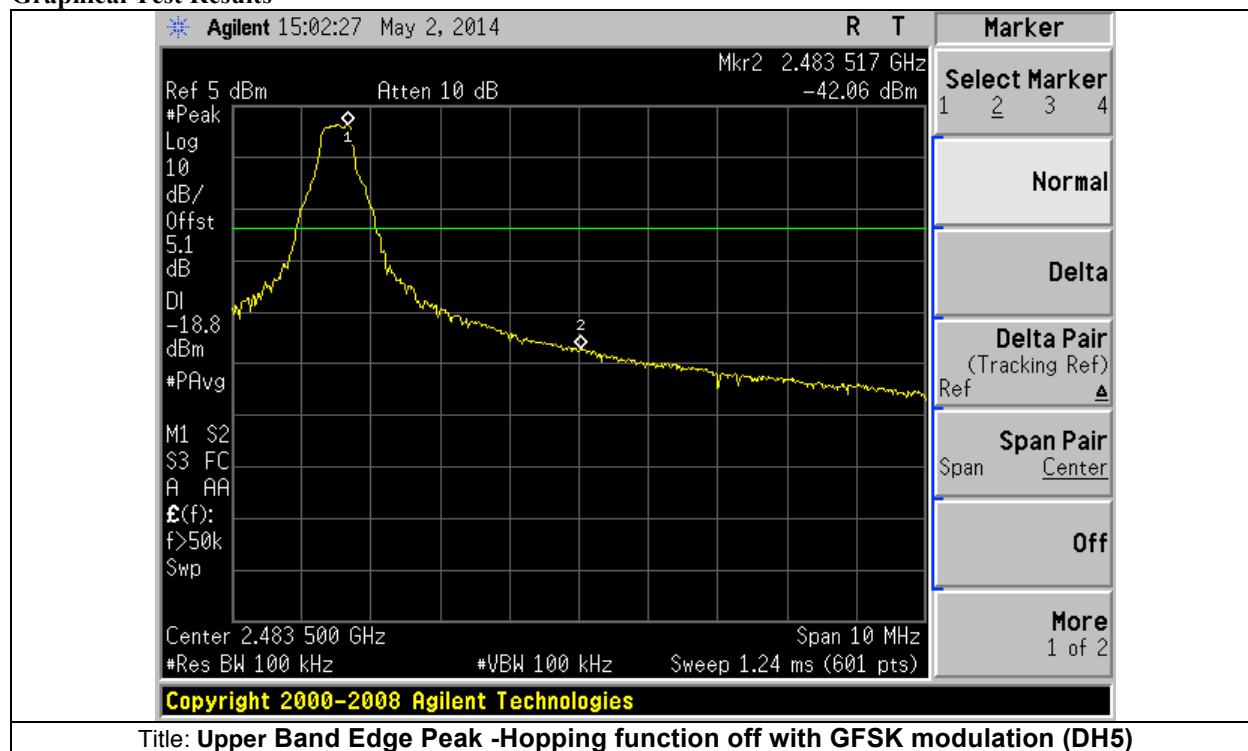





Graphical Test Results

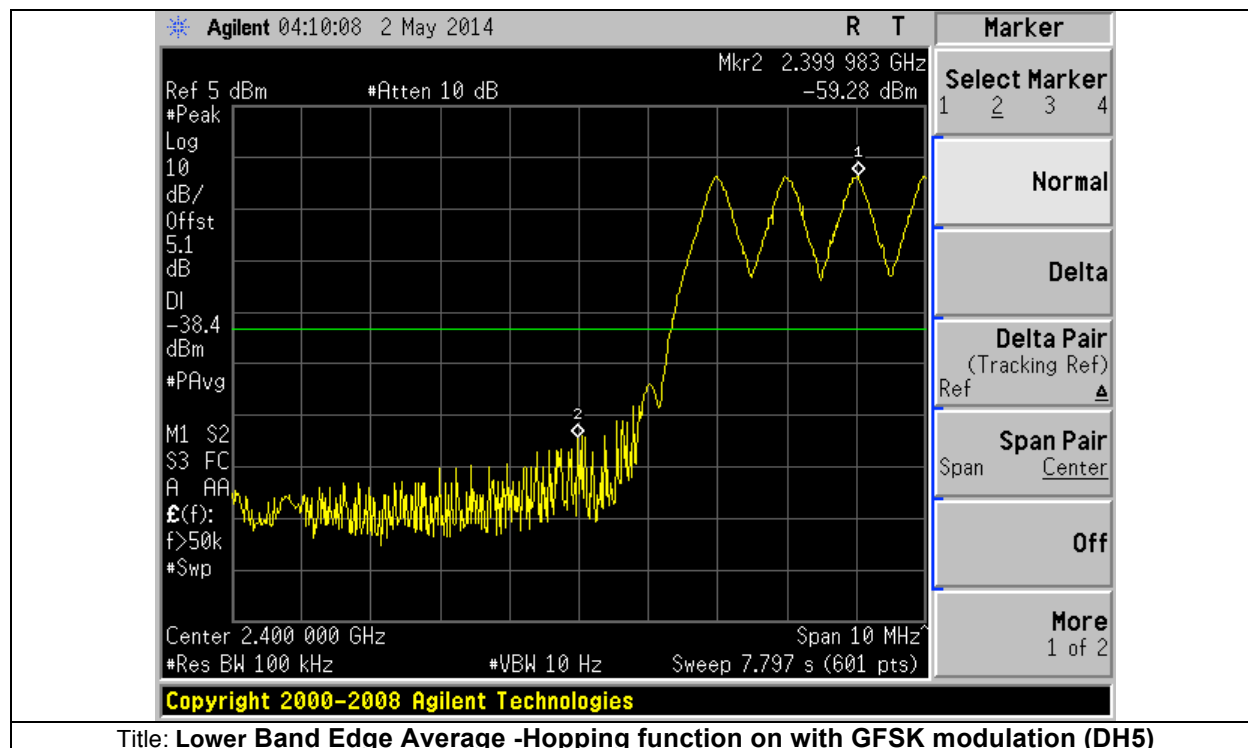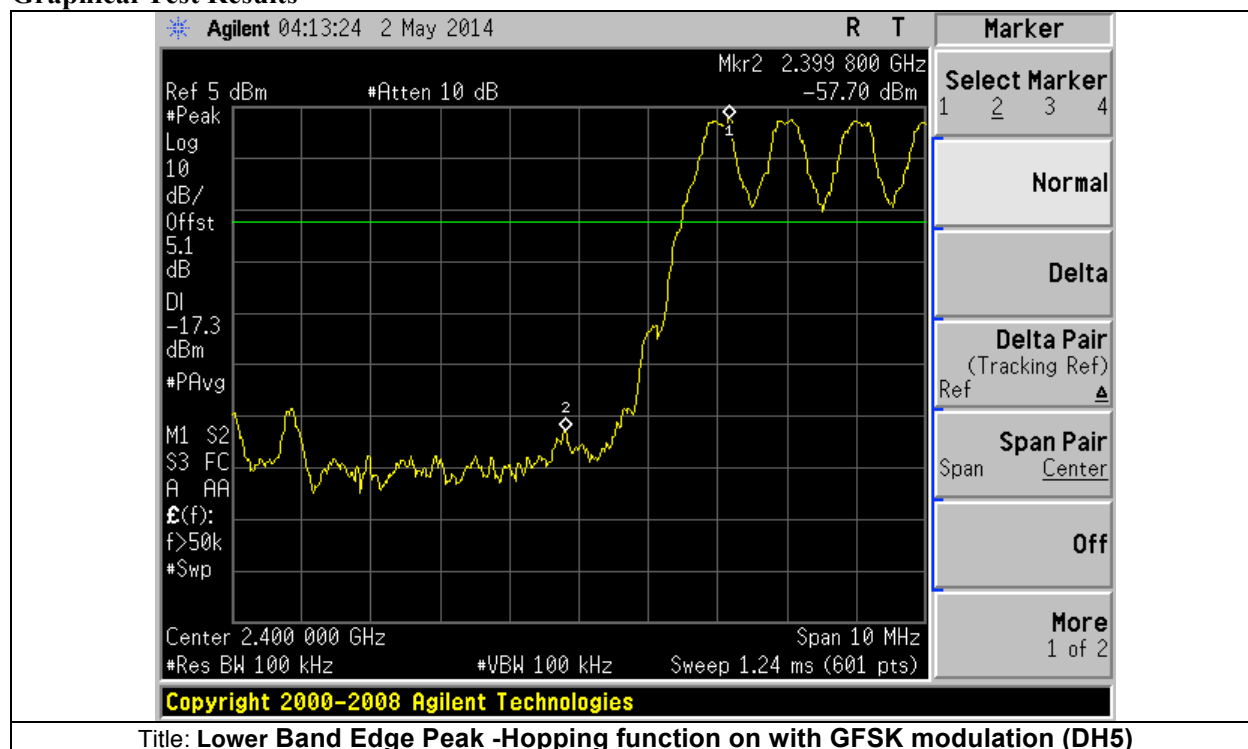





Graphical Test Results

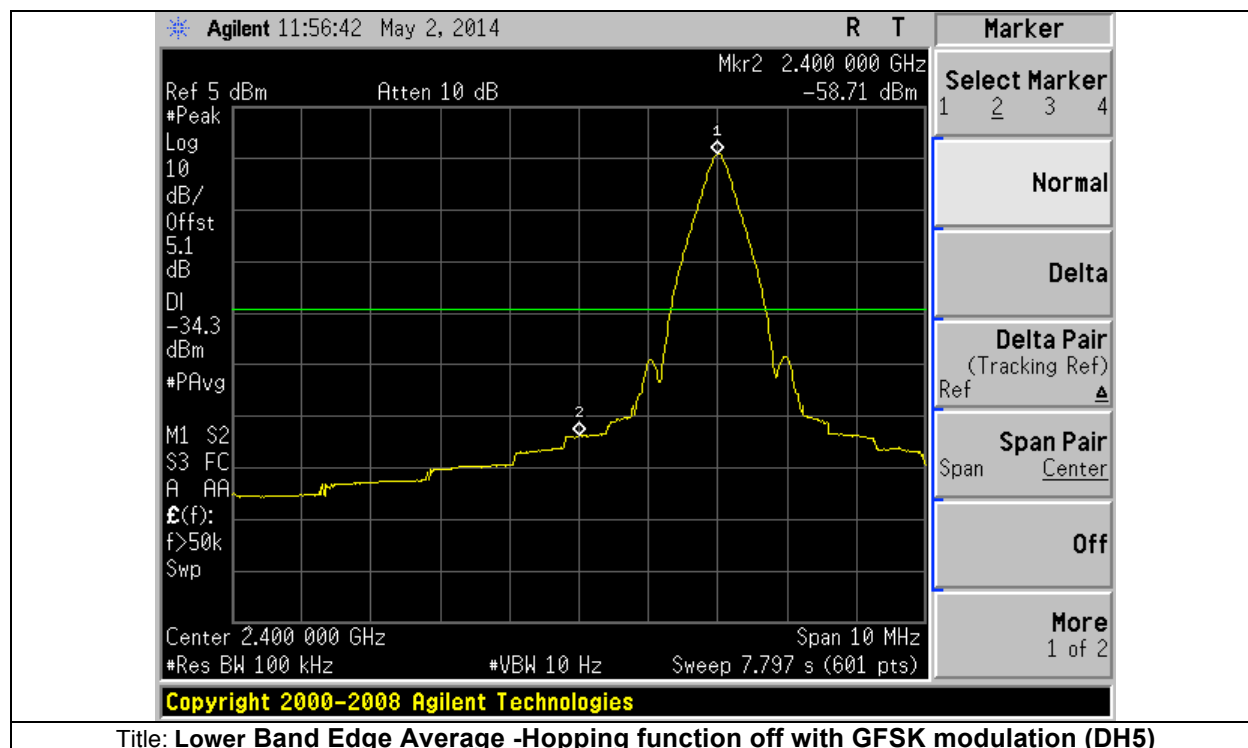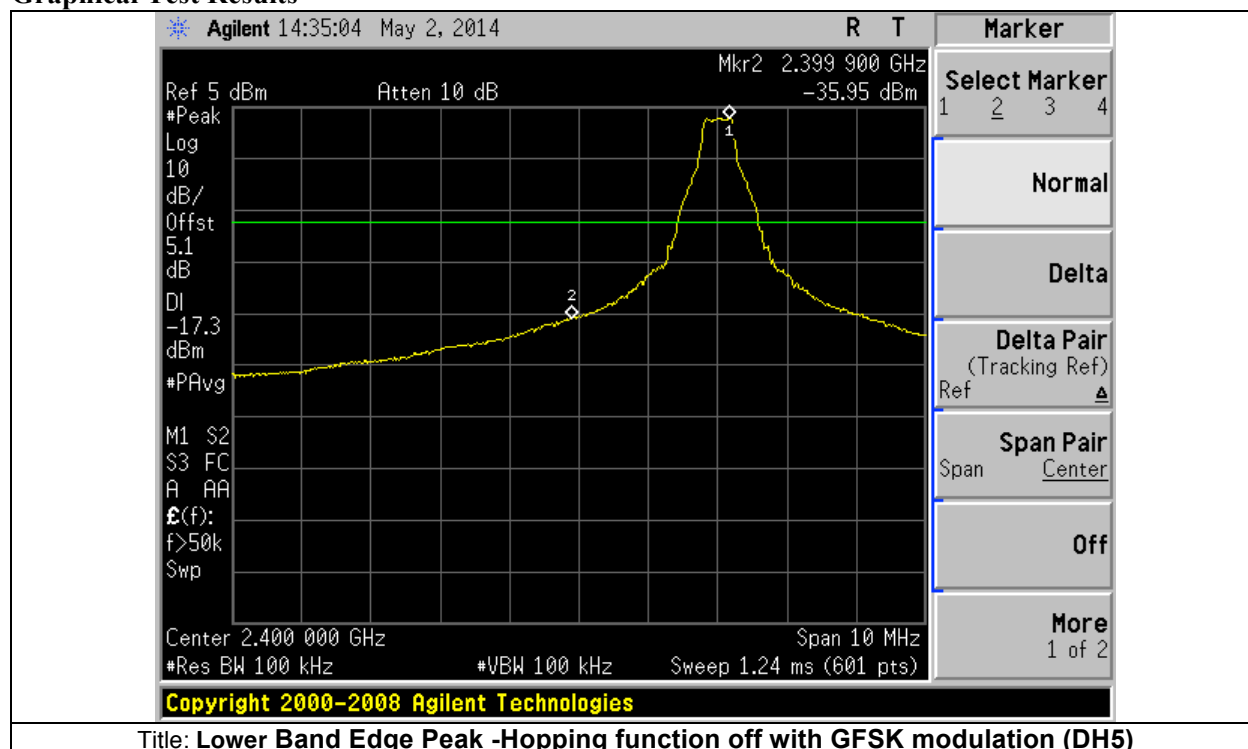





Graphical Test Results

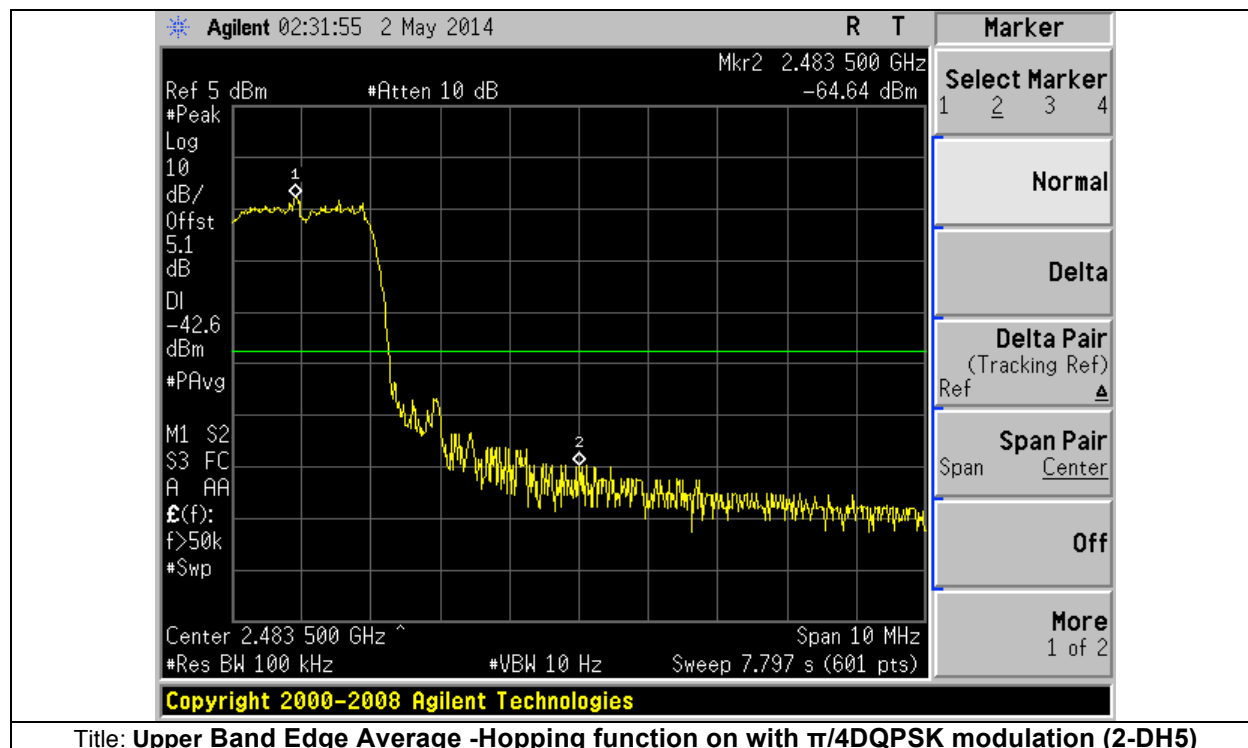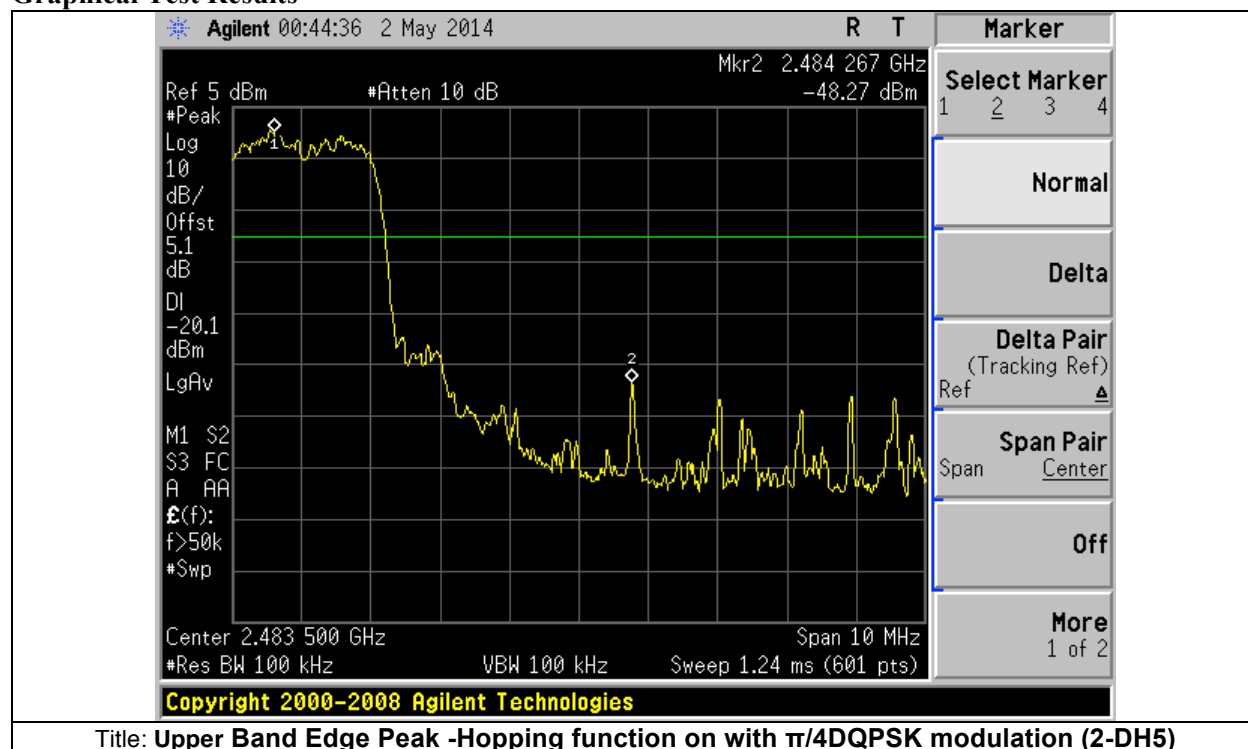





Graphical Test Results

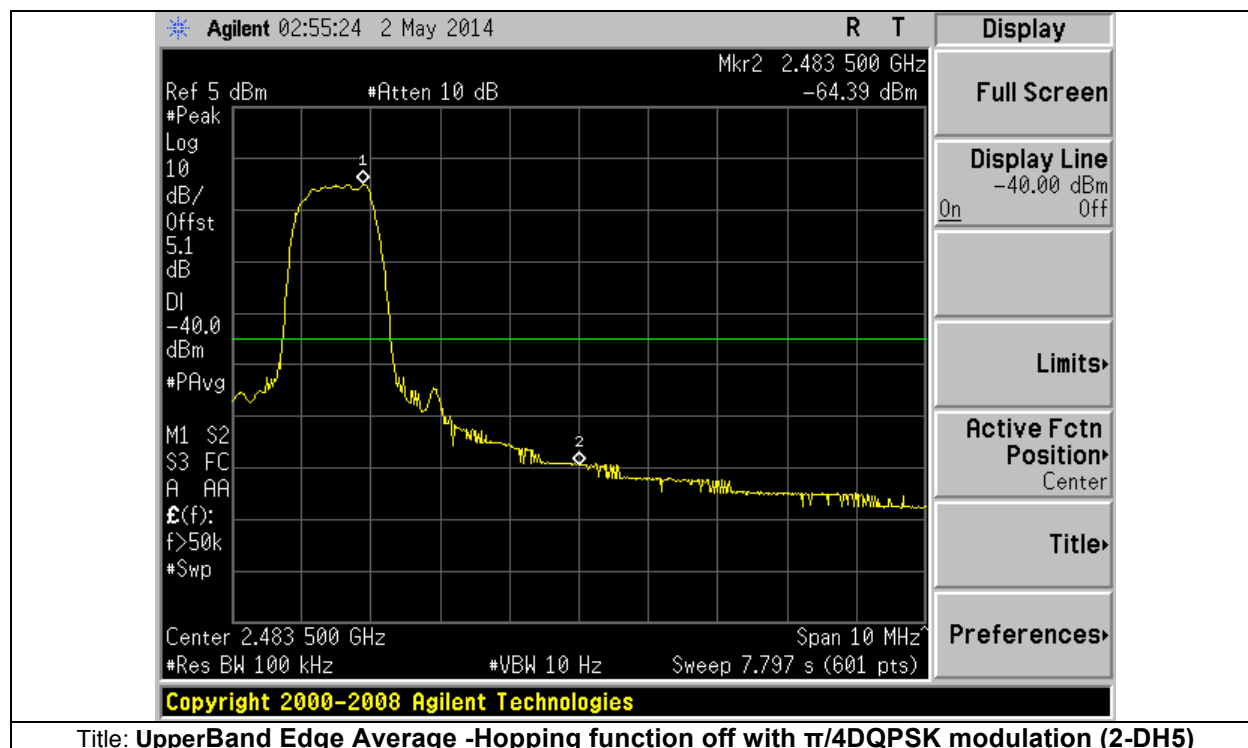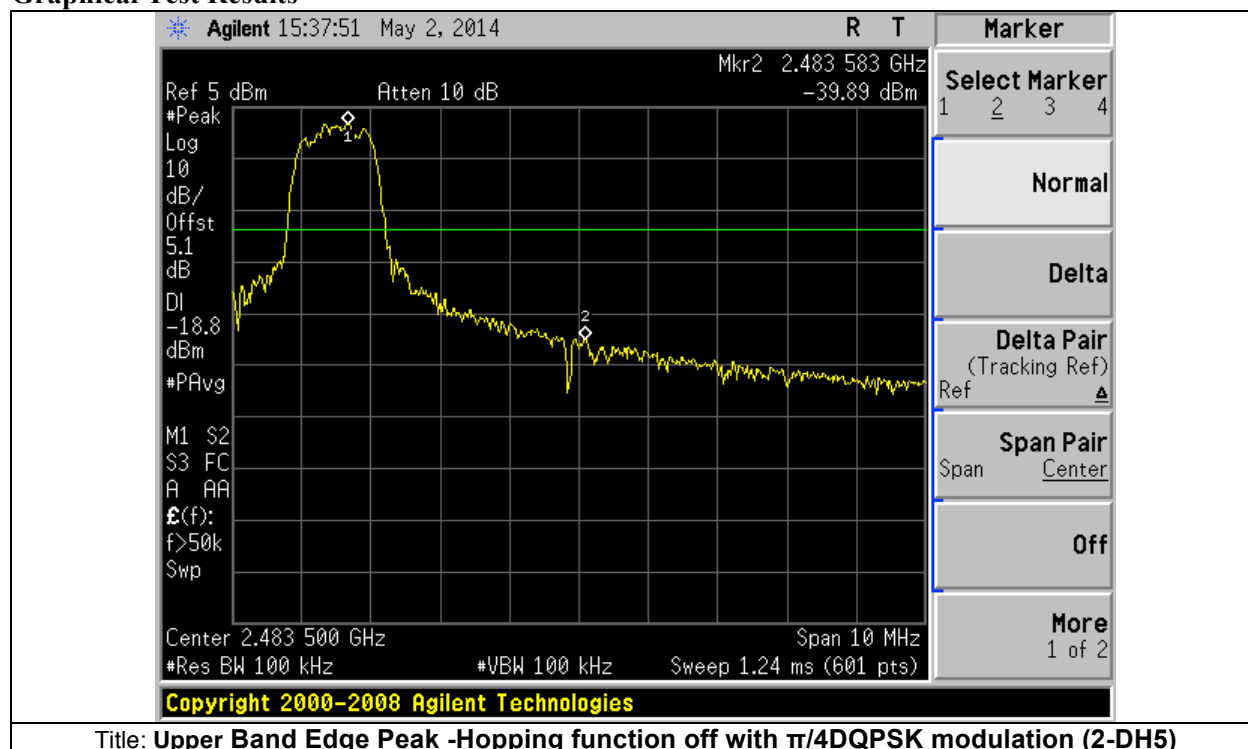





Graphical Test Results

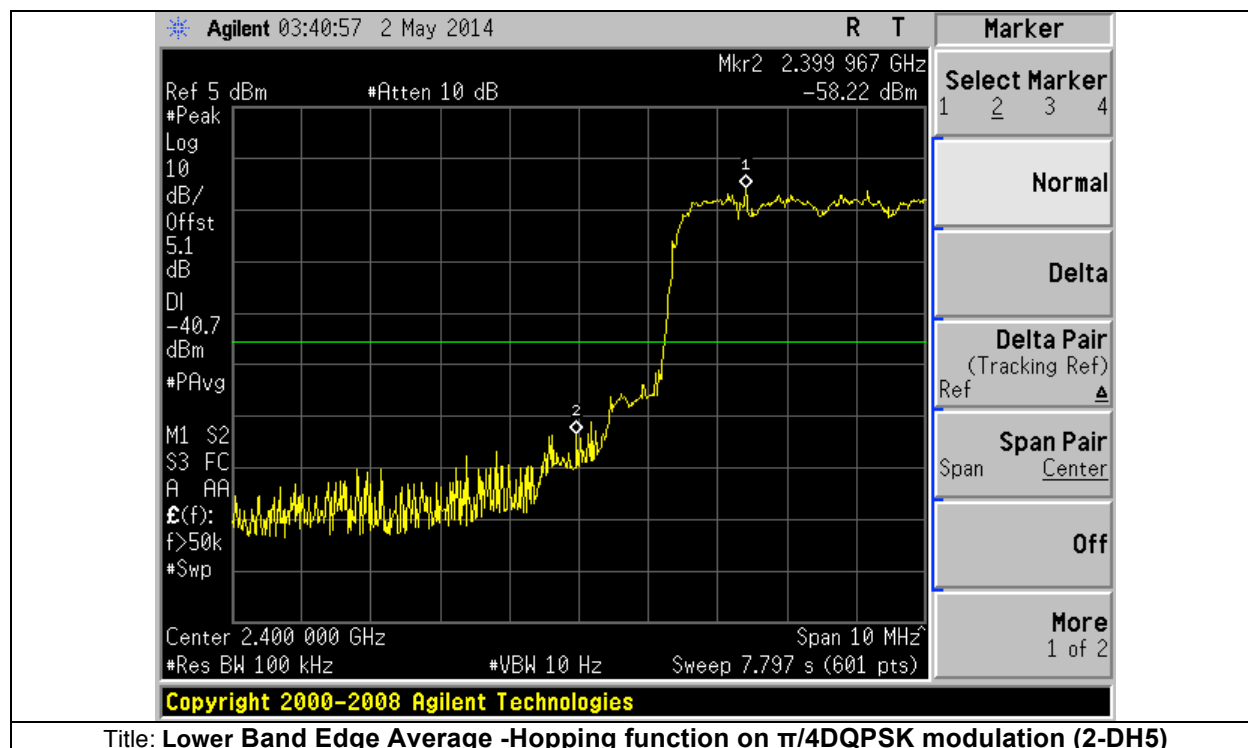
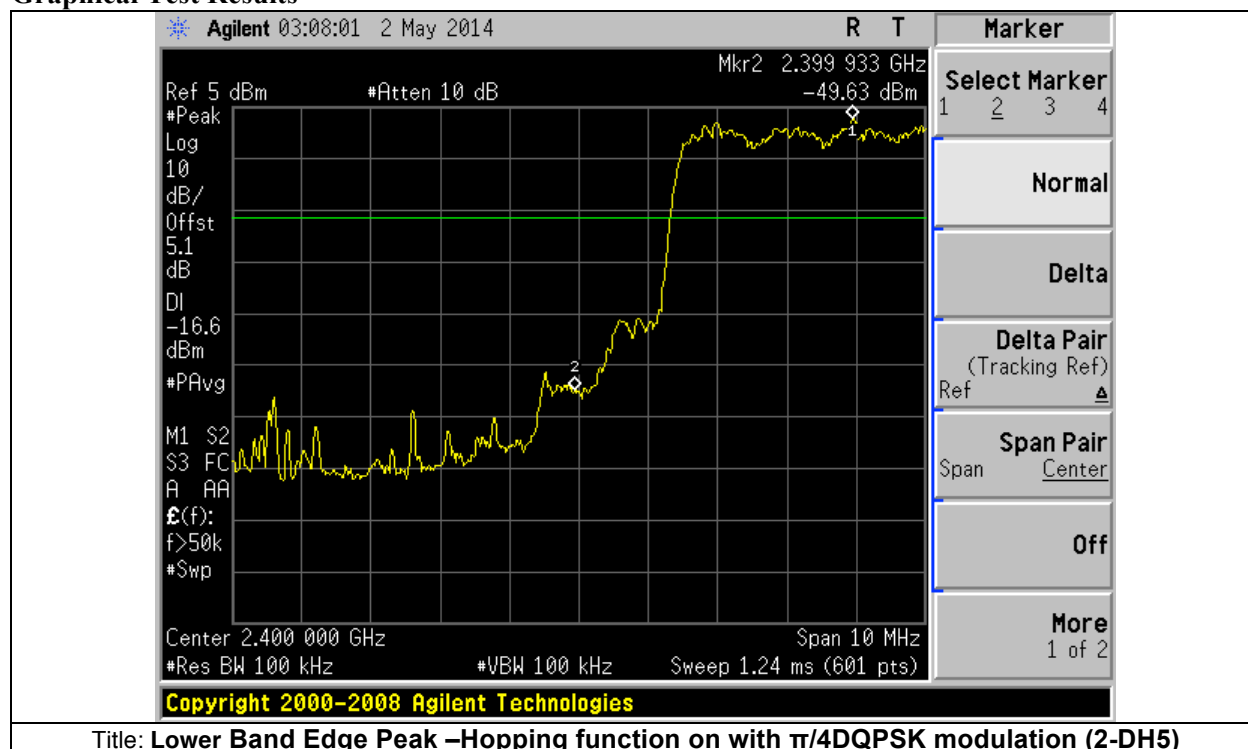




Graphical Test Results

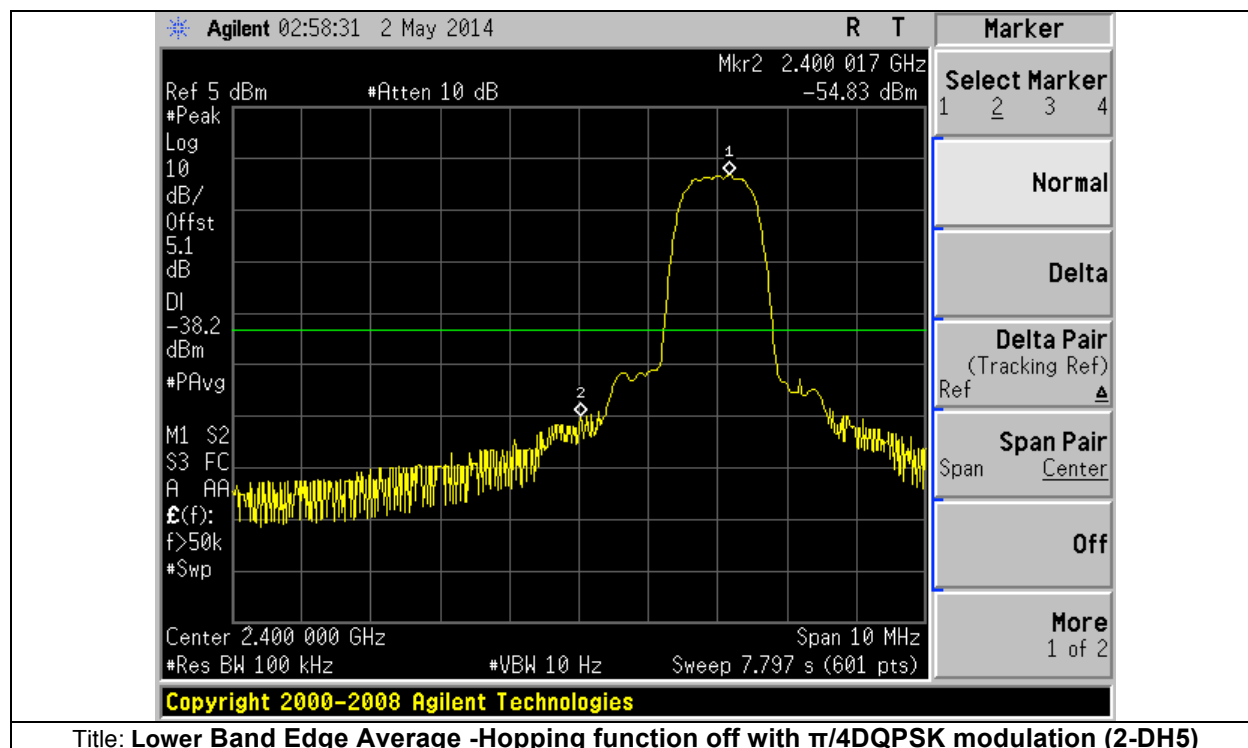
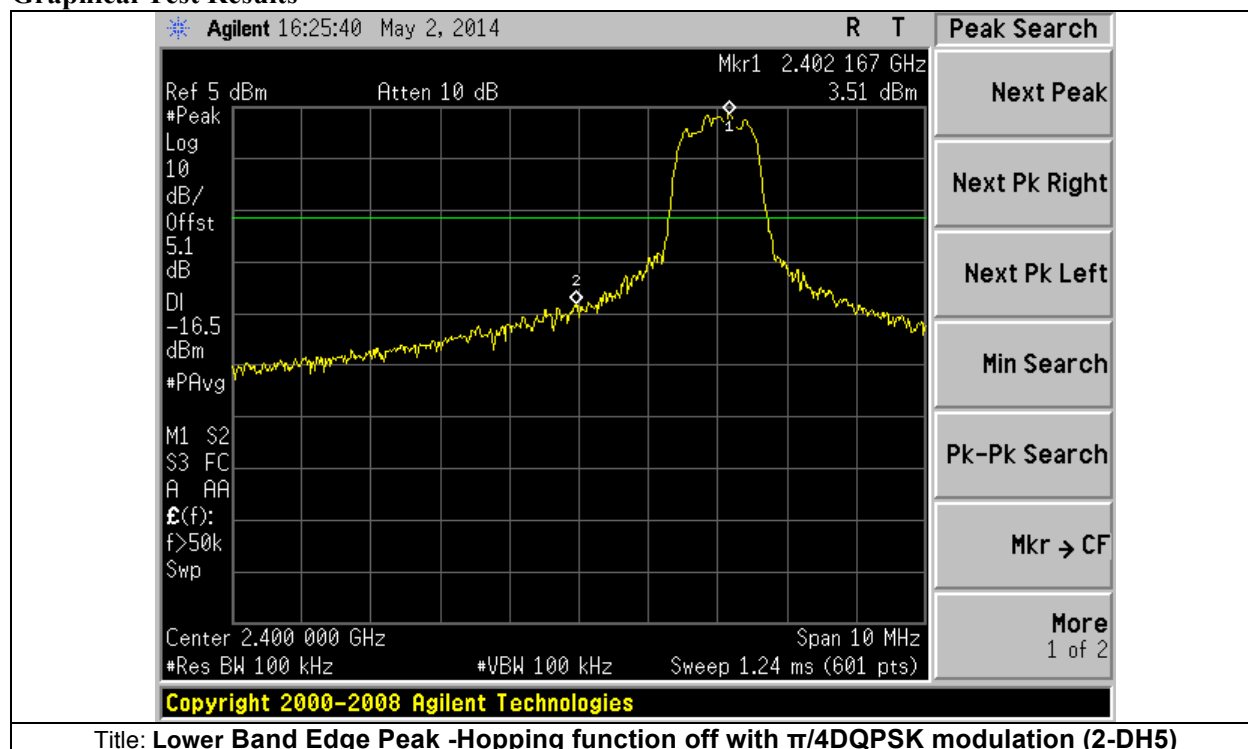


Graphical Test Results

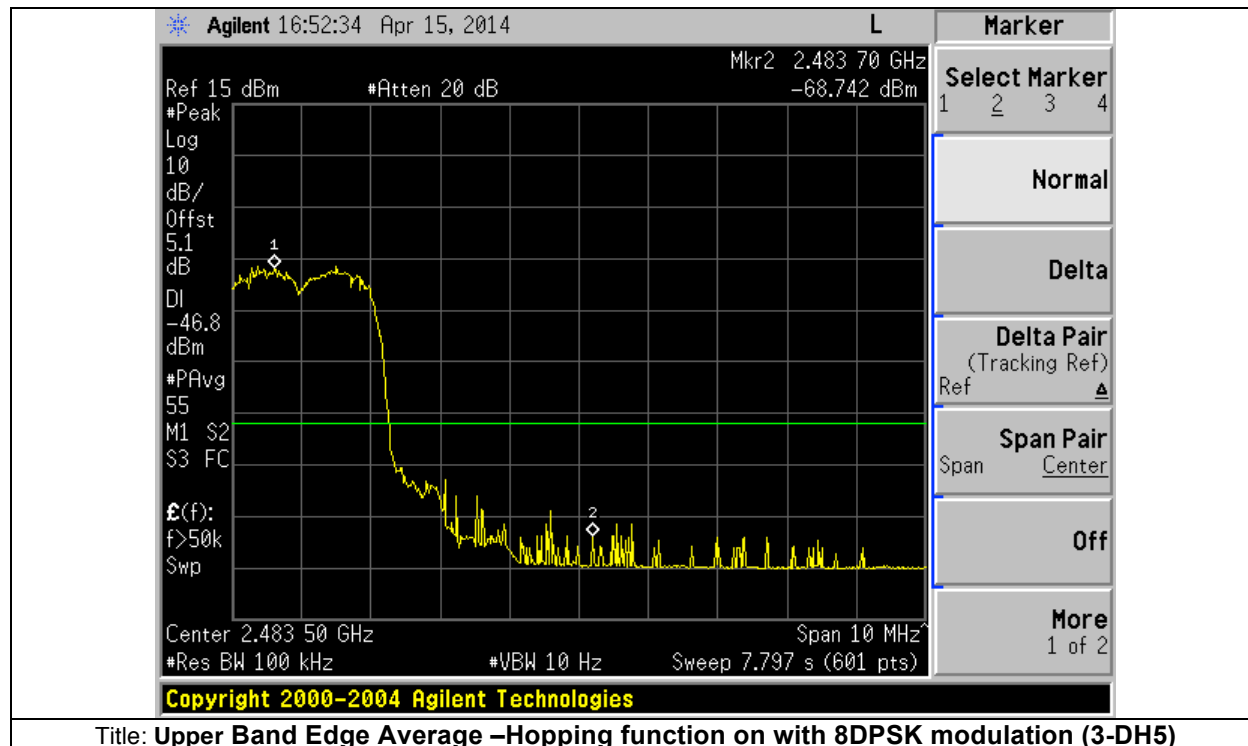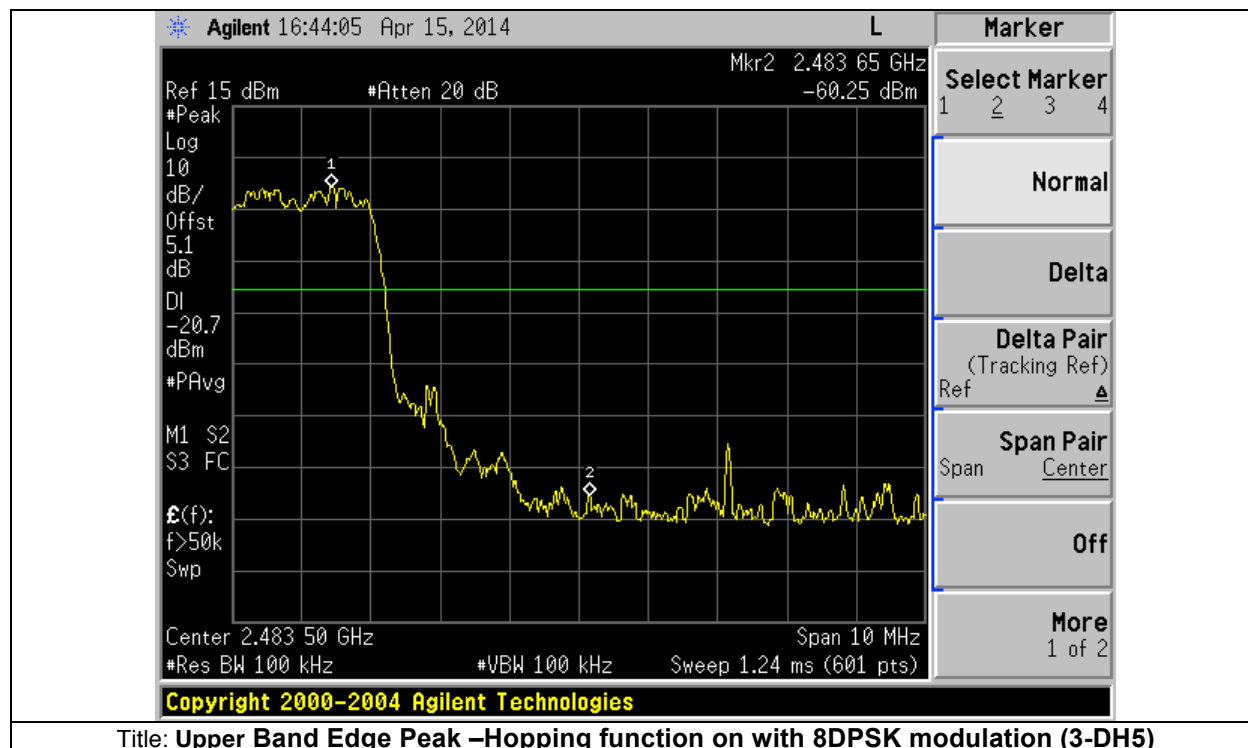





Graphical Test Results

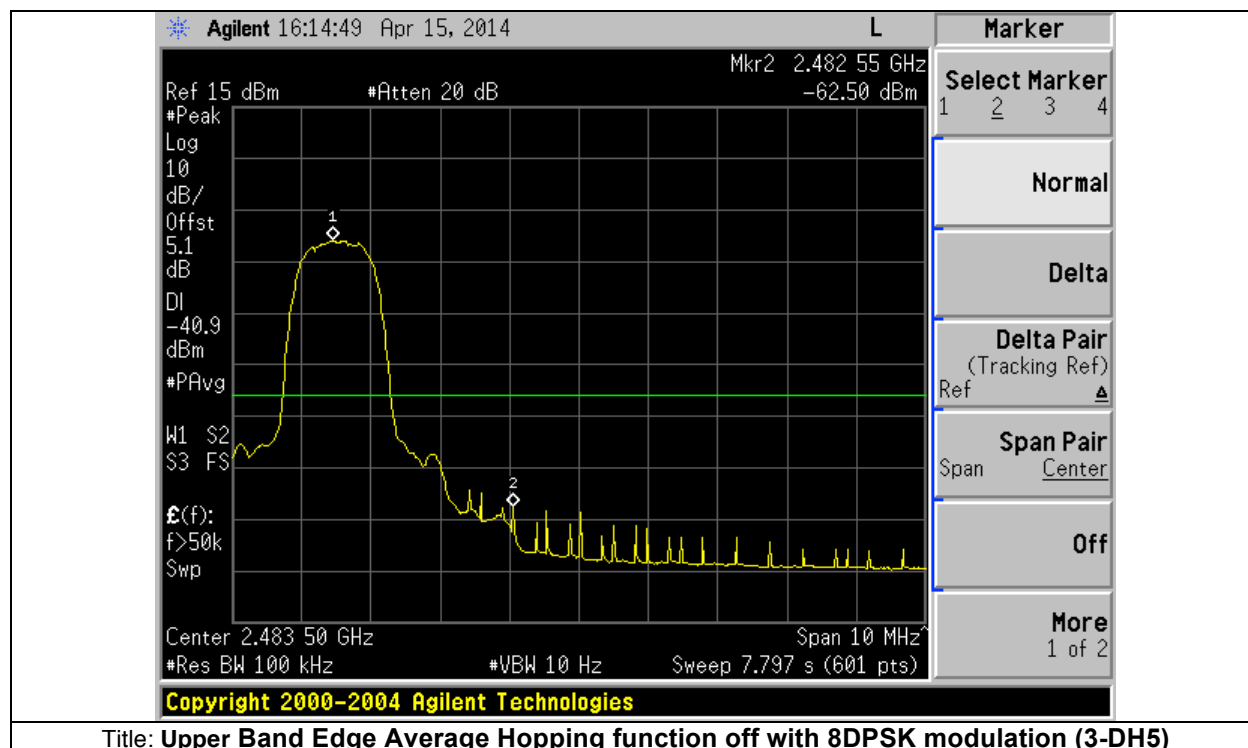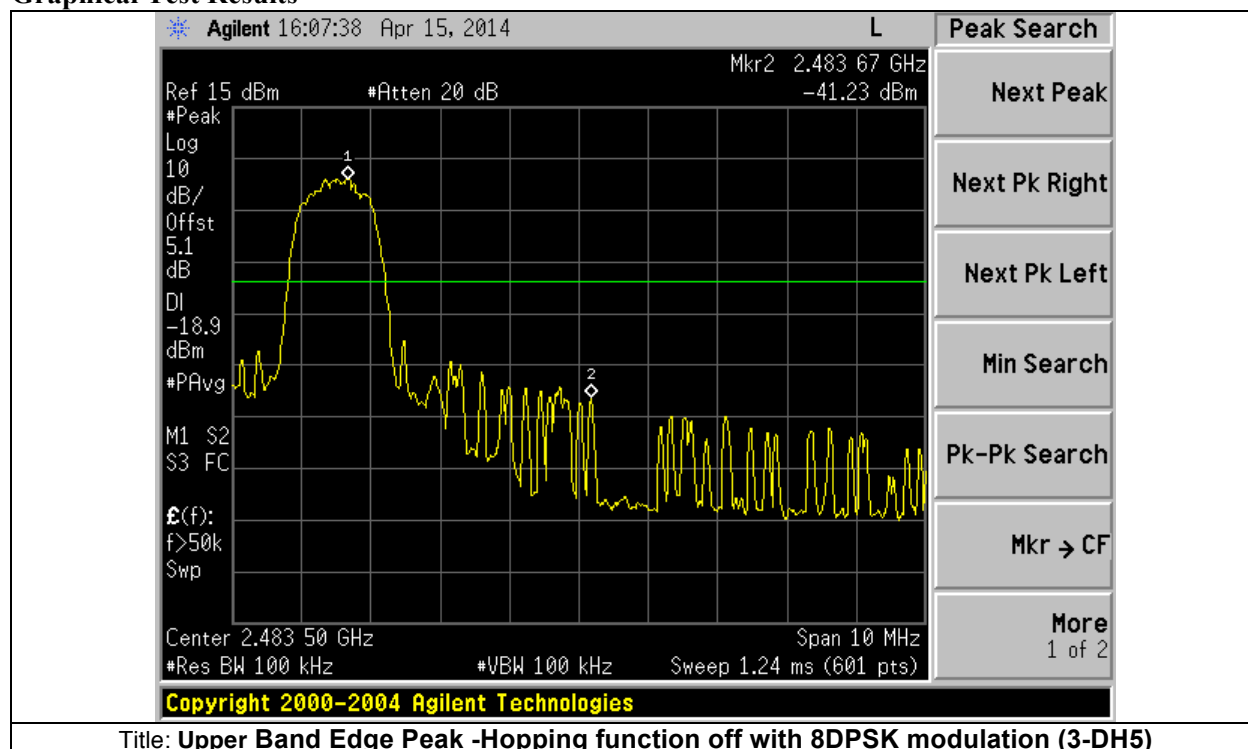





Graphical Test Results

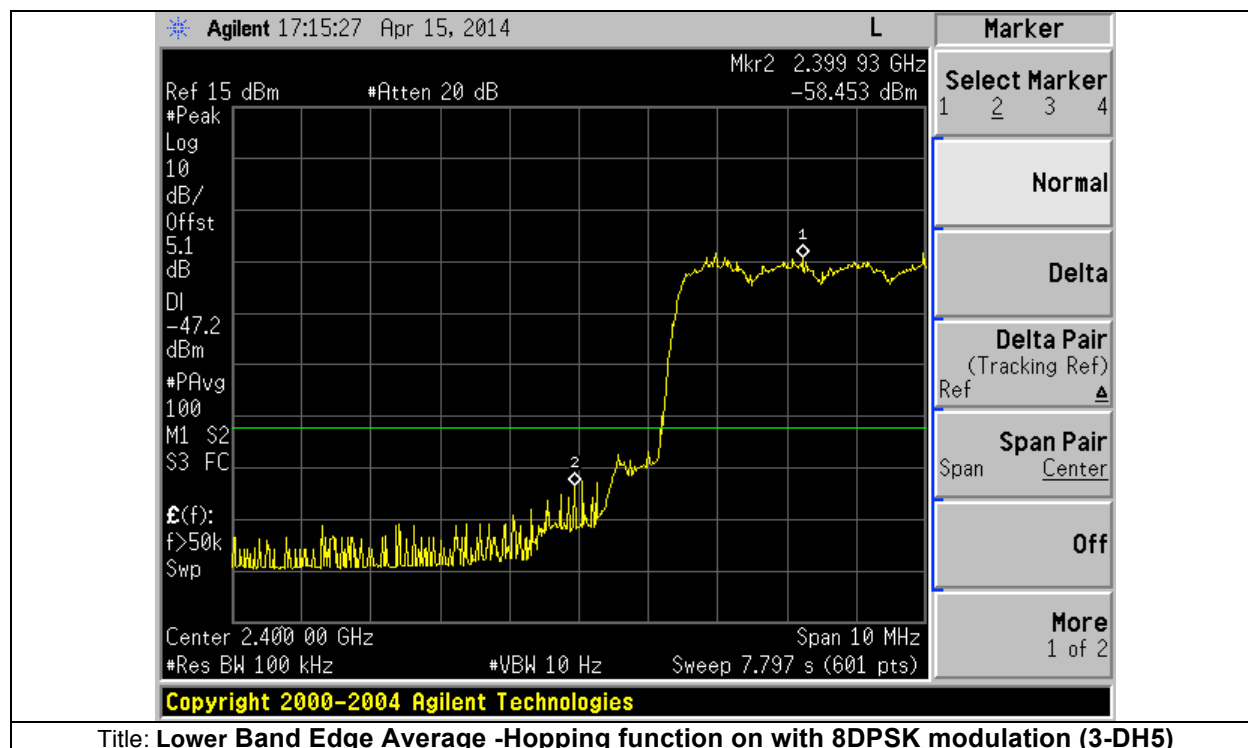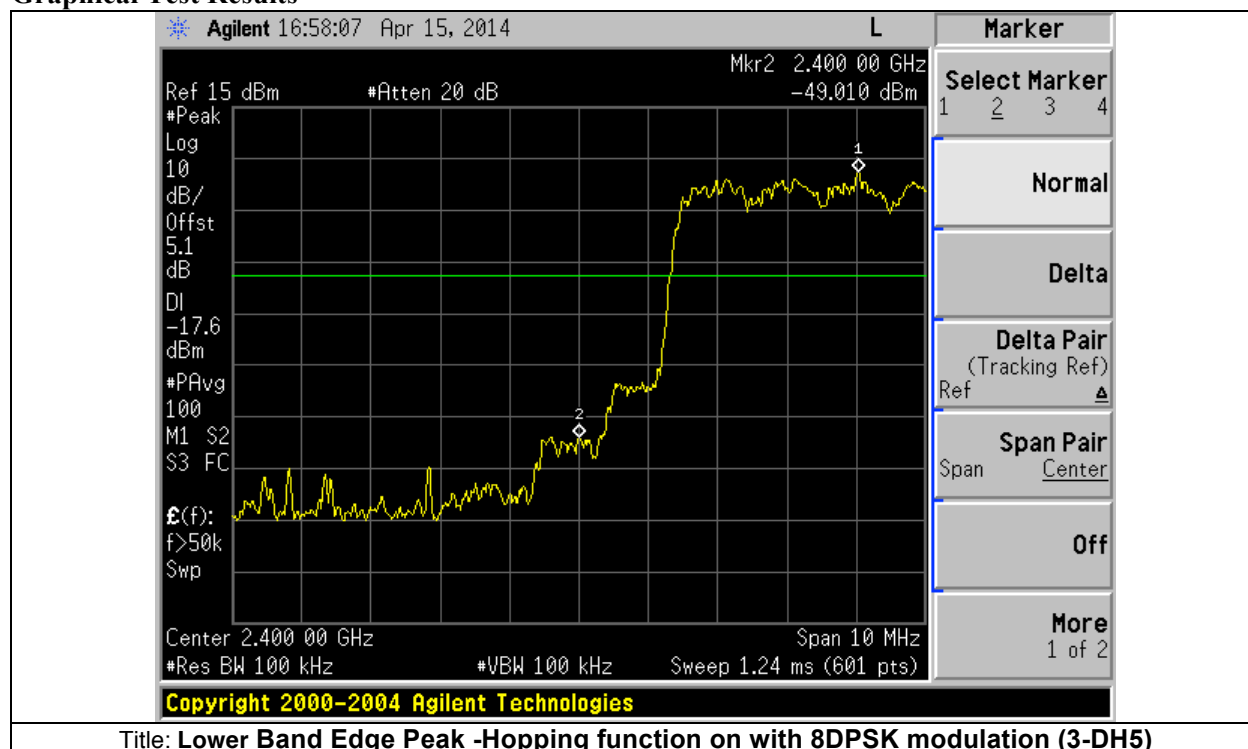



Graphical Test Results

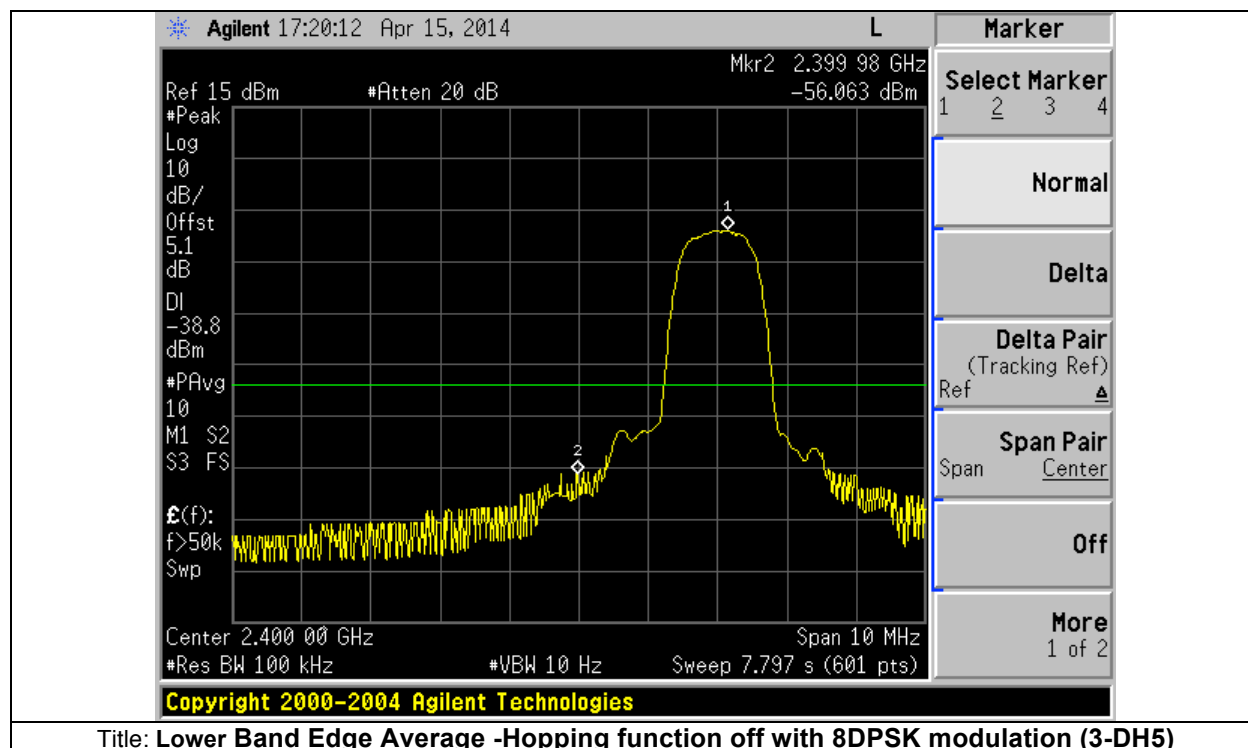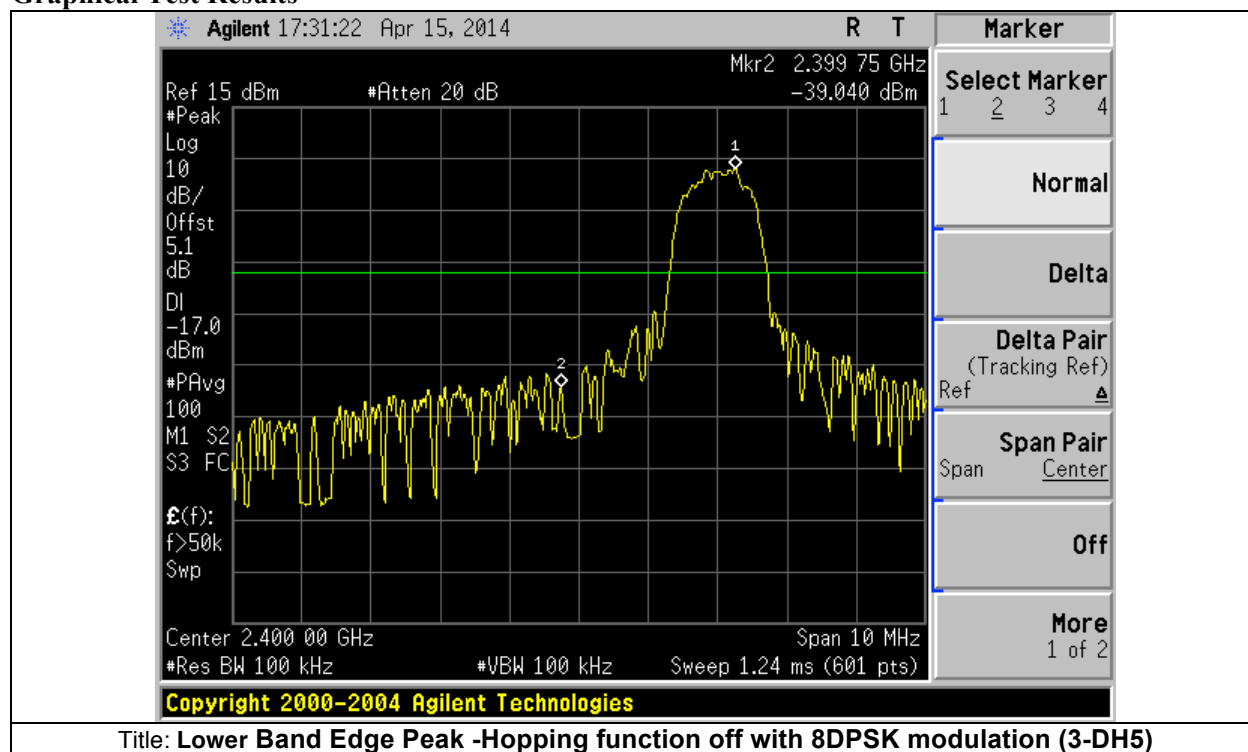

**A.7 Conducted Spurious Emissions**

15.247 (d) & RSS-210 A8.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in FCC §15.209(a) & RSS-Gen is not required.

Measurement Procedure

In accordance with KDB Publication DA 00-705

Test Results Table

Test Mode: C							
Test Channel: 0 (2402 MHz)							
Frequency (GHz)	Raw (dBm)	C.F (dB)	Calculated Lvl (dBm)	Detector	Limit -20dBc (dBm)	Margin (dBm)	Results (Pass/Fail)
.066	-65.06	0.05	-64.56	Pk	-23.2	-41.4	Pass
.087	-52.20	0.5	-51.70	Pk	-23.2	-28.5	Pass
1.66	-56.36	8.4	-47.96	Pk	-23.2	-24.7	Pass
7.21	-72.03	7.1	-64.93	Pk	-23.2	-41.7	Pass



Test Mode: C							
Test Channel: 39 (2441 MHz)							
Frequency (GHz)	Raw (dBm)	C.F (dB)	Calculated Lvl (dBm)	Detector	Limit -20dBc (dBm)	Margin (dBm)	Results (Pass/Fail)
.074	-59.69	0.5	-59.19	Pk	-17.4	-41.8	Pass
.479	-72.19	1.0	-71.19	Pk	-17.4	-53.8	Pass
1.66	-58.58	8.4	-50.18	Pk	-17.4	-32.8	Pass

Test Mode: C							
Test Channel: 78 (2441 MHz)							
Frequency (GHz)	Raw (dBm)	C.F (dB)	Calculated Lvl (dBm)	Detector	Limit -20dBc (dBm)	Margin (dBm)	Results (Pass/Fail)
0.74	-60.04	0.5	-59.54	Pk	-20.6	-38.9	Pass
0.87	-63.20	0.5	-62.70	Pk	-20.6	-42.1	Pass
1.66	-56.81	8.4	-48.41	Pk	-20.6	-27.8	Pass



Note: Correction factors = splitter loss + cables loss





Graphical Test Results

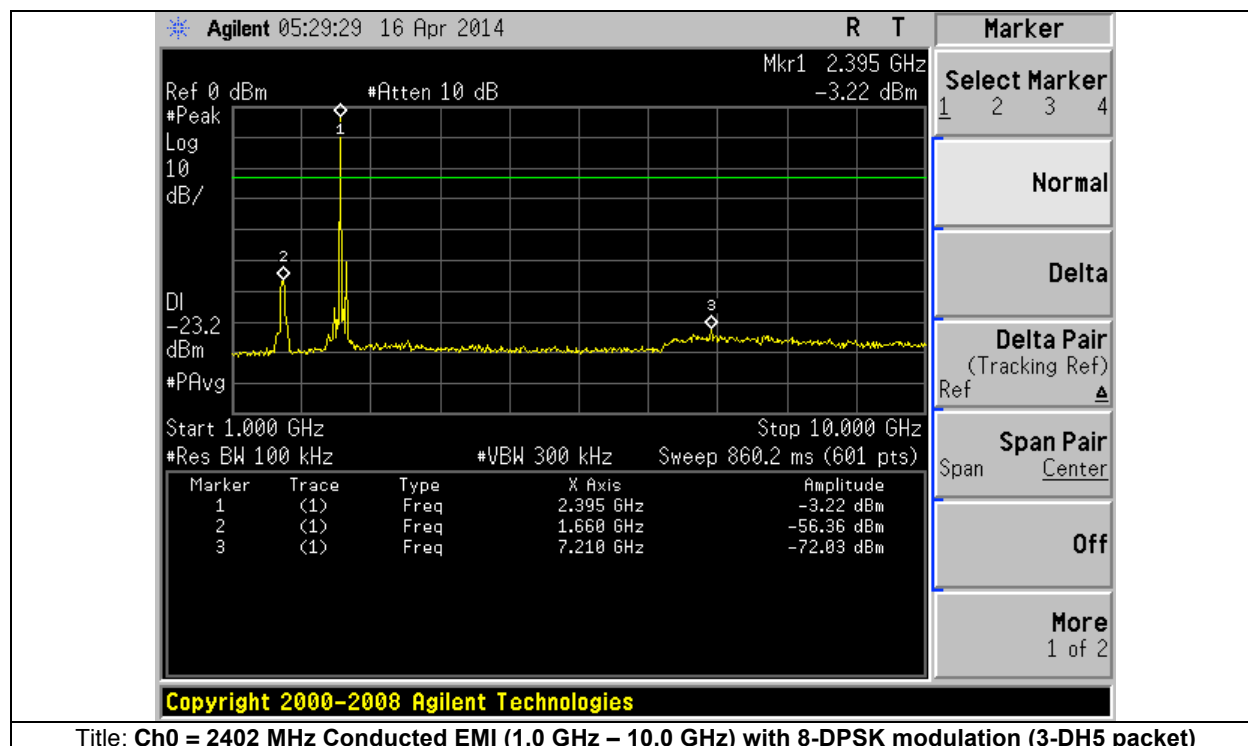
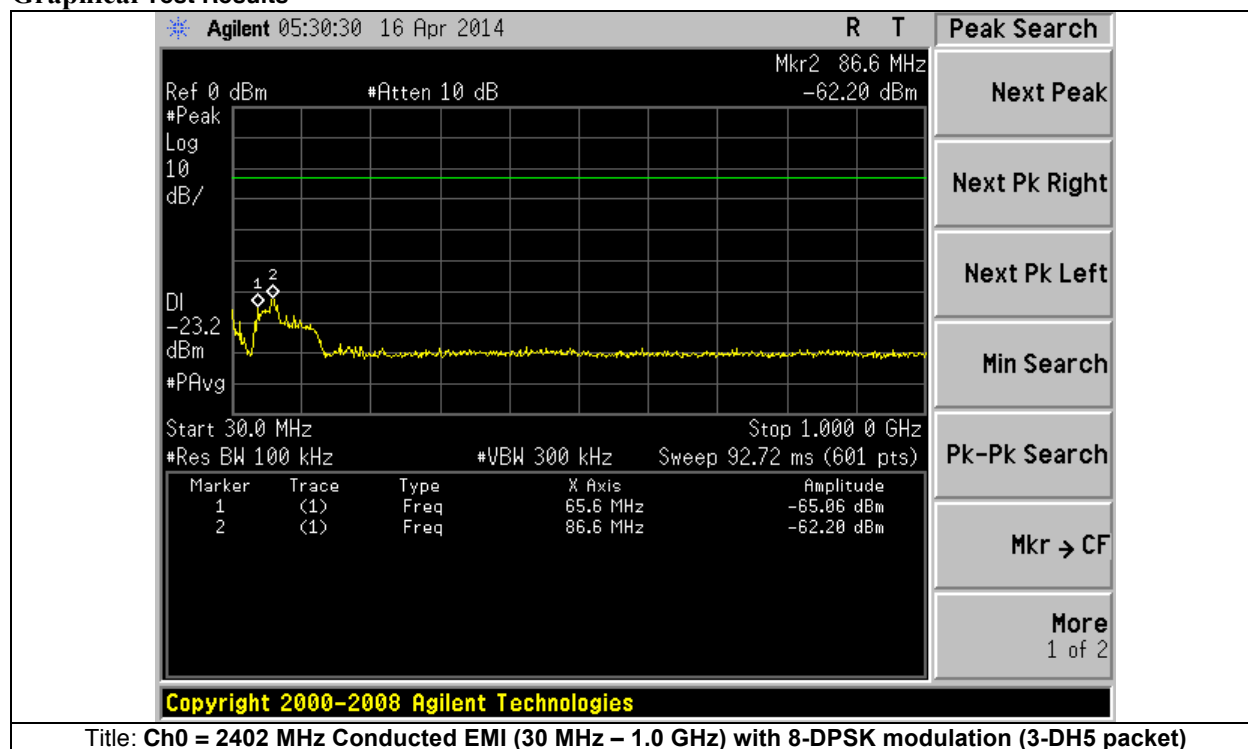


Graphical Test Results

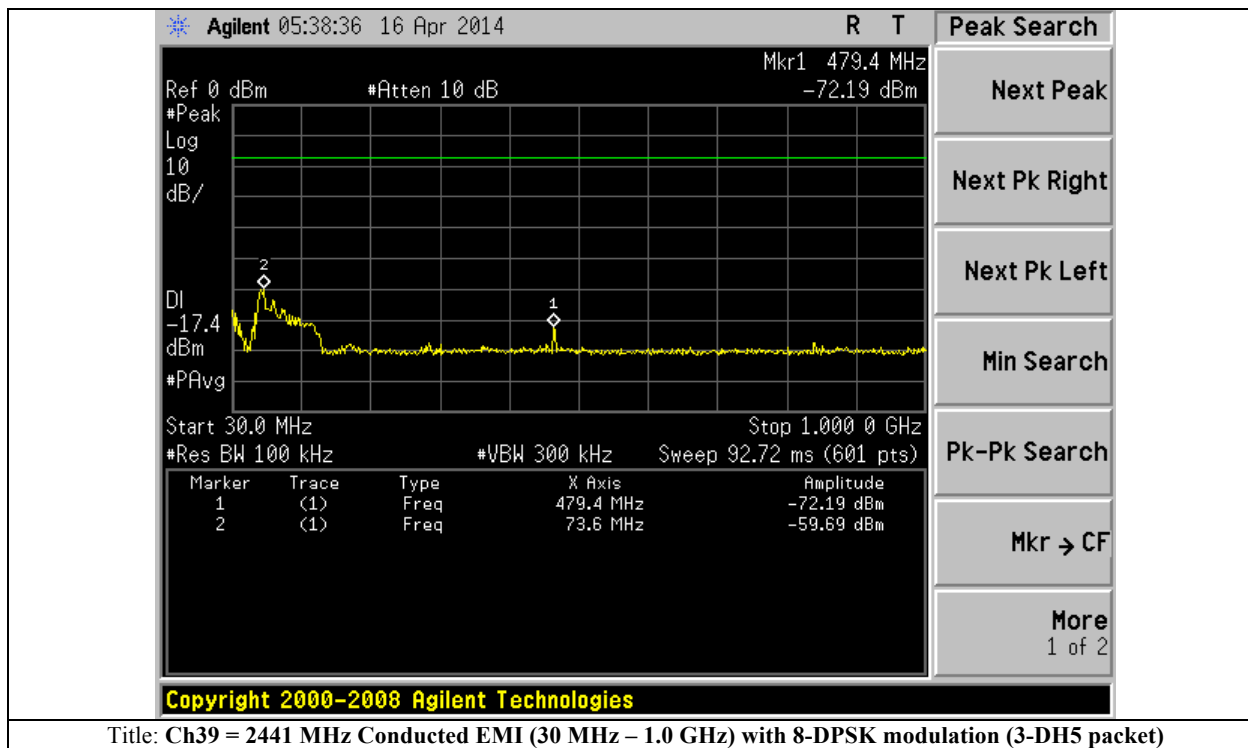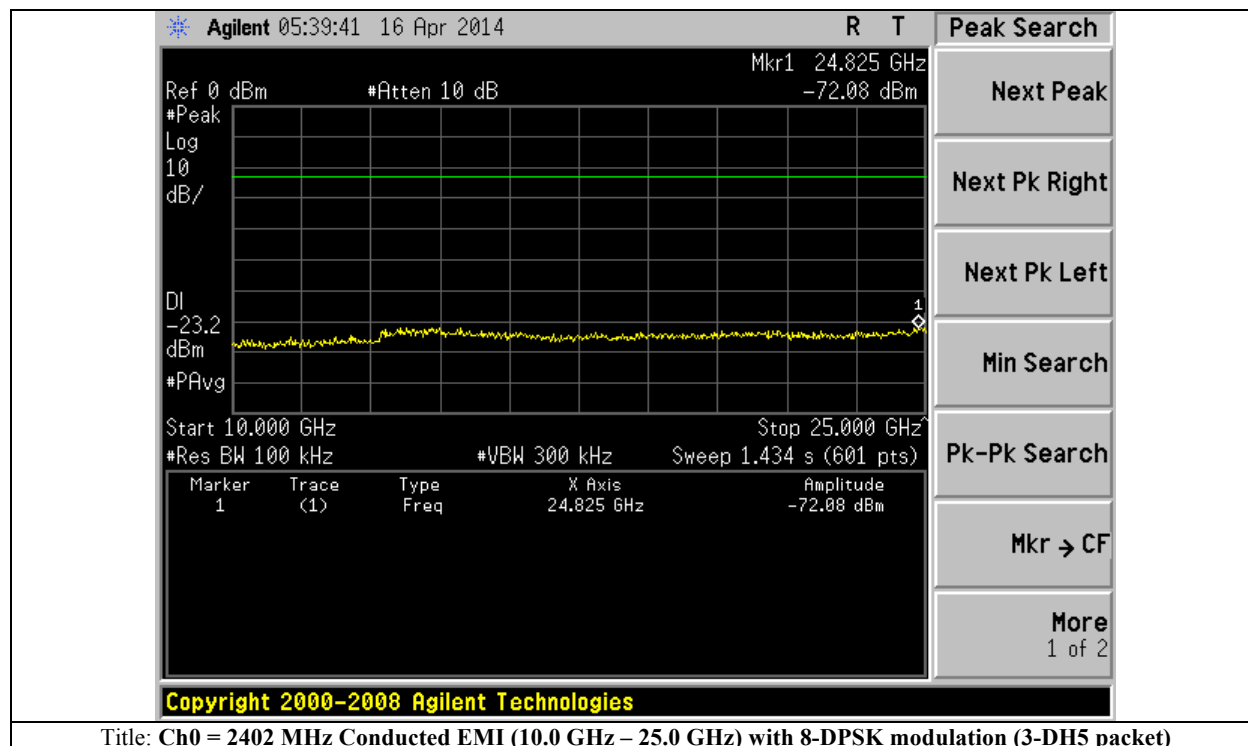
**Graphical Test Results**

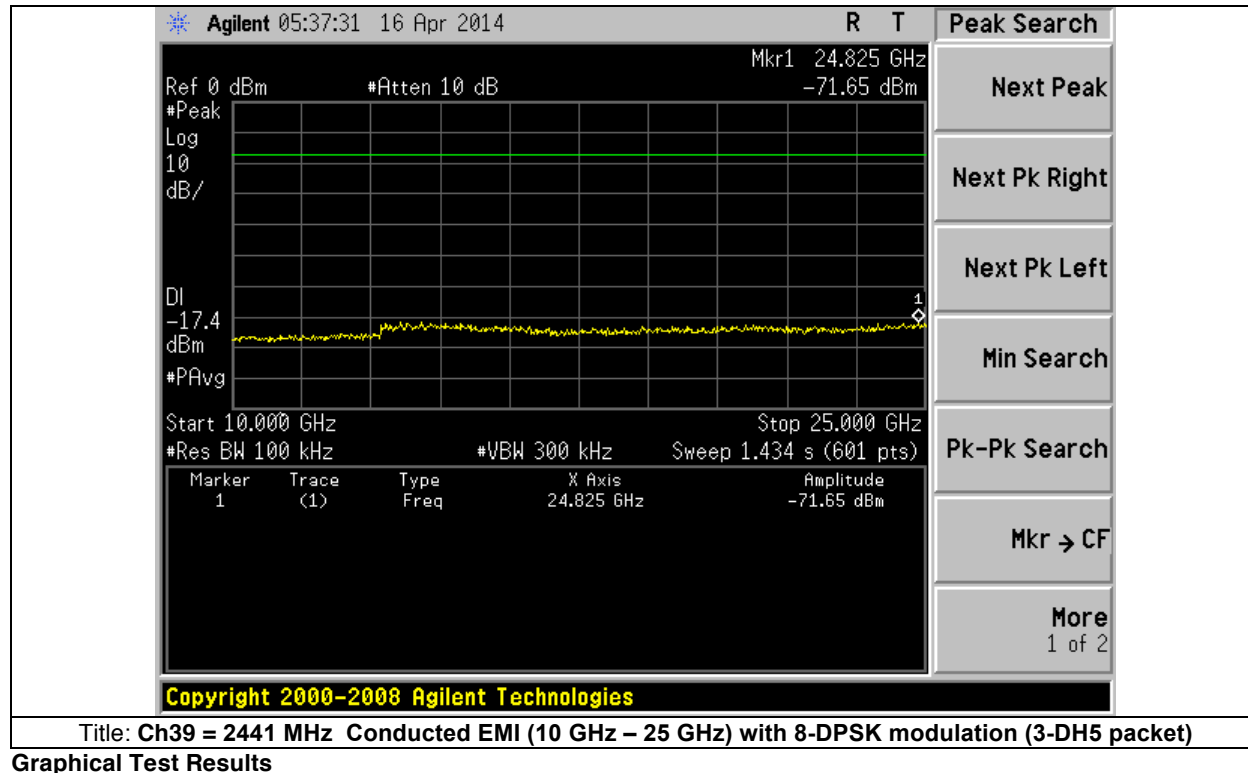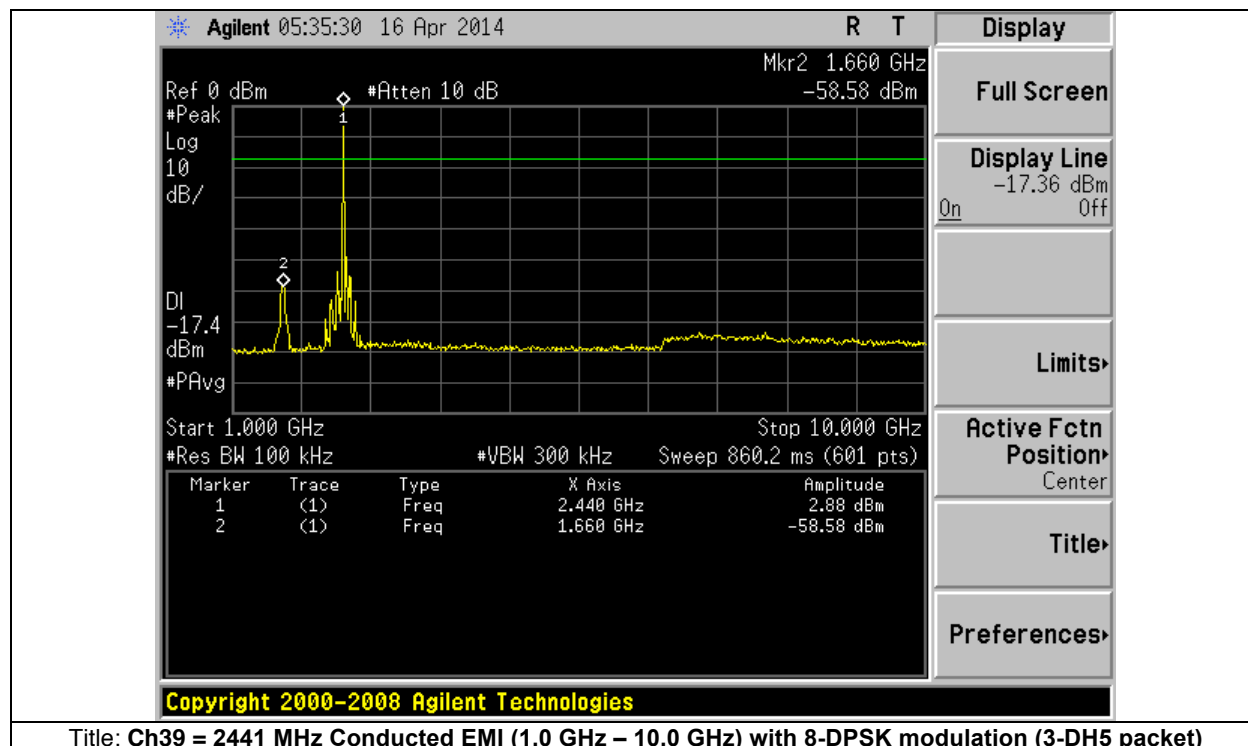

Graphical Test Results

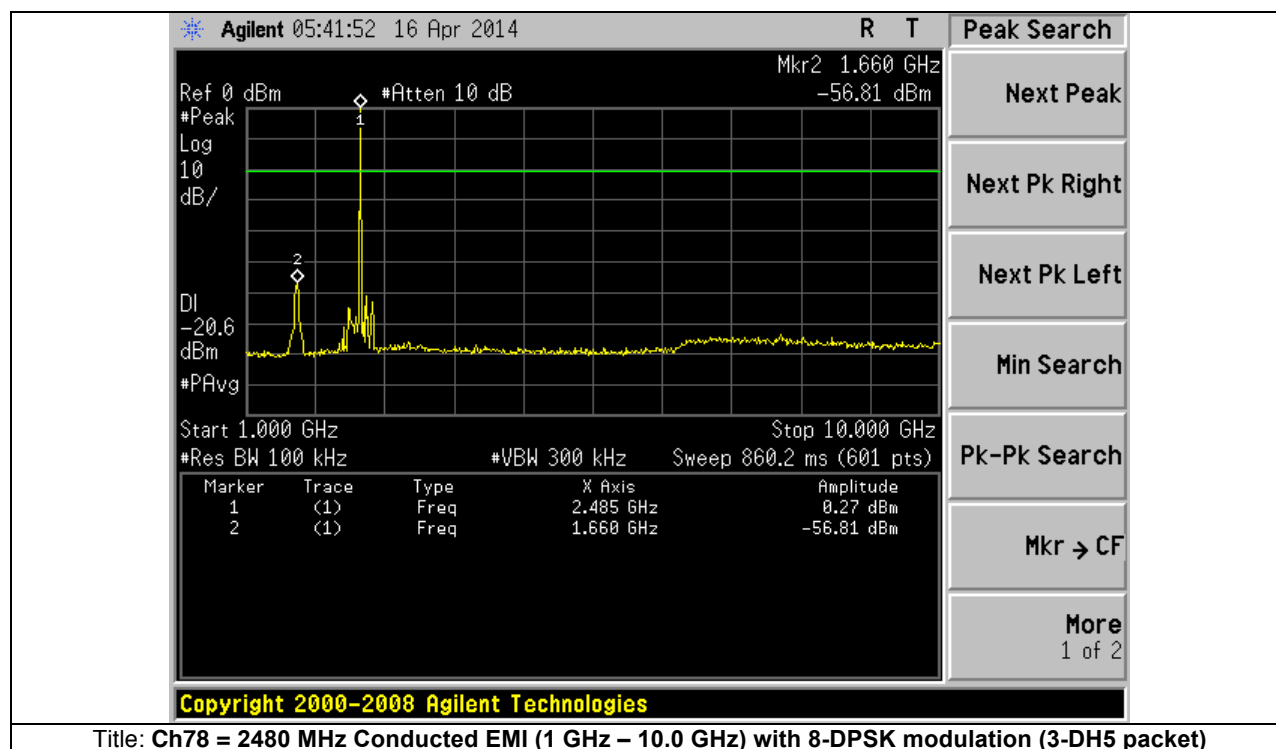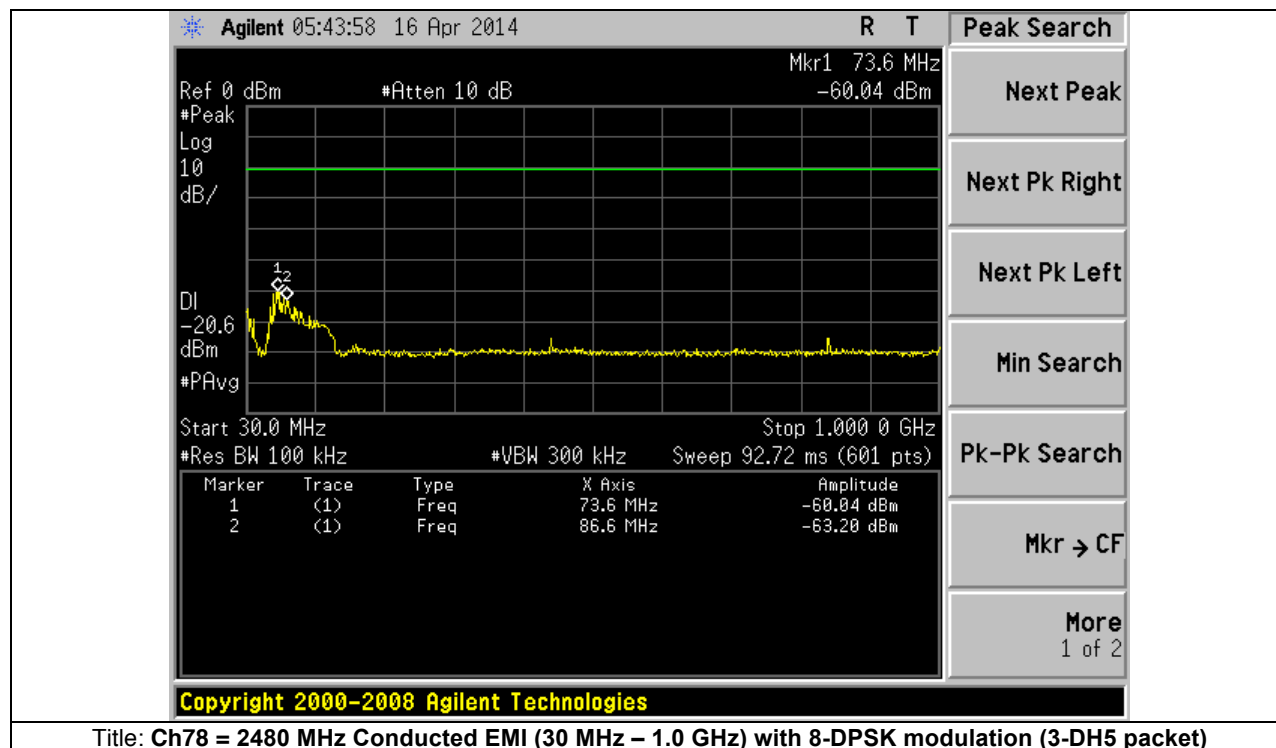

Graphical Test Results

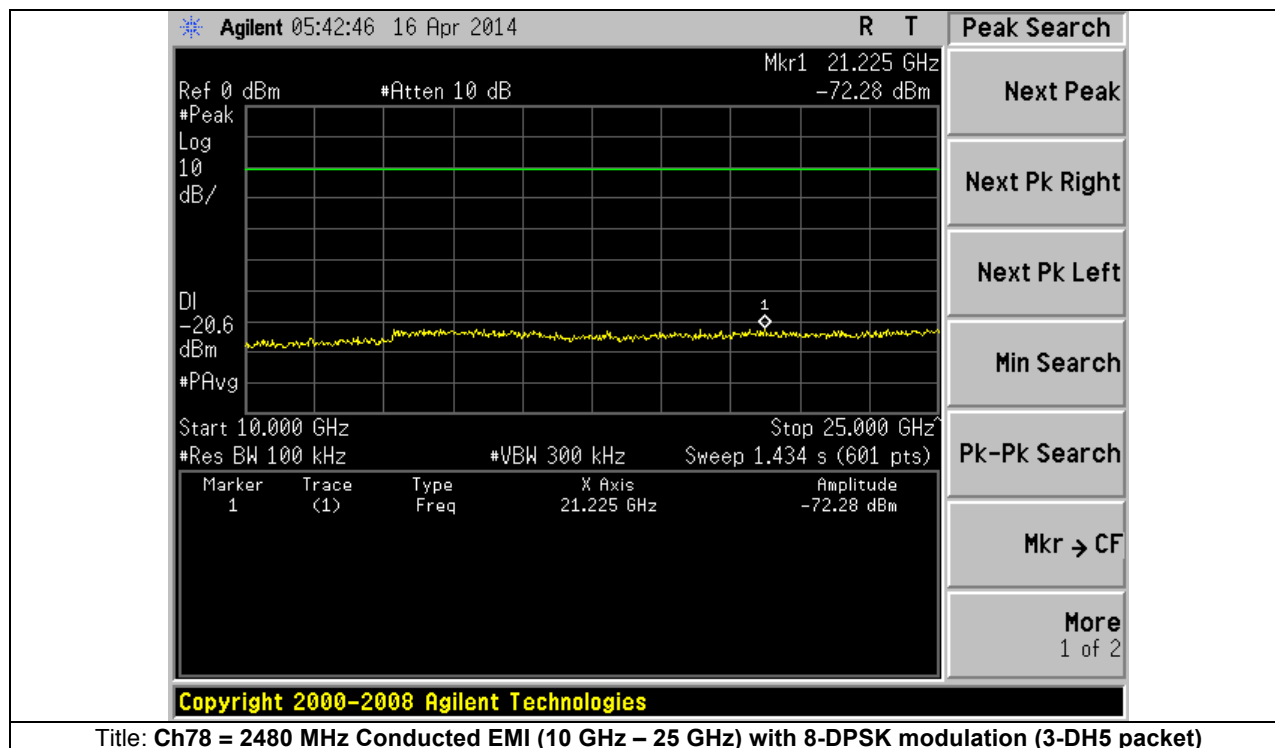



A.8 Receiver Spurious Emissions

RSS-Gen section 4.10 & 6.1

The receiver shall be operated in the normal receive mode near the mid-point of the band in which the receiver is designed to operate.

For either method, the search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator frequency, intermediate or carrier frequency), Or 30 MHz, whichever is higher, to at least 3 times the highest tuneable or local oscillator frequency whichever is higher, without exceeding 40 GHz.

For emissions below 1000 MHz, measurements shall be performed using a CISPR quasi-peak detector and the related measurement bandwidth. As an alternative to CISPR quasi-peak measurement, compliance with the emission limit can be demonstrated using measuring equipment employing a peak detector function properly adjusted for factors such as pulse desensitization as required, with an equal or greater measurement bandwidth relative to the applicable CISPR quasi-peak bandwidth.

Above 1000 MHz, measurements shall be performed using an average detector with a minimum resolution bandwidth of 1 MHz.

Spurious emissions from receivers shall not exceed the radiated limits shown in the table 2 in section 6.1 of RSS-Gen.

Environmental Conditions:



Temperature: 75 °F

Humidity: 40%

**Test Result Tables for RX Spurious Emissions:**


Subtest Number: 166113 - 3				Subtest Date: 04-May-2014								
Engineer				Jose Aguirre								
Lab Information				Building P, 5m Anechoic								
Subtest Title				Receiver Spurious Emissions								
Frequency Range				30 MHz -1.0 GHz								
Comments on the above Test Results				RX Channel								
Environmental Conditions:												
Temperature: (59 to 95) °F				75								
Humidity: (10 to 75) %:				40								
Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass /Fail	Comments
44.241	21.1	0.6	10.8	32.6	Qp	V	105	356	40	-7.4	Pass	RX
30	7.6	0.5	20.3	28.4	Qp	V	126	131	40	-11.6	Pass	RX
140.171	17.9	1.2	13.1	32.1	Qp	H	140	336	43.5	-11.4	Pass	RX
80.004	18.6	0.9	7.7	27.2	Qp	V	140	131	40	-12.8	Pass	RX
978.66	-2.4	3.1	23.1	23.8	Qp	H	130	111	54	-30.2	Pass	RX
70.15	11.3	0.8	8.1	20.2	Qp	V	111	8	40	-19.8	Pass	RX

Subtest Number: 166113 - 2				Subtest Date: 04-May-2014								
Engineer				Jose Aguirre								
Lab Information				Building P, 5m Anechoic								
Subtest Title				Receiver Radiated Emissions								
Frequency Range				1 GHz - 18.0 GHz								
Comments on the above Test Results				RX Channel								
Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass /Fail	Comments
17923.5	36	16.3	9.7	61.9	Pk	V	200	0	74	-12.1	Pass	RX
14566	35.6	14.2	7.2	57.1	Pk	V	200	0	74	-16.9	Pass	RX
1188.239	42.5	3.5	-8.1	37.9	Pk	H	127	360	74	-36.1	Pass	RX
17983	23.2	16.3	9.7	49.1	Av	V	125	177	54	-4.9	Pass	RX
14566	23.3	14.2	7.3	44.8	Av	H	145	45	54	-9.2	Pass	RX
3835.65	28.4	6.6	-3.4	31.5	Av	H	127	322	54	-22.5	Pass	RX
1400.232	31.1	3.8	-7.6	27.2	Av	V	112	322	54	-26.8	Pass	RX
1196.264	30.6	3.5	-8.1	26	Av	H	127	360	54	-28	Pass	RX

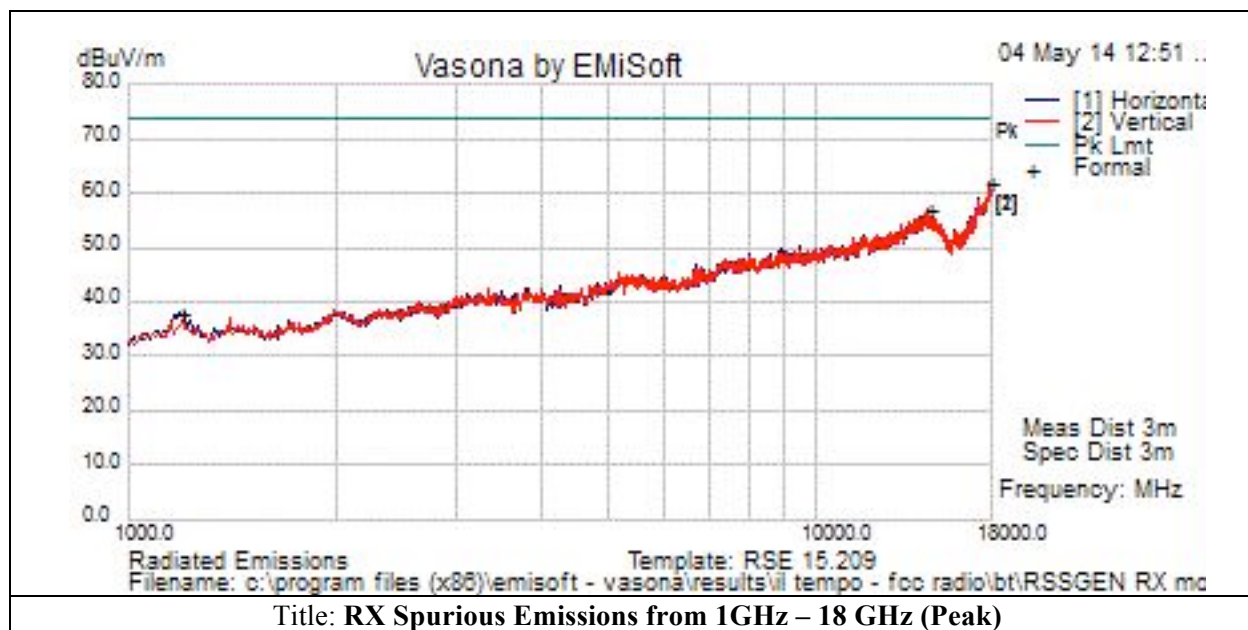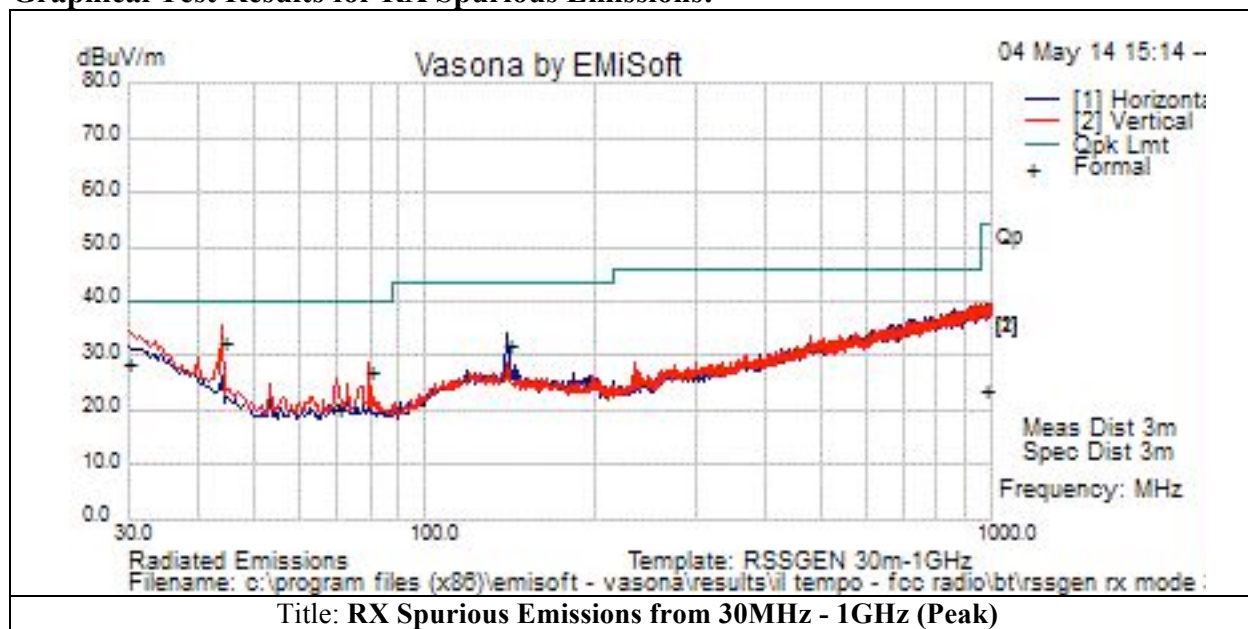**Graphical Test Results for RX Spurious Emissions:**



Graphical Test Results (Continue)

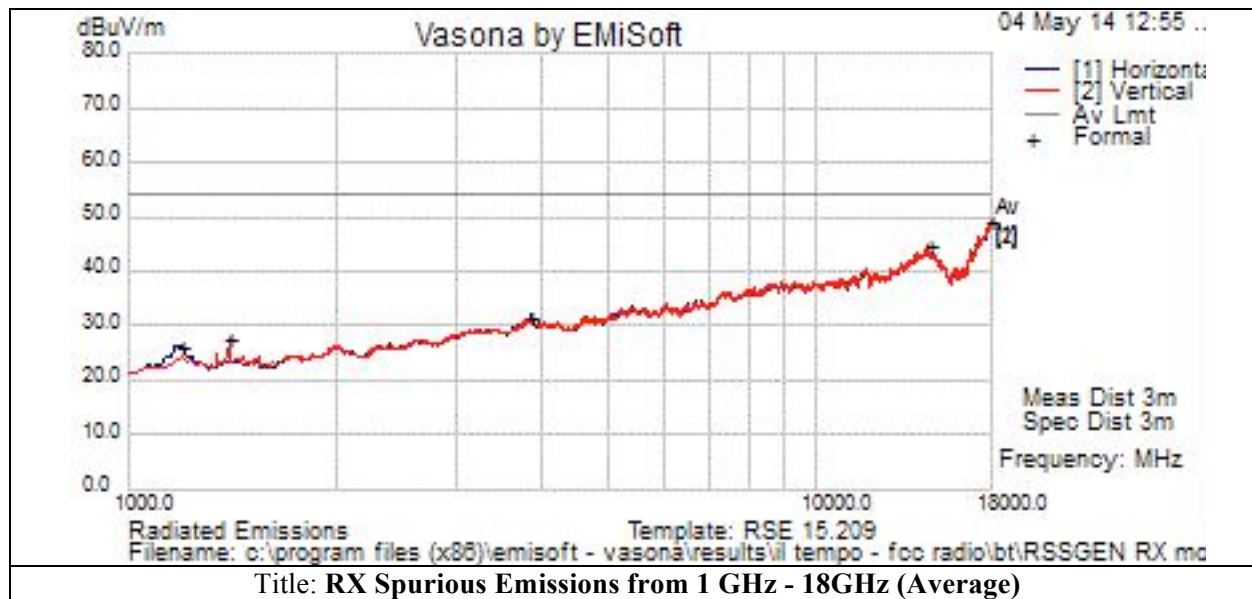



A.9 TX Radiated Spurious / Restricted Bands.

15.205 / RSS-210 2.7

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Environmental Conditions:

Temperature: 73 °F

Humidity: 38%

Measurement Procedure

In accordance with ANSI C63.10:2009

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Below 1GHz

Span:	30 MHz – 1 GHz
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	120 KHz
Video Bandwidth:	300 KHz
Detector:	Peak / Quasi-Peak

Above 1GHz

Span:	1 GHz – 18 GHz
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	1 MHz for peak, 10 Hz for average
Detector:	Peak

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV/m @3m
2) Peak plot (Vertical and Horizontal), Limit = 74dBuV/m @3m

This report represents the worst case data for all supported operating modes and antennas. System was evaluated up to 26 GHz but there were no measurable emissions above 18 GHz.



Note1: A Notch Filter was used during formal testing from 1 – 18 GHz to help prevent the front end of the analyzer from over loading. The Notch filters used are designed to suppress TX fundamental frequency but do not effect harmonics of the fundamental frequency from being measured

Note2: The data displayed on the plots detailed in this appendix were measured using a 'Peak Detector'. Please refer to the results table for the detectors used during formal measurements

No measurable emissions above 18GHz

**Test Result Tables for TX Spurious Emissions:**

Subtest Number: 166093 - 1				Subtest Date: 04-May-2014								
Engineer				Jose Aguirre								
Lab Information				Building P, 5m Anechoic								
Subtest Title				Transmitter Spurious Emissions								
Frequency Range				30.0 MHz - 1.0 GHz								
Comments on the above Test Results				TX Channel 0 (2402 MHz) – with 8-DPSK modulation – 3-DH5 packet								
Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass /Fail	Comments
44.241	21.1	0.6	10.8	32.6	Qp	V	105	356	40	-7.4	Pass	TX / Ch 0
30	7.6	0.5	20.3	28.4	Qp	V	126	131	40	-11.6	Pass	TX / Ch 0
140.171	17.9	1.2	13.1	32.1	Qp	H	140	336	43.5	-11.4	Pass	TX / Ch 0
80.004	18.6	0.9	7.7	27.2	Qp	V	140	131	40	-12.8	Pass	Tx / Ch 0
978.66	-2.4	3.1	23.1	23.8	Qp	H	130	111	54	-30.2	Pass	TX / Ch 0
70.15	11.3	0.8	8.1	20.2	Qp	V	111	8	40	-19.8	Pass	TX / Ch 0

Subtest Number: 166093 - 2				Subtest Date: 04-May-2014								
Engineer				Jose Aguirre								
Lab Information				Building P, 5m Anechoic								
Subtest Title				Transmitter Spurious Emissions								
Frequency Range				30.0 MHz - 1.0 GHz								
Comments on the above Test Results				TX Channel 39 (2441 MHz) – with 8-DPSK modulation – 3-DH5 packet								
Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass /Fail	Comments
44.264	21.4	0.7	10.8	32.8	Qp	V	100	360	40	-7.2	Pass	TX / Ch 39
30.012	8.5	0.5	20.3	29.3	Qp	V	133	136	40	-10.7	Pass	TX / Ch 39
140.537	17.1	1.2	13.1	31.3	Qp	H	144	350	43.5	-12.2	Pass	TX / Ch 39
79.972	22.2	0.9	7.7	30.8	Qp	V	134	125	40	-9.2	Pass	Tx / Ch 39
980.323	-1.9	3.1	23.1	24.3	Qp	H	125	100	54	-29.7	Pass	TX / Ch 39
70.51	13.4	0.8	8.1	22.3	Qp	V	100	15	40	-17.7	Pass	TX / Ch 39



Subtest Number: 166093 - 3				Subtest Date: 04-May-2014									
Engineer				Jose Aguirre									
Lab Information				Building P, 5m Anechoic									
Subtest Title				Transmitter Spurious Emissions									
Frequency Range				30.0 MHz - 1.0 GHz									
Comments on the above Test Results				TX Channel 78 (2480 MHz) – with 8-DPSK modulation – 3-DH5 packet									
Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass /Fail	Comments	
32.485	11	0.5	18.6	30.1	Peak	V	129	122	40	-9.9	Pass	TX / Ch 78	
44.219	20.1	0.7	10.8	31.6	Peak	V	105	342	40	-8.4	Pass	TX / Ch 78	
69.885	12.9	0.8	8.1	21.8	Peak	V	103	22	40	-18.2	Pass	Tx / Ch 78	
80.007	21.6	0.9	7.7	30.2	Peak	V	145	130	40	-9.8	Pass	TX / Ch 78	
140.06	17.3	1.2	13.1	31.5	Peak	H	155	289	43.5	-12	Pass	TX / Ch 78	
981.571	-0.1	3.1	23.1	26.1	Peak	H	130	112	54	-27.9	Pass	TX / Ch 78	





Subtest Number: 166093- 4 / 166133-1				Subtest Date: 04-May-2014								
Engineer				Jose Aguirre								
Lab Information				Building P, 5m Anechoic								
Subtest Title				Transmitter Spurious Emissions								
Frequency Range				1GHz - 18GHz								
Comments on the above Test Results				TX Channel 0 (2402 MHz) – with 8-DPSK modulation – 3-DH5 packet								
Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass /Fail	Comments
4804	39.1	7.4	-4.3	42.3	Pk	H	155	250	74	-31.7	Pass	TX / Ch 0
4804	38.8	7.4	-4.3	42	Pk	V	135	185	74	-32	Pass	TX / Ch 0
7206	36.3	9.4	0.7	46.3	Pk	H	155	250	74	-27.7	Pass	Tx / Ch 0
7206	35.9	9.4	0.7	45.9	Pk	V	135	185	74	-28.1	Pass	TX / Ch 0
9608	32.4	11.2	3.5	47.1	Pk	H	155	250	74	-26.9	Pass	TX / Ch 0
9608	32.7	11.2	3.5	47.4	Pk	V	135	185	74	-26.6	Pass	Tx / Ch 0
12010	31.7	12.6	4.2	48.5	Pk	H	155	250	74	-25.5	Pass	TX / Ch 0
12010	32	12.6	4.2	48.8	Pk	V	135	185	74	-25.2	Pass	TX / Ch 0
14412	37.3	14.2	7	58.6	Pk	H	155	250	74	-15.4	Pass	Tx / Ch 0
14412	36.1	14.2	7	57.4	Pk	V	135	185	74	-16.6	Pass	TX / Ch 0
4804	28.3	7.4	-4.3	31.5	Av	H	155	250	54	-22.5	Pass	Tx / Ch 0
4804	28.1	7.4	-4.3	31.3	Av	V	135	185	54	-22.7	Pass	TX / Ch 0
7206	25.5	9.4	0.7	35.5	Av	H	155	250	54	-18.5	Pass	Tx / Ch 0
7206	25.8	9.4	0.7	35.8	Av	V	135	185	54	-18.2	Pass	TX / Ch 0
9608	22.9	11.2	3.5	37.6	Av	H	155	250	54	-16.4	Pass	Tx / Ch 0
9608	22.8	11.2	3.5	37.5	Av	V	135	185	54	-16.5	Pass	TX / Ch 0
12010	22.5	12.6	4.2	39.3	Av	H	155	250	54	-14.7	Pass	Tx / Ch 0
12010	22	12.6	4.2	38.8	Av	V	135	185	54	-15.2	Pass	TX / Ch 0
14412	24.3	14.2	7	45.6	Av	H	155	250	54	-8.4	Pass	Tx / Ch 0
14412	23.5	14.2	7	44.8	Av	V	135	185	54	-9.2	Pass	Tx / Ch 0






Subtest Number: 166093- 5 /166133- 2				Subtest Date: 04-May-2014								
Engineer				Jose Aguirre								
Lab Information				Building P, 5m Anechoic								
Subtest Title				Transmitter Spurious Emissions								
Frequency Range				1.0 GHz - 18.0 GHz								
Comments on the above Test Results				TX Channel 39 (2441 MHz) – with 8-DPSK modulation – 3-DH5 packet								
Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass /Fail	Comments
3839	38.4	6.6	-3.4	41.6	Pk	H	175	22	74	-32.4	Pass	TX / Ch 39
4882	38	7.5	-4.1	41.5	Pk	H	125	175	74	-32.5	Pass	TX / Ch 39
4882	37.6	7.5	-4.1	41.1	Pk	V	105	220	74	-32.9	Pass	TX / Ch 39
6499.781	37.7	8.8	-2.9	43.6	Pk	V	174	156	74	-30.4	Pass	Tx / Ch 39
7323	35.8	9.5	1.4	46.7	Pk	V	105	220	74	-27.3	Pass	TX / Ch 39
7323	36.9	9.5	1.4	47.8	Pk	H	125	175	74	-26.2	Pass	TX / Ch 39
9764	34	11.2	4.2	49.4	Pk	V	105	220	74	-24.6	Pass	TX / Ch 39
9764	33.6	11.2	4.2	49	Pk	H	125	175	74	-25	Pass	Tx / Ch 39
12205	34.3	12.7	4.2	51.3	Pk	V	105	220	74	-22.7	Pass	Tx / Ch 39
12205	33.4	12.7	4.2	50.4	Pk	H	125	175	74	-23.6	Pass	TX / Ch 39
14646	35.2	14.2	6.6	56.1	Pk	H	125	175	74	-17.9	Pass	TX / Ch 39
14646	34.7	14.2	6.6	55.6	Pk	V	105	220	74	-18.4	Pass	TX / Ch 39
3839	33.5	6.6	-3.4	36.6	Av	H	175	22	54	-17.4	Pass	TX / Ch 39
6499.781	31.4	8.8	-2.9	37.4	Av	V	174	156	54	-16.6	Pass	Tx / Ch 39
4882	28.6	7.5	-4.1	32.1	Av	H	125	175	54	-21.9	Pass	TX / Ch 39
4882	29	7.5	-4.1	32.5	Av	V	105	220	54	-21.5	Pass	TX / Ch 39
7323	26.2	9.5	1.4	37.1	Av	V	105	220	54	-16.9	Pass	TX / Ch 39
7323	24.4	9.5	1.4	35.3	Av	H	125	175	54	-18.7	Pass	TX / Ch 39
9764	22.5	11.2	4.2	37.9	Av	V	105	220	54	-16.1	Pass	TX / Ch 39
9764	22.2	11.2	4.2	37.6	Av	H	125	175	54	-16.4	Pass	Tx / Ch 39
12205	22.1	12.7	4.2	39.1	Av	V	105	220	54	-14.9	Pass	Tx / Ch 39
12205	22.4	12.7	4.2	39.4	Av	H	125	175	54	-14.6	Pass	TX / Ch 39
14646	24.6	14.2	6.6	45.5	Av	H	125	175	54	-8.5	Pass	TX / Ch 39
14646	24.9	14.2	6.6	45.8	Av	V	105	220	54	-8.2	Pass	TX / Ch 39







Subtest Number: 163492 -4/ 166133-3				Subtest Date: 04-May-2014								
Engineer				Jose Aguirre								
Lab Information				Building P, 5m Anechoic								
Subtest Title				Transmitter Spurious Emissions								
Frequency Range				1.0 GHz - 18.0 GHz								
Comments on the above Test Results				TX Channel 78 (2480 MHz) – with 8-DPSK modulation – 3-DH5 packet								
Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass /Fail	Comments
1170	49.6	3.5	-8	45	Pk	V	150	12	74	-29	Pass	TX / Ch 78
3839	41.3	6.6	-3.4	44.5	Pk	H	144	22	74	-29.5	Pass	TX / Ch 78
4960	39.8	7.6	-4	43.4	Pk	V	115	205	74	-30.6	Pass	TX / Ch 78
4960	39.9	7.6	-4	43.5	Pk	H	100	170	74	-30.5	Pass	Tx / Ch 78
6499.892	37.2	8.8	-2.9	43.1	Pk	H	152	356	74	-30.9	Pass	TX / Ch 78
7440	35.4	9.6	1.8	46.7	Pk	H	100	170	74	-27.3	Pass	TX / Ch 78
7440	35.5	9.6	1.8	46.8	Pk	V	115	205	74	-27.2	Pass	TX / Ch 78
9920	32.4	11.3	4.5	48.2	Pk	V	115	205	74	-25.8	Pass	Tx / Ch 78
9920	32.2	11.3	4.5	48	Pk	H	100	170	74	-26	Pass	TX / Ch 78
12400	34.9	12.9	3.6	51.4	Pk	V	115	205	74	-22.6	Pass	Tx / Ch 78
12400	35.3	12.9	3.6	51.8	Pk	H	100	170	74	-22.2	Pass	TX / Ch 78
14880	35	14.3	6.2	55.5	Pk	H	100	170	74	-18.5	Pass	Tx / Ch 78
14880	35.2	14.3	6.2	55.7	Pk	V	115	205	74	-18.3	Pass	TX / Ch 78
1170	39.8	3.5	-8	35.2	Av	V	150	12	54	-18.8	Pass	TX / Ch 78
3839	34.4	6.6	-3.4	37.5	Av	H	144	22	54	-16.5	Pass	TX / Ch 78
4960	28.7	7.6	-4	32.3	Av	V	115	205	54	-21.7	Pass	TX / Ch 78
4960	28.6	7.6	-4	32.2	Av	H	100	170	54	-21.8	Pass	TX / Ch 78
6499.892	30	8.8	-2.9	35.9	Av	H	152	356	54	-18.1	Pass	TX / Ch 78
7440	25.2	9.6	1.8	36.5	Av	H	100	170	54	-17.5	Pass	TX / Ch 78
7440	25.3	9.6	1.8	36.6	Av	V	115	205	54	-17.4	Pass	TX / Ch 78
9920	22.1	11.3	4.5	37.9	Av	V	115	205	54	-16.1	Pass	TX / Ch 78
9920	22	11.3	4.5	37.8	Av	H	100	170	54	-16.2	Pass	TX / Ch 78
12400	22.5	12.9	3.6	39	Av	V	115	205	54	-15	Pass	TX / Ch 78
12400	22.4	12.9	3.6	38.9	Av	H	100	170	54	-15.1	Pass	TX / Ch 78
14880	23.3	14.3	6.2	43.8	Av	H	100	170	54	-10.2	Pass	TX / Ch 78
14880	23.9	14.3	6.2	44.4	Av	V	115	205	54	-9.6	Pass	TX / Ch 78

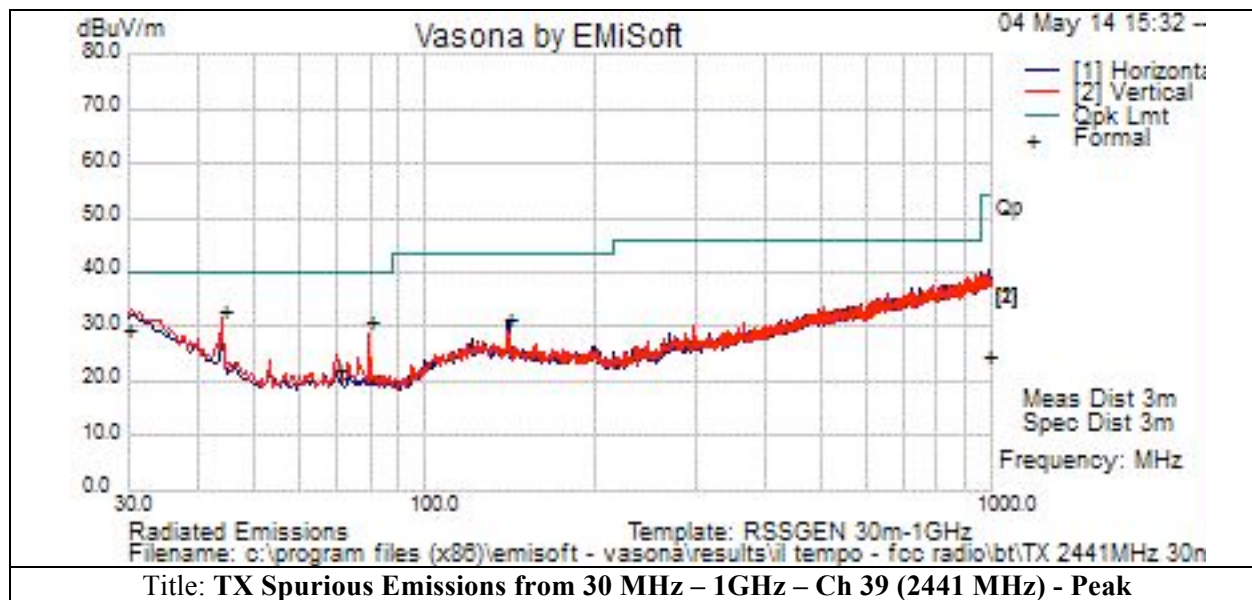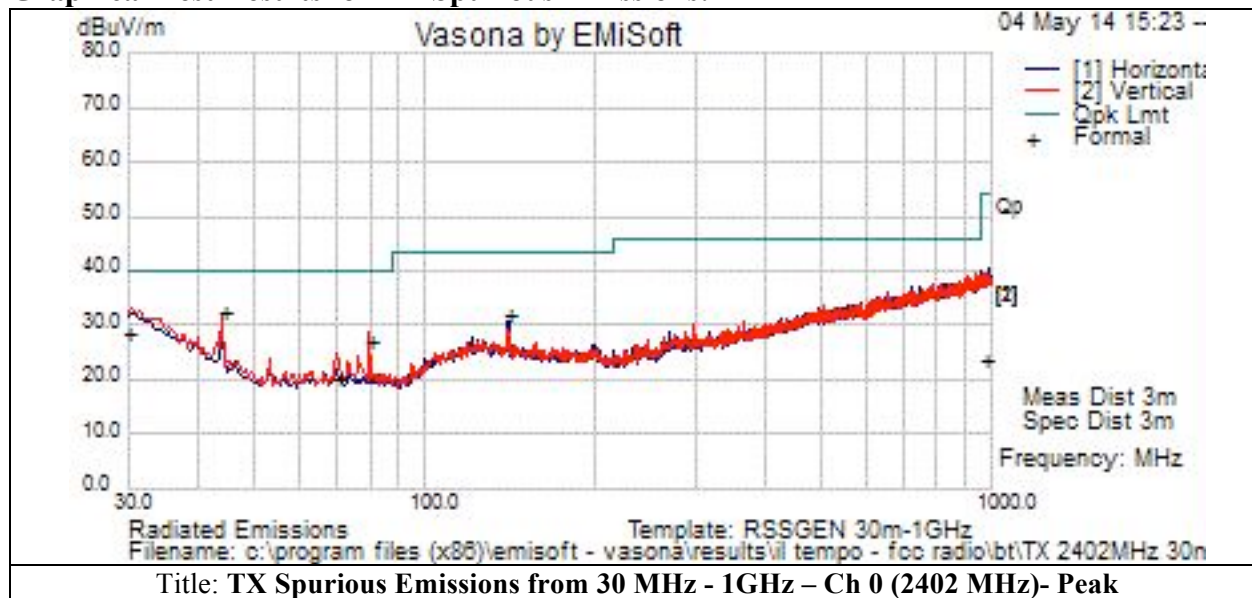**Graphical Test Results for TX Spurious Emissions:**

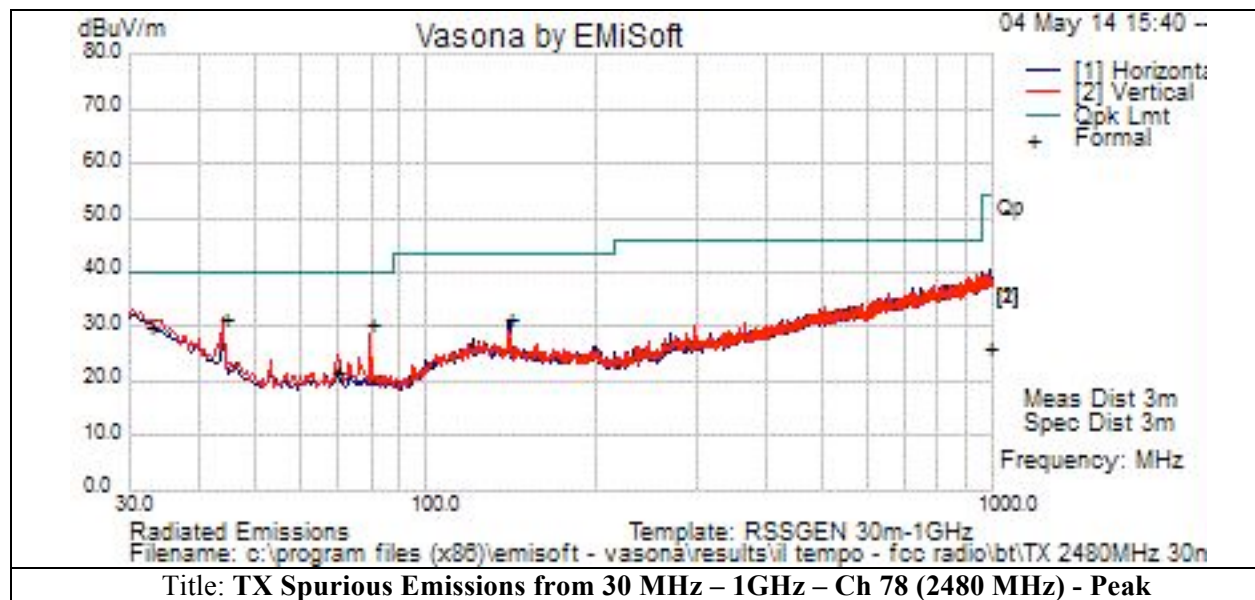

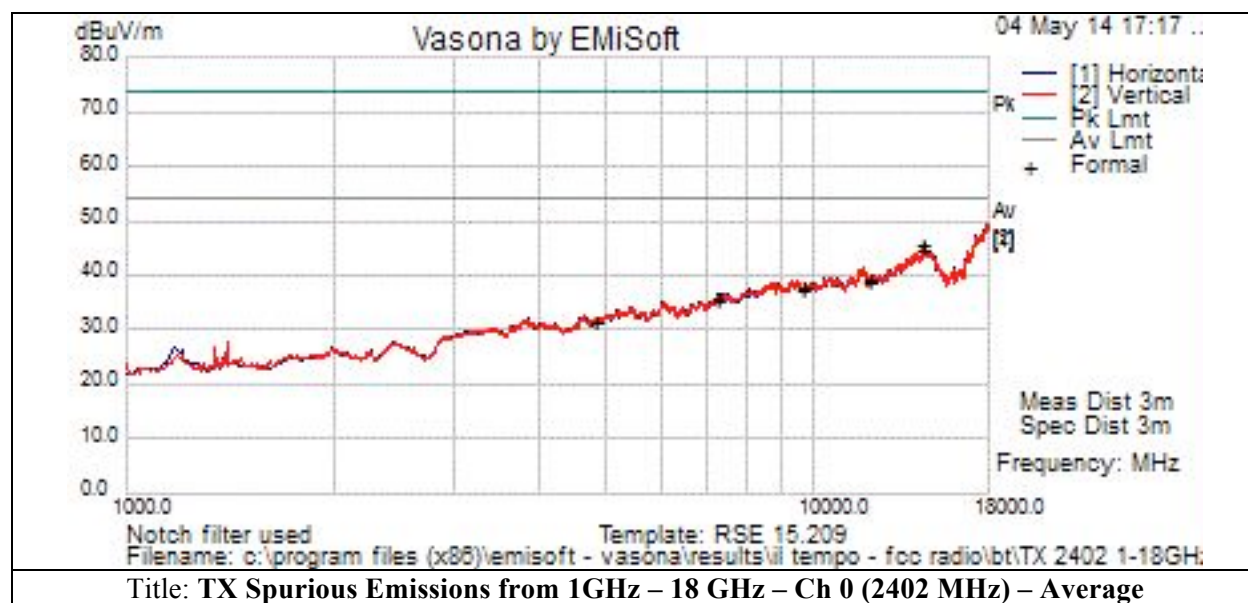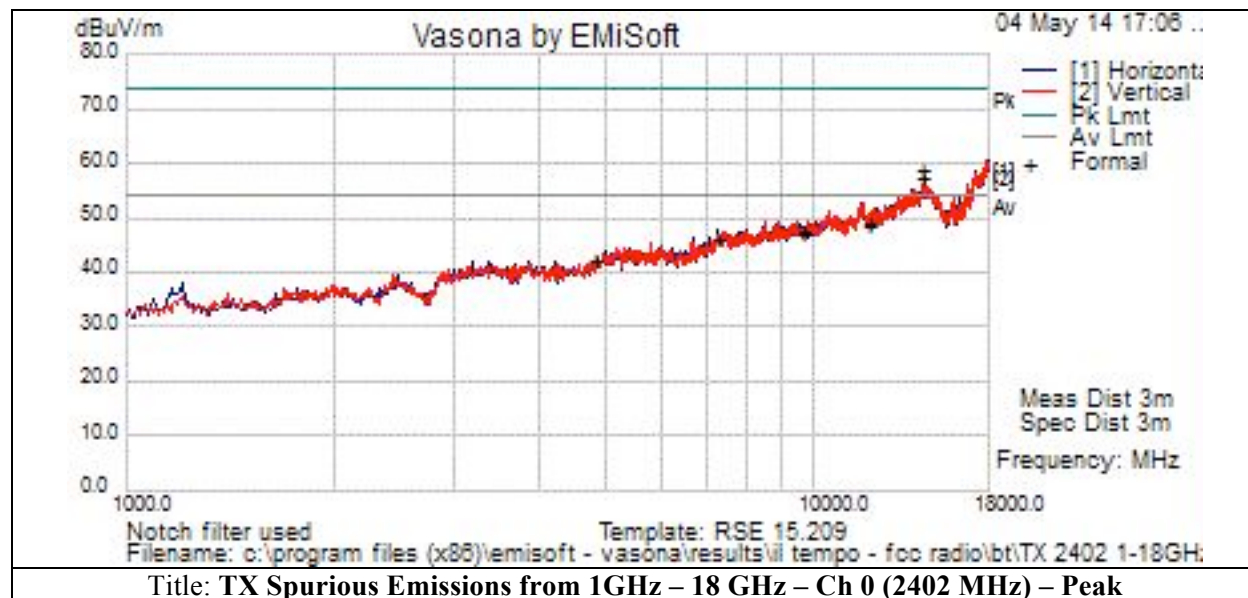

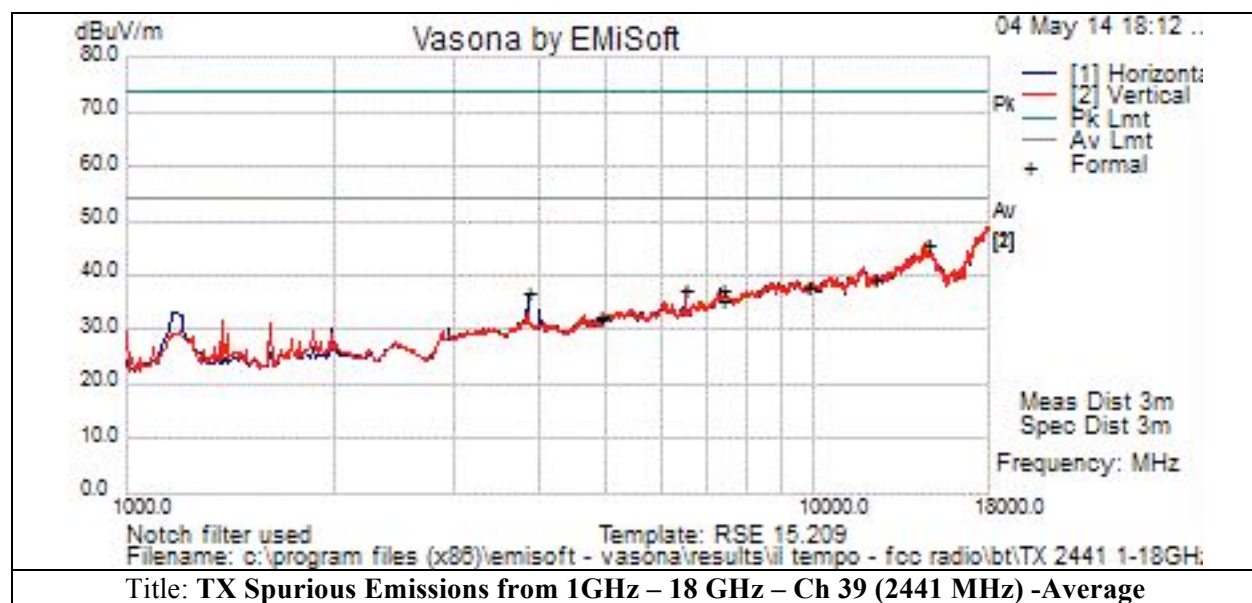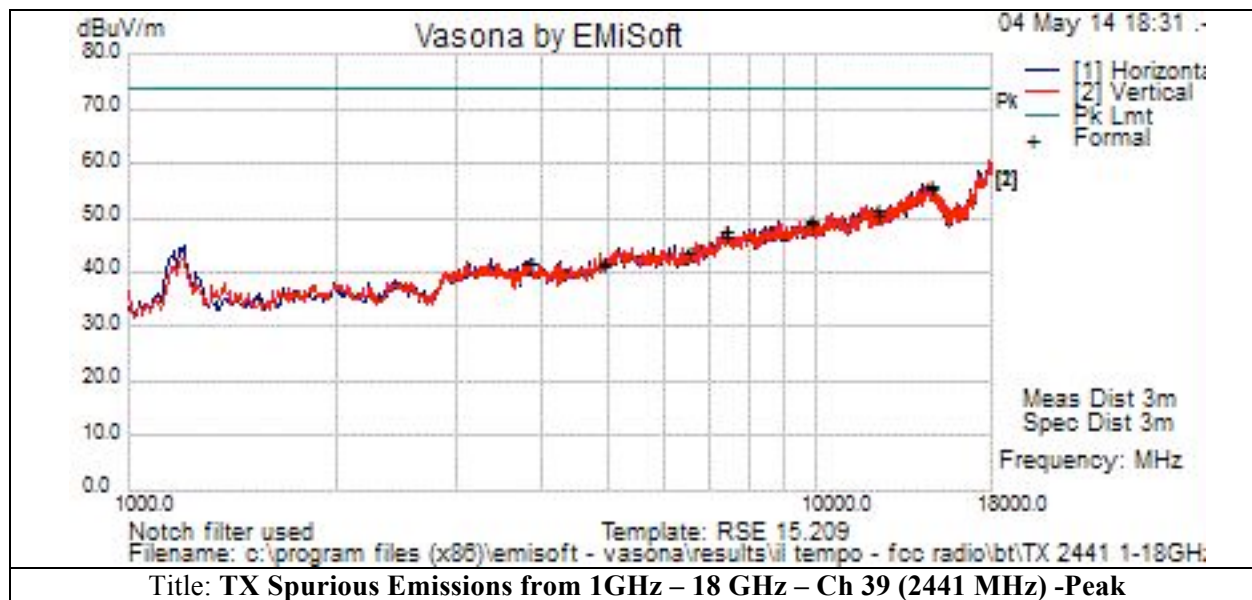

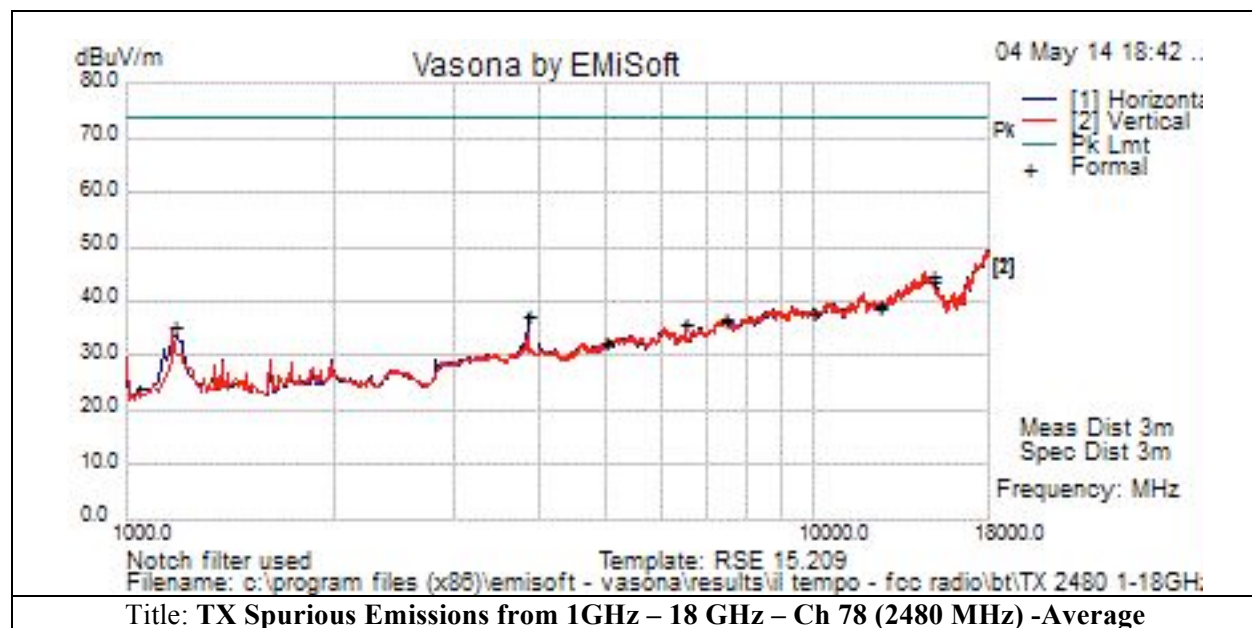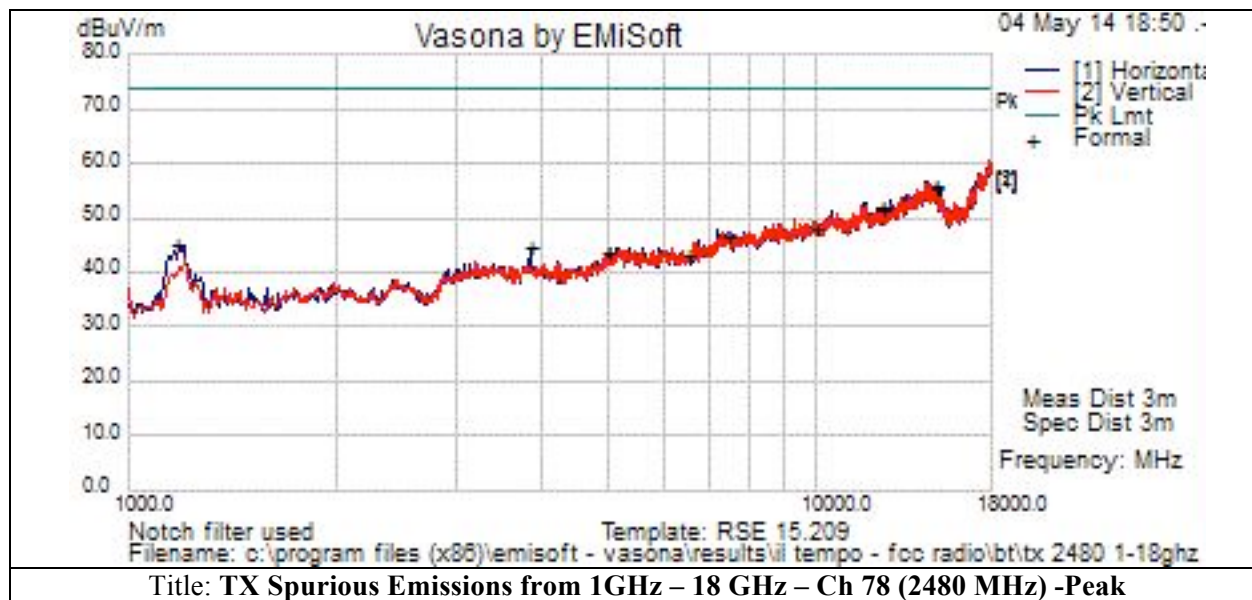



A.10 AC Conducted Emissions for AC Power Adapter:

FCC 15.207 (a) & RSS-Gen 7.2.4

Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

Measurement Procedure

Accordance with ANSI C64.10:2009

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.



Span:	150 KHz – 30 MHz
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	9 KHz
Video Bandwidth:	30 KHz
Detector:	Quasi-Peak / Average

**Test Result Table**

Subtest Number: 162052 - 2				Subtest Date: 30-May-2014						
Engineer				Jose Aguirre						
Lab Information				Building P, 10m Anechoic						
Subtest Title				AC Main Conducted Emissions Class B						
Power Input				110, 60Hz (+/-20%)						
Frequency Range				150 KHz - 30.0 MHz						
Comments on the above Test Results				TX / on						
Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Line	Limit (dBuV)	Margin (dB)	Results Pass /Fail	Comments
15.722	26	20.2	0.2	46.4	QP	L	60	-13.6	Pass	TX / on
14.411	30	20.2	0.2	50.4	QP	L	60	-9.6	Pass	TX / on
13.756	25.6	20.2	0.1	45.9	QP	L	60	-14.1	Pass	TX / on
18.338	24.1	20.3	0.2	44.6	QP	L	60	-15.4	Pass	TX / on
0.159	24.1	21.1	0.1	45.2	QP	L	65.5	-20.3	Pass	TX / on
15.063	28.1	20.2	0.2	48.5	QP	L	60	-11.5	Pass	TX / on
26.042	21.3	20.5	0.3	42.1	QP	L	60	-17.9	Pass	TX / on
15.717	26	20.2	0.2	46.4	QP	N	60	-13.6	Pass	TX / on
15.062	28.5	20.2	0.2	49	QP	N	60	-11	Pass	TX / on
14.407	26.1	20.2	0.2	46.5	QP	N	60	-13.5	Pass	TX / on
16.375	24	20.3	0.1	44.4	QP	N	60	-15.6	Pass	TX / on
13.756	22	20.2	0.1	42.3	QP	N	60	-17.7	Pass	TX / on
0.158	24.7	21.1	0.1	45.8	QP	N	65.5	-19.7	Pass	TX / on
15.722	23.5	20.2	0.2	43.9	Av	L	50	-6.1	Pass	TX / on
14.411	28.5	20.2	0.2	48.8	Av	L	50	-1.2	Pass	TX / on
13.756	24.3	20.2	0.1	44.6	Av	L	50	-5.4	Pass	TX / on
18.338	-42	20.3	0.2	-21.5	Av	L	50	-71.5	Pass	TX / on
0.159	8.8	21.1	0.1	29.9	Av	L	55.5	-25.6	Pass	TX / on
15.063	27	20.2	0.2	47.4	Av	L	50	-2.6	Pass	TX / on
26.042	12.8	20.5	0.3	33.6	Av	L	50	-16.4	Pass	TX / on
15.717	23	20.2	0.2	43.4	Av	N	50	-6.6	Pass	TX / on
15.062	18.7	20.2	0.2	39.1	Av	N	50	-10.9	Pass	TX / on
14.407	19.8	20.2	0.2	40.2	Av	N	50	-9.8	Pass	TX / on
16.375	14.6	20.3	0.1	35	Av	N	50	-15	Pass	TX / on
13.756	26	20.2	0.1	46.3	Av	N	50	-3.7	Pass	TX / on
0.158	10.6	21.1	0.1	31.8	Av	N	55.5	-23.8	Pass	TX / on



Subtest Number: 162052 - 2				Subtest Date: 30-May-2014						
Engineer				Jose Aguirre						
Lab Information				Building P, 10m Anechoic						
Subtest Title				AC Main Conducted Emissions						
Power Input				110, 60Hz (+/-20%)						
Frequency Range				150 KHz - 30.0 MHz						
Comments on the above Test Results				RX / Idle						
Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Line	Limit (dBuV)	Margin (dB)	Results Pass /Fail	Comments
0.164	23.6	21	0.1	44.7	Qp	L	65.3	-20.5	Pass	RX
15.066	22.2	20.2	0.2	42.6	Qp	L	60	-17.4	Pass	RX
26.017	21.4	20.5	0.2	42.2	Qp	L	60	-17.8	Pass	RX
14.41	27.3	20.2	0.2	47.7	Qp	L	60	-12.3	Pass	RX
15.721	26.5	20.2	0.2	46.9	Qp	L	60	-13.1	Pass	RX
13.756	25.8	20.2	0.1	46.2	Qp	L	60	-13.8	Pass	RX
18.338	23.7	20.3	0.2	44.2	Qp	L	60	-15.8	Pass	RX
26.069	15.8	20.5	0.3	36.6	Qp	N	60	-23.4	Pass	RX
15.066	22.3	20.2	0.2	42.7	Qp	N	60	-17.3	Pass	RX
14.41	30.1	20.2	0.2	50.5	Qp	N	60	-9.5	Pass	RX
0.164	24.1	21	0.1	45.2	Qp	N	65.3	-20.1	Pass	RX
15.721	20	20.2	0.2	40.4	Qp	N	60	-19.6	Pass	RX
13.756	28.2	20.2	0.1	48.5	Qp	N	60	-11.5	Pass	RX
0.164	14.1	21	0.1	35.2	Av	L	55.3	-20	Pass	RX
15.066	18.3	20.2	0.2	38.7	Av	L	50	-11.3	Pass	RX
26.017	13.2	20.5	0.2	34	Av	L	50	-16	Pass	RX
14.41	20	20.2	0.2	40.3	Av	L	50	-9.7	Pass	RX
15.721	22.9	20.2	0.2	43.3	Av	L	50	-6.7	Pass	RX
13.756	24.3	20.2	0.1	44.7	Av	L	50	-5.3	Pass	RX
18.338	14.5	20.3	0.2	35	Av	L	50	-15	Pass	RX
26.069	6.8	20.5	0.3	27.6	Av	N	50	-22.4	Pass	RX
15.066	18.7	20.2	0.2	39.1	Av	N	50	-10.9	Pass	RX
14.41	25.3	20.2	0.2	45.7	Av	N	50	-4.3	Pass	RX
0.164	17	21	0.1	38	Av	N	55.3	-17.2	Pass	RX
15.721	16.3	20.2	0.2	36.7	Av	N	50	-13.3	Pass	RX
13.756	26.1	20.2	0.1	46.4	Av	N	50	-3.6	Pass	RX

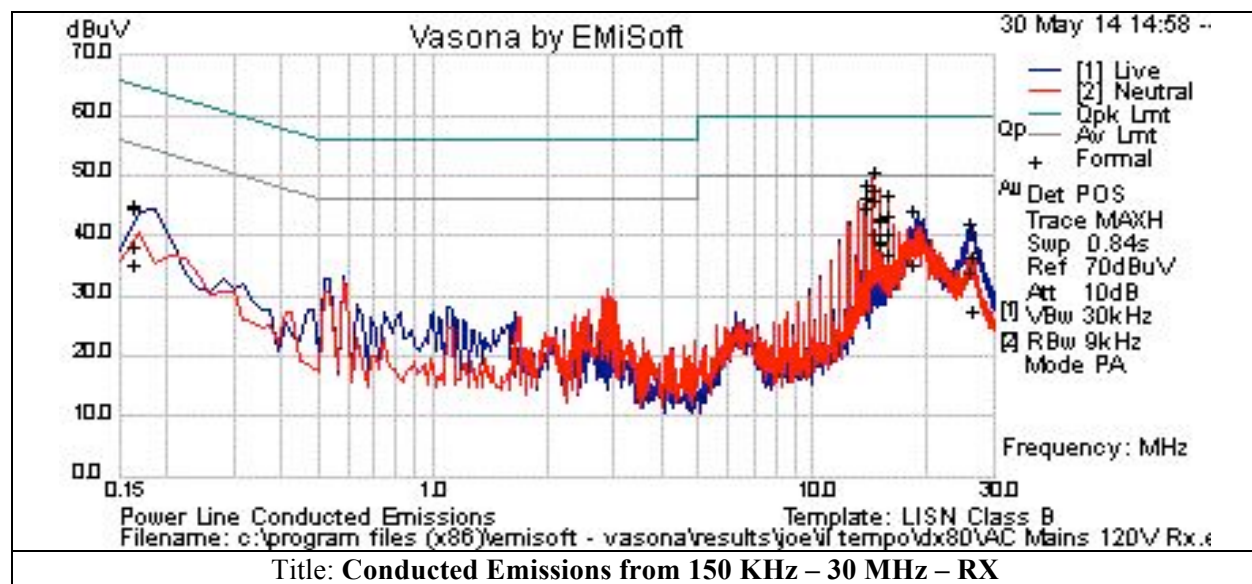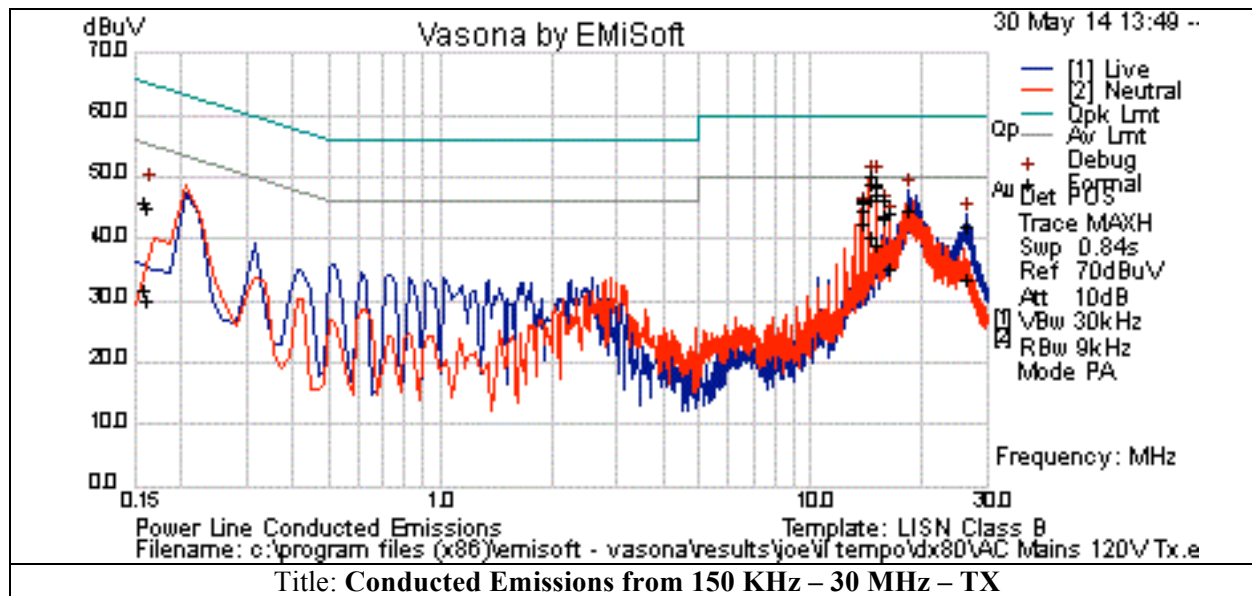



Appendix B: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz (1×10^3)
EN	European Norm	MHz	MegaHertz (1×10^6)
IEC	International Electro technical Commission	GHz	Gigahertz (1×10^9)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1×10^3)
L1	Line 1	μ V	Microvolt (1×10^{-6})
L2	Line2	A	Amp
L3	Line 3	μ A	Micro Amp (1×10^{-6})
DC	Direct Current	mS	Milli Second (1×10^{-3})
RAW	Uncorrected measurement value, as indicated by the measuring device	μ S	Micro Second (1×10^{-6})
RF	Radio Frequency	μ S	Micro Second (1×10^{-6})
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

**Appendix C: List of Test Equipment Used to perform the test**

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
Test Equipment used for Radiated Emissions					
CIS004882	EMC Test Systems / 3115	Double Ridged Guide Horn Antenna	28-JUN-13	28-JUN-14	A.8, A.9
CIS005691	Miteq / NSP1800-25-S1	Broadband Preamplifier (1-18GHz)	27-JAN-14	27-JAN-15	A.8, A.9
CIS008448	Cisco / NSA 5m Chamber	NSA 5m Chamber	03-OCT-13	03-OCT-14	A.8, A.9
CIS021117	Micro-Coax / UFB311A-0-2484-520520	RF Coaxial Cable, to 18GHz, 248.4 in	23-AUG-13	23-AUG-14	A.8, A.9
CIS025658	Micro-Coax / UFB311A-1-0840-504504	RF Coaxial Cable, to 18GHz, 84 in	14-FEB-14	14-FEB-15	A.8, A.9
CIS037581	ETS-Lindgren / 3117	Double Ridged Waveguide Horn Ant.	31-JUL-13	31-JUL-14	A.8, A.9
CIS041935	Newport / iBTHP-5-DB9	5 inch Temp/RH/Press Sensor w/20ft cab	01-APR-14	01-APR-15	A.8, A.9
CIS040641	Rohde & Schwarz / ESU26	EMI Test Receiver	24-JUN-13	24-JUN-14	A.8, A.9
CIS047284	Huber + Suhner / Sucoflex 102E	40GHz Cable K Connector	30-MAY-13	30-MAY-14	A.8
CIS047286	Huber + Suhner / Sucoflex 102E	40GHz Cable K Connector	30-MAY-13	30-MAY-14	A.9
CIS049443	Micro-Tronics / BRM50702-02	Notch Filter, SB:2.4-2.5GHz, to 18GHz	20-MAR-14	20-MAR-15	A.9
CIS049563	Huber + Suhner / Sucoflex 106A	N Type Cable 18GHz	23-AUG-13	23-AUG-14	A.8, A.9
Test Equipment used for AC Mains Conducted Emissions					
CIS008375	Andrew / F4A-PNMNM	49 ft Helix Cable	16-APR-13	16-APR-14	A.10
CIS008376	Andrew / F4A-PNMNM	30 ft Helix Cable	24-JUN-13	24-JUN-14	A.10
CIS005707	Fischer Custom Communications / FCC-LISN-50-50	LISN	16-APR-13	16-APR-14	A.10
CIS019206	TTE / H785-150K-50-21378	High Pas Filter, Fo=150kHz	12-SEP-13	12-SEP-14	A.10
CIS008591	Fischer Custom Communications/ FCC-RFM2F-520R	LISN AC Adaptor – Std 120V outlet	16-APR-13	16-APR-14	A.10
CIS008582	Fischer Custom Communications/ FCC-RFM2F-520R	LISN AC Adaptor – Std 120V outlet	24-JUN-13	24-JUN-14	A.10
CIS030562	Micro-Coax / UFB311A-1-0950- 504504	RF Coaxial Cable, to 18GHz, 95 in	26-JUN-13	26-JUN-14	A.10
CIS033649	Midwest Microwave / CSY- NMNM-14-010-FS	RF Coaxial Cable, RG-214, 10ft	16-APR-13	16-APR-14	A.10
CIS041929	Newport / iBTHP-5-DB9	5 inch Temp/RH/Press Sensor w/20ft cab	16-DEC-13	16-DEC-14	A.10
CIS045015	Huber + Suhner/ Sucoflex 106PA	Sucoflex N Type Black 7ft cable	30-OCT-13	30-OCT-14	A.10
CIS047300	Agilent Technologies / N9038A	MXE EMI Receiver 20Hz to 26.5 Ghz	17-DEC-13	17-DEC-14	A.10
RF Conducted at output antenna port					
CIS043023	Anritsu/ MT8852B-042	EDR Bluetooth Test Set	17-SEP-13	17-SEP-14	A.1 to A.7
CIS040514	Agilent Technologies / E4440A	Precision Spectrum Analyzer	15-NOV-13	15-NOV-14	A.1 to A.7
CIS045066	ZFSC-2-10G	Slitter	30-JAN-14	30-JAN-15	A.1 to A.7
CIS036716	RF Coaxial Cable-SMA	Radio Test Cable, SMA-SMA	18-DEC-13	18-DEC-14	A.1 to A.7
CIS036717	RF Coaxial Cable-SMA	Radio Test Cable, SMA-SMA	18-DEC-13	18-DEC-14	A.1 to A.7
CIS037552	MXGS83RK3000	Special Radio Test Adaptor Cable	03-JUL-13	03-JUL-14	A.1 to A.7



Appendix D: Test Procedures

Measurements were made in accordance with

- FCC docket #:DA 00-0705:2000
- ANSI C63.10:2009