

Supplemental “Transmit Simultaneously” Test Report

Report No.: RFBFBE-WTW-P22090890-3

FCC ID: I88EX7710-B0

Test Model: EX7710-B0

Received Date: 2022/12/1

Test Date: 2022/12/30 ~ 2023/2/1

Issued Date: 2023/2/17

Applicant: Zyxel Communications Corporation

Address: No.2 Industry East RD. IX, Hsinchu Science Park, Hsinchu 30075, Taiwan, R.O.C

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information	6
3.1 General Description of EUT	6
3.1.1 Test Mode Applicability and Tested Channel Detail	10
3.2 Description of Support Units	12
3.2.1 Configuration of System under Test	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement	14
4.1.2 Test Instruments	15
4.1.3 Test Procedures	17
4.1.4 Deviation from Test Standard	17
4.1.5 Test Setup	18
4.1.6 EUT Operating Conditions	19
4.1.7 Test Results	20
4.2 Conducted Emission Measurement	23
4.2.1 Limits of Conducted Emission Measurement	23
4.2.2 Test Instruments	23
4.2.3 Test Procedures	24
4.2.4 Deviation from Test Standard	24
4.2.5 Test Setup	24
4.2.6 EUT Operating Conditions	24
4.2.7 Test Results	25
4.3 Conducted Out of Band Emission Measurement	27
4.3.1 Limits of Conducted Out of Band Emission Measurement	27
4.3.2 Test Setup	27
4.3.3 Test Instruments	27
4.3.4 Test Procedures	27
4.3.5 Deviation from Test Standard	27
4.3.6 EUT Operating Conditions	27
4.3.7 Test Results	27
5 Pictures of Test Arrangements	29
Appendix – Information of the Testing Laboratories	30

Release Control Record

Issue No.	Description	Date Issued
RFBFBE-WTW-P22090890-3	Original release.	2023/2/17

1 Certificate of Conformity

Product: AX11000 WiFi 6E 10G Ethernet Gateway

Brand: ZYXEL

Test Model: EX7710-B0

Sample Status: Engineering sample

Applicant: Zyxel Communications Corporation

Test Date: 2022/12/30 ~ 2023/2/1


Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)

47 CFR FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Vivian Huang , **Date:** 2023/2/17
Vivian Huang / Specialist

Approved by :  , **Date:** 2023/2/17
May Chen / Manager

2 Summary of Test Results

FCC Part 15, Subpart C, E (SECTION 15.247, 15.407)			
FCC Clause	Test Item	Result	Remarks
15.207 15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -16.00dB at 23.58797MHz.
15.205 / 15.209 / 15.247(d) 15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -3.1dB at 499.99MHz.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.1 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AX11000 WiFi 6E 10G Ethernet Gateway
Brand	ZYXEL
Test Model	EX7710-B0
CPU Model No.	BCM4912
RF Chip Model No.	2.4G Chip Model: BCM6715 5G Chip Model: BCM6715 6G Chip Model: BCM6715
FW Version	V5.18(ACAK.0)b5_20221215
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT in 2.4GHz 1024QAM for OFDMA in 11ax mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 600 Mbps VHT: up to 800 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 4803.9 Mbps
Operating Frequency	2.4GHz: 2.412 GHz ~ 2.462 GHz 5GHz: 5.18 GHz ~ 5.24 GHz 5.25 GHz ~ 5.32 GHz 5.5 GHz ~ 5.72 GHz 5.745 GHz ~ 5.825 GHz 6GHz: 6.115 GHz ~ 6.415 GHz 6.435 GHz ~ 6.525 GHz 6.535 GHz ~ 6.865 GHz 6.875 GHz ~ 7.095 GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 25 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 12 802.11ac (VHT80), 802.11ax (HE80): 6 802.11ac (VHT160), 802.11ax (HE160): 2 6GHz: 802.11a, 802.11ax (HE20): 50 802.11ax (HE40): 25 802.11ax (HE80): 12 802.11ax (HE160): 6
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	- AC Adapter x1, Brand: APD, Model: WA-42F12FU

- Ethernet Cable x1 (1m, Unshielded)

Note:

1. The EUT power needs to be supplied from a power adapter, the information is as below table:

AC Adapter 1			
Brand	Model	Specification	The housing color
APD	WA-42F12FU	AC Input: 100-240Vac, 50/60Hz, 1.2A Max. DC Output: 12Vdc, 3.5A DC Output Cable: Unshielded, 1.5m, without core bonded Manufacturer: ASIAN POWER DEVICES INC.	Black / White

2. The EUT has three radios as following table:

Radio 1	Radio 2	Radio 3
WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz

3. Simultaneously transmission condition.



Condition	Technology		
1	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The antennas provided to the EUT, please refer to the following table:

Antenna NO.	RF Chain NO.	Brand	Part Number	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	Cable Length
Ant1_Dual-band	2.4G Chain 2 5G Chain 2	Airgain	N03ZYAHA-PK1-G110U	3.8	2.4~2.4835GHz	Dipole	ipex(MHF)	110mm
				3.6	5.15~5.25GHz			
				4.1	5.25~5.35GHz			
				3.7	5.47~5.725GHz			
				4.2	5.725~5.85GHz			
Ant2_Dual-band	2.4G Chain 1 5G Chain 1	Airgain	N03ZYAHB-PK1-B135U	4.6	2.4~2.4835GHz	Dipole	ipex(MHF)	135mm
				5.3	5.15~5.25GHz			
				5.0	5.25~5.35GHz			
				4.9	5.47~5.725GHz			
				5.2	5.725~5.85GHz			
Ant3_Dual-band	2.4G Chain 0 5G Chain 0	Airgain	N03ZYAHC-PK1-W195U	3.4	2.4~2.4835GHz	Dipole	ipex(MHF)	195mm
				5.2	5.15~5.25GHz			
				5.3	5.25~5.35GHz			
				4.8	5.47~5.725GHz			
				4.2	5.725~5.85GHz			
Ant4	2.4G Chain 3	Airgain	N03ZYAHD-PK1-A90U	5.0	2.4~2.4835GHz	Dipole	ipex(MHF)	90mm
Ant5_5GHz	5G Chain 3	Airgain	N02ZYAHE-PK1-A105U	4.5	5.15~5.25GHz	Dipole	ipex(MHF)	105mm
				4.1	5.25~5.35GHz			
				4.3	5.47~5.725GHz			
				4.6	5.725~5.85GHz			
Ant6_6GHz	6G Chain 3	Airgain	N06ZYAHF-PK1-E100U	5.9	5.925~6.425GHz	Dipole	ipex(MHF)	100m
				5.9	6.425~6.525GHz			
				5.9	6.525~6.875GHz			
				4.8	6.875~7.125GHz			
Ant7_6GHz	6G Chain 2	Airgain	N06ZYAHG-PK1-R95U	5.6	5.925~6.425GHz	Dipole	ipex(MHF)	95mm
				5.5	6.425~6.525GHz			
				5.4	6.525~6.875GHz			
				5.7	6.875~7.125GHz			
Ant8_6GHz	6G Chain 1	Airgain	N06ZYAHH-PK1-Y75U	5.7	5.925~6.425GHz	Dipole	ipex(MHF)	75mm
				5.9	6.425~6.525GHz			
				6.0	6.525~6.875GHz			
				5.9	6.875~7.125GHz			
Ant9_6GHz	6G Chain 0	Airgain	N06ZYAHJ-PK1-P75U	4.7	5.925~6.425GHz	Dipole	ipex(MHF)	75mm
				3.7	6.425~6.525GHz			
				4.0	6.525~6.875GHz			
				4.0	6.875~7.125GHz			

* Antenna port location

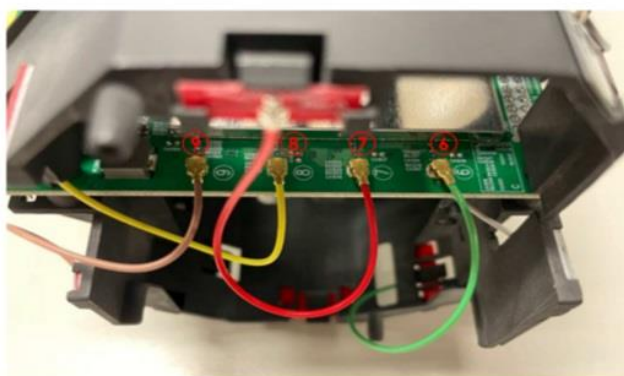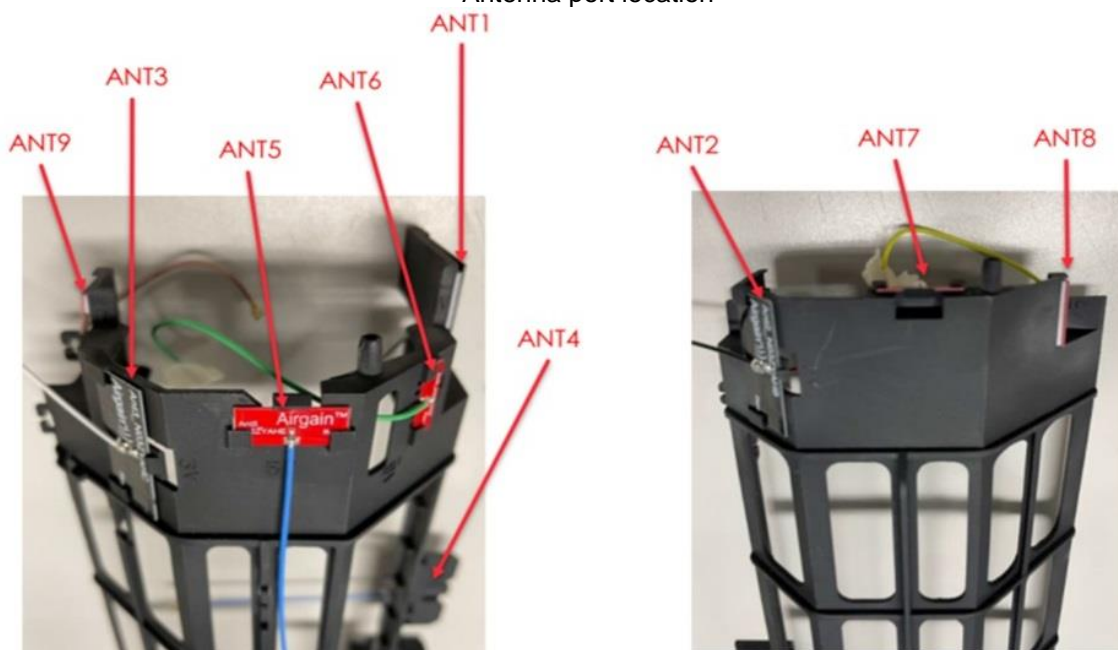

5. The EUT incorporates a MIMO function:

2.4 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11b	4TX	4RX
802.11g	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
VHT20	4TX	4RX
VHT40	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX
6GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX
802.11ax (HE160)	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.

6. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

7. Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

3.1.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE \geq 1G	RE<1G	PLC	OB	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

OB: Conducted Out-Band Emission Measurement

Note: Partial RU (resource unit) configurations not supported.

Radiated Emission Test (Above 1GHz):

☒ The tested configurations represent the worst-case mode from all possible combinations by the maximum power.

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
2.4GHz: 802.11ax (HE20) + 5GHz: 802.11a + 6GHz: 802.11ax (HE160)	1 to 11	6	OFDMA	BPSK
	36 to 48 52 to 64 100 to 144 149 to 165	40	OFDM	BPSK
	47 to 79, 111, 143 to 175, 207	207	OFDMA	BPSK

Radiated Emission Test (Below 1GHz):

☒ The tested configurations represent the worst-case mode from all possible combinations by the maximum power.

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
2.4GHz: 802.11ax (HE20) + 5GHz: 802.11a + 6GHz: 802.11ax (HE160)	1 to 11	6	OFDMA	BPSK
	36 to 48 52 to 64 100 to 144 149 to 165	40	OFDM	BPSK
	47 to 79, 111, 143 to 175, 207	207	OFDMA	BPSK

Power Line Conducted Emission Test:

☒ The tested configurations represent the worst-case mode from all possible combinations by the maximum power.

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
2.4GHz: 802.11ax (HE20) + 5GHz: 802.11a + 6GHz: 802.11ax (HE160)	1 to 11	6	OFDMA	BPSK
	36 to 48 52 to 64 100 to 144 149 to 165	40	OFDM	BPSK
	47 to 79, 111, 143 to 175, 207	207	OFDMA	BPSK

Conducted Out-Band Emission Measurement:

☒ The tested configurations represent the worst-case mode from all possible combinations by the maximum power.

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
2.4GHz: 802.11ax (HE20) + 5GHz: 802.11a	1 to 11	6	OFDMA	BPSK
	36 to 48 52 to 64 100 to 144 149 to 165	40	OFDM	BPSK

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE \geq 1G	25deg. C, 68%RH	120Vac, 60Hz	Sampso Chen
RE<1G	24deg. C, 68%RH	120Vac, 60Hz	Sampso Chen
PLC	24deg. C, 68%RH	120Vac, 60Hz	Sampso Chen
OB	25deg. C, 60%RH	120Vac, 60Hz	Katina Lu


3.2 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Lenovo	20U5S01X00 L14	PF-28LKK7	N/A	Provided by Lab
B	Laptop	Lenovo	20U5S01X00 L14	PF-1ANPYA	N/A	Provided by Lab
C	Laptop	HP	TPN-Q186	5CD8212YYK	DoC	Provided by Lab
D	Switch	D-Link	DGS-1005D	DR8WC92000523	N/A	Provided by Lab
E	USB Disk	SanDisk	BM181225896Z	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.5	No	0	Supplied by applicant
2	RJ-45 Cable	1	10	No	0	Provided by Lab
3	RJ-45 Cable	1	10	No	0	Provided by Lab
4	Ethernet Cable	1	1	No	0	Supplied by applicant
5	RJ-45 Cable	3	10	No	0	Provided by Lab
6	RJ-45 Cable	1	10	No	0	Provided by Lab

3.2.1 Configuration of System under Test

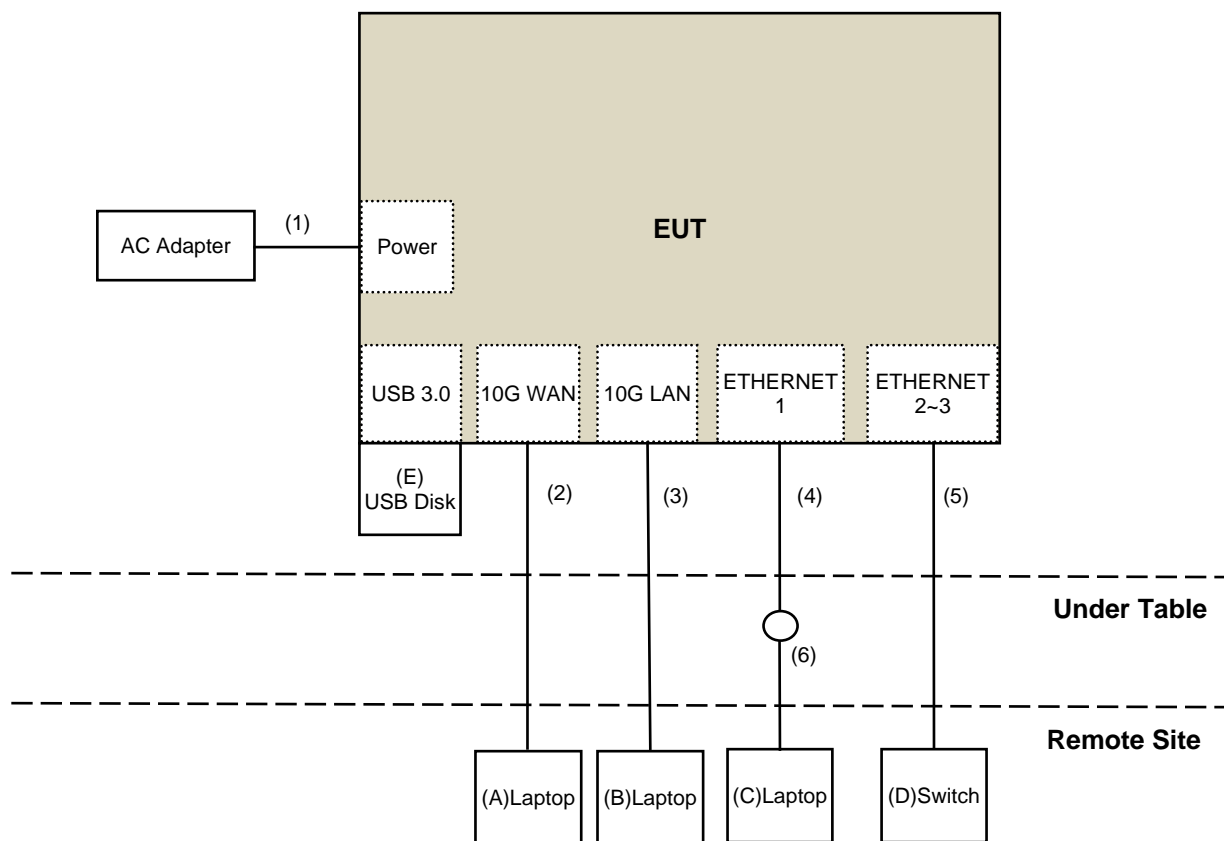

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBuV/m)	AV:54 (dBuV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBuV/m) ^{*1} PK:105.2 (dBuV/m) ^{*2} PK: 110.8(dBuV/m) ^{*3} PK:122.2 (dBuV/m) ^{*4}
	15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

For Radiated Emission test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Keysight	N9020B	MY60112410	2022/3/13	2023/3/12
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Test Receiver KEYSIGHT	N9038A	MY59050100	2022/6/20	2023/6/19
Pre_Amplifier EMCI	EMC001340	980142	2022/6/2	2023/6/1
LOOP ANTENNA Electro-Metrics	EM-6879	264	2022/3/18	2023/3/17
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-001	2022/12/19	2023/12/18
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-002	2022/12/19	2023/12/18
Pre_Amplifier(20M-3G) EMCI	EMC330N	980852	2022/3/28	2023/3/27
Bilog Antenna Schwarzbeck	VULB 9168	9168-0942	2022/10/20	2023/10/19
RF Coaxial Cable COMMATE/PEWC	8D	966-6-1	2022/4/25	2023/4/24
RF Coaxial Cable COMMATE/PEWC	8D	966-6-2	2022/4/25	2023/4/24
RF Coaxial Cable COMMATE/PEWC	8D	966-6-3	2022/4/25	2023/4/24
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-01	2022/12/28	2023/12/27
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-2035	2022/11/13	2023/11/12
Pre_Amplifier EMCI	EMC12630SE	980385	2022/8/15	2023/8/14
RF Coaxial Cable EMCI	EMC101G-KM-KM-10000	210708	2022/11/4	2023/11/3
RF Cable EMCI	EMC104-SM-SM-1300	210205	2022/5/10	2023/5/9
Pre_Amplifier EMCI	EMC184045SE	980387	2022/12/28	2023/12/27
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170519	2022/11/13	2023/11/12
RF Cable-Frequency range: 1-40GHz EMCI	EMC102-KM-KM-1200	160924	2022/12/28	2023/12/27
RF Coaxial Cable EMCI	EMC-KM-KM-4000	200214	2022/3/8	2023/3/7

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 6.
3. Tested Date: 2022/12/30 ~ 2023/2/1

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	101516	2022/3/7	2023/3/6
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2022/4/5	2023/4/4
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: 2023/1/31

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

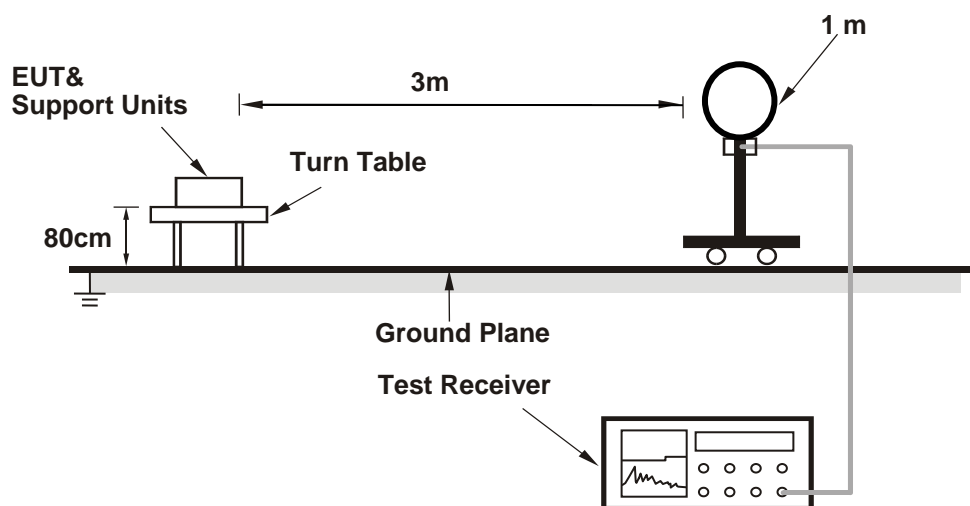

For Radiated emission 30MHz to 1GHz

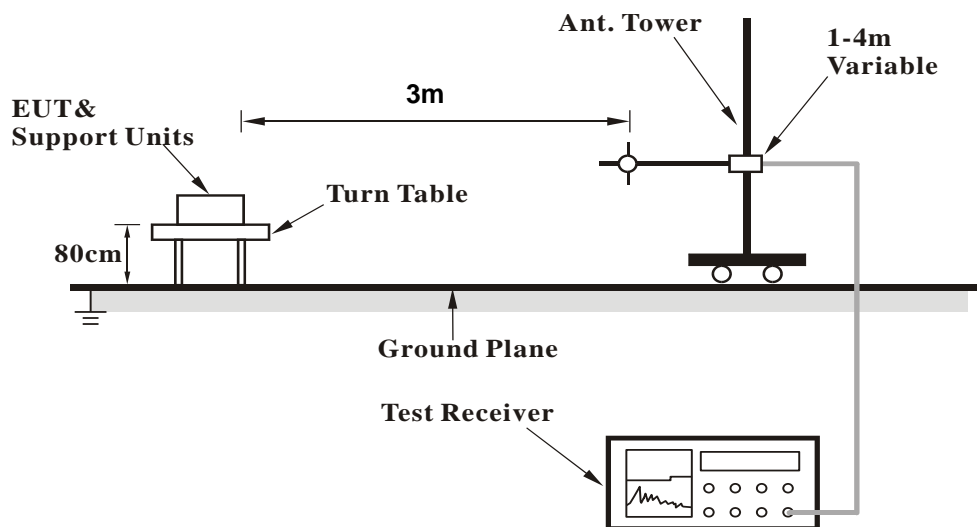

For Radiated emission above 1GHz

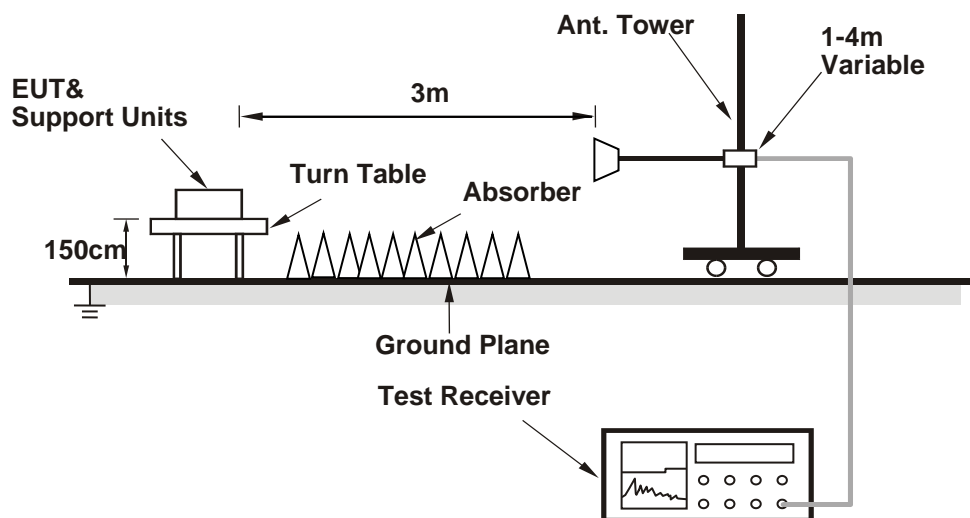

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (accessMTool_REL_3_2_1_3) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data:

FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Peak (PK) Average (AV)
-----------------	--------------	-------------------	---------------------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	46.5 PK	74.0	-27.5	1.14 H	14	42.5	4.0
2	4874.00	36.4 AV	54.0	-17.6	1.14 H	14	32.4	4.0
3	7311.00	46.4 PK	74.0	-27.6	1.21 H	16	36.3	10.1
4	7311.00	36.3 AV	54.0	-17.7	1.21 H	16	26.2	10.1
5	#10400.00	45.1 PK	88.2	-43.1	1.51 H	18	30.9	14.2
6	#13970.00	48.8 PK	88.2	-39.4	1.77 H	186	31.4	17.4
7	#13970.00	36.5 AV	68.2	-31.7	1.77 H	186	19.1	17.4
8	15600.00	59.7 PK	74.0	-14.3	1.56 H	360	44.9	14.8
9	15600.00	46.8 AV	54.0	-7.2	1.56 H	360	32.0	14.8
10	20955.00	55.8 PK	74.0	-18.2	2.45 H	155	60.1	-4.3
11	20955.00	43.0 AV	54.0	-11.0	2.45 H	155	47.3	-4.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	45.4 PK	74.0	-28.6	2.26 V	17	41.4	4.0
2	4874.00	35.9 AV	54.0	-18.1	2.26 V	17	31.9	4.0
3	7311.00	46.4 PK	74.0	-27.6	2.17 V	6	36.3	10.1
4	7311.00	36.3 AV	54.0	-17.7	2.17 V	6	26.2	10.1
5	#10400.00	44.3 PK	88.2	-43.9	1.45 V	283	30.1	14.2
6	#13970.00	47.0 PK	88.2	-41.2	2.32 V	140	29.6	17.4
7	#13970.00	34.8 AV	68.2	-33.4	2.32 V	140	17.4	17.4
8	15600.00	57.8 PK	74.0	-16.2	1.53 V	308	43.0	14.8
9	15600.00	45.8 AV	54.0	-8.2	1.53 V	308	31.0	14.8
10	20955.00	54.8 PK	74.0	-19.2	1.60 V	187	59.1	-4.3
11	20955.00	43.0 AV	54.0	-11.0	1.60 V	187	47.3	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Data:

FREQUENCY RANGE	30MHz ~ 1GHz	DETECTOR FUNCTION	Quasi-Peak (QP)
------------------------	--------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	89.56	30.2 QP	43.5	-13.3	2.00 H	292	48.6	-18.4
2	190.79	33.1 QP	43.5	-10.4	3.00 H	289	48.4	-15.3
3	375.00	29.2 QP	46.0	-16.8	1.00 H	259	39.5	-10.3
4	499.99	39.2 QP	46.0	-6.8	1.50 H	183	46.6	-7.4
5	625.03	30.1 QP	46.0	-15.9	3.00 H	1	34.9	-4.8
6	937.53	31.8 QP	46.0	-14.2	1.50 H	1	31.9	-0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

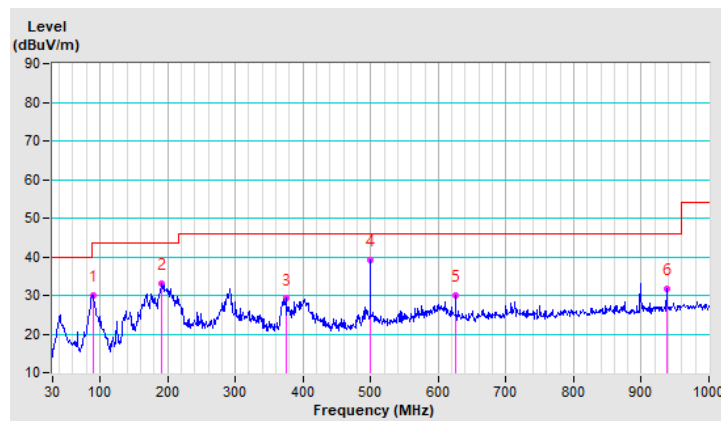


FREQUENCY RANGE	30MHz ~ 1GHz	DETECTOR FUNCTION	Quasi-Peak (QP)
------------------------	--------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.22	35.4 QP	40.0	-4.6	1.00 V	3	48.1	-12.7
2	90.00	33.9 QP	43.5	-9.6	1.50 V	228	52.3	-18.4
3	196.31	38.3 QP	43.5	-5.2	1.50 V	1	54.3	-16.0
4	291.28	33.3 QP	46.0	-12.7	1.50 V	163	45.7	-12.4
5	499.99	42.9 QP	46.0	-3.1	1.00 V	233	50.3	-7.4
6	624.98	34.7 QP	46.0	-11.3	1.00 V	221	39.4	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

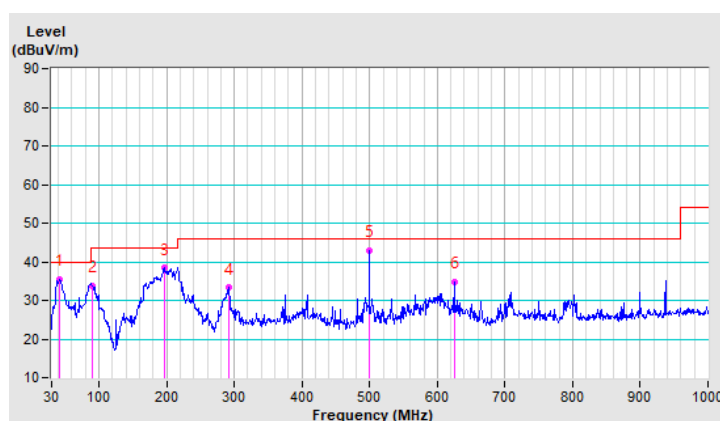

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
TEST RECEIVER R&S	ESCS 30	847124/029	2022/10/14	2023/10/13
LISN R&S	ESH3-Z5	848773/004	2022/10/18	2023/10/17
50 ohm terminal resistance NA	NA	EMC-01	2022/9/27	2023/9/26
RF Coaxial Cable JYEBO	5D-FB	COCCAB-001	2022/8/24	2023/8/23
Fixed attenuator STI	STI02-2200-10	005	2022/8/24	2023/8/23
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note: 1. The test was performed in Conduction 1.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

3. Tested Date: 2023/1/3

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

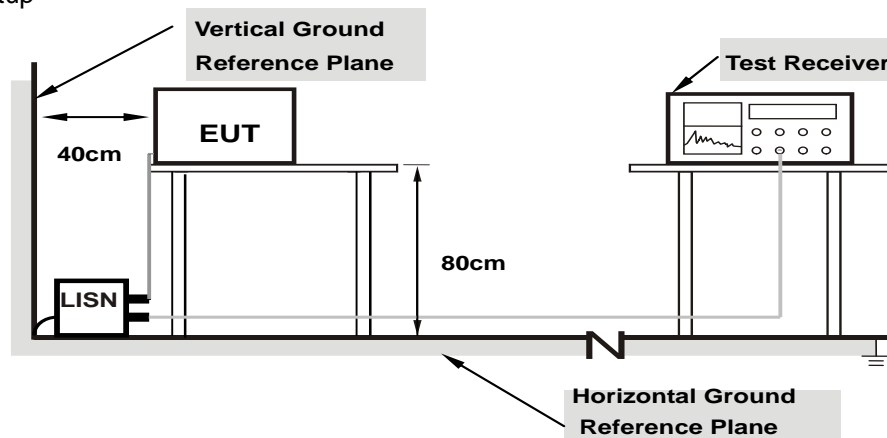

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	-----------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.95	36.04	19.34	45.99	29.29	66.00	56.00	-20.01	-26.71
2	0.18125	9.96	32.05	14.89	42.01	24.85	64.43	54.43	-22.42	-29.58
3	0.20859	9.96	26.81	11.39	36.77	21.35	63.26	53.26	-26.49	-31.91
4	0.48984	9.97	25.80	19.15	35.77	29.12	56.17	46.17	-20.40	-17.05
5	2.77734	10.12	12.20	6.28	22.32	16.40	56.00	46.00	-33.68	-29.60
6	23.58797	11.26	24.72	22.74	35.98	34.00	60.00	50.00	-24.02	-16.00

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

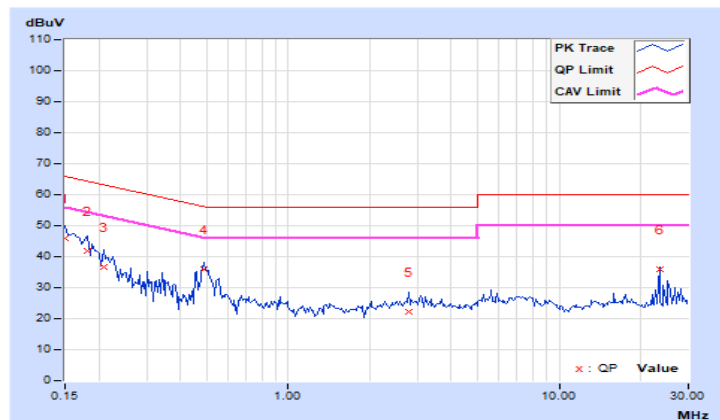


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.95	36.00	19.46	45.95	29.41	66.00	56.00	-20.05	-26.59
2	0.16953	9.95	33.67	16.79	43.62	26.74	64.98	54.98	-21.36	-28.24
3	0.49375	9.97	22.19	12.65	32.16	22.62	56.10	46.10	-23.94	-23.48
4	5.50781	10.27	13.15	6.42	23.42	16.69	60.00	50.00	-36.58	-33.31
5	17.73828	10.88	15.77	10.71	26.65	21.59	60.00	50.00	-33.35	-28.41
6	23.58594	11.00	24.46	20.39	35.46	31.39	60.00	50.00	-24.54	-18.61

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

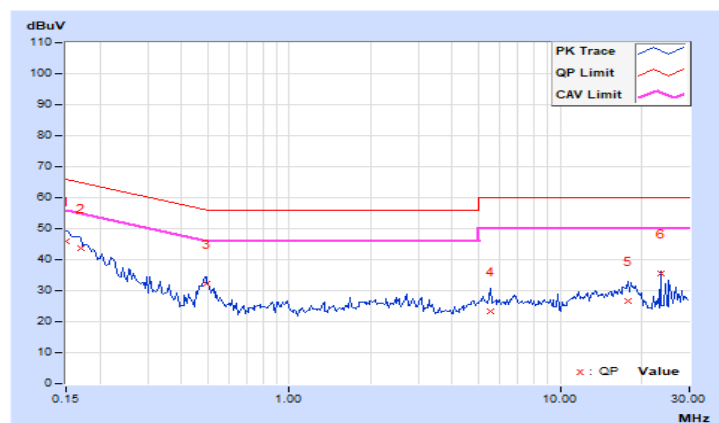


4.3 Conducted Out of Band Emission Measurement

4.3.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedures

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions


The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

2.4GHz_802.11ax (HE20) CH6 + 5GHz_802.11a CH40


Chain0

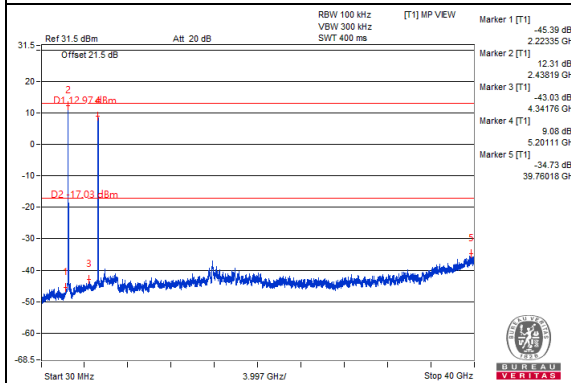

Chain1

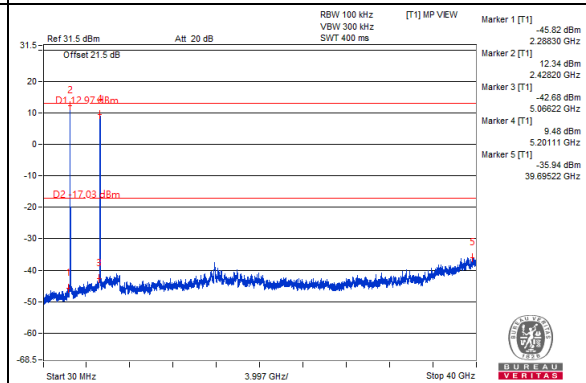

Chain2

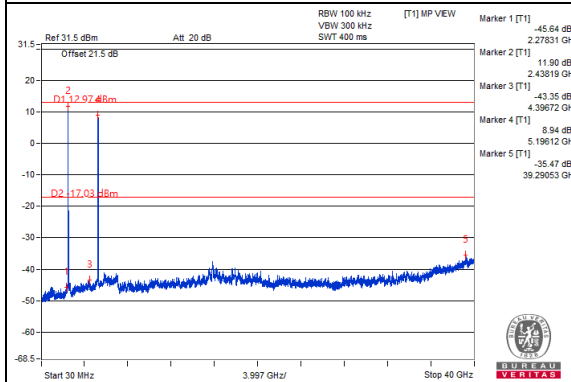

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---