



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC

FCC ID: PY7-70663E

**Report Number: 12132879-S1V3
Issue Date: 4/6/2018**

Prepared for
**SONY MOBILE COMMUNICATIONS INC.
4-12-3 HIGASHI-SHINAGAWA
SHINAGAWA-KU, TOKYO, 140-0002, JAPAN**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
V1	3/8/2018	Initial Issue	--
V2	3/23/2018	Sec. 4.3, 8.1.: Corrected typo. Sec. 9 and 10: Updated power to 2 digits. Sec. 9.1: Added notes.	Kenneth Mak
V3	4/6/2018	Sec. 6.2., 10.11: Corrected Wi-Fi duty cycle	Kenneth Mak

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment	7
4.1.	SAR Measurement System.....	7
4.2.	SAR Scan Procedures.....	8
4.3.	Test Equipment.....	10
5.	Measurement Uncertainty.....	12
6.	Device Under Test (DUT) Information	13
6.1.	DUT Description	13
6.2.	Wireless Technologies.....	14
6.3.	General LTE SAR Test and Reporting Considerations.....	15
6.4.	LTE (TDD) Considerations.....	17
7.	RF Exposure Conditions (Test Configurations)	18
8.	Dielectric Property Measurements & System Check	19
8.1.	Dielectric Property Measurements	19
8.2.	System Check.....	23
9.	Conducted Output Power Measurements.....	25
9.1.	GSM	25
9.2.	W-CDMA	29
9.3.	LTE.....	32
9.4.	Wi-Fi 2.4GHz (DTS Band)	46
9.5.	Wi-Fi 5GHz (U-NII Bands).....	47
9.6.	Bluetooth	49
10.	Measured and Reported (Scaled) SAR Results.....	50
10.1.	GSM850.....	52
10.2.	GSM1900.....	52
10.3.	W-CDMA Band V	53
10.4.	LTE Band 4 (20MHz Bandwidth)	53
10.5.	LTE Band 5 (10MHz Bandwidth)	54
10.6.	LTE Band 7 (20MHz Bandwidth)	55
10.7.	LTE Band 12 (10MHz Bandwidth)	56
10.8.	LTE Band 13 (10MHz Bandwidth)	57

10.9.	<i>LTE Band 17 (10MHz Bandwidth)</i>	57
10.10.	<i>LTE Band 41 (20MHz Bandwidth)</i>	58
10.11.	<i>Wi-Fi (DTS Band)</i>	59
10.12.	<i>Wi-Fi (U-NII Band)</i>	60
10.13.	<i>Bluetooth</i>	62
11.	SAR Measurement Variability	63
12.	Simultaneous Transmission SAR Analysis	64
12.1.	<i>Sum of the SAR for WWAN & Wi-Fi & BT</i>	65
Appendixes		66
12132879-S1V1	<i>Appendix A: SAR Setup Photos</i>	66
12132879-S1V1	<i>Appendix B: SAR System Check Plots</i>	66
12132879-S1V1	<i>Appendix C: Highest SAR Test Plots</i>	66
12132879-S1V1	<i>Appendix D: SAR Liquid Tissue Ingredients</i>	66
12132879-S1V1	<i>Appendix E: SAR Probe Calibration Certificates</i>	66
12132879-S1V1	<i>Appendix F: SAR Dipole Calibration Certificates</i>	66

1. Attestation of Test Results

Applicant Name	SONY MOBILE COMMUNICATIONS INC.			
FCC ID	PY7-70663E			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category	SAR Limits (W/Kg) Peak spatial-average(1g of tissue)			
General population / Uncontrolled exposure	1.6			
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)			
	PCE	DTS	NII	DSS
Head	0.670	0.220	0.433	0.155
Body-worn	0.630	0.016	0.023	0.011
Hotspot/Wi-Fi Direct	0.945	0.063	N/A	0.042
Simultaneous TX	1.471	1.161	1.471	1.471
Date Tested	2/13/2018 to 3/8/2018			
Test Results	Pass			
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.				
Approved & Released By:		Prepared By:		
				
Devin Chang Senior Test Engineer UL Verification Services Inc.		Chakrit Thammanavarat Test Engineer UL Verification Services Inc.		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2014; Page 36, RF Exposure Procedures Update (Overlapping LTE Bands)
- [TCB workshop](#) October, 2014; Page 37, RF Exposure Procedures Update (Other LTE Considerations)
- [TCB workshop](#) October, 2015; Page 6, RF Exposure Procedures (KDB 941225 D05A)
- [TCB workshop](#) April, 2016; Page 13, RF Exposure Procedures (LTE Carrier Aggregation for DL)
- [TCB workshop](#) October, 2016; Page 7, RF Exposure Procedures (Bluetooth Duty Factor)

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

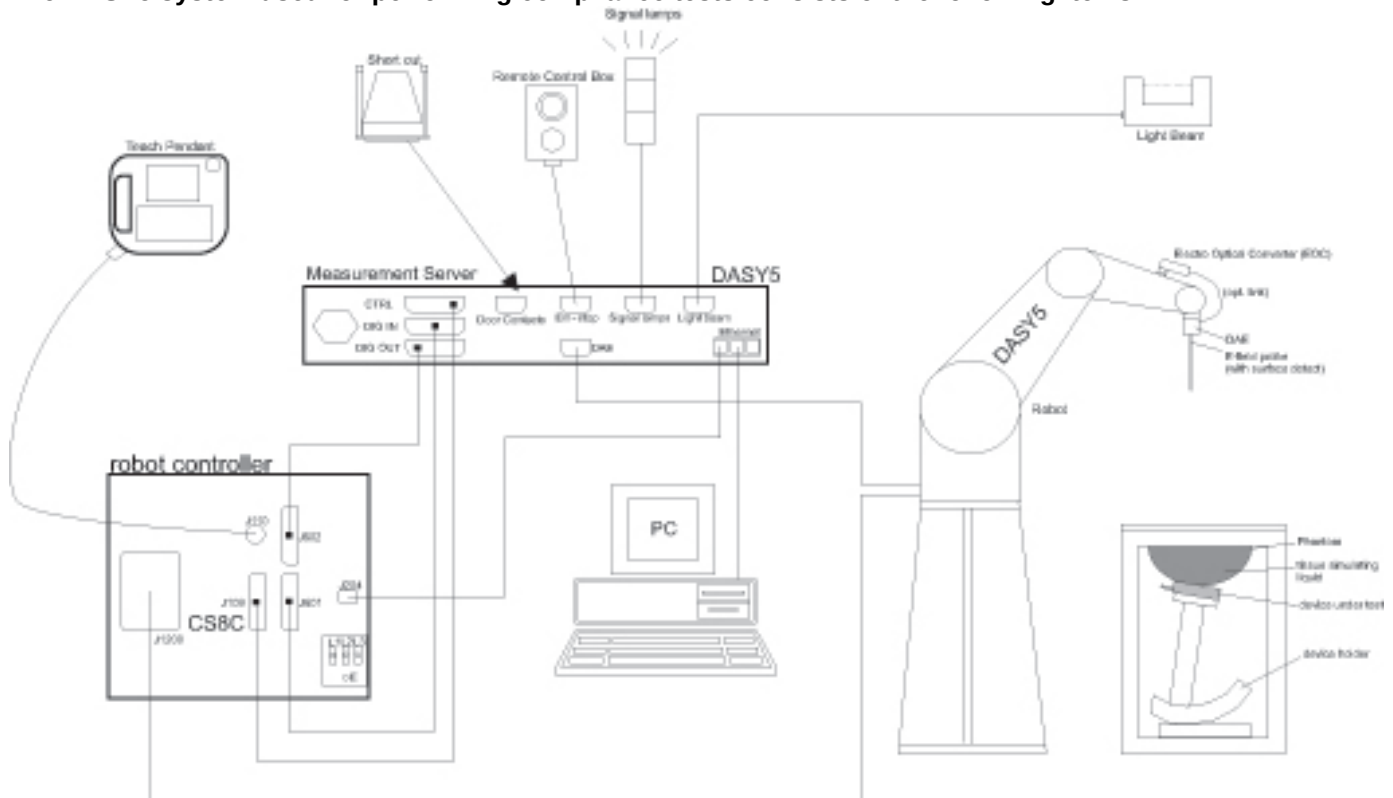

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	8753ES	MY40001647	9/15/2018
Dielectric Probe kit	SPEAG	DAK-3.5	1087	11/14/2018
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	11/14/2018
Thermometer	Traceable Calibration Control Co.	4242	150378159	5/26/2018

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	Agilent	N5181A	MY50140610	5/31/2018
Power Meter	Keysight	N1912A	MY55196008	5/12/2018
Power Sensor	Agilent	N1921A	MY53260001	10/27/2018
Power Sensor	Agilent	N1921A	MY53020038	4/13/2018
DC Power Supply	HP	6296A	2841A-05955	N/A
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795093	N/A
Directional coupler	Werlatone	C8060-102	2149	N/A
Synthesized Signal Generator	Agilent	N5181A	MY50140630	5/16/2018
Power Meter	HP	437B	3125U12345	8/10/2018
Power Meter	HP	437B	3125U11347	8/15/2018
Power Sensor	HP	8481A	3318A92374	8/15/2018
Power Sensor	HP	8481A	1926A27048	8/10/2018
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Directional coupler	Werlatone	C8060-102	2141	N/A
DC Power Supply	BK Precision	1611	215-02292	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab A)	SPEAG	EX3DV4	7463	7/5/2018
E-Field Probe (SAR Lab B)	SPEAG	EX3DV4	7335	3/15/2018
E-Field Probe (SAR Lab C)	SPEAG	EX3DV4	3929	3/15/2018
E-Field Probe (SAR Lab D)	SPEAG	EX3DV4	7356	4/21/2018
E-Field Probe (SAR Lab E)	SPEAG	EX3DV4	3989	1/16/2019
E-Field Probe (SAR Lab F)	SPEAG	EX3DV4	3773	4/21/2018
E-Field Probe (SAR Lab G)	SPEAG	EX3DV4	3871	8/23/2018
E-Field Probe (SAR Lab H)	SPEAG	EX3DV4	7483	12/12/2018
Data Acquisition Electronics (SAR Lab A)	SPEAG	DAE4	1434	4/19/2018
Data Acquisition Electronics (SAR Lab B)	SPEAG	DAE4	1380	7/24/2018
Data Acquisition Electronics (SAR Lab C)	SPEAG	DAE4	1343	8/21/2018
Data Acquisition Electronics (SAR Lab D)	SPEAG	DAE4	1352	11/8/2018
Data Acquisition Electronics (SAR Lab E)	SPEAG	DAE4	1259	1/10/2019
Data Acquisition Electronics (SAR Lab F)	SPEAG	DAE4	1377	10/11/2018
Data Acquisition Electronics (SAR Lab G)	SPEAG	DAE4	1472	3/10/2018*
Data Acquisition Electronics (SAR Lab G)	SPEAG	DAE4	1359	2/9/2019
Data Acquisition Electronics (SAR Lab H)	SPEAG	DAE4	1257	10/11/2018
System Validation Dipole	SPEAG	D750V3	1019	3/13/2018
System Validation Dipole	SPEAG	D835V2	4d117	5/22/2018
System Validation Dipole	SPEAG	D900V2	1d143	10/5/2018
System Validation Dipole	SPEAG	D1750V2	1050	4/18/2018
System Validation Dipole	SPEAG	D1900V2	5d140	4/19/2018
System Validation Dipole	SPEAG	D1900V2	5d043	11/22/2018
System Validation Dipole	SPEAG	D2450V2	899	3/10/2018*
System Validation Dipole	SPEAG	D2450V2	748	2/14/2019
System Validation Dipole	SPEAG	D2600V2	1036	3/10/2018
System Validation Dipole	SPEAG	D2600V2	1006	10/5/2018
System Validation Dipole	SPEAG	D5GHzV2	1168	11/23/2018
System Validation Dipole	SPEAG	D5GHzV2	1138	10/26/2018

Note(s):

*Equipment not used past calibration due date.

Other

Name of Equipment	Manufacturer	Type/Model	T Number	Serial No.	Cal. Due Date
Power Meter	Keysight	N1912A	T1273	MY55196007	7/17/2018
Power Meter	Keysight	N1912A	T1263	MY55196004	7/14/2018
Power Meter	Agilent	N1912A	T733	MY50001008	10/17/2018
Power Sensor	Agilent	N1921A	T751	MY53260010	10/17/2018
Power Sensor	Agilent	N1921A	T748	MY53020038	4/13/2018
DC Power Supply	HP	6296A	N/A	2841A-05955	N/A
Base station Simulator	R&S	CMW500	T978	137877	9/1/2018
Base station Simulator	R&S	CMW500	T960	135384	6/30/2018
Base station Simulator	R&S	CMW500	T948	135393	5/15/2018
Base station Simulator	R&S	CMW500	T958	134855	6/12/2018
Base station Simulator	R&S	CMW500	T259	124594	10/24/2018
Base station Simulator	R&S	CMW500	T1526	147543	5/2/2018
Base station Simulator	R&S	CMW500	T964	134853	7/26/2018
Base station Simulator	R&S	CMW500	T268	124593	7/31/2018
Base station Simulator	R&S	CMW500	T953	135390	4/27/2018
Base station Simulator	R&S	CMW500	T959	137873	7/18/2018
Base station Simulator	R&S	CMW500	T919	125236	7/31/2018
Base station Simulator*	Agilent	E5515C	T213	GB47050526	2/21/2018 *

Note(s):

*Equipment not used past calibration due date.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Please refer to Appendix A		
Back Cover	☒ The Back Cover is not removable.		
Battery Options	☒ The rechargeable battery is not user accessible.		
Accessory	Headset		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☐ Mobile Hotspot (Wi-Fi 5 GHz)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☐ Wi-Fi Direct (Wi-Fi 5 GHz)		
Test sample information	S/N	Technology	Notes
	BH9000FRBC	GSM/UMTS	Conducted
	BH9000D4BC	LTE (LB/MB)	Conducted
	BH9000FNBC	LTE (HB)	Conducted
	BH9000BCBC	WLAN - 2.4GHz #1	Conducted
	BH9000HPBC	WLAN - 2.4GHz #2	Conducted
	BH9000B9BC	WLAN - 5GHz #1	Conducted
	BH9000G2BC	WLAN - 5GHz #2	Conducted
	BH9000P0BG	GSM/UMTS (LB) #1	Radiated
	BH9000JEBG	GSM/UMTS (LB) #2	Radiated
	BH9000CFBG	GSM/UMTS (MB) #1	Radiated
	BH9000J9BG	GSM/UMTS (MB) #2	Radiated
	BH9000A4BG	LTE (LB)	Radiated
	BH90009EBG	LTE (LB)	Radiated
	BH9000D3BG	LTE (MB) #1	Radiated
	BH9000C3BG	LTE (MB) #2	Radiated
	BH9000JFBG	LTE (HB)	Radiated
	BH9000HEBG	LTE (HB)	Radiated
	BH9000ARBG	WLAN - 2.4GHz #1	Radiated
	BH9000NLBG	WLAN - 2.4GHz #2	Radiated
	BH9000JPBG	WLAN - 2.4GHz #3	Radiated
	BH90009SBG	WLAN - 2.4GHz #4	Radiated
	BH9000BYBG	WLAN - 5GHz #1	Radiated
	BH9000NHBG	WLAN - 5GHz #2	Radiated
	BH9000EPBG	WLAN - 5GHz #3	Radiated
	BH9000HPBG	WLAN - 5GHz #4	Radiated
Hardware Version	A		
Software Version	0.198		

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	Multi-Slot Class: ☐ Class 8 - 1 Up, 4 Down ☐ Class 10 - 2 Up, 4 Down ☐ Class 12 - 4 Up, 4 Down ☒ Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? ☒ Yes ☐ No			
W-CDMA (UMTS)	Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) HSPA+ (Rel. 9)		100%
LTE	FDD Band 4 FDD Band 5 FDD Band 7 FDD Band 12 FDD Band 13 FDD Band 17 TDD Band 41	QPSK 16QAM 64QAM Does not support Carrier Aggregation (CA)		100% (FDD) 63.3% (TDD) ² Refer to §6.4.
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		99.28% ^(802.11b) ¹ 98.16% ^(802.11g) ¹ 97.70% ^(802.11n) ¹
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		98.3% ^(802.11a) ¹ 98.0% ^(802.11n HT20) ¹ 94.2% ^(802.11n HT40) ¹ 88.6% ^(802.11ac VHT80) ¹
	Does this device support bands 5.60 ~ 5.65 GHz? ☒ Yes ☐ No			
	Does this device support Band gap channel(s)? ☒ Yes ☐ No			
Bluetooth	2.4 GHz	Version 5.0 LE		76.94%(DH5)

Notes:

1. Duty cycle for Wi-Fi is referenced from the DTS and UNII report.
2. This device supports uplink-downlink configuration 0-6. The configuration with the highest duty cycle was used (Subframe Number 0 at 63.3%).

6.3. General LTE SAR Test and Reporting Considerations

Item	Description					
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 4	Frequency range: 1710 - 1755 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5
						19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5
						20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5
						20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5
						20643/ 848.3
	Band 7	Frequency range: 2500 - 2570 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low	20850 2510	20825 2507.5	20800 2505	20775 2502.5	
	Mid	21100 2535	21100 2535	21100 2535	21100 2535	
	High	21350 2560	21375 2562.5	21400 2565	21425 2567.5	
	Band 12	Frequency range: 699 – 716 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5
						23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5
						23173/ 715.3
	Band 13	Frequency range: 777 - 787 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low				23205/ 779.5	
	Mid			23230/ 782	23230/ 782	
	High				23255/ 784.5	
	Band 17	Frequency range: 704 - 716 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low			23780/ 709	23755/ 706.5	
	Mid			23790/ 710	23790/ 710	
	High			23800/ 711	23825/ 713.5	
	Band 41	Frequency range: 2496 - 2690 MHz				
		Channel Bandwidth				
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz
	Low	39750 / 2506.0				
	Low-Mid	40185 / 2549.5				
	Mid	40620 / 2593.0				
	Mid-High	41055 / 2636.5				
	High	41490 / 2680.0				

General LTE SAR Test and Reporting Considerations (Continued)

LTE transmitter and antenna implementation	Refer to Appendix A.																																																														
Maximum power reduction (MPR)	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3 <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table> MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
Power reduction	No																																																														
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														

Notes:

- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

6.4. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \#$ of S + $\#$ of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle and Special Subframe 7.

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required
WWAN (Main Ant 1 & 2)	Head	0 mm	Left Touch	N/A	Yes
			Left Tilt (15°)	N/A	Yes
			Right Touch	N/A	Yes
			Right Tilt (15°)	N/A	Yes
	Body	15 mm	Rear	N/A	Yes
			Front	N/A	Yes
	Hotspot	10 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	> 25 mm	No
			Edge 2 (Right)	< 25 mm	Yes
			Edge 3 (Bottom)	< 25 mm	Yes
			Edge 4 (Left)	< 25 mm	Yes
WLAN/BT (Chain 0)	Head	0 mm	Left Touch	N/A	Yes
			Left Tilt (15°)	N/A	Yes
			Right Touch	N/A	Yes
			Right Tilt (15°)	N/A	Yes
	Body	15 mm	Rear	N/A	Yes
			Front	N/A	Yes
	Hotspot / Wi-Fi Direct (2.4 GHz only)	10 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	< 25 mm	Yes
			Edge 2 (Right)	> 25 mm	No
			Edge 3 (Bottom)	> 25 mm	No
			Edge 4 (Left)	< 25 mm	Yes
WLAN (Chain 1)	Head	0 mm	Left Touch	N/A	Yes
			Left Tilt (15°)	N/A	Yes
			Right Touch	N/A	Yes
			Right Tilt (15°)	N/A	Yes
	Body	15 mm	Rear	N/A	Yes
			Front	N/A	Yes
	Hotspot / Wi-Fi Direct (2.4 GHz only)	10 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	> 25 mm	No
			Edge 2 (Right)	< 25 mm	Yes
			Edge 3 (Bottom)	> 25 mm	No
			Edge 4 (Left)	> 25 mm	No

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- When Hotspot Mode is not supported, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
- When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
- The WWAN Sub Antenna does not support FCC bands.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies $\leq 3\text{ GHz}$.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
A	2/19/2018	900	Head	900	40.90	41.50	-1.45	1.00	0.97	3.51
				805	42.14	41.68	1.10	0.92	0.90	2.48
				915	40.73	41.50	-1.86	1.02	0.98	4.18
A	2/19/2018	835	Body	835	52.86	55.20	-4.24	0.98	0.97	0.90
				805	53.34	55.33	-3.60	0.95	0.97	-1.44
				905	52.32	55.00	-4.87	1.05	1.05	0.14
B	2/13/2018	1900	Head	1900	37.48	40.00	-6.30	1.44	1.40	2.50
				1850	37.66	40.00	-5.85	1.40	1.40	-0.14
				1980	37.17	40.00	-7.07	1.51	1.40	7.64
B	2/14/2018	1900	Head	1900	36.43	40.00	-8.93	1.45	1.40	3.64
				1850	36.57	40.00	-8.58	1.41	1.40	0.57
				1980	36.09	40.00	-9.77	1.53	1.40	9.21
B	2/16/2018	1900	Head	1900	38.89	40.00	-2.78	1.48	1.40	5.93
				1850	39.12	40.00	-2.20	1.44	1.40	2.86
				1920	38.80	40.00	-3.00	1.50	1.40	7.14
B	2/15/2018	1900	Body	1900	51.07	53.30	-4.18	1.63	1.52	7.50
				1850	51.28	53.30	-3.79	1.60	1.52	4.93
				1920	51.05	53.30	-4.22	1.65	1.52	8.68
B	2/16/2018	1900	Body	1900	52.81	53.30	-0.92	1.65	1.52	8.22
				1850	53.01	53.30	-0.54	1.60	1.52	5.00
				1920	52.74	53.30	-1.05	1.65	1.52	8.62
B	2/21/2018	1750	Head	1750	40.05	40.08	-0.09	1.33	1.37	-2.63
				1710	40.23	40.15	0.21	1.30	1.35	-3.82
				1800	39.89	40.00	-0.27	1.38	1.40	-1.29
B	2/22/2018	1750	Body	1750	51.37	53.44	-3.88	1.49	1.49	0.39
				1710	51.49	53.54	-3.84	1.45	1.46	-0.58
				1755	51.43	53.43	-3.74	1.50	1.49	0.66
D	2/21/2018	750	Body	750	53.61	55.55	-3.49	0.98	0.96	1.37
				695	54.15	55.76	-2.88	0.93	0.96	-3.10
				790	53.14	55.39	-4.07	1.01	0.97	4.95
D	2/22/2018	750	Head	750	40.33	41.96	-3.89	0.90	0.89	1.07
				695	41.18	42.24	-2.52	0.85	0.89	-4.56
				790	39.74	41.76	-4.83	0.93	0.90	4.21
E	2/22/2018	2600	Head	2600	37.47	39.01	-3.95	2.00	1.96	1.78
				2495	37.93	39.14	-3.10	1.88	1.85	1.80
				2690	37.18	38.90	-4.41	2.08	2.06	1.05
E	2/26/2018	2600	Body	2600	51.01	52.51	-2.86	2.09	2.16	-3.18
				2495	51.33	52.64	-2.49	1.98	2.01	-1.65
				2690	50.76	52.40	-3.12	2.19	2.29	-4.34

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
F	2/19/2018	2450	Head	2450	39.04	39.20	-0.41	1.80	1.80	-0.06
				2400	39.23	39.30	-0.17	1.75	1.75	-0.27
				2480	38.93	39.16	-0.59	1.84	1.83	0.14
F	2/21/2018	2450	Body	2450	50.64	52.70	-3.91	1.98	1.95	1.44
				2400	50.81	52.77	-3.72	1.91	1.90	0.63
				2480	50.54	52.66	-4.03	2.02	1.99	1.20
F	2/26/2018	2450	Head	2450	39.80	39.20	1.53	1.87	1.80	3.83
				2400	39.98	39.30	1.74	1.79	1.75	1.90
				2480	39.71	39.16	1.40	1.90	1.83	3.41
F	2/27/2018	2450	Body	2450	52.12	52.70	-1.10	1.90	1.95	-2.82
				2400	52.33	52.77	-0.84	1.84	1.90	-2.90
				2480	51.99	52.66	-1.28	1.95	1.99	-2.17
G	2/20/2018	5200	Body	5200	48.06	49.02	-1.96	5.17	5.29	-2.28
				5150	48.20	49.09	-1.81	5.13	5.24	-2.11
				5350	47.98	48.82	-1.71	5.37	5.47	-1.77
G	2/20/2018	5600	Body	5600	47.48	48.48	-2.06	5.67	5.76	-1.58
				5500	47.74	48.61	-1.80	5.53	5.64	-2.12
				5725	47.23	48.31	-2.23	5.82	5.91	-1.55
G	2/24/2018	5600	Body	5600	48.96	48.48	0.99	5.89	5.76	2.24
				5500	49.20	48.61	1.21	5.72	5.64	1.36
				5725	48.84	48.31	1.10	6.03	5.91	2.15
G	2/24/2018	5800	Body	5800	48.73	48.20	1.10	6.14	6.00	2.33
				5700	48.86	48.34	1.07	5.99	5.88	1.88
				5850	48.63	48.20	0.89	6.21	6.00	3.50
G	3/6/2018	5200	Body	5200	49.63	49.02	1.25	5.34	5.29	0.76
				5150	49.61	49.09	1.06	5.27	5.24	0.66
				5350	49.24	48.82	0.87	5.51	5.47	0.67
G	3/6/2018	5600	Body	5600	48.96	48.48	0.99	5.85	5.76	1.46
				5500	49.07	48.61	0.94	5.72	5.64	1.36
				5725	48.87	48.31	1.16	6.04	5.91	2.17

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
H	2/19/2018	5600	Head	5600	35.36	35.53	-0.49	5.04	5.06	-0.40
				5500	35.59	35.65	-0.16	4.96	4.96	0.04
				5725	35.32	35.39	-0.20	5.19	5.19	0.04
H	2/22/2018	5200	Head	5200	35.11	35.99	-2.45	4.59	4.65	-1.23
				5150	35.23	36.05	-2.27	4.54	4.60	-1.39
				5350	34.86	35.82	-2.68	4.78	4.80	-0.61
H	2/22/2018	5800	Head	5800	34.03	35.30	-3.60	5.26	5.27	-0.19
				5700	34.28	35.42	-3.22	5.14	5.16	-0.51
				5850	34.07	35.30	-3.48	5.30	5.27	0.57
H	2/26/2018	5200	Head	5200	37.60	35.99	4.47	4.72	4.65	1.48
				5150	37.65	36.05	4.45	4.67	4.60	1.53
				5350	37.47	35.82	4.61	4.89	4.80	1.78
H	2/26/2018	5600	Head	5600	37.06	35.53	4.29	5.14	5.06	1.58
				5500	37.19	35.65	4.33	5.02	4.96	1.17
				5725	36.91	35.39	4.29	5.30	5.19	2.14
H	2/26/2018	5800	Head	5800	36.72	35.30	4.02	5.36	5.27	1.63
				5700	36.84	35.42	4.01	5.24	5.16	1.56
				5850	36.67	35.30	3.88	5.43	5.27	2.98
H	3/6/2018	5200	Head	5200	35.46	35.99	-1.47	4.59	4.65	-1.38
				5150	35.48	36.05	-1.57	4.53	4.60	-1.56
				5350	35.24	35.82	-1.62	4.71	4.80	-2.01
H	3/6/2018	5600	Head	5600	34.87	35.53	-1.87	4.97	5.06	-1.86
				5500	35.03	35.65	-1.73	4.88	4.96	-1.53
				5725	34.77	35.39	-1.76	5.10	5.19	-1.66

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab	Date	Tissue Type	Dipole Type Serial #	Dipole Cal. Due Date	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
A	2/19/2018	Head	D900V2 SN:1d143	10/5/2018	1.090	10.90	10.27	6.13	0.708	7.08	6.60	7.27	1,2
A	2/19/2018	Body	D835V2 SN:4d117	5/22/2018	0.985	9.85	10.39	-5.20	0.650	6.50	6.76	-3.85	3,4
B	2/13/2018	Head	D1900V2 SN:5d140	4/19/2018	4.090	40.90	40.80	0.25	2.090	20.90	21.16	-1.23	5,6
B	2/15/2018	Body	D1900V2 SN:5d043	11/22/2018	4.380	43.80	41.00	6.83	2.250	22.50	20.90	7.66	7,8
B	2/21/2018	Head	D1750V2 SN:1050	4/18/2018	3.620	36.20	36.76	-1.52	1.910	19.10	19.60	-2.55	
B	2/22/2018	Body	D1750V2 SN:1050	4/18/2018	3.670	36.70	37.68	-2.60	1.940	19.40	19.92	-2.61	9,10
D	2/21/2018	Body	D750V3 SN:1019	3/13/2018	0.909	9.09	8.76	3.77	0.609	6.09	5.80	5.00	11,12
D	2/22/2018	Head	D750V3 SN:1019	3/13/2018	0.809	8.09	8.22	-1.58	0.532	5.32	5.39	-1.30	
E	2/22/2018	Head	D2600V2 SN:1036	3/10/2018	5.730	57.30	57.50	-0.35	2.510	25.10	25.60	-1.95	13,14
E	2/26/2018	Body	D2600V2 SN:1006	10/5/2018	5.390	53.90	56.13	-3.97	2.330	23.30	25.00	-6.80	15,16
F	2/19/2018	Head	D2450V2 SN:899	3/10/2018	5.180	51.80	52.60	-1.52	2.320	23.20	24.60	-5.69	
F	2/21/2018	Body	D2450V2 SN:899	3/10/2018	5.410	54.10	50.30	7.55	2.460	24.60	23.70	3.80	17,18
F	2/26/2018	Head	D2450V2 SN:748	2/14/2019	5.480	54.80	52.94	3.51	2.450	24.50	24.60	-0.41	19,20
F	2/27/2018	Body	D2450V2 SN:748	2/14/2019	4.950	49.50	50.95	-2.85	2.250	22.50	23.80	-5.46	
G	2/20/2018	Body	D5GHZV2 SN:1168 (5.2 GHz)	11/23/2018	6.770	67.70	70.70	-4.24	1.910	19.10	19.70	-3.05	
G	2/20/2018	Body	D5GHZV2 SN:1168 (5.6 GHz)	11/23/2018	7.960	79.60	75.60	5.29	2.200	22.00	20.80	5.77	21,22
G	2/24/2018	Body	D5GHZV2 SN:1168 (5.6 GHz)	11/23/2018	7.880	78.80	75.60	4.23	2.170	21.70	20.80	4.33	
G	2/24/2018	Body	D5GHZV2 SN:1168 (5.8 GHz)	11/23/2018	6.210	62.10	65.30	-4.90	1.720	17.20	18.20	-5.49	
G	3/6/2018	Body	D5GHZV2 SN:1138 (5.2 GHz)	10/26/2018	7.080	70.80	73.40	-3.54	2.000	20.00	20.60	-2.91	23,24
G	3/6/2018	Body	D5GHZV2 SN:1138 (5.6 GHz)	10/26/2018	7.750	77.50	79.50	-2.52	2.130	21.30	22.30	-4.48	
H	2/19/2018	Head	D5GHZV2 SN:1168 (5.6 GHz)	11/23/2018	8.480	84.80	87.20	-2.75	2.390	23.90	24.40	-2.05	
H	2/22/2018	Head	D5GHZV2 SN:1168 (5.2 GHz)	11/23/2018	7.630	76.30	80.90	-5.69	2.200	22.00	22.80	-3.51	
H	2/22/2018	Head	D5GHZV2 SN:1168 (5.8 GHz)	11/23/2018	8.070	80.70	79.10	2.02	2.280	22.80	22.10	3.17	
H	2/26/2018	Head	D5GHZV2 SN:1168 (5.2 GHz)	11/23/2018	7.460	74.60	80.90	-7.79	2.140	21.40	22.80	-6.14	25,26
H	2/26/2018	Head	D5GHZV2 SN:1168 (5.6 GHz)	11/23/2018	8.060	80.60	87.20	-7.57	2.260	22.60	24.40	-7.38	
H	2/26/2018	Head	D5GHZV2 SN:1168 (5.8 GHz)	11/23/2018	7.720	77.20	79.10	-2.40	2.190	21.90	22.10	-0.90	
H	3/6/2018	Head	D5GHZV2 SN:1168 (5.2 GHz)	11/23/2018	7.690	76.90	80.90	-4.94	2.200	22.00	22.80	-3.51	
H	3/6/2018	Head	D5GHZV2 SN:1168 (5.6 GHz)	11/23/2018	9.210	92.10	87.20	5.62	2.600	26.00	24.40	6.56	

9. Conducted Output Power Measurements

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When different maximum output power applies to GSM voice or GPRS/EDGE time slots, GSM voice and GPRS/EDGE time slots should be tested separately to determine compliance by summing the corresponding reported SAR.

The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance

Per October 2013 TCB Workshop:

When the maximum frame-averaged powers levels are within 0.25 dB of each other, test the configuration with the most number of time slots.

GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Output Pwr (dBm)	Max. Frame Pwr (dBm)
GSM/ GPRS	CS1	1	128	824.4	31.70	22.67	32.20	23.17
			190	836.6	31.80	22.77		
			251	848.8	32.00	22.97		
GPRS/EDGE (GMSK)		2	128	824.4	29.90	23.88	30.20	24.18
			190	836.6	29.90	23.88		
			251	848.8	29.80	23.78		
		3	128	824.4	27.80	23.54	28.20	23.94
			190	836.6	27.80	23.54		
			251	848.8	28.00	23.74		
		4	128	824.4	26.70	23.69	27.20	24.19
			190	836.6	26.80	23.79		
			251	848.8	27.00	23.99		
EDGE (8PSK)	MCS5	1	128	824.4	27.00	17.97	28.00	18.97
			190	836.6	27.10	18.07		
			251	848.8	27.20	18.17		
		2	128	824.4	25.60	19.58	26.50	20.48
			190	836.6	25.60	19.58		
			251	848.8	25.70	19.68		
		3	128	824.4	23.50	19.24	24.50	20.24
			190	836.6	23.50	19.24		
			251	848.8	23.60	19.34		
		4	128	824.4	22.60	19.59	23.50	20.49
			190	836.6	22.70	19.69		
			251	848.8	22.80	19.79		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GPRS/EDGE (GMSK) mode with 4 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

GSM1900 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Output Pwr (dBm)	Max. Frame Pwr (dBm)
GSM/ GPRS	CS1	1	512	1850.2	29.20	20.17	29.70	20.67
			661	1880.0	29.30	20.27		
			810	1909.8	29.10	20.07		
GPRS/EDGE (GMSK)		2	512	1850.2	27.20	21.18	27.70	21.68
			661	1880.0	27.30	21.28		
			810	1909.8	27.10	21.08		
		3	512	1850.2	24.70	20.44	25.20	20.94
			661	1880.0	24.70	20.44		
			810	1909.8	24.50	20.24		
		4	512	1850.2	23.60	20.59	24.20	21.19
			661	1880.0	23.70	20.69		
			810	1909.8	23.50	20.49		
EDGE (8PSK)	MCS5	1	512	1850.2	25.60	16.57	27.00	17.97
			661	1880.0	25.60	16.57		
			810	1909.8	25.50	16.47		
		2	512	1850.2	24.30	18.28	25.50	19.48
			661	1880.0	24.30	18.28		
			810	1909.8	24.20	18.18		
		3	512	1850.2	22.40	18.14	23.50	19.24
			661	1880.0	22.50	18.24		
			810	1909.8	22.40	18.14		
		4	512	1850.2	21.40	18.39	22.50	19.49
			661	1880.0	21.40	18.39		
			810	1909.8	21.20	18.19		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GPRS/EDGE (GMSK) mode with 2 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

GSM850 DTM Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max Meas. Avg Pwr				Max. Output Pwr (dBm)	
					CS		PS		CS	PS
					Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)		
GSM(Voice) + GPRS/EDGE (GMSK)	CS1	1	128	824.2	31.70	22.67			32.20	
			190	836.6	31.80	22.77				
			251	848.8	32.00	22.97				
		2	128	824.2	29.57	23.55	29.77	23.75	30.20	30.20
			190	836.6	29.70	23.68	30.00	23.98		
			251	848.8	29.70	23.68	29.90	23.88		
		3	128	824.2	27.40	23.14	27.60	23.34	28.20	28.20
			190	836.6	27.68	23.42	27.85	23.59		
			251	848.8	27.64	23.38	27.83	23.57		
GSM(Voice) + EDGE(8PSK)	MCS5	1	128	824.2	31.70	22.67			32.20	
			190	836.6	31.80	22.77				
			251	848.8	32.00	22.97				
		2	128	824.2	29.60	23.58	25.50	19.48	30.20	26.50
			190	836.6	29.80	23.78	25.50	19.48		
			251	848.8	29.80	23.78	25.60	19.58		
		3	128	824.2	27.50	23.24	23.30	19.04	28.20	24.50
			190	836.6	27.60	23.34	23.40	19.14		
			251	848.8	27.80	23.54	23.54	19.28		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) + GPRS/EDGE (GMSK) with 2 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for GSM(Voice) + EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than that of GSM(Voice) + GPRS/EDGE (GMSK) mode or the adjusted SAR of the highest reported SAR of GSM(Voice) + GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

GSM1900 DTM Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max Meas. Avg Pwr				Max. Output Pwr (dBm)	
					CS		PS		CS	PS
					Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)		
GSM(Voice) + GPRS/EDGE (GMSK)	CS1	1	512	1850.2	29.20	20.17			29.70	
			661	1880.0	29.30	20.27				
			810	1909.8	29.10	20.07				
		2	512	1850.2	27.05	21.03	27.23	21.21	27.70	27.70
			661	1880.0	27.20	21.18	27.38	21.36		
			810	1909.8	26.96	20.94	27.14	21.12		
		3	512	1850.2	24.40	20.14	24.54	20.28	25.20	25.20
			661	1880.0	24.55	20.29	24.68	20.42		
			810	1909.8	24.50	20.24	24.63	20.37		
GSM(Voice) + EDGE(8PSK)	MCS5	1	512	1850.2	29.20	20.17			29.70	
			661	1880.0	29.30	20.27				
			810	1909.8	29.10	20.07				
		2	512	1850.2	26.90	20.88	24.25	18.23	27.70	25.50
			661	1880.0	27.00	20.98	24.26	18.24		
			810	1909.8	26.96	20.94	24.10	18.08		
		3	512	1850.2	24.30	20.04	22.40	18.14	25.20	23.50
			661	1880.0	24.50	20.24	22.40	18.14		
			810	1909.8	24.30	20.04	22.30	18.04		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) + GPRS/EDGE (GMSK) with 2 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for GSM(Voice) + EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than that of GSM(Voice) + GPRS/EDGE (GMSK) mode or the adjusted SAR of the highest reported SAR of GSM(Voice) + GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in table C,11.1.3 of 3GPP TS 34.121-1 v13. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., Rel. 7 Therefore, the RF conducted power is not measured.

W-CDMA Band V Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Meas. Avg Pwr (dBm)	Max. Output Pwr (dBm)
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	24.30	24.90
			4183	836.6	N/A	24.30	
			4233	846.6	N/A	24.40	
	HSDPA	Subtest 1	4132	826.4	0	23.30	24.20
			4183	836.6	0	23.30	
			4233	846.6	0	23.40	
		Subtest 2	4132	826.4	0	23.30	24.20
			4183	836.6	0	23.30	
			4233	846.6	0	23.40	
		Subtest 3	4132	826.4	0.5	22.80	23.70
			4183	836.6	0.5	22.80	
			4233	846.6	0.5	22.90	
		Subtest 4	4132	826.4	0.5	22.80	23.70
			4183	836.6	0.5	22.80	
			4233	846.6	0.5	22.90	
	HSUPA	Subtest 1	4132	826.4	0	23.30	24.20
			4183	836.6	0	23.30	
			4233	846.6	0	23.40	
		Subtest 2	4132	826.4	2	21.30	22.20
			4183	836.6	2	21.30	
			4233	846.6	2	21.40	
		Subtest 3	4132	826.4	1	22.30	23.20
			4183	836.6	1	22.30	
			4233	846.6	1	22.40	
		Subtest 4	4132	826.4	2	21.30	22.20
			4183	836.6	2	21.30	
			4233	846.6	2	21.40	
		Subtest 5	4132	826.4	0	23.30	24.20
			4183	836.6	0	23.30	
			4233	846.6	0	23.40	

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4.4, Table 6.2.4-4a	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50 (NOTE1)	≤ 1 (NOTE1)
			15, 20	Table 6.2.4-18 (NOTE2)	
		65 (NOTE 3)	10, 15, 20	≥ 50	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1 6.6.3.3.13	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5, 10, 15	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2 6.6.2.2.1 6.6.3.3.14	23	5, 10, 15, 20	Table 6.2.4-15	
NS_21	6.6.2.2.1 6.6.3.3.15	30	5, 10	Table 6.2.4-16	
NS_22	6.6.3.3.16	42, 43	5, 10, 15, 20	Table 6.2.4-17	
NS_23	6.6.3.3.17	42, 43	5, 10, 15, 20	N/A	
NS_24	6.6.3.3.20	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-19	
NS_25	6.6.3.3.21	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-20	
NS_26	6.6.3.3.22	68	10, 15	Table 6.2.4-21	
NS_27	6.6.2.2.5, 6.6.3.3.23	48	5, 10, 15, 20	Table 6.2.4-22	
NS_28	6.2.2A, 6.6.3.3.24	46 (NOTE 5)	20	Table 6.2.4-23	
NS_29	6.2.2A, 6.6.2.3.1a, 6.6.3.3.25	46 (NOTE 5)	20	Table 6.2.4-24	
NS_30	6.2.2A, 6.6.3.3.26	46 (NOTE 5)	20	Table 6.2.4-25	
NS_31	6.2.2A, 6.6.3.3.27	46 (NOTE 5)	20	Table 6.2.4-26	
NS_32	-	-	-	-	-

NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for

LTE Band 4 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
					20175			
20 MHz	QPSK	1	0		1732.5 MHz			
		1	0		23.14		0.0	23.5
		1	49		22.90		0.0	23.5
		1	99		22.94		0.0	23.5
		50	0		23.12		0.0	23.5
		50	24		23.00		0.0	23.5
	16QAM	50	50		22.99		0.0	23.5
		100	0		23.04		0.0	23.5
		1	0		23.21		0.0	23.5
		1	49		22.93		0.0	23.5
		1	99		22.95		0.0	23.5
		50	0		22.23		0.5	23
		50	24		22.14		0.5	23
	64QAM	50	50		22.06		0.5	23
		100	0		22.13		0.5	23
		1	0		22.94		0.5	23
		1	49		22.72		0.5	23
		1	99		22.85		0.5	23
		50	0		21.30		1.5	22
		50	24		21.25		1.5	22
		50	50		21.20		1.5	22
		100	0		21.20		1.5	22
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20025	20175	20325		
				1717.5 MHz	1732.5 MHz	1747.5 MHz		
15 MHz	QPSK	1	0	23.15	23.15	23.08	0.0	23.5
		1	37	23.07	22.98	22.87	0.0	23.5
		1	74	23.01	22.99	22.82	0.0	23.5
		36	0	23.03	23.08	22.90	0.0	23.5
		36	20	23.07	23.03	22.91	0.0	23.5
		36	39	22.99	22.97	22.75	0.0	23.5
		75	0	23.05	22.99	22.85	0.0	23.5
	16QAM	1	0	23.14	23.13	22.62	0.0	23.5
		1	37	23.00	22.91	22.38	0.0	23.5
		1	74	22.97	22.95	22.34	0.0	23.5
		36	0	22.12	22.24	22.01	0.5	23
		36	20	22.15	22.14	22.05	0.5	23
		36	39	22.10	22.10	21.91	0.5	23
		75	0	22.17	22.12	21.97	0.5	23
	64QAM	1	0	22.82	22.43	22.53	0.5	23
		1	37	22.78	22.24	22.38	0.5	23
		1	74	22.80	22.32	22.36	0.5	23
		36	0	21.20	21.31	21.11	1.5	22
		36	20	21.27	21.26	21.16	1.5	22
		36	39	21.23	21.22	21.02	1.5	22
		75	0	21.31	21.21	21.04	1.5	22

LTE Band 4 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pw r (dBm)			MPR	Tune-up Limit		
				20000	20175	20350				
				1715 MHz	1732.5 MHz	1750 MHz				
10 MHz	QPSK	1	0	22.91	23.09	22.95	0.0	23.5		
		1	25	22.79	22.94	22.80	0.0	23.5		
		1	49	22.84	23.01	22.80	0.0	23.5		
		25	0	22.91	23.07	22.95	0.0	23.5		
		25	12	22.89	23.02	22.85	0.0	23.5		
		25	25	22.95	22.95	22.78	0.0	23.5		
		50	0	22.96	23.04	22.78	0.0	23.5		
	16QAM	1	0	22.62	23.01	22.49	0.0	23.5		
		1	25	22.46	22.88	22.36	0.0	23.5		
		1	49	22.49	22.98	22.29	0.0	23.5		
		25	0	22.12	22.17	22.06	0.5	23		
		25	12	22.08	22.13	21.92	0.5	23		
		25	25	22.14	22.09	21.85	0.5	23		
		50	0	22.11	22.13	21.89	0.5	23		
	64QAM	1	0	22.28	22.33	22.42	0.5	23		
		1	25	22.19	22.23	22.33	0.5	23		
		1	49	22.27	22.38	22.32	0.5	23		
		25	0	21.16	21.28	21.17	1.5	22		
		25	12	21.16	21.27	21.05	1.5	22		
		25	25	21.22	21.24	21.02	1.5	22		
		50	0	21.17	21.23	20.99	1.5	22		
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					MPR	Tune-up Limit
				Measured Pw r (dBm)						
				19975	20175	20375				
				1712.5 MHz	1732.5 MHz	1752.5 MHz				
5 MHz	QPSK	1	0	23.25	22.97	22.83	0.0	23.5		
		1	12	23.19	22.91	22.62	0.0	23.5		
		1	24	23.17	22.93	22.70	0.0	23.5		
		12	0	23.21	23.01	22.57	0.0	23.5		
		12	7	23.19	22.99	22.56	0.0	23.5		
		12	13	23.19	22.96	22.55	0.0	23.5		
		25	0	23.21	23.00	22.61	0.0	23.5		
	16QAM	1	0	22.92	23.12	22.51	0.0	23.5		
		1	12	22.83	23.03	22.31	0.0	23.5		
		1	24	22.85	23.01	22.42	0.0	23.5		
		12	0	22.33	22.22	21.75	0.5	23		
		12	7	22.31	22.20	21.75	0.5	23		
		12	13	22.33	22.17	21.71	0.5	23		
		25	0	22.24	22.14	21.69	0.5	23		
	64QAM	1	0	22.63	22.47	21.84	0.5	23		
		1	12	22.56	22.43	21.66	0.5	23		
		1	24	22.59	22.42	21.79	0.5	23		
		12	0	21.42	21.12	20.82	1.5	22		
		12	7	21.44	21.13	20.83	1.5	22		
		12	13	21.43	21.08	20.81	1.5	22		
		25	0	21.39	21.14	20.75	1.5	22		

LTE Band 4 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				19965	20175	20385		
				1711.5 MHz	1732.5 MHz	1753.5 MHz		
3 MHz	QPSK	1	0	23.13	22.97	22.52	0.0	23.5
		1	8	23.19	23.02	22.69	0.0	23.5
		1	14	23.05	22.88	22.57	0.0	23.5
		8	0	23.16	22.91	22.55	0.0	23.5
		8	4	23.17	22.97	22.56	0.0	23.5
		8	7	23.17	22.95	22.57	0.0	23.5
		15	0	23.17	22.93	22.53	0.0	23.5
	16QAM	1	0	22.82	22.93	22.08	0.0	23.5
		1	8	22.84	22.98	22.23	0.0	23.5
		1	14	22.76	22.86	22.12	0.0	23.5
		8	0	22.28	22.09	21.73	0.5	23
		8	4	22.30	22.12	21.73	0.5	23
		8	7	22.29	22.12	21.72	0.5	23
		15	0	22.20	22.07	21.67	0.5	23
	64QAM	1	0	22.53	22.21	21.98	0.5	23
		1	8	22.57	22.30	22.20	0.5	23
		1	14	22.47	22.18	22.06	0.5	23
		8	0	21.26	21.13	20.76	1.5	22
		8	4	21.32	21.17	20.82	1.5	22
		8	7	21.31	21.17	20.82	1.5	22
		15	0	21.36	21.16	20.74	1.5	22
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				19957	20175	20393		
				1710.7 MHz	1732.5 MHz	1754.3 MHz		
1.4 MHz	QPSK	1	0	23.01	22.84	22.58	0.0	23.5
		1	3	23.09	22.92	22.64	0.0	23.5
		1	5	23.02	22.85	22.58	0.0	23.5
		3	0	23.04	22.90	22.54	0.0	23.5
		3	1	23.11	22.94	22.60	0.0	23.5
		3	3	23.12	22.96	22.61	0.0	23.5
		6	0	23.06	22.83	22.57	0.0	23.5
	16QAM	1	0	22.70	22.83	22.29	0.0	23.5
		1	3	22.72	22.87	22.34	0.0	23.5
		1	5	22.69	22.79	22.27	0.0	23.5
		3	0	22.86	22.71	22.25	0.0	23.5
		3	1	22.92	22.74	22.29	0.0	23.5
		3	3	22.91	22.74	22.30	0.0	23.5
		6	0	22.32	21.86	21.77	0.5	23
	64QAM	1	0	22.40	22.02	22.08	0.5	23
		1	3	22.44	22.10	22.21	0.5	23
		1	5	22.41	22.00	22.10	0.5	23
		3	0	22.21	22.05	22.07	0.5	23
		3	1	22.30	22.15	22.14	0.5	23
		3	3	22.31	22.15	22.14	0.5	23
		6	0	21.29	21.21	20.70	1.5	22

LTE Band 5 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
					20525			
					836.5 MHz			
10 MHz	QPSK	1	0		24.59		0.0	25
		1	25		24.64		0.0	25
		1	49		24.61		0.0	25
		25	0		23.67		1.0	24
		25	12		23.68		1.0	24
		25	25		23.57		1.0	24
		50	0		23.64		1.0	24
	16QAM	1	0		24.00		1.0	24
		1	25		24.00		1.0	24
		1	49		23.99		1.0	24
		25	0		22.81		2.0	23
		25	12		22.77		2.0	23
		25	25		22.70		2.0	23
		50	0		22.73		2.0	23
	64QAM	1	0		22.44		2.0	23
		1	25		22.42		2.0	23
		1	49		22.46		2.0	23
		25	0		22.00		3.0	22
		25	12		21.97		3.0	22
		25	25		21.92		3.0	22
		50	0		21.91		3.0	22
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20425	20525	20625		
				826.5 MHz	836.5 MHz	846.5 MHz		
5 MHz	QPSK	1	0	24.26	24.71	24.48	0.0	25
		1	12	24.17	24.60	24.42	0.0	25
		1	24	24.16	24.70	24.40	0.0	25
		12	0	23.24	23.66	23.41	1.0	24
		12	7	23.23	23.68	23.42	1.0	24
		12	13	23.23	23.65	23.40	1.0	24
		25	0	23.23	23.66	23.43	1.0	24
	16QAM	1	0	23.42	24.00	23.67	1.0	24
		1	12	23.34	24.00	23.56	1.0	24
		1	24	23.33	24.00	23.48	1.0	24
		12	0	22.40	22.87	22.58	2.0	23
		12	7	22.38	22.87	22.57	2.0	23
		12	13	22.34	22.85	22.55	2.0	23
		25	0	22.26	22.79	22.52	2.0	23
	64QAM	1	0	22.17	22.65	22.08	2.0	23
		1	12	22.13	22.61	21.97	2.0	23
		1	24	22.14	22.67	21.94	2.0	23
		12	0	21.53	21.82	21.67	3.0	22
		12	7	21.52	21.84	21.65	3.0	22
		12	13	21.52	21.81	21.63	3.0	22
		25	0	21.47	21.83	21.58	3.0	22

Note(s):

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 5 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pw r (dBm)			MPR	Tune-up Limit
				20415	20525	20635		
				825.5 MHz	836.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	24.15	24.70	24.33	0.0	25
		1	8	24.20	24.71	24.37	0.0	25
		1	14	24.08	24.60	24.27	0.0	25
		8	0	23.19	23.62	23.32	1.0	24
		8	4	23.22	23.63	23.37	1.0	24
		8	7	23.18	23.62	23.36	1.0	24
		15	0	23.21	23.61	23.38	1.0	24
	16QAM	1	0	23.34	24.00	23.33	1.0	24
		1	8	23.34	24.00	23.36	1.0	24
		1	14	23.24	24.00	23.17	1.0	24
		8	0	22.34	22.75	22.55	2.0	23
		8	4	22.37	22.77	22.56	2.0	23
		8	7	22.35	22.77	22.55	2.0	23
		15	0	22.27	22.74	22.49	2.0	23
	64QAM	1	0	22.13	22.44	22.36	2.0	23
		1	8	22.14	22.49	22.39	2.0	23
		1	14	22.05	22.39	22.24	2.0	23
		8	0	21.37	21.85	21.61	3.0	22
		8	4	21.41	21.91	21.67	3.0	22
		8	7	21.41	21.89	21.64	3.0	22
		15	0	21.46	21.87	21.57	3.0	22
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			MPR	Tune-up Limit
				Measured Pw r (dBm)				
				20407	20525	20643		
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	24.15	24.56	24.41	0.0	25
		1	3	24.19	24.61	24.44	0.0	25
		1	5	24.14	24.49	24.38	0.0	25
		3	0	24.09	24.53	24.42	0.0	25
		3	1	24.16	24.60	24.45	0.0	25
		3	3	24.16	24.62	24.46	0.0	25
		6	0	23.12	23.54	23.36	1.0	24
	16QAM	1	0	23.31	23.68	23.79	1.0	24
		1	3	23.34	23.71	23.82	1.0	24
		1	5	23.28	23.65	23.72	1.0	24
		3	0	23.27	23.81	23.64	1.0	24
		3	1	23.32	23.89	23.70	1.0	24
		3	3	23.31	23.88	23.68	1.0	24
		6	0	22.36	22.80	22.37	2.0	23
	64QAM	1	0	22.03	22.35	22.32	2.0	23
		1	3	22.07	22.42	22.41	2.0	23
		1	5	22.04	22.27	22.27	2.0	23
		3	0	21.82	22.36	22.27	2.0	23
		3	1	21.90	22.44	22.34	2.0	23
		3	3	21.90	22.44	22.33	2.0	23
		6	0	21.47	22.00	21.52	3.0	22

LTE Band 7 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				20850	21100	21350		
				2510 MHz	2535 MHz	2560 MHz		
20 MHz	QPSK	1	0	20.39	20.50	20.59	0.0	21
		1	49	20.27	20.48	20.47	0.0	21
		1	99	20.08	20.43	20.35	0.0	21
		50	0	20.45	20.54	20.58	0.0	21
		50	24	20.35	20.58	20.55	0.0	21
		50	50	20.26	20.52	20.48	0.0	21
		100	0	20.32	20.56	20.45	0.0	21
	16QAM	1	0	20.36	20.50	20.70	0.0	21
		1	49	20.20	20.44	20.58	0.0	21
		1	99	19.95	20.44	20.45	0.0	21
		50	0	20.00	20.17	20.19	0.0	21
		50	24	19.89	20.16	20.17	0.0	21
		50	50	19.80	20.07	20.11	0.0	21
		100	0	19.88	20.14	20.08	0.0	21
	64QAM	1	0	20.18	20.64	20.48	0.0	21
		1	49	20.09	20.79	20.41	0.0	21
		1	99	19.91	20.85	20.40	0.0	21
		50	0	20.06	20.14	20.18	0.0	21
		50	24	19.97	20.25	20.24	0.0	21
		50	50	19.92	20.20	20.22	0.0	21
		100	0	19.95	20.15	20.11	0.0	21
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20825	21100	21375		
				2507.5 MHz	2535 MHz	2562.5 MHz		
15 MHz	QPSK	1	0	20.64	20.51	20.63	0.0	21
		1	37	20.54	20.51	20.48	0.0	21
		1	74	20.34	20.41	20.33	0.0	21
		36	0	20.61	20.59	20.58	0.0	21
		36	20	20.58	20.57	20.54	0.0	21
		36	39	20.51	20.48	20.47	0.0	21
		75	0	20.53	20.56	20.54	0.0	21
	16QAM	1	0	20.57	20.40	20.16	0.0	21
		1	37	20.38	20.39	19.99	0.0	21
		1	74	20.21	20.30	19.84	0.0	21
		36	0	20.16	20.24	20.21	0.0	21
		36	20	20.09	20.17	20.16	0.0	21
		36	39	20.02	20.10	20.09	0.0	21
		75	0	20.11	20.17	20.15	0.0	21
	64QAM	1	0	20.68	20.15	20.58	0.0	21
		1	37	20.73	20.26	20.39	0.0	21
		1	74	20.55	20.22	20.40	0.0	21
		36	0	20.25	20.30	20.27	0.0	21
		36	20	20.23	20.26	20.24	0.0	21
		36	39	20.13	20.22	20.22	0.0	21
		75	0	20.23	20.24	20.17	0.0	21

LTE Band 7 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pw r (dBm)			MPR	Tune-up Limit	
				20800	21100	21400			
				2505 MHz	2535 MHz	2565 MHz			
10 MHz	QPSK	1	0	20.54	20.49	20.47	0.0	21	
		1	25	20.44	20.48	20.47	0.0	21	
		1	49	20.48	20.44	20.45	0.0	21	
		25	0	20.50	20.56	20.56	0.0	21	
		25	12	20.58	20.59	20.56	0.0	21	
		25	25	20.49	20.48	20.49	0.0	21	
		50	0	20.54	20.52	20.54	0.0	21	
	16QAM	1	0	20.44	19.95	19.96	0.0	21	
		1	25	20.30	19.96	19.97	0.0	21	
		1	49	20.36	19.88	19.87	0.0	21	
		25	0	20.10	20.17	20.16	0.0	21	
		25	12	20.17	20.11	20.11	0.0	21	
		25	25	20.14	20.10	20.09	0.0	21	
		50	0	20.14	20.09	20.12	0.0	21	
	64QAM	1	0	20.26	20.18	20.44	0.0	21	
		1	25	20.24	20.26	20.40	0.0	21	
		1	49	20.29	20.26	20.38	0.0	21	
		25	0	20.20	20.30	20.25	0.0	21	
		25	12	20.30	20.27	20.25	0.0	21	
		25	25	20.22	20.21	20.18	0.0	21	
		50	0	20.21	20.23	20.21	0.0	21	
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				MPR	Tune-up Limit
				Measured Pw r (dBm)					
				20775	21100	21425			
				2502.5 MHz	2535 MHz	2567.5 MHz			
5 MHz	QPSK	1	0	20.52	20.43	20.64	0.0	21	
		1	12	20.46	20.48	20.56	0.0	21	
		1	24	20.39	20.45	20.47	0.0	21	
		12	0	20.46	20.51	20.53	0.0	21	
		12	7	20.47	20.55	20.50	0.0	21	
		12	13	20.44	20.49	20.49	0.0	21	
		25	0	20.43	20.50	20.50	0.0	21	
	16QAM	1	0	20.14	20.49	20.20	0.0	21	
		1	12	20.09	20.54	20.18	0.0	21	
		1	24	20.00	20.51	20.14	0.0	21	
		12	0	20.07	20.21	20.15	0.0	21	
		12	7	20.07	20.24	20.13	0.0	21	
		12	13	20.04	20.19	20.14	0.0	21	
		25	0	19.96	20.16	20.12	0.0	21	
	64QAM	1	0	20.31	20.36	20.03	0.0	21	
		1	12	20.30	20.45	20.03	0.0	21	
		1	24	20.30	20.42	20.03	0.0	21	
		12	0	20.16	20.11	20.17	0.0	21	
		12	7	20.20	20.16	20.22	0.0	21	
		12	13	20.15	20.13	20.16	0.0	21	
		25	0	20.13	20.15	20.12	0.0	21	

LTE Band 12 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
					23095			
					707.5 MHz			
10 MHz	QPSK	1	0		24.42		0.0	25
		1	25		24.40		0.0	25
		1	49		24.29		0.0	25
		25	0		23.45		1.0	24
		25	12		23.48		1.0	24
		25	25		23.40		1.0	24
		50	0		23.45		1.0	24
	16QAM	1	0		23.81		1.0	24
		1	25		23.76		1.0	24
		1	49		23.71		1.0	24
		25	0		22.58		2.0	23
		25	12		22.56		2.0	23
		25	25		22.50		2.0	23
		50	0		22.54		2.0	23
	64QAM	1	0		22.22		2.0	23
		1	25		22.17		2.0	23
		1	49		22.11		2.0	23
		25	0		21.74		3.0	22
		25	12		21.72		3.0	22
		25	25		21.65		3.0	22
		50	0		21.68		3.0	22
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				23035	23095	23155		
				701.5 MHz	707.5 MHz	713.5 MHz		
5 MHz	QPSK	1	0	24.11	24.25	24.48	0.0	25
		1	12	24.43	24.38	24.43	0.0	25
		1	24	24.47	24.46	24.39	0.0	25
		12	0	23.11	23.46	23.39	1.0	24
		12	7	23.37	23.49	23.40	1.0	24
		12	13	23.46	23.41	23.37	1.0	24
		25	0	23.28	23.46	23.39	1.0	24
	16QAM	1	0	23.19	23.75	23.59	1.0	24
		1	12	23.56	23.93	23.53	1.0	24
		1	24	23.59	23.98	23.48	1.0	24
		12	0	22.30	22.67	22.53	2.0	23
		12	7	22.49	22.66	22.55	2.0	23
		12	13	22.60	22.62	22.51	2.0	23
		25	0	22.36	22.56	22.49	2.0	23
	64QAM	1	0	22.47	22.05	21.96	2.0	23
		1	12	22.54	21.98	22.29	2.0	23
		1	24	22.54	22.09	22.09	2.0	23
		12	0	21.37	21.66	21.66	3.0	22
		12	7	21.63	21.69	21.69	3.0	22
		12	13	21.70	21.62	21.62	3.0	22
		25	0	21.57	21.60	21.59	3.0	22

Note(s):

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 12 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pw r (dBm)			MPR	Tune-up Limit
				23025	23095	23165		
				700.5 MHz	707.5 MHz	714.5 MHz		
3 MHz	QPSK	1	0	24.05	24.45	24.34	0.0	25
		1	8	24.22	24.50	24.38	0.0	25
		1	14	24.33	24.49	24.26	0.0	25
		8	0	23.11	23.43	23.35	1.0	24
		8	4	23.10	23.44	23.35	1.0	24
		8	7	23.15	23.42	23.34	1.0	24
		15	0	23.16	23.44	23.35	1.0	24
	16QAM	1	0	23.15	23.83	23.26	1.0	24
		1	8	23.39	23.86	23.32	1.0	24
		1	14	23.46	23.86	23.17	1.0	24
		8	0	22.26	22.56	22.51	2.0	23
		8	4	22.31	22.59	22.53	2.0	23
		8	7	22.37	22.58	22.53	2.0	23
		15	0	22.25	22.53	22.47	2.0	23
	64QAM	1	0	22.39	22.28	22.27	2.0	23
		1	8	22.48	22.33	22.34	2.0	23
		1	14	22.51	22.32	22.32	2.0	23
		8	0	21.47	21.55	21.55	3.0	22
		8	4	21.57	21.61	21.62	3.0	22
		8	7	21.57	21.59	21.58	3.0	22
		15	0	21.56	21.53	21.50	3.0	22
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			MPR	Tune-up Limit
				Measured Pw r (dBm)				
				23017	23095	23173		
				699.7 MHz	707.5 MHz	715.3 MHz		
1.4 MHz	QPSK	1	0	24.00	24.38	24.21	0.0	25
		1	3	23.95	24.41	24.25	0.0	25
		1	5	24.01	24.33	24.16	0.0	25
		3	0	23.93	24.29	24.17	0.0	25
		3	1	23.92	24.38	24.25	0.0	25
		3	3	23.98	24.38	24.24	0.0	25
		6	0	22.94	23.35	23.23	1.0	24
	16QAM	1	0	23.40	23.46	23.25	1.0	24
		1	3	23.37	23.50	23.32	1.0	24
		1	5	23.37	23.46	23.24	1.0	24
		3	0	23.23	23.41	23.42	1.0	24
		3	1	23.21	23.47	23.49	1.0	24
		3	3	23.16	23.45	23.47	1.0	24
		6	0	22.00	22.54	22.50	2.0	23
	64QAM	1	0	22.42	22.27	22.06	2.0	23
		1	3	22.54	22.36	22.12	2.0	23
		1	5	22.33	22.26	22.08	2.0	23
		3	0	22.49	22.22	21.87	2.0	23
		3	1	22.50	22.29	21.95	2.0	23
		3	3	22.45	22.28	21.93	2.0	23
		6	0	21.66	21.40	21.51	3.0	22

LTE Band 13 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			
				Measured Pwr (dBm)		MPR	Tune-up Limit
				23230	782 MHz		
10 MHz	QPSK	1	0	24.21		0.0	25
		1	25	24.33		0.0	25
		1	49	24.21		0.0	25
		25	0	23.47		1.0	24
		25	12	23.54		1.0	24
		25	25	23.44		1.0	24
		50	0	23.49		1.0	24
	16QAM	1	0	23.13		1.0	24
		1	25	23.31		1.0	24
		1	49	23.15		1.0	24
		25	0	22.56		2.0	23
		25	12	22.63		2.0	23
		25	25	22.55		2.0	23
		50	0	22.56		2.0	23
	64QAM	1	0	22.39		2.0	23
		1	25	22.36		2.0	23
		1	49	22.39		2.0	23
		25	0	21.69		3.0	22
		25	12	21.79		3.0	22
		25	25	21.72		3.0	22
		50	0	21.72		3.0	22
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)		MPR	Tune-up Limit
				23230	782 MHz		
				23230	782 MHz		
5 MHz	QPSK	1	0	24.65		0.0	25
		1	12	24.55		0.0	25
		1	24	24.60		0.0	25
		12	0	23.52		1.0	24
		12	7	23.60		1.0	24
		12	13	23.60		1.0	24
		25	0	23.60		1.0	24
	16QAM	1	0	23.73		1.0	24
		1	12	23.64		1.0	24
		1	24	23.74		1.0	24
		12	0	22.68		2.0	23
		12	7	22.71		2.0	23
		12	13	22.65		2.0	23
		25	0	22.60		2.0	23
	64QAM	1	0	22.08		2.0	23
		1	12	22.00		2.0	23
		1	24	22.08		2.0	23
		12	0	21.68		3.0	22
		12	7	21.75		3.0	22
		12	13	21.73		3.0	22
		25	0	21.67		3.0	22

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 17 Measured Results

SAR for LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 41 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						
				Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
20 MHz	QPSK	1	0	21.52	21.64	21.60	21.73	21.64	0.0	22
		1	49	21.40	21.50	21.48	21.43	21.24	0.0	22
		1	99	21.28	21.34	21.42	21.37	21.04	0.0	22
		50	0	21.52	21.63	21.63	21.57	21.41	0.0	22
		50	24	21.45	21.56	21.57	21.51	21.32	0.0	22
		50	50	21.35	21.48	21.43	21.36	21.17	0.0	22
		100	0	21.41	21.51	21.51	21.45	21.29	0.0	22
	16QAM	1	0	20.96	21.26	21.16	21.09	21.27	0.0	22
		1	49	20.72	21.14	20.99	20.80	20.89	0.0	22
		1	99	20.65	21.04	20.94	20.76	20.71	0.0	22
		50	0	21.07	21.24	21.16	21.13	21.02	0.0	22
		50	24	21.00	21.20	21.08	21.06	20.89	0.0	22
		50	50	20.91	21.08	20.99	20.91	20.77	0.0	22
		100	0	20.99	21.13	21.07	21.00	20.86	0.0	22
	64QAM	1	0	21.00	21.19	21.57	21.22	21.35	0.0	22
		1	49	20.93	21.16	21.51	21.07	21.06	0.0	22
		1	99	20.88	21.12	21.55	21.08	20.96	0.0	22
		50	0	21.15	21.27	21.30	21.30	21.18	0.0	22
		50	24	21.09	21.26	21.27	21.22	21.10	0.0	22
		50	50	21.04	21.20	21.23	21.14	21.06	0.0	22
		100	0	21.08	21.23	21.21	21.20	21.12	0.0	22
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
15 MHz	QPSK	1	0	21.41	21.63	21.54	21.60	21.43	0.0	22
		1	37	21.33	21.48	21.45	21.38	21.22	0.0	22
		1	74	21.22	21.36	21.44	21.26	21.04	0.0	22
		36	0	21.45	21.60	21.60	21.51	21.33	0.0	22
		36	20	21.40	21.52	21.53	21.44	21.26	0.0	22
		36	39	21.34	21.46	21.40	21.35	21.20	0.0	22
		75	0	21.37	21.54	21.52	21.42	21.23	0.0	22
	16QAM	1	0	20.97	21.25	21.07	21.12	21.04	0.0	22
		1	37	20.83	21.07	20.97	20.89	20.79	0.0	22
		1	74	20.79	20.98	20.95	20.78	20.65	0.0	22
		36	0	20.97	21.16	21.16	21.04	20.93	0.0	22
		36	20	20.96	21.13	21.11	21.02	20.87	0.0	22
		36	39	20.85	21.07	20.98	20.91	20.79	0.0	22
		75	0	20.95	21.10	21.07	20.98	20.86	0.0	22
	64QAM	1	0	21.27	21.07	20.75	21.52	21.00	0.0	22
		1	37	21.21	20.97	20.73	21.38	20.82	0.0	22
		1	74	21.21	20.91	20.75	21.33	20.75	0.0	22
		36	0	21.16	21.16	21.34	21.29	21.08	0.0	22
		36	20	21.13	21.16	21.27	21.30	21.04	0.0	22
		36	39	21.07	21.10	21.25	21.24	20.99	0.0	22
		75	0	21.07	21.19	21.21	21.21	21.10	0.0	22

LTE Band 41 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
10 MHz	QPSK	1	0	21.34	21.60	21.46	21.54	21.35	0.0	22
		1	25	21.38	21.47	21.46	21.41	21.19	0.0	22
		1	49	21.31	21.41	21.38	21.30	21.14	0.0	22
		25	0	21.49	21.57	21.56	21.49	21.33	0.0	22
		25	12	21.45	21.56	21.51	21.46	21.28	0.0	22
		25	25	21.35	21.50	21.48	21.39	21.24	0.0	22
		50	0	21.45	21.50	21.54	21.43	21.22	0.0	22
	16QAM	1	0	20.85	21.29	21.02	21.04	21.02	0.0	22
		1	25	20.83	21.15	21.00	20.91	20.87	0.0	22
		1	49	20.81	21.06	20.94	20.80	20.83	0.0	22
		25	0	21.03	21.16	21.15	21.03	20.87	0.0	22
		25	12	20.99	21.11	21.08	21.00	20.87	0.0	22
		25	25	20.91	21.04	21.04	20.94	20.78	0.0	22
		50	0	20.98	21.10	21.07	21.04	20.87	0.0	22
	64QAM	1	0	21.25	21.27	20.70	21.47	21.17	0.0	22
		1	25	21.23	21.19	20.76	21.42	21.05	0.0	22
		1	49	21.24	21.19	20.76	21.35	21.07	0.0	22
		25	0	21.04	21.10	21.25	21.19	21.02	0.0	22
		25	12	21.06	21.14	21.27	21.20	20.98	0.0	22
		25	25	20.96	21.08	21.20	21.15	20.99	0.0	22
		50	0	21.02	21.14	21.18	21.19	21.04	0.0	22
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					MPR	Tune-up Limit
				Measured Pwr (dBm)						
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
5 MHz	QPSK	1	0	21.36	21.49	21.54	21.46	21.18	0.0	22
		1	12	21.34	21.41	21.49	21.38	21.11	0.0	22
		1	24	21.31	21.37	21.47	21.36	21.04	0.0	22
		12	0	21.41	21.53	21.54	21.44	21.26	0.0	22
		12	7	21.40	21.50	21.56	21.46	21.26	0.0	22
		12	13	21.37	21.48	21.54	21.43	21.24	0.0	22
		25	0	21.38	21.53	21.51	21.42	21.26	0.0	22
	16QAM	1	0	20.98	21.00	21.05	21.07	20.74	0.0	22
		1	12	20.94	20.93	21.01	21.04	20.67	0.0	22
		1	24	20.94	20.92	20.98	20.99	20.60	0.0	22
		12	0	21.00	21.08	21.09	21.04	20.82	0.0	22
		12	7	20.99	21.08	21.08	21.05	20.85	0.0	22
		12	13	20.95	21.04	21.01	21.03	20.77	0.0	22
		25	0	20.95	21.05	21.10	20.98	20.77	0.0	22
	64QAM	1	0	21.13	20.85	21.53	21.30	20.75	0.0	22
		1	12	21.10	20.85	21.54	21.30	20.74	0.0	22
		1	24	21.07	20.81	21.53	21.27	20.70	0.0	22
		12	0	20.97	21.17	21.29	21.10	21.05	0.0	22
		12	7	20.96	21.19	21.32	21.15	21.07	0.0	22
		12	13	20.93	21.13	21.28	21.09	21.02	0.0	22
		25	0	20.91	21.18	21.17	21.08	21.08	0.0	22

9.4. Wi-Fi 2.4GHz (DTS Band)

Measured Results

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
DSSS 2.4 GHz	802.11b	1 Mbps	1	2412	11.60	12.60	Yes	14.50	15.50	Yes
			6	2437	11.70	12.60		14.60	15.50	
			11	2462	11.70	12.60		14.50	15.50	
			12	2467	11.80	12.60		14.60	15.50	
			13	2472	11.80	12.60		14.70	15.50	
OFDM 2.4 GHz	802.11g	6 Mbps	1	2412	11.60	12.80	No	14.60	15.50	No
			6	2437	11.70	12.80		14.80	15.50	
			11	2462	11.70	12.80		14.50	15.50	
			12	2467	11.70	12.80		14.60	15.50	
			13	2472	3.00	4.20		3.50	4.30	
	802.11n (HT20)	6.5 Mbps	1	2412	11.50	12.80	No	14.40	15.50	No
			6	2437	11.60	12.80		14.70	15.50	
			11	2462	11.60	12.80		14.40	15.50	
			12	2467	11.60	12.80		14.50	15.50	
			13	2472	1.00	2.10		1.70	2.40	

Note(s):

- SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

9.5. Wi-Fi 5GHz (U-NII Bands)

Measured Results

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-1 5.2 GHz	802.11a	6 Mbps	36	5180	8.65	9.80	No		14.50	No
			40	5200	8.52	9.80			14.50	
			44	5220	8.81	9.80			14.50	
			48	5240	8.77	9.80			14.50	
	802.11n (HT20)	6.5 Mbps	36	5180	Not required	9.70	No	Not required	14.50	No
			40	5200		9.70			14.50	
			44	5220		9.70			14.50	
			48	5240		9.70			14.50	
	802.11ac (VHT20)	6.5 Mbps	36	5180		9.70	No		14.50	No
			40	5200		9.70			14.50	
			44	5220		9.70			14.50	
			48	5240		9.70			14.50	
	802.11n (HT40)	13.5 Mbps	38	5190		9.70	No	13.41	14.50	No
			46	5230		9.70		13.02	14.50	
	802.11ac (VHT40)	13.5 Mbps	38	5190		9.70	No	Not required	14.50	No
			46	5230		9.70			14.50	
	802.11ac (VHT80)	29.3 Mbps	42	5210		9.70	No		11.50	No
UNII-2A 5.3 GHz	802.11a	6 Mbps	52	5260	8.68	9.90	Yes		14.50	No
			56	5280	8.47	9.90			14.50	
			60	5300	8.44	9.90			14.50	
			64	5320	8.42	9.90			14.50	
	802.11n (HT20)	6.5 Mbps	52	5260	Not required	9.80	No	Not required	14.50	No
			56	5280		9.80			14.50	
			60	5300		9.80			14.50	
			64	5320		9.80			14.50	
	802.11ac (VHT20)	6.5 Mbps	52	5260		9.80	No		14.50	No
			56	5280		9.80			14.50	
			60	5300		9.80			14.50	
			64	5320		9.80			14.50	
	802.11n (HT40)	13.5 Mbps	54	5270		9.80	No	13.35	14.50	Yes
			62	5310		9.80		10.33	11.50	
	802.11ac (VHT40)	13.5 Mbps	54	5270		9.80	No	Not required	14.50	No
			62	5310		9.80			11.50	
	802.11ac (VHT80)	29.3 Mbps	58	5290		9.70	No		11.50	No

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-2C 5.5 GHz	802.11a	6 Mbps	100	5500	8.22	9.60	Yes	Not required	14.50	No
			116	5580	8.68	9.60			14.50	
			124	5620	8.47	9.60			14.50	
			144	5720	8.13	9.60			14.50	
	802.11n (HT20)	6.5 Mbps	100	5500	Not required	9.50	No		14.50	No
			116	5580		9.50			14.50	
			124	5620		9.50			14.50	
			144	5720		9.50			14.50	
	802.11ac (VHT20)	6.5 Mbps	100	5500		9.50	No		14.50	No
			116	5580		9.50			14.50	
			124	5620		9.50			14.50	
			144	5720		9.50			14.50	
	802.11n (HT40)	13.5 Mbps	102	5510		9.50	No		11.50	No
			118	5590		9.50			14.50	
			126	5630		9.50			14.50	
			142	5710		9.50			14.50	
	802.11ac (VHT40)	13.5 Mbps	102	5510		9.50	No		11.50	No
			118	5590		9.50			14.50	
			126	5630		9.50			14.50	
			142	5710		9.50			14.50	
802.11ac (VHT80)	29.3 Mbps	106	5530	9.20		No	10.13	11.50	Yes	
		122	5610	9.20			13.16	14.50		
		138	5690	9.20			13.21	14.50		
UNII-3 5.8 GHz	802.11a	6 Mbps	149	5745	7.17	8.40	Yes	Not required	14.50	No
			157	5785	7.16	8.40			14.50	
			165	5825	7.48	8.40			14.50	
	802.11n (HT20)	6.5 Mbps	149	5745	Not required	8.30	No		14.50	No
			157	5785		8.30			14.50	
			165	5825		8.30			14.50	
	802.11ac (VHT20)	6.5 Mbps	149	5745		8.30	No		14.50	No
			157	5785		8.30			14.50	
			165	5825		8.30			14.50	
	802.11n (HT40)	13.5 Mbps	151	5755		8.30	No	13.41	14.50	Yes
			159	5795		8.30		13.51	14.50	
	802.11ac (VHT40)	13.5 Mbps	151	5755		8.30	No	Not required	14.50	No
			159	5795		8.30			14.50	
	802.11ac (VHT80)	29.3 Mbps	155	5775		7.80	No		13.60	No

Note(s):

- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

9.6. Bluetooth

Average Power Measured Results


Band	Mode	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)
2.4	GFSK	0	2402	9.84	11.20	Yes
		39	2441	11.70	11.70	
		78	2480	9.45	10.40	
	EDR, $\pi/4$ DQPSK	0	2402	7.46	8.30	No
		39	2441	7.48	8.80	
		78	2480	7.23	7.50	
	EDR, 8-DPSK	0	2402	6.70	8.30	No
		39	2441	7.40	8.80	
		78	2480	7.21	7.50	
	LE, GFSK	0	2402	4.18	5.40	No
		19	2440	4.32	5.90	
		39	2480	4.25	4.60	

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.882	3.746	76.94%	1.30

Duty Cycle plots

GFSK

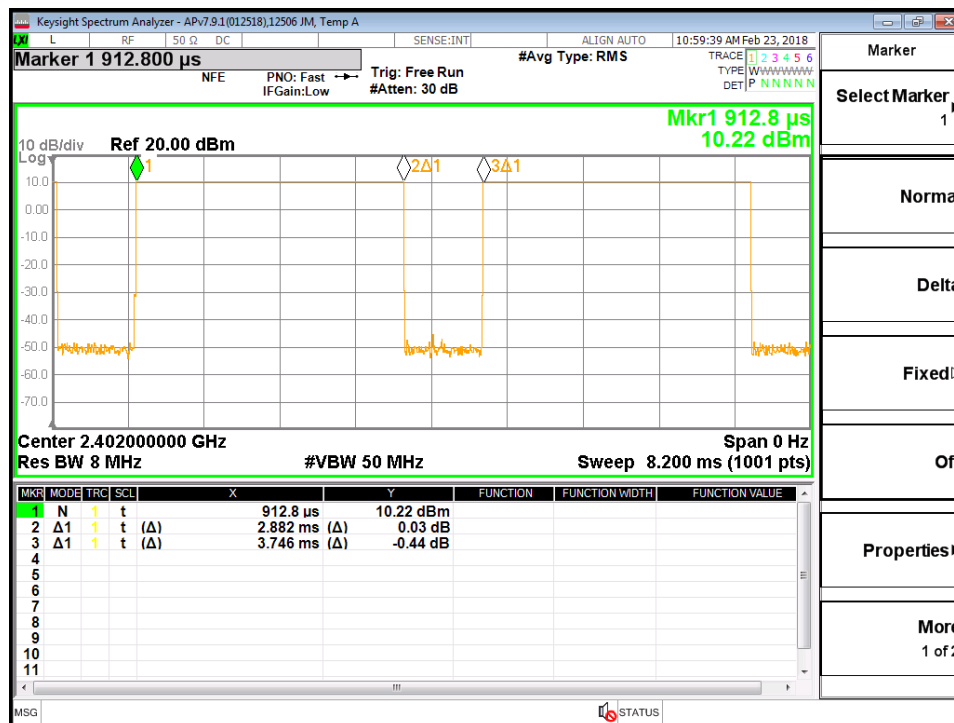

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

Reported SAR(W/kg) for WWAN= Measured SAR *Tune-up Scaling Factor

Reported SAR(W/kg) for Wi-Fi and Bluetooth= Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plots No.
						Tune-up Limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	0	Left Touch	190	836.6	27.20	26.80	0.267	0.293	1
			Left Tilt	190	836.6	27.20	26.80	0.110	0.121	
			Right Touch	190	836.6	27.20	26.80	0.241	0.264	
			Right Tilt	190	836.6	27.20	26.80	0.106	0.116	
Body-worn	GPRS 4 Slots	15	Rear	190	836.6	27.20	26.80	0.279	0.306	
			Front	190	836.6	27.20	26.80	0.290	0.318	2
Hotspot	GPRS 4 Slots	10	Rear	190	836.6	27.20	26.80	0.391	0.429	
			Front	190	836.6	27.20	26.80	0.414	0.454	3
			Edge 2	190	836.6	27.20	26.80	0.274	0.300	
			Edge 3	190	836.6	27.20	26.80	0.226	0.248	
			Edge 4	190	836.6	27.20	26.80	0.352	0.386	
Hotspot	DTM 2 Slots	10	Front	190	836.6	30.20	30.00	0.408	0.427	

10.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plots No.
						Tune-up Limit	Meas.	Meas.	Scaled	
Head	GPRS 2 Slots	0	Left Touch	661	1880.0	27.70	27.30	0.270	0.296	4
			Left Tilt	661	1880.0	27.70	27.30	0.048	0.053	
			Right Touch	661	1880.0	27.70	27.30	0.184	0.202	
			Right Tilt	661	1880.0	27.70	27.30	0.053	0.058	
Body-worn	GPRS 2 Slots	15	Rear	661	1880.0	27.70	27.30	0.154	0.169	
			Front	661	1880.0	27.70	27.30	0.214	0.235	5
Hotspot	GPRS 2 Slots	10	Rear	661	1880.0	27.70	27.30	0.246	0.270	
			Front	661	1880.0	27.70	27.30	0.338	0.371	
			Edge 2	661	1880.0	27.70	27.30	0.033	0.036	
			Edge 3	661	1880.0	27.70	27.30	0.440	0.482	6
			Edge 4	661	1880.0	27.70	27.30	0.154	0.169	
Hotspot	DTM 2 Slots	10	Edge 3	661	1880.0	27.70	27.38	0.411	0.442	

10.3. W-CDMA Band V

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plots No.
						Tune-up Limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC 12.2 kbps	0	Left Touch	4183	836.6	24.90	24.30	0.349	0.401	7
			Left Tilt	4183	836.6	24.90	24.30	0.125	0.144	
			Right Touch	4183	836.6	24.90	24.30	0.334	0.383	
			Right Tilt	4183	836.6	24.90	24.30	0.130	0.149	
Body-worn	Rel 99 RMC 12.2 kbps	15	Rear	4183	836.6	24.90	24.30	0.310	0.356	
			Front	4183	836.6	24.90	24.30	0.341	0.392	8
Hotspot	Rel 99 RMC 12.2 kbps	10	Rear	4183	836.6	24.90	24.30	0.456	0.524	
			Front	4183	836.6	24.90	24.30	0.531	0.610	9
			Edge 2	4183	836.6	24.90	24.30	0.336	0.386	
			Edge 3	4183	836.6	24.90	24.30	0.193	0.222	
			Edge 4	4183	836.6	24.90	24.30	0.277	0.318	

10.4. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plots No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	20175	1732.5	1	0	23.50	23.14	0.523	0.568	10
							50	0	23.50	23.12	0.525	0.573	
				Left Tilt (15°)	20175	1732.5	1	0	23.50	23.14	0.087	0.095	
							50	0	23.50	23.12	0.088	0.096	
				Right Touch	20175	1732.5	1	0	23.50	23.14	0.437	0.475	
							50	0	23.50	23.12	0.447	0.488	
				Right Tilt (15°)	20175	1732.5	1	0	23.50	23.14	0.089	0.097	
							50	0	23.50	23.12	0.088	0.096	
Body-worn	QPSK	OFF	15	Rear	20175	1732.5	1	0	23.50	23.14	0.418	0.454	
							50	0	23.50	23.12	0.412	0.450	
				Front	20175	1732.5	1	0	23.50	23.14	0.565	0.614	11
							50	0	23.50	23.12	0.577	0.630	
Hotspot	QPSK	OFF	10	Rear	20175	1732.5	1	0	23.50	23.14	0.605	0.657	
							50	0	23.50	23.12	0.614	0.670	
				Front	20175	1732.5	1	0	23.50	23.14	0.857	0.931	12
							50	0	23.50	23.12	0.866	0.945	
							100	0	23.50	23.04	0.850	0.945	
				Edge 2	20175	1732.5	1	0	23.50	23.14	0.043	0.047	
							50	0	23.50	23.12	0.043	0.047	
				Edge 3	20175	1732.5	1	0	23.50	23.14	0.545	0.592	
							50	0	23.50	23.12	0.577	0.630	
				Edge 4	20175	1732.5	1	0	23.50	23.14	0.192	0.209	
							50	0	23.50	23.12	0.197	0.215	

10.5. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plots No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	20525	836.5	1	25	25.00	24.64	0.320	0.348	
							25	12	24.00	23.68	0.282	0.304	
				Left Tilt (15°)	20525	836.5	1	25	25.00	24.64	0.099	0.108	
							25	12	24.00	23.68	0.087	0.094	
				Right Touch	20525	836.5	1	25	25.00	24.64	0.327	0.355	13
							25	12	24.00	23.68	0.289	0.311	
				Right Tilt (15°)	20525	836.5	1	25	25.00	24.64	0.115	0.125	
							25	12	24.00	23.68	0.103	0.111	
Body-worn	QPSK	OFF	15	Rear	20525	836.5	1	25	25.00	24.64	0.264	0.287	
							25	12	24.00	23.68	0.233	0.251	
				Front	20525	836.5	1	25	25.00	24.64	0.340	0.369	14
							25	12	24.00	23.68	0.300	0.323	
Hotspot	QPSK	OFF	10	Rear	20525	836.5	1	25	25.00	24.64	0.410	0.445	
							25	12	24.00	23.68	0.365	0.393	
				Front	20525	836.5	1	25	25.00	24.64	0.523	0.568	15
							25	12	24.00	23.68	0.468	0.504	
				Edge 2	20525	836.5	1	25	25.00	24.64	0.285	0.310	
							25	12	24.00	23.68	0.252	0.271	
				Edge 3	20525	836.5	1	25	25.00	24.64	0.177	0.192	
							25	12	24.00	23.68	0.157	0.169	
				Edge 4	20525	836.5	1	25	25.00	24.64	0.294	0.319	
							25	12	24.00	23.68	0.259	0.279	

10.6. LTE Band 7 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plots No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	21100	2535.0	1	0	21.00	20.50	0.298	0.334	
							50	24	21.00	20.58	0.317	0.349	
				Left Tilt (15°)	21100	2535.0	1	0	21.00	20.50	0.205	0.230	
							50	24	21.00	20.58	0.228	0.251	
				Right Touch	21100	2535.0	1	0	21.00	20.50	0.515	0.578	
							50	24	21.00	20.58	0.559	0.616	16
				Right Tilt (15°)	21100	2535.0	1	0	21.00	20.50	0.211	0.237	
							50	24	21.00	20.58	0.235	0.259	
Body-worn	QPSK	OFF	15	Rear	21100	2535.0	1	0	21.00	20.50	0.069	0.077	
							50	24	21.00	20.58	0.064	0.070	
				Front	21100	2535.0	1	0	21.00	20.50	0.091	0.102	17
							50	24	21.00	20.58	0.091	0.100	
Hotspot	QPSK	OFF	10	Rear	21100	2535.0	1	0	21.00	20.50	0.182	0.204	
							50	24	21.00	20.58	0.176	0.194	
				Front	21100	2535.0	1	0	21.00	20.50	0.256	0.287	
							50	24	21.00	20.58	0.249	0.274	
				Edge 2	21100	2535.0	1	0	21.00	20.50	0.419	0.470	18
							50	24	21.00	20.58	0.396	0.436	
				Edge 3	21100	2535.0	1	0	21.00	20.50	0.148	0.166	
							50	24	21.00	20.58	0.161	0.177	
				Edge 4	21100	2535.0	1	0	21.00	20.50	0.014	0.016	
							50	24	21.00	20.58	0.014	0.015	

10.7. LTE Band 12 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plots No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	23095	707.5	1	0	25.00	24.42	0.299	0.342	19
							25	12	24.00	23.48	0.235	0.265	
				Left Tilt (15°)	23095	707.5	1	0	25.00	24.42	0.151	0.173	
							25	12	24.00	23.48	0.118	0.133	
				Right Touch	23095	707.5	1	0	25.00	24.42	0.289	0.330	
							25	12	24.00	23.48	0.228	0.257	
Body-worn	QPSK	OFF	15	Rear	23095	707.5	1	0	25.00	24.42	0.345	0.395	
							25	12	24.00	23.48	0.276	0.311	
				Front	23095	707.5	1	0	25.00	24.42	0.395	0.452	20
							25	12	24.00	23.48	0.315	0.355	
Hotspot	QPSK	OFF	10	Rear	23095	707.5	1	0	25.00	24.42	0.469	0.536	
							25	12	24.00	23.48	0.376	0.424	
				Front	23095	707.5	1	0	25.00	24.42	0.544	0.622	21
							25	12	24.00	23.48	0.432	0.487	
				Edge 2	23095	707.5	1	0	25.00	24.42	0.274	0.313	
							25	12	24.00	23.48	0.227	0.256	
				Edge 3	23095	707.5	1	0	25.00	24.42	0.078	0.089	
							25	12	24.00	23.48	0.065	0.073	
				Edge 4	23095	707.5	1	0	25.00	24.42	0.349	0.399	
							25	12	24.00	23.48	0.269	0.304	

10.8. LTE Band 13 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plots No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	23230	782.0	1	25	25.00	24.33	0.337	0.393	22
						25	12	24.00	23.54	0.270	0.300	
			Left Tilt (15°)	23230	782.0	1	25	25.00	24.33	0.119	0.139	
						25	12	24.00	23.54	0.098	0.109	
			Right Touch	23230	782.0	1	25	25.00	24.33	0.289	0.337	
						25	12	24.00	23.54	0.238	0.265	
Body-worn	QPSK	15	Rear	23230	782.0	1	25	25.00	24.33	0.349	0.407	
						25	12	24.00	23.54	0.283	0.315	
			Front	23230	782.0	1	25	25.00	24.33	0.396	0.462	23
						25	12	24.00	23.54	0.320	0.356	
Hotspot	QPSK	10	Rear	23230	782.0	1	25	25.00	24.33	0.515	0.601	
						25	12	24.00	23.54	0.419	0.466	
			Front	23230	782.0	1	25	25.00	24.33	0.578	0.674	24
						25	12	24.00	23.54	0.468	0.520	
			Edge 2	23230	782.0	1	25	25.00	24.33	0.352	0.411	
						25	12	24.00	23.54	0.288	0.320	
			Edge 3	23230	782.0	1	25	25.00	24.33	0.142	0.166	
						25	12	24.00	23.54	0.114	0.127	
			Edge 4	23230	782.0	1	25	25.00	24.33	0.249	0.291	
						25	12	24.00	23.54	0.202	0.225	

10.9. LTE Band 17 (10MHz Bandwidth)

SAR for LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

10.10. LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plots No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	40620	2593.0	1	0	22.00	21.60	0.297	0.326	
							50	0	22.00	21.63	0.305	0.332	
				Left Tilt (15°)	40620	2593.0	1	0	22.00	21.60	0.226	0.248	
							50	0	22.00	21.63	0.239	0.260	
				Right Touch	40620	2593.0	1	0	22.00	21.60	0.534	0.586	
							50	0	22.00	21.63	0.615	0.670	25
				Right Tilt (15°)	40620	2593.0	1	0	22.00	21.60	0.151	0.166	
							50	0	22.00	21.63	0.154	0.168	
Body-worn	QPSK	OFF	15	Rear	40620	2593.0	1	0	22.00	21.60	0.069	0.076	
							50	0	22.00	21.63	0.070	0.076	
				Front	40620	2593.0	1	0	22.00	21.60	0.098	0.107	26
							50	0	22.00	21.63	0.096	0.105	
Hotspot	QPSK	OFF	10	Rear	40620	2593.0	1	0	22.00	21.60	0.160	0.175	
							50	0	22.00	21.63	0.133	0.145	
				Front	40620	2593.0	1	0	22.00	21.60	0.204	0.224	27
							50	0	22.00	21.63	0.204	0.222	
				Edge 2	40620	2593.0	1	0	22.00	21.60	0.044	0.048	
							50	0	22.00	21.63	0.045	0.049	
				Edge 3	40620	2593.0	1	0	22.00	21.60	0.045	0.049	
							50	0	22.00	21.63	0.044	0.048	
				Edge 4	40620	2593.0	1	0	22.00	21.60	0.021	0.023	
							50	0	22.00	21.63	0.019	0.021	

10.11. Wi-Fi (DTS Band)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	802.11b 1 Mbps	Chain 0	0	Left Touch	13	2472	0.121	99.28%	12.60	11.80			
				Left Tilt	13	2472	0.151	99.28%	12.60	11.80			
				Right Touch	13	2472	0.233	99.28%	12.60	11.80	0.182	0.220	28
				Right Tilt	13	2472	0.217	99.28%	12.60	11.80			
Body-worn	802.11b 1 Mbps	Chain 0	15	Rear	13	2472	0.007	99.28%	12.60	11.80			
				Front	13	2472	0.019	99.28%	12.60	11.80	0.013	0.016	29
Hotspot	802.11b 1 Mbps	Chain 0	10	Rear	13	2472	0.026	99.28%	12.60	11.80			
				Front	13	2472	0.026	99.28%	12.60	11.80			
				Edge 1	13	2472	0.014	99.28%	12.60	11.80			
				Edge 4	13	2472	0.059	99.28%	12.60	11.80	0.052	0.063	30
Head	802.11b 1 Mbps	Chain 1	0	Left Touch	13	2472	0.139	99.28%	15.50	14.70			
				Left Tilt	13	2472	0.111	99.28%	15.50	14.70			
				Right Touch	13	2472	0.129	99.28%	15.50	14.70	0.077	0.093	31
				Right Tilt	13	2472	0.128	99.28%	15.50	14.70			
Body-worn	802.11b 1 Mbps	Chain 1	15	Rear	13	2472	0.011	99.28%	15.50	14.70	0.007	0.008	32
				Front	13	2472	0.007	99.28%	15.50	14.70			
Hotspot	802.11b 1 Mbps	Chain 1	10	Rear	13	2472	0.019	99.28%	15.50	14.70	0.014	0.017	33
				Front	13	2472	0.017	99.28%	15.50	14.70			
				Edge 2	13	2472	0.002	99.28%	15.50	14.70			

Notes:

1. For results listed with “-”, the SAR result is less than 0.001 W/kg.
2. When the 802.11b reported SAR of the highest measured maximum output power channel is ≤ 0.8 W/kg, no further SAR testing is required. If SAR is > 0.8 W/kg and ≤ 1.2 W/kg, SAR is required for the next highest measured output power channel. Finally, if SAR is > 1.2 W/kg, SAR is required for the third channel.
3. SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

10.12. Wi-Fi (U-NII Band)**U-NII-2A**

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plots No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	802.11a	Chain 0	0	Left Touch	52	5260	0.243	98.3%	9.90	8.68			
				Left Tilt	52	5260	0.136	98.3%	9.90	8.68			
				Right Touch	52	5260	0.294	98.3%	9.90	8.68	0.181	0.244	34
				Right Tilt	52	5260	0.270	98.3%	9.90	8.68			
Body	802.11a	Chain 0	15	Rear	52	5260	0.009	98.3%	9.90	8.68			
				Front	52	5260	0.012	98.3%	9.90	8.68	0.004	0.005	35
Head	802.11n HT 40	Chain 1	0	Left Touch	54	5270	0.436	97.6%	14.50	13.35	0.203	0.271	36
				Left Tilt	54	5270	0.025	97.6%	14.50	13.35			
				Right Touch	54	5270	0.139	97.6%	14.50	13.35			
				Right Tilt	54	5270	0.009	97.6%	14.50	13.35			
Body	802.11n HT 40	Chain 1	15	Rear	54	5270	0.041	97.6%	14.50	13.35	0.014	0.019	37
				Front	54	5270	0.016	97.6%	14.50	13.35			

U-NII-2C

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plots No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	802.11a	Chain 0	0	Left Touch	116	5580	0.539	98.3%	9.60	8.68			
				Left Tilt	116	5580	0.535	98.3%	9.60	8.68			
				Right Touch	116	5580	0.846	98.3%	9.60	8.68	0.298	0.375	
				Right Tilt	116	5580	0.877	98.3%	9.60	8.68	0.344	0.433	38
Body	802.11a	Chain 0	15	Rear	116	5580	0.053	98.3%	9.60	8.68	0.016	0.020	39
				Front	116	5580	0.033	98.3%	9.60	8.68			
Head	802.11ac (VHT80)	Chain 1	0	Left Touch	138	5690	0.153	88.6%	14.50	13.21			
				Left Tilt	138	5690	0.026	88.6%	14.50	13.21			
				Right Touch	138	5690	0.497	88.6%	14.50	13.21	0.158	0.240	40
				Right Tilt	138	5690	0.049	88.6%	14.50	13.21			
Body	802.11ac (VHT80)	Chain 1	15	Rear	138	5690	0.039	88.6%	14.50	13.21			
				Front	138	5690	0.011	88.6%	14.50	13.21	0.014	0.021	41

U-NII-3

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plots No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	802.11a	Chain 0	0	Left Touch	165	5825	0.424	98.3%	8.40	7.48			
				Left Tilt	165	5825	0.299	98.3%	8.40	7.48			
				Right Touch	165	5825	0.561	98.3%	8.40	7.48	0.275	0.346	42
				Right Tilt	165	5825	0.395	98.3%	8.40	7.48			
Body-worn	802.11a	Chain 0	15	Rear	165	5825	0.027	98.3%	8.40	7.48			
				Front	165	5825	0.049	98.3%	8.40	7.48	0.018	0.023	43
Head	802.11n HT40	Chain 1	0	Left Touch	159	5795	0.172	94.2%	14.50	13.51			
				Left Tilt	159	5795	0.008	94.2%	14.50	13.51			
				Right Touch	159	5795	0.259	94.2%	14.50	13.51	0.143	0.191	44
				Right Tilt	159	5795	0.003	94.2%	14.50	13.51			
Body-worn	802.11n HT40	Chain 1	15	Rear	159	5795	0.001	94.2%	14.50	13.51			
				Front	159	5795	0.102	94.2%	14.50	13.51	<0.001	<0.001	45

Notes:

1. For results listed with "-", the SAR result is less than 0.001 W/kg.
2. When the 802.11b reported SAR of the highest measured maximum output power channel is ≤ 0.8 W/kg, no further SAR testing is required. If SAR is > 0.8 W/kg and ≤ 1.2 W/kg, SAR is required for the next highest measured output power channel. Finally, if SAR is > 1.2 W/kg, SAR is required for the third channel.

10.13. Bluetooth

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plots No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Head	GFSK DH5	Chain 0	0	Left Touch	39	2441	76.9%	11.70	11.70	0.044	0.057	
				Left Tilt	39	2441	76.9%	11.70	11.70	0.050	0.065	
				Right Touch	39	2441	76.9%	11.70	11.70	0.119	0.155	46
				Right Tilt	39	2441	76.9%	11.70	11.70	0.099	0.129	
Body-worn	GFSK DH5	Chain 0	15	Rear	39	2441	76.9%	11.70	11.70	0.002	0.002	
				Front	39	2441	76.9%	11.70	11.70	0.009	0.011	47
Hotspot	GFSK DH5	Chain 0	10	Rear	39	2441	76.9%	11.70	11.70	0.019	0.025	
				Front	39	2441	76.9%	11.70	11.70	0.018	0.023	
				Edge 1	39	2441	76.9%	11.70	11.70	0.002	0.003	
				Edge 4	39	2441	76.9%	11.70	11.70	0.032	0.042	48

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated	
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 12	Hotspot	Front	No	0.544	N/A	N/A
	LTE Band 13	Hotspot	Front	No	0.578	N/A	N/A
850	GSM 850	Hotspot	Front	No	0.414	N/A	N/A
	WCDMA Band V	Hotspot	Front	No	0.531	N/A	N/A
	LTE Band 5	Hotspot	Front	No	0.523	N/A	N/A
1750	LTE Band 4	Hotspot	Front	Yes	0.866	0.820	1.06
1900	GSM 1900	Hotspot	Edge 3	No	0.440	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Head	Right Touch	No	0.182	N/A	N/A
	BT	Head	Right Touch	No	0.119	N/A	N/A
2500	LTE Band 7	Head	Right Touch	No	0.559	N/A	N/A
2600	LTE Band 41	Head	Right Touch	No	0.615	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Head	Left Touch	No	0.203	N/A	N/A
5500	Wi-Fi 802.11a/n/ac	Head	Right Tilt	No	0.344	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Head	Right Touch	No	0.275	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is < 1.20 .

12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance explains how to calculate the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri \leq 0.04$$

Simultaneous Transmission Condition

Case	Cellular	WLAN Chain 0 / BT	WLAN Chain 1
1	GSM/GPRS/Edge	BT/BLE	(None)
2	GSM/GPRS/Edge	WLAN 2.4G	(None)
3	GSM/GPRS/Edge	WLAN 2.4G	WLAN 2.4G
4	GSM/GPRS/Edge	WLAN 2.4G	WLAN 5G
5	GSM/GPRS/Edge	WLAN 5G	WLAN 5G
6	GSM/GPRS/Edge	BT WLAN 5G	WLAN 5G
7	UMTS/HSPA	BT/BLE	(None)
8	UMTS/HSPA	WLAN 2.4G	(None)
9	UMTS/HSPA	WLAN 2.4G	WLAN 2.4G
10	UMTS/HSPA	WLAN 2.4G	WLAN 5G
11	UMTS/HSPA	WLAN 5G	WLAN 5G
12	UMTS/HSPA	BT WLAN 5G	WLAN 5G
13	LTE	BT/BLE	(None)
14	LTE	WLAN 2.4G	(None)
15	LTE	WLAN 2.4G	WLAN 2.4G
16	LTE	WLAN 2.4G	WLAN 5G
17	LTE	WLAN 5G	WLAN 5G
18	LTE	BT WLAN 5G	WLAN 5G
19	(None)	BT WLAN 5G	WLAN 5G

12.1. Sum of the SAR for WWAN & Wi-Fi & BT

RF Exposure conditions	Test Position	Standalone SAR (W/kg)						Σ 1-g SAR (W/kg)						
		WWAN	DTS		U-NII		BT	WWAN + BT	WWAN + DTS	WWAN + DTS	WWAN + DTS + U-NII	WWAN + U-NII	WWAN+U-NII+BT	U-NII+BT
		①	Chain 0 ②	Chain 1 ③	Chain 0 ④	Chain 1 ⑤	Chain 0 ⑥	① + ⑥	① + ②	① + ② + ③	① + ② + ⑤	① + ④ + ⑤	① + ④ + ⑤ + ⑥	④ + ⑤ + ⑥
Head	Left Touch	0.573	0.220	0.093	0.433	0.271	0.057	0.630	0.793	0.886	1.064	1.277	1.334	0.761
	Left Tilt	0.260	0.220	0.093	0.433	0.271	0.065	0.325	0.480	0.573	0.751	0.964	1.029	0.769
	Right Touch	0.670	0.220	0.093	0.375	0.271	0.155	0.825	0.890	0.983	1.161	1.316	1.471	0.801
	Right Tilt	0.259	0.220	0.093	0.433	0.271	0.129	0.388	0.479	0.572	0.750	0.963	1.092	0.833
Body-worn	Rear	0.454	0.016	0.008	0.023	0.021	0.002	0.456	0.470	0.478	0.491	0.498	0.500	0.046
	Front	0.630	0.016	0.008	0.023	0.021	0.011	0.641	0.646	0.654	0.667	0.674	0.685	0.055
Hotspot	Rear	0.670	0.063	0.017			0.025	0.695	0.733	0.750				
	Front	0.945	0.063	0.017			0.023	0.968	1.008	1.025				
	Edge 2	0.470	0.063	0.017			0.042	0.512	0.533	0.550				
	Edge 3	0.630	0.063	0.017			0.042	0.672	0.693	0.710				
	Edge 4	0.399	0.063	0.017			0.042	0.441	0.462	0.479				

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is ≤ 0.04 for all circumstances that require SPLSR calculation.

Appendixes

Refer to separated files for the following appendixes.

12132879-S1V1 Appendix A: SAR Setup Photos

12132879-S1V1 Appendix B: SAR System Check Plots

12132879-S1V1 Appendix C: Highest SAR Test Plots

12132879-S1V1 Appendix D: SAR Liquid Tissue Ingredients

12132879-S1V1 Appendix E: SAR Probe Calibration Certificates

12132879-S1V1 Appendix F: SAR Dipole Calibration Certificates

END OF REPORT