


#### 4.5.1. Test Photographs

Front View



Rear View

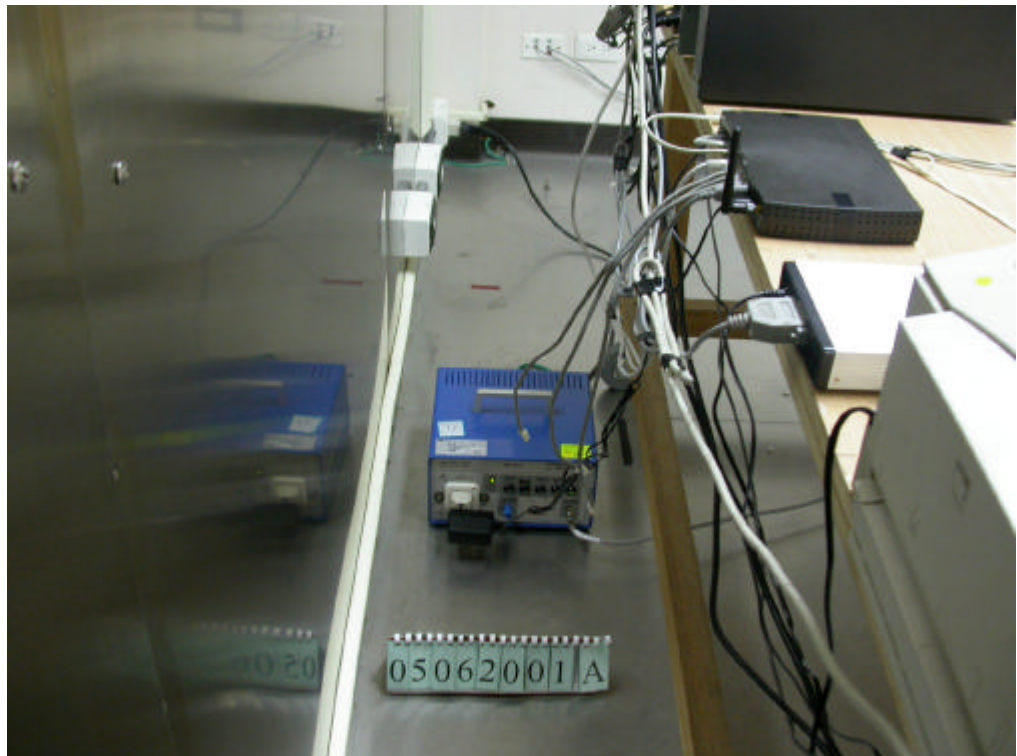

## 5. Test of Radiated Emission

### 5.1. Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2003. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions. For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated ( $\mu$ V / M)	Radiated (dB $\mu$ V/M)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0


For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the above table.

Frequency (MHz)	Distance Meters	Radiated (dB $\mu$ V/M)
30-230	10	30
230-1000	10	37

## 5.2. Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 5.3. Typical Test Setup

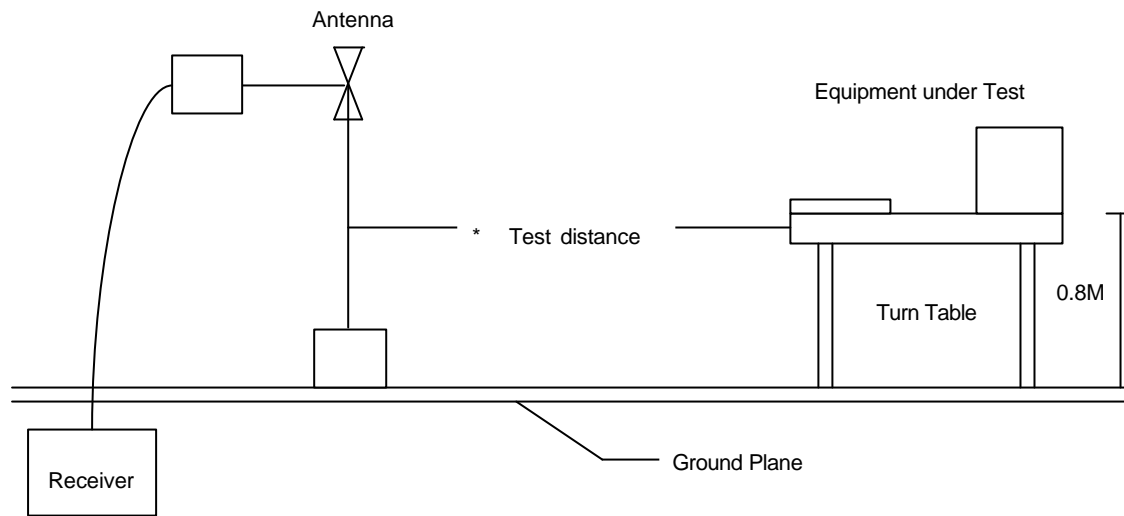


### 5.4. Measurement equipment

Instrument/Ancillary	Type	Manufacturer	Valid Date
EMI Receiver	8546A	HP	2006/04/13
Spectrum Analyzer	FSP40	R&S	2005/12/28
Horn Antenna	3115	EMCO	2006/02/21
Horn Antenna	3116	EMCO	2006/02/21
Bilog Antenna	CBL6112B	Schaffner	2006/04/12
Amplifier	8447D	Agilent	2006/02/14
Amplifier	8447D	Agilent	2006/02/22

## 5.5. Test Result and Data

EUT	: IP819VGA	Pol/Phase	: HORIZONTAL
Power	: 120V	Temperature	: 28 °C
Test Mode	: Transmit/Receive	Humidity	: 70 %
Operation Channel	: 1	Atmospheric Pressure	: 1022 mmHg
Modulation Type	: 802.11b/g	Memo	:
Rate	: 11/12 Mbps		

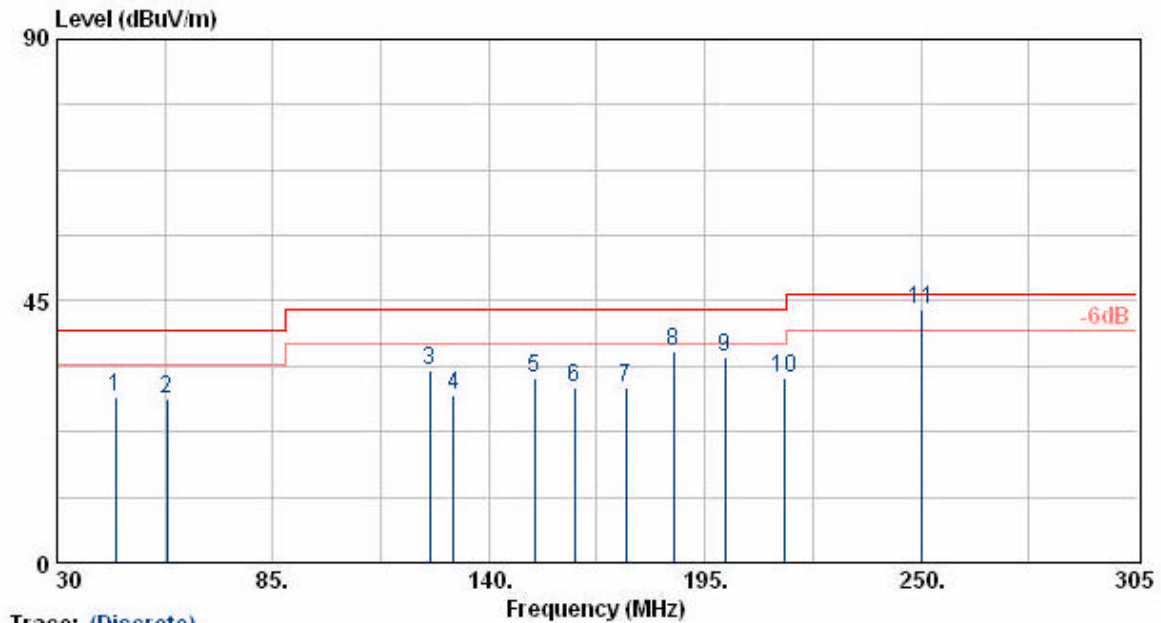

Frequency (MHz)	Meter Reading (dBUV)	Corrected Factor (dBUV/m)	Result (dBUV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
44.85	40.79	-12.32	28.47	40.00	-11.53	Peak	0	200
58.05	48.56	-20.36	28.20	40.00	-11.80	Peak	60	200
124.98	48.94	-15.94	33.00	43.50	-10.50	Peak	60	200
130.93	43.74	-15.09	28.65	43.50	-14.85	Peak	100	200
151.54	46.38	-14.61	31.77	43.50	-11.73	Peak	140	200
161.80	45.79	-15.83	29.96	43.50	-13.54	Peak	70	200
175.00	47.27	-17.11	30.16	43.50	-13.34	Peak	220	200
187.00	53.30	-17.10	36.20	43.50	-7.30	Peak	330	200
200.02	52.42	-17.02	35.40	43.50	-8.10	Peak	300	200
215.35	48.91	-17.25	31.66	43.50	-11.84	Peak	300	200
249.99	56.76	-13.17	43.59	46.00	-2.41	QP	0	200


## Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.



EUT : IP819VGA  
 Power : 120V  
 Test Mode : Transmit/Receive  
 Operation Channel: 1  
 Modulation Type : 802.11b/g  
 Rate : 11/12 Mbps

Pol/Phase : HORIZONTAL  
 Temperature : 28 °C  
 Humidity : 70 %  
 Atmospheric Pressure: 1022 mmHg  
 Memo :

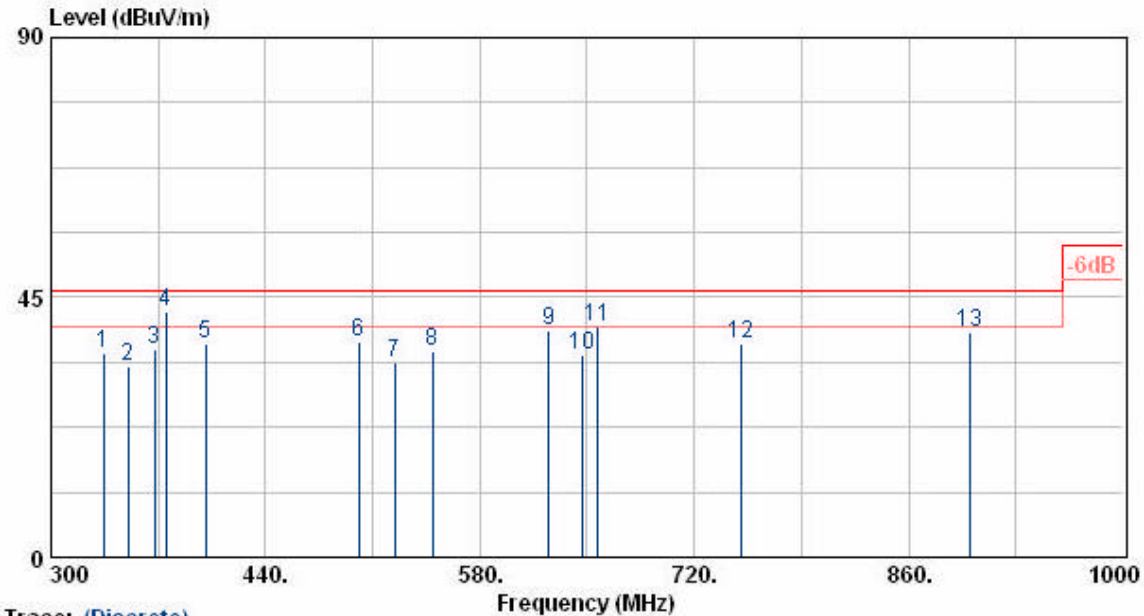


Frequency (MHz)	Meter Reading (dBUV)	Corrected Factor (dBUV/m)	Result (dBUV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
334.30	45.78	-10.48	35.30	46.00	-10.70	Peak	80	200
350.40	43.29	-10.18	33.11	46.00	-12.89	Peak	80	200
367.90	45.49	-9.60	35.89	46.00	-10.11	Peak	200	200
375.00	51.99	-9.29	42.70	46.00	-3.30	QP	260	200
400.80	45.71	-8.58	37.13	46.00	-8.87	Peak	260	200
500.90	44.16	-6.71	37.45	46.00	-8.55	Peak	300	200
524.26	39.76	-6.00	33.76	46.00	-12.24	Peak	300	200
548.85	40.74	-5.17	35.57	46.00	-10.43	Peak	30	200
625.00	43.45	-4.10	39.35	46.00	-6.65	Peak	240	200
647.16	38.76	-3.76	35.00	46.00	-11.00	Peak	240	200
657.23	43.32	-3.45	39.87	46.00	-6.13	Peak	200	200
750.04	38.16	-1.05	37.11	46.00	-8.89	Peak	80	200
900.05	37.59	1.24	38.83	46.00	-7.17	Peak	80	200

## Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.

EUT : IP819VGA  
 Power : 120V  
 Test Mode : Transmit/Receive  
 Operation Channel: 1  
 Modulation Type : 802.11b/g  
 Rate : 11/12 Mbps

Pol/Phase : VERTICAL  
 Temperature : 28 °C  
 Humidity : 70 %  
 Atmospheric Pressure: 1022 mmHg  
 Memo :

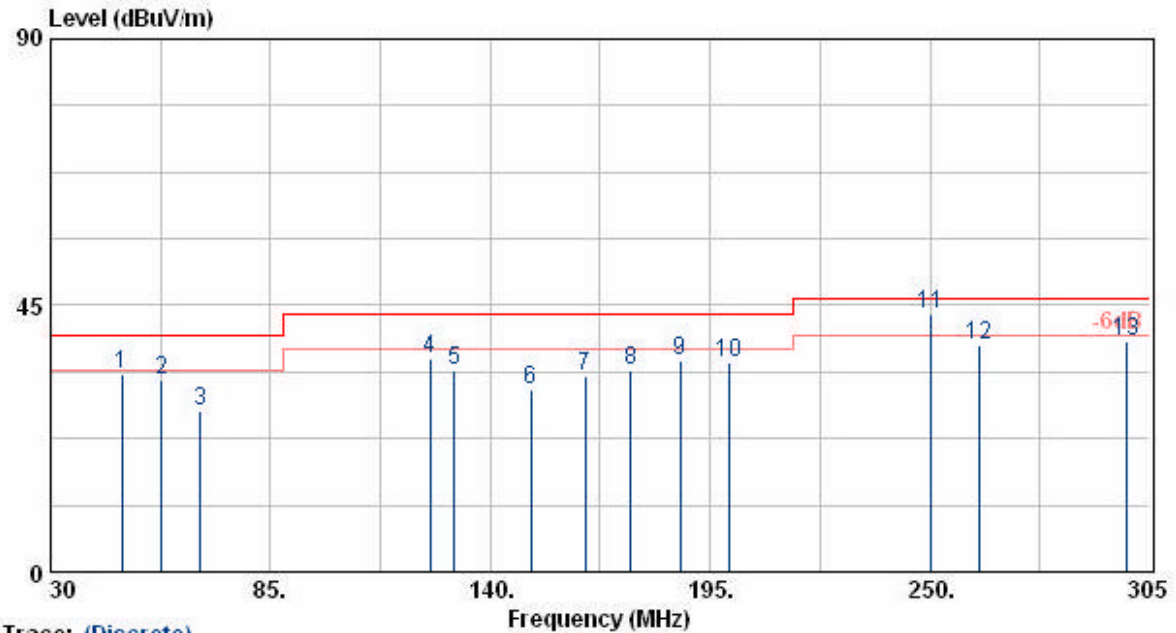

Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
47.80	46.92	-13.70	33.22	40.00	-6.78	Peak	50	100
57.76	52.52	-20.16	32.36	40.00	-7.64	Peak	50	100
67.58	47.49	-20.39	27.10	40.00	-12.90	Peak	80	100
124.99	52.03	-15.94	36.09	43.50	-7.41	Peak	200	100
131.07	49.27	-15.08	34.19	43.50	-9.31	Peak	200	100
150.14	45.25	-14.42	30.83	43.50	-12.67	Peak	60	100
163.83	49.00	-16.01	32.99	43.50	-10.51	Peak	60	100
175.25	51.12	-17.12	34.00	43.50	-9.50	Peak	90	100
187.46	52.85	-17.08	35.77	43.50	-7.73	Peak	150	100
199.99	52.27	-17.02	35.25	43.50	-8.25	Peak	150	100
249.98	56.80	-13.17	43.63	46.00	-2.37	QP	220	100
262.14	50.71	-12.27	38.44	46.00	-7.56	Peak	220	100
299.23	49.90	-11.10	38.80	46.00	-7.20	Peak	100	100

## Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.