

20210810_SystemPerformanceCheck-D1900V2_SN5d199

Frequency: 1900 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.443$ S/m; $\epsilon_r = 40.688$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn614; Calibrated: 2021-03-05
- Probe: EX3DV4 - SN7645; ConvF(8.9, 8.9, 8.9) @ 1900 MHz; Calibrated: 2021-04-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2001

Head/1900MHz/Pin=100mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.65 W/kg


Head/1900MHz/Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 61.38 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 8.37 W/kg

SAR(1 g) = 4.18 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 6.76 W/kg

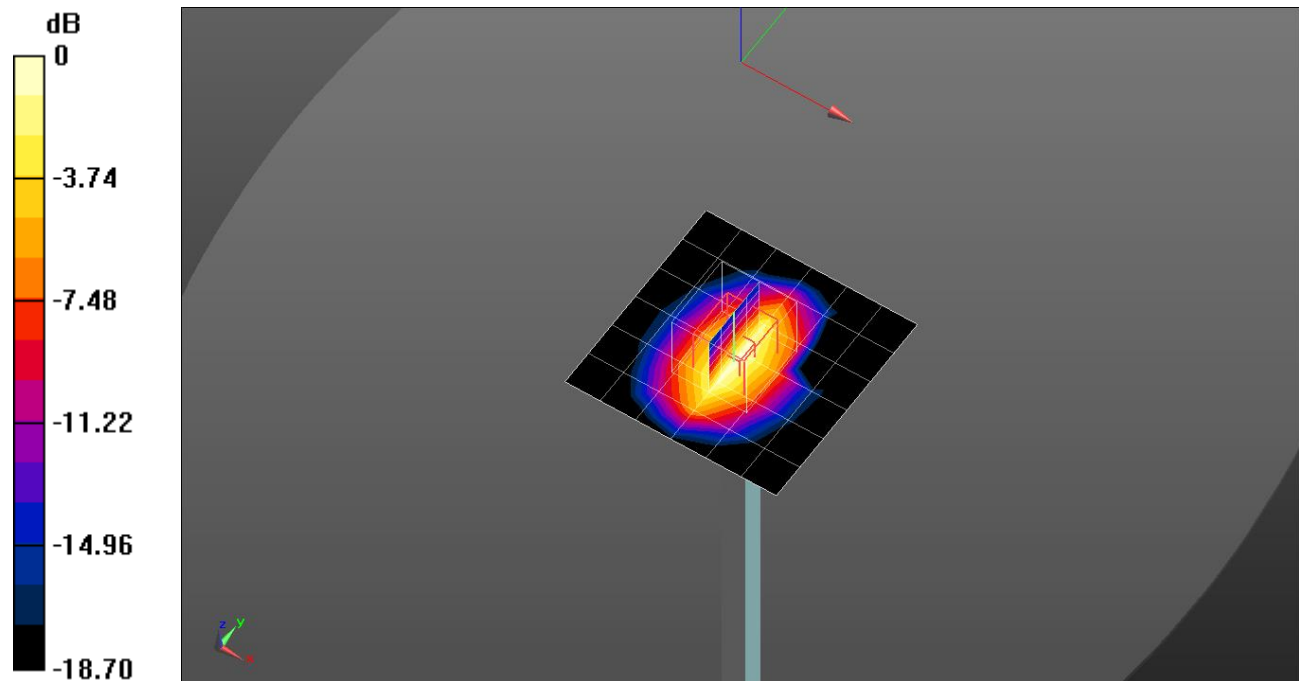


0 dB = 6.76 W/kg = 8.30 dBW/kg

20210810_SystemPerformanceCheck-D1900V2_SN5d199

Frequency: 1900 MHz; Duty Cycle: 1:1

Head/1900MHz/Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 5.40 W/kg

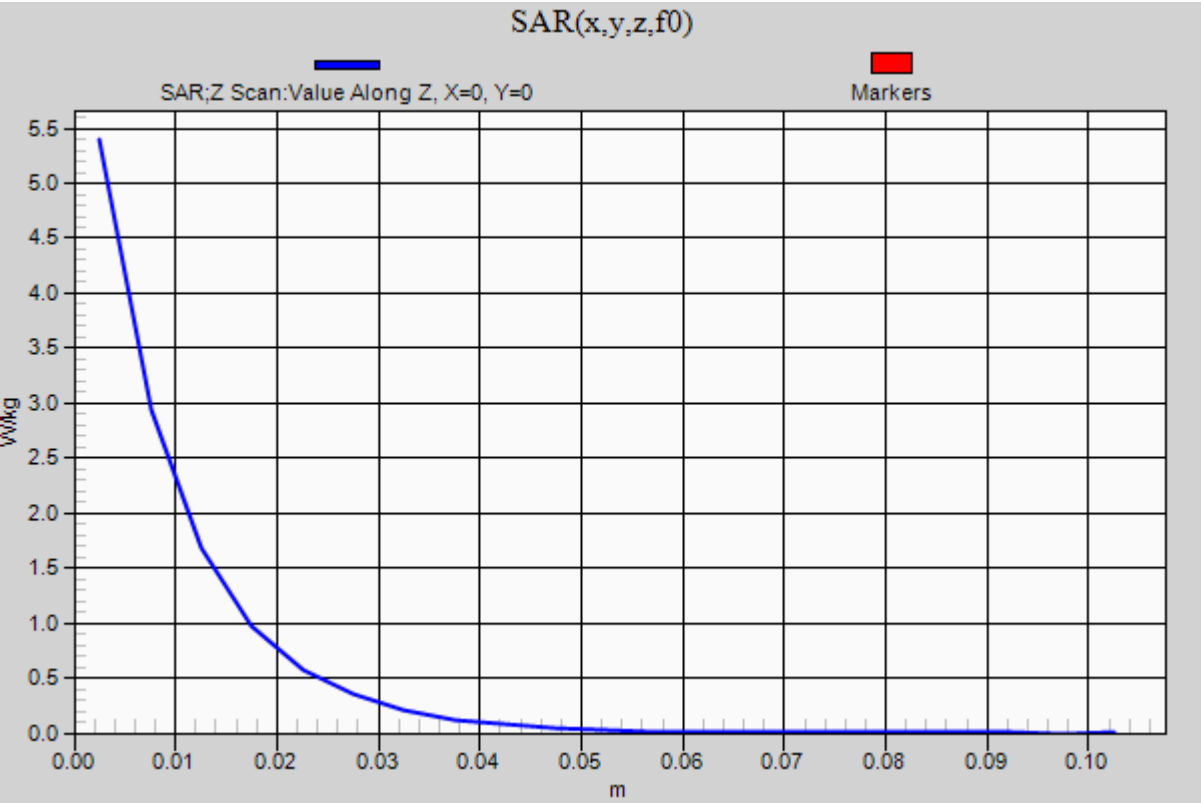

20210818_SystemPerformanceCheck-D2600V2_SN1097

Frequency: 2600 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.566$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn614; Calibrated: 2021-03-05
- Probe: EX3DV4 - SN7645; ConvF(8.11, 8.11, 8.11) @ 2600 MHz; Calibrated: 2021-04-15
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2001

Head/2600MHz/Pin=100mW/Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 6.18 W/kg


Head/2600MHz/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 64.23 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 11.9 W/kg

SAR(1 g) = 5.52 W/kg; SAR(10 g) = 2.45 W/kg


Maximum value of SAR (measured) = 7.98 W/kg

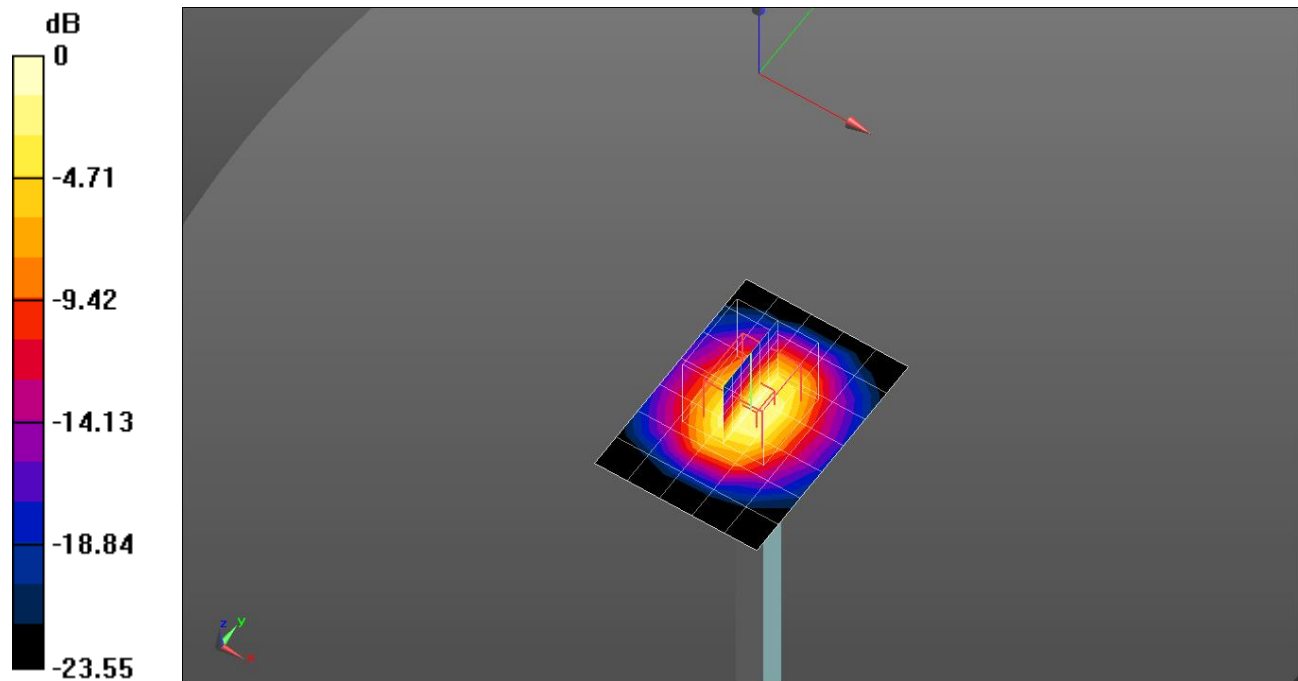

0 dB = 7.98 W/kg = 9.02 dBW/kg

20210818_SystemPerformanceCheck-D2600V2_SN1097

Frequency: 2600 MHz; Duty Cycle: 1:1

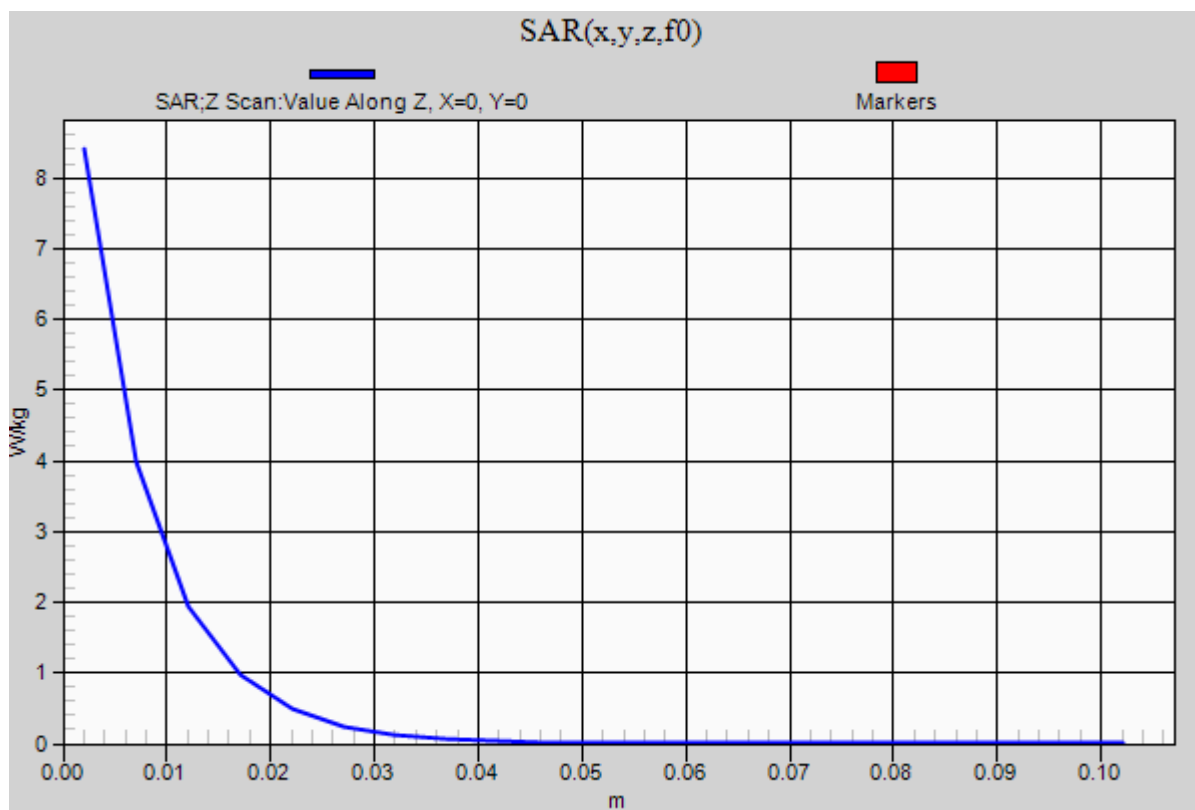Head/2600MHz/Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 8.40 W/kg

20210830_ SystemPerformanceCheck-D2600V2_SN1097

Frequency: 2600 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.976$ S/m; $\epsilon_r = 39.937$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1591; Calibrated: 2021-03-26
- Probe: EX3DV4 - SN7330; ConvF(7.54, 7.54, 7.54) @ 2600 MHz; Calibrated: 2021-01-26
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI V6.0 (20deg probe tilt) (Left); Type: QD OVA 003 AA; Serial: 2111

Head/2600MHz/Pin=100mW/Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 6.66 W/kg


Head/2600MHz/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 64.86 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 12.6 W/kg

SAR(1 g) = 5.7 W/kg; SAR(10 g) = 2.5 W/kg


Maximum value of SAR (measured) = 8.33 W/kg

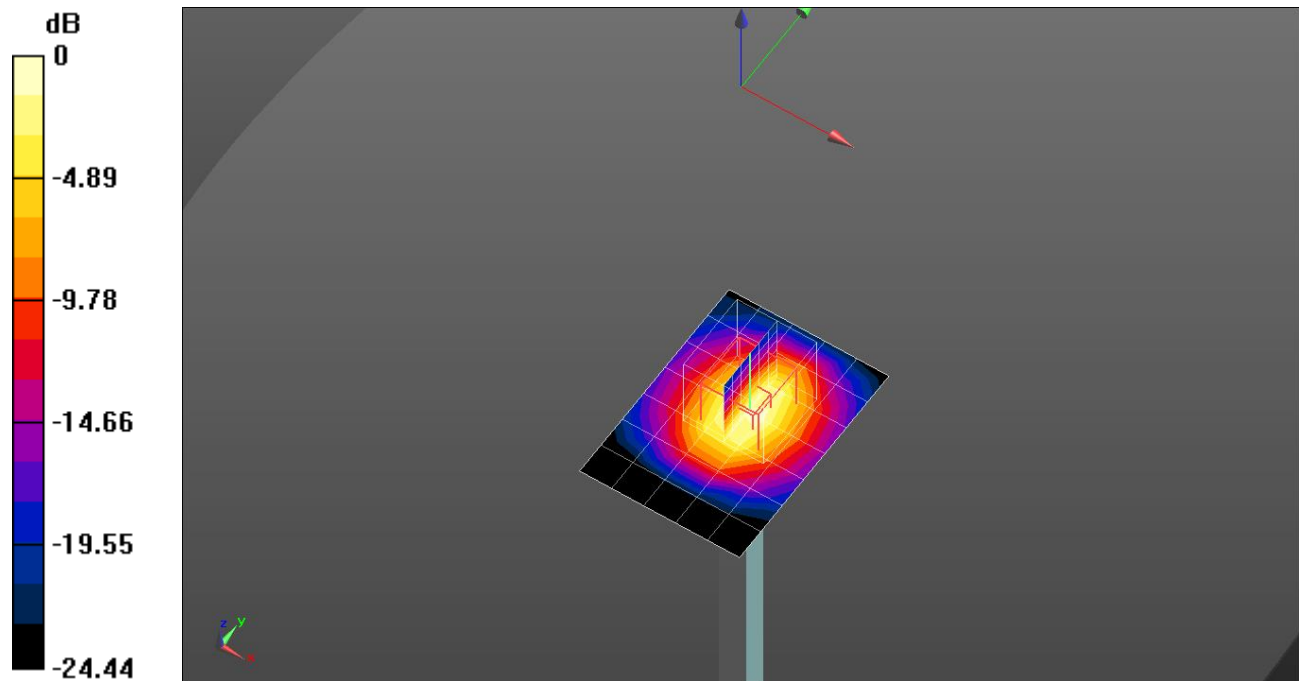

0 dB = 8.33 W/kg = 9.21 dBW/kg

20210830_ SystemPerformanceCheck-D2600V2_SN1097

Frequency: 2600 MHz; Duty Cycle: 1:1

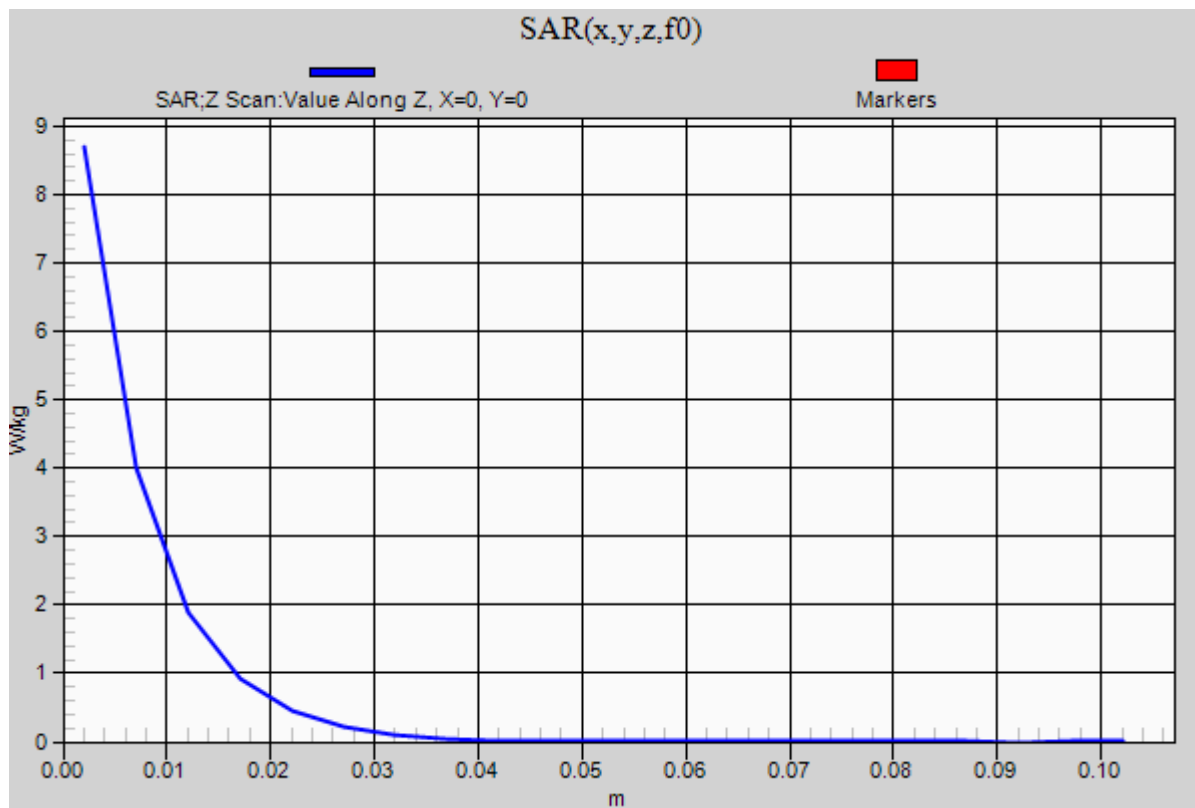Head/2600MHz/Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 8.69 W/kg

20210817_SystemPerformanceCheck-D750V3_SN1122

Frequency: 750 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.912 \text{ S/m}$; $\epsilon_r = 42.015$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1494; Calibrated: 2021-07-27
- Probe: EX3DV4 - SN7376; ConvF(10.46, 10.46, 10.46) @ 750 MHz; Calibrated: 2021-07-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V6.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1195

Head/750MHz/Pin=100mW/Area Scan (6x17x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.999 W/kg


Head/750MHz/Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 34.39 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.876 W/kg; SAR(10 g) = 0.578 W/kg


Maximum value of SAR (measured) = 1.16 W/kg

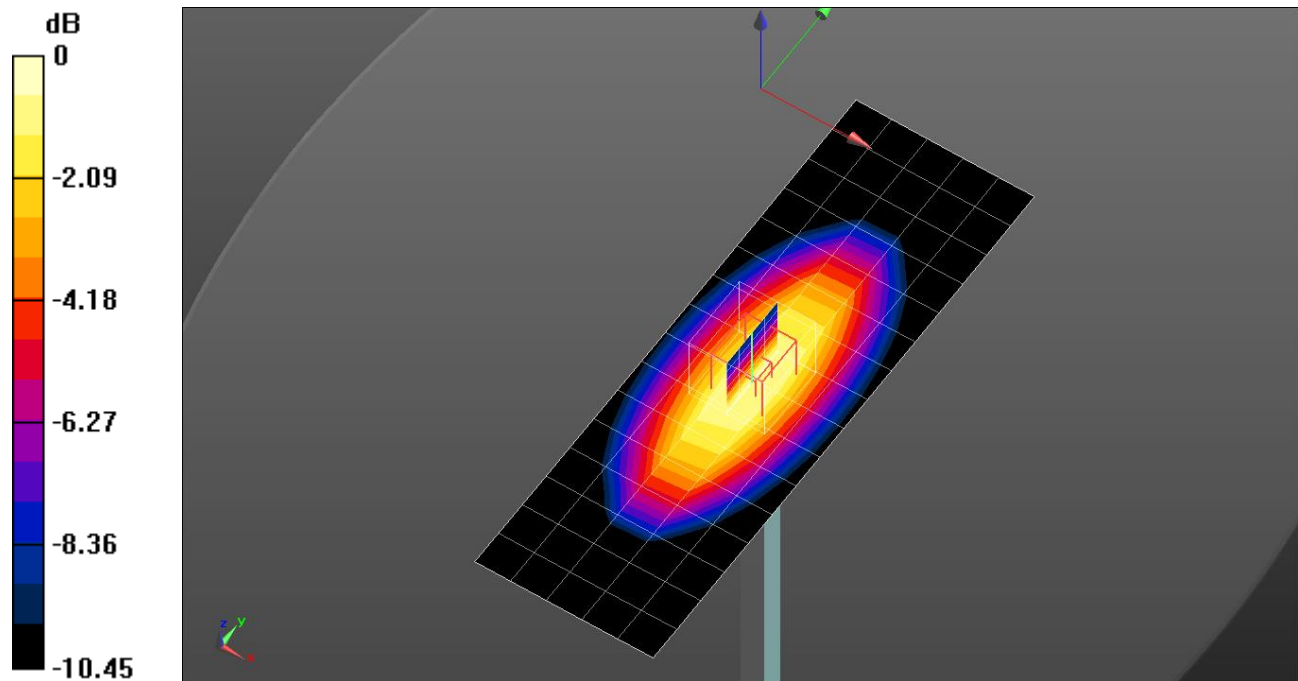

0 dB = 1.16 W/kg = 0.64 dBW/kg

20210817_SystemPerformanceCheck-D750V3_SN1122

Frequency: 750 MHz; Duty Cycle: 1:1

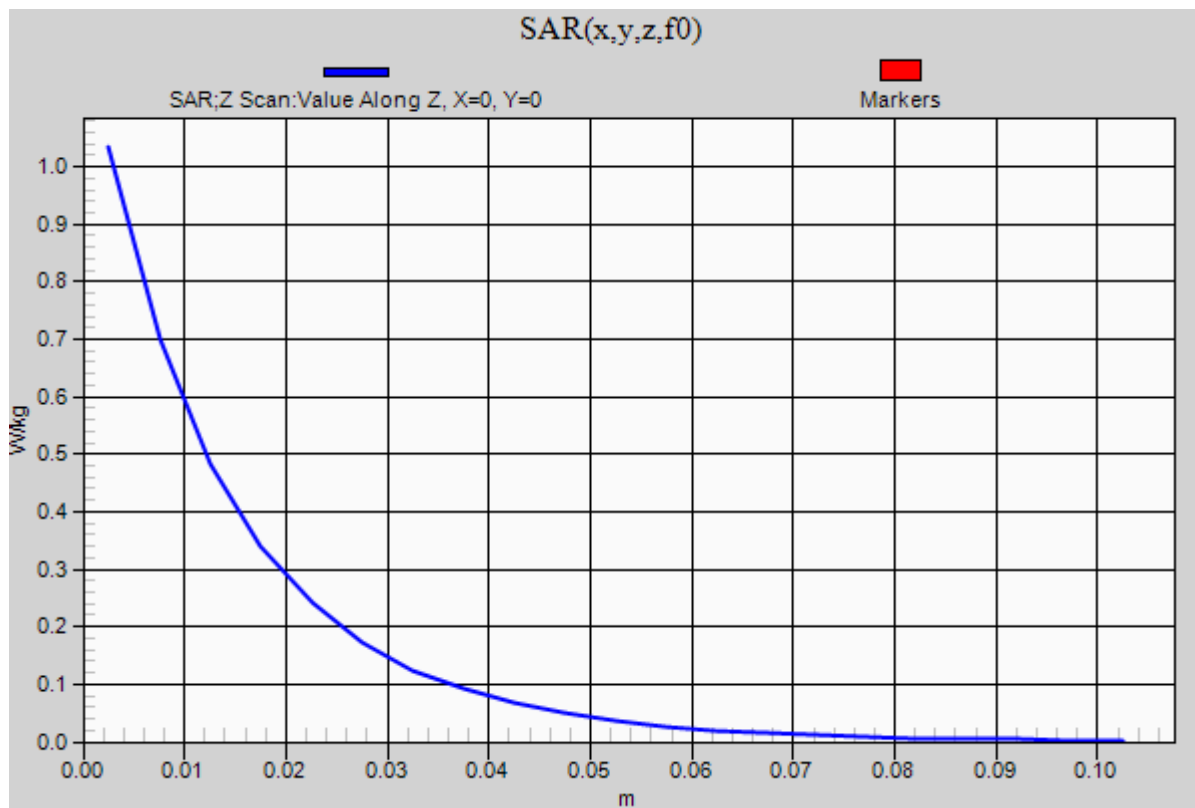Head/750MHz/Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.03 W/kg

20210817_SystemPerformanceCheck-D835V2_SN4d194

Frequency: 835 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.941 \text{ S/m}$; $\epsilon_r = 41.78$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Averaged Fast SAR: Polynomial fit
- Electronics: DAE4 Sn1494; Calibrated: 2021-07-27
- Probe: EX3DV4 - SN7376; ConvF(9.8, 9.8, 9.8) @ 835 MHz; Calibrated: 2021-07-30
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI V6.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1195

Head/835MHz/Pin=100mW/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.25 W/kg


Head/835MHz/Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.99 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.673 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

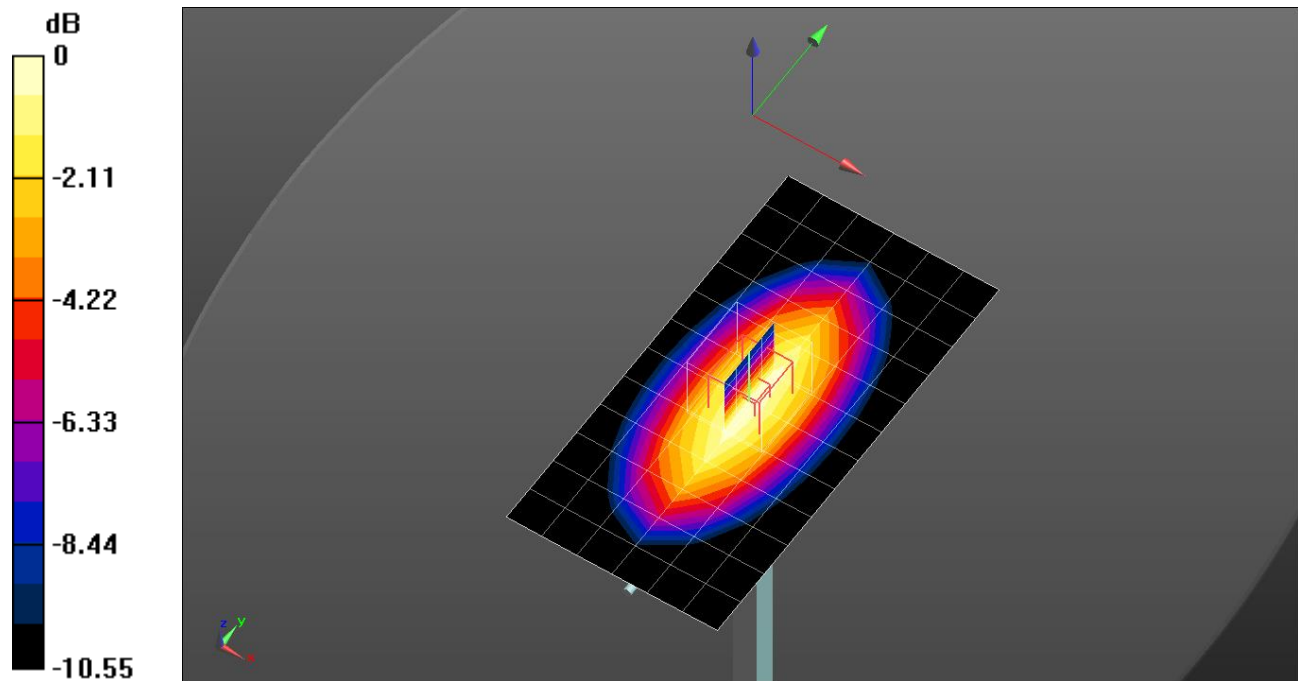

0 dB = 1.24 W/kg = 0.93 dBW/kg

20210817_SystemPerformanceCheck-D835V2_SN4d194

Frequency: 835 MHz; Duty Cycle: 1:1

Head/835MHz/Pin=100mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.29 W/kg

