

RF Cable Assembly

Specification

1. Electrical Properties :





- 1.1 Frequency Range..... DC ~ 6GHz
- 1.2 Impedance 50Ω Nominal
- 1.3 Insertion Loss.....
 - 2GHz-----1.1dB
 - 3GHz-----1.4dB
 - 4GHz-----1.7dB
 - 5GHz-----1.9dB
 - 6GHz-----2.2dB
- 1.4 VSWR..... 1.5 (max)

2. Physical Properties :

- 2.1 Cable..... φ1.13 Coaxial Cable
- 2.2 Operating Temp. -20 ~ +65
- 2.3 Storage Temp. -30 ~ +75
- 2.4 Connector..... SMA Jack Reverse
- 2.5 Connector..... HRS

CG-

REV	DATE	DESCRIPTION
X1	9/6-2006	New Issue

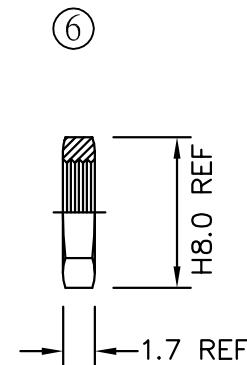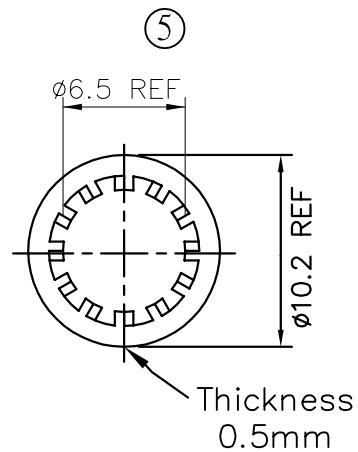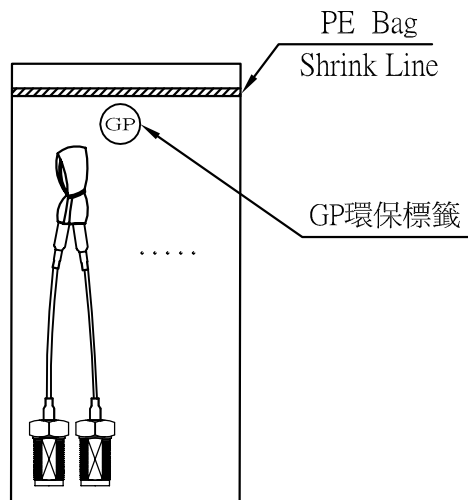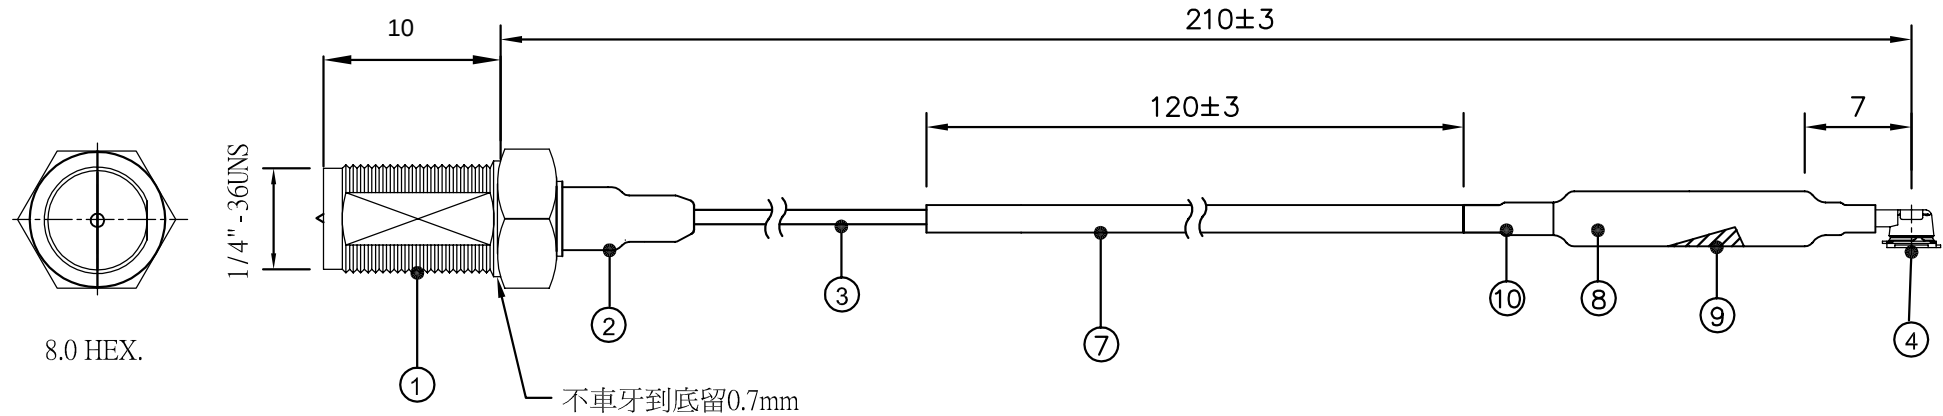

10	Tube	Heat Shrink Tube	1	
9	Core	RH 4*25*1.5	1	
8	Tube	Heat Shrink Tube	1	
7	Tube	Heat Shrink Tube	1	
6	Nut	Brass ; Gold Plated	1	
5	Washer	Brass ; Gold Plated	1	
4	Connector	HRS Connector	1	
3	Cable	Ø1.13 Cable	1	
2	Tube	Heat Shrink Tube	1	
1	Connector	SMA Straight Jack/Reverse	1	
NO	DESCRIPTION		QTY	REMARK

XX.	±3.0	APPROVED
X.	±2.0	
.X	±1.0	CHECKED
.XX	±0.5	
.XXX	±0.1	DRAWING
⊕		

CUSTOMER: 合勤科技股份有限公司

PART NO : C034-510580-A

PARTNAME: RF Cable Assembly

W.Y P/NO :

REV UNIT FILE :

X1 mm SHEET : 1/1

Wha Yu
INDUSTRIAL CO.,LTD.

華裕實業股份有限公司

THIS DRAWING, AND ITS INHERANT DESIGN CONCEPTS,
ARE THE PROPERTY OF WHA YU AND AS SUCH MAY NOT
BE COPIED, REPRODUCED, OR GIVEN TO THIRD PARTIES
WITHOUT THE WRITTEN CONSENT OF WHA YU.