

FCC REPORT

Applicant: Sky Phone LLC

Address of Applicant: 1348 Washington Av. Suite 350, Miami Beach, Florida, United States

Equipment Under Test (EUT)

Product Name: Feature Phone

Model No.: Sky F1M, SKY F1PRIME

Trade mark: SKY DEVICES

FCC ID: 2ABOSSKYF1MPRI

Applicable standards: FCC CFR Title 47 Part 15 Subpart B

Date of sample receipt: 18 Apr., 2018

Date of Test: 18 Apr., to 16 May, 2018

Date of report issued: 17 May, 2018

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	17 May, 2018	Original

Tested by:

Zora Lee

Date:

17 May, 2018

Test Engineer

Reviewed by:

Wimer Zhang

Date:

17 May, 2018

Project Engineer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST MODE.....	5
5.4 MEASUREMENT UNCERTAINTY.....	6
5.5 DESCRIPTION OF SUPPORT UNITS	6
5.6 RELATED SUBMITTAL(s) / GRANT (s).....	6
5.7 LABORATORY FACILITY	6
5.8 LABORATORY LOCATION	6
5.9 TEST INSTRUMENTS LIST.....	7
6 TEST RESULTS AND MEASUREMENT DATA.....	8
6.1 CONDUCTED EMISSION.....	8
6.2 RADIATED EMISSION	13
7 TEST SETUP PHOTO	23
8 EUT CONSTRUCTIONAL DETAILS	24

4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part 15.107	Pass
Radiated Emission	Part 15.109	Pass
<i>Remark:</i> <i>Pass: The EUT complies with the essential requirements in the standard.</i> <i>N/A: The EUT not applicable of the test item.</i>		

5 General Information

5.1 Client Information

Applicant:	Sky Phone LLC
Address of Applicant:	1348 Washington Av. Suite 350, Miami Beach, Florida, United States
Manufacturer:	Sky Phone LLC
Address:	1348 Washington Av. Suite 350, Miami Beach, Florida, United States

5.2 General Description of E.U.T.

Product Name:	Feature Phone
Model No.:	Sky F1M, SKY F1PRIME
Power supply:	Rechargeable Li-ion Battery DC3.7V-600mAh
AC adapter :	Adapter Model: SKY F1M / SKY F1 Prime Input: AC100-240V, 50/60Hz, 0.15A Output: DC 5.0V, 500mA Remark: The adapters are all the same, only difference being model name.
Remark:	Model No.: Sky F1M, SKY F1PRIME were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model for different areas: Only difference between F1M and F1 Prime is vibration, no other place different. PCBA and outlook for Sky F1M and SKY F1PRIME are the same, just the software will not run vibration function for Sky F1M, which do not have motor.

5.3 Test Mode

Operating mode	Detail description
PC mode	Keep the EUT in Downloading mode(Worst case)
Charging+Recording mode	Keep the EUT in Charging+Recording mode
Charging+Playing mode	Keep the EUT in Charging+Playing mode
FM mode	Keep the EUT in FM receiver mode

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

5.4 Measurement Uncertainty

Items	Expanded Uncertainty (Confidence of 95%)
Conducted Emission (9kHz ~ 30MHz)	2.14 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	4.24 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	4.35 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	4.44 dB (k=2)
Radiated Emission (18GHz ~ 26.5GHz)	4.56 dB (k=2)

5.5 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
DELL	PC	OPTIPLEX745	N/A	DoC
DELL	MONITOR	E178FPC	N/A	DoC
DELL	KEYBOARD	SK-8115	N/A	DoC
DELL	MOUSE	MOC5UO	N/A	DoC
LENOVO	Laptop	SL510	2847A65	DoC

5.6 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.

5.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 727551**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The Registration No. is 727551.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.8 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>


5.9 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m SAC	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	07-22-2017	07-21-2020
2	BiConiLog Antenna	SCHWARZBECK	VULB9163	CCIS0005	03-16-2018	03-15-2019
3	Horn Antenna	SCHWARZBECK	BBHA9120D	CCIS0006	03-16-2018	03-15-2019
4	Pre-amplifier (10kHz-1.3GHz)	HP	8447D	CCIS0003	03-07-2018	03-06-2019
5	Pre-amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	03-07-2018	03-06-2019
6	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP30	CCIS0023	03-07-2018	03-06-2019
7	EMI Test Receiver	Rohde & Schwarz	ESRP7	CCIS0167	03-07-2018	03-06-2019
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	N/A	N/A	CCIS0018	03-07-2018	03-06-2019
10	Coaxial Cable	N/A	N/A	CCIS0020	03-07-2018	03-06-2019

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	07-22-2017	07-21-2020
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	03-07-2018	03-06-2019
3	LISN	CHASE	MN2050D	CCIS0074	03-19-2018	03-18-2019
4	LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2017	07-20-2018
5	Coaxial Cable	CCIS	N/A	CCIS0086	03-07-2018	03-06-2019
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

6 Test results and Measurement Data


6.1 Conducted Emission

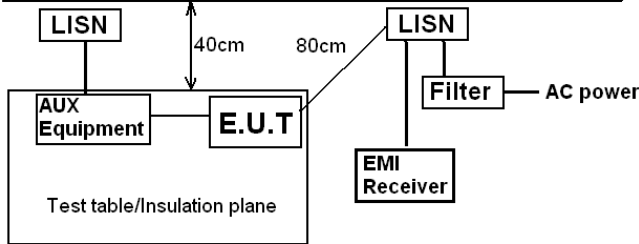Test Requirement:	FCC Part 15 B Section 15.107					
Test Method:	ANSI C63.4:2014					
Test Frequency Range:	150kHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9kHz, VBW=30kHz					
Limit:	Frequency range (MHz)	Limit (dBμV)				
		Quasi-peak		Average		
	0.15-0.5	66 to 56*		56 to 46*		
	0.5-5	56		46		
	0.5-30	60		50		
* Decreases with the logarithm of the frequency.						
Test setup:	Reference Plane  Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.					
Test environment:	Temp.:	23 °C	Humid.:	56%	Press.:	101kPa
Test Instruments:	Refer to section 5.9 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Pass					

Measurement data:

Without motor

Test Phase: Line

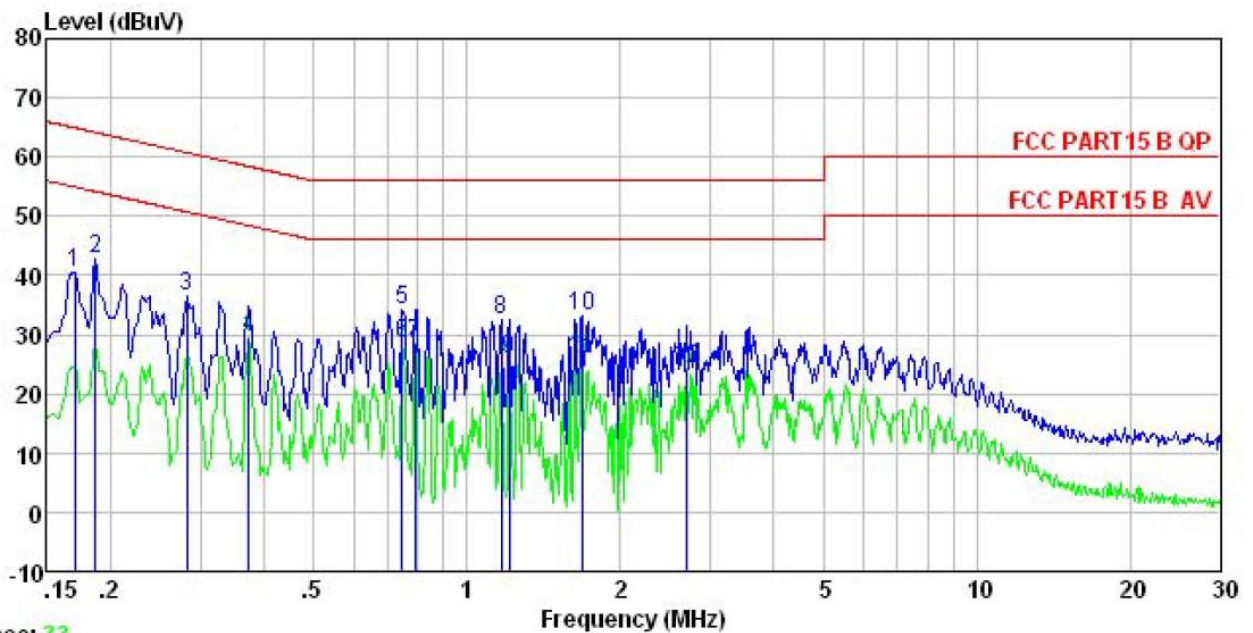


Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN LINE
 EUT : Feature Phone
 Model : SKY F1M
 Test mode : PC Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Zora
 Remark :

	Read	LISN	Cable	Limit	Over	
Freq	Level	Factor	Loss	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dB	dBuV	dB	
1	0.170	29.55	0.17	10.77	40.49	64.94 -24.45 QP
2	0.186	31.77	0.16	10.76	42.69	64.20 -21.51 QP
3	0.282	25.74	0.13	10.74	36.61	60.76 -24.15 QP
4	0.373	18.62	0.12	10.73	29.47	48.43 -18.96 Average
5	0.747	23.40	0.13	10.79	34.32	56.00 -21.68 QP
6	0.747	17.65	0.13	10.79	28.57	46.00 -17.43 Average
7	0.792	17.45	0.13	10.81	28.39	46.00 -17.61 Average
8	1.166	21.55	0.13	10.89	32.57	56.00 -23.43 QP
9	1.210	15.00	0.13	10.89	26.02	46.00 -19.98 Average
10	1.680	21.94	0.14	10.94	33.02	56.00 -22.98 QP
11	1.680	14.82	0.14	10.94	25.90	46.00 -20.10 Average
12	2.707	12.98	0.16	10.93	24.07	46.00 -21.93 Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Test Phase: Neutral

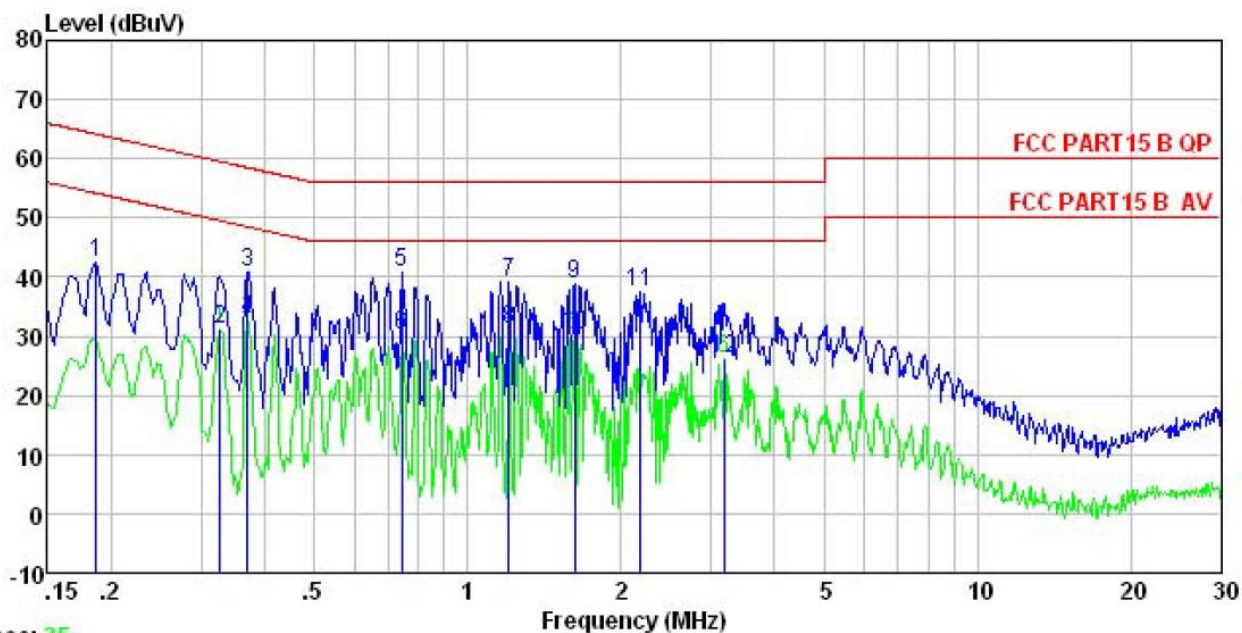

Trace: 35

Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN NEUTRAL
 EUT : Feature Phone
 Model : SKY F1M
 Test mode : PC Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Zora
 Remark :


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.186	30.68	0.94	10.76	42.38	64.20	-21.82	QP
2	0.327	19.60	0.97	10.73	31.30	49.53	-18.23	Average
3	0.369	29.19	0.97	10.73	40.89	58.52	-17.63	QP
4	0.369	21.24	0.97	10.73	32.94	48.52	-15.58	Average
5	0.743	29.18	0.97	10.79	40.94	56.00	-15.06	QP
6	0.743	18.56	0.97	10.79	30.32	46.00	-15.68	Average
7	1.203	27.39	0.97	10.89	39.25	56.00	-16.75	QP
8	1.203	19.17	0.97	10.89	31.03	46.00	-14.97	Average
9	1.619	27.03	0.98	10.93	38.94	56.00	-17.06	QP
10	1.619	18.40	0.98	10.93	30.31	46.00	-15.69	Average
11	2.178	25.44	0.98	10.95	37.37	56.00	-18.63	QP
12	3.190	14.30	0.99	10.91	26.20	46.00	-19.80	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

With motor

Test Phase: Line

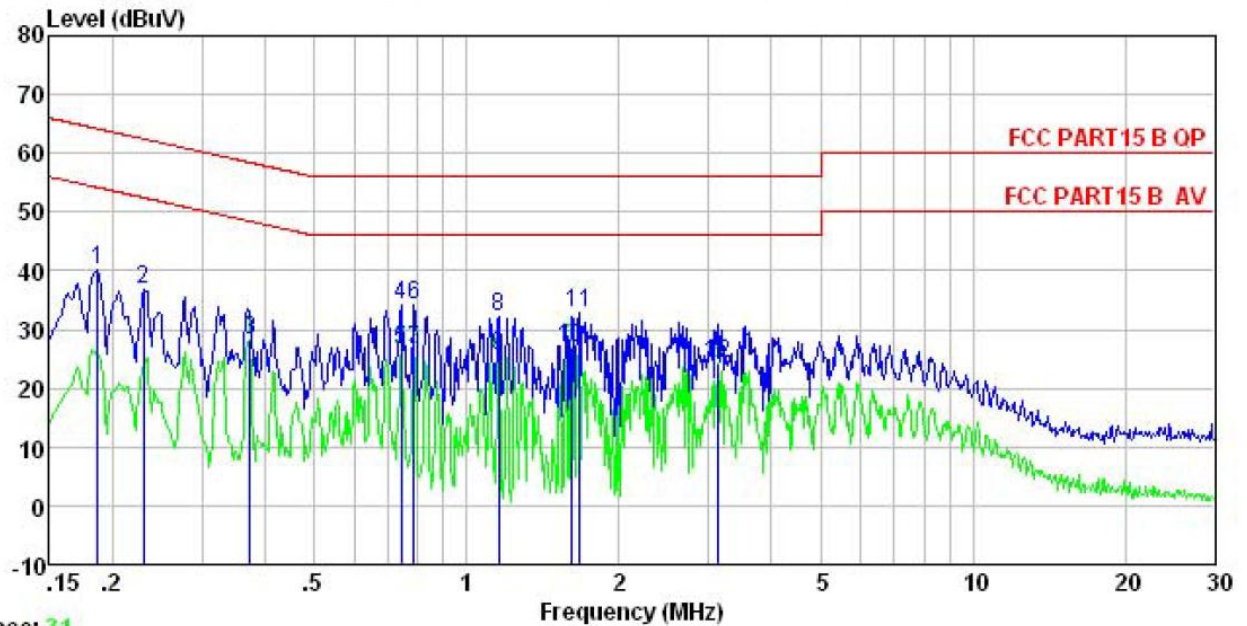

Trace: 31


Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN LINE
 EUT : Feature Phone
 Model : SKY F1PRTME
 Test mode : PC Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Zora
 Remark :

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.186	29.33	0.16	10.76	40.25	64.20	-23.95	QP
2	0.230	25.78	0.14	10.75	36.67	62.44	-25.77	QP
3	0.373	17.25	0.12	10.73	28.10	48.43	-20.33	Average
4	0.743	23.38	0.13	10.79	34.30	56.00	-21.70	QP
5	0.743	15.55	0.13	10.79	26.47	46.00	-19.53	Average
6	0.788	23.32	0.13	10.81	34.26	56.00	-21.74	QP
7	0.788	15.66	0.13	10.81	26.60	46.00	-19.40	Average
8	1.160	20.99	0.13	10.89	32.01	56.00	-23.99	QP
9	1.160	14.60	0.13	10.89	25.62	46.00	-20.38	Average
10	1.610	15.75	0.14	10.93	26.82	46.00	-19.18	Average
11	1.662	21.76	0.14	10.94	32.84	56.00	-23.16	QP
12	3.140	12.99	0.17	10.91	24.07	46.00	-21.93	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Test Phase: Neutral

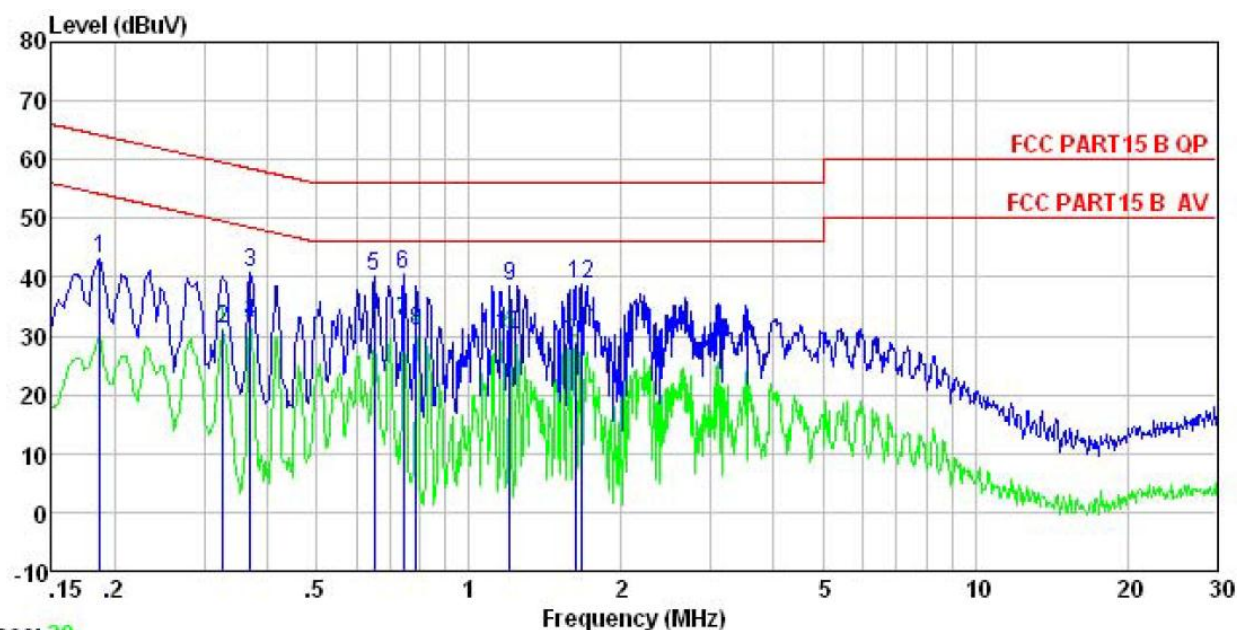

Trace: 29



Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN NEUTRAL
 EUT : Feature Phone
 Model : SKY F1PRTIME
 Test mode : PC Mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Zora
 Remark :

	Freq	Read	LISN	Cable	Level	Limit	Over	
	MHz	Level	Factor	Loss	dBuV	Line	Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.186	31.46	0.94	10.76	43.16	64.20	-21.04	QP
2	0.327	19.37	0.97	10.73	31.07	49.53	-18.46	Average
3	0.369	29.10	0.97	10.73	40.80	58.52	-17.72	QP
4	0.369	20.36	0.97	10.73	32.06	48.52	-16.46	Average
5	0.651	28.37	0.97	10.77	40.11	56.00	-15.89	QP
6	0.743	28.82	0.97	10.79	40.58	56.00	-15.42	QP
7	0.743	20.68	0.97	10.79	32.44	46.00	-13.56	Average
8	0.788	19.06	0.97	10.81	30.84	46.00	-15.16	Average
9	1.203	26.77	0.97	10.89	38.63	56.00	-17.37	QP
10	1.203	18.22	0.97	10.89	30.08	46.00	-15.92	Average
11	1.619	16.96	0.98	10.93	28.87	46.00	-17.13	Average
12	1.662	26.90	0.98	10.94	38.82	56.00	-17.18	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

6.2 Radiated Emission

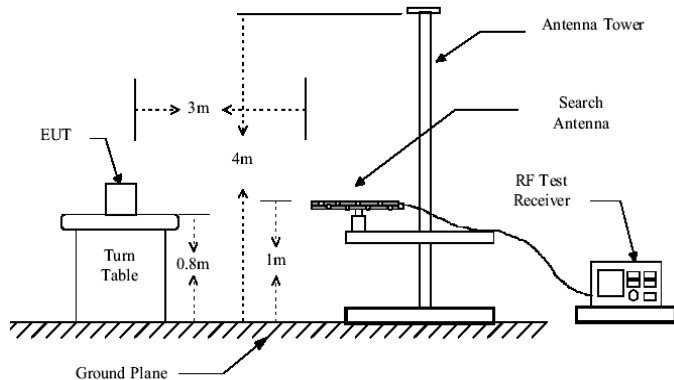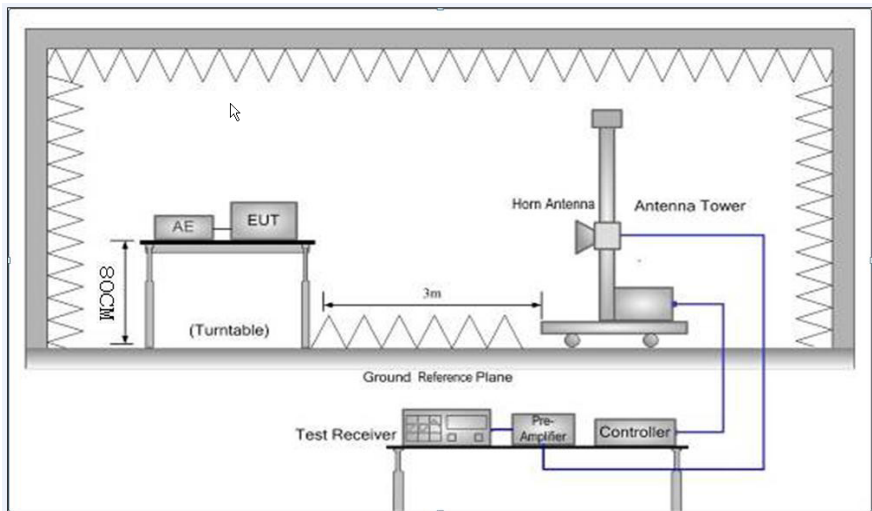Test Requirement:	FCC Part 15 B Section 15.109				
Test Method:	ANSI C63.4:2014				
Test Frequency Range:	30MHz to 6000MHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
RMS		1MHz	3MHz	Average Value	
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		54.0		Average Value
74.0			Peak Value		
Test setup:	Below 1GHz				
					
Test setup:	Above 1GHz				
					


Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Test environment:	Temp.:	25 °C	Humid.:	55%	Press.:	1 01kPa
Test Instruments:	Refer to section 5.9 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Passed					
Remark:	All of the observed value above 6GHz were the noise floor , which were no recorded					

Measurement Data:

Without motor

Below 1GHz

Test Polarization: Horizontal

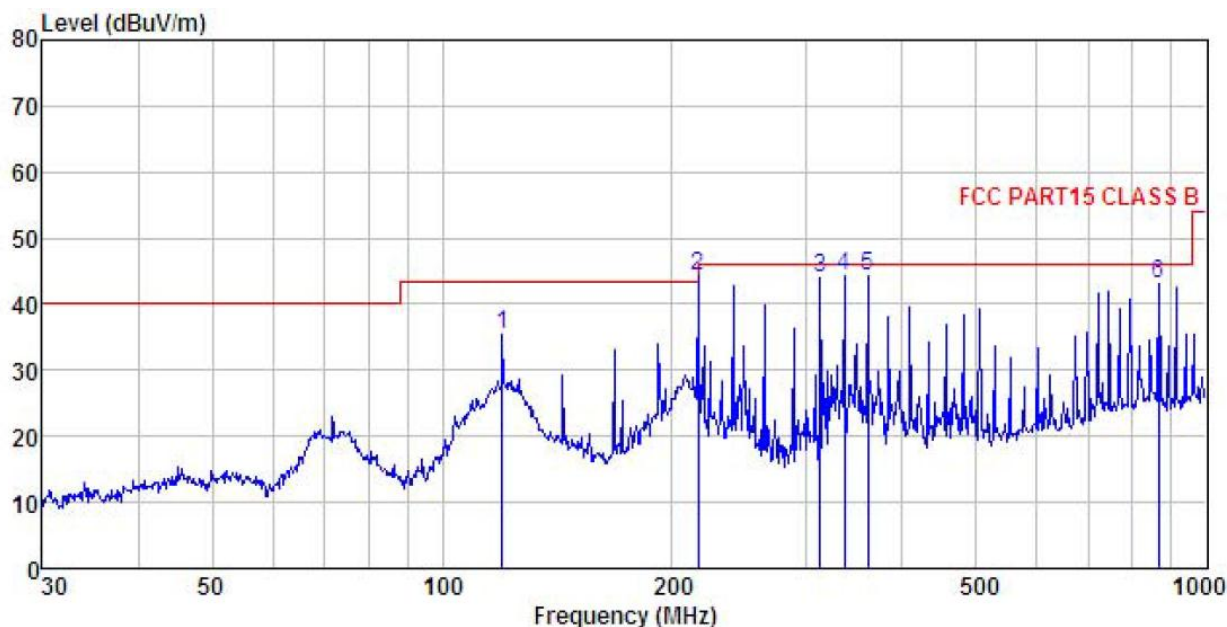


Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M2G) HORIZONTAL
 EUT : Feature Phone
 Model : SKY F1M
 Test mode : PC mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Zora
 Remark :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	119.856	52.26	10.30	2.17	29.39	35.34	43.50	-8.16	QP
2	216.024	58.92	11.30	2.85	28.73	44.34	46.00	-1.66	QP
3	312.179	55.87	13.49	2.98	28.48	43.86	46.00	-2.14	QP
4	336.035	55.65	14.10	3.05	28.53	44.27	46.00	-1.73	QP
5	360.448	55.12	14.64	3.10	28.61	44.25	46.00	-1.75	QP
6	866.088	46.36	20.60	4.04	27.96	43.04	46.00	-2.96	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test Polarization: Vertical

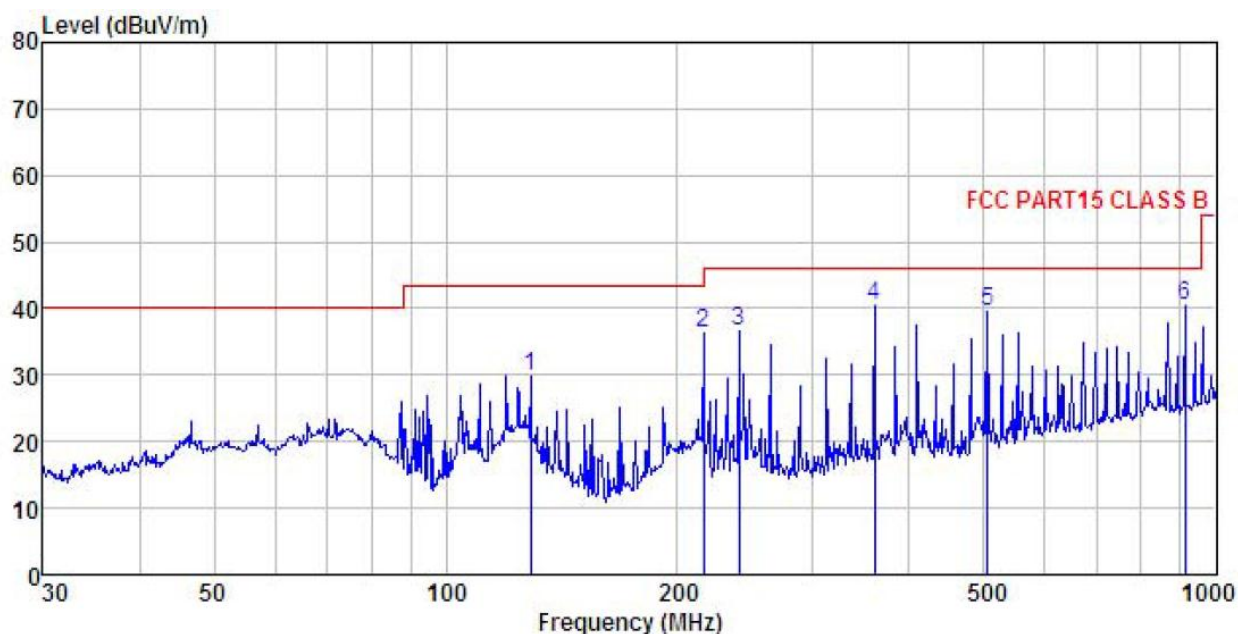

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M2G) VERTICAL
 EUT : Feature Phone
 Model : SKY F1M
 Test mode : PC mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Zora
 Remark :


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	129.015	47.95	8.94	2.27	29.33	29.83	43.50	-13.67	QP
2	216.024	50.75	11.30	2.85	28.73	36.17	46.00	-9.83	QP
3	239.987	50.60	11.85	2.82	28.59	36.68	46.00	-9.32	QP
4	360.448	51.17	14.64	3.10	28.61	40.30	46.00	-5.70	QP
5	504.706	48.05	16.70	3.65	28.97	39.43	46.00	-6.57	QP
6	912.862	43.45	21.00	3.84	27.84	40.45	46.00	-5.55	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 1GHz

Test Polarization: Horizontal

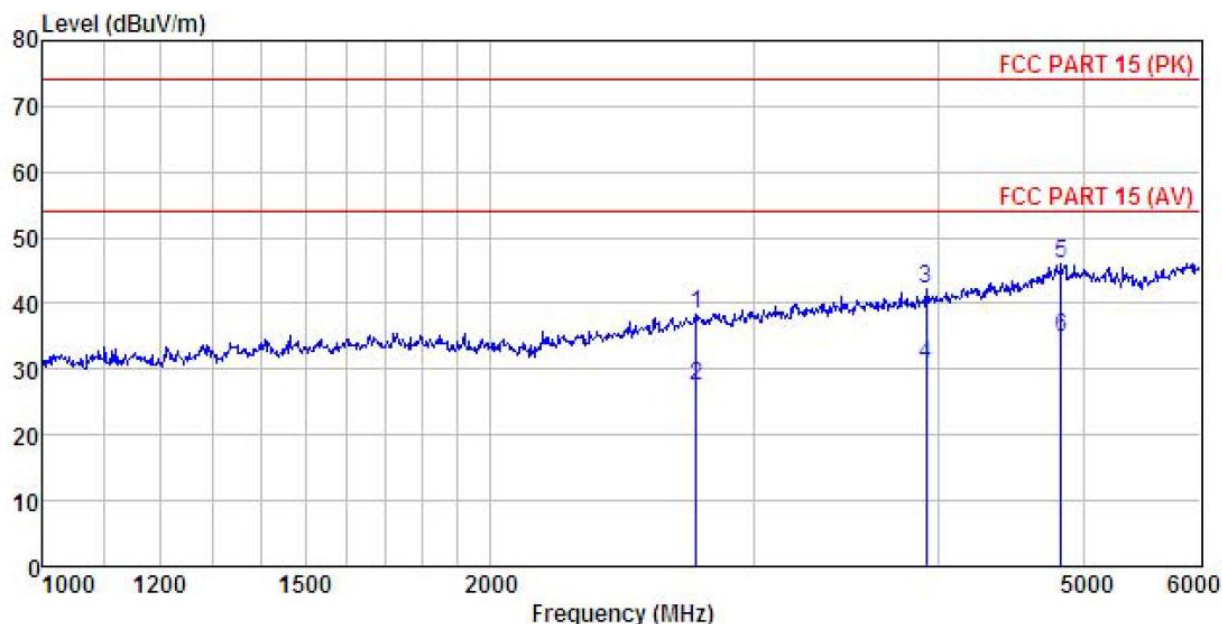


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18G) HORIZONTAL
 EUT : Feature Phone
 Model : SKY F1M
 Test mode : Charging and Recording mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Zora
 Remark :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2747.118	48.62	26.45	5.09	41.71	38.45	74.00	-35.55	Peak
2	2747.118	37.54	26.45	5.09	41.71	27.37	54.00	-26.63	Average
3	3924.004	49.75	28.28	6.10	41.80	42.33	74.00	-31.67	Peak
4	3924.004	38.25	28.28	6.10	41.80	30.83	54.00	-23.17	Average
5	4830.532	50.12	30.94	6.82	41.82	46.06	74.00	-27.94	Peak
6	4830.532	38.85	30.94	6.82	41.82	34.79	54.00	-19.21	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test Polarization: Vertical

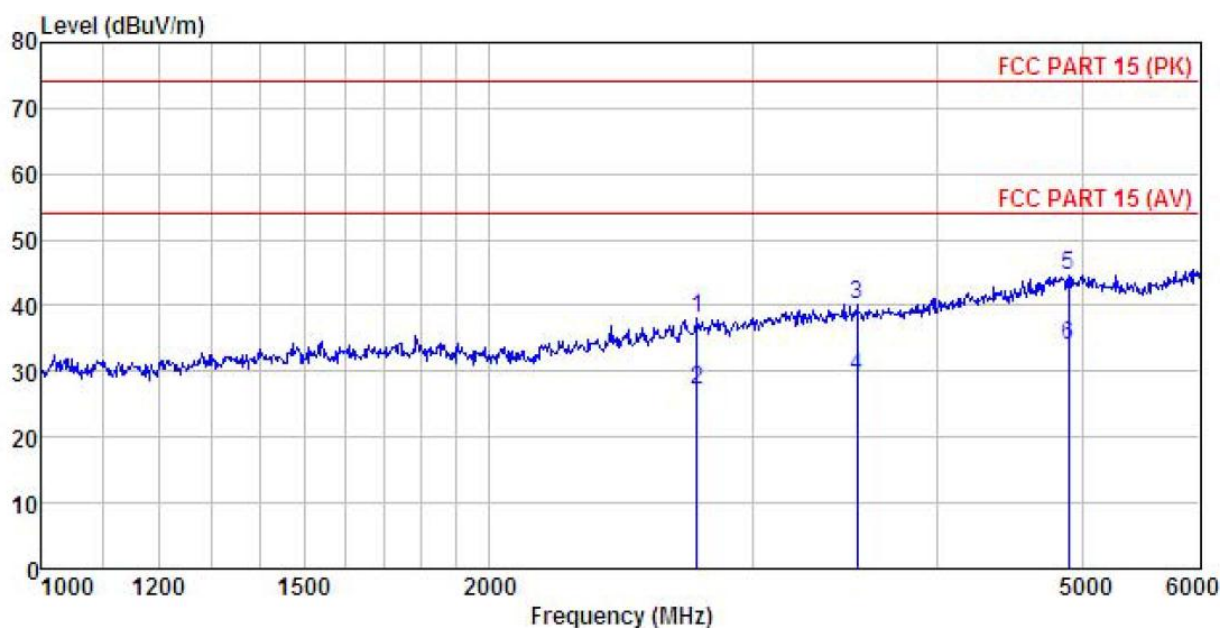

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18G) VERTICAL
 EUT : Feature Phone
 Model : SKY F1M
 Test mode : Charging and Recording mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Zora
 Remark :

	Freq	Read	Antenna	Cable	Preamp	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2756.980	48.37	26.45	5.09	41.70	38.21	74.00	-35.79 Peak
2	2756.980	37.42	26.45	5.09	41.70	27.26	54.00	-26.74 Average
3	3530.356	48.35	27.56	5.80	41.47	40.24	74.00	-33.76 Peak
4	3530.356	37.44	27.56	5.80	41.47	29.33	54.00	-24.67 Average
5	4900.271	48.26	31.28	6.87	41.85	44.56	74.00	-29.44 Peak
6	4900.271	37.57	31.28	6.87	41.85	33.87	54.00	-20.13 Average


Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

With motor

Below 1GHz

Test Polarization: Horizontal

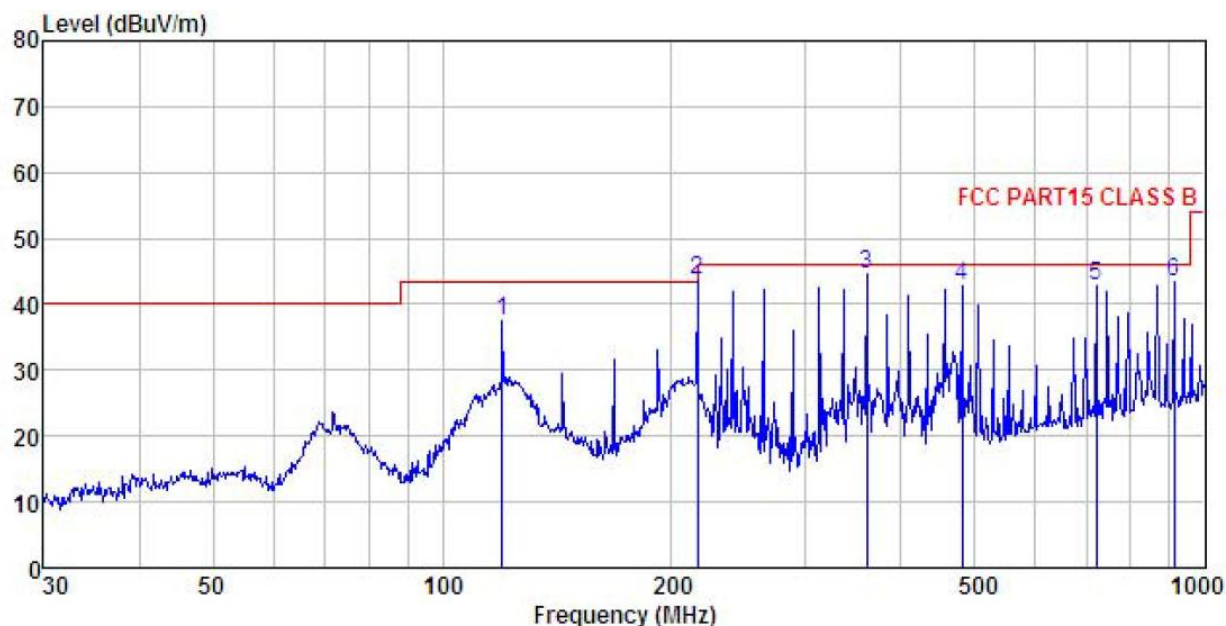


Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M2G) HORIZONTAL
 EUT : Feature Phone
 Model : SKY F1PRIME
 Test mode : PC mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Zora
 Remark :

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dB	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	119.856	54.55	10.30	2.17	29.39	37.63	43.50	-5.87	QP
2	216.024	58.17	11.30	2.85	28.73	43.59	46.00	-2.41	QP
3	360.448	55.45	14.64	3.10	28.61	44.58	46.00	-1.42	QP
4	480.528	52.52	15.78	3.46	28.92	42.84	46.00	-3.16	QP
5	721.726	47.43	19.58	4.26	28.58	42.69	46.00	-3.31	QP
6	912.862	46.36	21.00	3.84	27.84	43.36	46.00	-2.64	QP

Remark:

3. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test Polarization: Vertical

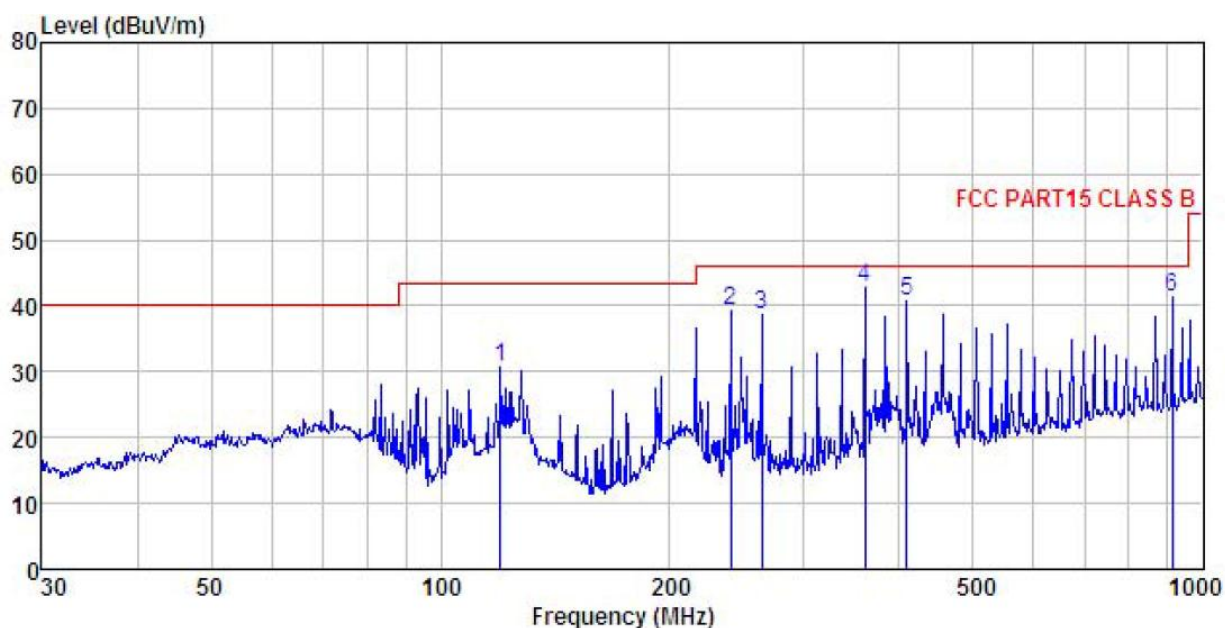

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M2G) VERTICAL
 EUT : Feature Phone
 Model : SKY F1PRIME
 Test mode : PC mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Zora
 Remark :


	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	119.856	47.65	10.30	2.17	29.39	30.73	43.50	-12.77 QP
2	239.987	53.07	11.85	2.82	28.59	39.15	46.00	-6.85 QP
3	263.819	51.79	12.43	2.85	28.51	38.56	46.00	-7.44 QP
4	360.448	53.58	14.64	3.10	28.61	42.71	46.00	-3.29 QP
5	408.946	51.25	15.05	3.10	28.80	40.60	46.00	-5.40 QP
6	912.862	44.39	21.00	3.84	27.84	41.39	46.00	-4.61 QP

Remark:

3. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 1GHz

Test Polarization: Horizontal

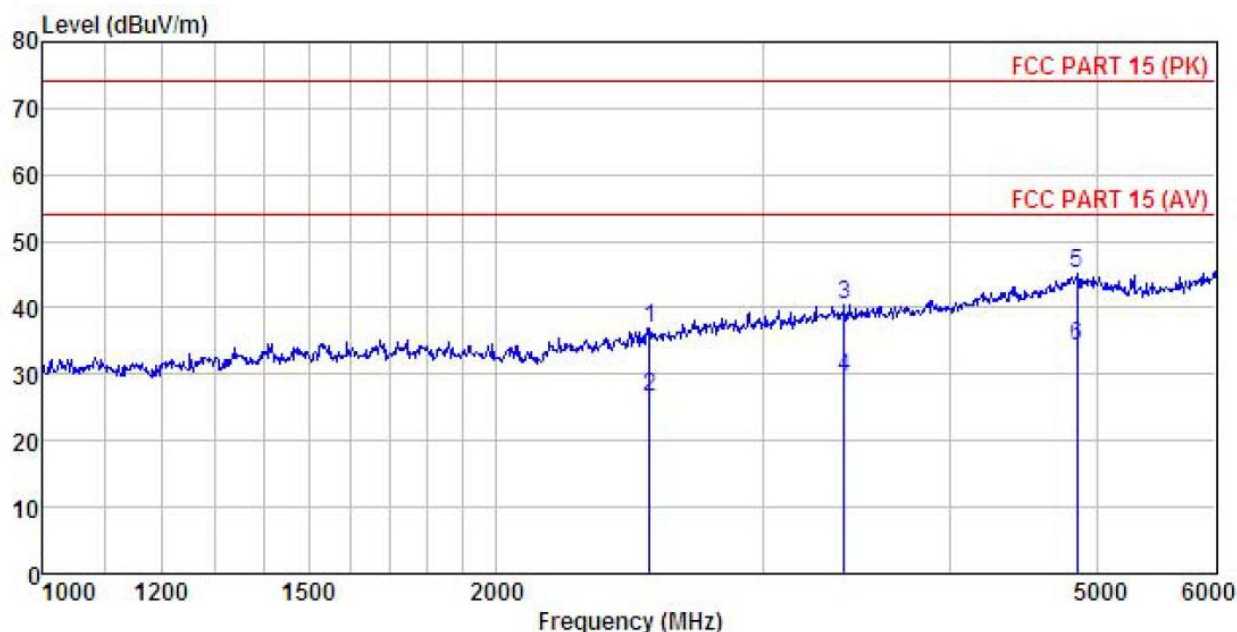


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18G) HORIZONTAL
 EUT : Feature Phone
 Model : SKY FIPRIME
 Test mode : Charging and Recording mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Zora
 Remark :

	Read	Antenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2525.249	48.07	25.80	4.85	41.90	36.82	74.00	-37.18 Peak
2	2525.249	37.86	25.80	4.85	41.90	26.61	54.00	-27.39 Average
3	3399.987	48.76	27.44	5.62	41.35	40.47	74.00	-33.53 Peak
4	3399.987	37.89	27.44	5.62	41.35	29.60	54.00	-24.40 Average
5	4856.567	49.02	31.11	6.84	41.83	45.14	74.00	-28.86 Peak
6	4856.567	38.14	31.11	6.84	41.83	34.26	54.00	-19.74 Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Test Polarization: Vertical

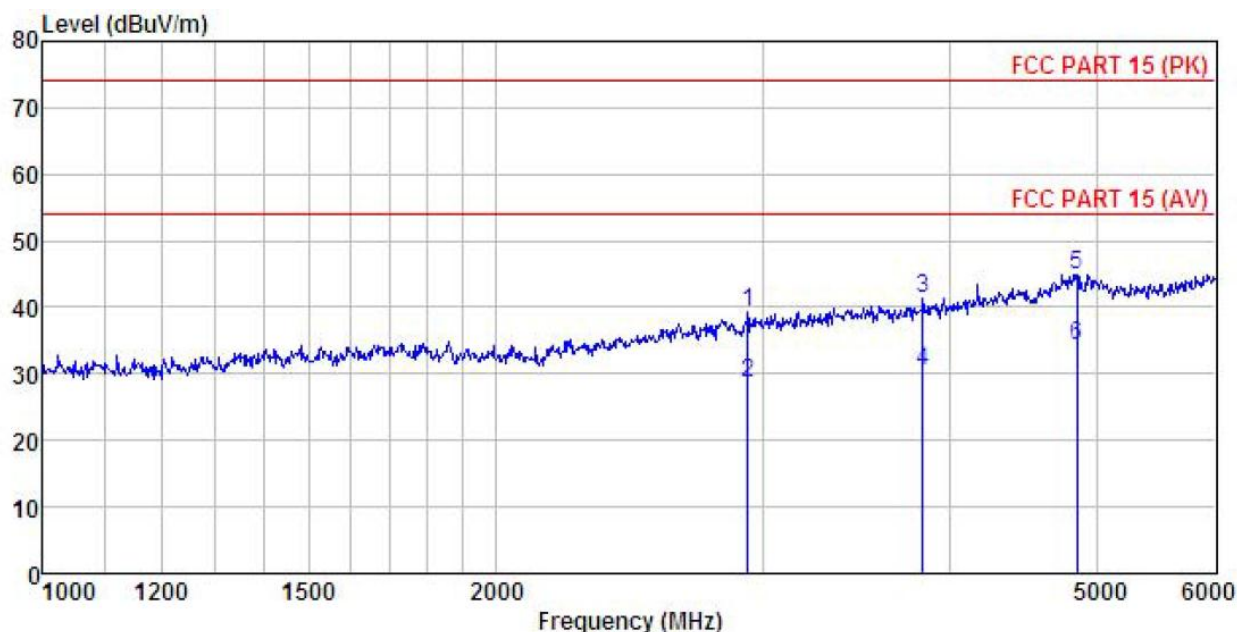

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18G) VERTICAL
 EUT : Feature Phone
 Model : SKY FIPRIME
 Test mode : Charging and Recording mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Zora
 Remark :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2935.411	48.51	27.00	5.29	41.55	39.25	74.00	-34.75	Peak
2	2935.411	37.84	27.00	5.29	41.55	28.58	54.00	-25.42	Average
3	3833.659	48.88	28.12	6.09	41.79	41.30	74.00	-32.70	Peak
4	3833.659	37.91	28.12	6.09	41.79	30.33	54.00	-23.67	Average
5	4856.567	48.76	31.11	6.84	41.83	44.88	74.00	-29.12	Peak
6	4856.567	38.17	31.11	6.84	41.83	34.29	54.00	-19.71	Average

Remark:

3. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.