



Test report No. : 10195552-001H-A-R1  
Page : 1 of 58  
Issued date : March 20, 2014  
Revised date : March 25, 2014  
FCC ID : N6C-SDMAN

This test report only includes WLAN test data with new antenna, and the module will be controlled not to use Bluetooth function and 802.11n-HT40 mode by software of host device.

# **RADIO TEST REPORT**

**Test Report No. : 10195552-001H-A-R1**

**Applicant** : silex technology, Inc.  
**Type of Equipment** : SDIO Wireless Module  
**Model No.** : SX-SDMAN  
**FCC ID** : N6C-SDMAN  
**Test regulation** : **FCC Part 15 Subpart C: 2013**  
(Permissive Change Class II Application)  
**\*Conducted emission and Radiated Spurious Emission**  
**test only**  
**Test Result** : **Complied**

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This report is a revised version of 10195552-001H-A. 10195552-001H-A is replaced with this report.

**Date of test:** February 19 to March 5, 2014

**Representative test engineer:**

*T. Shimada*

Takumi Shimada

Engineer of WiSE Japan,  
UL Verification Service

**Approved by:**

*T. Hatake*

Takahiro Hatakeda

Leader of WiSE Japan,  
UL Verification Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.  
\*As for the range of Accreditation in NVLAP, you may refer to the WEB address,  
<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429



| <b>CONTENTS</b>                                                     | <b>PAGE</b> |
|---------------------------------------------------------------------|-------------|
| <b>SECTION 1: Customer information.....</b>                         | <b>4</b>    |
| <b>SECTION 2: Equipment under test (E.U.T.).....</b>                | <b>4</b>    |
| <b>SECTION 3: Test specification, procedures &amp; results.....</b> | <b>7</b>    |
| <b>SECTION 4: Operation of E.U.T. during testing.....</b>           | <b>10</b>   |
| <b>SECTION 5: Conducted Emission.....</b>                           | <b>14</b>   |
| <b>SECTION 6: Radiated Spurious Emission .....</b>                  | <b>15</b>   |
| <b>APPENDIX 1: Data of EMI test.....</b>                            | <b>16</b>   |
| Conducted Emission .....                                            | 16          |
| Radiated Spurious Emission .....                                    | 18          |
| <b>APPENDIX 2: Test instruments .....</b>                           | <b>46</b>   |
| <b>APPENDIX 3: Photographs of test setup.....</b>                   | <b>48</b>   |
| Conducted Emission .....                                            | 48          |
| Radiated Spurious Emission .....                                    | 50          |
| Worst Case Position .....                                           | 54          |

## **SECTION 1: Customer information**

Company Name : silex technology, Inc.  
Address : 2-3-1 Hikaridai, Seika-cho, Kyoto 619-0237, Japan  
Telephone Number : +81-774-98-3878  
Facsimile Number : +81-774-98-3758  
Contact Person : Toshiro Kometani

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : SDIO Wireless Module  
Model No. : SX-SDMAN  
Serial No. : Refer to Section 4, Clause 4.2  
Rating : DC3.3V  
Receipt Date of Sample : January 18, 2014  
Country of Mass-production : Japan  
Condition of EUT : Production model  
Modification of EUT : No Modification by the test lab

## 2.2 Product Description

Model No: SX-SDMAN (referred to as the EUT in this report) is the SDIO Wireless Module.

### General Specification

Clock frequency(ies) in the system : 26MHz

### Radio Specification

Radio Type : Transceiver  
Method of Frequency Generation : Synthesizer  
Power Supply (inner) : DC1.2V

### Specification of Wireless LAN (IEEE802.11b/g/a/n-20/n-40)

| Type of radio          | IEEE802.11b                                                                                                   | IEEE802.11g                                  | IEEE802.11a                        | IEEE802.11n<br>(20 M band)                              | IEEE802.11n<br>(40 M band)           |
|------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------|------------------------------------|---------------------------------------------------------|--------------------------------------|
| Frequency of operation | 2412-2462MHz                                                                                                  | 2412-2462MHz                                 | 5180-5320MHz *1)<br>5745-5825MHz   | 2412 - 2462MHz<br>5180-5320MHz *1)<br>5745-5825MHz      | 5190 - 5310MHz *2)<br>5755 - 5795MHz |
| Type of modulation     | DSSS<br>(CCK, DQPSK,<br>DBPSK)                                                                                | OFDM-CCK<br>(64QAM,<br>16QAM, QPSK,<br>BPSK) | OFDM<br>(64QAM, 16QAM, QPSK, BPSK) |                                                         |                                      |
| Channel spacing        | 5MHz                                                                                                          |                                              | 20MHz                              | <u>2.4GHz band</u><br>5MHz<br><u>5GHz band</u><br>20MHz | 40MHz                                |
| Antenna type           | Mini-Nanoblade antenna: Laird Technologies<br>Stand Alone antenna: Molex                                      |                                              |                                    |                                                         |                                      |
| Antenna Gain           | Mini-Nanoblade antenna: 2.5dBi (2.4GHz), 4.8dBi (5GHz)<br>Stand Alone antenna: 3.0dBi (2.4GHz), 4.6dBi (5GHz) |                                              |                                    |                                                         |                                      |
| Antenna Connector type | U.FL Alternative connector                                                                                    |                                              |                                    |                                                         |                                      |

\*1) 5180 - 5320MHz is applied for other test report.(Test Report No.: 1019552-001H-B)

\*2) 5190 - 5310MHz is applied for other test report.(Test Report No.: 1019552-001H-B)

### Specification of Bluetooth (Ver.4.0 + EDR)

| Type of radio          | Bluetooth                                                                                                     |
|------------------------|---------------------------------------------------------------------------------------------------------------|
| Frequency of Operation | 2402-2480MHz                                                                                                  |
| Type of Modulation     | FHSS                                                                                                          |
| Channel spacing        | 1MHz                                                                                                          |
| Antenna type           | Mini-Nanoblade antenna: Laird Technologies<br>Stand Alone antenna: Molex                                      |
| Antenna Gain           | Mini-Nanoblade antenna: 2.5dBi (2.4GHz), 4.8dBi (5GHz)<br>Stand Alone antenna: 3.0dBi (2.4GHz), 4.6dBi (5GHz) |
| Antenna Connector Type | U.FL Alternative connector                                                                                    |

### Specification of Low Energy (Ver.4.0 + EDR/LE Dual mode)

| Type of radio          | Low Energy                                                                                                    |
|------------------------|---------------------------------------------------------------------------------------------------------------|
| Frequency of Operation | 2402-2480MHz                                                                                                  |
| Type of Modulation     | DSSS                                                                                                          |
| Channel spacing        | 2MHz                                                                                                          |
| Antenna type           | Mini-Nanoblade antenna: Laird Technologies<br>Stand Alone antenna: Molex                                      |
| Antenna Gain           | Mini-Nanoblade antenna: 2.5dBi (2.4GHz), 4.8dBi (5GHz)<br>Stand Alone antenna: 3.0dBi (2.4GHz), 4.6dBi (5GHz) |
| Antenna Connector Type | U.FL Alternative connector                                                                                    |

\*This test report applies for Wireless LAN (IEEE802.11b/g/a/n-20/n-40).

Wireless LAN and Bluetooth do not transmit simultaneously.

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

<Contents of the change from original model>

Test Report Number of original model is 32IE0154-HO-01-A-R1.

Specification was changed from the original model as follows:

\*Antenna of the EUT was modified. The radio specification is identical to the original.

Therefore only Conducted emission test and Radiated Spurious Emission test were performed in this report.

Additionally, only the information of modified antenna is described in this report.

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart C: 2013, final revised on September 30, 2013 and effective October 30, 2013

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.207 Conducted limits  
Section 15.247 Operation within the bands 902-928MHz,  
2400-2483.5MHz, and 5725-5850MHz

### **3.2 Procedures and results**

| Item                                       | Test Procedure                                                                                                                 | Specification                                                       | Worst margin                                                             | Results  | Remarks  |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------------------------------------------------------|----------|----------|
| Conducted Emission                         | FCC: ANSI C63.4:2003<br>7. AC powerline Conducted Emission measurements<br>-----<br>IC: RSS-Gen 7.2.4                          | FCC: Section 15.207<br>-----<br>IC: RSS-Gen 7.2.4                   | <b>QP</b><br>17.8dB, 0.16483MHz, L<br><b>AV</b><br>22.9dB, 0.41100MHz, N | Complied | -        |
| Spurious Emission<br>Restricted Band Edges | FCC: "Guidance on Measurement of<br>Digital Transmission Systems<br>Operating under Section15.247"<br>-----<br>IC: RSS-Gen 4.9 | FCC: Section15.247(d)<br>-----<br>IC: RSS-210 A8.5<br>RSS-Gen 7.2.3 | 4.6dB<br>2390.000MHz, AV, Hori.                                          | Complied | Radiated |

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

\* In case any questions arise about test procedure, ANSI C63.4: 2003 is also referred.

#### **FCC 15.31 (e)**

The RF Module has own regulator.

The RF Module is constantly provided voltage through own regulator regardless of input voltage (DC3.3V).

Therefore, this EUT complies with the requirement.

#### **FCC Part 15.203/212 Antenna requirement**

The EUT has a unique antenna connector (U.FL).

Therefore the equipment complies with the requirement of 15.203/212.

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

#### EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

| Test room<br>(semi-anechoic chamber) | Conducted emission<br>(+dB) |
|--------------------------------------|-----------------------------|
|                                      | 150kHz-30MHz                |
| No.1                                 | 3.5dB                       |
| No.2                                 | 3.5dB                       |
| No.3                                 | 3.6dB                       |
| No.4                                 | 3.5dB                       |

| Test room<br>(semi-anechoic chamber) | Radiated emission |                  |                 |                |                 |                   |                   |
|--------------------------------------|-------------------|------------------|-----------------|----------------|-----------------|-------------------|-------------------|
|                                      | (3m*)(+dB)        |                  |                 |                | (1m*)(+dB)      |                   | (0.5m*)(+dB)      |
|                                      | 9kHz<br>-30MHz    | 30MHz<br>-300MHz | 300MHz<br>-1GHz | 1GHz<br>-10GHz | 10GHz<br>-18GHz | 18GHz<br>-26.5GHz | 26.5GHz<br>-40GHz |
| No.1                                 | 4.0dB             | 5.1dB            | 5.0dB           | 5.1dB          | 6.0dB           | 4.9dB             | 4.3dB             |
| No.2                                 | 3.9dB             | 5.2dB            | 5.0dB           | 4.9dB          | 5.9dB           | 4.7dB             | 4.2dB             |
| No.3                                 | 4.3dB             | 5.1dB            | 5.2dB           | 5.2dB          | 6.0dB           | 4.8dB             | 4.2dB             |
| No.4                                 | 4.6dB             | 5.2dB            | 5.0dB           | 5.2dB          | 6.0dB           | 5.7dB             | 4.2dB             |

\*3m/1m/0.5m = Measurement distance

#### Conducted Emission test

The data listed in this test report has enough margin, more than the site margin.

#### Radiated emission test(3m)

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

### 3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. \*NVLAP Lab. code: 200572-0  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999 Facsimile : +81 596 24 8124

|                               | FCC<br>Registration<br>Number | IC Registration<br>Number | Width x Depth x<br>Height (m) | Size of<br>reference ground plane (m) /<br>horizontal conducting plane | Other<br>rooms              |
|-------------------------------|-------------------------------|---------------------------|-------------------------------|------------------------------------------------------------------------|-----------------------------|
| No.1 semi-anechoic<br>chamber | 313583                        | 2973C-1                   | 19.2 x 11.2 x 7.7m            | 7.0 x 6.0m                                                             | No.1 Power<br>source room   |
| No.2 semi-anechoic<br>chamber | 655103                        | 2973C-2                   | 7.5 x 5.8 x 5.2m              | 4.0 x 4.0m                                                             | -                           |
| No.3 semi-anechoic<br>chamber | 148738                        | 2973C-3                   | 12.0 x 8.5 x 5.9m             | 6.8 x 5.75m                                                            | No.3<br>Preparation<br>room |
| No.3 shielded room            | -                             | -                         | 4.0 x 6.0 x 2.7m              | N/A                                                                    | -                           |
| No.4 semi-anechoic<br>chamber | 134570                        | 2973C-4                   | 12.0 x 8.5 x 5.9m             | 6.8 x 5.75m                                                            | No.4<br>Preparation<br>room |
| No.4 shielded room            | -                             | -                         | 4.0 x 6.0 x 2.7m              | N/A                                                                    | -                           |
| No.5 semi-anechoic<br>chamber | -                             | -                         | 6.0 x 6.0 x 3.9m              | 6.0 x 6.0m                                                             | -                           |
| No.6 shielded<br>room         | -                             | -                         | 4.0 x 4.5 x 2.7m              | 4.0 x 4.5 m                                                            | -                           |
| No.6 measurement<br>room      | -                             | -                         | 4.75 x 5.4 x 3.0m             | 4.75 x 4.15 m                                                          | -                           |
| No.7 shielded room            | -                             | -                         | 4.7 x 7.5 x 2.7m              | 4.7 x 7.5m                                                             | -                           |
| No.8 measurement<br>room      | -                             | -                         | 3.1 x 5.0 x 2.7m              | N/A                                                                    | -                           |
| No.9 measurement<br>room      | -                             | -                         | 8.0 x 4.6 x 2.8m              | 2.4 x 2.4m                                                             | -                           |
| No.11 measurement<br>room     | -                             | -                         | 6.2 x 4.7 x 3.0m              | 2.4 x 3.4m                                                             | -                           |

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Data of EMI, Test instruments, and Test set up

Refer to APPENDIX.

#### **SECTION 4: Operation of E.U.T. during testing**

#### 4.1 Operating Mode(s)

Test operating mode was determined as follows according to “Section 1 of 6 802.11 a/b/g/n testing- Managing Complex Regulatory Approvals - ” of TCB Council Workshop October 2009.

| Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Remarks*               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| IEEE 802.11b (11b)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 5.5Mbps (Long GI), PN9 |
| IEEE 802.11g (11g)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 24Mbps (Long GI), PN9  |
| IEEE 802.11n 20MHz BW (11n-20: 2.4GHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | MCS 3 (Long GI), PN9   |
| IEEE 802.11n 20MHz BW (11n-20: 5GHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | MCS 0 (Long GI), PN9   |
| IEEE 802.11n 40MHz BW (11n-40: 5GHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | MCS 3 (Long GI), PN9   |
| *Transmitting duty was 100% on all tests.<br>*The worst condition was determined based on the test result of Maximum Peak Output Power (Mid Channel) from original report (32IE0154-HO-01-A-R1).<br>*EUT has the power settings by the software as follows;<br><b>Power settings:</b><br>11b(5.5Mbps, Long GI):   2412MHz: 13.0dBm, 2437MHz: 13.0dBm, 2462MHz: 13.0dBm<br>11g(24Mbps, Long GI):   2412MHz: 8.0dBm, 2437MHz: 13.0dBm, 2462MHz: 8.5dBm<br>11n-20(2.4GHz Band, MCS 3, Long GI):<br>2412MHz: 7.0dBm, 2437MHz: 12.0dBm, 2462MHz: 7.5dBm<br>11a(6Mbps, Long GI):     5745MHz: 13.0dBm, 5785MHz: 13.0dBm, 5825MHz: 13.0dBm<br>11n-20(5GHz(W58) Band, MCS 0, Long GI):<br>5745MHz: 13.0dBm, 5785MHz: 13.0dBm, 5825MHz: 13.0dBm<br>11n-40(5GHz(W58) Band, MCS 3, Long GI):<br>5755MHz: 13.0dBm, 5795MHz: 13.0dBm<br><br>Software:               Atheros Test Command (Athtestcmd) v3.1.1 Build 563<br>*This setting of software is the worst case.<br>Any conditions under the normal use do not exceed the condition of setting.<br>In addition, end users cannot change the settings of the output power of the product. |                        |

[2.4GHz band]

\*The details of Operating mode(s)

| Test Item                    | Operating Mode       | Tested Antenna port | Tested frequency              |
|------------------------------|----------------------|---------------------|-------------------------------|
| Spurious Emission (Radiated) | 11b Tx<br>11g Tx *1) | 2 *2)               | 2412MHz<br>2437MHz<br>2462MHz |
|                              | 11n-20 Tx            | 2 *2)               | 2412MHz<br>2462MHz            |

\*1) Since 11g and 11n-20 have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest peak output power.

\*2) After the comparison between Antenna port 1 and Antenna port 2, test was performed with the antenna that had higher power as a representative.

[5GHz band]

\*The details of Operating mode(s)

| Test Item                    | Operating Mode | Tested Antenna | Tested frequency              |
|------------------------------|----------------|----------------|-------------------------------|
| Conducted Emission           | 11n-20 Tx *3)  | 2 *2)          | 5745MHz                       |
| Spurious Emission (Radiated) | 11n-20 Tx *1)  | 2 *2)          | 5745MHz<br>5785MHz<br>5825MHz |
|                              | 11n-40 Tx      | 2 *2)          | 5755MHz<br>5795MHz            |

\*1) Since 11a and 11n-20 have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest peak output power.

\*2) After the comparison between Antenna port 1 and Antenna port 2, test was performed with the antenna that had higher power as a representative.

\*3) The mode was tested as a representative, because it had the highest power at antenna terminal test.

**UL Japan, Inc.**

**Head Office EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

## 4.2 Configuration and peripherals

### [2.4GHz band]

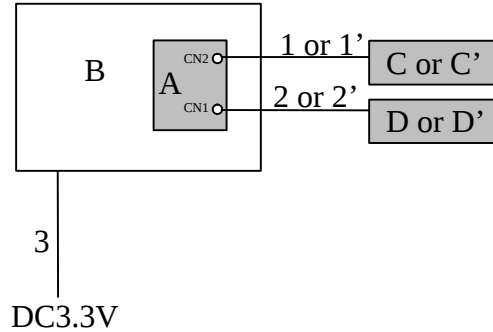

### [5GHz band]

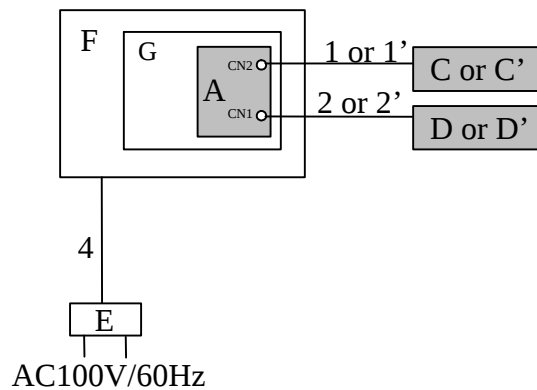

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

\* Radiated emission was tested with the EUT on a single jig board in original application. For this testing, the antenna radiation was focused, and different jig boards were used.

\* EUT has Molex antenna and Laird antenna. The test was performed with below worst configurations.

-CN1 and CN2 were connected to Molex antenna.

-CN1 and CN2 were connected to Laird antenna.

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

#### Description of EUT

| No. | Item                   | Model number   | Serial number | Manufacturer           | Remarks |
|-----|------------------------|----------------|---------------|------------------------|---------|
| A   | SDIO Wireless Module   | SX-SDMAN       | 008092-5099DA | silex technology, Inc. | EUT     |
| B   | Jig Board              | -              | -             | silex technology, Inc. | -       |
| C   | Stand Alone antenna    | 47950-0001     | 001           | Molex                  | EUT     |
| C'  | Mini-Nanoblade antenna | Mini-Nanoblade | 001           | Laird Technologies     | EUT     |
| D   | Stand Alone antenna    | 47950-0001     | 002           | Molex                  | EUT     |
| D'  | Mini-Nanoblade antenna | Mini-Nanoblade | 002           | Laird Technologies     | EUT     |
| E   | AC Adaptor             | US115-05       | C08-0259307   | UNIFIVE                | -       |
| F   | Jig Board              | -              | -             | silex technology, Inc. | -       |
| G   | Jig                    | -              | -             | silex technology, Inc. | -       |

#### List of cables used

| No. | Name                  | Length (m) | Shield     |            | Remarks |
|-----|-----------------------|------------|------------|------------|---------|
|     |                       |            | Cable      | Connector  |         |
| 1   | Antenna Cable (Molex) | 0.08       | Shielded   | Shielded   | -       |
| 1'  | Antenna Cable (Laird) | 0.08       | Shielded   | Shielded   | -       |
| 2   | Antenna Cable (Molex) | 0.08       | Shielded   | Shielded   | -       |
| 2'  | Antenna Cable (Laird) | 0.08       | Shielded   | Shielded   | -       |
| 3   | DC Cable              | 1.8        | Unshielded | Unshielded | -       |
| 4   | DC Cable              | 1.8        | Unshielded | Unshielded | -       |

## **SECTION 5: Conducted Emission**

### **Test Procedure and conditions**

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 0.8m above the conducting ground plane.

The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. All unused 50ohm connectors of the LISN(AMN) were resistivity terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

|                          |                          |
|--------------------------|--------------------------|
| <b>Detector</b>          | <b>: QP and CISPR AV</b> |
| <b>Measurement range</b> | <b>: 0.15-30MHz</b>      |
| <b>Test data</b>         | <b>: APPENDIX</b>        |
| <b>Test result</b>       | <b>: Pass</b>            |

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 6: Radiated Spurious Emission**

### **Test Procedure**

It was measured based on "11.0 Emissions in non-restricted frequency bands" of "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 (Issued on April 9, 2013)".

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 0.8m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

The height of the measuring antenna varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

### **Test Antennas are used as below;**

|              |                 |                |            |
|--------------|-----------------|----------------|------------|
| Frequency    | 30MHz to 300MHz | 300MHz to 1GHz | Above 1GHz |
| Antenna Type | Biconical       | Logperiodic    | Horn       |

In any 100kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

**20dBc was applied to the frequency over the limit of FCC 15.209 / Table 5 of RSS-Gen 7.2.5(IC) and outside the restricted band of FCC15.205 / Table 3 of RSS-Gen 7.2.2 (IC).**

|                 |                |                                           |                        |                                           |
|-----------------|----------------|-------------------------------------------|------------------------|-------------------------------------------|
| Frequency       | Below 1GHz     | Above 1GHz                                |                        | 20dBc                                     |
| Instrument used | Test Receiver  | Spectrum Analyzer                         |                        | Spectrum Analyzer                         |
| Detector        | QP             | PK                                        | AV *1)                 | PK                                        |
| IF Bandwidth    | BW 120kHz(T/R) | RBW: 1MHz<br>VBW: 3MHz                    | RBW: 1MHz<br>VBW: 10Hz | RBW: 100kHz<br>VBW: 300kHz (S/A)          |
| Test Distance   | 3m             | 3m (below 10GHz),<br>1m *2) (above 10GHz) |                        | 3m (below 10GHz),<br>1m *2) (above 10GHz) |

\*1) Average Power Measurement was performed based on 12.2.7 of "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 (Issued on April 9, 2013)"

\*2) Distance Factor:  $20 \times \log(3.0\text{m}/1.0\text{m}) = 9.5\text{dB}$

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT and antenna to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30M-40GHz  
 Test data : APPENDIX  
 Test result : Pass

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## APPENDIX 1: Data of EMI test

### Conducted Emission [Molex antenna]

#### DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Date : 2014/03/05

Report No. : 10195552H

Temp./Humi. : 19deg. C / 36% RH  
Engineer : Tomohisa Nakagawa

Mode / Remarks : Tx 11n20\_MCS0\_5745MHz

LIMIT : FCC15.207 QP  
FCC15.207 AV

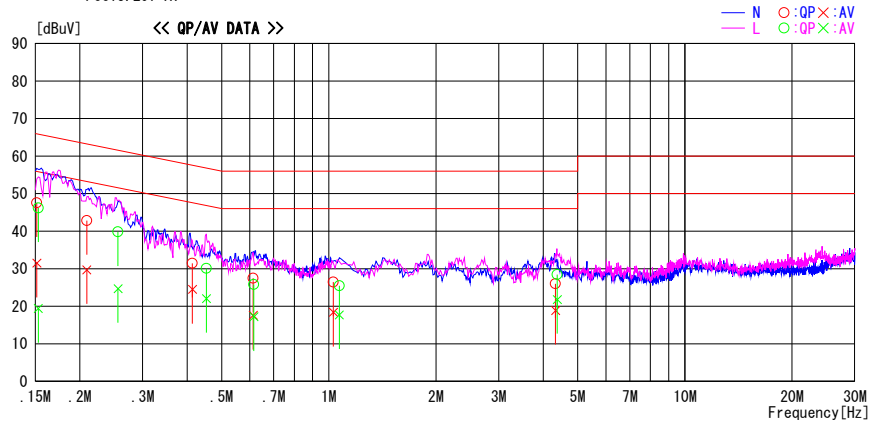

| Frequency<br>[MHz] | Reading Level |              | Corr.<br>Factor | Results      |              | Limit        |              | Margin     |            | Phase | Comment |
|--------------------|---------------|--------------|-----------------|--------------|--------------|--------------|--------------|------------|------------|-------|---------|
|                    | QP<br>[dBuV]  | AV<br>[dBuV] |                 | QP<br>[dBuV] | AV<br>[dBuV] | QP<br>[dBuV] | AV<br>[dBuV] | QP<br>[dB] | AV<br>[dB] |       |         |
| 0.15145            | 34.2          | 18.1         | 13.4            | 47.6         | 31.5         | 65.9         | 55.9         | 18.3       | 24.4       | N     |         |
| 0.20920            | 29.4          | 16.3         | 13.4            | 42.8         | 29.7         | 63.2         | 53.2         | 20.4       | 23.5       | N     |         |
| 0.41408            | 18.1          | 11.1         | 13.4            | 31.5         | 24.5         | 57.6         | 47.6         | 26.1       | 23.1       | N     |         |
| 0.61340            | 14.0          | 4.1          | 13.5            | 27.5         | 17.6         | 56.0         | 46.0         | 28.5       | 28.4       | N     |         |
| 1.03046            | 13.0          | 4.9          | 13.5            | 26.5         | 18.4         | 56.0         | 46.0         | 29.5       | 27.6       | N     |         |
| 4.33377            | 11.8          | 4.7          | 14.2            | 26.0         | 18.9         | 56.0         | 46.0         | 30.0       | 27.1       | N     |         |
| 0.15290            | 32.8          | 6.0          | 13.4            | 46.2         | 19.4         | 65.8         | 55.8         | 19.6       | 36.4       | L     |         |
| 0.25590            | 26.4          | 11.3         | 13.4            | 39.8         | 24.7         | 61.6         | 51.6         | 21.8       | 26.9       | L     |         |
| 0.45340            | 16.7          | 8.7          | 13.4            | 30.1         | 22.1         | 56.8         | 46.8         | 26.7       | 24.7       | L     |         |
| 0.61588            | 12.3          | 3.7          | 13.5            | 25.8         | 17.2         | 56.0         | 46.0         | 30.2       | 28.8       | L     |         |
| 1.07005            | 12.0          | 4.2          | 13.5            | 25.5         | 17.7         | 56.0         | 46.0         | 30.5       | 28.3       | L     |         |
| 4.37941            | 14.3          | 7.6          | 14.2            | 28.5         | 21.8         | 56.0         | 46.0         | 27.5       | 24.2       | L     |         |

CHART:WITH FACTOR,Peak hold data. CALCULATION:RESULT=READING+C.F.(LISN LOSS + ATT LOSS + CABLE LOSS)  
Except for the above table : adequate margin data below the limits.

## Conducted Emission [Laird antenna]


### DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Date : 2014/03/05

Report No. : 10195552H  
Temp./Humi. : 19deg. C / 36% RH  
Engineer : Tomohisa Nakagawa

Mode / Remarks : Tx 11n20\_MCS0\_5745MHz

LIMIT : FCC15.207 QP  
FCC15.207 AV

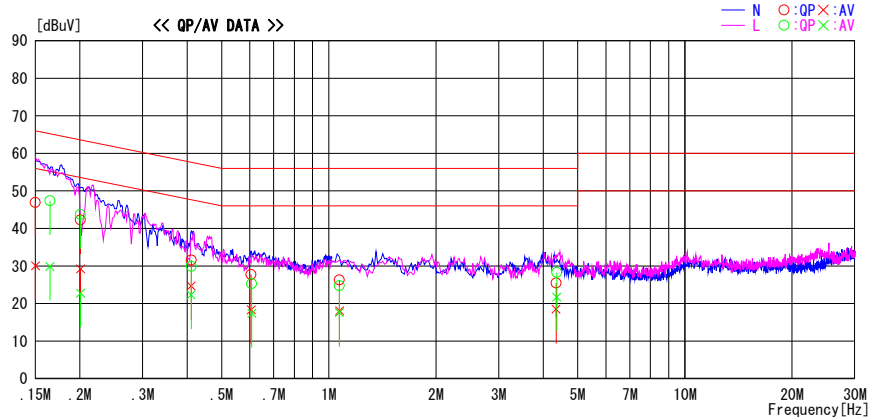

| Frequency<br>[MHz] | Reading Level |              | Corr.<br>Factor | Results      |              | Limit        |              | Margin     |            | Phase | Comment |
|--------------------|---------------|--------------|-----------------|--------------|--------------|--------------|--------------|------------|------------|-------|---------|
|                    | QP<br>[dBuV]  | AV<br>[dBuV] |                 | QP<br>[dBuV] | AV<br>[dBuV] | QP<br>[dBuV] | AV<br>[dBuV] | QP<br>[dB] | AV<br>[dB] |       |         |
| 0.15000            | 33.5          | 16.7         | 13.4            | 46.9         | 30.1         | 66.0         | 56.0         | 19.1       | 25.9       | N     |         |
| 0.20075            | 28.9          | 15.8         | 13.4            | 42.3         | 29.2         | 63.6         | 53.6         | 21.3       | 24.4       | N     |         |
| 0.41100            | 18.2          | 11.3         | 13.4            | 31.6         | 24.7         | 57.6         | 47.6         | 26.0       | 22.9       | N     |         |
| 0.60530            | 14.2          | 4.8          | 13.5            | 27.7         | 18.3         | 56.0         | 46.0         | 28.3       | 27.7       | N     |         |
| 1.07192            | 12.8          | 4.6          | 13.5            | 26.3         | 18.1         | 56.0         | 46.0         | 29.7       | 27.9       | N     |         |
| 4.34510            | 11.3          | 4.3          | 14.2            | 25.5         | 18.5         | 56.0         | 46.0         | 30.5       | 27.5       | N     |         |
| 0.16483            | 34.0          | 16.5         | 13.4            | 47.4         | 29.9         | 65.2         | 55.2         | 17.8       | 25.3       | L     |         |
| 0.20075            | 30.3          | 9.4          | 13.4            | 43.7         | 22.8         | 63.6         | 53.6         | 19.9       | 30.8       | L     |         |
| 0.41100            | 16.5          | 8.9          | 13.4            | 29.9         | 22.3         | 57.6         | 47.6         | 27.7       | 25.3       | L     |         |
| 0.60820            | 11.8          | 3.9          | 13.5            | 25.3         | 17.4         | 56.0         | 46.0         | 30.7       | 28.6       | L     |         |
| 1.07070            | 11.2          | 4.1          | 13.5            | 24.7         | 17.6         | 56.0         | 46.0         | 31.3       | 28.4       | L     |         |
| 4.36614            | 14.1          | 7.5          | 14.2            | 28.3         | 21.7         | 56.0         | 46.0         | 27.7       | 24.3       | L     |         |

CHART:WITH FACTOR,Peak hold data. CALCULATION:RESULT=READING+C.F.(LISN LOSS + ATT LOSS + CABLE LOSS)  
Except for the above table : adequate margin data below the limits.

## Radiated Spurious Emission [Molex antenna]

|                       |                                                 |                   |
|-----------------------|-------------------------------------------------|-------------------|
| Test place            | Head Office EMC Lab. No.3 Semi Anechoic Chamber |                   |
| Report No.            | 10195552H                                       |                   |
| Date                  | 02/19/2014                                      | 03/09/2014        |
| Temperature/ Humidity | 22deg. C / 30% RH                               | 23deg. C / 31% RH |
| Engineer              | Satofumi Matsuyama                              | Shinya Watanabe   |
|                       | (1-10GHz)                                       | (Above 10GHz)     |
| Mode                  | 11b Tx 2412MHz                                  |                   |

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 2390.000           | PK       | 50.7              | 28.2               | 3.1          | 32.4         | 49.6               | 73.9              | 24.3           |        |
| Hori     | 3216.000           | PK       | 46.8              | 29.1               | 3.6          | 32.0         | 47.5               | 73.9              | 26.4           |        |
| Hori     | 4824.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 7236.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 9648.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 2390.000           | AV       | 39.2              | 28.2               | 3.1          | 32.4         | 38.1               | 53.9              | 15.8           |        |
| Hori     | 3216.000           | AV       | 40.4              | 29.1               | 3.6          | 32.0         | 41.1               | 53.9              | 12.8           |        |
| Hori     | 4824.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 7236.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 9648.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 2390.000           | PK       | 49.3              | 28.2               | 3.1          | 32.4         | 48.2               | 73.9              | 25.7           |        |
| Vert     | 3216.000           | PK       | 49.0              | 29.1               | 3.6          | 32.0         | 49.7               | 73.9              | 24.2           |        |
| Vert     | 4824.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 7236.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 9648.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 2390.000           | AV       | 37.1              | 28.2               | 3.1          | 32.4         | 36.0               | 53.9              | 17.9           |        |
| Vert     | 3216.000           | AV       | 42.7              | 29.1               | 3.6          | 32.0         | 43.4               | 53.9              | 10.5           |        |
| Vert     | 4824.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 7236.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 9648.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS:No signal detect

Distance factor:      10GHz-26.5GHz    20log(3.0m/1.0m)= 9.5dB  
                                 26.5GHz-40GHz    20log(3.0m/0.5m)=15.6dB

### 20dBc Data Sheet

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant<br>Factor<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark  |
|----------|--------------------|----------|-------------------|-------------------------|--------------|--------------|--------------------|-------------------|----------------|---------|
| Hori     | 2412.000           | PK       | 103.8             | 28.4                    | 3.0          | 34.7         | 100.5              | -                 | -              | Carrier |
| Hori     | 2400.000           | PK       | 63.7              | 28.4                    | 3.0          | 34.7         | 60.4               | 80.5              | 20.1           |         |
| Vert     | 2412.000           | PK       | 102.1             | 28.4                    | 3.0          | 34.7         | 98.8               | -                 | -              | Carrier |
| Vert     | 2400.000           | PK       | 61.1              | 28.4                    | 3.0          | 34.7         | 57.8               | 78.8              | 21.0           |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

## Radiated Spurious Emission [Molex antenna]

Test place Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Report No. 10195552H  
Date 02/19/2014 03/09/2014  
Temperature/ Humidity 22deg. C / 30% RH 23deg. C / 31% RH  
Engineer Satofumi Matsuyama Shinya Watanabe  
(1-10GHz) (Above 10GHz)  
Mode 11b Tx 2437MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 3249.335           | PK       | 46.8              | 29.1               | 3.7          | 32.0         | 47.6               | 73.9              | 26.3           |        |
| Hori     | 4874.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 7311.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 9748.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 3249.335           | AV       | 41.0              | 29.1               | 3.7          | 32.0         | 41.8               | 53.9              | 12.1           |        |
| Hori     | 4874.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 7311.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 9748.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 3249.335           | PK       | 49.1              | 29.1               | 3.7          | 32.0         | 49.9               | 73.9              | 24.0           |        |
| Vert     | 4874.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 7311.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 9748.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 3249.335           | AV       | 43.5              | 29.1               | 3.7          | 32.0         | 44.3               | 53.9              | 9.6            |        |
| Vert     | 4874.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 7311.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 9748.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS:No signal detect

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB  
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

## Radiated Spurious Emission [Molex antenna]

Test place Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Report No. 10195552H  
Date 02/19/2014 03/09/2014  
Temperature/ Humidity 22deg. C / 30% RH 23deg. C / 31% RH  
Engineer Satofumi Matsuyama Shinya Watanabe  
(1-10GHz) (Above 10GHz)  
Mode 11b Tx 2462MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 2483.500           | PK       | 51.9              | 28.4               | 3.1          | 32.3         | 51.1               | 73.9              | 22.8           |        |
| Hori     | 3282.680           | PK       | 46.9              | 29.1               | 3.7          | 31.9         | 47.8               | 73.9              | 26.1           |        |
| Hori     | 4924.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 7386.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 9848.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 2483.500           | AV       | 40.3              | 28.4               | 3.1          | 32.3         | 39.5               | 53.9              | 14.4           |        |
| Hori     | 3282.680           | AV       | 40.7              | 29.1               | 3.7          | 31.9         | 41.6               | 53.9              | 12.3           |        |
| Hori     | 4924.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 7386.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 9848.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 2483.500           | PK       | 50.3              | 28.4               | 3.1          | 32.3         | 49.5               | 73.9              | 24.4           |        |
| Vert     | 3282.680           | PK       | 48.0              | 29.1               | 3.7          | 31.9         | 48.9               | 73.9              | 25.0           |        |
| Vert     | 4924.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 7386.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 9848.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 2483.500           | AV       | 38.7              | 28.4               | 3.1          | 32.3         | 37.9               | 53.9              | 16.0           |        |
| Vert     | 3282.680           | AV       | 41.5              | 29.1               | 3.7          | 31.9         | 42.4               | 53.9              | 11.5           |        |
| Vert     | 4924.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 7386.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 9848.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS:No signal detect

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB  
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

## Radiated Spurious Emission [Molex antenna]

Test place Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Report No. 10195552H  
Date 02/19/2014 03/09/2014  
Temperature/ Humidity 22deg. C / 30% RH 23deg. C / 31% RH  
Engineer Satofumi Matsuyama Shinya Watanabe  
(1-10GHz) (Above 10GHz)  
Mode 11g Tx 2412MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 2390.000           | PK       | 68.2              | 28.2               | 3.1          | 32.4         | 67.1               | 73.9              | 6.8            |        |
| Hori     | 3216.012           | PK       | 46.4              | 29.1               | 3.6          | 32.0         | 47.1               | 73.9              | 26.8           |        |
| Hori     | 4824.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 7236.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 9648.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 2390.000           | AV       | 49.1              | 28.2               | 3.1          | 32.4         | 48.0               | 53.9              | 5.9            |        |
| Hori     | 3216.012           | AV       | 39.9              | 29.1               | 3.6          | 32.0         | 40.6               | 53.9              | 13.3           |        |
| Hori     | 4824.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 7236.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 9648.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 2390.000           | PK       | 66.7              | 28.2               | 3.1          | 32.4         | 65.6               | 73.9              | 8.3            |        |
| Vert     | 3216.012           | PK       | 48.8              | 29.1               | 3.6          | 32.0         | 49.5               | 73.9              | 24.4           |        |
| Vert     | 4824.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 7236.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 9648.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 2390.000           | AV       | 47.5              | 28.2               | 3.1          | 32.4         | 46.4               | 53.9              | 7.5            |        |
| Vert     | 3216.012           | AV       | 44.0              | 29.1               | 3.6          | 32.0         | 44.7               | 53.9              | 9.2            |        |
| Vert     | 4824.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 7236.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 9648.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS:No signal detect

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB  
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

### 20dBc Data Sheet

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant<br>Factor<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark  |
|----------|--------------------|----------|-------------------|-------------------------|--------------|--------------|--------------------|-------------------|----------------|---------|
| Hori     | 2412.000           | PK       | 94.1              | 28.4                    | 3.0          | 34.7         | 90.8               | -                 | -              | Carrier |
| Hori     | 2400.000           | PK       | 65.8              | 28.4                    | 3.0          | 34.7         | 62.5               | 70.8              | 8.3            |         |
| Vert     | 2412.000           | PK       | 94.3              | 28.4                    | 3.0          | 34.7         | 91.0               | -                 | -              | Carrier |
| Vert     | 2400.000           | PK       | 64.4              | 28.4                    | 3.0          | 34.7         | 61.1               | 71.0              | 9.9            |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

## Radiated Spurious Emission [Molex antenna]

Test place : Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 10195552H  
Date : 02/19/2014 03/09/2014  
Temperature/ Humidity : 22deg. C / 30% RH 23deg. C / 31% RH  
Engineer : Satofumi Matsuyama Shinya Watanabe  
(1-10GHz) (Above 10GHz)  
Mode : 11g Tx 2437MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 3249.312           | PK       | 46.3              | 29.1               | 3.7          | 32.0         | 47.1               | 73.9              | 26.8           |        |
| Hori     | 4874.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 7311.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 9748.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 3249.312           | AV       | 40.9              | 29.1               | 3.7          | 32.0         | 41.7               | 53.9              | 12.2           |        |
| Hori     | 4874.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 7311.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 9748.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 3249.312           | PK       | 46.7              | 29.1               | 3.7          | 32.0         | 47.5               | 73.9              | 26.4           |        |
| Vert     | 4874.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 7311.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 9748.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 3249.312           | AV       | 41.3              | 29.1               | 3.7          | 32.0         | 42.1               | 53.9              | 11.8           |        |
| Vert     | 4874.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 7311.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 9748.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS:No signal detect

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB  
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

## Radiated Spurious Emission [Molex antenna]

Test place : Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 10195552H  
Date : 02/19/2014      03/09/2014  
Temperature/ Humidity : 22deg. C / 30% RH      23deg. C / 31% RH  
Engineer : Satofumi Matsuyama      Shinya Watanabe  
(1-10GHz)      (Above 10GHz)  
Mode : 11g Tx 2462MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 2483.500           | PK       | 64.4              | 28.4               | 3.1          | 32.3         | 63.6               | 73.9              | 10.3           |        |
| Hori     | 3282.645           | PK       | 47.1              | 29.1               | 3.7          | 31.9         | 48.0               | 73.9              | 25.9           |        |
| Hori     | 4924.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 7386.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 9848.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 2483.500           | AV       | 48.3              | 28.4               | 3.1          | 32.3         | 47.5               | 53.9              | 6.4            |        |
| Hori     | 3282.645           | AV       | 41.2              | 29.1               | 3.7          | 31.9         | 42.1               | 53.9              | 11.8           |        |
| Hori     | 4924.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 7386.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 9848.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 2483.500           | PK       | 61.3              | 28.4               | 3.1          | 32.3         | 60.5               | 73.9              | 13.4           |        |
| Vert     | 3282.645           | PK       | 48.1              | 29.1               | 3.7          | 31.9         | 49.0               | 73.9              | 24.9           |        |
| Vert     | 4924.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 7386.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 9848.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 2483.500           | AV       | 45.4              | 28.4               | 3.1          | 32.3         | 44.6               | 53.9              | 9.3            |        |
| Vert     | 3282.645           | AV       | 41.5              | 29.1               | 3.7          | 31.9         | 42.4               | 53.9              | 11.5           |        |
| Vert     | 4924.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 7386.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 9848.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS:No signal detect

Distance factor:      10GHz-26.5GHz      20log(3.0m/1.0m)= 9.5dB  
                                 26.5GHz-40GHz      20log(3.0m/0.5m)=15.6dB

## Radiated Spurious Emission [Molex antenna]

Test place : Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 10195552H  
Date : 02/19/2014 03/09/2014  
Temperature/ Humidity : 22deg. C / 30% RH 23deg. C / 31% RH  
Engineer : Satofumi Matsuyama Shinya Watanabe  
(1-10GHz) (Above 10GHz)  
Mode : 11n-20 Tx 2412MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 2390.000           | 68.9     | PK                | 28.2               | 3.1          | 32.4         | 67.8               | 73.9              | 6.1            |        |
| Hori     | 2390.000           | 48.4     | AV                | 28.2               | 3.1          | 32.4         | 47.3               | 53.9              | 6.6            |        |
| Vert     | 2390.000           | 66.9     | PK                | 28.2               | 3.1          | 32.4         | 65.8               | 73.9              | 8.1            |        |
| Vert     | 2390.000           | 46.2     | AV                | 28.2               | 3.1          | 32.4         | 45.1               | 53.9              | 8.8            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB  
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

### 20dBc Data Sheet

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant<br>Factor<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark  |
|----------|--------------------|----------|-------------------|-------------------------|--------------|--------------|--------------------|-------------------|----------------|---------|
| Hori     | 2412.000           | PK       | 92.7              | 28.4                    | 3.0          | 34.7         | 89.4               | -                 | -              | Carrier |
| Hori     | 2400.000           | PK       | 65.4              | 28.4                    | 3.0          | 34.7         | 62.1               | 69.4              | 7.3            |         |
| Vert     | 2412.000           | PK       | 91.1              | 28.4                    | 3.0          | 34.7         | 87.8               | -                 | -              | Carrier |
| Vert     | 2400.000           | PK       | 63.1              | 28.4                    | 3.0          | 34.7         | 59.8               | 67.8              | 8.0            |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

**Radiated Spurious Emission**  
**[Molex antenna]**

Test place Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Report No. 10195552H  
Date 02/19/2014 03/09/2014  
Temperature/ Humidity 22deg. C / 30% RH 23deg. C / 31% RH  
Engineer Satofumi Matsuyama Shinya Watanabe  
(1-10GHz) (Above 10GHz)  
Mode 11n-20 Tx 2462MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 2483.500           | PK       | 60.6              | 28.7               | 3.1          | 34.7         | 57.7               | 73.9              | 16.2           |        |
| Hori     | 2483.500           | AV       | 41.9              | 28.7               | 3.1          | 34.7         | 39.0               | 53.9              | 14.9           |        |
| Vert     | 2483.500           | PK       | 60.2              | 28.7               | 3.1          | 34.7         | 57.3               | 73.9              | 16.6           |        |
| Vert     | 2483.500           | AV       | 42.9              | 28.7               | 3.1          | 34.7         | 40.0               | 53.9              | 13.9           |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz  $20\log(3.0\text{m}/1.0\text{m})= 9.5\text{dB}$   
26.5GHz-40GHz  $20\log(3.0\text{m}/0.5\text{m})=15.6\text{dB}$

## Radiated Spurious Emission [Laird antenna]

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. 10195552H  
Date 02/21/2014 03/09/2014  
Temperature/ Humidity 23deg. C / 35% RH 23deg. C / 31% RH  
Engineer Kazuya Yoshioka Shinya Watanabe  
(1-10GHz) (Above 10GHz)  
Mode 11b Tx 2412MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 2390.000           | PK       | 52.3              | 28.3               | 3.0          | 34.7         | 48.9               | 73.9              | 25.0           |        |
| Hori     | 3215.948           | PK       | 49.0              | 29.4               | 3.6          | 34.3         | 47.7               | 73.9              | 26.2           |        |
| Hori     | 4824.000           | PK       | 42.7              | 32.3               | 5.4          | 33.9         | 46.5               | 73.9              | 27.4           |        |
| Hori     | 7236.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 9648.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 2390.000           | AV       | 39.7              | 28.3               | 3.0          | 34.7         | 36.3               | 53.9              | 17.6           |        |
| Hori     | 3215.948           | AV       | 44.8              | 29.4               | 3.6          | 34.3         | 43.5               | 53.9              | 10.4           |        |
| Hori     | 4824.000           | AV       | 30.5              | 32.3               | 5.4          | 33.9         | 34.3               | 53.9              | 19.6           |        |
| Hori     | 7236.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 9648.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 2390.000           | PK       | 51.0              | 28.3               | 3.0          | 34.7         | 47.6               | 73.9              | 26.3           |        |
| Vert     | 3216.085           | PK       | 47.3              | 29.4               | 3.6          | 34.3         | 46.0               | 73.9              | 27.9           |        |
| Vert     | 4824.000           | PK       | 42.1              | 32.3               | 5.4          | 33.9         | 45.9               | 73.9              | 28.0           |        |
| Vert     | 7236.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 9648.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 2390.000           | AV       | 39.5              | 28.3               | 3.0          | 34.7         | 36.1               | 53.9              | 17.8           |        |
| Vert     | 3216.085           | AV       | 41.2              | 29.4               | 3.6          | 34.3         | 39.9               | 53.9              | 14.0           |        |
| Vert     | 4824.000           | AV       | 30.3              | 32.3               | 5.4          | 33.9         | 34.1               | 53.9              | 19.8           |        |
| Vert     | 7236.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 9648.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS:No signal detect

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB  
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

### 20dBc Data Sheet

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant<br>Factor<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark  |
|----------|--------------------|----------|-------------------|-------------------------|--------------|--------------|--------------------|-------------------|----------------|---------|
| Hori     | 2412.000           | PK       | 103.4             | 28.4                    | 3.0          | 34.7         | 100.1              | -                 | -              | Carrier |
| Hori     | 2400.000           | PK       | 64.2              | 28.4                    | 3.0          | 34.7         | 60.9               | 80.1              | 19.2           |         |
| Vert     | 2412.000           | PK       | 102.9             | 28.4                    | 3.0          | 34.7         | 99.6               | -                 | -              | Carrier |
| Vert     | 2400.000           | PK       | 64.5              | 28.4                    | 3.0          | 34.7         | 61.2               | 79.6              | 18.4           |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

## Radiated Spurious Emission [Laird antenna]

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. 10195552H  
Date 02/21/2014 03/09/2014  
Temperature/ Humidity 23deg. C / 35% RH 23deg. C / 31% RH  
Engineer Kazuya Yoshioka Shinya Watanabe  
(1-10GHz) (Above 10GHz)  
Mode 11b Tx 2437MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 3249.294           | PK       | 50.2              | 29.4               | 3.7          | 34.2         | 49.1               | 73.9              | 24.8           |        |
| Hori     | 4874.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 7311.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 9748.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 3249.294           | AV       | 47.4              | 29.4               | 3.7          | 34.2         | 46.3               | 53.9              | 7.6            |        |
| Hori     | 4874.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 7311.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 9748.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 3249.204           | PK       | 47.0              | 29.4               | 3.7          | 34.2         | 45.9               | 73.9              | 28.0           |        |
| Vert     | 4874.000           | PK       | 44.4              | 32.4               | 5.4          | 33.9         | 48.3               | 73.9              | 25.6           |        |
| Vert     | 7311.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 9748.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 3249.204           | AV       | 42.2              | 29.4               | 3.7          | 34.2         | 41.1               | 53.9              | 12.8           |        |
| Vert     | 4874.000           | AV       | 30.8              | 32.4               | 5.4          | 33.9         | 34.7               | 53.9              | 19.2           |        |
| Vert     | 7311.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 9748.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS:No signal detect

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB  
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

## Radiated Spurious Emission [Laird antenna]

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. 10195552H  
Date 02/21/2014 03/09/2014  
Temperature/ Humidity 23deg. C / 35% RH 23deg. C / 31% RH  
Engineer Kazuya Yoshioka Shinya Watanabe  
(1-10GHz) (Above 10GHz)  
Mode 11b Tx 2462MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 2483.500           | PK       | 48.7              | 28.7               | 3.1          | 34.7         | 45.8               | 73.9              | 28.1           |        |
| Hori     | 3281.676           | PK       | 50.7              | 29.4               | 3.7          | 34.2         | 49.6               | 73.9              | 24.3           |        |
| Hori     | 4924.000           | PK       | 43.2              | 32.6               | 5.4          | 33.9         | 47.3               | 73.9              | 26.6           |        |
| Hori     | 7386.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 9848.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 2483.500           | AV       | 36.8              | 28.7               | 3.1          | 34.7         | 33.9               | 53.9              | 20.0           |        |
| Hori     | 3281.676           | AV       | 47.6              | 29.4               | 3.7          | 34.2         | 46.5               | 53.9              | 7.4            |        |
| Hori     | 4924.000           | AV       | 30.6              | 32.6               | 5.4          | 33.9         | 34.7               | 53.9              | 19.2           |        |
| Hori     | 7386.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 9848.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 2483.500           | PK       | 52.1              | 28.7               | 3.1          | 34.7         | 49.2               | 73.9              | 24.7           |        |
| Vert     | 3282.678           | PK       | 47.2              | 29.4               | 3.7          | 34.2         | 46.1               | 73.9              | 27.8           |        |
| Vert     | 4924.000           | PK       | 42.5              | 32.6               | 5.4          | 33.9         | 46.6               | 73.9              | 27.3           |        |
| Vert     | 7386.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 9848.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 2483.500           | AV       | 39.9              | 28.7               | 3.1          | 34.7         | 37.0               | 53.9              | 16.9           |        |
| Vert     | 3282.678           | AV       | 42.1              | 29.4               | 3.7          | 34.2         | 41.0               | 53.9              | 12.9           |        |
| Vert     | 4924.000           | AV       | 31.1              | 32.6               | 5.4          | 33.9         | 35.2               | 53.9              | 18.7           |        |
| Vert     | 7386.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 9848.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS:No signal detect

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB  
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

## Radiated Spurious Emission [Laird antenna]

Test place : Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. : 10195552H  
Date : 02/21/2014 03/09/2014  
Temperature/ Humidity : 23deg. C / 35% RH 23deg. C / 31% RH  
Engineer : Kazuya Yoshioka Shinya Watanabe  
(1-10GHz) (Above 10GHz)  
Mode : 11g Tx 2412MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 2390.000           | PK       | 67.0              | 28.3               | 3.0          | 34.7         | 63.6               | 73.9              | 10.3           |        |
| Hori     | 3215.957           | PK       | 48.0              | 29.4               | 3.6          | 34.3         | 46.7               | 73.9              | 27.2           |        |
| Hori     | 4824.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 7236.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 9648.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 2390.000           | AV       | 52.7              | 28.3               | 3.0          | 34.7         | 49.3               | 53.9              | 4.6            |        |
| Hori     | 3215.957           | AV       | 41.6              | 29.4               | 3.6          | 34.3         | 40.3               | 53.9              | 13.6           |        |
| Hori     | 4824.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 7236.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 9648.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 2390.000           | PK       | 64.9              | 28.3               | 3.0          | 34.7         | 61.5               | 73.9              | 12.4           |        |
| Vert     | 3215.862           | PK       | 47.4              | 29.4               | 3.6          | 34.3         | 46.1               | 73.9              | 27.8           |        |
| Vert     | 4824.000           | PK       | 46.1              | 32.3               | 5.4          | 33.9         | 49.9               | 73.9              | 24.0           |        |
| Vert     | 7236.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 9648.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 2390.000           | AV       | 52.0              | 28.3               | 3.0          | 34.7         | 48.6               | 53.9              | 5.3            |        |
| Vert     | 3215.862           | AV       | 40.9              | 29.4               | 3.6          | 34.3         | 39.6               | 53.9              | 14.3           |        |
| Vert     | 4824.000           | AV       | 33.9              | 32.3               | 5.4          | 33.9         | 37.7               | 53.9              | 16.2           |        |
| Vert     | 7236.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 9648.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS:No signal detect

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB  
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

### 20dBc Data Sheet

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant<br>Factor<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark  |
|----------|--------------------|----------|-------------------|-------------------------|--------------|--------------|--------------------|-------------------|----------------|---------|
| Hori     | 2412.000           | PK       | 96.5              | 28.4                    | 3.0          | 34.7         | 93.2               | -                 | -              | Carrier |
| Hori     | 2400.000           | PK       | 68.5              | 28.4                    | 3.0          | 34.7         | 65.2               | 73.2              | 8.0            |         |
| Vert     | 2412.000           | PK       | 95.7              | 28.4                    | 3.0          | 34.7         | 92.4               | -                 | -              | Carrier |
| Vert     | 2400.000           | PK       | 66.9              | 28.4                    | 3.0          | 34.7         | 63.6               | 72.4              | 8.8            |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

## Radiated Spurious Emission [Laird antenna]

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. 10195552H  
Date 02/21/2014 03/09/2014  
Temperature/ Humidity 23deg. C / 35% RH 23deg. C / 31% RH  
Engineer Kazuya Yoshioka Shinya Watanabe  
(1-10GHz) (Above 10GHz)  
Mode 11g Tx 2437MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 3249.287           | PK       | 47.9              | 29.4               | 3.7          | 34.2         | 46.8               | 73.9              | 27.1           |        |
| Hori     | 4874.000           | PK       | 48.4              | 32.4               | 6.3          | 33.9         | 53.2               | 73.9              | 20.7           |        |
| Hori     | 7311.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 9748.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 3249.287           | AV       | 42.8              | 29.4               | 3.7          | 34.2         | 41.7               | 53.9              | 12.2           |        |
| Hori     | 4874.000           | AV       | 36.5              | 32.4               | 6.3          | 33.9         | 41.3               | 53.9              | 12.6           |        |
| Hori     | 7311.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 9748.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 3249.333           | PK       | 47.2              | 29.4               | 3.7          | 34.2         | 46.1               | 73.9              | 27.8           |        |
| Vert     | 4874.000           | PK       | 50.9              | 32.4               | 5.4          | 33.9         | 54.8               | 73.9              | 19.1           |        |
| Vert     | 7311.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 9748.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 3249.333           | AV       | 42.0              | 29.4               | 3.7          | 34.2         | 40.9               | 53.9              | 13.0           |        |
| Vert     | 4874.000           | AV       | 40.7              | 32.4               | 5.4          | 33.9         | 44.6               | 53.9              | 9.3            |        |
| Vert     | 7311.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 9748.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS:No signal detect

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB  
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

## Radiated Spurious Emission [Laird antenna]

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. 10195552H  
Date 02/21/2014 03/09/2014  
Temperature/ Humidity 23deg. C / 35% RH 23deg. C / 31% RH  
Engineer Kazuya Yoshioka Shinya Watanabe  
(1-10GHz) (Above 10GHz)  
Mode 11g Tx 2462MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 2483.500           | PK       | 60.9              | 28.7               | 3.1          | 34.7         | 58.0               | 73.9              | 15.9           |        |
| Hori     | 3282.676           | PK       | 50.9              | 29.4               | 3.7          | 34.2         | 49.8               | 73.9              | 24.1           |        |
| Hori     | 4924.000           | PK       | 44.9              | 32.6               | 5.4          | 33.9         | 49.0               | 73.9              | 24.9           |        |
| Hori     | 7386.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 9848.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Hori     | 2483.500           | AV       | 45.9              | 28.7               | 3.1          | 34.7         | 43.0               | 53.9              | 10.9           |        |
| Hori     | 3282.676           | AV       | 48.0              | 29.4               | 3.7          | 34.2         | 46.9               | 53.9              | 7.0            |        |
| Hori     | 4924.000           | AV       | 34.4              | 32.6               | 5.4          | 33.9         | 38.5               | 53.9              | 15.4           |        |
| Hori     | 7386.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Hori     | 9848.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 2483.500           | PK       | 61.2              | 28.7               | 3.1          | 34.7         | 58.3               | 73.9              | 15.6           |        |
| Vert     | 3282.471           | PK       | 47.5              | 29.4               | 3.7          | 34.2         | 46.4               | 73.9              | 27.5           |        |
| Vert     | 4924.000           | PK       | 47.3              | 32.6               | 5.4          | 33.9         | 51.4               | 73.9              | 22.5           |        |
| Vert     | 7386.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 9848.000           | PK       | NS                | -                  | -            | -            | -                  | 73.9              | -              |        |
| Vert     | 2483.500           | AV       | 48.1              | 28.7               | 3.1          | 34.7         | 45.2               | 53.9              | 8.7            |        |
| Vert     | 3282.471           | AV       | 42.8              | 29.4               | 3.7          | 34.2         | 41.7               | 53.9              | 12.2           |        |
| Vert     | 4924.000           | AV       | 35.8              | 32.6               | 5.4          | 33.9         | 39.9               | 53.9              | 14.0           |        |
| Vert     | 7386.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |
| Vert     | 9848.000           | AV       | NS                | -                  | -            | -            | -                  | 53.9              | -              |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

NS:No signal detect

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB  
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

## Radiated Spurious Emission [Laird antenna]

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. 10195552H  
Date 02/21/2014 03/09/2014  
Temperature/ Humidity 23deg. C / 35% RH 23deg. C / 31% RH  
Engineer Kazuya Yoshioka Shinya Watanabe  
(1-10GHz) (Above 10GHz)  
Mode 11n-20 Tx 2412MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 2390.000           | PK       | 63.8              | 28.3               | 3.0          | 34.7         | 60.4               | 73.9              | 13.5           |        |
| Hori     | 2390.000           | AV       | 50.5              | 28.3               | 3.0          | 34.7         | 47.1               | 53.9              | 6.8            |        |
| Vert     | 2390.000           | PK       | 67.4              | 28.3               | 3.0          | 34.7         | 64.0               | 73.9              | 9.9            |        |
| Vert     | 2390.000           | AV       | 52.6              | 28.3               | 3.0          | 34.7         | 49.2               | 53.9              | 4.7            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz  $20\log(3.0\text{m}/1.0\text{m})= 9.5\text{dB}$   
26.5GHz-40GHz  $20\log(3.0\text{m}/0.5\text{m})=15.6\text{dB}$

### 20dBc Data Sheet

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant<br>Factor<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark  |
|----------|--------------------|----------|-------------------|-------------------------|--------------|--------------|--------------------|-------------------|----------------|---------|
| Hori     | 2412.000           | PK       | 92.3              | 28.4                    | 3.0          | 34.7         | 89.0               | -                 | -              | Carrier |
| Hori     | 2400.000           | PK       | 64.3              | 28.4                    | 3.0          | 34.7         | 61.0               | 69.0              | 8.0            |         |
| Vert     | 2412.000           | PK       | 95.1              | 28.4                    | 3.0          | 34.7         | 91.8               | -                 | -              | Carrier |
| Vert     | 2400.000           | PK       | 66.1              | 28.4                    | 3.0          | 34.7         | 62.8               | 71.8              | 9.0            |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

**Radiated Spurious Emission**  
**[Laird antenna]**

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. 10195552H  
Date 02/21/2014 03/09/2014  
Temperature/ Humidity 23deg. C / 35% RH 23deg. C / 31% RH  
Engineer Kazuya Yoshioka Shinya Watanabe  
(1-10GHz) (Above 10GHz)  
Mode 11n-20 Tx 2462MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 2483.500           | PK       | 60.5              | 28.7               | 3.1          | 34.7         | 57.6               | 73.9              | 16.3           |        |
| Hori     | 2483.500           | AV       | 47.0              | 28.7               | 3.1          | 34.7         | 44.1               | 53.9              | 9.8            |        |
| Vert     | 2483.500           | PK       | 62.4              | 28.7               | 3.1          | 34.7         | 59.5               | 73.9              | 14.4           |        |
| Vert     | 2483.500           | AV       | 48.6              | 28.7               | 3.1          | 34.7         | 45.7               | 53.9              | 8.2            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz  $20\log(3.0\text{m}/1.0\text{m})= 9.5\text{dB}$   
26.5GHz-40GHz  $20\log(3.0\text{m}/0.5\text{m})=15.6\text{dB}$

## Radiated Spurious Emission [Molex antenna]

Test place : Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. : 10195552H  
Date : 03/02/2014 03/04/2014 03/05/2014  
Temperature/ Humidity : 22 deg. C / 31% RH 20 deg. C / 23% RH 19 deg. C / 36% RH  
Engineer : Tomohisa Nakagawa Yutaka Yoshida Tomohisa Nakagawa  
Mode : (1-10GHz) (10-40GHz) Below 1GHz  
11n-20 Tx 5745MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|-----------------|----------------|-------------|--------|
| Hori     | 41.700          | QP       | 22.7           | 14.0            | 6.9       | 28.6      | 15.0            | 40.0           | 25.0        |        |
| Hori     | 110.000         | QP       | 22.3           | 11.5            | 7.5       | 28.4      | 12.9            | 43.5           | 30.6        |        |
| Hori     | 125.000         | QP       | 23.0           | 13.3            | 7.6       | 28.3      | 15.6            | 43.5           | 27.9        |        |
| Hori     | 250.000         | QP       | 21.9           | 17.1            | 8.4       | 27.7      | 19.7            | 46.0           | 26.3        |        |
| Hori     | 411.999         | QP       | 28.7           | 17.4            | 9.2       | 28.4      | 26.9            | 46.0           | 19.1        |        |
| Hori     | 499.995         | QP       | 30.3           | 18.1            | 9.5       | 28.8      | 29.1            | 46.0           | 16.9        |        |
| Hori     | 11490.000       | PK       | 52.5           | 39.7            | -2.0      | 33.7      | 56.5            | 73.9           | 17.4        |        |
| Hori     | 11490.000       | AV       | 39.6           | 39.7            | -2.0      | 33.7      | 43.6            | 53.9           | 10.4        |        |
| Vert     | 41.700          | QP       | 22.8           | 14.0            | 6.9       | 28.6      | 15.1            | 40.0           | 24.9        |        |
| Vert     | 110.000         | QP       | 22.4           | 11.5            | 7.5       | 28.4      | 13.0            | 43.5           | 30.5        |        |
| Vert     | 125.000         | QP       | 23.0           | 13.3            | 7.6       | 28.3      | 15.6            | 43.5           | 27.9        |        |
| Vert     | 250.000         | QP       | 21.9           | 17.1            | 8.4       | 27.7      | 19.7            | 46.0           | 26.3        |        |
| Vert     | 411.999         | QP       | 29.3           | 17.4            | 9.2       | 28.4      | 27.5            | 46.0           | 18.5        |        |
| Vert     | 499.995         | QP       | 26.5           | 18.1            | 9.5       | 28.8      | 25.3            | 46.0           | 20.7        |        |
| Vert     | 11490.000       | PK       | 58.3           | 39.7            | -2.0      | 33.7      | 62.3            | 73.9           | 11.6        |        |
| Vert     | 11490.000       | AV       | 43.9           | 39.7            | -2.0      | 33.7      | 47.9            | 53.9           | 6.0         |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz  $20\log(3.0m/1.0m)= 9.5dB$   
26.5GHz-40GHz  $20\log(3.0m/0.5m)=15.6dB$

### 20dBc Data Sheet

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant Factor [dB/m] | Loss [dB] | Gain [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark  |
|----------|-----------------|----------|----------------|-------------------|-----------|-----------|-----------------|----------------|-------------|---------|
| Hori     | 5745.000        | PK       | 97.7           | 32.7              | 4.0       | 33.7      | 100.7           | -              | -           | Carrier |
| Hori     | 5725.000        | PK       | 57.9           | 32.7              | 4.0       | 33.7      | 60.9            | 80.7           | 19.8        |         |
| Vert     | 5745.000        | PK       | 97.3           | 32.7              | 4.0       | 33.7      | 100.3           | -              | -           | Carrier |
| Vert     | 5725.000        | PK       | 57.1           | 32.7              | 4.0       | 33.7      | 60.1            | 80.3           | 20.2        |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

**Radiated Spurious Emission**  
**[Molex antenna]**

Test place                      Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No.                    10195552H  
Date                            03/02/2014                      03/04/2014  
Temperature/ Humidity    22 deg. C / 31% RH        20 deg. C / 23% RH  
Engineer                    Tomohisa Nakagawa        Yutaka Yoshida  
                                  (1-10GHz)                      (10-40GHz)  
Mode                            11n-20 Tx 5785MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 11570.000          | PK       | 52.9              | 39.7               | -1.9         | 33.7         | 57.0               | 73.9              | 16.9           |        |
| Hori     | 11570.000          | AV       | 38.9              | 39.7               | -1.9         | 33.7         | 43.0               | 53.9              | 10.9           |        |
| Vert     | 11570.000          | PK       | 57.3              | 39.7               | -1.9         | 33.7         | 61.4               | 73.9              | 12.5           |        |
| Vert     | 11570.000          | AV       | 43.2              | 39.7               | -1.9         | 33.7         | 47.3               | 53.9              | 6.6            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor:        10GHz-26.5GHz     $20\log(3.0\text{m}/1.0\text{m})= 9.5\text{dB}$   
                              26.5GHz-40GHz     $20\log(3.0\text{m}/0.5\text{m})=15.6\text{dB}$

## Radiated Spurious Emission [Molex antenna]

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. 10195552H  
Date 03/02/2014 03/04/2014  
Temperature/ Humidity 22 deg. C / 31% RH 20 deg. C / 23% RH  
Engineer Tomohisa Nakagawa Yutaka Yoshida  
(1-10GHz) (10-40GHz)  
Mode 11n-20 Tx 5825MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 11650.000          | PK       | 51.0              | 39.7               | -1.8         | 33.7         | 55.2               | 73.9              | 18.7           |        |
| Hori     | 11650.000          | AV       | 38.0              | 39.7               | -1.8         | 33.7         | 42.2               | 53.9              | 11.7           |        |
| Vert     | 11650.000          | PK       | 55.5              | 39.7               | -1.8         | 33.7         | 59.7               | 73.9              | 14.2           |        |
| Vert     | 11650.000          | AV       | 43.0              | 39.7               | -1.8         | 33.7         | 47.2               | 53.9              | 6.7            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB  
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

### 20dBc Data Sheet

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant<br>Factor<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark  |
|----------|--------------------|----------|-------------------|-------------------------|--------------|--------------|--------------------|-------------------|----------------|---------|
| Hori     | 5825.000           | PK       | 97.4              | 32.9                    | 4.0          | 33.7         | 100.6              | -                 | -              | Carrier |
| Hori     | 5850.000           | PK       | 47.6              | 32.9                    | 4.0          | 33.7         | 50.8               | 80.6              | 29.8           |         |
| Vert     | 5825.000           | PK       | 94.8              | 32.9                    | 4.0          | 33.7         | 98.0               | -                 | -              | Carrier |
| Vert     | 5850.000           | PK       | 44.9              | 32.9                    | 4.0          | 33.7         | 48.1               | 78.0              | 29.9           |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

## Radiated Spurious Emission [Molex antenna]

|                       |                                                 |                    |
|-----------------------|-------------------------------------------------|--------------------|
| Test place            | Head Office EMC Lab. No.2 Semi Anechoic Chamber |                    |
| Report No.            | 10195552H                                       |                    |
| Date                  | 03/02/2014                                      | 03/04/2014         |
| Temperature/ Humidity | 22 deg. C / 31% RH                              | 20 deg. C / 23% RH |
| Engineer              | Tomohisa Nakagawa                               | Yutaka Yoshida     |
|                       | (1-10GHz)                                       | (10-40GHz)         |
| Mode                  | 11n-40 Tx 5755MHz                               |                    |

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 11510.000          | PK       | 49.5              | 39.7               | -2.0         | 33.7         | 53.5               | 73.9              | 20.4           |        |
| Hori     | 11510.000          | AV       | 38.6              | 39.7               | -2.0         | 33.7         | 42.6               | 53.9              | 11.3           |        |
| Vert     | 11510.000          | PK       | 52.3              | 39.7               | -2.0         | 33.7         | 56.3               | 73.9              | 17.7           |        |
| Vert     | 11510.000          | AV       | 41.6              | 39.7               | -2.0         | 33.7         | 45.6               | 53.9              | 8.3            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor:      10GHz-26.5GHz     $20\log(3.0\text{m}/1.0\text{m})= 9.5\text{dB}$   
                                 26.5GHz-40GHz     $20\log(3.0\text{m}/0.5\text{m})=15.6\text{dB}$

### 20dBc Data Sheet

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant<br>Factor<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark  |
|----------|--------------------|----------|-------------------|-------------------------|--------------|--------------|--------------------|-------------------|----------------|---------|
| Hori     | 5755.000           | PK       | 94.3              | 32.7                    | 4.0          | 33.7         | 97.3               | -                 | -              | Carrier |
| Hori     | 5725.000           | PK       | 61.3              | 32.7                    | 4.0          | 33.7         | 64.3               | 77.3              | 13.0           |         |
| Vert     | 5755.000           | PK       | 95.0              | 32.7                    | 4.0          | 33.7         | 98.0               | -                 | -              | Carrier |
| Vert     | 5725.000           | PK       | 62.4              | 32.7                    | 4.0          | 33.7         | 65.4               | 78.0              | 12.6           |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

## Radiated Spurious Emission [Molex antenna]

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. 10195552H  
Date 03/02/2014 03/04/2014  
Temperature/ Humidity 22 deg. C / 31% RH 20 deg. C / 23% RH  
Engineer Tomohisa Nakagawa Yutaka Yoshida  
(1-10GHz) (10-40GHz)  
Mode 11n-40 Tx 5795MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 11590.000          | PK       | 49.3              | 39.7               | -1.8         | 33.7         | 53.5               | 73.9              | 20.4           |        |
| Hori     | 11590.000          | AV       | 38.6              | 39.7               | -1.8         | 33.7         | 42.8               | 53.9              | 11.1           |        |
| Vert     | 11590.000          | PK       | 51.5              | 39.7               | -1.8         | 33.7         | 55.7               | 73.9              | 18.2           |        |
| Vert     | 11590.000          | AV       | 40.7              | 39.7               | -1.8         | 33.7         | 44.9               | 53.9              | 9.0            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz  $20\log(3.0\text{m}/1.0\text{m})= 9.5\text{dB}$   
26.5GHz-40GHz  $20\log(3.0\text{m}/0.5\text{m})=15.6\text{dB}$

## Radiated Spurious Emission [Laird antenna]

|                       |                                                 |                              |                                 |
|-----------------------|-------------------------------------------------|------------------------------|---------------------------------|
| Test place            | Head Office EMC Lab. No.2 Semi Anechoic Chamber |                              |                                 |
| Report No.            | 10195552H                                       |                              |                                 |
| Date                  | 03/03/2014                                      | 03/04/2014                   | 03/05/2014                      |
| Temperature/ Humidity | 21 deg. C / 34% RH                              | 20 deg. C / 23% RH           | 19 deg. C / 36% RH              |
| Engineer              | Takumi Shimada<br>(1-10GHz)                     | Yutaka Yoshida<br>(10-40GHz) | Tomohisa Nakagawa<br>Below 1GHz |
| Mode                  | 11n-20 Tx 5745MHz                               |                              |                                 |

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 41.700             | QP       | 22.8              | 14.0               | 6.9          | 28.6         | 15.1               | 40.0              | 24.9           |        |
| Hori     | 110.000            | QP       | 22.5              | 11.5               | 7.5          | 28.4         | 13.1               | 43.5              | 30.4           |        |
| Hori     | 125.000            | QP       | 22.6              | 13.3               | 7.6          | 28.3         | 15.2               | 43.5              | 28.3           |        |
| Hori     | 250.000            | QP       | 22.0              | 17.1               | 8.4          | 27.7         | 19.8               | 46.0              | 26.2           |        |
| Hori     | 411.999            | QP       | 29.5              | 17.4               | 9.2          | 28.4         | 27.7               | 46.0              | 18.3           |        |
| Hori     | 499.995            | QP       | 32.3              | 18.1               | 9.5          | 28.8         | 31.1               | 46.0              | 14.9           |        |
| Hori     | 11490.000          | PK       | 49.3              | 39.7               | -2.0         | 33.7         | 53.3               | 73.9              | 20.6           |        |
| Hori     | 11490.000          | AV       | 37.3              | 39.7               | -2.0         | 33.7         | 41.3               | 53.9              | 12.6           |        |
| Vert     | 41.700             | QP       | 22.8              | 14.0               | 6.9          | 28.6         | 15.1               | 40.0              | 24.9           |        |
| Vert     | 110.000            | QP       | 22.5              | 11.5               | 7.5          | 28.4         | 13.1               | 43.5              | 30.4           |        |
| Vert     | 125.000            | QP       | 22.5              | 13.3               | 7.6          | 28.3         | 15.1               | 43.5              | 28.4           |        |
| Vert     | 250.000            | QP       | 23.2              | 17.1               | 8.4          | 27.7         | 21.0               | 46.0              | 25.0           |        |
| Vert     | 411.999            | QP       | 28.9              | 17.4               | 9.2          | 28.4         | 27.1               | 46.0              | 18.9           |        |
| Vert     | 499.995            | QP       | 26.8              | 18.1               | 9.5          | 28.8         | 25.6               | 46.0              | 20.4           |        |
| Vert     | 11490.000          | PK       | 54.6              | 39.7               | -2.0         | 33.7         | 58.6               | 73.9              | 15.3           |        |
| Vert     | 11490.000          | AV       | 41.2              | 39.7               | -2.0         | 33.7         | 45.2               | 53.9              | 8.7            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor:      10GHz-26.5GHz    20log(3.0m/1.0m)= 9.5dB  
                              26.5GHz-40GHz    20log(3.0m/0.5m)=15.6dB

**20dBc Data Sheet**

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant<br>Factor<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark  |
|----------|--------------------|----------|-------------------|-------------------------|--------------|--------------|--------------------|-------------------|----------------|---------|
| Hori     | 5745.000           | PK       | 92.2              | 32.7                    | 4.0          | 33.7         | 95.2               | -                 | -              | Carrier |
| Hori     | 5725.000           | PK       | 57.6              | 32.7                    | 4.0          | 33.7         | 60.6               | 75.2              | 14.6           |         |
| Vert     | 5745.000           | PK       | 92.3              | 32.7                    | 4.0          | 33.7         | 95.3               | -                 | -              | Carrier |
| Vert     | 5725.000           | PK       | 54.2              | 32.7                    | 4.0          | 33.7         | 57.2               | 75.3              | 18.1           |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

**Radiated Spurious Emission**  
**[Laird antenna]**

Test place                      Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No.                    10195552H  
Date                            03/03/2014                      03/04/2014  
Temperature/ Humidity    21 deg. C / 34% RH        20 deg. C / 23% RH  
Engineer                      Takumi Shimada               Yutaka Yoshida  
                                      (1-10GHz)                      (10-40GHz)  
Mode                            11n-20 Tx 5785MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 11570.000          | PK       | 49.8              | 39.7               | -1.9         | 33.7         | 53.9               | 73.9              | 20.0           |        |
| Hori     | 11570.000          | AV       | 37.3              | 39.7               | -1.9         | 33.7         | 41.4               | 53.9              | 12.5           |        |
| Vert     | 11570.000          | PK       | 48.5              | 39.7               | -1.9         | 33.7         | 52.6               | 73.9              | 21.3           |        |
| Vert     | 11570.000          | AV       | 37.3              | 39.7               | -1.9         | 33.7         | 41.4               | 53.9              | 12.5           |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor:            10GHz-26.5GHz     $20\log(3.0\text{m}/1.0\text{m})= 9.5\text{dB}$   
                                  26.5GHz-40GHz     $20\log(3.0\text{m}/0.5\text{m})=15.6\text{dB}$

## Radiated Spurious Emission [Laird antenna]

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. 10195552H  
Date 03/03/2014 03/04/2014  
Temperature/ Humidity 21 deg. C / 34% RH 20 deg. C / 23% RH  
Engineer Takumi Shimada Yutaka Yoshida  
(1-10GHz) (10-40GHz)  
Mode 11n-20 Tx 5825MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 11650.000          | PK       | 49.3              | 39.7               | -1.8         | 33.7         | 53.5               | 73.9              | 20.4           |        |
| Hori     | 11650.000          | AV       | 37.1              | 39.7               | -1.8         | 33.7         | 41.3               | 53.9              | 12.6           |        |
| Vert     | 11650.000          | PK       | 52.4              | 39.7               | -1.8         | 33.7         | 56.6               | 73.9              | 17.3           |        |
| Vert     | 11650.000          | AV       | 39.3              | 39.7               | -1.8         | 33.7         | 43.5               | 53.9              | 10.4           |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz  $20\log(3.0\text{m}/1.0\text{m})= 9.5\text{dB}$   
26.5GHz-40GHz  $20\log(3.0\text{m}/0.5\text{m})=15.6\text{dB}$

### 20dBc Data Sheet

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant<br>Factor<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark  |
|----------|--------------------|----------|-------------------|-------------------------|--------------|--------------|--------------------|-------------------|----------------|---------|
| Hori     | 5825.000           | PK       | 95.4              | 32.9                    | 4.0          | 33.7         | 98.6               | -                 | -              | Carrier |
| Hori     | 5850.000           | PK       | 45.2              | 32.9                    | 4.0          | 33.7         | 48.4               | 78.6              | 30.2           |         |
| Vert     | 5825.000           | PK       | 90.2              | 32.9                    | 4.0          | 33.7         | 93.4               | -                 | -              | Carrier |
| Vert     | 5850.000           | PK       | 41.4              | 32.9                    | 4.0          | 33.7         | 44.6               | 73.4              | 28.8           |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

## Radiated Spurious Emission [Laird antenna]

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. 10195552H  
Date 03/03/2014 03/04/2014  
Temperature/ Humidity 21 deg. C / 34% RH 20 deg. C / 23% RH  
Engineer Takumi Shimada Yutaka Yoshida  
(1-10GHz) (10-40GHz)  
Mode 11n-40 Tx 5755MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 11510.000          | PK       | 48.1              | 39.7               | -2.0         | 33.7         | 52.1               | 73.9              | 21.8           |        |
| Hori     | 11510.000          | AV       | 36.7              | 39.7               | -2.0         | 33.7         | 40.7               | 53.9              | 13.2           |        |
| Vert     | 11510.000          | PK       | 51.3              | 39.7               | -2.0         | 33.7         | 55.3               | 73.9              | 18.6           |        |
| Vert     | 11510.000          | AV       | 40.0              | 39.7               | -2.0         | 33.7         | 44.0               | 53.9              | 9.9            |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB  
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

### 20dBc Data Sheet

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant<br>Factor<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark  |
|----------|--------------------|----------|-------------------|-------------------------|--------------|--------------|--------------------|-------------------|----------------|---------|
| Hori     | 5755.000           | PK       | 92.2              | 32.7                    | 4.0          | 33.7         | 95.2               | -                 | -              | Carrier |
| Hori     | 5725.000           | PK       | 57.3              | 32.7                    | 4.0          | 33.7         | 60.3               | 75.2              | 14.9           |         |
| Vert     | 5755.000           | PK       | 89.2              | 32.7                    | 4.0          | 33.7         | 92.2               | -                 | -              | Carrier |
| Vert     | 5725.000           | PK       | 53.2              | 32.7                    | 4.0          | 33.7         | 56.2               | 72.2              | 16.0           |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

## Radiated Spurious Emission [Laird antenna]

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. 10195552H  
Date 03/03/2014 03/04/2014  
Temperature/ Humidity 21 deg. C / 34% RH 20 deg. C / 23% RH  
Engineer Takumi Shimada Yutaka Yoshida  
(1-10GHz) (10-40GHz)  
Mode 11n-40 Tx 5795MHz

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant.Fac.<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark |
|----------|--------------------|----------|-------------------|--------------------|--------------|--------------|--------------------|-------------------|----------------|--------|
| Hori     | 11590.000          | PK       | 47.3              | 39.7               | -1.8         | 33.7         | 51.5               | 73.9              | 22.4           |        |
| Hori     | 11590.000          | AV       | 35.6              | 39.7               | -1.8         | 33.7         | 39.8               | 53.9              | 14.1           |        |
| Vert     | 11590.000          | PK       | 50.0              | 39.7               | -1.8         | 33.7         | 54.2               | 73.9              | 19.7           |        |
| Vert     | 11590.000          | AV       | 38.6              | 39.7               | -1.8         | 33.7         | 42.8               | 53.9              | 11.1           |        |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB  
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB


### 20dBc Data Sheet

| Polarity | Frequency<br>[MHz] | Detector | Reading<br>[dBuV] | Ant<br>Factor<br>[dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Remark  |
|----------|--------------------|----------|-------------------|-------------------------|--------------|--------------|--------------------|-------------------|----------------|---------|
| Hori     | 5795.000           | PK       | 93.3              | 32.9                    | 4.0          | 33.7         | 96.5               | -                 | -              | Carrier |
| Hori     | 5850.000           | PK       | 40.3              | 32.9                    | 4.0          | 33.7         | 43.5               | 76.5              | 33.0           |         |
| Vert     | 5795.000           | PK       | 88.2              | 32.9                    | 4.0          | 33.7         | 91.4               | -                 | -              | Carrier |
| Vert     | 5850.000           | PK       | 38.0              | 32.9                    | 4.0          | 33.7         | 41.2               | 71.4              | 30.2           |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

### The Tested Burst Timing

Test place Head Office EMC Lab. No.2 Semi Anechoic Chamber  
Report No. 10195552H  
Date 03/02/2014  
Temperature/ Humidity 22 deg. C / 31% RH  
Engineer Tomohisa Nakagawa

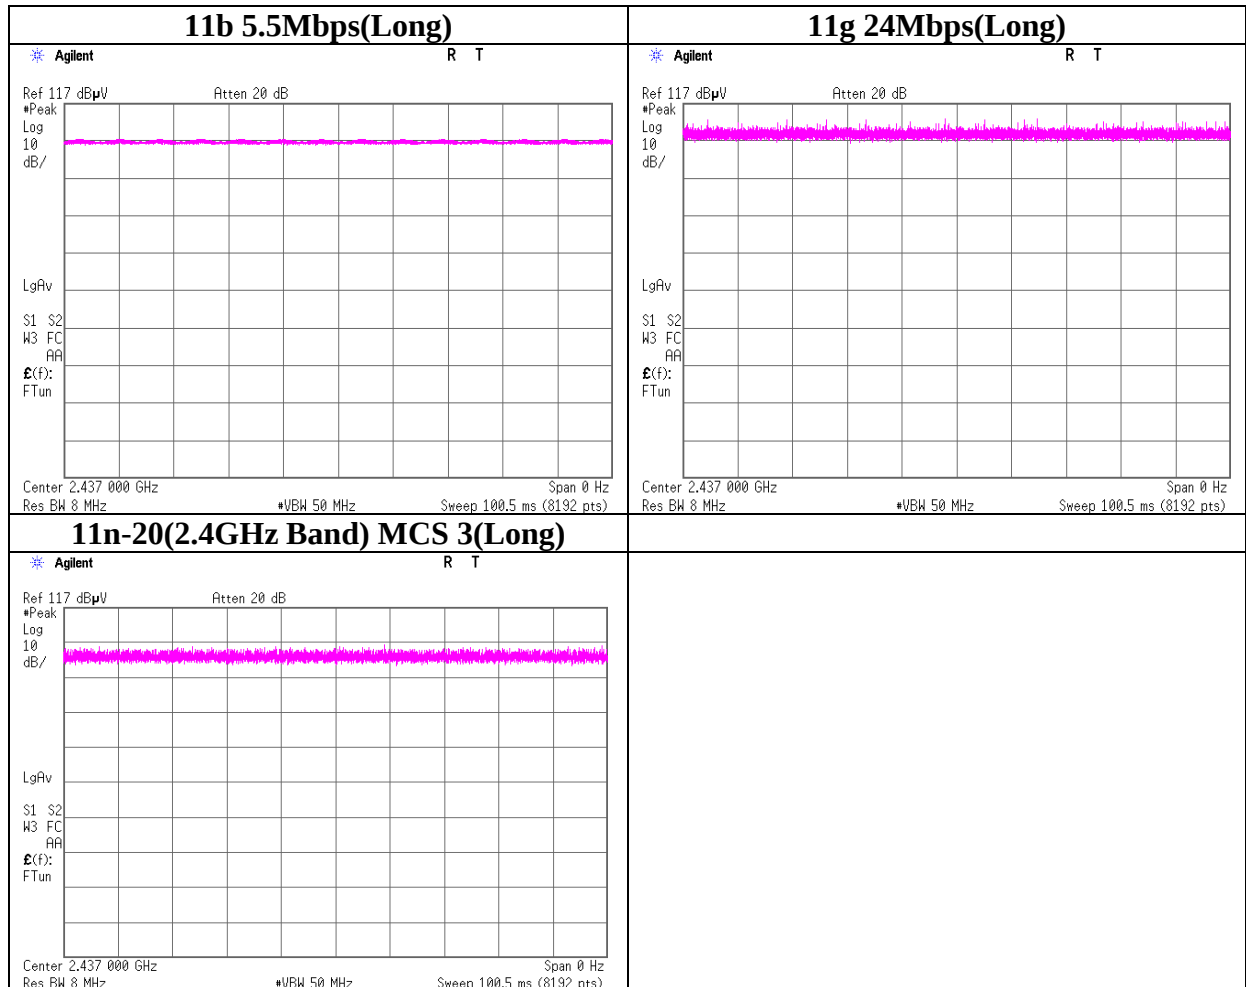

The Tested Burst Timing

Test place

Report No.

Date

Temperature/ Humidity

Engineer


Head Office EMC Lab. No.2 Semi Anechoic Chamber

10195552H

03/02/2014

22 deg. C / 31% RH

Tomohisa Nakagawa

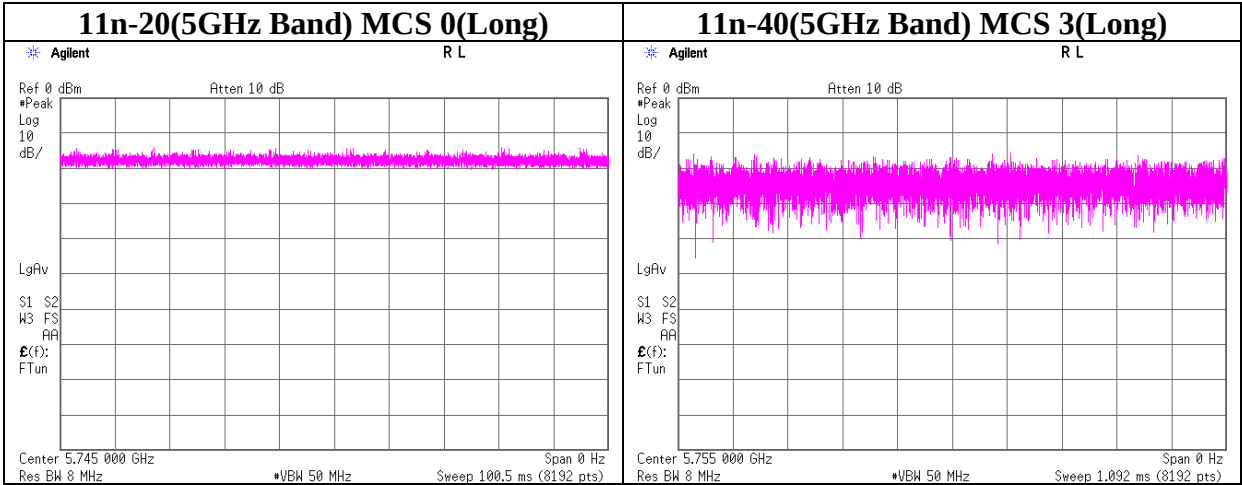

## APPENDIX 2: Test instruments

### EMI test equipment (1/2)

| Control No. | Instrument                   | Manufacturer | Model No                 | Serial No                      | Test Item | Calibration Date *<br>Interval(month) |
|-------------|------------------------------|--------------|--------------------------|--------------------------------|-----------|---------------------------------------|
| MAEC-03     | Semi Anechoic Chamber(NSA)   | TDK          | Semi Anechoic Chamber 3m | DA-10005                       | RE        | 2014/02/27 * 12                       |
| MOS-13      | Thermo-Hygrometer            | Custom       | CTH-180                  | 1301                           | RE        | 2014/02/20 * 12                       |
| MJM-16      | Measure                      | KOMELON      | KMC-36                   | -                              | RE        | -                                     |
| COTS-MEMI   | EMI measurement program      | TSJ          | TEPTO-DV                 | -                              | RE        | -                                     |
| MRENT-114   | Spectrum Analyzer            | Agilent      | E4440A                   | MY46187105                     | RE        | 2013/11/11 * 12                       |
| MHA-20      | Horn Antenna 1-18GHz         | Schwarzbeck  | BBHA9120D                | 258                            | RE        | 2013/05/17 * 12                       |
| MCC-133     | Microwave Cable              | HUBER+SUHNER | SUCOFLEX104              | 336164/4(1m) /<br>340640(5m)   | RE        | 2013/09/27 * 12                       |
| MPA-11      | MicroWave System Amplifier   | Agilent      | 83017A                   | MY39500779                     | RE        | 2013/03/12 * 12                       |
| MHF-25      | High Pass Filter 3.5-18.0GHz | UL Japan     | HPF SELECTOR             | 001                            | RE        | 2013/09/01 * 12                       |
| MAEC-02     | Semi Anechoic Chamber(NSA)   | TDK          | Semi Anechoic Chamber 3m | DA-06902                       | RE/CE     | 2013/06/30 * 12                       |
| MOS-22      | Thermo-Hygrometer            | Custom       | CTH-201                  | 0003                           | RE/CE     | 2014/02/20 * 12                       |
| MJM-14      | Measure                      | KOMELON      | KMC-36                   | -                              | RE/CE     | -                                     |
| MSA-13      | Spectrum Analyzer            | Agilent      | E4440A                   | MY46185823                     | RE        | 2013/06/14 * 12                       |
| MHA-21      | Horn Antenna 1-18GHz         | Schwarzbeck  | BBHA9120D                | 9120D-557                      | RE        | 2013/08/12 * 12                       |
| MCC-166     | Microwave Cable              | Junkosha     | MWX221                   | 1303S120(1m) /<br>1311S167(5m) | RE        | 2013/11/27 * 12                       |
| MPA-10      | Pre Amplifier                | Agilent      | 8449B                    | 3008A02142                     | RE        | 2014/01/21 * 12                       |
| MHF-26      | High Pass Filter 3.5-18.0GHz | UL Japan     | HPF SELECTOR             | 002                            | RE        | 2013/09/01 * 12                       |
| MHA-06      | Horn Antenna 1-18GHz         | Schwarzbeck  | BBHA9120D                | 254                            | RE        | 2014/02/21 * 12                       |
| MHF-06      | High Pass Filter 3.5-24GHz   | TOKIMEC      | TF323DCA                 | 601                            | RE        | 2013/05/30 * 12                       |
| MHA-02      | Horn Antenna 18-26.5GHz      | EMCO         | 3160-09                  | 1265                           | RE        | 2014/02/21 * 12                       |
| MHA-04      | Horn Antenna 26.5-40GHz      | EMCO         | 3160-10                  | 1140                           | RE        | 2013/11/25 * 12                       |
| MHA-06      | Horn Antenna 1-18GHz         | Schwarzbeck  | BBHA9120D                | 254                            | RE        | 2014/02/21 * 12                       |
| MSA-10      | Spectrum Analyzer            | Agilent      | E4448A                   | MY46180655                     | RE        | 2014/02/20 * 12                       |
| MCC-54      | Microwave Cable              | Suhner       | SUCOFLEX101              | 2873(1m) /<br>2876(5m)         | RE        | 2013/03/19 * 12                       |
| MCC-76      | Microwave Cable 1G-26.5GHz   | Suhner       | SUCOFLEX104              | 278967/4                       | RE        | 2013/12/24 * 12                       |
| MPSU-04     | Power Supply                 | Agilent      | 87421A                   | 3611A01548                     | RE        | Pre Check                             |

**EMI test equipment (2/2)**

| Control No. | Instrument          | Manufacturer         | Model No                                               | Serial No   | Test Item | Calibration Date *<br>Interval(month) |
|-------------|---------------------|----------------------|--------------------------------------------------------|-------------|-----------|---------------------------------------|
| MTR-03      | Test Receiver       | Rohde & Schwarz      | ESCI                                                   | 100300      | CE/RE     | 2013/06/11 * 12                       |
| MLS-06      | LISN(AMN)           | Schwarzbeck          | NSLK8127                                               | 8127363     | CE        | 2014/01/27 * 12                       |
| MTA-31      | Terminator          | TME                  | CT-01                                                  | -           | CE        | 2014/01/20 * 12                       |
| MCC-13      | Coaxial Cable       | Fujikura             | 3D-2W(12m)/5D-<br>2W(5m)/5D-<br>2W(0.8m)/5D-<br>2W(1m) | -           | CE        | 2014/02/20 * 12                       |
| MAT-65      | Attenuator(13dB)    | JFW Industries, Inc. | 50FP-013H2 N                                           | -           | CE        | 2014/01/29 * 12                       |
| MBA-02      | Biconical Antenna   | Schwarzbeck          | BBA9106                                                | VHA91032008 | RE        | 2013/10/13 * 12                       |
| MLA-02      | Logperiodic Antenna | Schwarzbeck          | USLP9143                                               | 201         | RE        | 2013/10/13 * 12                       |
| MCC-12      | Coaxial Cable       | Fujikura/Agilent     | -                                                      | -           | RE        | 2014/02/20 * 12                       |
| MAT-07      | Attenuator(6dB)     | Weinschel Corp       | 2                                                      | BK7970      | RE        | 2013/11/26 * 12                       |
| MPA-09      | Pre Amplifier       | Agilent              | 8447D                                                  | 2944A10845  | RE        | 2013/09/12 * 12                       |

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item: CE: Conducted Emission  
RE: Radiated Emission