

Page: 99 of 670

# MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

#### 9.1 Standard Applicable

#### 9.1.1 **Duty Cycle**

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 100 of 670

#### **FCC** 9.1.2

|          |   |   | e-CRF Title 47 §15.407               |  |   |   |  |  |  |  |
|----------|---|---|--------------------------------------|--|---|---|--|--|--|--|
| Band     |   | EUT<br>CATEGORY   | Conducted Output<br>Power            | EIRP   | TPC   | Antenna<br>Directional Gain<br>Requirements |  |  |  |  |
|          |   | Fixed point-to-point  | 1 Watt(30dBm)                        | Not required   | Not required  | 23dBi                                       |  |  |  |  |
| U-NII-1  |   | Outdoor AP  | 1 Watt(30dBm)                        | Elevation angle above<br>30 degrees 125mW<br>(21dBm) | Not required  | 6dBi  |  |  |  |  |
|          | v | Indoor AP   | 1 Watt(30dBm)                        | Not required   | Not required  | 6dBi  |  |  |  |  |
|          |   | Other   | 250mW(23.98dBm)                      | Not required   | Not required  | 6dBi  |  |  |  |  |
| U-NII-2A | v | Other   | 250mW(23.98dBm) or<br>11dBm+10 log B | Not required   | When EIRP >500mW<br>At least 6dB below<br>EIRP 1W (30dBm) | 6dBi  |  |  |  |  |
| U-NII-2C | ٧ | Other   | 250mW(23.98dBm) or<br>11dBm+10 log B | Not required   |   | 6dBi  |  |  |  |  |
| U-NII-3  | ٧ | Other   | 1 Watt(30dBm)                        | Not required   | Not required  | 6dBi  |  |  |  |  |
| 0-1111-3 |   | Fixed point-to-point  | 1 Watt(30dBm)                        | Not required   | Not required  | Not required                                |  |  |  |  |
| U-NII-4  |   | Indoor AP<br>(a channel spans<br>5725~5850 and<br>5850~5895MHz)     | Not required                         | 36dBm  | Not required  | Not required                                |  |  |  |  |
|          |   | Indoor client<br>(a channel spans<br>5725~5850 and<br>5850~5895MHz) | Not required                         | 30dBm  | Not required  | Not required                                |  |  |  |  |
|          |   | Subordinate device  | Not required                         | 36dBm  | Not required  | Not required                                |  |  |  |  |

<sup>1.</sup> If transmitting antennas of directional gain greater than the antenna requirements column, the Maximum transmit power shall be reduced by the amount in dB that the direction-al gain of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<sup>2.</sup> For the 10 log B, B is the 26 dB emission bandwidth.



Page: 101 of 670


#### 9.1.3 **ISED**

| FREQUENCY                  |   |   | RSS-247 §   | 6.2.1~6.2.4                |  |
|----------------------------|---|---|---|----------------------------|--|
| BAND   EU                  |   | EUT<br>CATEGORY                         | EIRP  | Conducted<br>Output Power  | TPC  |
| 5150~5250                  |   | OEM devices<br>installed in<br>vehicles | 30 mW or 1.76 + 10 log10B   | N/A                        | At least 3dB<br>below 30mW EIRP            |
| 3100 0230                  | v | Other device                            | 200 mW or 10 + 10 log10B dBm  | N/A                        | N/A  |
|                            |   | OEM devices<br>installed in<br>vehicles | 30 mW or 1.76 + 10 log10B   | N/A                        | At least 3dB<br>below 30mW EIRP            |
| E2E0 E2E0                  | ٧ | Other device                            | 1.0 W or 17 + 10 log10B dBm   | 250 mW or<br>11 +10 log10B | EIRP >500mW, at least<br>6dB below 1W EIRP |
| 5250~5350                  |   | Outdoor Fixed<br>with<br>EIRP>200mW     | -13 dBW/MHz for $0^{\circ} \le \theta < 8^{\circ}$<br>-13 −0.716 (θ-8) dBW/MHz for $8^{\circ} \le \theta < 40^{\circ}$<br>-35.9 −1.22 (θ-40) dBW/MHz for $40^{\circ} \le \theta \le 45^{\circ}$ | N/A                        | EIRP >500mW, at least<br>6dB below 1W EIRP |
| 5470-5600 and<br>5650-5725 | ٧ | All                                     | 1.0 W or 17 + 10 log10B dBm   | 250 mW or<br>11 +10 log10B | EIRP >500mW, at least<br>6dB below 1W EIRP |
| 5725~5850                  | V | All                                     | N/A   | 1 W                        | N/A  |

<sup>1</sup> For equipment operating in the band 5725-5850 MHz, If transmitting antennas of directional gain greater than 6 dBi are used, the Maximum transmit power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 9.2 **Test Setup**

#### 9.2.1 **Duty Cycle**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司


<sup>2.</sup> For the 10 log B, B is the 99% emission bandwidth.



Page: 102 of 670



#### 9.2.2 **Output Power**



#### 9.3 **Measurement Procedure**

#### 9.3.1 **Duty Cycle Measurements**

- 1. Set span = Zero
- 2. RBW = 8MHz
- VBW = 8MHz,
- 4. Detector = Peak

#### 9.3.2 **Output Power Measurements**

- Place the EUT on the table and set it in transmitting mode. 1.
- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter
- 4. Power Meter is used as the auxiliary test equipment to conduct the output power meas-
- Record the max. reading and add 10 log(1/duty cycle). 5.
- Repeat above procedures until all frequency (low, middle, and high channel) measured were complete.
- MIMO mode: offset is set with "measure and add 10 Log (N)" to measurement for MIMO mode. Offset = cable loss + 10 log (N), where N is number of transmitting antenna, cable loss is specified below.

#### Note:

For U-NII1, 2A, 2C and 3 Bands, when the antenna gain is greater than 6 dBi, the power limit attenuated accordingly.

As per section F. 2). e). (ii) of FCC KDB 662911 D01

If antenna gains are not equal and each transmit antenna is driven by only one spatial stream, directional gain may be calculated by either of the following formulas.

• Directional Gain = 
$$10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^{2}}{N_{ANT}} \right]$$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 103 of 670

# where

Each antenna is driven by no more than one spatial stream;

NSS = the number of independent spatial streams of data;

NANT = the total number of antennas

 $g_{j,k}$  = / 20 10Gk if the kth antenna is being fed by spatial stream j, or zero if it is not;  $G_k$  is the gain in dBi of the kth antenna.

#### **Duty Cycle Measurement Result** 9.4

|              | Mode        | Duty Cycle (%)<br>=Ton / (Ton+Toff) | Duty Factor (dB)<br>=10*log ( 1/Duty Cycle ) | 1/T (kHz) | VBW<br>setting<br>(kHz) |
|--------------|-------------|-------------------------------------|--|-----------|-------------------------|
| 802.11a      |             | 99.10                               | 0.04   | 0.51      | 0.01                    |
| 8            | 302.11n_20  | 99.67                               | 0.01   | 0.18      | 0.01                    |
| 8            | 02.11ac_20  | 99.71                               | 0.01   | 0.18      | 0.01                    |
| 3            | 302.11n_40  | 99.67                               | 0.01   | 0.18      | 0.01                    |
| 802.11ac_40  |             | 99.67                               | 0.01   | 0.18      | 0.01                    |
| 8            | 02.11ac_80  | 99.71                               | 0.01   | 0.18      | 0.01                    |
| 80           | )2.11ac_160 | 99.71                               | 0.01   | 0.18      | 0.01                    |
| Mode         | RU Config   | Duty Cycle (%)<br>=Ton / (Ton+Toff) | Duty Factor (dB) =10*log (<br>1/Duty Cycle ) | 1/T (kHz) | VBW<br>setting<br>(kHz) |
| 802.11ax_20  | Full        | 99.71                               | 0.01   | 0.18      | 0.01                    |
| 802.11ax_40  | Full        | 99.71                               | 0.01   | 0.18      | 0.01                    |
| 802.11ax_80  | Full        | 99.67                               | 0.01   | 0.18      | 0.01                    |
| 802.11ax_160 | Full        | 99.71                               | 0.01   | 0.18      | 0.01                    |
| 802.11be_20  | Full        | 99.67                               | 0.01   | 0.18      | 0.01                    |
| 802.11be_40  | Full        | 99.67                               | 0.01   | 0.18      | 0.01                    |
| 802.11be_80  | Full        | 99.67                               | 0.01   | 0.18      | 0.01                    |
| 802.11be_160 | Full        | 99.67                               | 0.01   | 0.18      | 0.01                    |


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 104 of 670

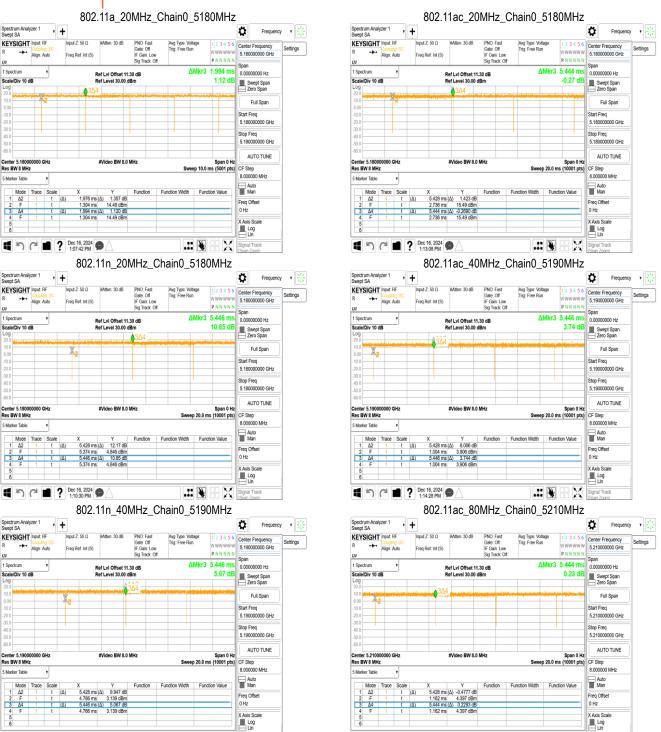

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

.: 🖫

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488

■ ? Dec 16, 2024 ■ ? 1:16:37 PM

■ ? Dec 16, 2024 ■ ? 1:11:30 PM

.: 👺



Page: 105 of 670



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

.: 🖫

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488


■ ? Dec 16, 2024 ■ 1:26:32 PM

■ ? Dec 16, 2024 ■ ? 1:23:08 PM

.: 👺



Page: 106 of 670

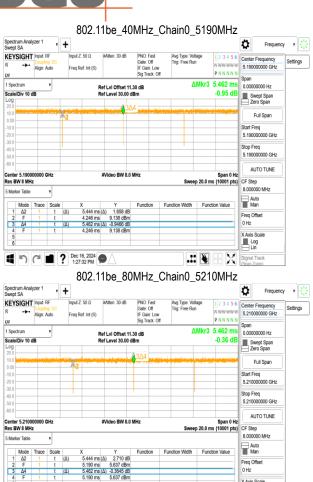



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488

0 Hz X Axis Scale



Page: 107 of 670

#### 9.5 **Output Power Measurement Result**

#### 9.5.1 **FCC Output power**

802.11a\_2TX

| СН  | Frequency<br>(MHz) | Data<br>Rate | Power<br>Setting | Avg. POV | ÆR (dBm) | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|-----|--------------------|--------------|------------------|----------|----------|----------------|----------------|-------------------|--------|
|     | (1411 12)          | Nate         | Setting          | Ch0      | Ch1      | (mW)           | (dBm)          | (dBm)             |        |
| 36  | 5180               | 6            | 19               | 18.85    | 18.90    | 154.335        | 21.88          | 30                | PASS   |
| 44  | 5220               | 6            | 19               | 18.83    | 18.58    | 148.469        | 21.72          | 30                | PASS   |
| 48  | 5240               | 6            | 19               | 18.86    | 18.69    | 150.848        | 21.79          | 30                | PASS   |
| 52  | 5260               | 6            | 15               | 15.02    | 14.91    | 62.732         | 17.97          | 23.98             | PASS   |
| 60  | 5300               | 6            | 15.5             | 15.45    | 15.35    | 69.340         | 18.41          | 23.98             | PASS   |
| 64  | 5320               | 6            | 15.5             | 15.46    | 15.26    | 68.718         | 18.37          | 23.98             | PASS   |
| 100 | 5500               | 6            | 15               | 14.75    | 15.01    | 61.539         | 17.89          | 23.98             | PASS   |
| 116 | 5580               | 6            | 15.5             | 15.15    | 15.39    | 67.317         | 18.28          | 23.98             | PASS   |
| 140 | 5700               | 6            | 15               | 14.59    | 14.81    | 59.033         | 17.71          | 23.98             | PASS   |
| 144 | 5720(U-NII 2C)     | 6            | 15               | 13.29    | 13.47    | 43.583         | 16.39          | 23.03             | PASS   |
| 144 | 5720 (U-NII 3)     | 6            | 15               | 9.01     | 9.22     | 16.336         | 12.13          | 30                | PASS   |
| 149 | 5745               | 6            | 18.5             | 18.26    | 18.03    | 130.499        | 21.16          | 30                | PASS   |
| 157 | 5785               | 6            | 21               | 20.70    | 20.76    | 236.574        | 23.74          | 30                | PASS   |
| 165 | 5825               | 6            | 20               | 19.72    | 19.41    | 181.023        | 22.58          | 30                | PASS   |

802.11n HT20 2TX

| СН  | Frequency      | Data | Power<br>Setting | Avg. POV | ÆR (dBm) | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|-----|----------------|------|------------------|----------|----------|----------------|----------------|-------------------|--------|
|     | (MHz)          | Rate | ŭ                | Ch0      | Ch1      | (mW)           | (dBm)          | (dBm)             |        |
| 36  | 5180           | MCS0 | 19               | 18.89    | 18.84    | 154.160        | 21.88          | 30                | PASS   |
| 44  | 5220           | MCS0 | 19               | 18.75    | 18.66    | 148.590        | 21.72          | 30                | PASS   |
| 48  | 5240           | MCS0 | 18.5             | 18.17    | 18.10    | 130.311        | 21.15          | 30                | PASS   |
| 52  | 5260           | MCS0 | 15.5             | 15.46    | 15.24    | 68.644         | 18.37          | 23.98             | PASS   |
| 60  | 5300           | MCS0 | 16               | 15.84    | 15.64    | 75.090         | 18.76          | 23.98             | PASS   |
| 64  | 5320           | MCS0 | 15.5             | 15.43    | 15.07    | 67.118         | 18.27          | 23.98             | PASS   |
| 100 | 5500           | MCS0 | 14.5             | 14.24    | 14.32    | 53.639         | 17.29          | 23.98             | PASS   |
| 116 | 5580           | MCS0 | 16               | 15.64    | 15.67    | 73.615         | 18.67          | 23.98             | PASS   |
| 140 | 5700           | MCS0 | 15.5             | 15.04    | 15.29    | 65.788         | 18.18          | 23.98             | PASS   |
| 144 | 5720(U-NII 2C) | MCS0 | 15.5             | 13.76    | 13.95    | 48.621         | 16.87          | 23.06             | PASS   |
| 144 | 5720 (U-NII 3) | MCS0 | 15.5             | 9.54     | 9.80     | 18.536         | 12.68          | 30                | PASS   |
| 149 | 5745           | MCS0 | 18.5             | 18.16    | 17.93    | 127.679        | 21.06          | 30                | PASS   |
| 157 | 5785           | MCS0 | 21               | 20.69    | 20.75    | 236.307        | 23.73          | 30                | PASS   |
| 165 | 5825           | MCS0 | 20               | 19.68    | 19.42    | 180.555        | 22.57          | 30                | PASS   |

802.11n\_HT40\_2TX

| СН  | Frequency<br>(MHz) | Data<br>Rate | Power<br>Setting | Avg. POWER (dBm) |       | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|-----|--------------------|--------------|------------------|------------------|-------|----------------|----------------|-------------------|--------|
|     | (141712)           | Nate         | Setting          | Ch0              | Ch1   | (mW)           | (dBm)          | (dBm)             |        |
| 38  | 5190               | MCS0         | 15               | 15.00            | 14.99 | 63.236         | 18.01          | 30                | PASS   |
| 46  | 5230               | MCS0         | 19.5             | 19.47            | 19.26 | 173.018        | 22.38          | 30                | PASS   |
| 54  | 5270               | MCS0         | 18.5             | 18.50            | 18.24 | 137.613        | 21.39          | 23.98             | PASS   |
| 62  | 5310               | MCS0         | 15.5             | 15.50            | 15.45 | 70.627         | 18.49          | 23.98             | PASS   |
| 102 | 5510               | MCS0         | 18               | 18.00            | 17.99 | 126.173        | 21.01          | 23.98             | PASS   |
| 110 | 5550               | MCS0         | 18.5             | 18.49            | 18.28 | 138.068        | 21.40          | 23.98             | PASS   |
| 134 | 5670               | MCS0         | 18.5             | 18.46            | 18.30 | 137.892        | 21.40          | 23.98             | PASS   |
| 142 | 5710(U-NII 2C)     | MCS0         | 18               | 17.16            | 17.03 | 102.477        | 20.11          | 23.98             | PASS   |
| 142 | 5710 (U-NII 3)     | MCS0         | 18               | 10.16            | 9.58  | 19.448         | 12.89          | 30                | PASS   |
| 151 | 5755               | MCS0         | 19               | 18.90            | 18.75 | 152.767        | 21.84          | 30                | PASS   |
| 159 | 5795               | MCS0         | 21.5             | 21.32            | 21.43 | 274.790        | 24.39          | 30                | PASS   |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 108 of 670

| ดบว | 1120 | VHT20 | 2TY |
|-----|------|-------|-----|
|     |      |       |     |

| СН  | Frequency<br>(MHz) | Data<br>Rate | Power<br>Setting | Avg. POV | /ER (dBm) | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|-----|--------------------|--------------|------------------|----------|-----------|----------------|----------------|-------------------|--------|
|     | (IVITZ)            | Kale         | Setting          | Ch0      | Ch1       | (mW)           | (dBm)          | (dBm)             |        |
| 36  | 5180               | MCS0         | 19               | 18.82    | 18.76     | 151.461        | 21.80          | 30                | PASS   |
| 44  | 5220               | MCS0         | 19               | 18.74    | 18.64     | 148.020        | 21.70          | 30                | PASS   |
| 48  | 5240               | MCS0         | 18.5             | 18.15    | 18.05     | 129.217        | 21.11          | 30                | PASS   |
| 52  | 5260               | MCS0         | 15.5             | 15.39    | 15.19     | 67.672         | 18.30          | 23.98             | PASS   |
| 60  | 5300               | MCS0         | 16               | 15.82    | 15.60     | 74.547         | 18.72          | 23.98             | PASS   |
| 64  | 5320               | MCS0         | 15.5             | 15.39    | 15.06     | 66.697         | 18.24          | 23.98             | PASS   |
| 100 | 5500               | MCS0         | 14.5             | 14.20    | 14.29     | 53.188         | 17.26          | 23.98             | PASS   |
| 116 | 5580               | MCS0         | 16               | 15.59    | 15.63     | 72.828         | 18.62          | 23.98             | PASS   |
| 140 | 5700               | MCS0         | 15.5             | 15.02    | 15.20     | 64.921         | 18.12          | 23.98             | PASS   |
| 144 | 5720(U-NII 2C)     | MCS0         | 15.5             | 13.73    | 13.87     | 47.985         | 16.81          | 23.06             | PASS   |
| 144 | 5720 (U-NII 3)     | MCS0         | 15.5             | 9.51     | 9.72      | 18.293         | 12.62          | 30                | PASS   |
| 149 | 5745               | MCS0         | 18.5             | 18.12    | 17.91     | 126.741        | 21.03          | 30                | PASS   |
| 157 | 5785               | MCS0         | 21               | 20.66    | 20.72     | 234.586        | 23.70          | 30                | PASS   |
| 165 | 5825               | MCS0         | 20               | 19.65    | 19.36     | 178.662        | 22.52          | 30                | PASS   |

### 802.11ac\_VHT40\_2TX

| СН  | Frequency      | Data<br>Rate | Power<br>Setting | Avg. POV | ÆR (dBm) | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|-----|----------------|--------------|------------------|----------|----------|----------------|----------------|-------------------|--------|
|     | (MHz)          | Rate         |                  | Ch0      | Ch1      | (mW)           | (dBm)          | (dBm)             |        |
| 38  | 5190           | MCS0         | 15               | 14.96    | 14.98    | 62.873         | 17.98          | 30                | PASS   |
| 46  | 5230           | MCS0         | 19.5             | 19.43    | 19.24    | 171.818        | 22.35          | 30                | PASS   |
| 54  | 5270           | MCS0         | 18.5             | 18.42    | 18.16    | 135.101        | 21.31          | 23.98             | PASS   |
| 62  | 5310           | MCS0         | 15.5             | 15.42    | 15.44    | 69.898         | 18.44          | 23.98             | PASS   |
| 102 | 5510           | MCS0         | 18               | 17.92    | 17.89    | 123.586        | 20.92          | 23.98             | PASS   |
| 110 | 5550           | MCS0         | 18.5             | 18.46    | 18.22    | 136.657        | 21.36          | 23.98             | PASS   |
| 134 | 5670           | MCS0         | 18.5             | 18.42    | 18.24    | 136.320        | 21.35          | 23.98             | PASS   |
| 142 | 5710(U-NII 2C) | MCS0         | 18               | 17.13    | 16.95    | 101.199        | 20.05          | 23.98             | PASS   |
| 142 | 5710 (U-NII 3) | MCS0         | 18               | 10.13    | 9.50     | 19.211         | 12.84          | 30                | PASS   |
| 151 | 5755           | MCS0         | 19               | 18.87    | 18.68    | 151.032        | 21.79          | 30                | PASS   |
| 159 | 5795           | MCS0         | 21.5             | 21.28    | 21.32    | 270.066        | 24.31          | 30                | PASS   |

### 802.11ac VHT80 2TX

| СН  | Frequency      | y Data<br>Rate | Power   | Avg. POWER (dBm) |       | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|-----|----------------|----------------|---------|------------------|-------|----------------|----------------|-------------------|--------|
|     | (MHz)          | Rate           | Setting | Ch0              | Ch1   | (mW)           | (dBm)          | (dBm)             |        |
| 42  | 5210           | MCS0           | 14.5    | 14.25            | 14.28 | 53.431         | 17.28          | 30                | PASS   |
| 58  | 5290           | MCS0           | 14.5    | 14.40            | 14.37 | 54.928         | 17.40          | 23.98             | PASS   |
| 106 | 5530           | MCS0           | 17.5    | 17.19            | 17.10 | 103.709        | 20.16          | 23.98             | PASS   |
| 122 | 5610           | MCS0           | 21      | 20.59            | 20.56 | 228.451        | 23.59          | 23.98             | PASS   |
| 138 | 5690(U-NII 2C) | MCS0           | 18.5    | 17.68            | 17.54 | 115.370        | 20.62          | 23.98             | PASS   |
| 138 | 5690 (U-NII 3) | MCS0           | 18.5    | 8.93             | 8.85  | 15.499         | 11.90          | 30                | PASS   |
| 155 | 5775           | MCS0           | 19.5    | 19.49            | 19.28 | 173.747        | 22.40          | 30                | PASS   |

### 802.11ac\_VHT160\_2TX

| СН  | Frequency<br>(MHz) | Data<br>Rate | Power<br>Setting | Avg. POW | ÆR (dBm) | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|-----|--------------------|--------------|------------------|----------|----------|----------------|----------------|-------------------|--------|
|     | (WIF1Z)            | Nate         | Setting          | Ch0      | Ch1      | (mW)           | (dBm)          | (dBm)             |        |
| 50  | 5250               | MCS0         | 13.5             | 13.46    | 13.50    | 44.596         | 16.49          | 23.98             | PASS   |
| 114 | 5570               | MCS0         | 14               | 13.94    | 14.00    | 49.923         | 16.98          | 23.98             | PASS   |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 109 of 670

| 2N2 | 11av | HE20 | 2TV |
|-----|------|------|-----|

| СН  | CH Frequency (MHz) | - 1  | RUconfig | Power<br>Setting | Avg. POV | /ER (dBm) | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|-----|--------------------|------|----------|------------------|----------|-----------|----------------|----------------|-------------------|--------|
|     | (WITZ)             | Rate |          | Setting          | Ch0      | Ch1       | (mW)           | (dBm)          | (dBm)             |        |
| 36  | 5180               | MCS0 | full     | 18.5             | 18.22    | 18.35     | 134.847        | 21.30          | 30                | PASS   |
| 44  | 5220               | MCS0 | full     | 19.5             | 19.37    | 19.14     | 168.633        | 22.27          | 30                | PASS   |
| 48  | 5240               | MCS0 | full     | 19               | 18.95    | 18.68     | 152.406        | 21.83          | 30                | PASS   |
| 52  | 5260               | MCS0 | full     | 16               | 15.83    | 15.92     | 77.413         | 18.89          | 23.98             | PASS   |
| 60  | 5300               | MCS0 | full     | 16               | 15.95    | 15.75     | 76.985         | 18.86          | 23.98             | PASS   |
| 64  | 5320               | MCS0 | full     | 16               | 15.86    | 15.68     | 75.576         | 18.78          | 23.98             | PASS   |
| 100 | 5500               | MCS0 | full     | 15.5             | 15.30    | 15.59     | 70.151         | 18.46          | 23.98             | PASS   |
| 116 | 5580               | MCS0 | full     | 15.5             | 15.25    | 15.42     | 68.371         | 18.35          | 23.98             | PASS   |
| 140 | 5700               | MCS0 | full     | 15.5             | 15.19    | 15.42     | 67.912         | 18.32          | 23.98             | PASS   |
| 144 | 5720(U-NII 2C)     | MCS0 | full     | 15.5             | 13.82    | 14.09     | 49.770         | 16.97          | 23.03             | PASS   |
| 144 | 5720 (U-NII 3)     | MCS0 | full     | 15.5             | 9.55     | 9.83      | 18.621         | 12.70          | 30                | PASS   |
| 149 | 5745               | MCS0 | full     | 18               | 17.92    | 17.57     | 119.164        | 20.76          | 30                | PASS   |
| 157 | 5785               | MCS0 | full     | 21               | 20.76    | 20.71     | 237.027        | 23.75          | 30                | PASS   |
| 165 | 5825               | MCS0 | full     | 20.5             | 20.14    | 19.99     | 203.168        | 23.08          | 30                | PASS   |

### 802.11ax\_HE40\_2TX

| СН  | Frequency<br>(MHz) | Data | RU config. | Power   | Avg. POW | Avg. POWER (dBm) |         | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|-----|--------------------|------|------------|---------|----------|------------------|---------|----------------|-------------------|--------|
|     | (IVITZ)            | Rate | _          | Setting | Ch0      | Ch1              | (mW)    | (dBm)          | (dBm)             |        |
| 38  | 5190               | MCS0 | full       | 15      | 14.94    | 14.98            | 62.704  | 17.97          | 30                | PASS   |
| 46  | 5230               | MCS0 | full       | 20.5    | 20.20    | 20.28            | 211.500 | 23.25          | 30                | PASS   |
| 54  | 5270               | MCS0 | full       | 18.5    | 18.20    | 18.06            | 130.121 | 21.14          | 23.98             | PASS   |
| 62  | 5310               | MCS0 | full       | 16      | 15.86    | 15.64            | 75.237  | 18.76          | 23.98             | PASS   |
| 102 | 5510               | MCS0 | full       | 18.5    | 18.31    | 18.28            | 135.143 | 21.31          | 23.98             | PASS   |
| 110 | 5550               | MCS0 | full       | 19      | 18.86    | 18.80            | 135.143 | 21.84          | 23.98             | PASS   |
| 134 | 5670               | MCS0 | full       | 18.5    | 18.26    | 18.10            | 131.633 | 21.19          | 23.98             | PASS   |
| 142 | 5710(U-NII 2C)     | MCS0 | full       | 18.5    | 17.49    | 17.39            | 110.874 | 20.45          | 23.98             | PASS   |
| 142 | 5710 (U-NII 3)     | MCS0 | full       | 18.5    | 9.96     | 9.83             | 19.539  | 12.91          | 30                | PASS   |
| 151 | 5755               | MCS0 | full       | 19.5    | 19.16    | 19.04            | 162.679 | 22.11          | 30                | PASS   |
| 159 | 5795               | MCS0 | full       | 21.5    | 21.09    | 21.13            | 258.402 | 24.12          | 30                | PASS   |

### 802.11ax HE80 2TX

| СН  | Frequency<br>(MHz) | Data<br>Rate | RU config. | Power<br>Setting | Avg. POW | Avg. POWER (dBm) |         | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|-----|--------------------|--------------|------------|------------------|----------|------------------|---------|----------------|-------------------|--------|
|     | (IVITIZ)           | Nate         |            | Setting          | Ch0      | Ch1              | (mW)    | (dBm)          | (dBm)             |        |
| 42  | 5210               | MCS0         | full       | 15               | 14.62    | 14.80            | 59.232  | 17.73          | 30                | PASS   |
| 58  | 5290               | MCS0         | full       | 15.5             | 15.39    | 15.19            | 67.699  | 18.31          | 23.98             | PASS   |
| 106 | 5530               | MCS0         | full       | 18.5             | 18.18    | 18.13            | 130.910 | 21.17          | 23.98             | PASS   |
| 122 | 5610               | MCS0         | full       | 21               | 20.62    | 20.56            | 229.338 | 23.60          | 23.98             | PASS   |
| 138 | 5690(U-NII 2C)     | MCS0         | full       | 19.5             | 18.87    | 18.65            | 150.379 | 21.77          | 23.98             | PASS   |
| 138 | 5690 (U-NII 3)     | MCS0         | full       | 19.5             | 8.80     | 9.24             | 15.974  | 12.03          | 30                | PASS   |
| 155 | 5775               | MCS0         | full       | 20               | 19.69    | 19.72            | 187.054 | 22.72          | 30                | PASS   |

### 802.11ax HE160 2TX

| СН  | Frequency<br>(MHz) | Data<br>Rate | RU config. | Power<br>Setting | Avg. POWER (dBm) |       | rg. POWER (dBm) TOTAL POWER |       | REQUIRED<br>LIMIT | RESULT |
|-----|--------------------|--------------|------------|------------------|------------------|-------|-----------------------------|-------|-------------------|--------|
|     |                    |              |            |                  | Ch0              | Ch1   | (mW)                        | (dBm) | (dBm)             |        |
| 50  | 5250               | MCS0         | full       | 14               | 14.16            | 14.08 | 51.678                      | 17.13 | 23.98             | PASS   |
| 114 | 5570               | MCS0         | full       | 14.5             | 14.38            | 14.42 | 55.118                      | 17.41 | 23.98             | PASS   |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 110 of 670

### 802.11be\_EHT20\_2TX

| СН  | CH Frequency (MHz) | -    | RUconfig | Power<br>Setting | Avg. POW | ÆR (dBm) | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|-----|--------------------|------|----------|------------------|----------|----------|----------------|----------------|-------------------|--------|
|     | (IVITIZ)           | Rate |          | Setting          | Ch0      | Ch1      | (mW)           | (dBm)          | (dBm)             |        |
| 36  | 5180               | MCS0 | full     | 18.5             | 18.30    | 18.42    | 137.248        | 21.38          | 30                | PASS   |
| 44  | 5220               | MCS0 | full     | 19.5             | 19.40    | 19.18    | 170.061        | 22.31          | 30                | PASS   |
| 48  | 5240               | MCS0 | full     | 19               | 18.98    | 18.71    | 153.524        | 21.86          | 30                | PASS   |
| 52  | 5260               | MCS0 | full     | 16               | 15.88    | 15.96    | 78.250         | 18.93          | 23.98             | PASS   |
| 60  | 5300               | MCS0 | full     | 16               | 15.99    | 15.80    | 77.816         | 18.91          | 23.98             | PASS   |
| 64  | 5320               | MCS0 | full     | 16               | 15.90    | 15.72    | 76.306         | 18.83          | 23.98             | PASS   |
| 100 | 5500               | MCS0 | full     | 15.5             | 15.36    | 15.62    | 70.902         | 18.51          | 23.98             | PASS   |
| 116 | 5580               | MCS0 | full     | 15.5             | 15.29    | 15.50    | 69.357         | 18.41          | 23.98             | PASS   |
| 140 | 5700               | MCS0 | full     | 15.5             | 15.24    | 15.49    | 68.888         | 18.38          | 23.98             | PASS   |
| 144 | 5720(U-NII 2C)     | MCS0 | full     | 15.5             | 13.88    | 14.12    | 50.248         | 17.01          | 23.03             | PASS   |
| 144 | 5720 (U-NII 3)     | MCS0 | full     | 15.5             | 9.60     | 9.86     | 18.799         | 12.74          | 30                | PASS   |
| 149 | 5745               | MCS0 | full     | 18               | 17.96    | 17.60    | 120.182        | 20.80          | 30                | PASS   |
| 157 | 5785               | MCS0 | full     | 21               | 20.79    | 20.75    | 239.040        | 23.78          | 30                | PASS   |
| 165 | 5825               | MCS0 | full     | 20.5             | 20.20    | 20.03    | 205.612        | 23.13          | 30                | PASS   |

### 802.11be\_EHT40\_2TX

| СН  | Frequency      | Data | RUconfig | Power   | Avg. POW | ÆR (dBm) | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|-----|----------------|------|----------|---------|----------|----------|----------------|----------------|-------------------|--------|
|     | (MHz)          | Rate | _        | Setting | Ch0      | Ch1      | (mW)           | (dBm)          | (dBm)             |        |
| 38  | 5190           | MCS0 | full     | 15      | 14.98    | 15.00    | 63.164         | 18.00          | 30                | PASS   |
| 46  | 5230           | MCS0 | full     | 20.5    | 20.24    | 20.32    | 213.542        | 23.29          | 30                | PASS   |
| 54  | 5270           | MCS0 | full     | 18.5    | 18.25    | 18.09    | 131.383        | 21.19          | 23.98             | PASS   |
| 62  | 5310           | MCS0 | full     | 16      | 15.92    | 15.67    | 76.058         | 18.81          | 23.98             | PASS   |
| 102 | 5510           | MCS0 | full     | 18.5    | 18.37    | 18.33    | 136.921        | 21.36          | 23.98             | PASS   |
| 110 | 5550           | MCS0 | full     | 19      | 18.90    | 18.82    | 153.987        | 21.87          | 23.98             | PASS   |
| 134 | 5670           | MCS0 | full     | 18.5    | 18.32    | 18.15    | 133.367        | 21.25          | 23.98             | PASS   |
| 142 | 5710(U-NII 2C) | MCS0 | full     | 18.5    | 17.53    | 17.44    | 112.072        | 20.49          | 23.98             | PASS   |
| 142 | 5710 (U-NII 3) | MCS0 | full     | 18.5    | 10.01    | 9.88     | 19.750         | 12.96          | 30                | PASS   |
| 151 | 5755           | MCS0 | full     | 19.5    | 19.20    | 19.06    | 163.878        | 22.15          | 30                | PASS   |
| 159 | 5795           | MCS0 | full     | 21.5    | 21.12    | 21.15    | 259.997        | 24.15          | 30                | PASS   |

### 802.11be\_EHT80\_2TX

| СН  | Frequency<br>(MHz) | Data<br>Rate | RU config. | Power<br>Setting | Avg. POW | Avg. POWER (dBm) |         | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|-----|--------------------|--------------|------------|------------------|----------|------------------|---------|----------------|-------------------|--------|
|     | (141712)           | Nate         |            | Setting          | Ch0      | Ch1              | (mW)    | (dBm)          | (dBm)             |        |
| 42  | 5210               | MCS0         | full       | 15               | 14.70    | 14.86            | 60.192  | 17.80          | 30                | PASS   |
| 58  | 5290               | MCS0         | full       | 15.5             | 15.43    | 15.25            | 68.479  | 18.36          | 23.98             | PASS   |
| 106 | 5530               | MCS0         | full       | 18.5             | 18.23    | 18.14            | 131.822 | 21.20          | 23.98             | PASS   |
| 122 | 5610               | MCS0         | full       | 21               | 20.69    | 20.54            | 230.691 | 23.63          | 23.98             | PASS   |
| 138 | 5690(U-NII 2C)     | MCS0         | full       | 19.5             | 18.93    | 18.72            | 152.643 | 21.84          | 23.98             | PASS   |
| 138 | 5690 (U-NII 3)     | MCS0         | full       | 19.5             | 8.86     | 9.31             | 16.215  | 12.10          | 30                | PASS   |
| 155 | 5775               | MCS0         | full       | 20               | 19.73    | 19.75            | 188.567 | 22.75          | 30                | PASS   |

### 802.11be EHT160 2TX

| СН  | Frequency<br>(MHz) | Data<br>Rate | RU config. | Power<br>Setting | Avg. POWER (dBm) |       | /g. POWER (dBm) TOTAL POWER |       | REQUIRED<br>LIMIT | RESULT |
|-----|--------------------|--------------|------------|------------------|------------------|-------|-----------------------------|-------|-------------------|--------|
|     | (141712)           | Nate         |            | Setting          | Ch0              | Ch1   | (mW)                        | (dBm) | (dBm)             |        |
| 50  | 5250               | MCS0         | full       | 14               | 14.19            | 14.12 | 52.117                      | 17.17 | 23.98             | PASS   |
| 114 | 5570               | MCS0         | full       | 14.5             | 14.43            | 14.50 | 55.973                      | 17.48 | 23.98             | PASS   |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除北京方的时,他就是在国际影响是少楼里看来,同时他接回陈河间的一个大家,是这个大哥电话还可,不可如此推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 111 of 670

# 9.5.2 ISED Conducted output power and EIRP

| СН               | Frequency          |              | Data         | Power            | Avg. POV     | VER (dBm)    | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESUL <sup>-</sup> |
|------------------|--------------------|--------------|--------------|------------------|--------------|--------------|----------------|----------------|-------------------|--------------------|
|                  | (MHz)              |              | Rate         | Setting          | Ch0          | Ch1          | (mW)           | (dBm)          | (dBm)             |                    |
| 36               | 5180               |              | 6            | 9                | 9.01         | 9.03         | 15.957         | 12.03          | 30                | PASS               |
| 44               | 5220               |              | 6            | 9                | 9.03         | 8.86         | 15.687         | 11.96          | 30                | PASS               |
| 48               | 5240               |              | 6            | 9                | 8.98         | 8.81         | 15.507         | 11.91          | 30                | PASS               |
| 02.11n_HT        | 20_2TX             | · I          |              |                  |              |              |                |                |                   | ı                  |
| СН               | Frequency<br>(MHz) |              | Data<br>Rate | Power<br>Setting | Avg. POV     | VER (dBm)    | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESUL              |
|                  | (1411 12)          |              | Nate         | Setting          | Ch0          | Ch1          | (mW)           | (dBm)          | (dBm)             |                    |
| 36               | 5180               |              | MCS0         | 9                | 8.98         | 8.99         | 15.848         | 12.00          | 30                | PASS               |
| 44               | 5220               |              | MCS0         | 9                | 8.96         | 8.87         | 15.595         | 11.93          | 30                | PASS               |
| 48               | 5240               |              | MCS0         | 9                | 8.95         | 8.77         | 15.401         | 11.88          | 30                | PASS               |
| 02.11n_HT        | 40_2TX             | 1            |              |                  | 1            |              |                | 1              | T                 | Г                  |
| СН               | Frequency<br>(MHz) |              | Data<br>Rate | Power<br>Setting | Avg. POV     | VER (dBm)    | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESUL              |
|                  | ` ,                |              |              |                  | Ch0          | Ch1          | (mW)           | (dBm)          | (dBm)             |                    |
| 38               | 5190               |              | MCS0         | 12               | 11.98        | 11.96        | 31.511         | 14.98          | 30                | PASS               |
| 46               | 5230               |              | MCS0         | 12               | 12.00        | 11.95        | 31.548         | 14.99          | 30                | PASS               |
| 02.11ac_VI       | HT20_2TX           | 1            |              | 1                | 1            |              |                | 1              | T                 | I                  |
| СН               | Frequency          |              | Data         | Power            | Avg. POV     | VER (dBm)    | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESUL              |
|                  | (MHz)              |              | Rate         | Setting          | Ch0          | Ch1          | (mW)           | (dBm)          | (dBm)             |                    |
| 36               | 5180               |              | MCS0         | 9                | 8.96         | 8.98         | 15.787         | 11.98          | 30                | PASS               |
| 44               | 5220               |              | MCS0         | 9                | 8.92         | 8.83         | 15.446         | 11.89          | 30                | PASS               |
| 48               | 5240               |              | MCS0         | 9                | 8.92         | 8.74         | 15.289         | 11.84          | 30                | PASS               |
| 02.11ac_VI       | HT40_2TX           | 1            |              |                  | 1            |              |                | 1              | T                 | 1                  |
| СН               | Frequency<br>(MHz) |              | Data<br>Rate | Power<br>Setting | Avg. POV     | VER (dBm)    | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESUL              |
|                  | ` ,                |              |              |                  | Ch0          | Ch1          | (mW)           | (dBm)          | (dBm)             |                    |
| 38               | 5190               |              | MCS0         | 12               | 11.95        | 11.92        | 31.258         | 14.95          | 30                | PASS               |
| 46               | 5230               |              | MCS0         | 12               | 11.97        | 11.89        | 31.224         | 14.94          | 30                | PASS               |
| 02.11ac_VI       | HT80_2TX           |              |              | 1                | I            |              |                | 1              |                   | <u> </u>           |
| СН               | Frequency<br>(MHz) |              | Data<br>Rate | Power<br>Setting |              | VER (dBm)    | TOTAL<br>POWER | POWER          | REQUIRED<br>LIMIT | RESUL              |
| 40               | ` '                |              | 11000        | 44.5             | Ch0          | Ch1          | (mW)           | (dBm)          | (dBm)             | DAGG               |
| 42<br>02 1120 VI | 5210<br>HT160_2TX  |              | MCS0         | 14.5             | 14.25        | 14.28        | 53.431         | 17.28          | 30                | PASS               |
| UZ. 1 1 aC_V 1   | 11100_217          |              |              |                  |              |              | TOTAL          | TOTAL          | DEOUIDED          |                    |
| СН               | Frequency          |              | Data         | Power            | Avg. POV     | VER (dBm)    | POWER          | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESUL              |
| 011              | (MHz)              |              | Rate         | Setting          | Ch0          | Ch1          | (mW)           | (dBm)          | (dBm)             | I KLOOL            |
| 50               | 5250               |              | MCS0         | 13.5             | 13.46        | 13.50        | 44.596         | 16.49          | 23.98             | PASS               |
| )2.11ax_HE       |                    |              | WOOO         | 10.0             | 13.40        | 13.30        | 44.000         | 10.43          | 25.90             | 1 700              |
| رد. ۱ ۱۵۸_۱۱۵    | -20_217            |              |              |                  |              |              | TOTAL          | TOTAL          | REQUIRED          |                    |
| СН               | Frequency<br>(MHz) | Data<br>Rate | RU config.   | Power<br>Setting |              | VER (dBm)    | POWER          | POWER          | LIMIT             | RESUL              |
|                  |                    |              | - ··         |                  | Ch0          | Ch1          | (mW)           | (dBm)          | (dBm)             | F : -              |
| 36               | 5180<br>5220       | MCS0         | full<br>full | 9                | 8.85<br>8.93 | 8.92<br>8.85 | 15.481         | 11.90<br>11.90 | 30<br>30          | PASS<br>PASS       |
| 44               |                    |              | £.II         | . 0              | ו טרט        | . 005        | 15.499         | 1 11 00        |                   |                    |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分換具有害,同時他幾乎區程內的子。木都些主權大公司事而強可,不可可以推翻。

full

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

9

SGS Taiwan Ltd.

5240

48

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

8.89

MCS0

8.97

15.643

11.94

30

PASS



Page: 112 of 670

| ደበኃ | 11av | HE40 | 2TY |
|-----|------|------|-----|

| 802.11ax_HE | E40_2TX            |              |            |                  |          |           |                |                |                   |        |
|-------------|--------------------|--------------|------------|------------------|----------|-----------|----------------|----------------|-------------------|--------|
| СН          | Frequency<br>(MHz) | Data<br>Rate | RU config. | Power<br>Setting | Avg. POV | VER (dBm) | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|             | (141112)           | Nate         |            | Setting          | Ch0      | Ch1       | (mW)           | (dBm)          | (dBm)             |        |
| 38          | 5190               | MCS0         | full       | 12               | 11.92    | 11.95     | 31.246         | 14.95          | 30                | PASS   |
| 46          | 5230               | MCS0         | full       | 12               | 11.84    | 11.89     | 30.747         | 14.88          | 30                | PASS   |
| 302.11ax_HE | E80_2TX            |              |            |                  |          |           |                |                |                   |        |
| СН          | Frequency<br>(MHz) | Data<br>Rate | RU config. | Power<br>Setting | Avg. POV | VER (dBm) | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|             | (IVIT12)           | Nate         |            | Setting          | Ch0      | Ch1       | (mW)           | (dBm)          | (dBm)             |        |
| 42          | 5210               | MCS0         | full       | 15               | 14.62    | 14.80     | 59.232         | 17.73          | 30                | PASS   |
| 302.11be_El | HT20_2TX           |              |            |                  |          |           |                |                |                   |        |
| СН          | Frequency          | Data         | RU config. | Power            | Avg. POV | VER (dBm) | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|             | (MHz)              | Rate         | •          | Setting          | Ch0      | Ch1       | (mW)           | (dBm)          | (dBm)             |        |
| 36          | 5180               | MCS0         | full       | 9                | 8.90     | 8.99      | 15.703         | 11.96          | 30                | PASS   |
| 44          | 5220               | MCS0         | full       | 9                | 8.99     | 8.89      | 15.685         | 11.95          | 30                | PASS   |
| 48          | 5240               | MCS0         | full       | 9                | 9.00     | 8.92      | 15.757         | 11.97          | 30                | PASS   |
| 302.11be_El | HT40_2TX           |              |            |                  |          |           |                |                |                   |        |
| СН          | Frequency          | Data         | RU config. | Power            | Avg. POV | VER (dBm) | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|             | (MHz)              | Rate         |            | Setting          | Ch0      | Ch1       | (mW)           | (dBm)          | (dBm)             |        |
| 38          | 5190               | MCS0         | full       | 12               | 11.95    | 11.99     | 31.512         | 14.98          | 30                | PASS   |
| 46          | 5230               | MCS0         | full       | 12               | 11.85    | 11.93     | 30.937         | 14.90          | 30                | PASS   |
| 302.11be_El | HT80_2TX           |              |            |                  |          |           |                |                |                   |        |
| СН          | Frequency          | Data<br>Rate | RU config. | Power            | Avg. POV | VER (dBm) | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|             | (MHz)              | Rate         |            | Setting          | Ch0      | Ch1       | (mW)           | (dBm)          | (dBm)             |        |
| 42          | 5210               | MCS0         | full       | 15               | 14.70    | 14.86     | 60.192         | 17.80          | 30                | PASS   |
| 302.11be_El | HT160_2TX          |              |            |                  |          |           |                |                |                   |        |
| СН          | Frequency<br>(MHz) | Data<br>Rate | RU config. | Power<br>Setting | Avg. POV | VER (dBm) | TOTAL<br>POWER | TOTAL<br>POWER | REQUIRED<br>LIMIT | RESULT |
|             | (1411-12)          | Nate         |            | Seung            | Ch0      | Ch1       | (mW)           | (dBm)          | (dBm)             |        |
| 50          | 5250               | MCS0         | full       | 14               | 14.19    | 14.12     | 52.117         | 17.17          | 23.98             | PASS   |
|             |                    |              |            |                  |          |           |                |                |                   |        |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 113 of 670

| 80 | 2 1 | 11 | a | 21 | ГΧ |
|----|-----|----|---|----|----|
|    |     |    |   |    |    |

|                    | T   |                          | r                       | 1  | 1  | 1      |
|--------------------|---|--------------------------|-------------------------|--|--|--------|
| Frequency<br>(MHz) | TOTAL<br>POWER<br>(dBm)   | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW)            | EIRP<br>(dBm)  | REQUIRED<br>LIMIT<br>(dBm)   | RESULT |
| 5180               | 12.03   | 3.23                     | 33.574                  | 15.26  | 22.24  | PASS   |
| 5220               | 11.96   | 3.23                     | 33.037                  | 15.19  | 22.24  | PASS   |
| 5240               | 11.91   | 3.23                     | 32.659                  | 15.14  | 22.23  | PASS   |
|                    |   |                          | •                       | •  |  | •      |
| Frequency<br>(MHz) | TOTAL<br>POWER<br>(dBm)   | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW)            | EIRP<br>(dBm)  | REQUIRED<br>LIMIT<br>(dBm)   | RESULT |
| 5180               | 12.00   | 3.23                     | 33.343                  | 15.23  | 22.53  | PASS   |
| 5220               | 11.93   | 3.23                     | 32.810                  | 15.16  | 22.52  | PASS   |
| 5240               | 11.88   | 3.23                     | 32.434                  | 15.11  | 22.52  | PASS   |
|                    | · ·   |                          |                         |  | !  |        |
| Frequency<br>(MHz) | TOTAL<br>POWER<br>(dBm)   | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW)            | EIRP<br>(dBm)  | REQUIRED<br>LIMIT<br>(dBm)   | RESULT |
| 5190               |   |                          | 66.222                  | 18.21  |  | PASS   |
|                    | •   |                          | 1                       | +  |  | PASS   |
|                    | 1   | 5.25                     |                         |  |  | 1      |
| Frequency<br>(MHz) | TOTAL<br>POWER<br>(dBm)   | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW)            | EIRP<br>(dBm)  | REQUIRED<br>LIMIT<br>(dBm)   | RESULT |
| 5180               | 11.98   | 3.23                     | 33.189                  | 15.21  | 22.53  | PASS   |
| 5220               | 11.89   | 3.23                     | 32.509                  | 15.12  | 22.52  | PASS   |
| 5240               | 11.84   | 3.23                     | 32.137                  | 15.07  | 22.52  | PASS   |
| TX                 | •   |                          |                         |  | •  |        |
| Frequency<br>(MHz) | TOTAL<br>POWER<br>(dBm)   | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW)            | EIRP<br>(dBm)  | REQUIRED<br>LIMIT<br>(dBm)   | RESULT |
| 5190               | 14.95   | 3.23                     | 65.766                  | 18.18  | 23.01  | PASS   |
| 5230               | 14.94   | 3.23                     | 65.615                  | 18.17  | 23.01  | PASS   |
| TX                 |   |                          | •                       |  | •  |        |
| Frequency<br>(MHz) | TOTAL<br>POWER<br>(dBm)   | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW)            | EIRP<br>(dBm)  | REQUIRED<br>LIMIT<br>(dBm)   | RESULT |
| 5210               | 17.28   | 3.23                     | 112.460                 | 20.51  | 23.01  | PASS   |
| 2TX                |   |                          | •                       | •  | •  | *      |
| 21A                |   |                          |                         |  |  |        |
| Frequency<br>(MHz) | TOTAL<br>POWER<br>(dBm)   | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW)            | EIRP<br>(dBm)  | REQUIRED<br>LIMIT<br>(dBm)   | RESULT |
|                    | (MHz)  5180  5220  5240  (MHz)  5180  5220  5240  (MHz)  5180  5220  5240  (MHz)  5190  5230  TX  Frequency (MHz)  5180  5220  5240  TX  Frequency (MHz)  5180  5220  5240  TX  Frequency (MHz)  5180  5220  5240  TX  Frequency (MHz)  5190  5230  TX  Frequency (MHz) | Frequency (MHz)          | POWER (dBm) (dBi) (dBi) | POWER (dBm) (dBi) (dBi | POWER   Gain   (dBi)   (dBm)   (dBm) | Power  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 114 of 670

| രഹാ  | 44      | HE20 | 2TV |
|------|---------|------|-----|
| OUZ. | . I Iax | MEZU | 217 |

| СН         | Frequency<br>(MHz) | RU config. | TOTAL<br>POWER<br>(dBm) | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW) | EIRP<br>(dBm) | REQUIRED<br>LIMIT<br>(dBm) | RESULT |
|------------|--------------------|------------|-------------------------|--------------------------|--------------|---------------|----------------------------|--------|
| 36         | 5180               | full       | 11.90                   | 3.23                     | 32.584       | 15.13         | 23.01                      | PASS   |
| 44         | 5220               | full       | 11.90                   | 3.23                     | 32.584       | 15.13         | 23.01                      | PASS   |
| 48         | 5240               | full       | 11.94                   | 3.23                     | 32.885       | 15.17         | 23.01                      | PASS   |
| 302.11ax_H | E40 2TX            |            | l .                     |                          | 1            | I             |                            | 1      |
| СН         | Frequency<br>(MHz) | RU config. | TOTAL<br>POWER<br>(dBm) | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW) | EIRP<br>(dBm) | REQUIRED<br>LIMIT<br>(dBm) | RESULT |
| 38         | 5190               | full       | 14.95                   | 3.23                     | 65.766       | 18.18         | 23.01                      | PASS   |
| 46         | 5230               | full       | 14.88                   | 3.23                     | 64.714       | 18.11         | 23.01                      | PASS   |
| 302.11ax_H |                    |            |                         | 0.20                     | •            |               |                            | 17.00  |
| CH         | Frequency<br>(MHz) | RU config. | TOTAL<br>POWER<br>(dBm) | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW) | EIRP<br>(dBm) | REQUIRED<br>LIMIT<br>(dBm) | RESUL  |
| 42         | 5210               | full       | 17.73                   | 3.23                     | 124.738      | 20.96         | 23.01                      | PASS   |
| 302.11ax_H | E160 2TX           |            | l .                     |                          | 1            | I             |                            | 1      |
| СН         | Frequency<br>(MHz) | RU config. | TOTAL<br>POWER<br>(dBm) | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW) | EIRP<br>(dBm) | REQUIRED<br>LIMIT<br>(dBm) | RESUL  |
| 50         | 5250               | full       | 17.13                   | 3.91                     | 127.057      | 21.04         | 23.01                      | PASS   |
| 302.11be_E | HT20_2TX           |            |                         |                          |              |               |                            |        |
| СН         | Frequency<br>(MHz) | RU config. | TOTAL<br>POWER<br>(dBm) | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW) | EIRP<br>(dBm) | REQUIRED<br>LIMIT<br>(dBm) | RESUL  |
| 36         | 5180               | full       | 11.96                   | 3.23                     | 33.037       | 15.19         | 22.79                      | PASS   |
| 44         | 5220               | full       | 11.95                   | 3.23                     | 32.961       | 15.18         | 22.8                       | PASS   |
| 48         | 5240               | full       | 11.97                   | 3.23                     | 33.113       | 15.20         | 22.8                       | PASS   |
| 302.11be_E | HT40 2TX           |            | L                       |                          | ı            | I             |                            | 1      |
| СН         | Frequency<br>(MHz) | RU config. | TOTAL<br>POWER<br>(dBm) | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW) | EIRP<br>(dBm) | REQUIRED<br>LIMIT<br>(dBm) | RESUL  |
| 38         | 5190               | full       | 14.98                   | 3.23                     | 66.222       | 18.21         | 23.01                      | PASS   |
| 46         | 5230               | full       | 14.90                   | 3.23                     | 65.013       | 18.13         | 23.01                      | PASS   |
| 302.11be_E | HT80_2TX           |            |                         |                          |              |               |                            |        |
| СН         | Frequency<br>(MHz) | RU config. | TOTAL<br>POWER<br>(dBm) | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW) | EIRP<br>(dBm) | REQUIRED<br>LIMIT<br>(dBm) | RESUL  |
| 42         | 5210               | full       | 17.80                   | 3.23                     | 126.765      | 21.03         | 23.01                      | PASS   |
| 302.11be_E | HT160_2TX          |            |                         |                          | •            | •             |                            | -      |
| CH         | Frequency<br>(MHz) | RU config. | TOTAL<br>POWER<br>(dBm) | Antenna<br>Gain<br>(dBi) | EIRP<br>(mW) | EIRP<br>(dBm) | REQUIRED<br>LIMIT<br>(dBm) | RESUL  |
| 50         | 5250               | full       | 17.17                   | 3.91                     | 128.233      | 21.08         | 23.01                      | PASS   |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 115 of 670

# 10 MAXIMUM POWER SPECTRAL DENSITY

### 10.1 FCC Standard

| Operation<br>Bands | E | EUT CATEGORY                         | e-CRF Title 47 §15.407<br>Power Spectral Density                       | Antenna<br>Directional Gain<br>Requirements |
|--------------------|---|--------------------------------------|--|---|
|                    |   | Outdoor Access Point<br>(Master)     | 1. 17dBm/ MHz<br>2. EIRP<=125mW(21dBm) at any elevation angle<br>> 30° | 6dBi  |
| U-NII-1            | V | Indoor Access Point<br>(Master)      | 17dBm / MHz  | 6dBi  |
|                    |   | Fixed point-to-point<br>Access Ponit | 17dBm / MHz  | 23dBi                                       |
|                    |   | Client device                        | 11dBm / MHz  | 6dBi  |
| U-NII-2A           | ٧ | All                                  | 11dBm / MHz  | 6dBi  |
| U-NII-2C           | ٧ | All                                  | 11dBm / MHz  | 6dBi  |
| U-NII-3            | ٧ | All                                  | 30dBm / 500kHz   | 6dBi  |
|                    |   | Indoor AP                            | 20dBm / MHz e.i.r.p.   | Not required                                |
| U-NII-4            |   | Indoor client                        | 14dBm / MHz e.i.r.p.   | Not required                                |
|                    |   | Subordinate device                   | 20dBm / MHz e.i.r.p.   | Not required                                |

If transmitting antennas of directional gain greater than the antenna requirements column, the Maximum transmit power shall be reduced by the amount in dB that the direction-al gain of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 116 of 670

# 10.2 ISED Standard

| FREQUENCY<br>BAND<br>(MHz) | EUT<br>CATEGORY |   | RSS-247 §6.2.1~6.2.4 |               |  |  |  |
|----------------------------|-----------------|---|----------------------|---------------|--|--|--|
| (IVITIZ)                   |                 |   | EIRP Density         | Power Density |  |  |  |
| 5150~5250                  |                 | OEM devices<br>installed in<br>vehicles | N/A                  | N/A           |  |  |  |
|                            | ٧               | Other device                            | 10 dBm/MHz           | N/A           |  |  |  |
| 5250~5350                  |                 | OEM devices<br>installed in<br>vehicles | N/A                  | N/A           |  |  |  |
|                            | V Other device  | Other device                            | N/A                  | 11 dBm/MHz    |  |  |  |
| 5470-5600 and<br>5650-5725 | ٧               | All                                     | N/A                  | 11 dBm/MHz    |  |  |  |
| 5725~5850                  | V               | All                                     | N/A                  | 30 dBm/500kHz |  |  |  |

For equipment operating in the band 5725-5850 MHz, If transmitting antennas of directional gain greater than 6 dBi are used, the Maximum transmit power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

# 10.3 Test Setup



### 10.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules .
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.
- 4. For U-NII1, U-NII-2A, U-NII-2C Band:

Set RBW=1MHz, VBW=3MHz, where span is enough to capture the entire bandwidth, Sweep time = Auto (1001 pts), Detector = power averaging (rms), if available. Otherwise, use sample detector mode, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)

# For U-NII-3 Band:

Set RBW=300kHz, VBW=1MHz, where span is enough to capture the entire bandwidth, Sweep time = Auto, detector = RMS or sample, traces 100 sweeps of video averaging.

In addition, measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10 log (500 kHz/RBW) to the measured result.

5. User the cursor on spectrum to peak search the highest level of trace

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 117 of 670

6. (1)Duty cycle ≥ 98%: Record the max. reading.(2)Duty cycle < 98%: Record the max. reading and add 10 log(1/duty cycle).</li>

7. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Note: For the test of PSD at MIMO mode, the highest emission of worst case employing Measure and add 10 log (N) technical is reported after the comparison between Main Antenna at single transmitting mode and Aux that yields the higher value. The MIMO transmitting mode produces higher value of outcome.

### Note:

For U-NII1, 2A, 2C and 3 Bands, when the antenna gain is greater than 6 dBi, the power spectral density limit attenuated accordingly.

As per section F. 2). e). (ii) of FCC KDB 662911 D01

If antenna gains are not equal and each transmit antenna is driven by only one spatial stream, directional gain may be calculated by either of the following formulas.

• Directional Gain = 
$$10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^{2}}{N_{ANT}} \right]$$

### where

Each antenna is driven by no more than one spatial stream; NSS = the number of independent spatial streams of data;

NANT = the total number of antennas

 $g_{j,k}$  = / 20 10Gk if the kth antenna is being fed by spatial stream j, or zero if it is not;  $G_k$  is the gain in dBi of the kth antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有铅明,此数华红用摄影测过之龄只有贵,同时此龄只属是例如子。太极华工概太公司隶逼药可,不可如公均剩。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 118 of 670

#### **Measurement Result** 10.5

|                    |                                 | POWER DEI                       | NSITY 802.11a MC       | DDE   |                                  |                  |                |
|--------------------|---------------------------------|---------------------------------|------------------------|---|----------------------------------|------------------|----------------|
| Frequency<br>(MHz) | Ch0<br>meas PSD<br>(dBm/MHz)    | Ch1<br>meas PSD<br>(dBm/MHz)    | Duty<br>Factor<br>(dB) | Total Corr'd F  | PSD(dBm/MHz)                     | Limit            | Margin<br>(dB) |
| 5180               | 7.903                           | 7.753                           | 0.00                   | 10  | .84                              | 16.77 dBm/MHz    | -5.93          |
| 5220               | 6.346                           | 7.605                           | 0.00                   | 10  | .03                              | 16.77 dBm/MHz    | -6.74          |
| 5240               | 6.136                           | 7.721                           | 0.00                   | 10  | .01                              | 16.77 dBm/MHz    | -6.76          |
| 5260               | 3.814                           | 3.684                           | 0.00                   | 6.  | 76                               | 10.08 dBm/MHz    | -3.32          |
| 5300               | 3.809                           | 3.820                           | 0.00                   | 6.  | 82                               | 10.08 dBm/MHz    | -3.26          |
| 5320               | 4.006                           | 3.966                           | 0.00                   | 7.  | 00                               | 10.08 dBm/MHz    | -3.08          |
| 5500               | 3.087                           | 3.459                           | 0.00                   | 6.  | 29                               | 9.71 dBm/MHz     | -3.42          |
| 5580               | 3.540                           | 3.513                           | 0.00                   | 6.  | 54                               | 9.71 dBm/MHz     | -3.17          |
| 5700               | 3.233                           | 3.497                           | 0.00                   | 6.  | 38                               | 9.71 dBm/MHz     | -3.33          |
| 5720 (U-NII 2C)    | 3.188                           | 3.453                           | 0.00                   | 6.  | 33                               | 9.71 dBm/MHz     | -3.38          |
| Frequency<br>(MHz) | Ch0<br>meas PSD<br>(dBm/300kHz) | Ch1<br>meas PSD<br>(dBm/300kHz) | Duty<br>Factor<br>(dB) | 10log<br>(500kHz/RBW)<br>Factor(dB)                                   | Total Corr'd PSD<br>(dBm/500kHz) | Limit            | Margin<br>(dB) |
| 5720 (U-NII 3)     | -2.062                          | -1.766                          | 0.00                   | 2.22  | 3.32                             | 29.02 dBm/500kHz | -25.70         |
| 5745               | 1.375                           | 1.948                           | 0.00                   | 2.22  | 6.90                             | 29.02 dBm/500kHz | -22.12         |
| 5785               | 3.497                           | 4.325                           | 0.00                   | 2.22  | 9.16                             | 29.02 dBm/500kHz | -19.86         |
| 5825               | 3.028                           | 3.137                           | 0.00                   | 2.22  | 8.31                             | 29.02 dBm/500kHz | -20.71         |
|                    |                                 | POWER DENSI                     | TY 802.11n HT20        | MODE  |                                  |                  |                |
| Frequency<br>(MHz) | Ch0<br>meas PSD<br>(dBm/MHz)    | Ch1<br>meas PSD<br>(dBm/MHz)    | Duty<br>Factor<br>(dB) | Total Corr'd PSD(dBm/MHz)   |                                  | Limit            | Margin<br>(dB) |
| 5180               | 7.396                           | 7.840                           | 0.00                   | 10  | .63                              | 16.77 dBm/MHz    | -6.14          |
| 5220               | 6.118                           | 7.291                           | 0.00                   | 9.  | 75                               | 16.77 dBm/MHz    | -7.02          |
| 5240               | 5.452                           | 7.056                           | 0.00                   | 9.  | 34                               | 16.77 dBm/MHz    | -7.43          |
| 5260               | 4.105                           | 3.683                           | 0.00                   | 6.  | 91                               | 10.08 dBm/MHz    | -3.17          |
| 5300               | 4.057                           | 3.877                           | 0.00                   | 6.  | 98                               | 10.08 dBm/MHz    | -3.10          |
| 5320               | 1.747                           | 3.583                           | 0.00                   | 5.  | 77                               | 10.08 dBm/MHz    | -4.31          |
| 5500               | 1.891                           | 3.015                           | 0.00                   | 5.50  |                                  | 9.71 dBm/MHz     | -4.21          |
| 5580               | 3.762                           | 3.531                           | 0.00                   | 6.  | 66                               | 9.71 dBm/MHz     | -3.05          |
| 5700               | 3.239                           | 3.866                           | 0.00                   | 6.57  |                                  | 9.71 dBm/MHz     | -3.14          |
| 5720 (U-NII 2C)    | 3.625                           | 3.479                           | 0.00                   | 6.56  |                                  | 9.71 dBm/MHz     | -3.15          |
| Frequency<br>(MHz) | Ch0<br>meas PSD<br>(dBm/300kHz) | Ch1<br>meas PSD<br>(dBm/300kHz) | Duty<br>Factor<br>(dB) | 10log<br>(500kHz/RBW)<br>Factor(dB)  Total Corr'd PSD<br>(dBm/500kHz) |                                  | Limit            | Margin<br>(dB) |
| 5720 (U-NII 3)     | -1.852                          | -1.528                          | 0.00                   | 2.22  | 3.54                             | 29.02 dBm/500kHz | -25.48         |
| 5745               | 1.389                           | 1.398                           | 0.00                   | 2.22  | 6.62                             | 29.02 dBm/500kHz | -22.40         |
| 5785               | 3.518                           | 3.837                           | 0.00                   | 2.22  | 8.91                             | 29.02 dBm/500kHz | -20.11         |
|                    |                                 |                                 |                        | 1   |                                  |                  |                |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 119 of 670

|                    |                                 | POWER DENS                      | ITY 802.11n HT40       | MODE                                |                                  |                  |                |
|--------------------|---------------------------------|---------------------------------|------------------------|-------------------------------------|----------------------------------|------------------|----------------|
| Frequency<br>(MHz) | Ch0<br>meas PSD<br>(dBm/MHz)    | Ch1<br>meas PSD<br>(dBm/MHz)    | Duty<br>Factor<br>(dB) | Total Corr'd F                      | PSD(dBm/MHz)                     | Limit            | Margin<br>(dB) |
| 5190               | 0.370                           | 0.667                           | 0.00                   | 3.                                  | 53                               | 16.77 dBm/MHz    | -13.24         |
| 5230               | 3.490                           | 5.252                           | 0.00                   | 7.47                                |                                  | 16.77 dBm/MHz    | -9.30          |
| 5270               | 3.831                           | 3.626                           | 0.00                   | 6.                                  | 74                               | 10.08 dBm/MHz    | -3.34          |
| 5310               | 0.782                           | 0.528                           | 0.00                   | 3.                                  | 67                               | 10.08 dBm/MHz    | -6.41          |
| 5510               | 2.902                           | 2.973                           | 0.00                   | 5.                                  | 95                               | 9.71 dBm/MHz     | -3.76          |
| 5550               | 3.236                           | 2.974                           | 0.00                   | 6.                                  | 12                               | 9.71 dBm/MHz     | -3.59          |
| 5670               | 3.520                           | 3.675                           | 0.00                   | 6.                                  | 61                               | 9.71 dBm/MHz     | -3.10          |
| 5710 (U-NII 2C)    | 3.005                           | 3.356                           | 0.00                   | 6.                                  | 19                               | 9.71 dBm/MHz     | -3.52          |
| Frequency<br>(MHz) | Ch0<br>meas PSD<br>(dBm/300kHz) | Ch1<br>meas PSD<br>(dBm/300kHz) | Duty<br>Factor<br>(dB) | 10log<br>(500kHz/RBW)<br>Factor(dB) | Total Corr'd PSD<br>(dBm/500kHz) | Limit            | Margin<br>(dB) |
| 5710 (U-NII 3)     | -2.270                          | -2.508                          | 0.00                   | 2.22                                | 2.84                             | 29.02 dBm/500kHz | -26.18         |
| 5755               | -1.199                          | -0.893                          | 0.00                   | 2.22                                | 4.19                             | 29.02 dBm/500kHz | -24.83         |
| 5795               | 0.869                           | 1.485                           | 0.00                   | 2.22                                | 6.42                             | 29.02 dBm/500kHz | -22.60         |
|                    |                                 | POWER DENSIT                    | Y 802.11ac VHT8        | 0 MODE                              |                                  |                  |                |
| Frequency<br>(MHz) | Ch0<br>meas PSD<br>(dBm/MHz)    | Ch1<br>meas PSD<br>(dBm/MHz)    | Duty<br>Factor<br>(dB) | Total Corr'd F                      | PSD(dBm/MHz)                     | Limit            | Margin<br>(dB) |
| 5210               | -3.491                          | -3.189                          | 0.00                   | -0                                  | .33                              | 16.77 dBm/MHz    | -17.10         |
| 5290               | -3.537                          | -3.345                          | 0.00                   | -0                                  | .43                              | 10.08 dBm/MHz    | -10.51         |
| 5530               | -1.228                          | -1.199                          | 0.00                   | 1.                                  | 80                               | 9.71 dBm/MHz     | -7.91          |
| 5610               | 2.883                           | 2.831                           | 0.00                   | 5.                                  | 87                               | 9.71 dBm/MHz     | -3.84          |
| 5690 (U-NII 2C)    | 0.160                           | 0.577                           | 0.00                   | 3.                                  | 38                               | 9.71 dBm/MHz     | -6.33          |
| Frequency<br>(MHz) | Ch0<br>meas PSD<br>(dBm/300kHz) | Ch1<br>meas PSD<br>(dBm/300kHz) | Duty<br>Factor<br>(dB) | 10log<br>(500kHz/RBW)<br>Factor(dB) | Total Corr'd PSD<br>(dBm/500kHz) | Limit            | Margin<br>(dB) |
| 5690 (U-NII 3)     | -5.140                          | -5.431                          | 0.00                   | 2.22                                | -0.05                            | 29.02 dBm/500kHz | -29.07         |
| 5775               | -4.168                          | -3.868                          | 0.00                   | 2.22                                | 1.21                             | 29.02 dBm/500kHz | -27.81         |
|                    |                                 | POWER DENSIT                    | Y 802.11ac VHT16       | 0 MODE                              |                                  |                  |                |
| Frequency<br>(MHz) | Ch0<br>meas PSD<br>(dBm/MHz)    | Ch1<br>meas PSD<br>(dBm/MHz)    | Duty<br>Factor<br>(dB) | Total Corr'd F                      | PSD(dBm/MHz)                     | Limit            | Margin<br>(dB) |
| 5250               | -7.255                          | -6.862                          | 0.00                   | -4                                  | .04                              | 10.08 dBm/MHz    | -14.12         |
| 5570               | -7.074                          | -6.471                          | 0.00                   |                                     | -4.04<br>-3.75                   |                  | -13.46         |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之缘具负责,同时此模具做是例如于。木型生主领水公司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 120 of 670

|                    |            |                                 | POWER DENSIT                    | Y 802.11be EHT20       | MODE                                |                                  |                  |                |
|--------------------|------------|---------------------------------|---------------------------------|------------------------|-------------------------------------|----------------------------------|------------------|----------------|
| Frequency<br>(MHz) | RU config. | Ch0<br>meas PSD<br>(dBm/MHz)    | Ch1<br>meas PSD<br>(dBm/MHz)    | Duty<br>Factor<br>(dB) | Total Corr'd F                      | PSD(dBm/MHz)                     | Limit            | Margii<br>(dB) |
| 5180               | full       | 6.915                           | 7.283                           | 0.00                   | 10                                  | .11                              | 16.77 dBm/MHz    | -6.66          |
| 5220               | full       | 6.861                           | 7.785                           | 0.00                   | 10.36                               |                                  | 16.77 dBm/MHz    | -6.41          |
| 5240               | full       | 5.876                           | 7.579                           | 0.00                   | 9.                                  | 82                               | 16.77 dBm/MHz    | -6.95          |
| 5260               | full       | 4.001                           | 3.984                           | 0.00                   | 7.                                  | 00                               | 10.08 dBm/MHz    | -3.08          |
| 5300               | full       | 3.861                           | 3.929                           | 0.00                   | 6.                                  | 91                               | 10.08 dBm/MHz    | -3.17          |
| 5320               | full       | 3.898                           | 3.764                           | 0.00                   | 6.                                  | 84                               | 10.08 dBm/MHz    | -3.24          |
| 5500               | full       | 3.305                           | 3.837                           | 0.00                   | 6.                                  | 59                               | 9.71 dBm/MHz     | -3.12          |
| 5580               | full       | 3.231                           | 3.608                           | 0.00                   | 6.                                  | 43                               | 9.71 dBm/MHz     | -3.28          |
| 5700               | full       | 3.429                           | 3.855                           | 0.00                   | 6.                                  | 66                               | 9.71 dBm/MHz     | -3.05          |
| 5720 (U-NII 2C)    | full       | 3.505                           | 3.692                           | 0.00                   |                                     | 61                               | 9.71 dBm/MHz     | -3.10          |
| Frequency<br>(MHz) | RU config. | Ch0<br>meas PSD<br>(dBm/300kHz) | Ch1<br>meas PSD<br>(dBm/300kHz) | Duty<br>Factor<br>(dB) | 10log<br>(500kHz/RBW)<br>Factor(dB) | Total Corr'd PSD<br>(dBm/500kHz) | Limit            | Margi<br>(dB)  |
| 5720 (U-NII 3)     | full       | -1.737                          | -1.380                          | 0.00                   | 2.22                                | 3.68                             | 29.02 dBm/500kHz | -25.34         |
| 5745               | full       | 1.099                           | 1.011                           | 0.00                   | 2.22                                | 6.29                             | 29.02 dBm/500kHz | -22.73         |
| 5785               | full       | 3.933                           | 3.934                           | 0.00                   | 2.22                                | 9.16                             | 29.02 dBm/500kHz | -19.86         |
| 5825               | full       | 3.181                           | 3.252                           | 0.00                   | 2.22                                | 8.45                             | 29.02 dBm/500kHz | -20.57         |
|                    |            |                                 | POWER DENSIT                    | Y 802.11be EHT40       | MODE                                |                                  |                  |                |
| Frequency<br>(MHz) | RU config. | Ch0<br>meas PSD<br>(dBm/MHz)    | Ch1<br>meas PSD<br>(dBm/MHz)    | Duty<br>Factor<br>(dB) | Total Corr'd PSD(dBm/MHz)           |                                  | Limit            | Margi<br>(dB)  |
| 5190               | full       | 0.348                           | 0.780                           | 0.00                   | 3.58                                |                                  | 16.77 dBm/MHz    | -13.19         |
| 5230               | full       | 4.230                           | 6.023                           | 0.00                   | 8.23                                |                                  | 16.77 dBm/MHz    | -8.54          |
| 5270               | full       | 3.577                           | 3.448                           | 0.00                   | 6.                                  | 52                               | 10.08 dBm/MHz    | -3.56          |
| 5310               | full       | 1.206                           | 0.614                           | 0.00                   | 3.                                  | 93                               | 10.08 dBm/MHz    | -6.15          |
| 5510               | full       | 3.212                           | 3.095                           | 0.00                   | 6.                                  | 16                               | 9.71 dBm/MHz     | -3.55          |
| 5550               | full       | 3.620                           | 3.446                           | 0.00                   | 6                                   | 54                               | 9.71 dBm/MHz     | -3.17          |
| 5670               | full       | 3.327                           | 3.644                           | 0.00                   |                                     | 50                               | 9.71 dBm/MHz     | -3.21          |
| 5710 (U-NII 2C)    | full       | 3.338                           | 3.526                           | 0.00                   |                                     | 44                               | 9.71 dBm/MHz     | -3.27          |
| Frequency (MHz)    | RU config. | Ch0<br>meas PSD<br>(dBm/300kHz) | Ch1<br>meas PSD<br>(dBm/300kHz) | Duty<br>Factor<br>(dB) | 10log<br>(500kHz/RBW)<br>Factor(dB) | Total Corr'd PSD<br>(dBm/500kHz) | Limit            | Margii<br>(dB) |
| 5710 (U-NII 3)     | full       | -1.907                          | -2.011                          | 0.00                   | 2.22                                | 3.27                             | 29.02 dBm/500kHz | -25.75         |
| 5755               | full       | -1.272                          | -0.806                          | 0.00                   | 2.22                                | 4.20                             | 29.02 dBm/500kHz | -24.82         |
| 5795               | full       | 0.703                           | 1.678                           | 0.00                   | 2.22                                | 6.45                             | 29.02 dBm/500kHz | -22.57         |
|                    |            |                                 | POWER DENSIT                    | Y 802.11be EHT80       | MODE                                |                                  |                  |                |
| Frequency<br>(MHz) | RU config. | Ch0<br>meas PSD<br>(dBm/MHz)    | Ch1<br>meas PSD<br>(dBm/MHz)    | Duty<br>Factor<br>(dB) | Total Corr'd F                      | PSD(dBm/MHz)                     | Limit            | Margi<br>(dB)  |
| 5210               | full       | -2.862                          | -2.631                          | 0.00                   | 0.                                  | 27                               | 16.77 dBm/MHz    | -16.50         |
| 5290               | full       | -2.324                          | -2.278                          | 0.00                   | 0.                                  | 71                               | 10.08 dBm/MHz    | -9.37          |
| 5530               | full       | 0.213                           | 0.002                           | 0.00                   | 3.                                  | 12                               | 9.71 dBm/MHz     | -6.59          |
| 5610               | full       | 2.845                           | 2.936                           | 0.00                   |                                     | 90                               | 9.71 dBm/MHz     | -3.81          |
| 5690 (U-NII 2C)    | full       | 1.382                           | 1.629                           | 0.00                   |                                     | 52                               | 9.71 dBm/MHz     | -5.19          |
| Frequency (MHz)    | RU config. | Ch0<br>meas PSD<br>(dBm/300kHz) | Ch1<br>meas PSD<br>(dBm/300kHz) | Duty<br>Factor<br>(dB) | 10log<br>(500kHz/RBW)<br>Factor(dB) | Total Corr'd PSD (dBm/500kHz)    | Limit            | Margi<br>(dB)  |
|                    |            |                                 |                                 |                        |                                     |                                  |                  |                |
| 5690 (U-NII 3)     | full       | -4.111                          | -3.959                          | 0.00                   | 2.22                                | 1.20                             | 29.02 dBm/500kHz | -27.8          |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 121 of 670

|                    | POWER DENSITY 802.11be EHT160 MODE |                              |                              |                        |                           |               |                |  |  |  |  |  |
|--------------------|------------------------------------|------------------------------|------------------------------|------------------------|---------------------------|---------------|----------------|--|--|--|--|--|
| Frequency<br>(MHz) | RU config.                         | Ch0<br>meas PSD<br>(dBm/MHz) | Ch1<br>meas PSD<br>(dBm/MHz) | Duty<br>Factor<br>(dB) | Total Corr'd PSD(dBm/MHz) | Limit         | Margin<br>(dB) |  |  |  |  |  |
| 5250               | full                               | -6.231                       | -6.340                       | 0.00                   | -3.27                     | 10.08 dBm/MHz | -13.35         |  |  |  |  |  |
| 5570               | full                               | -6.341                       | -6.198                       | 0.00                   | -3.26                     | 9.71 dBm/MHz  | -12.97         |  |  |  |  |  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有铅明,此数华红用摄影测过之龄只有贵,同时此龄只属是例如子。太极华工概太公司隶逼药可,不可如公均剩。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 122 of 670

| For ISED           | O-INII- I          |                              |                              |                        |                           |               |                |
|--------------------|--------------------|------------------------------|------------------------------|------------------------|---------------------------|---------------|----------------|
|                    |                    |                              | POWER DEI                    | NSITY 802.11a MOI      | DE                        |               |                |
| Fr                 | requency<br>(MHz)  | Ch0<br>meas PSD<br>(dBm/MHz) | Ch1<br>meas PSD<br>(dBm/MHz) | Duty<br>Factor<br>(dB) | Total Corr'd PSD(dBm/MHz) | Limit         | Margin<br>(dB) |
|                    | 5180               | -2.416                       | -2.450                       | 0.00                   | 0.58                      | 16.76 dBm/MHz | -16.18         |
|                    | 5220               | -2.354                       | -2.416                       | 0.00                   | 0.63                      | 16.76 dBm/MHz | -16.13         |
|                    | 5240               | -2.361                       | -2.785                       | 0.00                   | 0.44                      | 16.76 dBm/MHz | -16.32         |
|                    |                    |                              | POWER DENSI                  | TY 802.11n HT20 N      | MODE                      |               |                |
| Fr                 | requency<br>(MHz)  | Ch0<br>meas PSD<br>(dBm/MHz) | Ch1<br>meas PSD<br>(dBm/MHz) | Duty<br>Factor<br>(dB) | Total Corr'd PSD(dBm/MHz) | Limit         | Margin<br>(dB) |
|                    | 5180               | -2.487                       | -2.256                       | 0.00                   | 0.64                      | 16.76 dBm/MHz | -16.12         |
|                    | 5220               | -2.338                       | -2.670                       | 0.00                   | 0.51                      | 16.76 dBm/MHz | -16.25         |
|                    | 5240               | -2.605                       | -2.781                       | 0.00                   | 0.32                      | 16.76 dBm/MHz | -16.44         |
|                    |                    |                              | POWER DENSI                  | TY 802.11n HT40 N      | MODE                      |               |                |
| Fr                 | requency<br>(MHz)  | Ch0<br>meas PSD<br>(dBm/MHz) | Ch1<br>meas PSD<br>(dBm/MHz) | Duty<br>Factor<br>(dB) | Total Corr'd PSD(dBm/MHz) | Limit         | Margin<br>(dB) |
|                    | 5190               | -2.288                       | -2.397                       | 0.00                   | 0.67                      | 16.76 dBm/MHz | -16.09         |
|                    | 5230               | -2.322                       | -2.249                       | 0.00                   | 0.72                      | 16.76 dBm/MHz | -16.04         |
|                    |                    |                              | POWER DENSIT                 | Y 802.11ac VHT80       | MODE                      |               |                |
| Fr                 | Frequency<br>(MHz) |                              | Ch1<br>meas PSD<br>(dBm/MHz) | Duty<br>Factor<br>(dB) | Total Corr'd PSD(dBm/MHz) | Limit         | Margin<br>(dB) |
|                    | 5210               | -3.491                       | -3.189                       | 0.00                   | -0.33                     | 16.76 dBm/MHz | -17.09         |
|                    |                    | _                            | POWER DENSIT                 | Y 802.11ac VHT160      | ) MODE                    |               |                |
| Fr                 | requency<br>(MHz)  | Ch0<br>meas PSD<br>(dBm/MHz) | Ch1<br>meas PSD<br>(dBm/MHz) | Duty<br>Factor<br>(dB) | Total Corr'd PSD(dBm/MHz) | Limit         | Margin<br>(dB) |
|                    | 5250               | -7.255                       | -6.862                       | 0.00                   | -4.04                     | 10.08 dBm/MHz | -14.12         |
|                    |                    |                              | POWER DENSIT                 | Y 802.11be EHT20       | MODE                      |               |                |
| Frequency<br>(MHz) | RU config.         | Ch0<br>meas PSD<br>(dBm/MHz) | Ch1<br>meas PSD<br>(dBm/MHz) | Duty<br>Factor<br>(dB) | Total Corr'd PSD(dBm/MHz) | Limit         | Margin<br>(dB) |
| 5180               | full               | -2.533                       | -2.339                       | 0.00                   | 0.58                      | 16.76 dBm/MHz | -16.18         |
| 5220               | full               | -2.539                       | -2.712                       | 0.00                   | 0.39                      | 16.76 dBm/MHz | -16.37         |
| 5240               | full               | -2.628                       | -2.616                       | 0.00                   | 0.39                      | 16.76 dBm/MHz | -16.37         |
|                    |                    |                              | POWER DENSIT                 | Y 802.11be EHT40       | MODE                      |               |                |
| Frequency<br>(MHz) | RU config.         | Ch0<br>meas PSD<br>(dBm/MHz) | Ch1<br>meas PSD<br>(dBm/MHz) | Duty<br>Factor<br>(dB) | Total Corr'd PSD(dBm/MHz) | Limit         | Margin<br>(dB) |
| 5190               | full               | -2.564                       | -2.576                       | 0.00                   | 0.44                      | 16.76 dBm/MHz | -16.32         |
| 5230               | full               | -2.535                       | -2.556                       | 0.00                   | 0.46                      | 16.76 dBm/MHz | -16.30         |
|                    |                    |                              | POWER DENSIT                 | Y 802.11be EHT80       | MODE                      |               |                |
| Frequency<br>(MHz) | RU config.         | Ch0<br>meas PSD<br>(dBm/MHz) | Ch1<br>meas PSD<br>(dBm/MHz) | Duty<br>Factor<br>(dB) | Total Corr'd PSD(dBm/MHz) | Limit         | Margin<br>(dB) |
| 5210               | full               | -2.862                       | -2.631                       | 0.00                   | 0.27                      | 16.76 dBm/MHz | -16.49         |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除北京方的时,他就是在国际影响是少楼里看来,同时他接回陈河间的一个大家,是这个大哥电话还可,不可如此推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 123 of 670

|                    | POWER DENSITY 802.11be EHT160 MODE |                              |                              |                        |                           |               |                |  |  |  |  |  |
|--------------------|------------------------------------|------------------------------|------------------------------|------------------------|---------------------------|---------------|----------------|--|--|--|--|--|
| Frequency<br>(MHz) | RU config.                         | Ch0<br>meas PSD<br>(dBm/MHz) | Ch1<br>meas PSD<br>(dBm/MHz) | Duty<br>Factor<br>(dB) | Total Corr'd PSD(dBm/MHz) | Limit         | Margin<br>(dB) |  |  |  |  |  |
| 5250               | full                               | -6.231                       | -6.340                       | 0.00                   | -3.27                     | 10.08 dBm/MHz | -13.35         |  |  |  |  |  |

| <br>full     | -6.231  | -6.340            | 0.00                  | -3.27                |                | 10.08 dBm/MHz  |
|--------------|---------|-------------------|-----------------------|----------------------|----------------|----------------|
|              | EIR     | P spectral dens   | ity 802.11a           | MODE                 |                |                |
| Freq<br>(MHz | •       | PSD<br>(dBm)      | Ant.<br>Gain<br>(dBi) | EIRP<br>PSD<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
| 518          | 0       | 0.58              | 6.24                  | 6.82                 | 10             | -3.18          |
| 522          | 0       | 0.63              | 6.24                  | 6.87                 | 10             | -3.13          |
| 524          | 0       | 0.44              | 6.24                  | 6.68                 | 10             | -3.32          |
|              | EIRP s  | pectral density   | 802.11n HT            | 20 MODE              |                |                |
| Freq<br>(MHz | -       | PSD<br>(dBm)      | Ant.<br>Gain<br>(dBi) | EIRP<br>PSD<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
| 518          | 0       | 0.64              | 6.24                  | 6.88                 | 10             | -3.12          |
| 522          | 0       | 0.51              | 6.24                  | 6.75                 | 10             | -3.25          |
| 524          | 0       | 0.32              | 6.24                  | 6.56                 | 10             | -3.44          |
|              | EIRP s  | pectral density   | 802.11n HT            | 40 MODE              |                | _              |
| Freq<br>(MHz | •       | PSD<br>(dBm)      | Ant.<br>Gain<br>(dBi) | EIRP<br>PSD<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
| 519          | 0       | 0.67              | 6.24                  | 6.91                 | 10             | -3.09          |
| 5230         | 0       | 0.72              | 6.24                  | 6.96                 | 10             | -3.04          |
|              | EIRP sp | ectral density 8  | 02.11ac VH            | T80 MODE             |                |                |
| Freq<br>(MHz | •       | PSD<br>(dBm)      | Ant.<br>Gain<br>(dBi) | EIRP<br>PSD<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
| 521          | 0       | -0.33             | 6.24                  | 5.91                 | 10             | -4.09          |
|              | EIRP sp | ectral density 80 | 02.11ac VHT           | 160 MODE             |                |                |
| Freq<br>(MHz | •       | PSD<br>(dBm)      | Ant.<br>Gain          | EIRP<br>PSD          | Limit<br>(dBm) | Margin<br>(dB) |
| <b>\</b>     |         | (4.2)             | (dBi)                 | (dBm)                | , ,            |                |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司




Page: 124 of 670

| I  | EIRP spectra | l density 80 | 2.11be EHT            | 20 MODE              |                |                |
|--|--------------|--------------|-----------------------|----------------------|----------------|----------------|
| Freq.<br>(MHz)                             | RU config.   | PSD<br>(dBm) | Ant.<br>Gain<br>(dBi) | EIRP<br>PSD<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
| 5180                                       | full         | 0.58         | 6.24                  | 6.82                 | 10             | -3.18          |
| 5220                                       | full         | 0.39         | 6.24                  | 6.63                 | 10             | -3.37          |
| 5240                                       | full         | 0.39         | 6.24                  | 6.63                 | 10             | -3.37          |
|  | EIRP spectra | l density 80 | 2.11be EHT            | 740 MODE             |                |                |
| Freq.<br>(MHz)                             | RU config.   | PSD<br>(dBm) | Ant.<br>Gain<br>(dBi) | EIRP<br>PSD<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
| 5190                                       | full         | 0.44         | 6.24                  | 6.68                 | 10             | -3.32          |
| 5230                                       | full         | 0.46         | 6.24                  | 6.70                 | 10             | -3.30          |
| -  | EIRP spectra | l density 80 | 2.11be EHT            | 780 MODE             |                |                |
| Freq.<br>(MHz)                             | RU config.   | PSD<br>(dBm) | Ant.<br>Gain<br>(dBi) | EIRP<br>PSD<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
| 5210                                       | full         | 0.27         | 6.24                  | 6.51                 | 10             | -3.49          |
| EIRP spectral density 802.11be EHT160 MODE |              |              |                       |                      |                |                |
| Freq.<br>(MHz)                             | RU config.   | PSD<br>(dBm) | Ant.<br>Gain<br>(dBi) | EIRP<br>PSD<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
| 5250                                       | full         | -3.27        | 6.24                  | 2.97                 | 10             | -7.03          |

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 125 of 670

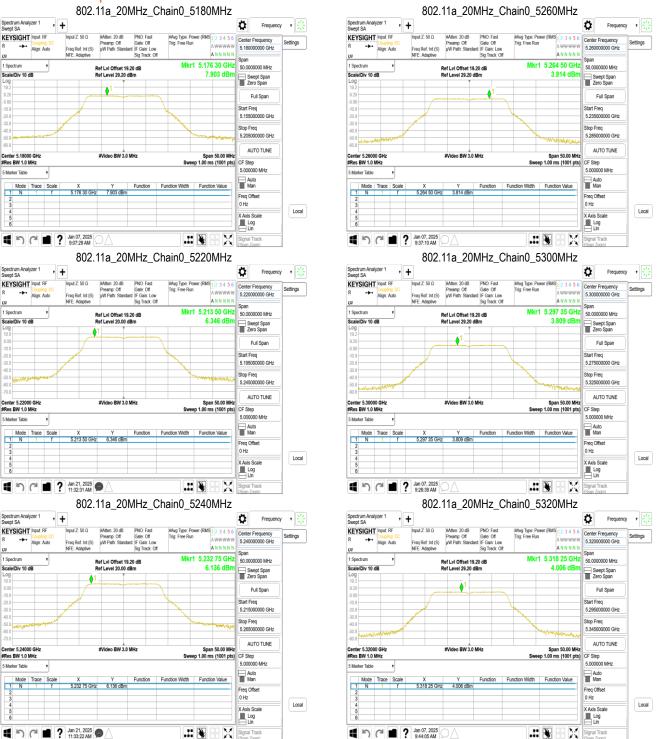


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.



Page: 126 of 670

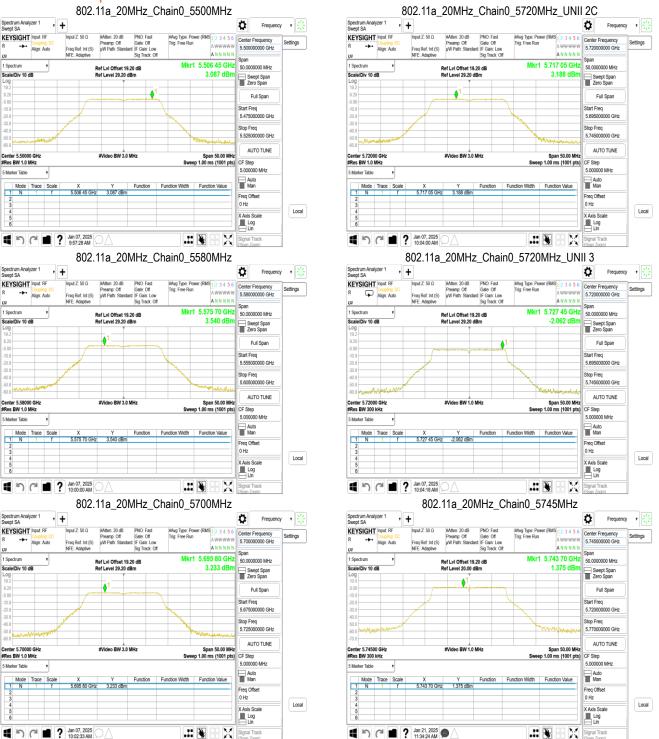


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd



Page: 127 of 670

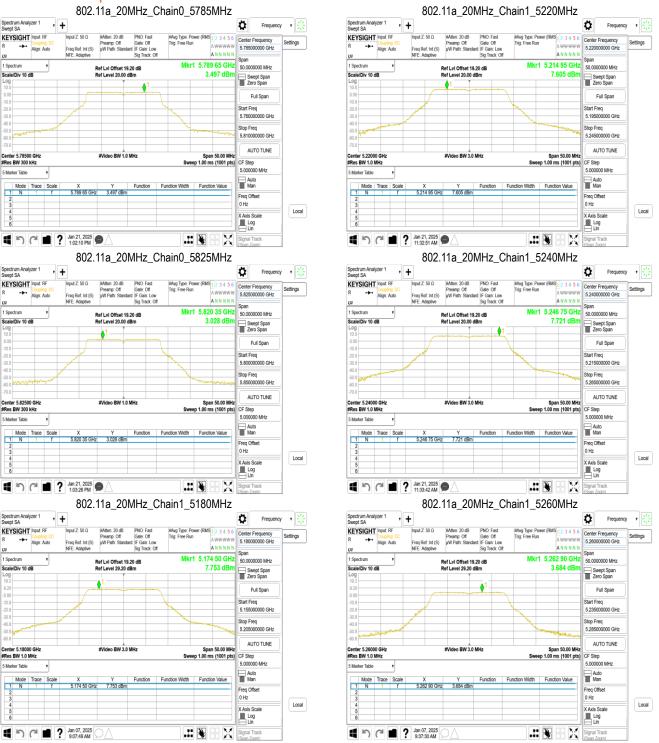


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大型企业等等。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 128 of 670

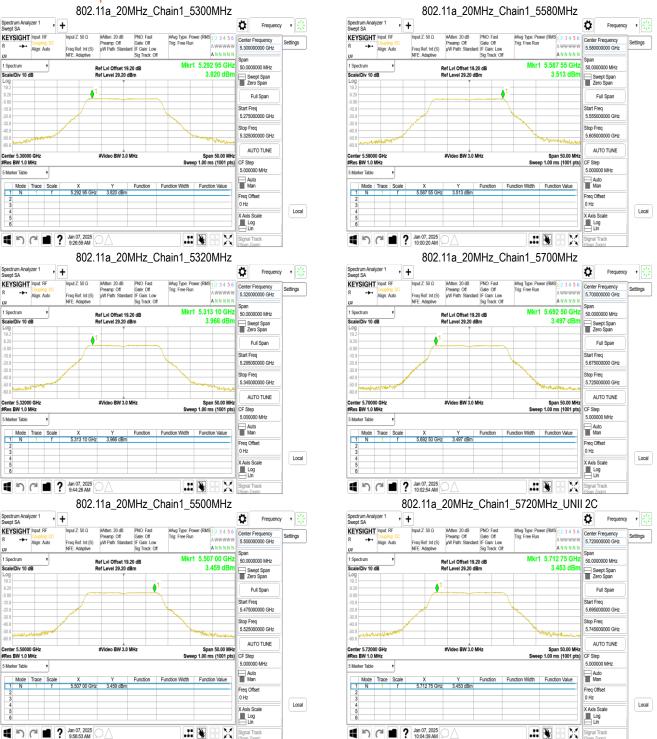


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.



Page: 129 of 670

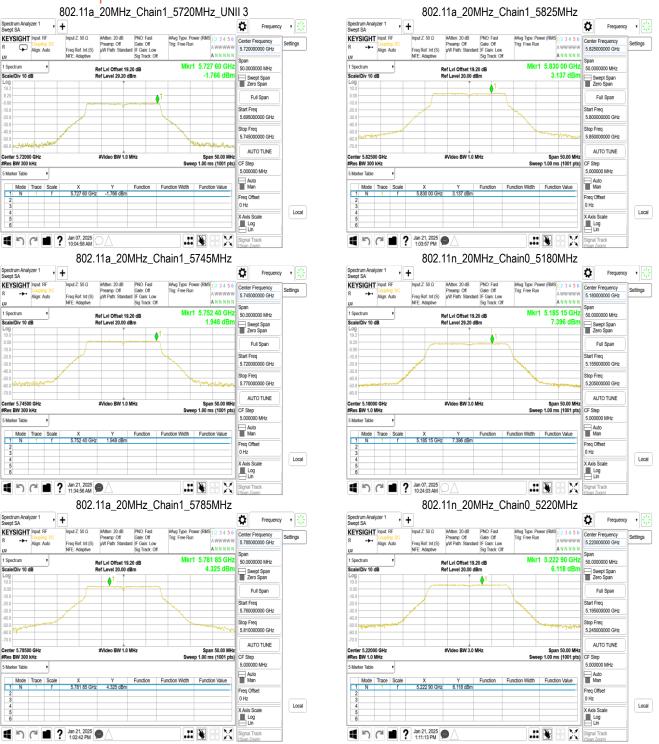


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.



Page: 130 of 670

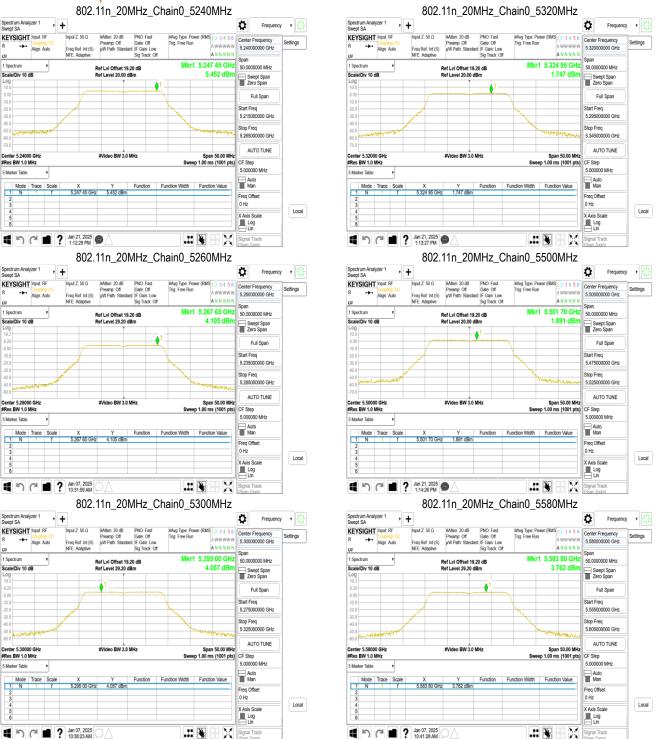

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.



Page: 131 of 670



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd