

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 27
47 CFR FCC Part 2

Report No.: RFBCMA-WTW-P24070713-10

FCC ID: RAXXC46BE

Product: Dragon

Brand: Verizon

Model No.: XC46BE

Received Date: 2024/9/27

Test Date: 2024/10/28 ~ 2024/11/3

Issued Date: 2024/11/19

Applicant: Arcadyan Technology Corporation

Address: No.8, Sec.2, Guangfu Rd., Hsinchu City 30071, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location(1): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan

Test Location(2): No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

FCC Registration / 788550 / TW0003 for Test Location(1)

Designation Number: 281270 / TW0032 for Test Location(2)

Approved by: _____

Jeremy Lin

Date: _____

2024/11/19

Jeremy Lin / Project Engineer

This test report consists of 48 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Polly Chien / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	8
3.3 Test Mode Applicability and Tested Channel Detail.....	9
3.4 Test Program Used and Operation Descriptions	11
3.5 Connection Diagram of EUT and Peripheral Devices	11
3.6 Configuration of Peripheral Devices and Cable Connections	11
4 Test Instruments	12
4.1 Effective Radiated Power and Equivalent Isotropically Radiated Power	12
4.2 Peak to Average Ratio	12
4.3 Bandwidth.....	12
4.4 Conducted Spurious Emissions	12
4.5 Radiated Spurious Emissions below 1GHz.....	13
4.6 Radiated Spurious Emissions above 1GHz	14
4.7 Frequency Stability	15
5 Limits of Test Items.....	16
5.1 Effective Radiated Power and Equivalent Isotropically Radiated Power	16
5.2 Peak to Average Ratio	16
5.3 Bandwidth.....	16
5.4 Conducted Spurious Emissions	16
5.5 Radiated Spurious Emissions below 1GHz.....	16
5.6 Radiated Spurious Emissions above 1GHz	16
5.7 Frequency Stability	16
6 Test Arrangements.....	17
6.1 Effective Radiated Power and Equivalent Isotropically Radiated Power	17
6.1.1 Test Setup	17
6.1.2 Test Procedure	17
6.2 Peak to Average Ratio	18
6.2.1 Test Setup	18
6.2.2 Test Procedure	18
6.3 Bandwidth.....	19
6.3.1 Test Setup	19
6.3.2 Test Procedure	19
6.4 Conducted Spurious Emissions	21
6.4.1 Test Setup	21
6.4.2 Test Procedure	21
6.5 Radiated Spurious Emissions below 1GHz.....	22
6.5.1 Test Setup	22
6.5.2 Test Procedure	22
6.6 Radiated Spurious Emissions above 1GHz	23
6.6.1 Test Setup	23
6.6.2 Test Procedure	23
6.7 Frequency Stability	24
6.7.1 Test Setup	24
6.7.2 Test Procedure	24
7 Test Results of Test Item	25
7.1 Effective Radiated Power and Equivalent Isotropically Radiated Power	25
7.1.1 LTE Band 66B.....	25

7.1.2	LTE Band 66C.....	26
7.2	Peak to Average Ratio.....	27
7.2.1	LTE Band 66B.....	27
7.2.2	LTE Band 66C.....	28
7.3	Bandwidth.....	29
7.3.1	LTE Band 66B.....	29
7.3.2	LTE Band 66C.....	30
7.4	Conducted Spurious Emissions	31
7.4.1	LTE Band 66B.....	31
7.4.2	LTE Band 66C.....	33
7.5	Radiated Spurious Emissions below 1GHz.....	35
7.5.1	LTE Band 66B.....	35
7.5.2	LTE Band 66C.....	37
7.6	Radiated Spurious Emissions above 1GHz	39
7.6.1	LTE Band 66B.....	39
7.6.2	LTE Band 66C.....	42
7.7	Frequency Stability	45
7.7.1	LTE Band 66B.....	45
7.7.2	LTE Band 66C.....	46
8	Pictures of Test Arrangements	47
9	Information of the Testing Laboratories	48

Release Control Record

Issue No.	Description	Date Issued
RFBCMA-WTW-P24070713-10	Original Release	2024/11/19

1 Certificate

Product: Dragon

Brand: Verizon

Test Model: XC46BE

Sample Status: Engineering sample

Applicant: Arcadyan Technology Corporation

Test Date: 2024/10/28 ~ 2024/11/3

Standard: 47 CFR FCC Part 27
47 CFR FCC Part 2

Measurement procedure: ANSI/TIA/EIA-603-E 2016
ANSI C63.26-2015
KDB 971168 D01 Power Meas License Digital Systems v03r01
KDB 971168 D02 Misc Rev Approv License Devices v02r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 27 47 CFR FCC Part 2			
Standard / Clause	Test Item	Result	Remark
Part 2.1046 Part 27.50 (d)	Effective Radiated Power and Equivalent Isotropically Radiated Power	Pass	Meet the requirement of limit.
Part 2.1047	Modulation Characteristics	N/A	Refer to Note 2
Part 27.50 (d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
Part 2.1049	Bandwidth	Pass	Meet the requirement of limit.
Part 2.1051 Part 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
Part 2.1053 Part 27.53 (h)	Radiated Spurious Emissions below 1GHz	Pass	Minimum passing margin is -28.26 dB at 174.53 MHz
Part 2.1053 Part 27.53 (h)	Radiated Spurious Emissions above 1GHz	Pass	Minimum passing margin is -28.30 dB at 3529.80 MHz
Part 2.1055 Part 27.54	Frequency Stability	Pass	Meet the requirement of limit.

Note: 1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2. LTE CA mode is similar to digital modulation in LTE single frequency band, so please refer to BV CPS report no.: RFBCMA-WTW-P24070713-2 for the modulation characteristics data of CA mode.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Uncertainty (±)
Effective Radiated Power and Equivalent Isotropically Radiated Power	-	1.371 dB
Peak to Average Ratio	-	0.920 dB
Bandwidth	-	960 Hz
Conducted Spurious Emissions	-	2.12 dB
Radiated Spurious Emissions below 1GHz	9 kHz ~ 30 MHz	3 dB
	30 MHz ~ 1 GHz	2.92 dB
Radiated Spurious Emissions above 1GHz	1 GHz ~ 18 GHz	1.76 dB
	18 GHz ~ 40 GHz	1.77 dB
Frequency Stability	-	0.176 ppm

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Dragon
Brand	Verizon
Test Model	XC46BE
Status of EUT	Engineering sample
Power Supply Rating	12.0Vdc from adapter 7.2 Vdc from battery

Note:

1. EUT Overview

Mode	Bandwidth	Modulation	Max. EIRP (W)	Max. EIRP (dBm)	Emission Designator
CA 66B	10MHz + 10MHz	QPSK	0.401	26.03	18M9G7D
		16QAM	0.318	25.02	18M9D7W
		64QAM	0.202	23.06	18M9D7W
		256QAM	0.122	20.85	18M9D7W
CA 66C	20MHz + 20MHz	QPSK	0.394	25.96	37M7G7D
		16QAM	0.323	25.09	37M7D7W
		64QAM	0.199	22.98	37M7D7W
		256QAM	0.123	20.89	37M7D7W

2. The EUT uses following accessories.

Adapter	
Brand	verizon
Model	1A105-1235
Input Power	105-125 Vac, 60Hz, 1.2A
Output Power	12.0Vdc, 3.5A, 42.0W
DC Output Cable	1.8meter unshielded cable, w/o ferrite core

Battery	
Brand	Atemitech
Model	XC46BE224T-F100
Power Rating	7.2Vdc, 9800mAh (70.56Wh)

3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

4. For CA mode configuration, please consult the manufacturer to declare the test mode.

5. The EUT support the following CA Configuration.

Band Configuration
48C
66B
66C

6. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna NO.	TX/RX	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type
Ant.1	TX1/RX	2.86	FDD B2/n2: 1850 -1910 MHz	Dipole	SMA
	TX1/RX	2.77	FDD B5/n5: 824-849 MHz		
	TX0/RX	3.35	FDD B13: 777-787 MHz		
	TX0/RX	0.57	TDD B48/n48: 3550-3700 MHz		
	TX1/RX	2.54	FDD B66/n66: 1710-1780 MHz		
	TX0/RX	0.57	TDD n77: 3300-4200 MHz		
Ant.2	RX	2.82	FDD B2/n2: 1850 -1910 MHz	Dipole	SMA
		1.84	FDD B5/n5: 824-849 MHz		
		2.59	FDD B13: 777-787 MHz		
		0.91	TDD B48/n48: 3550-3700 MHz		
		2.83	FDD B66/n66: 1710-1780 MHz		
		0.91	TDD n77: 3300-4200 MHz		
Ant.3	RX	2.93	FDD B2/n2: 1850 -1910 MHz	Dipole	SMA
		2.7	FDD B5/n5: 824-849 MHz		
		2.18	FDD B13: 777-787 MHz		
		-0.13	TDD B48/n48: 3550-3700 MHz		
		3.08	FDD B66/n66: 1710-1780 MHz		
		0.78	TDD n77: 3300-4200 MHz		
Ant.4	TX0/RX	3.52	FDD B2/n2: 1850 -1910 MHz	Dipole	SMA
	TX0/RX	3.92	FDD B5/n5: 824-849 MHz		
	RX	4.23	FDD B13: 777-787 MHz		
	TX1/RX	0.33	TDD B48/n48: 3550-3700 MHz		
	TX0/RX	2.9	FDD B66/n66: 1710-1780 MHz		
	TX1/RX	0.74	TDD n77: 3300-4200 MHz		

*During SISO mode, FDD Band2/n2, FDD Band5/n5 & FDD Band66/n66 were fixed on Ant.4 and FDD Band13, TDD Band48/n48 & TDD n77 were fixed on Ant.1.

*For MIMO mode:

1. FDD:n2/n66 & TDD: n48/n77 were fixed on Ant.1 + Ant.4.
2. The MIMO mode signal was uncorrelated signal.
3. Regarding EIRP calculation that we will use the maximum antenna gain/frequency band as calculation parameters.
Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/2]$ dBi.

*The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	- For Unwanted Emission (below 1GHz) items: Battery/ POE/ AC Adapter. Pre-scan these modes and find the worst case as a representative test condition. - Pre-Scan has been conducted to determine the worst-case from all possible combinations of TX/RX condition, channel, bandwidth, modulation and RB mode. See below table(s) for details.
Worst Case:	- For Unwanted Emission (below 1GHz) items worst condition: AC Adapter, frequency stability items worst condition: Battery and others test item the worst condition: AC Adapter. - EUT only operate on the specific X-axis for tested.

For LTE Band 66B

Test Item	Tested Channel	Channel Bandwidth	Modulation	Mode
EIRP	132022(1715.0MHz)+132121(1724.9MHz), 132373(1750.1MHz)+132472(1760.0MHz), 132523(1765.1MHz)+132622(1775.0MHz)	10MHz + 10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 49 RB Offset
Peak to Average Ratio	132022(1715.0MHz)+132121(1724.9MHz), 132373(1750.1MHz)+132472(1760.0MHz), 132523(1765.1MHz)+132622(1775.0MHz)	10MHz + 10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 49 RB Offset
Bandwidth	132022(1715.0MHz)+132121(1724.9MHz), 132373(1750.1MHz)+132472(1760.0MHz), 132523(1765.1MHz)+132622(1775.0MHz)	10MHz + 10MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 49 RB Offset
Conducted Spurious Emissions	132022(1715.0MHz)+132121(1724.9MHz), 132373(1750.1MHz)+132472(1760.0MHz), 132523(1765.1MHz)+132622(1775.0MHz)	10MHz + 10MHz	QPSK	1 RB Full RB
Radiated Spurious Emissions below 1GHz	132373(1750.1MHz)+132472(1760.0MHz)	10MHz + 10MHz	QPSK	1 RB / 49 RB Offset + 1 RB / 0 RB Offset
Radiated Spurious Emissions above 1GHz	132022(1715.0MHz)+132121(1724.9MHz), 132373(1750.1MHz)+132472(1760.0MHz), 132523(1765.1MHz)+132622(1775.0MHz)	10MHz + 10MHz	QPSK	1 RB / 49 RB Offset + 1 RB / 0 RB Offset
Frequency Stability (Frequency range: 1710 MHz to 1780 MHz)	132022(1715.0MHz)+132121(1724.9MHz), 132523(1765.1MHz)+132622(1775.0MHz)	10MHz + 10MHz	QPSK	Full RB

For LTE Band 66C


Test Item	Tested Channel	Channel Bandwidth	Modulation	Mode
EIRP	132072(1720.0MHz)+132270(1739.8MHz), 132323(1745.1MHz)+132521(1764.9MHz), 132374(1750.2MHz)+132572(1770.0MHz)	20MHz + 20MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 99 RB Offset
Peak to Average Ratio	132072(1720.0MHz)+132270(1739.8MHz), 132323(1745.1MHz)+132521(1764.9MHz), 132374(1750.2MHz)+132572(1770.0MHz)	20MHz + 20MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 99 RB Offset
Bandwidth	132072(1720.0MHz)+132270(1739.8MHz), 132323(1745.1MHz)+132521(1764.9MHz), 132374(1750.2MHz)+132572(1770.0MHz)	20MHz + 20MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 99 RB Offset
Conducted Spurious Emissions	132072(1720.0MHz)+132270(1739.8MHz), 132323(1745.1MHz)+132521(1764.9MHz), 132374(1750.2MHz)+132572(1770.0MHz)	20MHz + 20MHz	QPSK	1 RB Full RB
Radiated Spurious Emissions below 1GHz	132323(1745.1MHz)+132521(1764.9MHz)	20MHz + 20MHz	QPSK	1 RB / 99 RB Offset 1 RB / 0 RB Offset
Radiated Spurious Emissions above 1GHz	132072(1720.0MHz)+132270(1739.8MHz), 132323(1745.1MHz)+132521(1764.9MHz), 132374(1750.2MHz)+132572(1770.0MHz)	20MHz + 20MHz	QPSK	1 RB / 0 RB Offset 1 RB / 99 RB Offset
Frequency Stability (Frequency range: 1710 MHz to 1780 MHz)	132072(1720.0MHz)+132270(1739.8MHz), 132374(1750.2MHz)+132572(1770.0MHz)	20MHz + 20MHz	QPSK	Full RB

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

3.4 Test Program Used and Operation Descriptions

There is no need to controlling software during the test, and the EUT can be paired with the Radio Communication Analyzer to test the connection when it is powered on.

3.5 Connection Diagram of EUT and Peripheral Devices

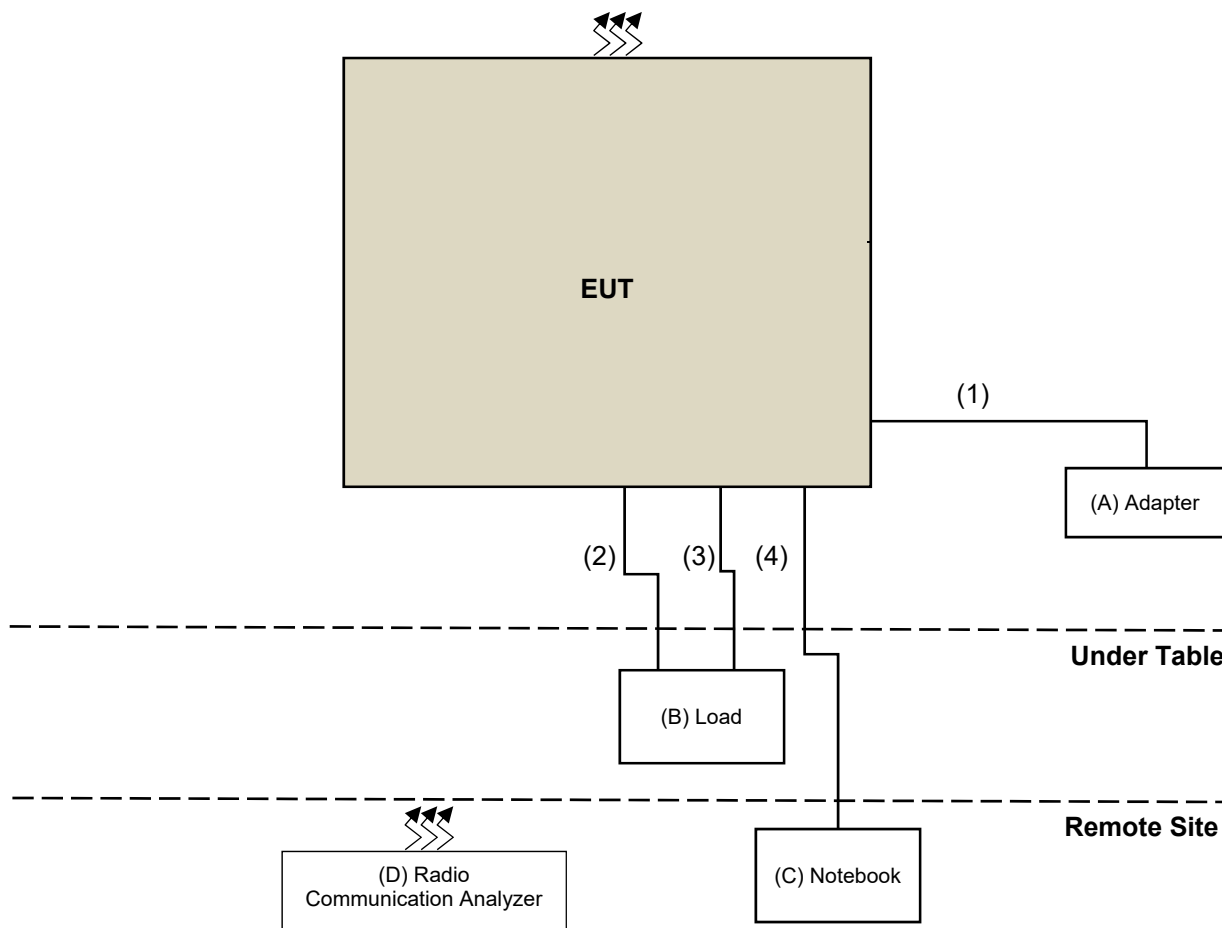

3.6 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	verizon	1A105-1235	N/A	N/A	Supplied by applicant
B	Load	NA	NA	N/A	N/A	Provided by Lab
C	Notebook	Lenovo	20J4 MD A003TW	N/A	N/A	Provided by Lab
D	Radio Communication Analyzer	Anritsu	MT8821C	6201462755	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Output Cable	1	1.8	No	0	Supplied by applicant
2	LAN cable	1	1.5	No	0	Provided by Lab
3	LAN cable	1	1.5	No	0	Provided by Lab
4	LAN cable	1	10	No	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Effective Radiated Power and Equivalent Isotropically Radiated Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030B	MY57140938	2024/3/20	2025/3/19
Radio Communication Analyzer Anritsu	MT8821C	6261806803	2024/2/15	2025/2/14
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/10/28 ~ 2024/11/1

4.2 Peak to Average Ratio

Refer to section 4.1 to get information of the instruments.

4.3 Bandwidth

Refer to section 4.1 to get information of the instruments.

4.4 Conducted Spurious Emissions

Refer to section 4.1 to get information of the instruments.

4.5 Radiated Spurious Emissions below 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower KaiTuo	N/A	N/A	N/A	N/A
Antenna Tower Controller KaiTuo	KT-2000	N/A	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-995	2024/10/9	2025/10/8
Loop Antenna TESEQ	HLA 6121	45745	2024/8/21	2025/8/20
MXE EMI Receiver Agilent	N9038A	MY52260177	2024/9/19	2025/9/18
Preamplifier EMCI	EMC330N	980783	2024/1/15	2025/1/14
	EMC001340	980201	2024/9/24	2025/9/23
PXA Signal Analyzer Keysight	N9030B	MY57140488	2024/3/6	2025/3/5
RF Coaxial Cable EMCI	EMCCFD400-NM-NM-500	201245	2024/1/15	2025/1/14
	EMCCFD400-NM-NM-3000	201250	2024/1/15	2025/1/14
	EMCCFD400-NM-NM-9000	201252(with PAD)	2024/1/15	2025/1/14
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-151SS-0.5T	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208675	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 7.
2. Tested Date: 2024/11/3

4.6 Radiated Spurious Emissions above 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower KaiTuo	N/A	N/A	N/A	N/A
Antenna Tower Controller KaiTuo	KT-2000	N/A	N/A	N/A
Horn Antenna RFSPIN	DRH18-E	210104A18E	2023/11/12	2024/11/11
Horn Antenna Schwarzbeck	BBHA 9170	9170-1048	2023/11/12	2024/11/11
MXE EMI Receiver Agilent	N9038A	MY52260177	2024/9/19	2025/9/18
Preamplifier EMCI	EMC118A45SE	980810	2023/12/28	2024/12/27
	EMC184045SE	980787	2024/1/15	2025/1/14
PXA Signal Analyzer Keysight	N9030B	MY57140488	2024/3/6	2025/3/5
RF Coaxial Cable EMCI	EMC101G-KM-KM-2000	201254	2024/1/15	2025/1/14
	EMC101G-KM-KM-3000	201258	2024/1/15	2025/1/14
	EMC101G-KM-KM-5000	201261	2024/1/15	2025/1/14
	EMC104-SM-SM-1000	210101	2024/1/15	2025/1/14
	EMC104-SM-SM-3000	201242	2024/1/15	2025/1/14
	EMC104-SM-SM-9000	201230	2024/1/15	2025/1/14
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-151SS-0.5T	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208675	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 7.
2. Tested Date: 2024/11/1

4.7 Frequency Stability

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
3-channel DC power supply JIN YIH Technology	ODP3033	ODP30332128138	N/A	N/A
Digital Multimeter Fluke	8050A	4660081	2024/6/14	2025/6/13
PXA Signal Analyzer Keysight	N9030B	MY57140938	2024/3/20	2025/3/19
Radio Communication Analyzer Anritsu	MT8821C	6261806803	2024/2/15	2025/2/14
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Temperature & Humidity Chamber Terchy	HRM-120RF	931022	2023/12/19	2024/12/18

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/11/1

5 Limits of Test Items

5.1 Effective Radiated Power and Equivalent Isotropically Radiated Power

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

5.2 Peak to Average Ratio

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

5.3 Bandwidth

According to FCC 47 CFR part 2.1049, the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.

5.4 Conducted Spurious Emissions

According to FCC 47 CFR part 27.53(h), for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log (P)$ dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

5.5 Radiated Spurious Emissions below 1GHz

According to FCC 47 CFR part 27.53(h), for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log (P)$ dB. The limit of emission is equal to -13 dBm.

5.6 Radiated Spurious Emissions above 1GHz

According to FCC 47 CFR part 27.53(h), for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log (P)$ dB. The limit of emission is equal to -13 dBm.

5.7 Frequency Stability


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation (authorized frequency block).

6 Test Arrangements

6.1 Effective Radiated Power and Equivalent Isotropically Radiated Power

6.1.1 Test Setup

Conducted Power Measurement:

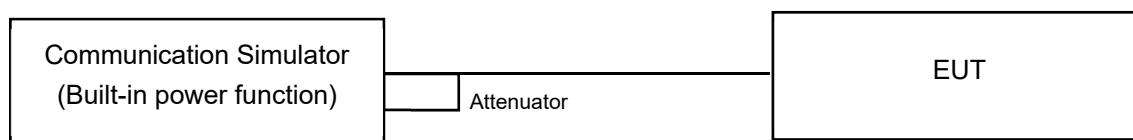

6.1.2 Test Procedure

Conducted Power Measurement:

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology. The average (rms) power measurement was performed on emulator and power value was measured from power function on emulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator. The EUT is configured by emulator to set data modulation and maximum power using WWAN technology and link to spectrum analyzer measurements. Set the EUT to transmit under low, middle and high channel and record the power level shown on spectrum analyzer. Power measurements use detector average (rms).

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_T$$

$$\text{ERP} = P_{\text{Meas}} + G_T - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively


(expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

6.2 Peak to Average Ratio

6.2.1 Test Setup

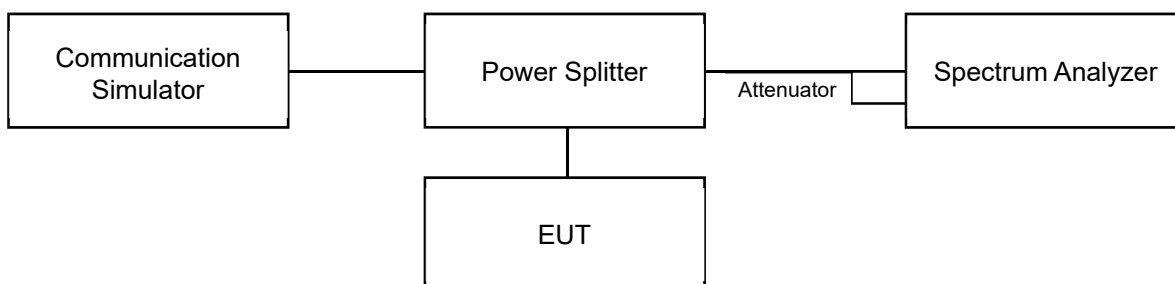


6.2.2 Test Procedure

- Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Record the maximum PAPR level associated with a probability of 0.1%.

6.3 Bandwidth

6.3.1 Test Setup

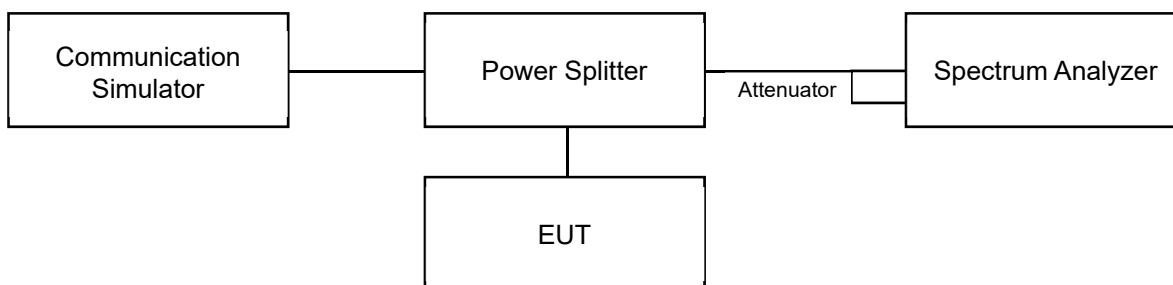

6.3.2 Test Procedure

For the 26 dBc bandwidth measurement method, please refer to section 5.4.3 of ANSI C63.26.


- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
- Determine the following reference values: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- Determine the “-X dB amplitude” as equal to (Reference Value - X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.
- Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB amplitude” determined in step f). If a marker is below this “-X dB amplitude” value it should be as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- The OBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

For the occupied bandwidth measurement method, please refer to section 5.4.4 of ANSI C63.26.

- a. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b. The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- c. Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d. The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e. Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
- f. Determine the reference value by either of the following:
 - g. 1) Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
 - h. 2) Set the EUT to transmit an unmodulated carrier. Set the spectrum analyzer marker to the level of the carrier.
- i. Determine the “-X dB amplitude” as equal to (Reference Value - X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.
- j. If the reference value was determined using an unmodulated carrier, turn the EUT modulation on, then either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise the trace from step f) shall be used for step i).
- k. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB amplitude” determined in step f). If a marker is below this “-X dB amplitude” value it should be as close as possible to this value. The OBW is the positive frequency difference between the two markers. The spectral envelope can cross the “-X dB amplitude” at multiple points. The lowest or highest frequency shall be selected as the frequencies that are the farthest away from the center frequency at which the spectral envelope crosses the “-X dB amplitude.”
- l. The OBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6.4 Conducted Spurious Emissions

6.4.1 Test Setup

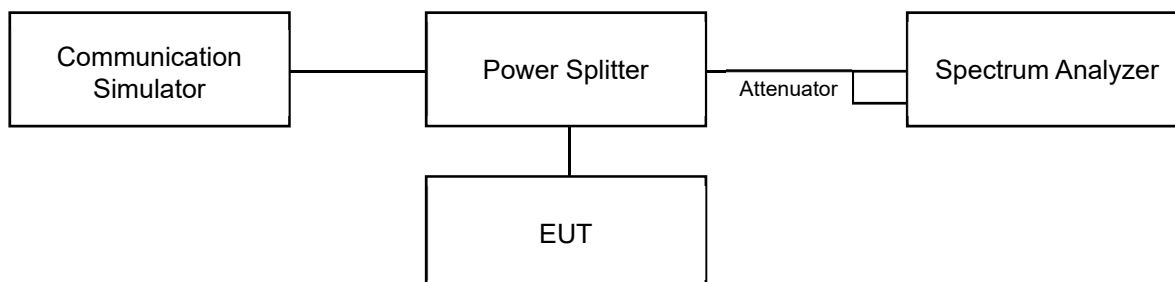


6.4.2 Test Procedure

- Measurement refer to ANSI C63.26 section 5.7.
- All measurements were done at 3 channels: low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. 20 dB attenuation pad is connected with spectrum.
- The fundamental frequency above 1 GHz, the spectrum set RBW = 1 MHz, VBW = 3 MHz, Detector = Average.
- The fundamental frequency below 1 GHz, the spectrum set RBW $\geq$ 100 kHz, VBW $\geq$ 3 x RBW, Detector = Average.
- Measuring frequency band edge, narrow RBW (no less than 1% of the OBW) is used for conducted emission measurement.
- For the emissions measurement method, certain channel BW modes demonstrate compliance by integrating with the smaller RBW allowed by the rule.
- e.g. Where Reference RBW = 1 MHz and a smaller RBW = 100 kHz is used, worst-case integrated BW power = [Max Measured Value (dBm) with RBW = 100 kHz] + $10 \cdot \log(1000/100)$. To compensate for this integration before comparison to the limit, the limit line was reduced by 10 dB accordingly.
- Record the maximum power value test plot.

6.5 Radiated Spurious Emissions below 1GHz

6.5.1 Test Setup

For radiated emission 30 MHz to 1 GHz

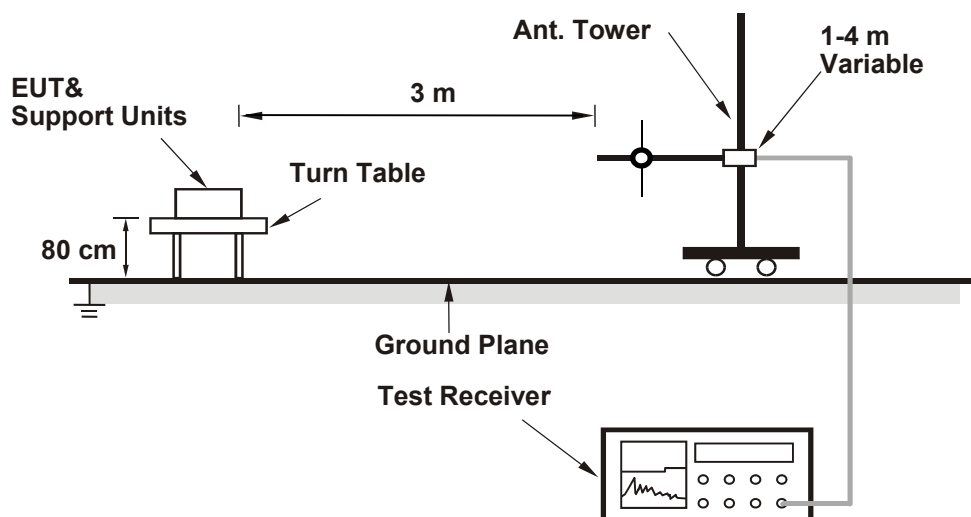

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology.

- In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- Following C63.26 section 5.5 and 5.2.7
- $EIRP\ (dBm) = E\ (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- $ERP\ (dBm) = E\ (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.


Note:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
- The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

6.6 Radiated Spurious Emissions above 1GHz

6.6.1 Test Setup

For radiated emission above 1 GHz

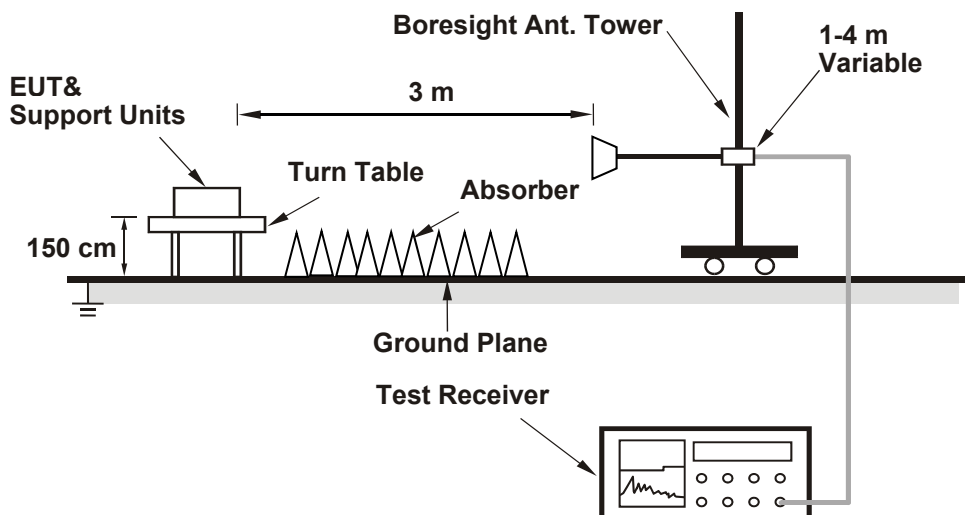

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology.


- In the semi-anechoic chamber, EUT placed on the 1.5 m height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- Following ANSI C63.26 section 5.5 and 5.2.7
- $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz. Set detector = average.

6.7 Frequency Stability

6.7.1 Test Setup

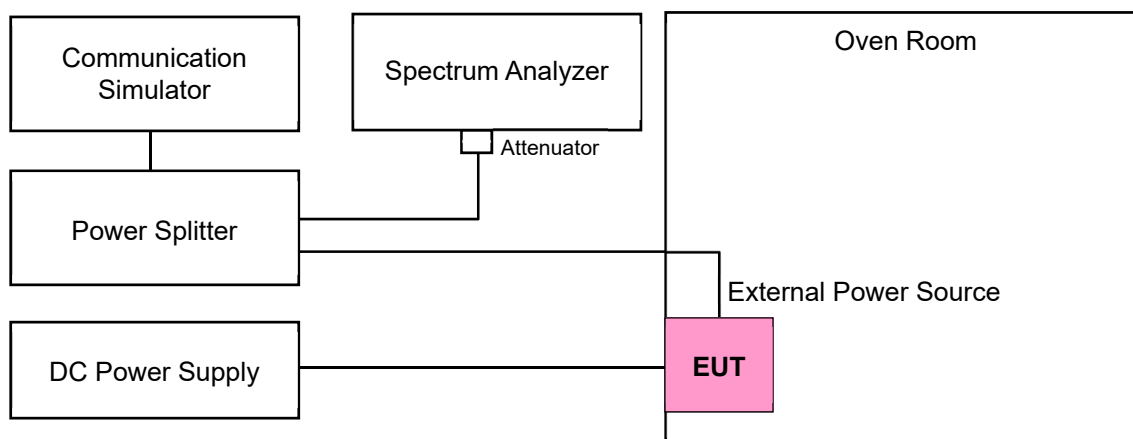

6.7.2 Test Procedure

The EUT is configured by test software or key-in commands to set data modulation and maximum power using WWAN technology.

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

Note: The frequency error was recorded frequency error from the communication simulator.

7 Test Results of Test Item

7.1 Effective Radiated Power and Equivalent Isotropically Radiated Power

Input Power:	7.2 Vdc	Environmental Conditions:	25°C, 66% RH	Tested By:	Noah Chang
--------------	---------	---------------------------	--------------	------------	------------

7.1.1 LTE Band 66B

Con- figure	Com- bination	PCC							SCC							Measurement Power
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Chan.	UL Freq. (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Chan.	UL Freq. (MHz)	Tx Power with UL-CA Active (dBm)
		Total														
Intra Band Conti- guous	CA_66B	66	10	QPSK	1	0	132022	1715	66	10	QPSK	1	49	132121	1724.9	14.57
					1	49						1	0			23.07
		66	10	QPSK	1	0	132373	1750.1	66	10	QPSK	1	49	132472	1760	14.71
					1	49						1	0			23.13
		66	10	QPSK	1	0	132523	1765.1	66	10	QPSK	1	49	132622	1775	14.61
					1	49						1	0			23.01
Intra Band Conti- guous	CA_66B	66	10	16QAM	1	0	132022	1715	66	10	16QAM	1	49	132121	1724.9	14.52
					1	49						1	0			21.97
		66	10	16QAM	1	0	132373	1750.1	66	10	16QAM	1	49	132472	1760	14.67
					1	49						1	0			22.12
		66	10	16QAM	1	0	132523	1765.1	66	10	16QAM	1	49	132622	1775	14.56
					1	49						1	0			21.97
Intra Band Conti- guous	CA_66B	66	10	64QAM	1	0	132022	1715	66	10	64QAM	1	49	132121	1724.9	14.48
					1	49						1	0			19.65
		66	10	64QAM	1	0	132373	1750.1	66	10	64QAM	1	49	132472	1760	14.65
					1	49						1	0			20.16
		66	10	64QAM	1	0	132523	1765.1	66	10	64QAM	1	49	132622	1775	14.51
					1	49						1	0			19.76
Intra Band Conti- guous	CA_66B	66	10	256QAM	1	0	132022	1715	66	10	256QAM	1	49	132121	1724.9	14.42
					1	49						1	0			17.80
		66	10	256QAM	1	0	132373	1750.1	66	10	256QAM	1	49	132472	1760	14.60
					1	49						1	0			17.95
		66	10	256QAM	1	0	132523	1765.1	66	10	256QAM	1	49	132622	1775	14.47
					1	49						1	0			17.77

Output Power					
Modulation	Minimum Cond. Power (dBm)	Maximum Cond. Power (dBm)	Minimum EIRP (dBm)	Maximum EIRP (dBm)	EIRP Limit (dBm)
QPSK	14.57	23.13	17.47	26.03	30
16QAM	14.52	22.12	17.42	25.02	30
64QAM	14.48	20.16	17.38	23.06	30
256QAM	14.42	17.95	17.32	20.85	30

Note: EIRP (dBm) = Cond. Power (dBm) + Antenna Gain (dBi) + Array Gain (if applicable)

7.1.2 LTE Band 66C

Con- figure	Com- bination	PCC							SCC							Measurement Power
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Chan.	UL Freq. (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Chan.	UL Freq. (MHz)	Tx Power with UL-CA Active (dBm)
		Total														
Intra Band Conti- guous	CA_66C	66	20	QPSK	1	0	132072	1720	66	20	QPSK	1	99	132270	1739.8	14.64
					1	99						1	0			23.03
		66	20	QPSK	1	0	132323	1745.1	66	20	QPSK	1	99	132521	1764.9	14.60
					1	99						1	0			23.06
		66	20	QPSK	1	0	132374	1750.2	66	20	QPSK	1	99	132572	1770	14.57
					1	99						1	0			23.04
Intra Band Conti- guous	CA_66C	66	20	16QAM	1	0	132072	1720	66	20	16QAM	1	99	132270	1739.8	14.59
					1	99						1	0			22.14
		66	20	16QAM	1	0	132323	1745.1	66	20	16QAM	1	99	132521	1764.9	14.58
					1	99						1	0			22.19
		66	20	16QAM	1	0	132374	1750.2	66	20	16QAM	1	99	132572	1770	14.52
					1	99						1	0			22.16
Intra Band Conti- guous	CA_66C	66	20	64QAM	1	0	132072	1720	66	20	64QAM	1	99	132270	1739.8	14.51
					1	99						1	0			19.82
		66	20	64QAM	1	0	132323	1745.1	66	20	64QAM	1	99	132521	1764.9	14.46
					1	99						1	0			20.08
		66	20	64QAM	1	0	132374	1750.2	66	20	64QAM	1	99	132572	1770	14.42
					1	99						1	0			20.00
Intra Band Conti- guous	CA_66C	66	20	256QAM	1	0	132072	1720	66	20	256QAM	1	99	132270	1739.8	14.49
					1	99						1	0			17.90
		66	20	256QAM	1	0	132323	1745.1	66	20	256QAM	1	99	132521	1764.9	14.38
					1	99						1	0			17.99
		66	20	256QAM	1	0	132374	1750.2	66	20	256QAM	1	99	132572	1770	14.33
					1	99						1	0			17.94

Output Power					
Modulation	Minimum Cond. Power (dBm)	Maximum Cond. Power (dBm)	Minimum EIRP (dBm)	Maximum EIRP (dBm)	EIRP Limit (dBm)
QPSK	14.57	23.06	17.47	25.96	30
16QAM	14.52	22.19	17.42	25.09	30
64QAM	14.42	20.08	17.32	22.98	30
256QAM	14.33	17.99	17.23	20.89	30


Note: EIRP (dBm) = Cond. Power (dBm) + Antenna Gain (dBi) + Array Gain (if applicable)

7.2 Peak to Average Ratio

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 66% RH	Tested By:	Noah Chang
--------------	----------------	---------------------------	--------------	------------	------------


7.2.1 LTE Band 66B

Modulation	Channel (Frequency)	Measurement Value(dB)	Limit (dB)	Result
QPSK	132022(1715.0MHz)+132121(1724.9MHz)	8.14	13	PASS
QPSK	132373(1750.1MHz)+132472(1760.0MHz)	7.25	13	PASS
QPSK	132523(1765.1MHz)+132622(1775.0MHz)	6.29	13	PASS
16QAM	132022(1715.0MHz)+132121(1724.9MHz)	8.91	13	PASS
16QAM	132373(1750.1MHz)+132472(1760.0MHz)	8.23	13	PASS
16QAM	132523(1765.1MHz)+132622(1775.0MHz)	7.05	13	PASS
64QAM	132022(1715.0MHz)+132121(1724.9MHz)	9.01	13	PASS
64QAM	132373(1750.1MHz)+132472(1760.0MHz)	9.27	13	PASS
64QAM	132523(1765.1MHz)+132622(1775.0MHz)	8.50	13	PASS
256QAM	132022(1715.0MHz)+132121(1724.9MHz)	9.22	13	PASS
256QAM	132373(1750.1MHz)+132472(1760.0MHz)	9.93	13	PASS
256QAM	132523(1765.1MHz)+132622(1775.0MHz)	9.20	13	PASS

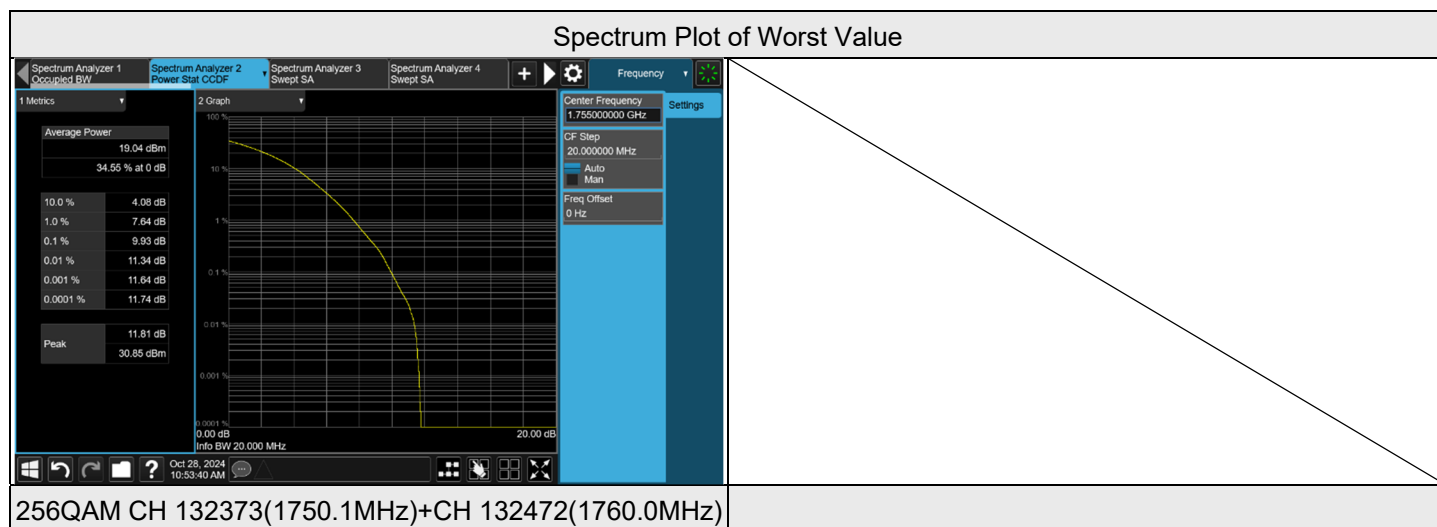

7.2.2 LTE Band 66C

Modulation	Channel (Frequency)	Measurement Value(dB)	Limit (dB)	Result
QPSK	132072(1720.0MHz)+132270(1739.8MHz)	6.69	13	PASS
QPSK	132323(1745.1MHz)+132521(1764.9MHz)	7.37	13	PASS
QPSK	132374(1750.2MHz)+132572(1770.0MHz)	7.05	13	PASS
16QAM	132072(1720.0MHz)+132270(1739.8MHz)	7.59	13	PASS
16QAM	132323(1745.1MHz)+132521(1764.9MHz)	8.26	13	PASS
16QAM	132374(1750.2MHz)+132572(1770.0MHz)	8.00	13	PASS
64QAM	132072(1720.0MHz)+132270(1739.8MHz)	8.89	13	PASS
64QAM	132323(1745.1MHz)+132521(1764.9MHz)	9.27	13	PASS
64QAM	132374(1750.2MHz)+132572(1770.0MHz)	9.02	13	PASS
256QAM	132072(1720.0MHz)+132270(1739.8MHz)	9.10	13	PASS
256QAM	132323(1745.1MHz)+132521(1764.9MHz)	9.41	13	PASS
256QAM	132374(1750.2MHz)+132572(1770.0MHz)	9.46	13	PASS

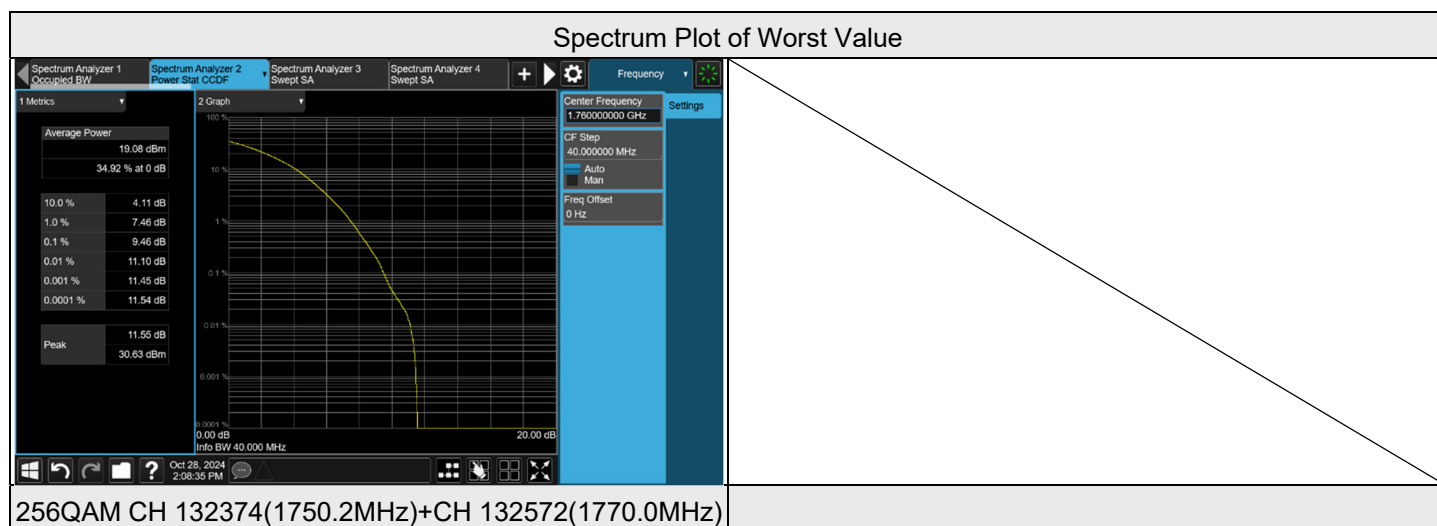


7.3 Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 66% RH	Tested By:	Noah Chang
--------------	----------------	---------------------------	--------------	------------	------------

7.3.1 LTE Band 66B


Modulation	Channel (Frequency)	Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	132022(1715.0MHz)+132121(1724.9MHz)	18.867	19.92
QPSK	132373(1750.1MHz)+132472(1760.0MHz)	18.914	19.94
QPSK	132523(1765.1MHz)+132622(1775.0MHz)	18.852	19.90
16QAM	132022(1715.0MHz)+132121(1724.9MHz)	18.873	19.93
16QAM	132373(1750.1MHz)+132472(1760.0MHz)	18.882	19.92
16QAM	132523(1765.1MHz)+132622(1775.0MHz)	18.815	19.89
64QAM	132022(1715.0MHz)+132121(1724.9MHz)	18.866	19.90
64QAM	132373(1750.1MHz)+132472(1760.0MHz)	18.893	19.92
64QAM	132523(1765.1MHz)+132622(1775.0MHz)	18.827	19.89
256QAM	132022(1715.0MHz)+132121(1724.9MHz)	18.879	19.91
256QAM	132373(1750.1MHz)+132472(1760.0MHz)	18.876	19.90
256QAM	132523(1765.1MHz)+132622(1775.0MHz)	18.819	19.88

Spectrum Plot of Worst Value

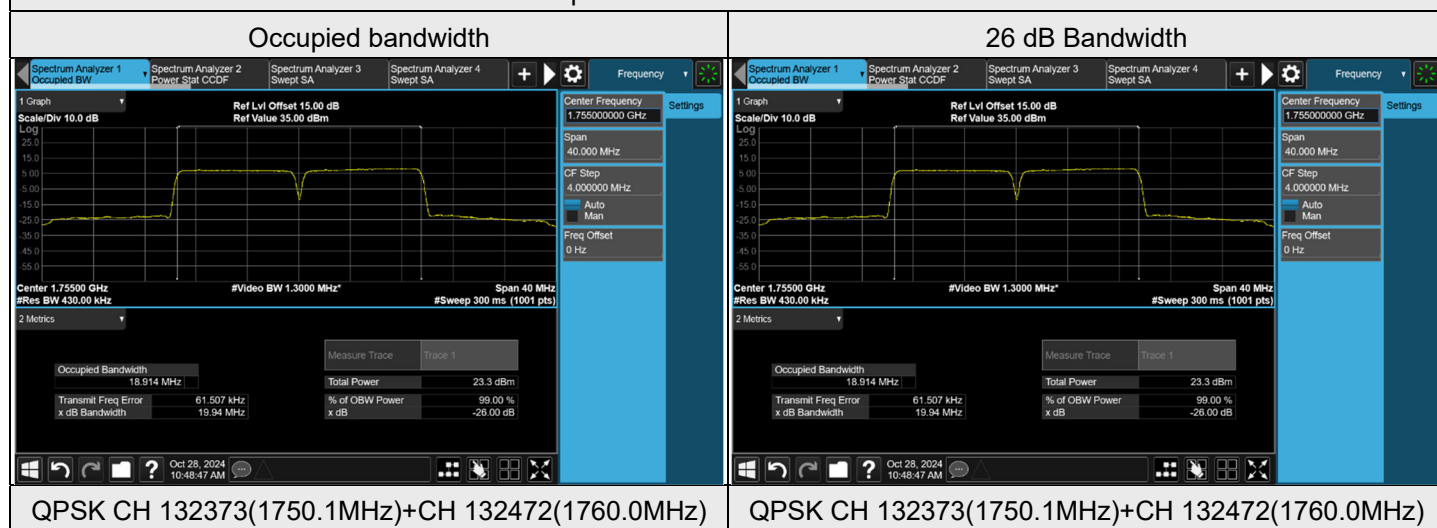

7.3.2 LTE Band 66C


Modulation	Channel (Frequency)	Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
QPSK	132072(1720.0MHz)+132270(1739.8MHz)	37.605	39.65
QPSK	132323(1745.1MHz)+132521(1764.9MHz)	37.720	39.72
QPSK	132374(1750.2MHz)+132572(1770.0MHz)	37.715	39.72
16QAM	132072(1720.0MHz)+132270(1739.8MHz)	37.596	39.63
16QAM	132323(1745.1MHz)+132521(1764.9MHz)	37.730	39.72
16QAM	132374(1750.2MHz)+132572(1770.0MHz)	37.699	39.67
64QAM	132072(1720.0MHz)+132270(1739.8MHz)	37.576	39.61
64QAM	132323(1745.1MHz)+132521(1764.9MHz)	37.710	39.72
64QAM	132374(1750.2MHz)+132572(1770.0MHz)	37.686	39.68
256QAM	132072(1720.0MHz)+132270(1739.8MHz)	37.558	39.61
256QAM	132323(1745.1MHz)+132521(1764.9MHz)	37.680	39.70
256QAM	132374(1750.2MHz)+132572(1770.0MHz)	37.676	39.67

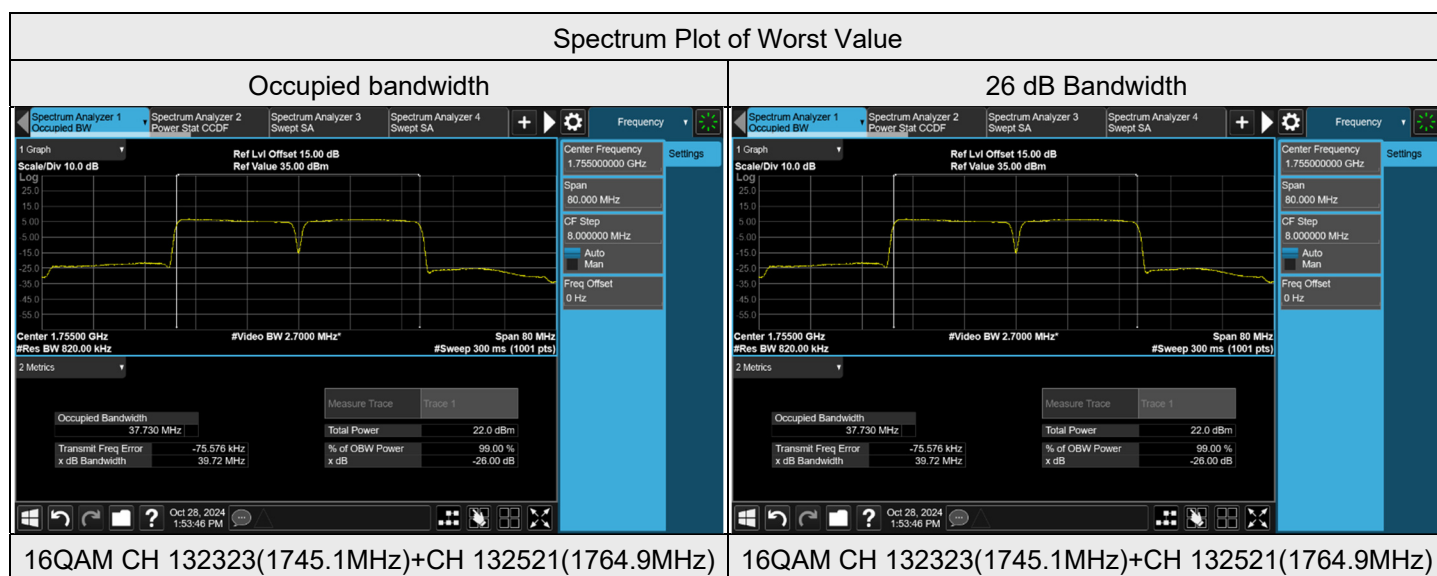


7.4 Conducted Spurious Emissions

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 66% RH	Tested By:	Noah Chang
--------------	----------------	---------------------------	--------------	------------	------------


7.4.1 LTE Band 66B

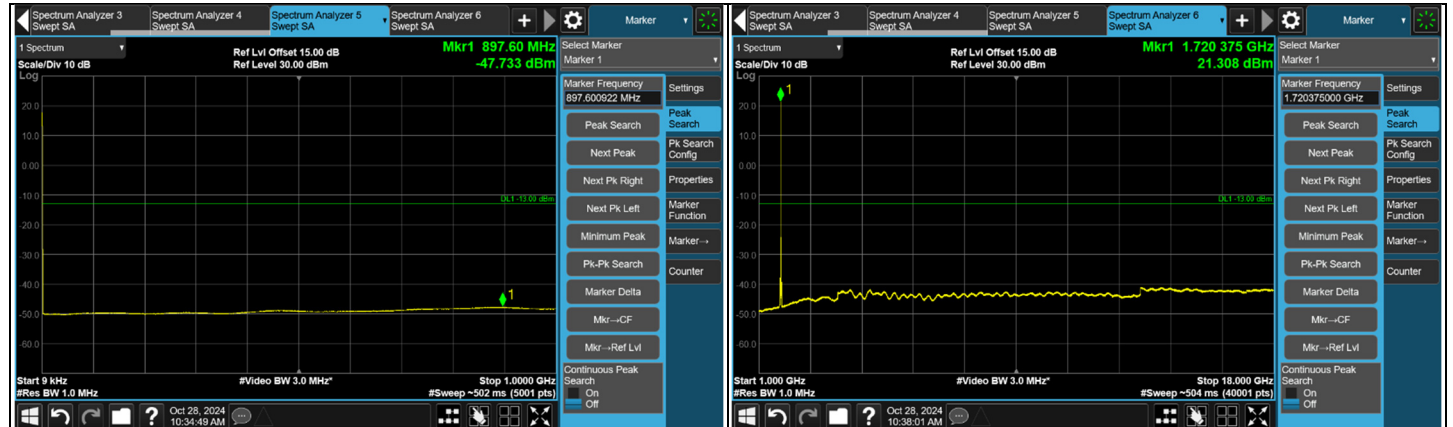

CH 132022(1715.0MHz)+CH 132121(1724.9MHz)

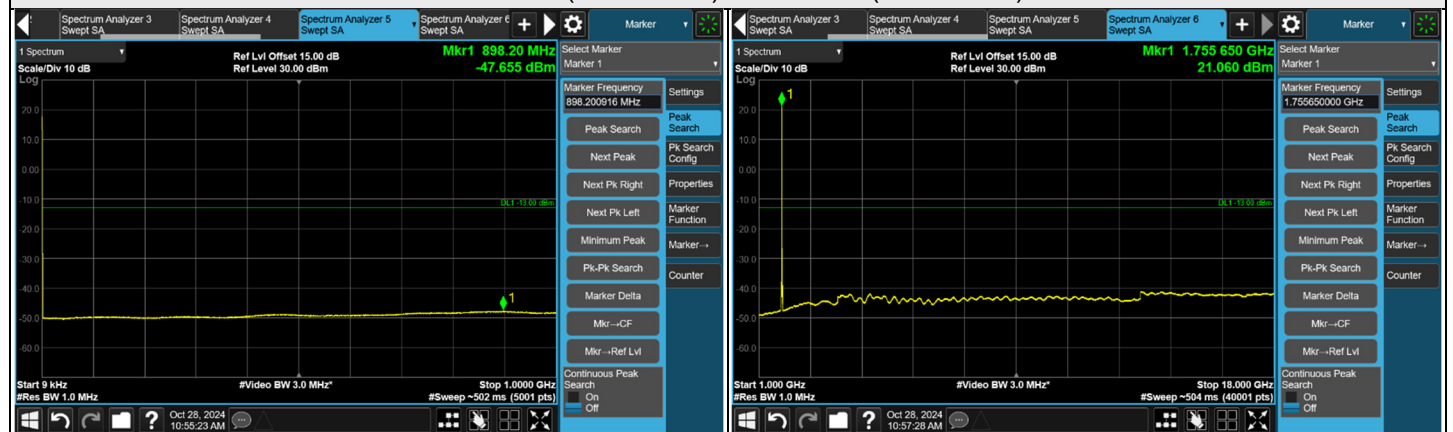

CH 132373(1750.1MHz)+CH 132472(1760.0MHz)

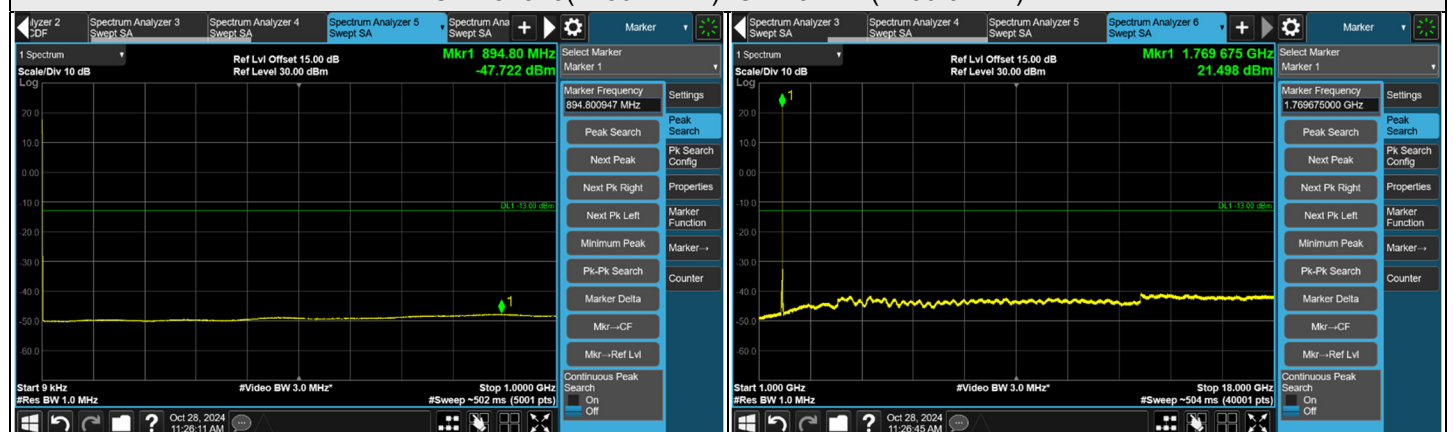

CH 132523(1765.1MHz)+CH 132622(1775.0MHz)

Note: The signal at 9 kHz is IF signal from spectrum analyzer.



FULL CH 132022(1715.0MHz)+CH 132121(1724.9MHz)

FULL CH 132523(1765.1MHz)+CH 132622(1775.0MHz)



1RB CH 132022(1715.0MHz)+CH 132121(1724.9MHz)

1RB CH 132523(1765.1MHz)+CH 132622(1775.0MHz)

7.4.2 LTE Band 66C



Note: The signal at 9 kHz is IF signal from spectrum analyzer.



FULL CH 132072(1720.0MHz)+CH 132270(1739.8MHz)



FULL CH 132374(1750.2MHz)+CH 132572(1770.0MHz)



1RB CH 132072(1720.0MHz)+CH 132270(1739.8MHz)



1RB CH 132374(1750.2MHz)+CH 132572(1770.0MHz)

7.5 Radiated Spurious Emissions below 1GHz


7.5.1 LTE Band 66B

RF Mode	LTE Band 66B Channel Bandwidth: 10MHz + 10MHz	Channel	CH 132373(1750.1MHz) + CH 132472(1760.0MHz)
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	62.01	-55.97	-13.00	-42.97	1.87 H	74	53.48	-109.45
2	174.53	-50.30	-13.00	-37.30	1.54 H	53	58.58	-108.88
3	276.38	-43.63	-13.00	-30.63	1.15 H	21	64.68	-108.31
4	309.36	-45.27	-13.00	-32.27	1.74 H	197	62.14	-107.41
5	652.74	-61.04	-13.00	-48.04	1.15 H	66	38.59	-99.63
6	733.25	-57.97	-13.00	-44.97	1.05 H	226	40.33	-98.30

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

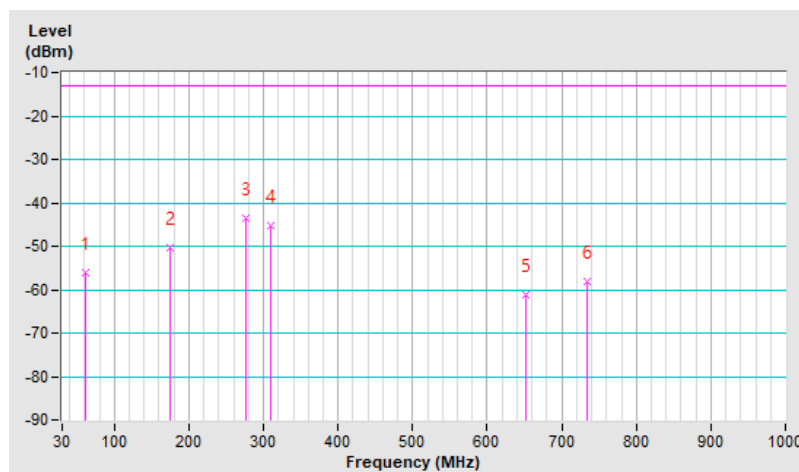


RF Mode	LTE Band 66B Channel Bandwidth: 10MHz + 10MHz	Channel	CH 132373(1750.1MHz) + CH 132472(1760.0MHz)
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	62.01	-45.77	-13.00	-32.77	1.52 V	2	63.68	-109.45
2	107.60	-48.66	-13.00	-35.66	1.15 V	0	62.92	-111.58
3	174.53	-41.26	-13.00	-28.26	1.57 V	77	67.62	-108.88
4	501.42	-58.94	-13.00	-45.94	1.12 V	21	43.91	-102.85
5	726.46	-59.12	-13.00	-46.12	1.36 V	332	39.35	-98.47
6	820.55	-56.87	-13.00	-43.87	1.95 V	315	40.39	-97.26

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

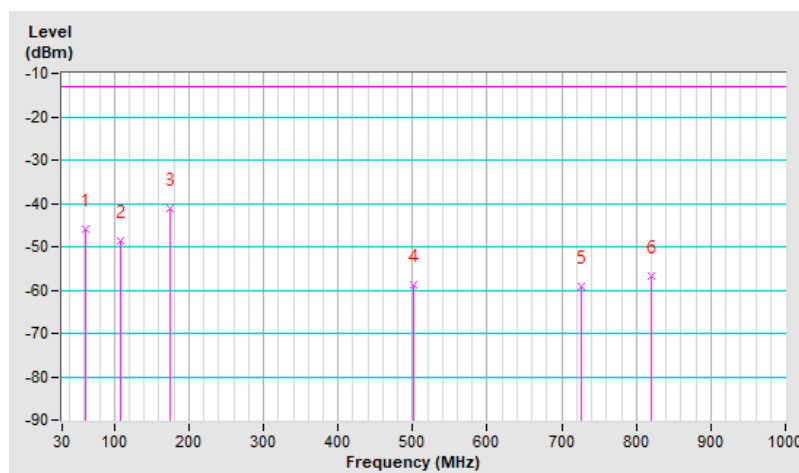


7.5.2 LTE Band 66C

RF Mode	LTE Band 66C Channel Bandwidth: 20MHz + 20MHz	Channel	CH 132323(1745.1MHz) + CH 132521(1764.9MHz)
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	163.86	-49.67	-13.00	-36.67	1.63 H	335	58.42	-108.09
2	188.11	-49.95	-13.00	-36.95	1.57 H	154	60.83	-110.78
3	275.41	-44.03	-13.00	-31.03	1.54 H	150	64.32	-108.35
4	307.42	-44.39	-13.00	-31.39	1.64 H	69	63.09	-107.48
5	515.97	-57.44	-13.00	-44.44	1.57 H	1	45.15	-102.59
6	783.69	-55.91	-13.00	-42.91	1.57 H	187	41.43	-97.34

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

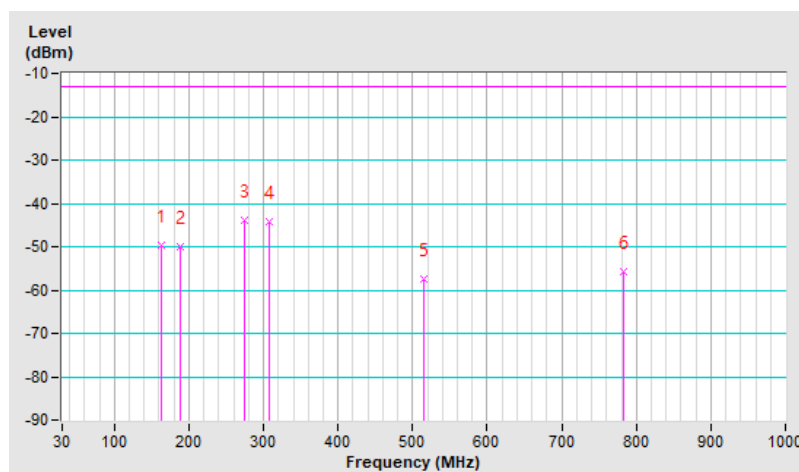


RF Mode	LTE Band 66C Channel Bandwidth: 20MHz + 20MHz	Channel	CH 132323(1745.1MHz) + CH 132521(1764.9MHz)
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 66% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	-43.86	-13.00	-30.86	1.15 V	15	65.72	-109.58
2	62.01	-45.15	-13.00	-32.15	1.57 V	107	64.30	-109.45
3	175.50	-41.55	-13.00	-28.55	1.00 V	199	67.42	-108.97
4	482.02	-56.77	-13.00	-43.77	1.27 V	120	46.27	-103.04
5	744.89	-58.06	-13.00	-45.06	1.56 V	6	39.79	-97.85
6	830.25	-56.99	-13.00	-43.99	1.18 V	8	40.21	-97.20

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

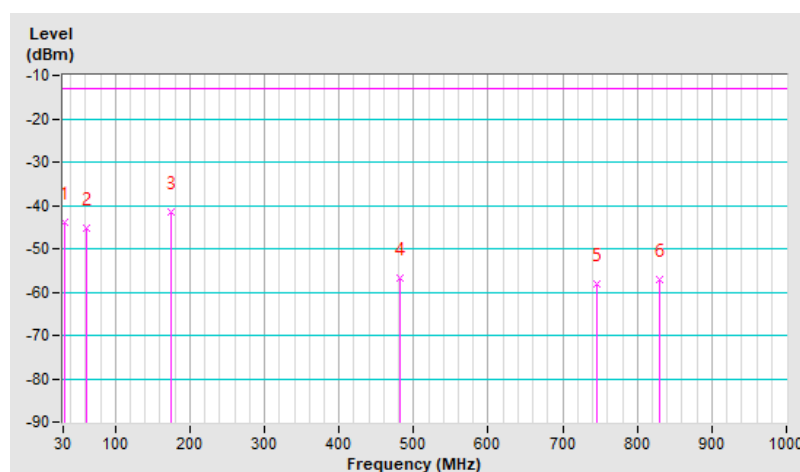

7.6 Radiated Spurious Emissions above 1GHz

7.6.1 LTE Band 66B

RF Mode	LTE Band 66B Channel Bandwidth: 10MHz + 10MHz	Channel	CH 132022(1715.0MHz)+ CH 132121(1724.9MHz)
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 65% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3430.00	-42.88	-13.00	-29.88	2.51 H	209	50.11	-92.99
2	3449.80	-42.68	-13.00	-29.68	2.51 H	209	50.32	-93.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3430.00	-42.73	-13.00	-29.73	2.87 V	358	50.26	-92.99
2	3449.80	-42.40	-13.00	-29.40	2.87 V	358	50.60	-93.00

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 66B Channel Bandwidth: 10MHz + 10MHz	Channel	CH 132373(1750.1MHz)+ CH 132472(1760.0MHz)
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 65% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3500.20	-44.50	-13.00	-31.50	2.51 H	210	48.25	-92.75
2	3520.00	-44.46	-13.00	-31.46	2.51 H	210	48.21	-92.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3500.20	-43.41	-13.00	-30.41	2.87 V	358	49.34	-92.75
2	3520.00	-43.10	-13.00	-30.10	2.87 V	358	49.57	-92.67

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 66B Channel Bandwidth: 10MHz + 10MHz	Channel	CH 132523(1765.1MHz)+ CH 132622(1775.0MHz)
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 65% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3530.20	-44.43	-13.00	-31.43	2.44 H	200	48.19	-92.62
2	3550.00	-44.54	-13.00	-31.54	2.44 H	200	48.00	-92.54
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3530.20	-43.73	-13.00	-30.73	2.64 V	357	48.89	-92.62
2	3550.00	-43.76	-13.00	-30.76	2.64 V	357	48.78	-92.54

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.6.2 LTE Band 66C

RF Mode	LTE Band 66C Channel Bandwidth: 20MHz + 20MHz	Channel	CH 132072(1720.0MHz)+ CH 132270(1739.8MHz)
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 65% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-44.53	-13.00	-31.53	2.48 H	211	48.47	-93.00
2	3479.60	-44.54	-13.00	-31.54	2.48 H	211	48.32	-92.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-43.17	-13.00	-30.17	2.10 V	358	49.83	-93.00
2	3479.60	-43.06	-13.00	-30.06	2.10 V	358	49.80	-92.86

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 66C Channel Bandwidth: 20MHz + 20MHz	Channel	CH 132323(1745.1MHz)+ CH 132521(1764.9MHz)
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 65% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.20	-42.13	-13.00	-29.13	2.49 H	212	50.67	-92.80
2	3529.80	-42.11	-13.00	-29.11	2.49 H	212	50.51	-92.62
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.20	-41.61	-13.00	-28.61	2.15 V	1	51.19	-92.80
2	3529.80	-41.30	-13.00	-28.30	2.15 V	1	51.32	-92.62

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 66C Channel Bandwidth: 20MHz + 20MHz	Channel	CH 132374(1750.2MHz)+ CH 132572(1770.0MHz)
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 65% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3500.40	-42.21	-13.00	-29.21	2.49 H	211	50.54	-92.75
2	3540.00	-42.54	-13.00	-29.54	2.49 H	211	50.05	-92.59
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3500.40	-41.60	-13.00	-28.60	2.11 V	355	51.15	-92.75
2	3540.00	-41.52	-13.00	-28.52	2.11 V	355	51.07	-92.59

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.7 Frequency Stability

Environmental Conditions:	25°C, 67% RH	Tested By:	Noah Chang
---------------------------	--------------	------------	------------

7.7.1 LTE Band 66B

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 132022(1715.0MHz)+ CH 132121(1724.9MHz)		CH 132523(1765.1MHz)+ CH 132622(1775.0MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
8.28	1715.000002	0.001	1775.000001	0.001
7.20	1714.999998	-0.001	1774.999999	-0.001
6.12	1715.000003	0.002	1775.000004	0.002

Note: The applicant defined the normal working voltage is from 6.12 to 8.28 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 132022(1715.0MHz)+ CH 132121(1724.9MHz)		CH 132523(1765.1MHz)+ CH 132622(1775.0MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1715.000002	0.001	1774.999999	-0.001
-20	1715.000005	0.003	1775.000004	0.002
-10	1715.000003	0.002	1775.000001	0.001
0	1715.000004	0.002	1775.000003	0.002
10	1714.999996	-0.002	1774.999998	-0.001
20	1714.999999	-0.001	1775.000004	0.002
30	1715.000002	0.001	1774.999997	-0.002
40	1714.999998	-0.001	1774.999996	-0.002
50	1714.999999	-0.001	1775.000002	0.001

7.7.2 LTE Band 66C

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 132072(1720.0MHz)+ CH 132270(1739.8MHz)		CH 132374(1750.2MHz)+ CH 132572(1770.0MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
8.28	1719.999997	-0.0017	1769.999999	-0.0006
7.20	1720.000002	0.0012	1770.000003	0.0017
6.12	1720.000001	0.0006	1770.000002	0.0011

Note: The applicant defined the normal working voltage is from 6.12 to 8.28 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 132072(1720.0MHz)+ CH 132270(1739.8MHz)		CH 132374(1750.2MHz)+ CH 132572(1770.0MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1720.000002	0.0012	1769.999996	-0.0023
-20	1720.000002	0.0012	1770.000004	0.0023
-10	1719.999999	-0.0006	1769.999998	-0.0011
0	1720.000003	0.0017	1770.000002	0.0011
10	1719.999998	-0.0012	1770.000004	0.0023
20	1720.000002	0.0012	1769.999998	-0.0011
30	1719.999998	-0.0012	1770.000001	0.0006
40	1719.999996	-0.0023	1769.999998	-0.0011
50	1719.999999	-0.0006	1770.000002	0.0011

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---