

Designated by Ministry of International Trade and Industry

KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER

HEAD OFFICE

6-8-7 NISHITENMA

KITA-KU OSAKA 530-0047 JAPAN



Corporate Juridical Person

IKOMA TESTING LABORATORY

12128 TAKAYAMA-CHO

IKOMA-CITY NARA 630-0101 JAPAN

TEST REPORTReport No.A-004-01-C

Date: 11 April 2001

This test report is to certify that the tested device properly complies with the requirements of:

FCC Rules and Regulations Part 18 Subpart C.

The tests necessary to show compliance to the requirements were performed and these results met the specifications of requirement. The results of this report should not be construed to imply compliance of equipment other than that, which was tested. Unless the laboratory permission, this report should not be copied in part.

1. Applicant

Company Name : SANYO Electric Co., Ltd.
Laundry & Cooking Appliances Division

Mailing Address : 1-1, Seta 1-chome, Otsu City, Shiga, 520-2198 Japan

2. Identification of Tested Device

Type of Device : INDUSTRIAL, SCIENTIFIC, AND MEDICAL EQUIPMENT
Kind of Equipment Authorization : ☐: DoC ☒: Certification ☐: Verification
FCC ID : AEZM110
Device Name : Microwave Oven
Trade Name : SANYO
Model Number : EM-F1010MW
Serial Number : Prototype No.1 ☒: Prototype ☐: Pre-production ☐: Production
Date of Manufacture : March, 2001

3. Test Items and Procedure

☐: AC Power Line Conducted Emission Measurement
☒: Radiated Emission Measurement (30MHz-1000MHz)

Above all tests were performed under: FCC/OET MP-5 (1985)

☒: without deviation, ☐: with deviation (details are found inside of this report)

4. Date of Test

Receipt of Test Sample : 2 April 2001
Test Completed on : 6 April 2001

Eizo Hariya
General Manager of Ikoma Testing Laboratory

Table of Contents

1. GENERAL INFORMATION	3
1.1 Product Description	3
1.2 Description for Equipment Authorization	3
1.3 Test Facility	4
2. TESTED SYSTEM	5
2.1 Test Mode	5
2.2 Operation of EUT System	5
2.3 Block Diagram of EUT System	6
3. MEASUREMENT OF ELECTRIC FIELD STRENGTH (30 MHz TO 1000 MHz)	7
3.1 Reference Rule and Specification	7
3.2 Test Procedure	7
3.3 Test Arrangement	8
3.4 Photographs of EUT System Configuration	9
3.5 Test Results	10
4. LIST OF TEST INSTRUMENTS	11

1. GENERAL INFORMATION

1.1 Product Description

The SANYO Model No. EM-F1010MW(referred to as the EUT in this engineering test report) is a Microwave Oven that has the function of heating and thawing.

(1) Special Feature

Magnetron Frequency : 2450 MHz $\pm$ 50 MHz

RF Power : 600 W

(2) Rated Power Supply

AC 120 V, 60 Hz

1.2 Description for Equipment Authorization

(1) Category	: ☐ Class A ☐ Class B ☒ Not Applicable
(2) Reference Rule and Specification	: FCC Rule Part 18 ☒ Section 18.305 (a), (b)
(3) Type of device	: ☐ Personal Computer & Peripherals ☐ Other Digital Device ☒ ISM Device
(4) Kind of Equipment Authorization	: ☐ DoC ☒ Certification ☐ Verification
(5) Procedure of Application	: ☒ Original Equipment ☐ Modification
(6) Highest Frequency used in the Device	: 2.45 GHz
(7) Upper Frequency of Radiated Emission Measurement Range	: ☐ 1000 MHz ☐ 2000 MHz ☐ 5000 MHz ☒ The Tenth Harmonic

1.3 Test Facility

All tests described in this report were performed by:

Name: KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER (KEC)
IKOMA TESTING LABORATORY

Open Area Test Site ☐ No.1 ☐ No.2 ☐ No.3 ☒ No.4
EMC M.C. Anechoic Chamber ☐ No.1
Shielded Room ☐ No.2 ☐ No.4 ☐ EMC M.C. Shielded Room

Address: 12128, Takayama-cho Ikoma-city, Nara, 630-0101 Japan

These test facilities have been filed with the FCC under the criteria of ANSI C63.4-1992. The Open Area Test Site No.4, EMC M.C. Anechoic Chamber No.1, Shielded Room No.4 and EMC M.C. Shielded Room have been accredited by the NVLAP (Lab. Code: 200207-0) based on ISO/IEC Guide 25.

Also the laboratory has been authorized by ITI (Interference Technology International, (UK), TUV Product Service (GER) and TUV Rheinland (GER) based on their criteria for testing laboratory (EN45001).

2. TESTED SYSTEM

2.1 Test Mode


The compliance tests were performed under following operation mode.

Maximum Output Power Operation

2.2 Operation of EUT System

- (1) Open the door of EUT.
- (2) Set the load in EUT as follows.
 - Receptacle
 - 1000 cc volume Beaker
 - Load for the test
 - 700 cc water with beaker
- (3) Close the door of EUT.
- (4) Set the output power to maximum.
- (5) Set the cooking time.
- (6) Push the start pad.
 - Then start the cooking.

2.3 Block Diagram of EUT System

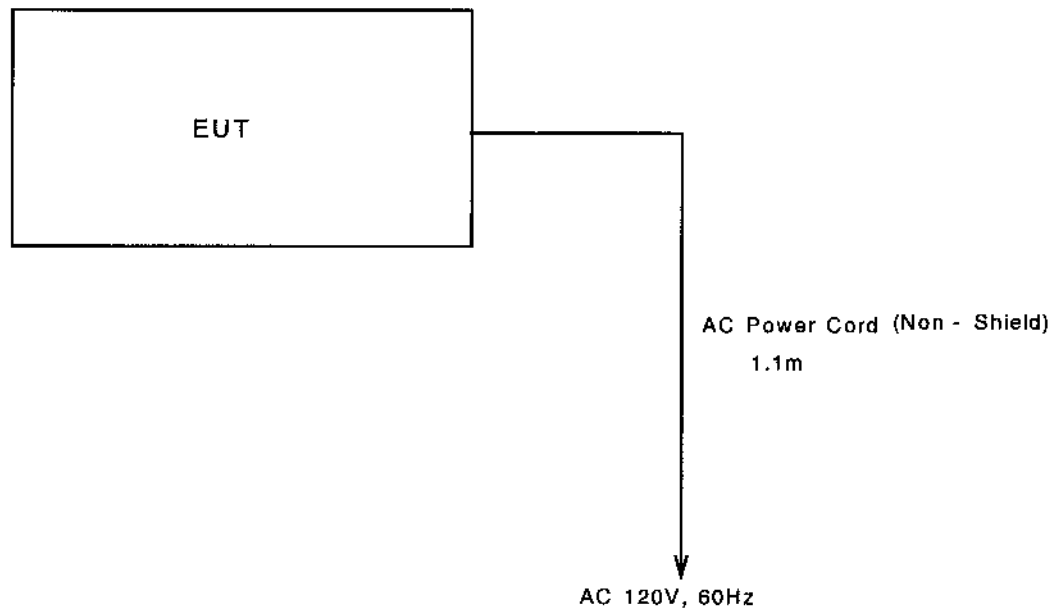

3. MEASUREMENT OF ELECTRIC FIELD STRENGTH (30 MHz TO 1000 MHz)

3.1 Reference Rule and Specification

FCC Rule Part 18 Subpart C
FCC/OET MP-5(1985)

3.2 Test Procedure

- (1) Configure the EUT.

[See 3.3 Test Arrangement and 3.4 Photographs of EUT System Configuration]

[Note]

The power cords for the EUT are connected through the receptacle with the turn floor to the CVCF placed under the ground plane.

- (2) Operate the EUT.

- (3) To determine the emissions of the EUT, preliminary radiated measurement was performed at a closer distance than that specified for final radiated measurement using the broad band antenna and the spectrum analyzer.

- (4) To search the frequency of maximum emission level on the spectrum analyzer, change the EUT System configuration, move the signal cables and the power cords, change the EUT conditions.

- (5) The spectrum was scanned from 30 MHz to 1000 MHz and collect the emissions on the spectrum analyzer.

- (6) The collected emissions for final test were measured at the specified distance using the tuned dipole antenna or broad band antenna and the test receiver *1).

[Note]


*1) Test Receiver Operation Mode

Detector Function : Average

IF Band Width : 120 kHz(frequency range in 30 MHz - 1000 MHz)

3.3 Test Arrangement

[Open Site]

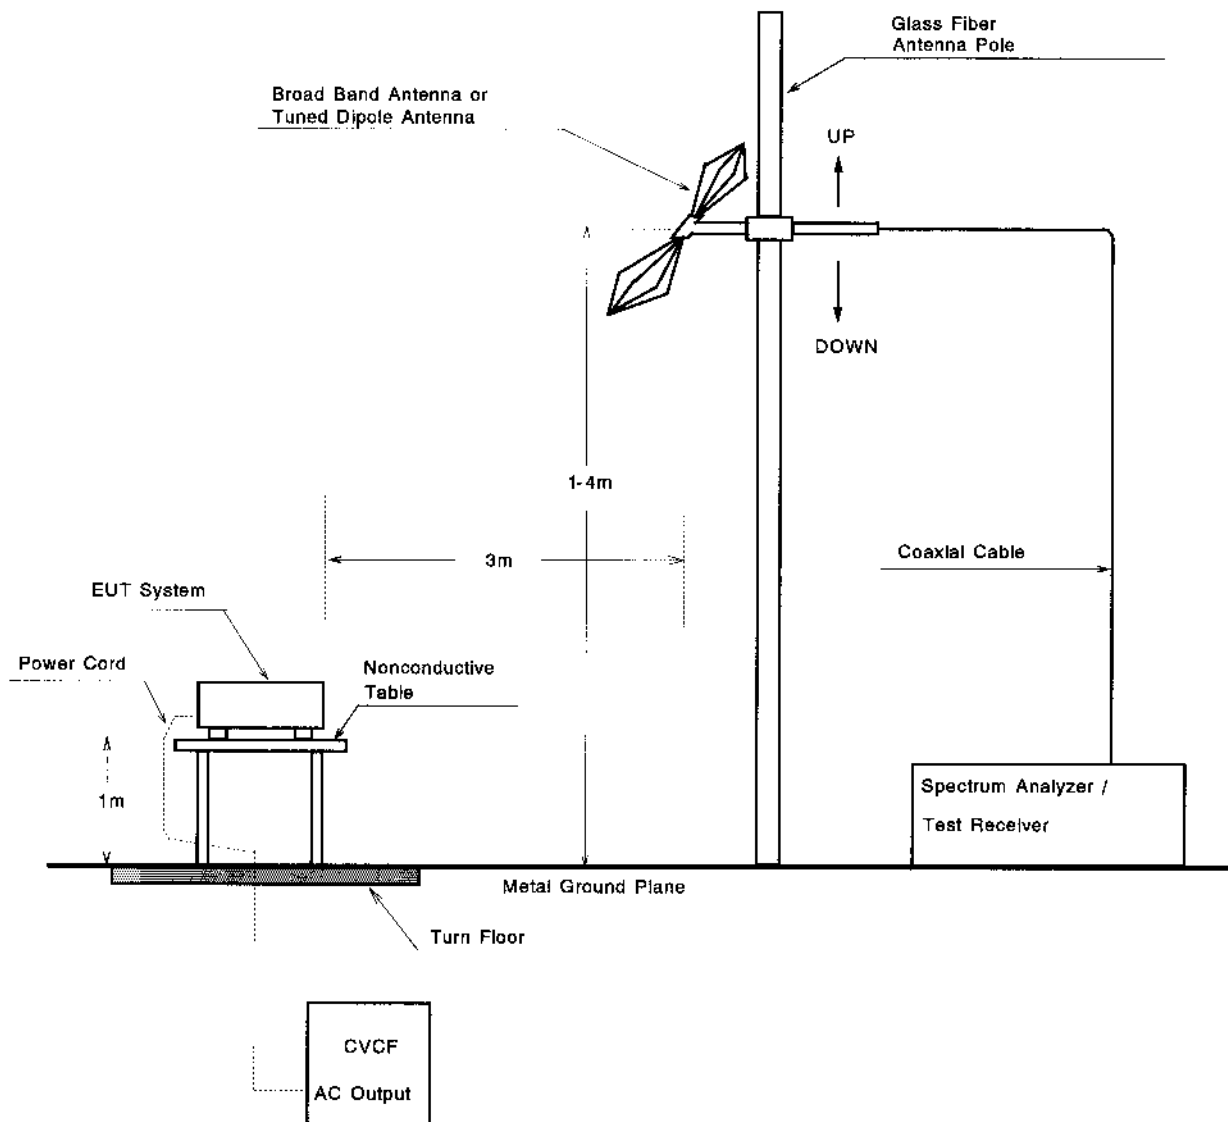

3.5 Test Results

Measurement Distance ☒: 3m ☐: 10m

Measured Frequency [MHz]	Antenna Factor [dB/m]	Conversion Factor [dB]	Meter Reading		Max. Field Strength dB μ V/m	Limits [dB μ V/m]	Limits For Margin [dB]
			Horiz. dB μ V	Vert. dB μ V			
31.20	19.2	-40.0	<-5.0	<-5.0	<-25.8	28.7	>54.5
48.35	12.8	-40.0	<-5.0	<-5.0	<-32.2	28.7	>60.9
70.00	7.7	-40.0	<-5.0	<-3.0	<-35.3	28.7	>64.0
150.00	16.8	-40.0	<-7.0	<-7.0	<-30.2	28.7	>58.9
310.20	17.6	-40.0	<-8.0	<-8.0	<-30.4	28.7	>59.1
721.20	25.4	-40.0	<-5.0	<-5.0	<-19.6	28.7	>48.3

[Note]

- (1) Antenna Factor includes the cable loss.
 (2) * mark in Measured Frequency : Measured with the tuned dipole antenna.
 No mark in Measured Frequency : Measured with the broadband antenna.
 (3) Conversion Factor : distance correction factor from 3 m to 300 m.
 (4) Limits at 300 m : $20 \log \left(25 \sqrt{\frac{P(W)}{500}} \right)$

$$= 20 \log \left(25 \sqrt{\frac{600}{500}} \right) = 28.7 \text{ (dBuV/m)}$$

[Calculation method]

Maximum Field Strength (dBuV/m)


= Meter Reading (at maximum level of Horizontal or Vertical) (dBuV) + Antenna Factor (dB/m)
 +Conversion Factor(dB)

[Environment]

Temperature : 23°C Humidity : 35 %

Tested Date : 6 April 2001

Tester Signature

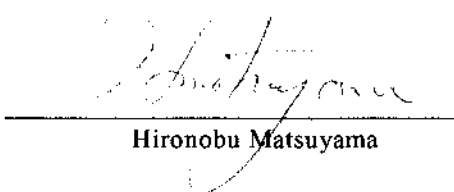
 Hironobu Matsuyama

4. LIST OF TEST INSTRUMENTS

Instrument	Manufacturer	Model No	Specifications	KEC Control No.	if used, checked by "X".	Last Cal.	Next Cal.
Test Receiver	Rohde & Schwarz	ESVD	Frequency Range 20 MHz -1000 MHz	FS-79	☐	2000/11	2001/11
		ESVS10	Frequency Range 20 MHz -1000 MHz	FS-82	☒	2001/2	2002/2
Spectrum Analyzer	Advantest	R3261C	Frequency Range 9 kHz – 2.6 GHz	SA-41	☒	2000/9	2001/9
Biconical Antenna	Schwarzbeck	BBA9106	Frequency Range 30 MHz – 300 MHz	AN-94	☒	2001/2	2002/2
Log-Periodic Antenna	Schwarzbeck	UHALP 9108A	Frequency Range 300 MHz – 1 GHz	AN-217	☒	2001/2	2002/2
Tuned Dipole Antenna	Kyoritsu	KBA-511AS	Frequency Range 25MHz-500MHz	AN-135	☐	2001/3	2002/3
		KBA-611S	Frequency Range 500MHz-1GHz	AN-137	☐	2001/3	2002/3

3.4 Photographs of EUT System Configuration

front view



rear view

