

Exhibit L: Band Edge Compliance

FCC ID: HN2MPCI3A-20

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Low

Mid

High

Operating Modes Investigated:

Typical

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

DC from E-net

Software\Firmware Applied During Test

Exercise software	AP Monitor	Version	V5.97
-------------------	------------	---------	-------

Description

A notebook PC controls the radio through a serial port connection on the WA22 access point. Hyper Terminal running in Windows 98 address the AP monitor commands for setting the transmit channel and data rate.

Equipment Modifications

No EMI suppression devices were added or modified. The EUT was tested as delivered.

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT – 802.11(b) radio module installed in WA22 Access Point	Intermec	MPCI3A-20	022-026
Power bridge	Intermec	071579	U01156281006901
Laptop PC	Panasonic	CF-35	7KHSA02247

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Serial cable	Yes	1.5	No	Access Point	Laptop
Ethernet cable	No	7.5	No	Power Bridge	Access Point
AC power	No	1.9	No	Power Bridge	AC mains

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	03/08/2001	24 mo


Test Description


Requirement: Per 47 CFR 15.247(c), in any 100 kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100 kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

Configuration: The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to low and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation. The channels closest to the band edges were selected. The spectrum was scanned across each band edge from 25 MHz below the band edge to 25 MHz above the band edge.

Completed by:



NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT: MPC13A-20			Work Order: INMC0023		
Serial Number: 002-026			Date: 07/23/02		
Customer: Intermec Corporation			Temperature: 26 degrees C		
Attendees: None		Tested by: Greg Kiemel		Humidity: 43% RH	
Customer Ref. No.: N/A		Power: DC from E-net		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(c)		Year: Most Current		Method: FCC 97-114, ANSI C63.4	
				Year: 1992	
SAMPLE CALCULATIONS					
COMMENTS					
Tested in WA22 Access Point					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate, maximum output power					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum level of any spurious emission at the edge of the authorized band is 20 dB down from the fundamental					
RESULTS					
			AMPLITUDE		
Pass			-41.2 dB		
SIGNATURE					
<div style="text-align: center;">  Tested By: _____ </div>					
DESCRIPTION OF TEST					
Band Edge Compliance - Low Channel					

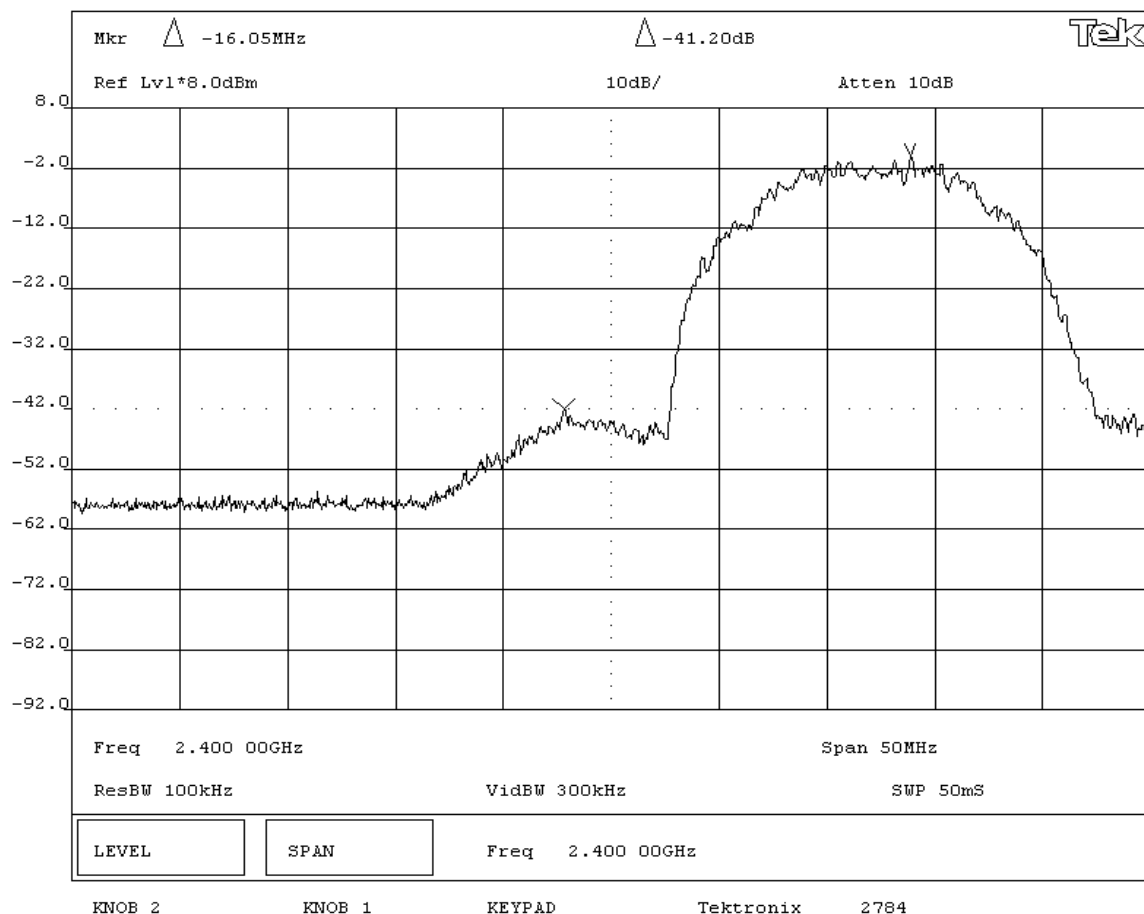

NORTHWEST
EMC**EMISSIONS DATA SHEET**Rev BETA
01/30/01

EUT: MPC13A-20			Work Order: INMC0023	
Serial Number: 002-026			Date: 07/23/02	
Customer: Intermec Corporation			Temperature: 26 degrees C	
Attendees: None		Tested by: Greg Kiemel	Humidity: 43% RH	
Customer Ref. No.: N/A		Power: DC from E-net	Job Site: EV06	

TEST SPECIFICATIONS

Specification: 47 CFR 15.247(c)	Year: Most Current	Method: FCC 97-114, ANSI C63.4	Year: 1992
---------------------------------	--------------------	--------------------------------	------------

SAMPLE CALCULATIONS**COMMENTS**

Tested in WA22 Access Point

EUT OPERATING MODES

Modulated by PRBS at maximum data rate, maximum output power

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

Maximum level of any spurious emission at the edge of the authorized band is 20 dB down from the fundamental

RESULTS**AMPLITUDE**

Pass -55.2 dB

SIGNATURETested By: **DESCRIPTION OF TEST****Band Edge Compliance - High Channel**