

FCC Test Report

(PART 27)

Report No.: RF141226D01-4

FCC ID: P279962MCI

Test Model: 9962 Multi-Standard Enterprise Cell

Series Model: 9962 Multi-Standard Enterprise Cellxxxxx
(where "x" is blank, number or any characters)

Received Date: Dec. 26, 2014

Test Date: Jan. 7 ~ 26, 2015

Issued Date: Feb. 5, 2015

Applicant: Sercomm Corp.

Address: 8F, No. 3-1, YuangQu St., NanKang, Taipei 115, Taiwan, R.O.C. (NanKang Software Park)

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agency

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Test Site And Instruments	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Configuration of System Under Test	9
3.2.1 Description Of Support Units	9
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	12
3.5 General Description of Applied Standards	12
4 Test Types and Results	13
4.1 Output Power Measurement	13
4.1.1 Limits of Output Power Measurement	13
4.1.2 Test Procedures	13
4.1.3 Test Setup	14
4.1.4 Test Results	15
4.2 Frequency Stability Measurement	20
4.2.1 Limits of Frequency Stability Measurement	20
4.2.2 Test Procedure	20
4.2.3 Test Setup	21
4.2.4 Test Results	22
4.3 Emission Bandwidth Measurement	24
4.3.1 Limits Of Emission Bandwidth Measurement	24
4.3.2 Test Procedure	24
4.3.3 Test Setup	24
4.3.4 Test Result	25
4.4 Peak To Average Ratio	33
4.5.1 Limits of Peak To Average Ratio Measurement	33
4.5.2 Test Setup	33
4.5.3 Test Procedures	33
4.5.4 Test Results	34
4.5 Channel Edge Measurement	42
4.5.1 Limits of Band Edge Measurement	42
4.5.2 Test Setup	42
4.5.3 Test Procedures	42
4.5.4 Test Results	43
4.6 Conducted Spurious Emissions	51
4.6.1 Limits of Conducted Spurious Emissions Measurement	51
4.6.2 Test Setup	51
4.6.3 Test Procedure	51
4.6.4 Test Results	52
4.7 Radiated Emission Measurement	124
4.7.1 Limits of Radiated Emission Measurement	124
4.7.2 Test Procedure	124
4.7.3 Deviation from Test Standard	124
4.7.4 Test Setup	125
4.7.5 Test Results	126
5 Pictures of Test Arrangements	134
Appendix – Information on the Testing Laboratories	135



A D T

Release Control Record

Issue No.	Description	Date Issued
RF141226D01-4	Original release.	Feb. 5, 2015

1 Certificate of Conformity

Product: 9962 Multi-Standard AP; Metro Cell Indoor

Brand: Alcatel-Lucent

Test Model: 9962 Multi-Standard Enterprise Cell

Series Model: 9962 Multi-Standard Enterprise Cellxxxxx
(where "x" is blank, number or any characters)

Sample Status: Engineering sample

Applicant: Sercomm Corp.

Test Date: Jan. 7 ~ 26, 2015

Standards: FCC Part 27

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Annie Chang , **Date:** Feb. 5, 2015
Annie Chang / Supervisor

Approved by : Rex Lai , **Date:** Feb. 5, 2015
Rex Lai / Assistant Manage

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(h)(2)	Equivalent Isotropically radiated power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability Stay with the authorized bands of operation	PASS	Meet the requirement of limit.
27.50(d)(5)	Peak to average ratio	PASS	Meet the requirement of limit.
2.1049 27.53(m)(6)	Emission Bandwidth	PASS	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(m)(4)(6)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -4.74dB at 30.07MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Expended Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	4.00 dB
Radiated Emissions above 1 GHz	3.36 dB

2.2 Test Site And Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 26, 2014	Feb. 25, 2015
HP Preamplifier	8449B	3008A01201	Feb. 26, 2014	Feb. 25, 2015
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Mar. 01, 2014	Feb. 28, 2015
Agilent Spectrum	E4446A	MY51100050	Oct. 24, 2014	Oct. 23, 2015
Agilent TEST RECEIVER	N9038A	MY51210129	Jan. 20, 2015	Jan. 19, 2016
Schwarzbeck Antenna	VULB 9168	139	Feb. 24, 2014	Feb. 23, 2015
Schwarzbeck Antenna	VHBA 9123	480	May 29, 2013	May 28, 2015
Schwarzbeck Horn Antenna	BBHA-9170	212	Aug. 26, 2014	Aug. 25, 2015
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	Aug. 26, 2014	Aug. 25, 2015
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	ADT_Radiated_V7.6.15.9.4	NA	NA	NA
SUHNER RF cable	SF104	CABLE-CH6	Aug. 15, 2014	Aug. 14, 2015
SUHNER RF cable	SF102	Cable-CH8-3.6m	Aug. 15, 2014	Aug. 14, 2015
EMCO Horn Antenna	3115	00028257	Aug. 28, 2014	Aug. 27, 2015
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 29, 2014	Sep. 28, 2015
Anritsu Power Sensor	MA2411B	0738404	Apr. 21, 2014	Apr. 20, 2015
Anritsu Power Meter	ML2495A	0842014	Apr. 21, 2014	Apr. 20, 2015
Temperature & Humidity Chamber	MHU-225AU	920409	May 23, 2014	May 22, 2015

- NOTE:** 1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.
4. The Industry Canada Reference No. IC 7450E-6.
5. The FCC Site Registration No. is 447212.

3 General Information

3.1 General Description of EUT

Product	9962 Multi-Standard AP; Metro Cell Indoor	
Brand	Alcatel-Lucent	
Test Model	9962 Multi-Standard Enterprise Cell	
Series Model	9962 Multi-Standard Enterprise Cellxxxxx (where "x" is blank, number or any characters)	
Model Difference	Marketing purpose	
Status of EUT	Engineering sample	
Power Supply Rating	48Vdc from Adapter or 55Vdc from PoE	
Modulation Type	LTE	
Modulation Technology	QPSK, 16QAM,64QAM	
Operating Frequency	LTE Band 4 (Channel Bandwidth 5MHz)	2112.5~2152.5MHz
	LTE Band 4 (Channel Bandwidth 10MHz)	2115.0~2150.0MHz
	LTE Band 12 (Channel Bandwidth 5MHz)	731.5~742.5MHz
	LTE Band 12 (Channel Bandwidth 10MHz)	734.0~740.0MHz
Max. EIRP Power	LTE Band 4 (Channel Bandwidth 5MHz)	426.58mW
	LTE Band 4 (Channel Bandwidth 10MHz)	575.44mW
Max. ERP Power	LTE Band 12 (Channel Bandwidth 5MHz)	311.89mW
	LTE Band 12 (Channel Bandwidth 10MHz)	422.67mW
Max. EIRP Power	LTE Band 4 (Channel Bandwidth 5MHz)	QPSK: 4M43G7D, 16QAM: 4M43W7D, 64QAM: 4M43W7D
	LTE Band 4 (Channel Bandwidth 10MHz)	QPSK: 8M93G7D, 16QAM: 8M93W7D, 64QAM: 8M93W7D
	LTE Band 12 (Channel Bandwidth 5MHz)	QPSK: 4M43G7D, 16QAM: 4M42W7D, 64QAM: 4M43W7D
	LTE Band 12 (Channel Bandwidth 10MHz)	QPSK: 8M90G7D, 16QAM: 8M93W7D, 64QAM: 8M93W7D
Antenna Type	LTE Band 4	Dipole Antenna with 2.34dBi gain
	LTE Band 12	Dipole Antenna with 3.64dBi gain
Antenna Connector	SMA Connector	
Accessory Device	Adapter, PoE	
Data Cable Supplied	GPS cable (8m)	

Note:

1. The EUT uses following adapter or PoE:

Adaprer:

Brand	AmpowerTek
Model	AU60AA-00
Input Power	100-240V, 50-60Hz, 1.5A
Output Power	48V, 1.25A
Power Line	Non-shielded AC 3-Pin cable (1.5m) Non-shielded DC cable (1.2m) with one ferrite core


PoE:

Brand	Microsemi
Model	PD-9601G/AC
Input Power	100-240V, 50-60Hz, 1.35A
Output Power	55V, 1.75A

After pre-tested, adapter mode was the worst case, therefore, only its test data was recorded in the report.

2. SW version is V1.4.0.1.
3. HW version is D01_W.
4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Configuration of System Under Test

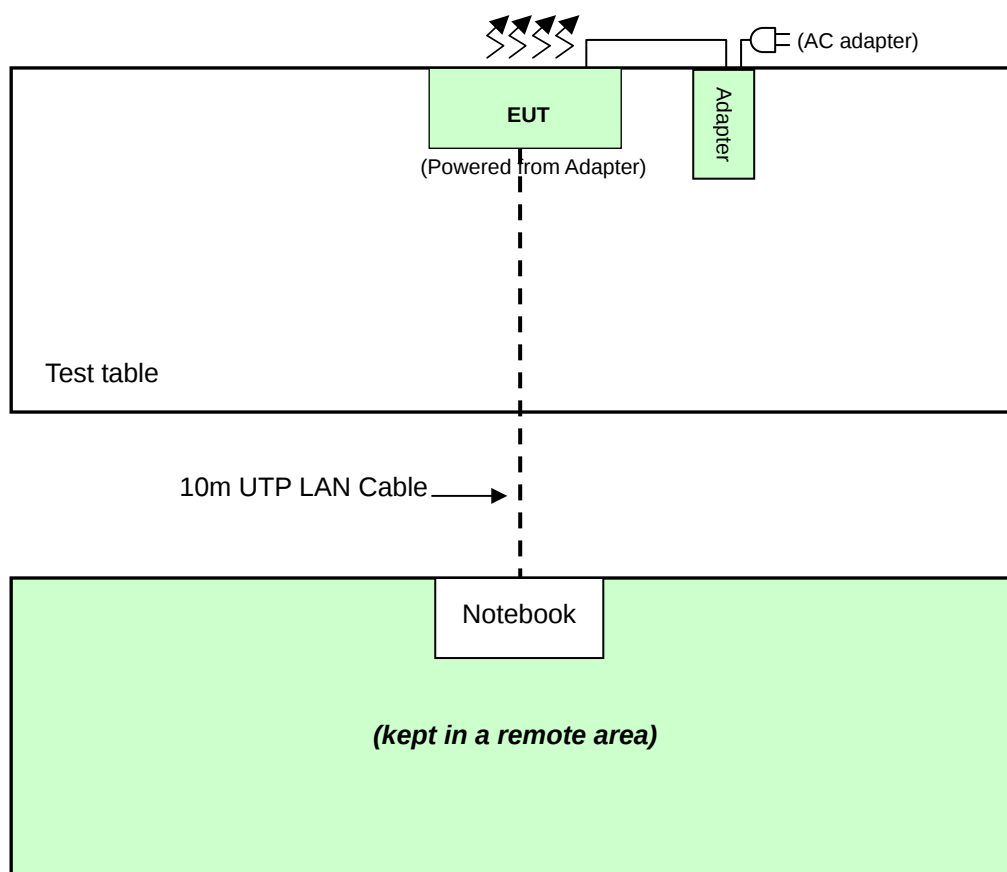

3.2.1 Description Of Support Units

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP04X	1W9ZZ1S	FCC DoC Approved

No.	Signal Cable Description Of The Above Support Units
1	10m UTP LAN cable

NOTE: All power cords of the above support units are non shielded (1.8m).

3.3 Test Mode Applicability and Tested Channel Detail

Following channel(s) was (were) selected for the final test as listed below:

Test Item	LTE Band	Available Frequency	Tested Frequency	Channel Bandwidth	Modulation
Output Power	Band 4	2112.5 to 2152.5	2115.5, 2132.5, 2152.5	5MHz	QPSK, 16QAM, 64QAM
		2115.0 to 2150.0	2115.0, 2132.5, 2150.0	10MHz	
	Band 12	731.5 to 742.5	731.5, 737.0, 742.5	5MHz	
		734.0 to 740.0	734.0, 737.0, 740.0	10MHz	
Frequency Stability	Band 4	2112.5 to 2152.5	2115.5	5MHz	-
Emission Bandwidth	Band 4	2112.5 to 2152.5	2115.5, 2132.5, 2152.5	5MHz	QPSK, 16QAM, 64QAM
		2115.0 to 2150.0	2115.0, 2132.5, 2150.0	10MHz	
	Band 12	731.5 to 742.5	731.5, 737.0, 742.5	5MHz	
		734.0 to 740.0	734.0, 737.0, 740.0	10MHz	
Peak To Average Ratio	Band 4	2112.5 to 2152.5	2115.5, 2132.5, 2152.5	5MHz	QPSK, 16QAM, 64QAM
		2115.0 to 2150.0	2115.0, 2132.5, 2150.0	10MHz	
	Band 12	731.5 to 742.5	731.5, 737.0, 742.5	5MHz	
		734.0 to 740.0	734.0, 737.0, 740.0	10MHz	
Band Edge	Band 4	2112.5 to 2152.5	2115.5, 2152.5	5MHz	QPSK, 16QAM, 64QAM
		2115.0 to 2150.0	2115.0, 2150.0	10MHz	
	Band 12	731.5 to 742.5	731.5, 742.5	5MHz	
		734.0 to 740.0	734.0, 740.0	10MHz	
Conducted Emission	Band 4	2112.5 to 2152.5	2115.5, 2132.5, 2152.5	5MHz	QPSK, 16QAM, 64QAM
		2115.0 to 2150.0	2115.0, 2132.5, 2150.0	10MHz	
	Band 12	731.5 to 742.5	731.5, 737.0, 742.5	5MHz	
		734.0 to 740.0	734.0, 737.0, 740.0	10MHz	
Radiated Emission Below 1GHz	Band 4	2115.0 to 2150.0	2150.0	10MHz	16QAM,
	Band 12	734.0 to 740.0	740.0	10MHz	
Radiated Emission Above 1GHz	Band 4	2115.0 to 2150.0	2115.0, 2132.5, 2150.0	10MHz	16QAM,
	Band 12	734.0 to 740.0	734.0, 737.0, 740.0	10MHz	

NOTE:

1. For radiated emission below 1 GHz, the low, mid and high channels were pre-tested in chamber. The low channel was the worst case and chosen for final test.
2. The conducted output power for QPSK and 16QAM, measured value of 16QAM is higher than QPSK mode. Therefore, FREQUENCY STABILITY and RADIATED EMISSION were performed under 16QAM mode only.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
Output Power	18deg. C, 71%RH	120Vac, 60Hz	Aaron You
Frequency Stability	18deg. C, 71%RH	120Vac, 60Hz	Aaron You
Emission Bandwidth	18deg. C, 71%RH	120Vac, 60Hz	Aaron You
Peak To Average Ratio	18deg. C, 71%RH	120Vac, 60Hz	Aaron You
Band Edge	18deg. C, 71%RH	120Vac, 60Hz	Aaron You
Conducted Emission	18deg. C, 71%RH	120Vac, 60Hz	Aaron You
Conducuted Emission	18deg. C, 71%RH	120Vac, 60Hz	Aaron You
Radiated Emission	18deg. C, 71%RH	120Vac, 60Hz	Aaron You

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5MHz for WCDMA mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15\text{dBi}$.

Conducted Power Measurement:

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.1.3 Test Setup

EIRP / ERP MEASUREMENT:

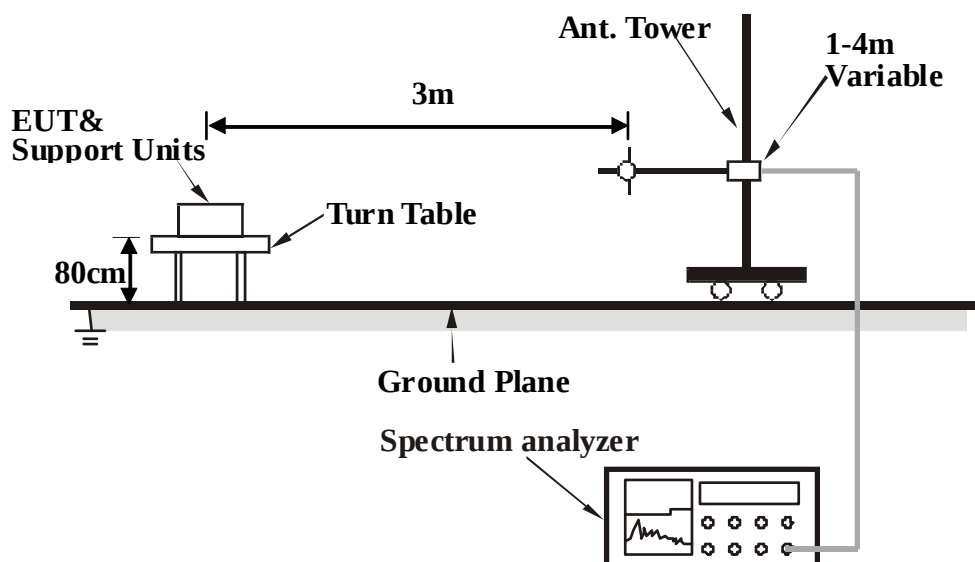

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

CONDUCTED OUTPUT POWER (dBm)

LTE Band 4 (Channel Bandwidth 5MHz):

Frequency (MHz)	CONDUCTED OUTPUT POWER (dBm)								
	QPSK			16QAM			64QAM		
	Chain 0	Chain 1	Total	Chain 0	Chain 1	Total	Chain 0	Chain 1	Total
2112.5	23.09	24.21	26.70	23.14	23.88	26.54	23.08	23.83	26.48
2132.5	23.51	23.86	26.70	23.56	23.90	26.74	23.52	23.82	26.68
2152.5	23.06	23.09	26.09	23.15	23.14	26.16	23.09	23.09	26.10

LTE Band 4 (Channel Bandwidth 10MHz):

Frequency (MHz)	CONDUCTED OUTPUT POWER (dBm)								
	QPSK			16QAM			64QAM		
	Chain 0	Chain 1	Total	Chain 0	Chain 1	Total	Chain 0	Chain 1	Total
2115.0	24.22	24.85	27.56	23.88	24.37	27.14	23.84	24.29	27.08
2132.5	24.02	24.39	27.22	23.97	24.41	27.21	24.00	24.35	27.19
2150.0	23.58	23.59	26.60	23.61	23.64	26.64	23.58	23.56	26.58

LTE Band 12 (Channel Bandwidth 5MHz):

Frequency (MHz)	CONDUCTED OUTPUT POWER (dBm)								
	QPSK			16QAM			64QAM		
	Chain 0	Chain 1	Total	Chain 0	Chain 1	Total	Chain 0	Chain 1	Total
731.5	22.34	22.35	25.36	23.86	23.77	26.83	23.75	23.65	26.71
737.0	23.59	23.66	26.64	23.65	23.72	26.70	23.54	23.68	26.62
742.5	23.68	23.71	26.71	23.74	23.77	26.77	23.63	23.71	26.68

LTE Band 12 (Channel Bandwidth 10MHz):

Frequency (MHz)	CONDUCTED OUTPUT POWER (dBm)								
	QPSK			16QAM			64QAM		
	Chain 0	Chain 1	Total	Chain 0	Chain 1	Total	Chain 0	Chain 1	Total
734.0	23.68	23.78	26.74	23.71	23.81	26.77	23.62	23.76	26.70
737.0	24.00	24.16	27.09	24.03	24.20	27.13	23.98	24.14	27.07
740.0	25.10	25.21	28.17	25.08	25.23	28.17	25.06	25.19	28.14

EIRP Power (dBm)

LTE Band 4 (Channel Bandwidth 5MHz): QPSK

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Limit (dBm)	Margin (dB)
1	2112.5	20.48	1.60	22.08	161.44	30.00	-7.92
2	2132.5	20.18	1.61	21.79	151.01	30.00	-8.21
3	2152.5	19.52	1.62	21.14	130.02	30.00	-8.86
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Limit (dBm)	Margin (dB)
1	2115.5	24.25	1.60	25.85	384.59	30.00	-4.15
2	2132.5	24.56	1.61	26.17	414.00	30.00	-3.83
3	2152.5	24.27	1.62	25.89	388.15	30.00	-4.11

NOTE: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 4 (Channel Bandwidth 5MHz): 16QAM

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Limit (dBm)	Margin (dB)
1	2115.5	20.52	1.60	22.12	162.93	30.00	-7.88
2	2132.5	20.36	1.61	21.97	157.40	30.00	-8.03
3	2152.5	20.06	1.62	21.68	147.23	30.00	-8.32
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Limit (dBm)	Margin (dB)
1	2115.5	24.50	1.60	26.10	407.38	30.00	-3.90
2	2132.5	24.69	1.61	26.30	426.58	30.00	-3.70
3	2152.5	24.08	1.62	25.70	371.54	30.00	-4.30

NOTE: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 4 (Channel Bandwidth 5MHz): 64QAM

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Limit (dBm)	Margin (dB)
1	2115.5	20.40	1.60	22.00	158.49	30.00	-8.00
2	2132.5	20.03	1.61	21.64	145.88	30.00	-8.36
3	2152.5	19.52	1.62	21.14	130.02	30.00	-8.86
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Limit (dBm)	Margin (dB)
1	2115.5	23.75	1.60	25.35	342.77	30.00	-4.65
2	2132.5	24.53	1.61	26.14	411.15	30.00	-3.86
3	2152.5	23.78	1.62	25.40	346.74	30.00	-4.60

NOTE: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 4 (Channel Bandwidth 10MHz): QPSK

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Limit (dBm)	Margin (dB)
1	2115.0	19.85	1.60	21.45	139.64	30.00	-8.55
2	2132.5	20.45	1.61	22.06	160.69	30.00	-7.94
3	2150.0	19.58	1.62	21.20	131.83	30.00	-8.80
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Limit (dBm)	Margin (dB)
1	2115.0	26.00	1.60	27.60	575.44	30.00	-2.40
2	2132.5	25.79	1.61	27.40	549.54	30.00	-2.60
3	2150.0	25.23	1.62	26.85	484.17	30.00	-3.15

NOTE: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 4 (Channel Bandwidth 10MHz): 16QAM

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Limit (dBm)	Margin (dB)
1	2115.0	20.02	1.60	21.62	145.21	30.00	-8.38
2	2132.5	19.94	1.61	21.55	142.89	30.00	-8.45
3	2150.0	20.28	1.62	21.90	154.88	30.00	-8.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Limit (dBm)	Margin (dB)
1	2115.0	24.84	1.60	26.44	440.55	30.00	-3.56
2	2132.5	25.97	1.61	27.58	572.80	30.00	-2.42
3	2150.0	24.18	1.62	25.80	380.19	30.00	-4.20

NOTE: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 4 (Channel Bandwidth 10MHz): 64QAM

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Limit (dBm)	Margin (dB)
1	2115.0	20.49	1.60	22.09	161.81	30.00	-7.91
2	2132.5	19.93	1.61	21.54	142.56	30.00	-8.46
3	2150.0	20.80	1.62	22.42	174.58	30.00	-7.58
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Limit (dBm)	Margin (dB)
1	2115.0	24.93	1.60	26.53	449.78	30.00	-3.47
2	2132.5	25.41	1.61	27.02	503.50	30.00	-2.98
3	2150.0	24.18	1.62	25.80	380.19	30.00	-4.20

NOTE: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 12 (Channel Bandwidth 5MHz): QPSK

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Limit (dBm)	Margin (dB)
1	731.5	24.38	-5.12	19.26	84.33	30.00	-10.74
2	737.0	26.64	-5.12	21.52	141.91	30.00	-8.48
3	742.5	26.00	-5.12	20.88	122.46	30.00	-9.12
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Limit (dBm)	Margin (dB)
1	731.5	29.23	-5.12	24.11	257.63	30.00	-5.89
2	737.0	28.66	-5.12	23.54	225.94	30.00	-6.46
3	742.5	29.94	-5.12	24.82	303.39	30.00	-5.18

NOTE: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 12 (Channel Bandwidth 5MHz): 16QAM

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Limit (dBm)	Margin (dB)
1	731.5	25.79	-5.12	20.67	116.68	30.00	-9.33
2	737.0	25.60	-5.12	20.48	111.69	30.00	-9.52
3	742.5	25.18	-5.12	20.06	101.39	30.00	-9.94
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Limit (dBm)	Margin (dB)
1	731.5	30.06	-5.12	24.94	311.89	30.00	-5.06
2	737.0	29.35	-5.12	24.23	264.85	30.00	-5.77
3	742.5	29.10	-5.12	23.98	250.03	30.00	-6.02

NOTE: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 12 (Channel Bandwidth 5MHz): 64QAM

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Limit (dBm)	Margin (dB)
1	731.5	25.80	-5.12	20.68	116.95	30.00	-9.32
2	737.0	25.43	-5.12	20.31	107.40	30.00	-9.69
3	742.5	23.93	-5.12	18.81	76.03	30.00	-11.19
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Limit (dBm)	Margin (dB)
1	731.5	28.51	-5.12	23.39	218.27	30.00	-6.61
2	737.0	28.64	-5.12	23.52	224.91	30.00	-6.48
3	742.5	29.20	-5.12	24.08	255.86	30.00	-5.92

NOTE: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 12 (Channel Bandwidth 10MHz): QPSK

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Limit (dBm)	Margin (dB)
1	734.0	25.37	-5.12	20.25	105.93	30.00	-9.75
2	737.0	25.80	-5.12	20.68	116.95	30.00	-9.32
3	740.0	24.70	-5.12	19.58	90.78	30.00	-10.42
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Limit (dBm)	Margin (dB)
1	734.0	29.62	-5.12	24.50	281.84	30.00	-5.50
2	737.0	30.72	-5.12	25.60	363.08	30.00	-4.40
3	740.0	30.31	-5.12	25.19	330.37	30.00	-4.81

NOTE: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 12 (Channel Bandwidth 10MHz): 16QAM

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Limit (dBm)	Margin (dB)
1	734.0	24.05	-5.12	18.93	78.16	30.00	-11.07
2	737.0	26.40	-5.12	21.28	134.28	30.00	-8.72
3	740.0	24.63	-5.12	19.51	89.33	30.00	-10.49
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Limit (dBm)	Margin (dB)
1	734.0	30.26	-5.12	25.14	326.59	30.00	-4.86
2	737.0	30.26	-5.12	25.14	326.59	30.00	-4.86
3	740.0	30.14	-5.12	25.02	317.69	30.00	-4.98

NOTE: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 12 (Channel Bandwidth 10MHz): 64QAM

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Limit (dBm)	Margin (dB)
1	734.0	24.49	-5.12	19.37	86.50	30.00	-10.63
2	737.0	25.76	-5.12	20.64	115.88	30.00	-9.36
3	740.0	26.58	-5.12	21.46	139.96	30.00	-8.54
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Limit (dBm)	Margin (dB)
1	734.0	31.38	-5.12	26.26	422.67	30.00	-3.74
2	737.0	30.99	-5.12	25.87	386.37	30.00	-4.13
3	740.0	30.62	-5.12	25.50	354.81	30.00	-4.50

NOTE: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

4.2 Frequency Stability Measurement

4.2.1 Limits of Frequency Stability Measurement


According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.2.2 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the AC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 Test Setup

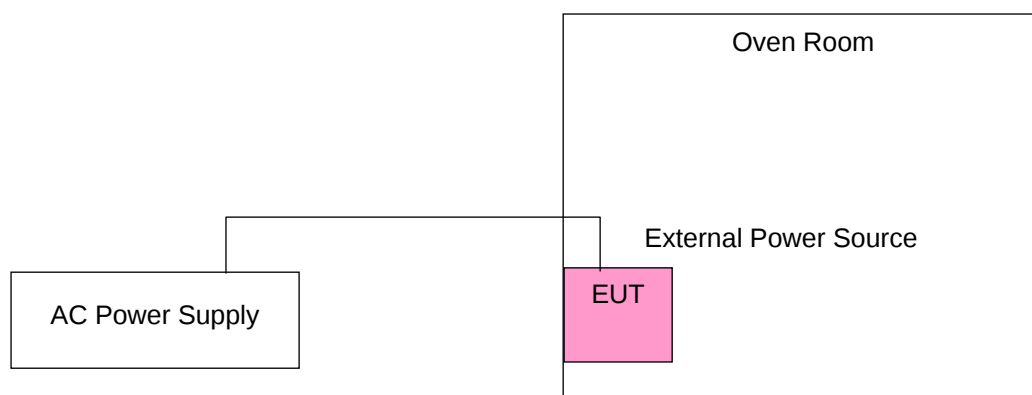

4.2.4 Test Results

Chain 0

Frequency Error vs. Voltage

Voltage (Volts)	Frequency Error (ppm)	Limit (ppm)
126.5	0.0075739645	2.5
120.0	0.0052071006	2.5
93.5	0.0056804734	2.5

Frequency Error vs. Temperature.

TEMP. (°C)	Frequency Error (ppm)	Limit (ppm)
50	0.0080473373	2.5
40	0.0075739645	2.5
30	0.0061538462	2.5
20	0.0052071006	2.5
10	0.0042603550	2.5
0	0.0037869822	2.5
-10	0.0014201183	2.5
-20	0.0023668639	2.5

Chain 1

Frequency Error vs. Voltage

Voltage (Volts)	Frequency Error (ppm)	Limit (ppm)
126.5	0.0080473373	2.5
120.0	0.0052071006	2.5
93.5	0.0066272189	2.5

Frequency Error vs. Temperature.

TEMP. (°C)	Frequency Error (ppm)	Limit (ppm)
50	0.0085207101	2.5
40	0.0080473373	2.5
30	0.0066272189	2.5
20	0.0052071006	2.5
10	0.0047337278	2.5
0	0.0047337278	2.5
-10	0.0023668639	2.5
-20	0.0028402367	2.5

4.3 Emission Bandwidth Measurement


4.3.1 Limits Of Emission Bandwidth Measurement

According to FCC 27.53(m)(6) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

4.3.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW = 200kHz and VBW = 620kHz (Channel Bandwidth: 10MHz and 15MHz), RBW = 430kHz and VBW = 1.2MHz (Channel Bandwidth: 20MHz). The 26dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 26dB.


4.3.3 Test Setup

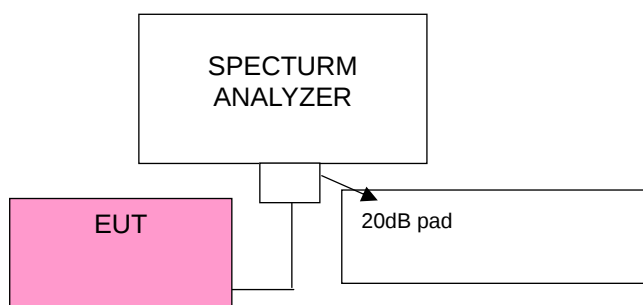

4.3.4 Test Result


LTE Band 4 (Channel Bandwidth 5MHz): Chain 0

Frequency (MHz)	Occupied Bandwidth (MHz)		
	QPSK	16QAM	64QAM
2112.5	4.43	4.42	4.42
2132.5	4.42	4.42	4.43
2152.5	4.42	4.43	4.43

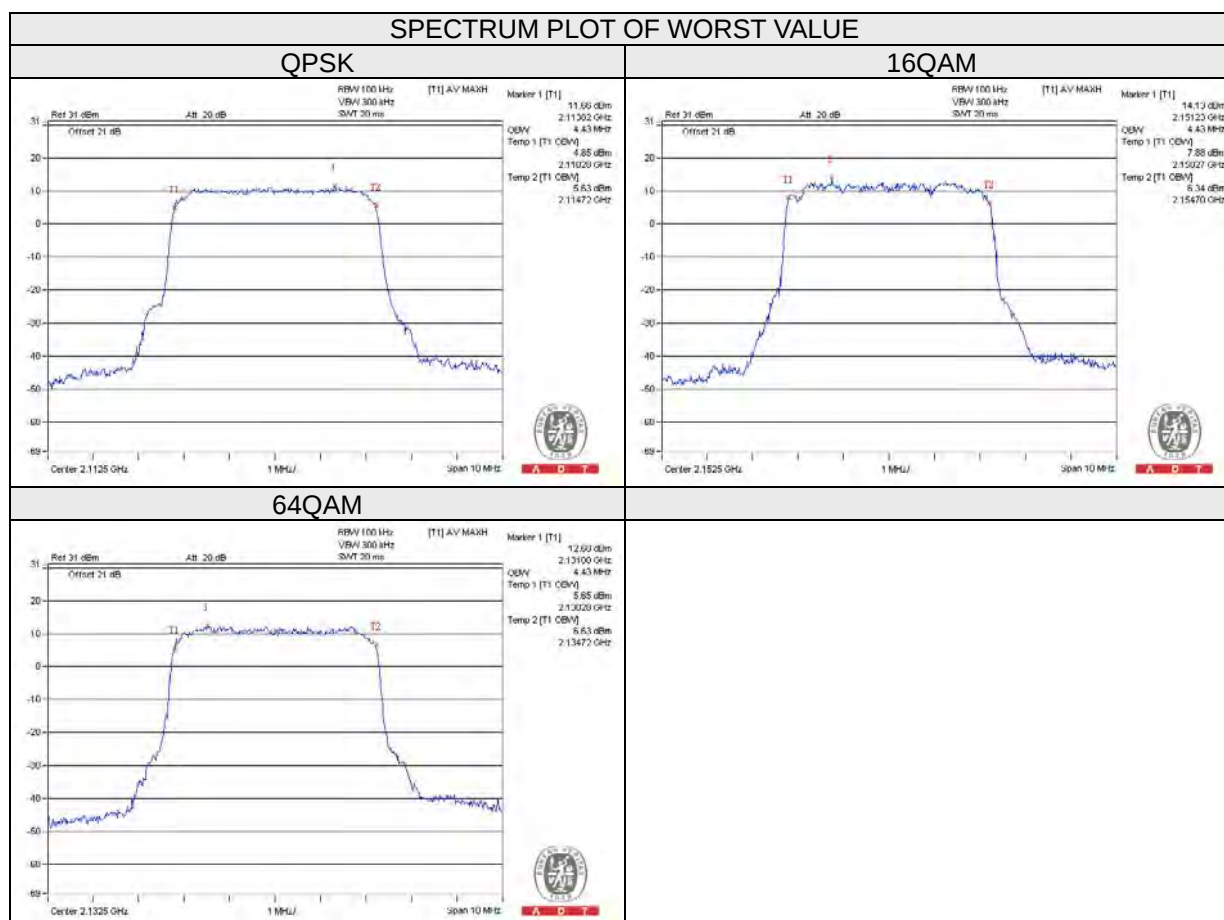


LTE Band 4 (Channel Bandwidth 5MHz): Chain 1

Frequency (MHz)	Occupied Bandwidth (MHz)		
	QPSK	16QAM	64QAM
2112.5	4.43	4.42	4.42
2132.5	4.42	4.42	4.43
2152.5	4.43	4.38	4.43

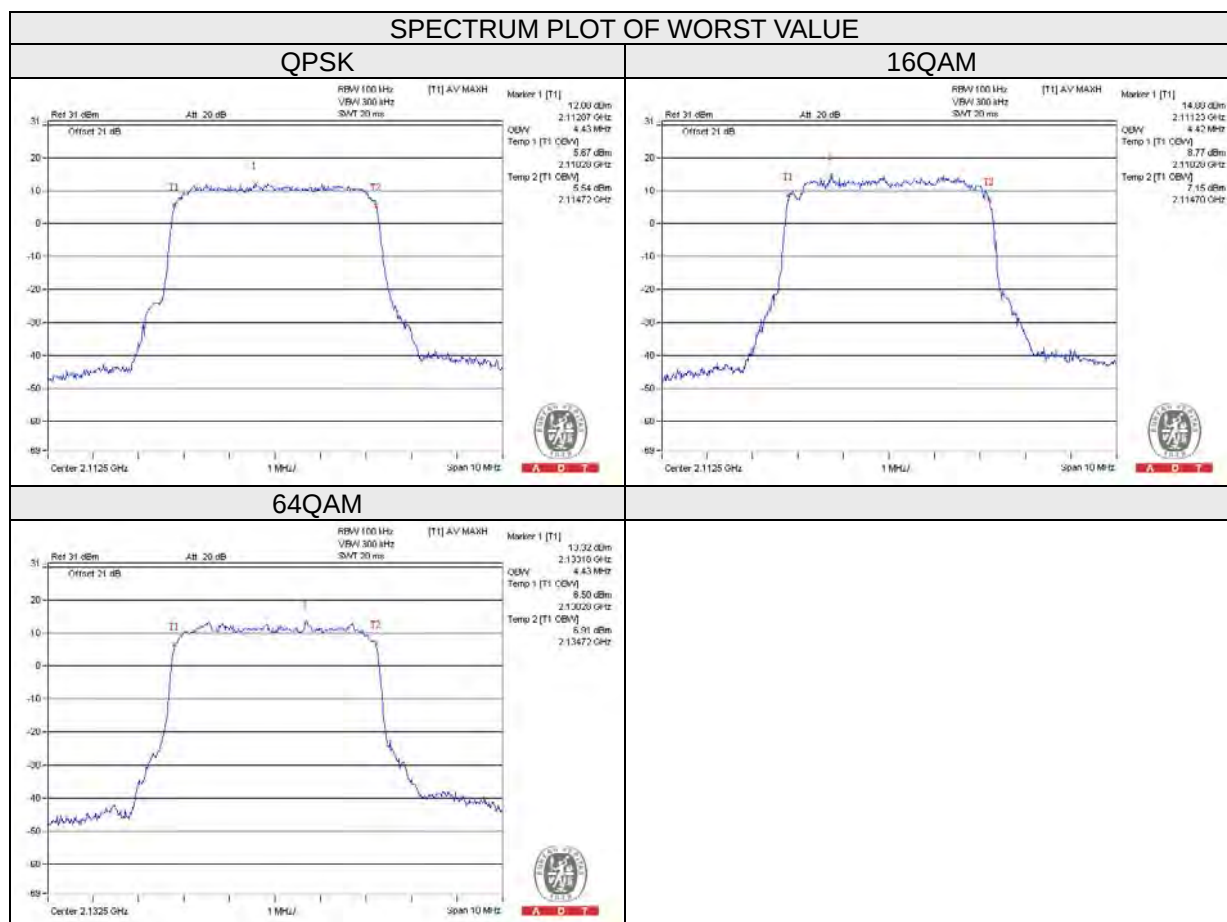


LTE Band 4 (Channel Bandwidth 10MHz): Chain 0

Frequency (MHz)	Occupied Bandwidth (MHz)		
	QPSK	16QAM	64QAM
2115.0	8.93	8.87	8.93
2132.5	8.93	8.93	8.93
2150.0	8.90	8.87	8.90

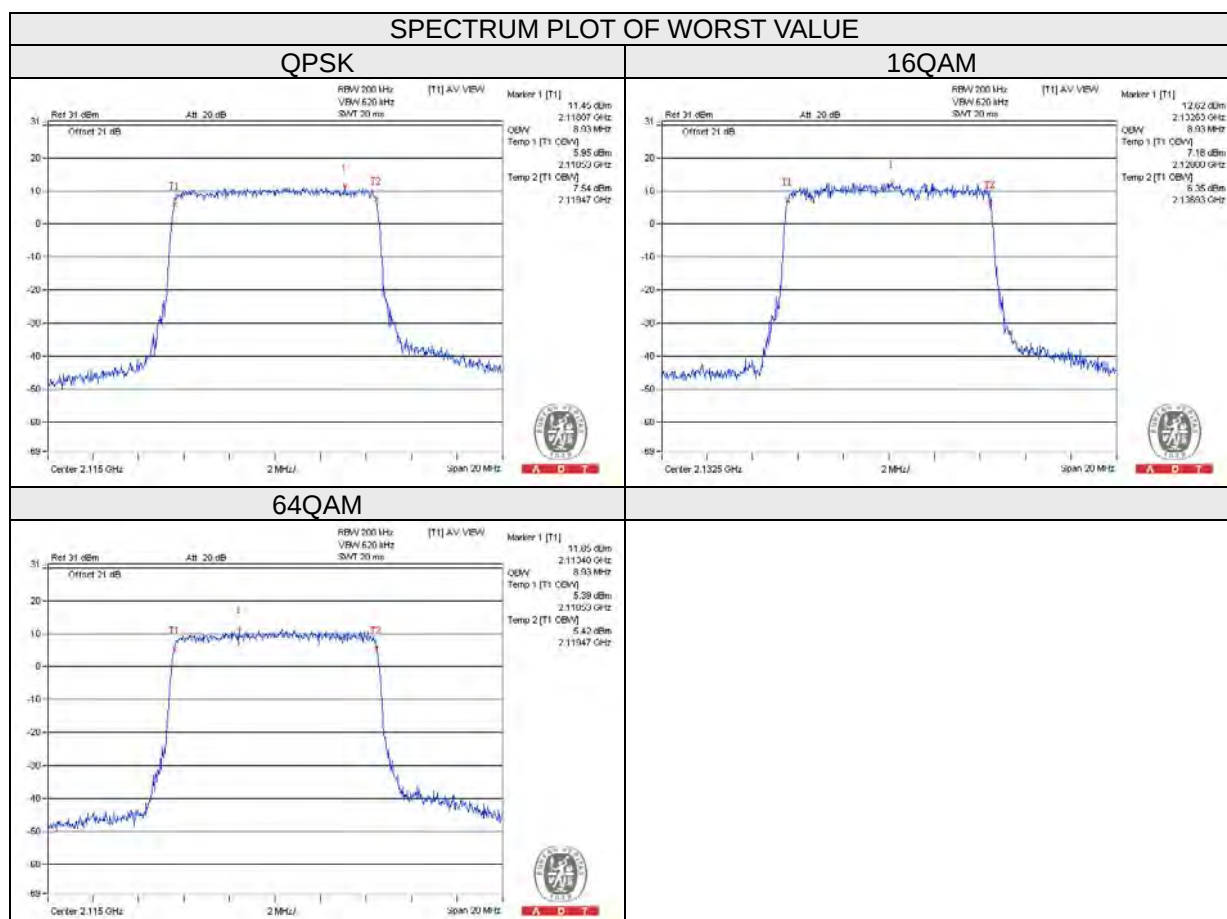


LTE Band 4 (Channel Bandwidth 10MHz): Chain 1

Frequency (MHz)	Occupied Bandwidth (MHz)		
	QPSK	16QAM	64QAM
2115.0	8.93	8.93	8.93
2132.5	8.93	8.93	8.93
2150.0	8.93	8.93	8.93

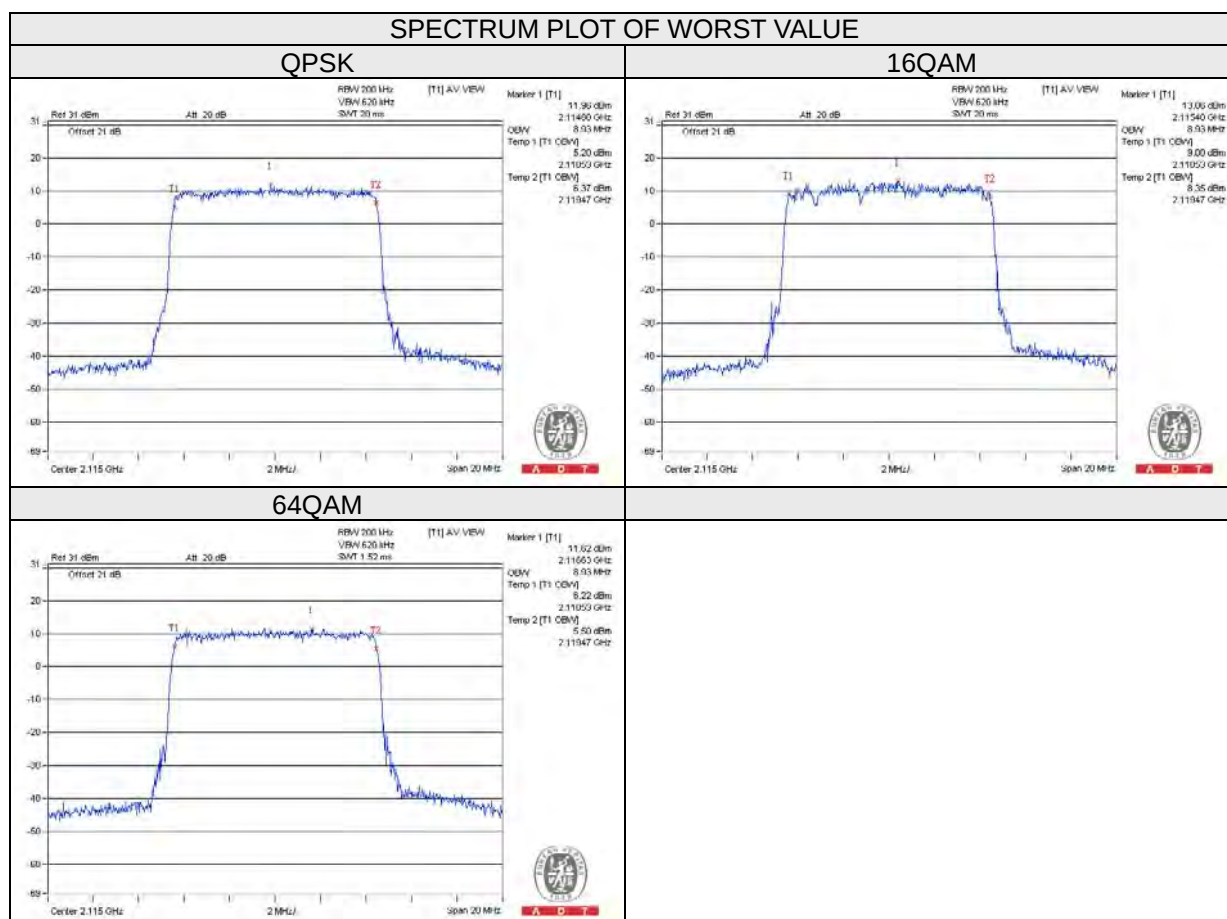


LTE Band 12 (Channel Bandwidth 5MHz): Chain 0

Frequency (MHz)	Occupied Bandwidth (MHz)		
	QPSK	16QAM	64QAM
731.5	4.42	4.38	4.43
737.0	4.40	4.42	4.43
742.5	4.43	4.38	4.43

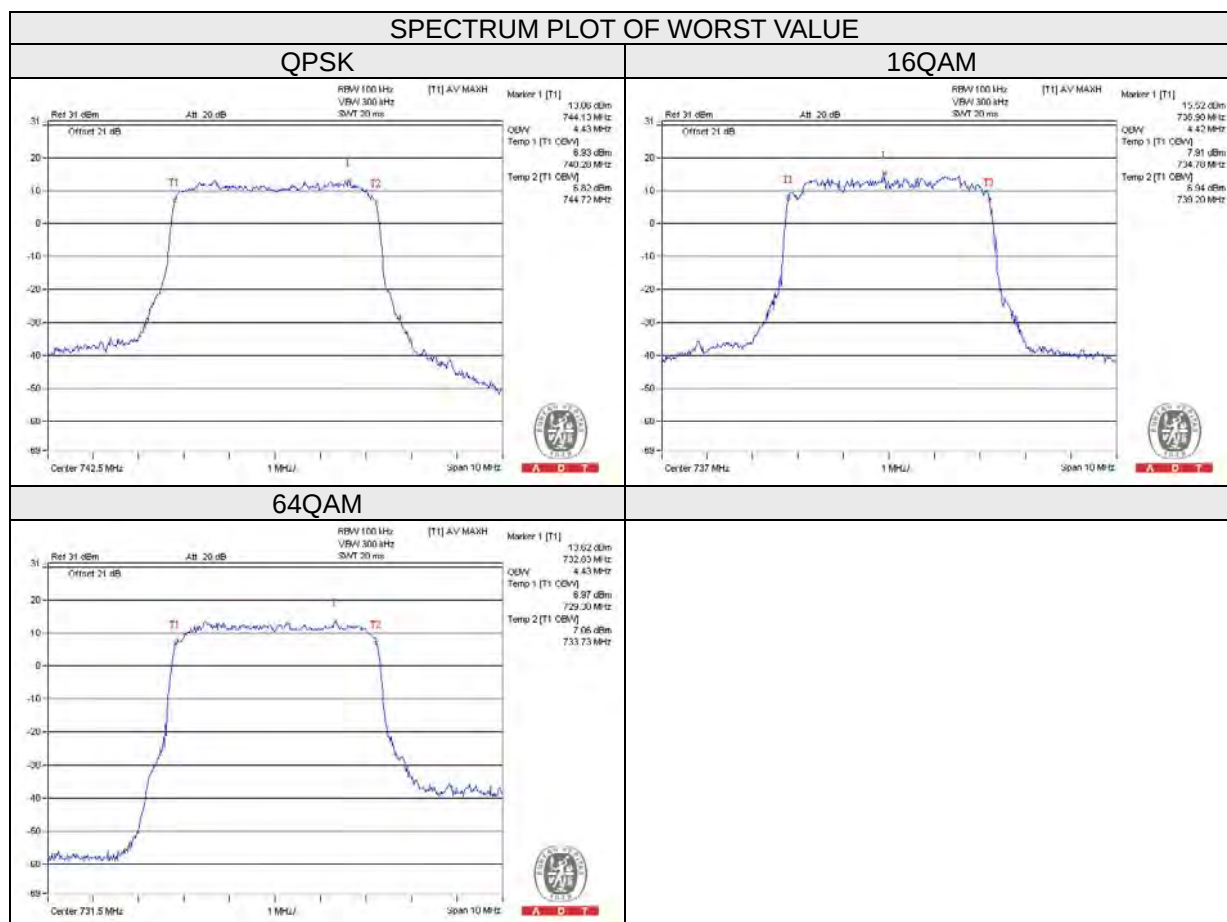


LTE Band 12 (Channel Bandwidth 5MHz): Chain 1

Frequency (MHz)	Occupied Bandwidth (MHz)		
	QPSK	16QAM	64QAM
731.5	4.42	4.37	4.42
737.0	4.40	4.38	4.43
742.5	4.42	4.37	4.43

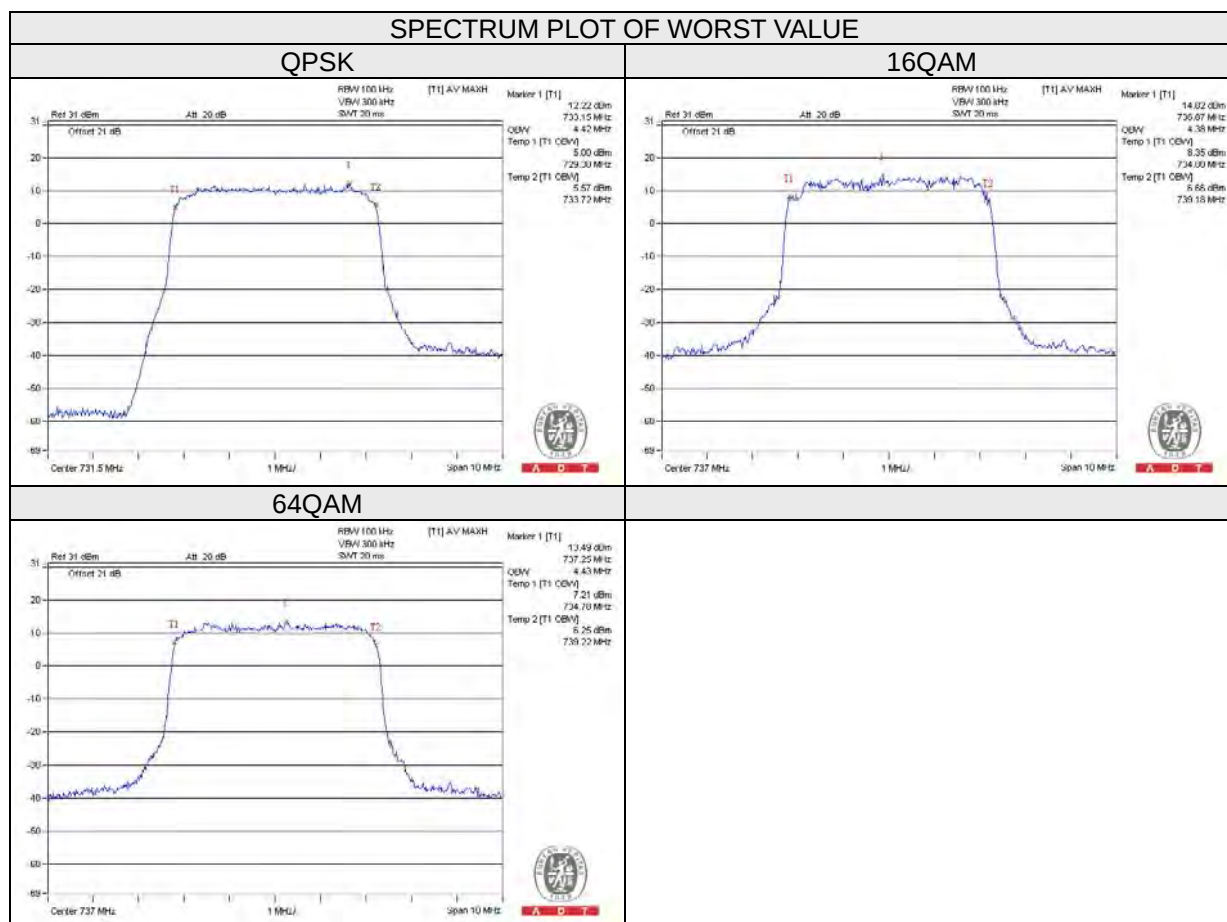


LTE Band 12 (Channel Bandwidth 10MHz): Chain 0

Frequency (MHz)	Occupied Bandwidth (MHz)		
	QPSK	16QAM	64QAM
734.0	8.90	8.83	8.90
737.0	8.87	8.90	8.87
740.0	8.90	8.93	8.90

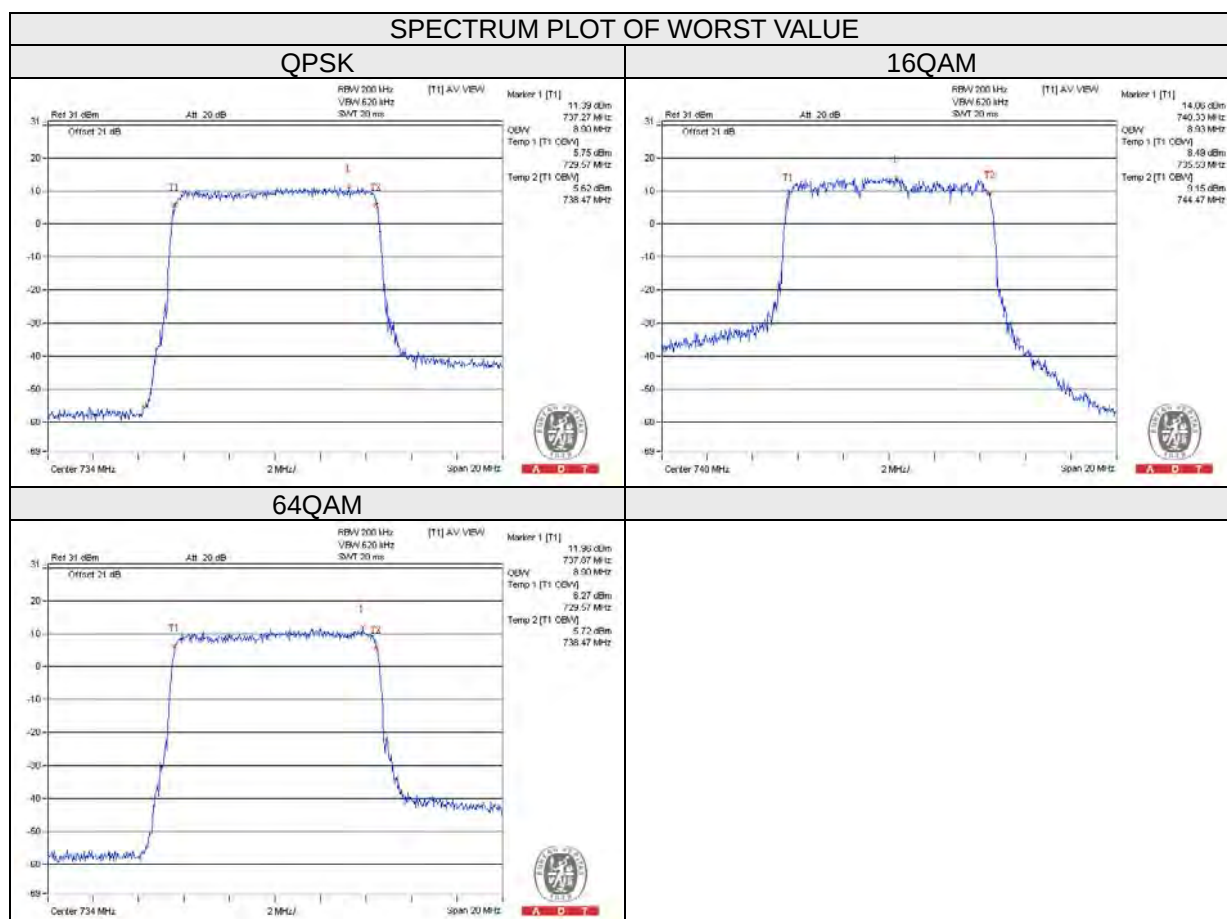

LTE Band 12 (Channel Bandwidth 10MHz): Chain 1

Frequency (MHz)	Occupied Bandwidth (MHz)		
	QPSK	16QAM	64QAM
734.0	8.90	8.87	8.93
737.0	8.90	8.93	8.90
740.0	8.90	8.90	8.90

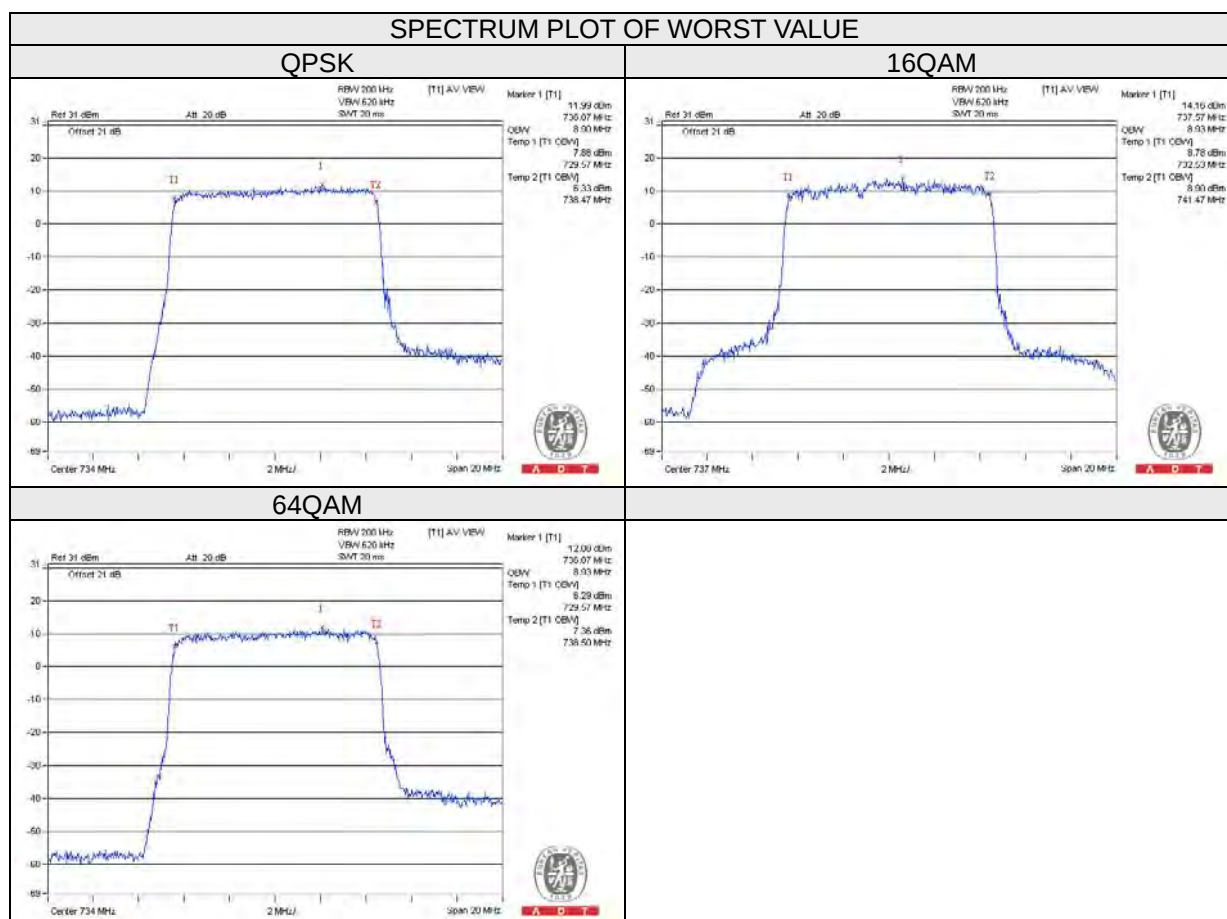


4.4 Peak To Average Ratio

4.5.1 Limits of Peak To Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.5.2 Test Setup

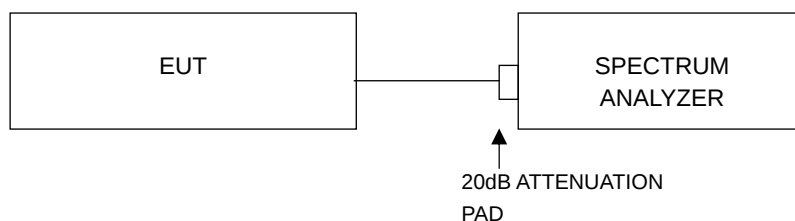


4.5.3 Test Procedures

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.5.4 Test Results


LTE Band 4 (CHANNEL BANDWIDTH 5MHz): Chain 0

Frequency (MHz)	Peak To Average Ratio (dB)		
	QPSK	16QAM	64QAM
2112.5	7.25	7.13	7.24
2132.5	7.23	7.17	7.23
2152.5	7.25	7.22	7.26

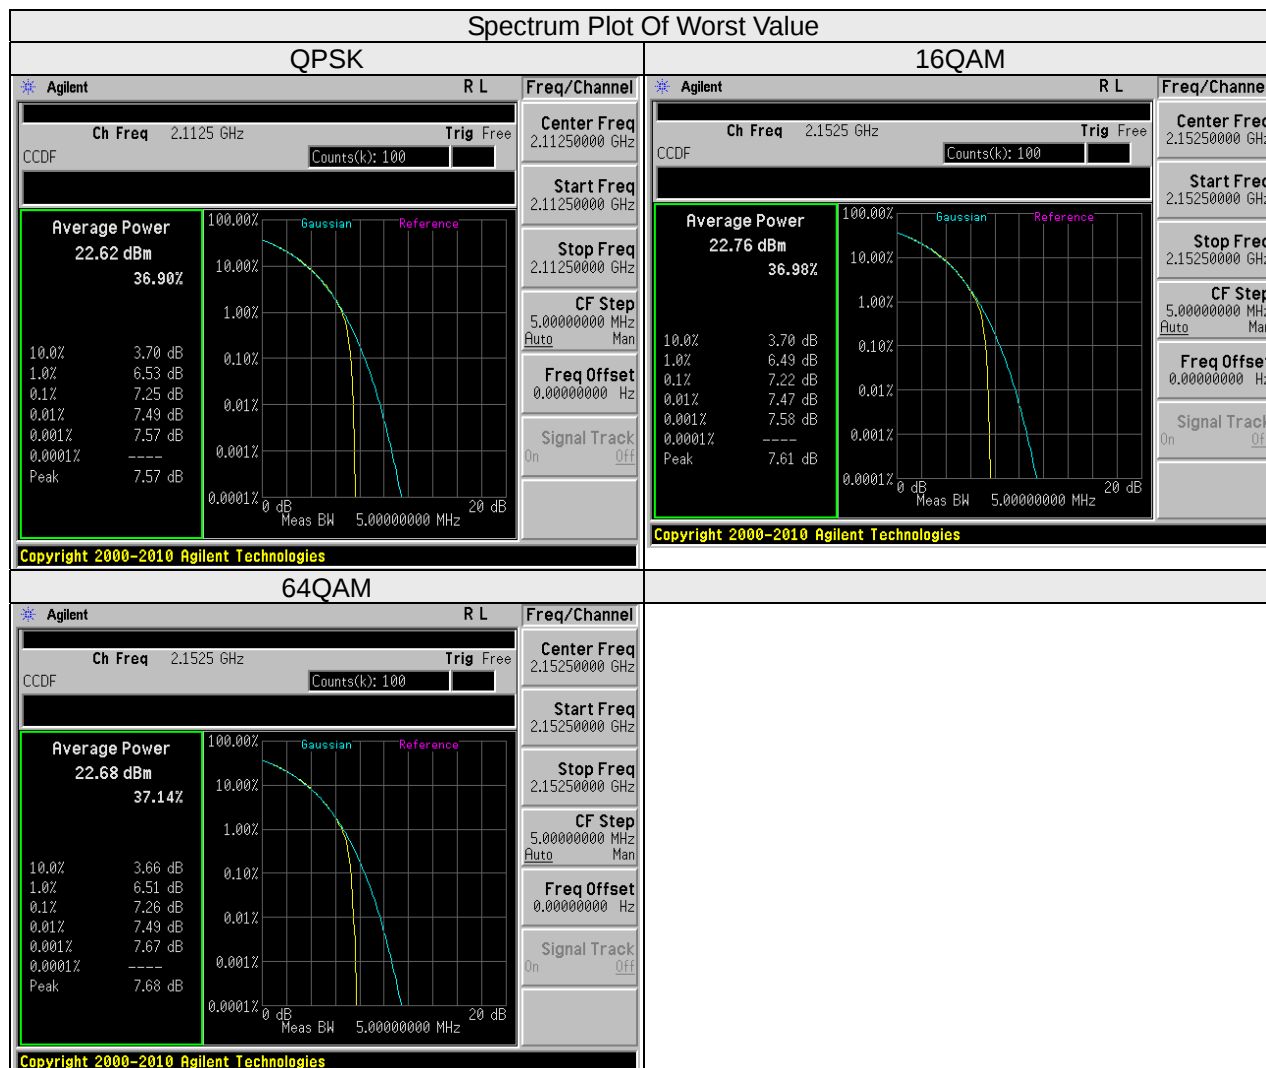

LTE Band 4 (CHANNEL BANDWIDTH 5MHz): Chain 1

Frequency (MHz)	Peak To Average Ratio (dB)		
	QPSK	16QAM	64QAM
2112.5	7.19	7.17	7.25
2132.5	7.21	7.16	7.28
2152.5	7.27	7.20	7.28

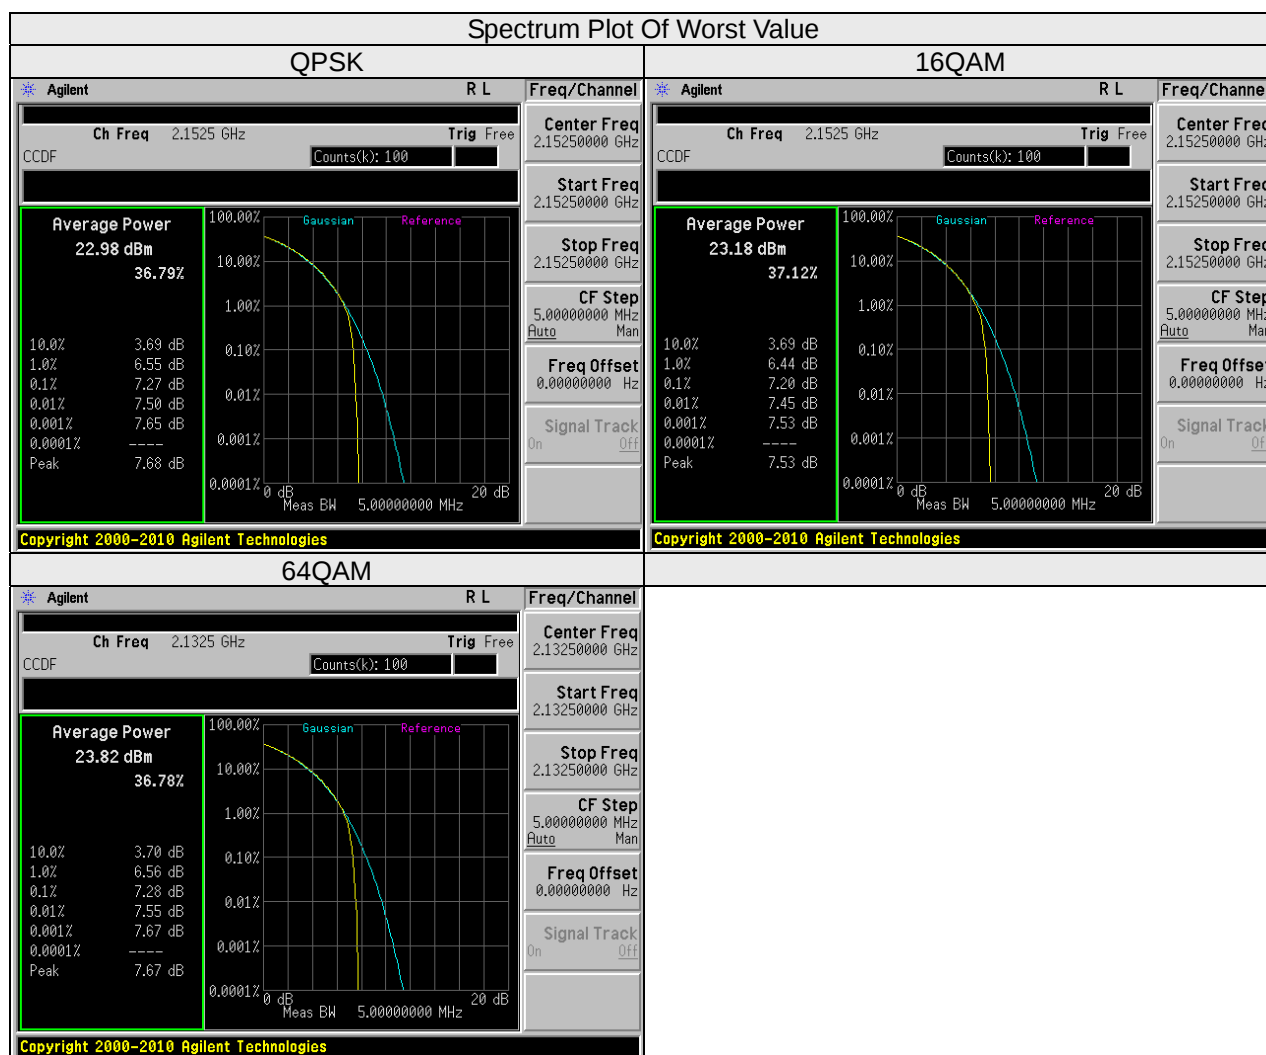


LTE Band 4 (CHANNEL BANDWIDTH 10MHz): Chain 0

Frequency (MHz)	Peak To Average Ratio (dB)		
	QPSK	16QAM	64QAM
2115.0	7.66	7.74	7.78
2132.5	7.74	7.71	7.79
2150.0	7.79	7.80	7.78



LTE Band 4 (CHANNEL BANDWIDTH 10MHz): Chain 1

Frequency (MHz)	Peak To Average Ratio (dB)		
	QPSK	16QAM	64QAM
2115.0	7.81	7.78	7.84
2132.5	7.81	7.79	7.78
2150.0	7.80	7.80	7.80

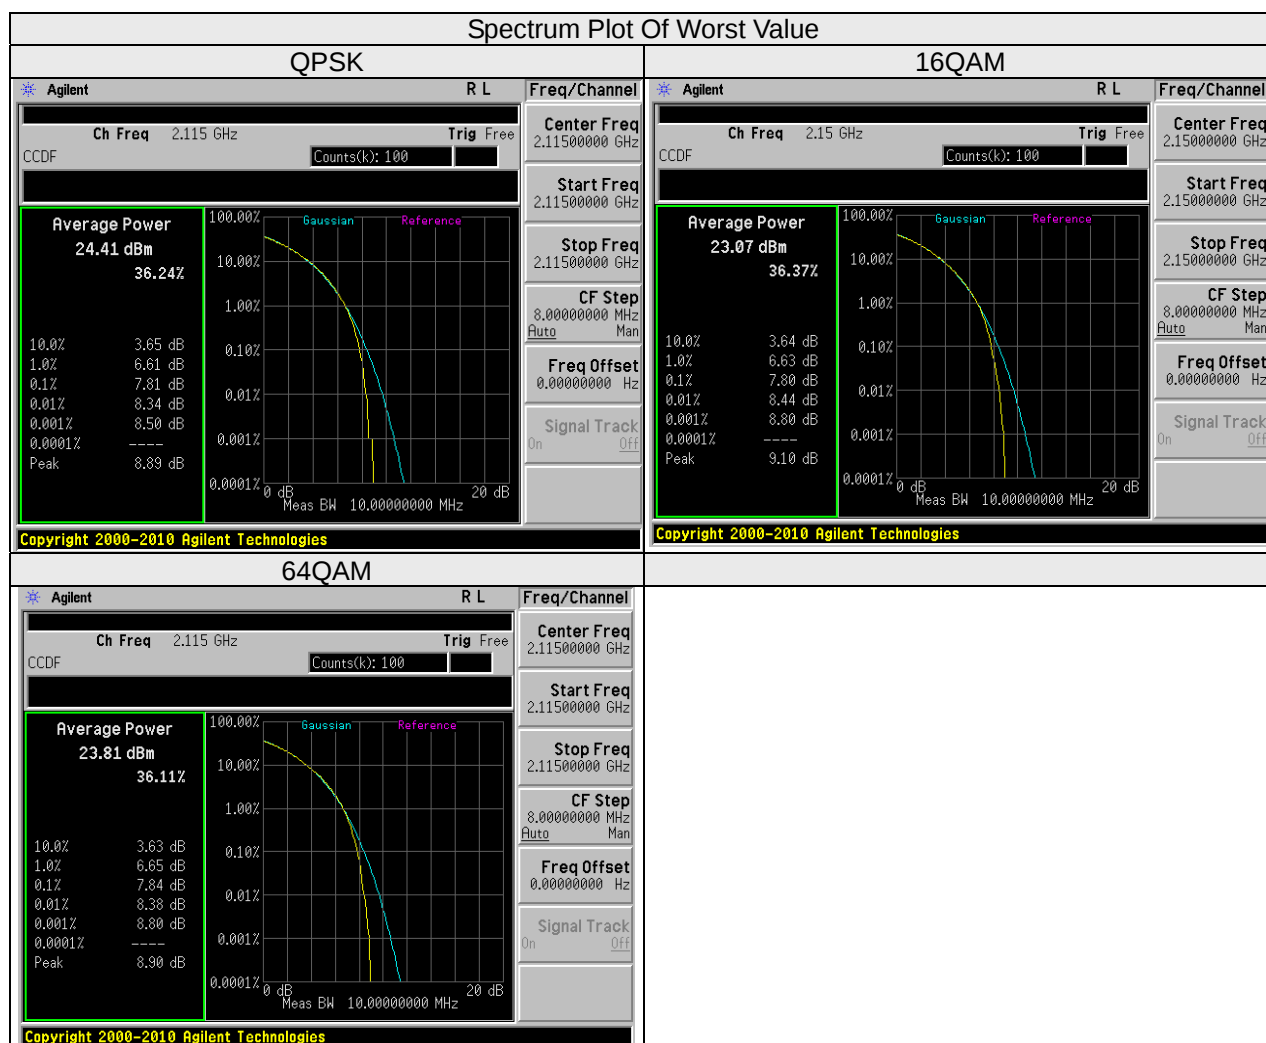


LTE Band 12 (CHANNEL BANDWIDTH 5MHz): Chain 0

Frequency (MHz)	Peak To Average Ratio (dB)		
	QPSK	16QAM	64QAM
731.5	7.45	7.40	7.51
737.0	7.25	7.24	7.30
742.5	7.36	7.18	7.30



LTE Band 12 (CHANNEL BANDWIDTH 5MHz): Chain 1

Frequency (MHz)	Peak To Average Ratio (dB)		
	QPSK	16QAM	64QAM
731.5	7.42	7.33	7.37
737.0	7.23	7.16	7.25
742.5	7.22	7.20	7.28

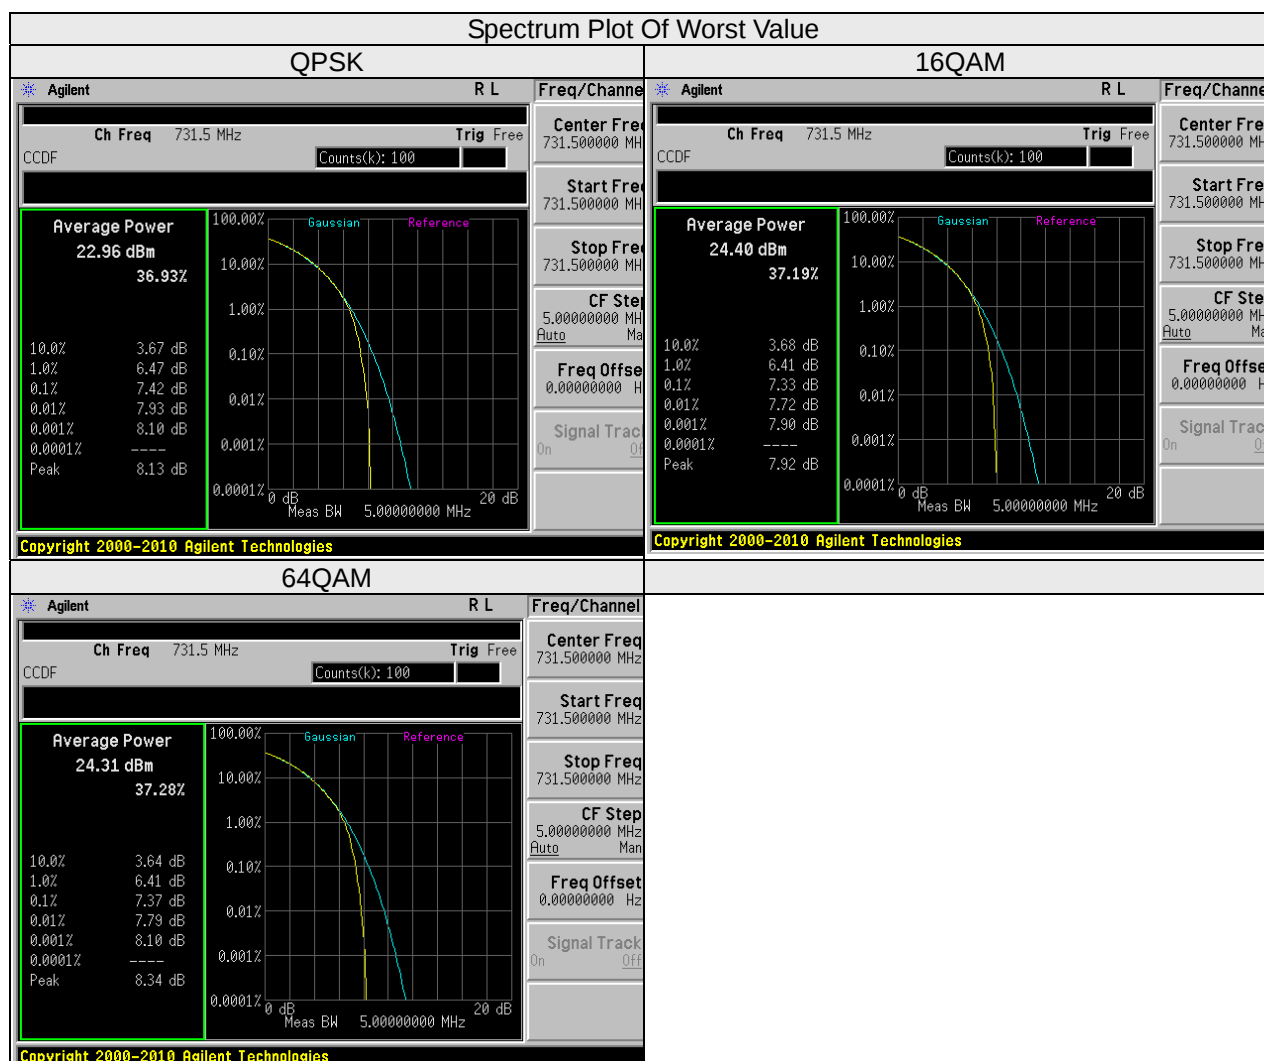

LTE Band 12 (CHANNEL BANDWIDTH 10MHz): Chain 0

Frequency (MHz)	Peak To Average Ratio (dB)		
	QPSK	16QAM	64QAM
734.0	7.91	7.90	7.87
737.0	7.92	7.82	7.85
740.0	7.75	7.63	7.70



LTE Band 12 (CHANNEL BANDWIDTH 10MHz): Chain 1

Frequency (MHz)	Peak To Average Ratio (dB)		
	QPSK	16QAM	64QAM
734.0	7.90	7.80	7.87
737.0	7.76	7.73	7.80
740.0	7.71	7.62	7.64




4.5 Channel Edge Measurement

4.5.1 Limits of Band Edge Measurement

According to FCC 27.53(m)(4) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power (P) by a factor shall be not less than $43 + 10 \log (P)$ dB at the channel edge, the limit of emission equal to -13dBm . And $55 + 10 \log (P)$ dB at 5.5 MHz from the channel edges, the limit of emission equal to -25dBm . In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.5.2 Test Setup

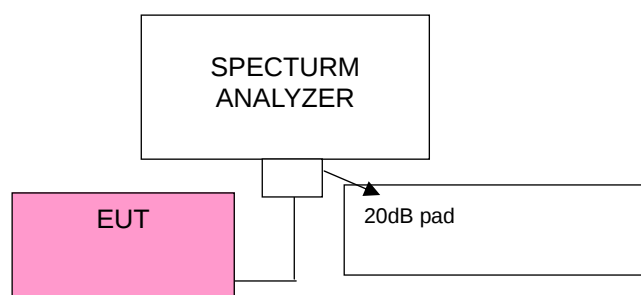


4.5.3 Test Procedures

- The EUT was set up for the rated peak power. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels: low, middle and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 30MHz (Channel Bandwidth: 10MHz) / 40MHz (Channel Bandwidth: 15MHz) / 50MHz (Channel Bandwidth: 25MHz). RBW of the spectrum is 100kHz (Channel Bandwidth: 10MHz) / 100kHz (Channel Bandwidth: 10MHz) / 150kHz (Channel Bandwidth: 15MHz) / 200kHz (Channel Bandwidth: 20MHz).
- Record the max trace plot into the test report.

4.5.4 Test Results

LTE Band 4 (Channel Bandwidth 5MHz): Chain 0


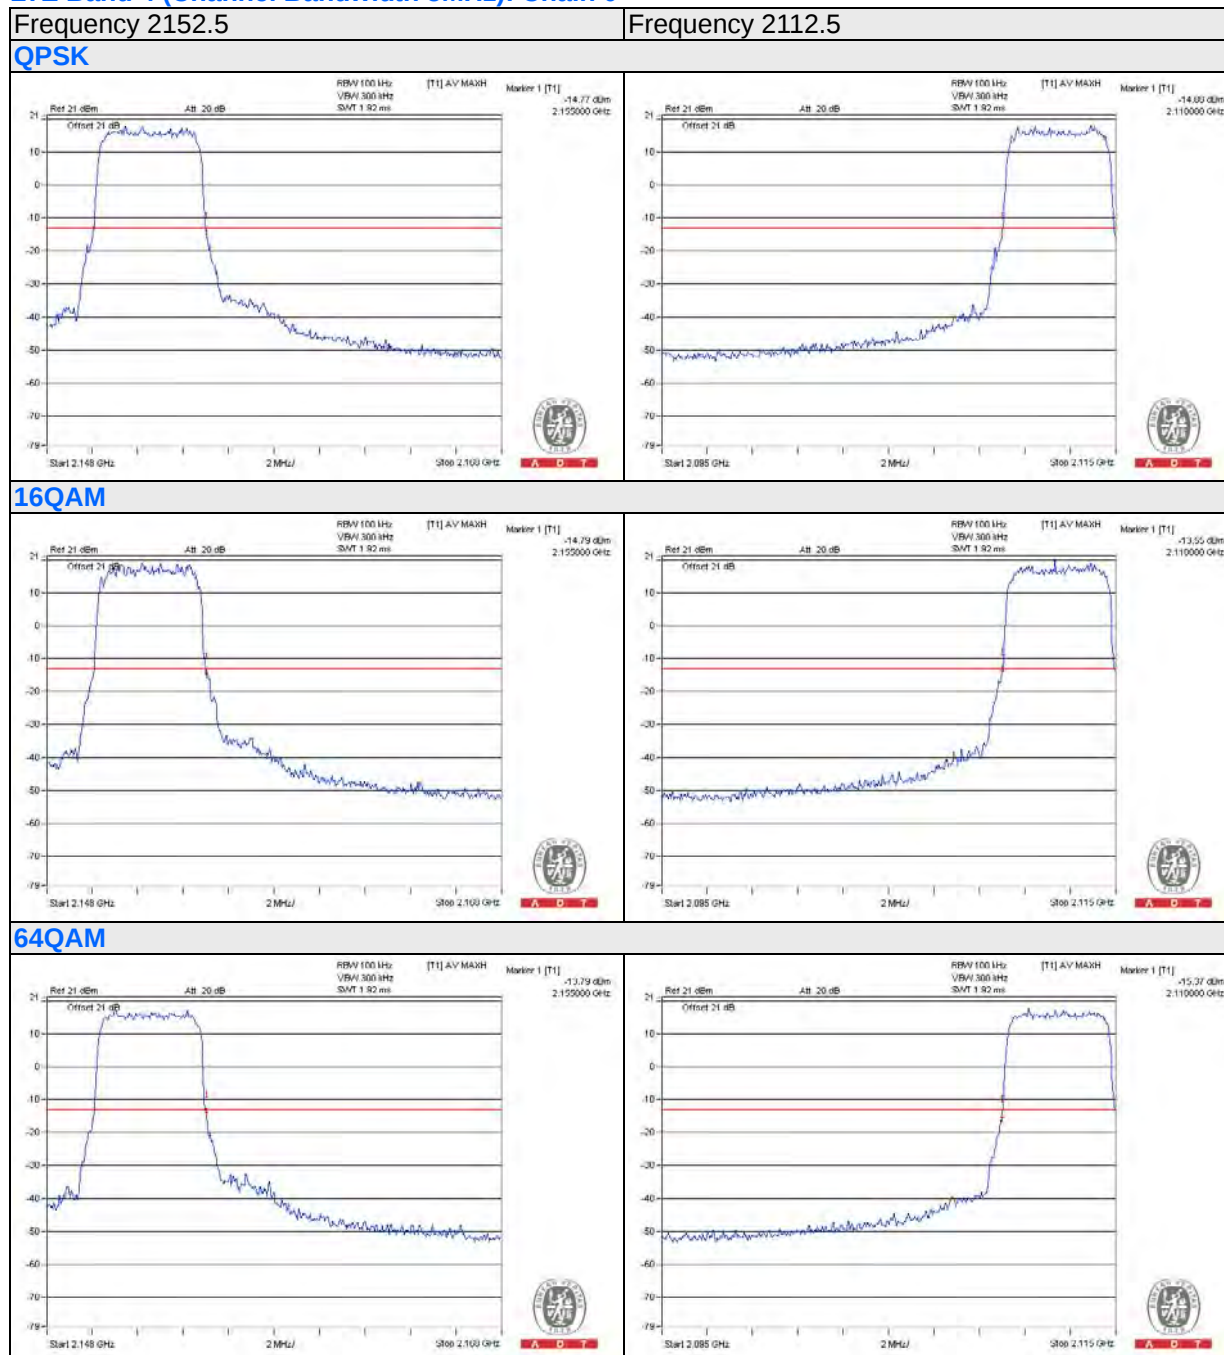


LTE Band 4 (Channel Bandwidth 5MHz): Chain 1



Frequency 2152.5

Frequency 2112.5



QPSK

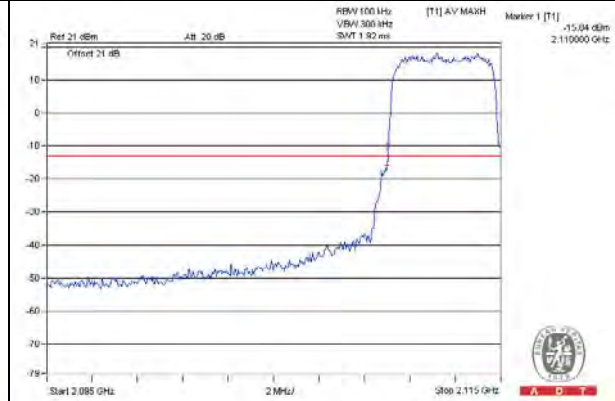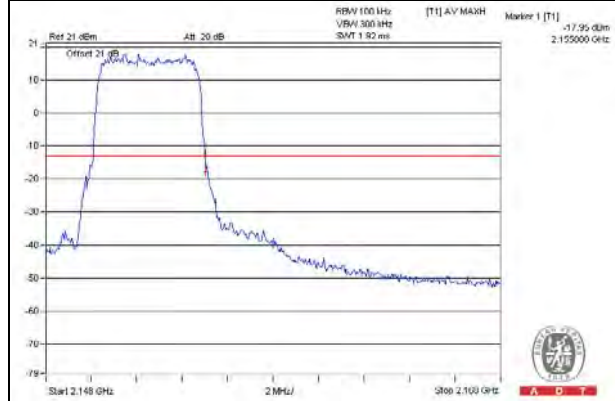

16QAM

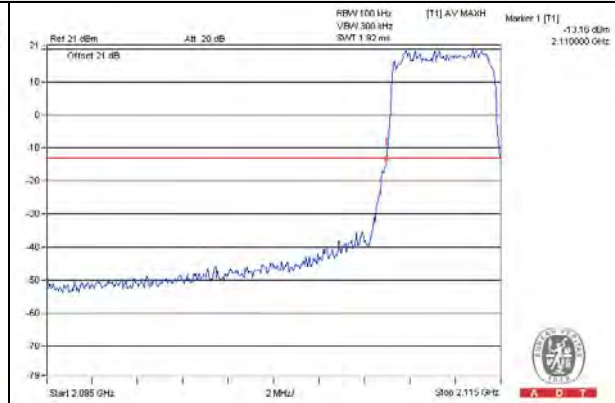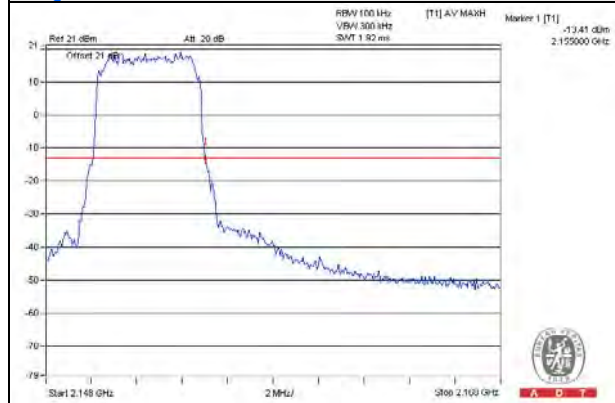

64QAM

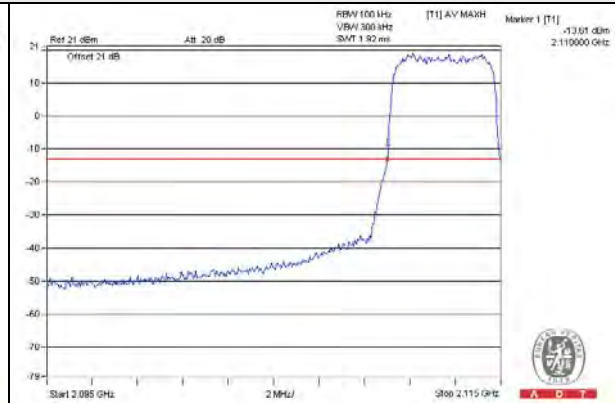
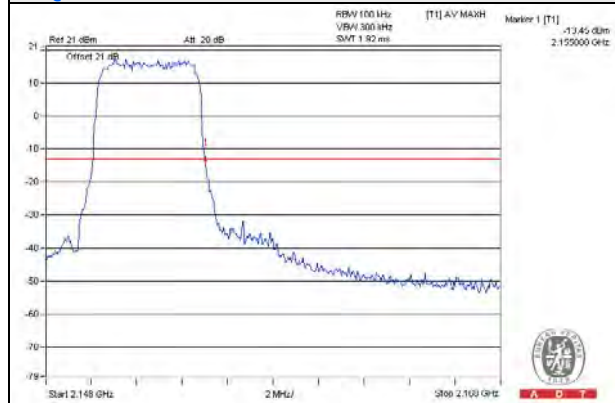


LTE Band 4 (Channel Bandwidth 10MHz): Chain 0



Frequency 2150.0

Frequency 2115.0



QPSK

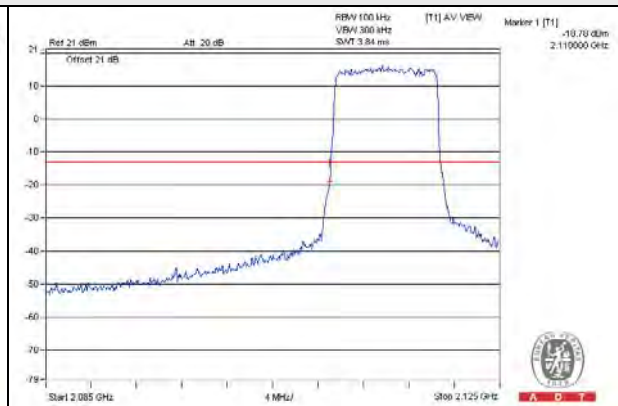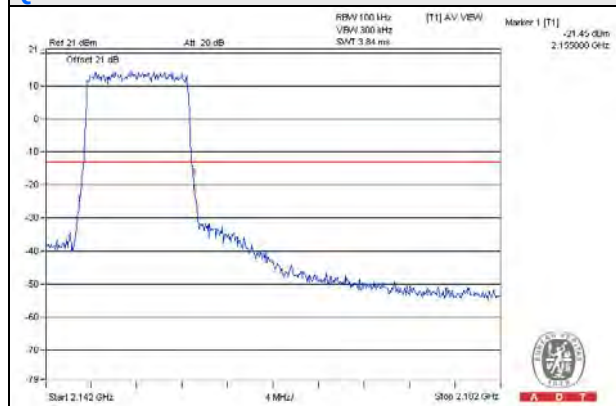

16QAM

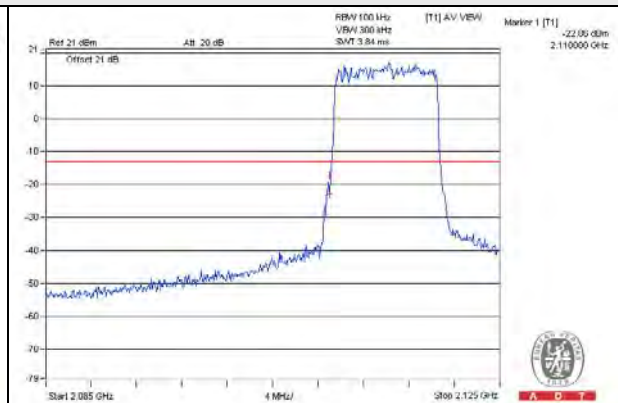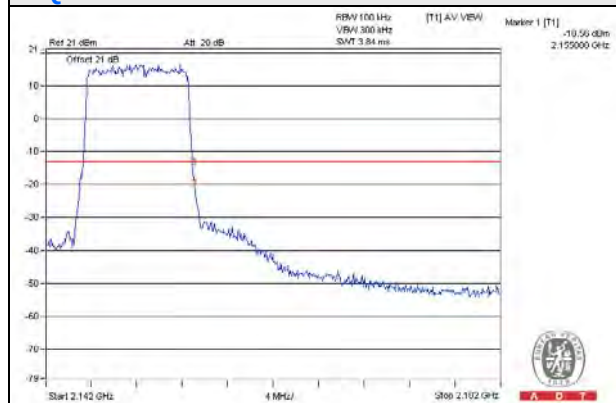

64QAM

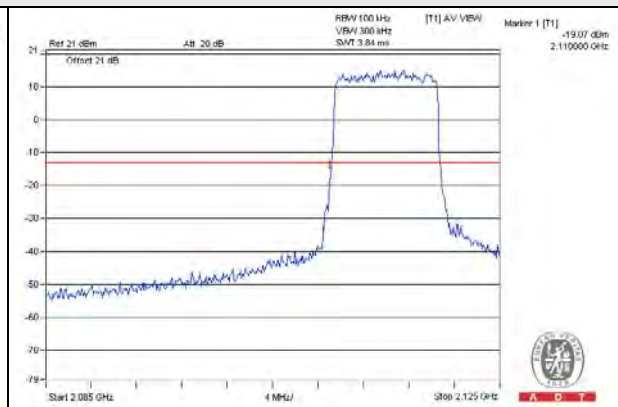
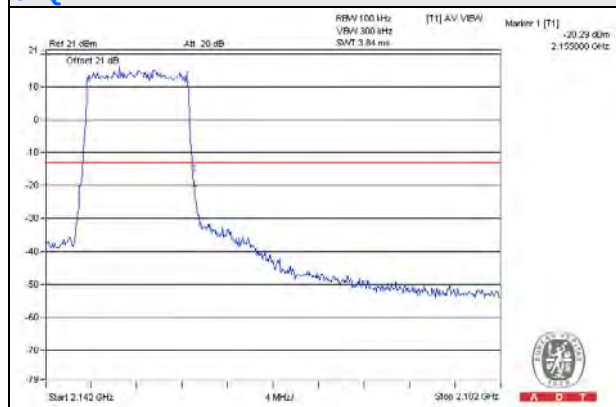


LTE Band 4 (Channel Bandwidth 10MHz): Chain 1



Frequency 2150.0

Frequency 2115.0



QPSK

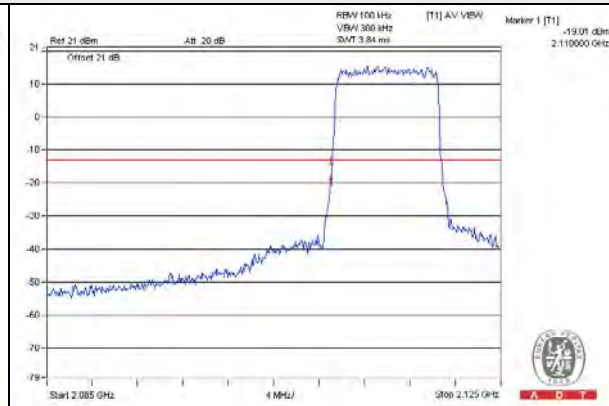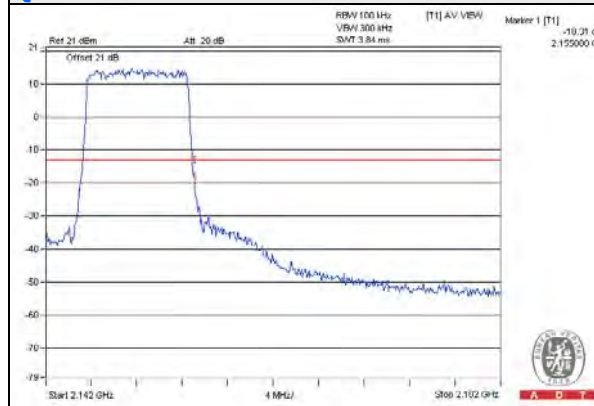

16QAM

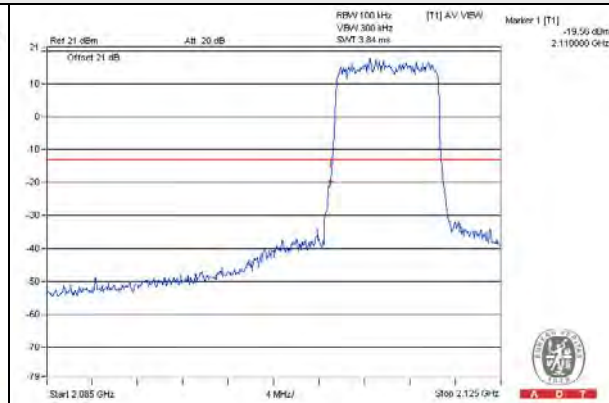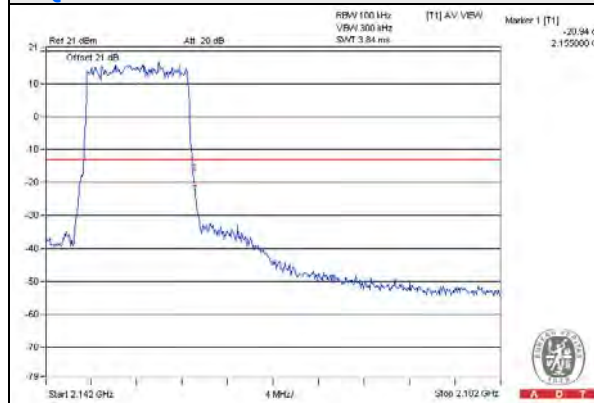

64QAM

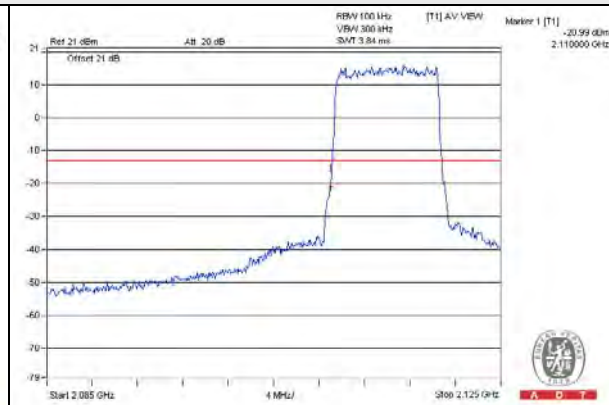
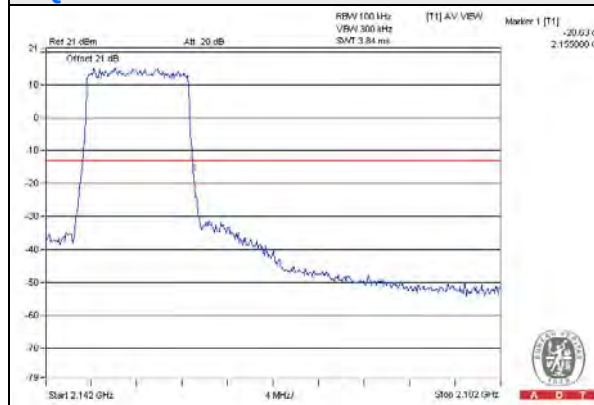


LTE Band 12 (Channel Bandwidth 5MHz): Chain 0



Frequency 742.5

Frequency 731.5



QPSK

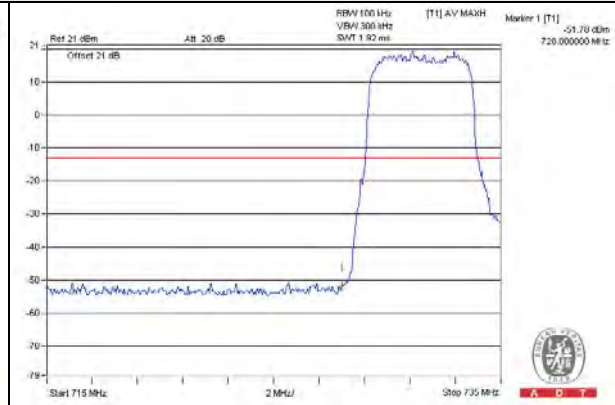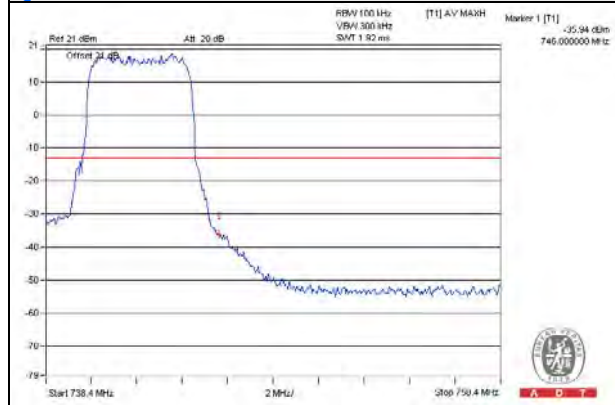

16QAM

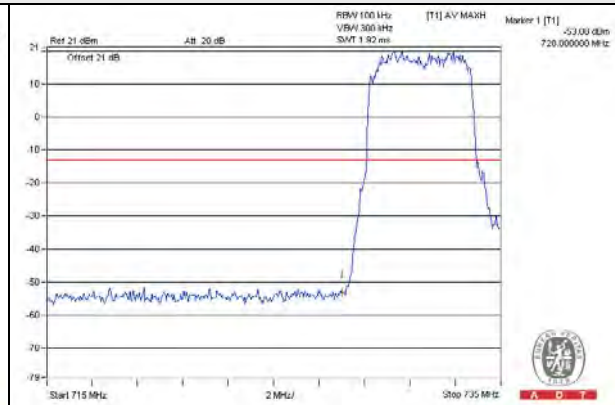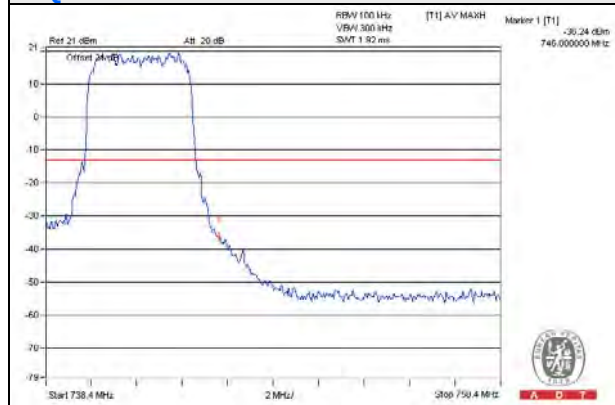

64QAM

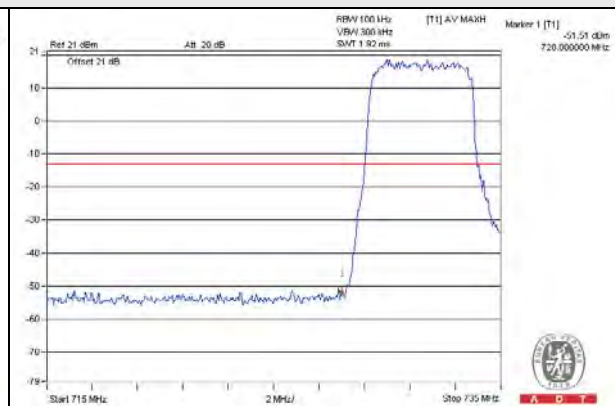
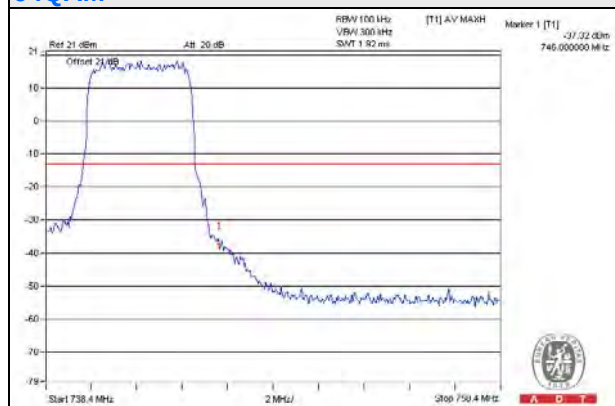


LTE Band 12 (Channel Bandwidth 5MHz): Chain 1



Frequency 742.5

Frequency 731.5



QPSK

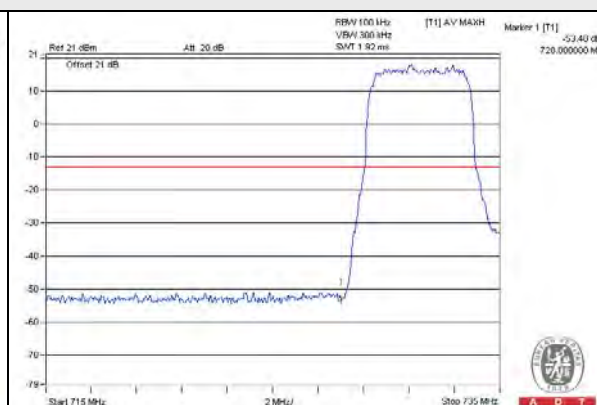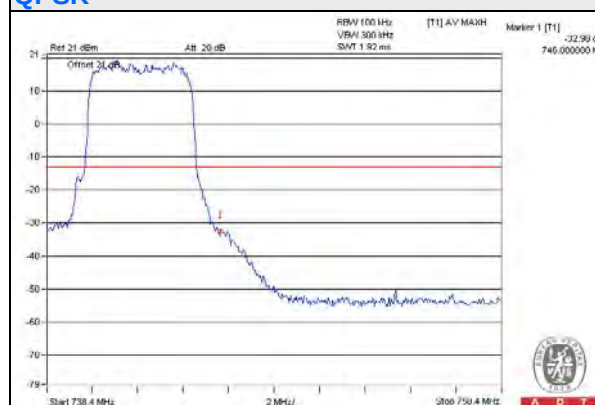

16QAM

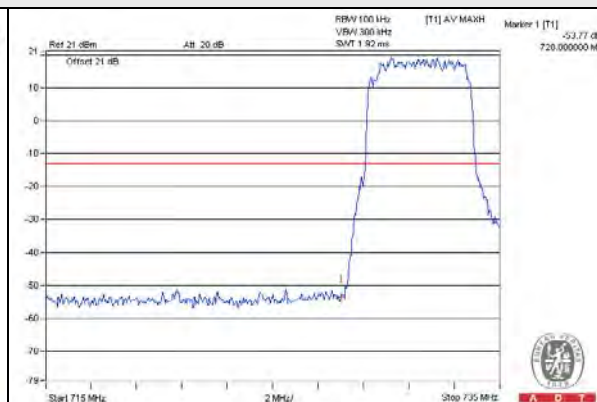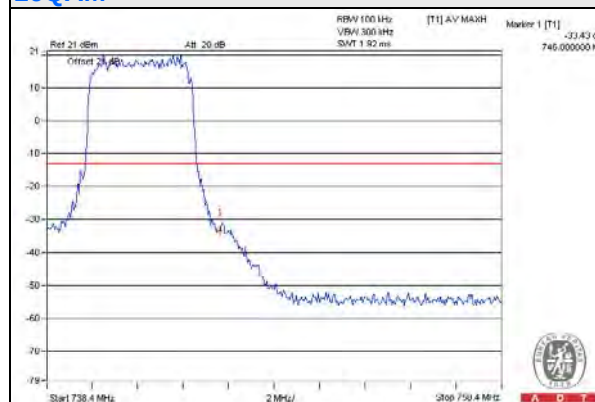

64QAM

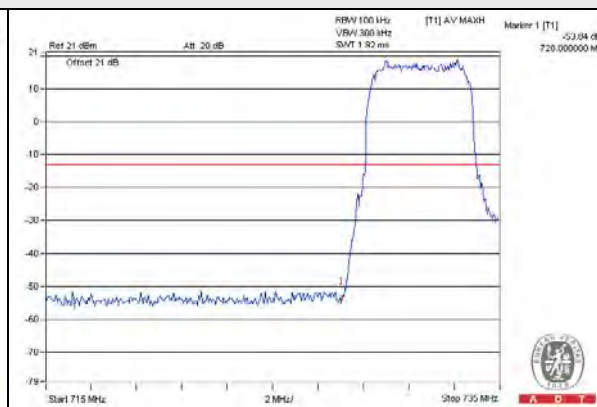
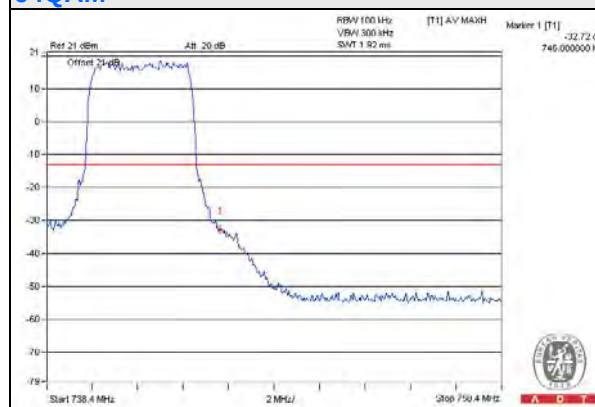


LTE Band 12 (Channel Bandwidth 10MHz): Chain 0



Frequency 740.0

Frequency 734.0



QPSK

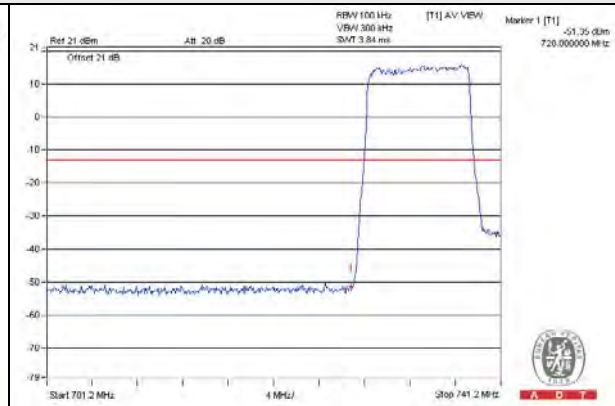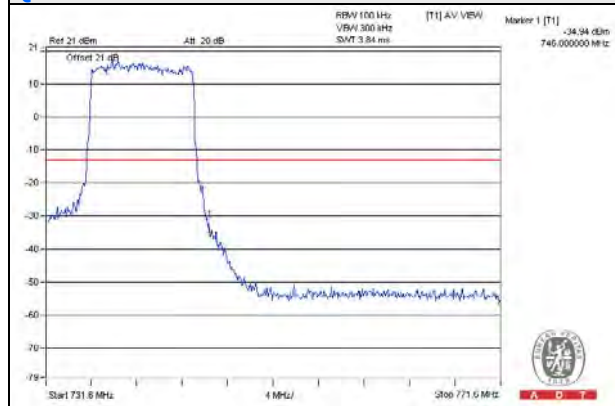

16QAM

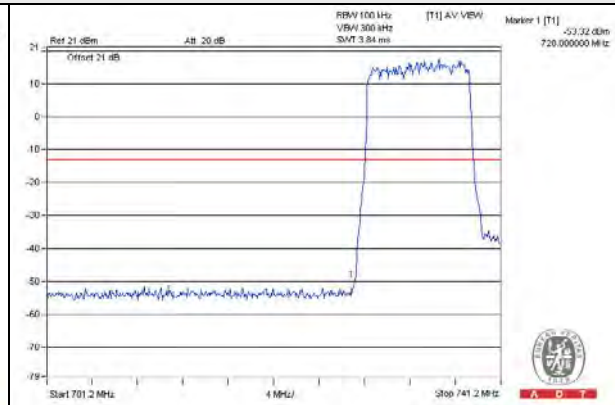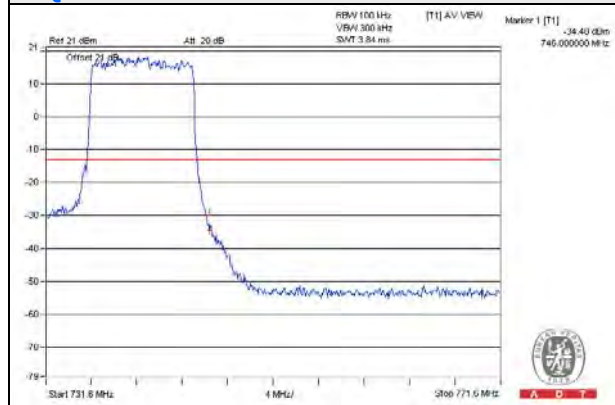

64QAM

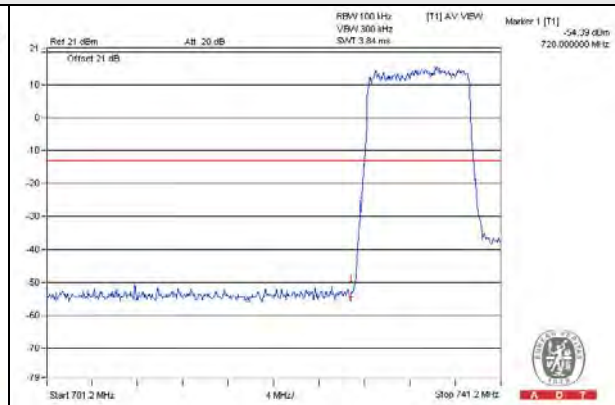
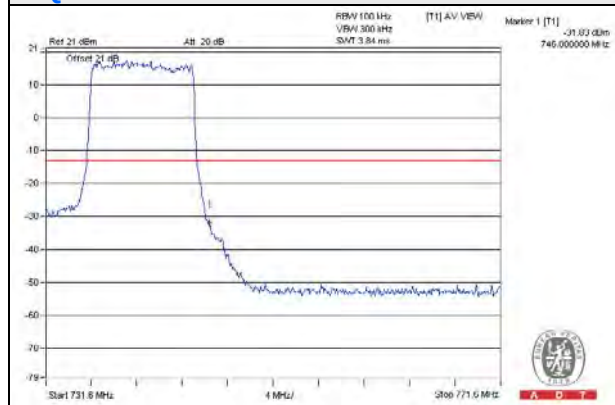


LTE Band 12 (Channel Bandwidth 10MHz): Chain 1



Frequency 740.0

Frequency 734.0



QPSK

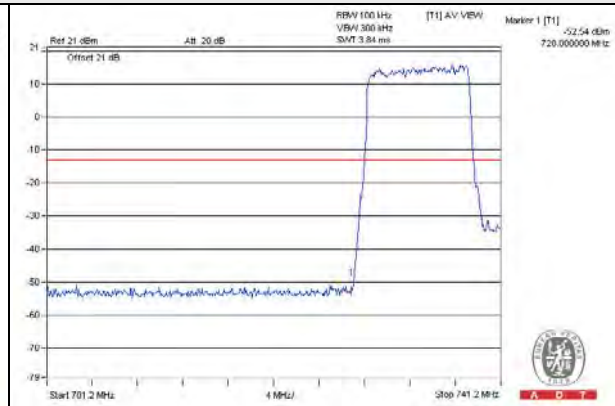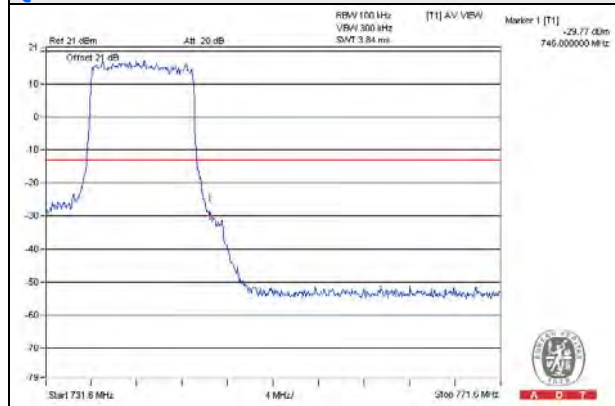

16QAM

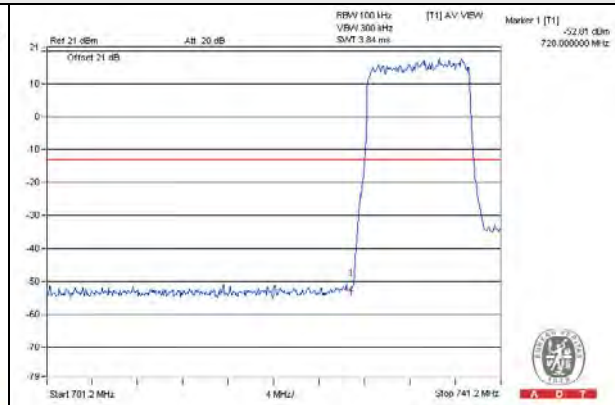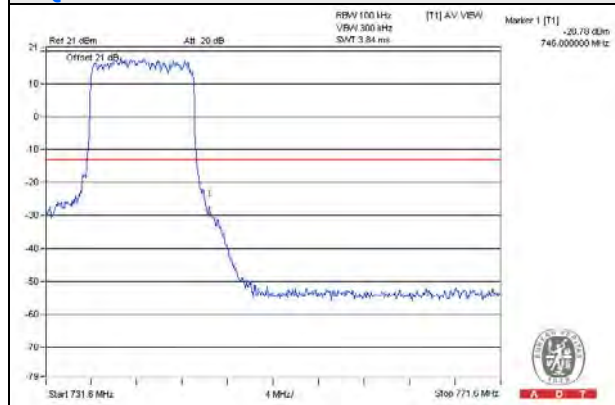

64QAM

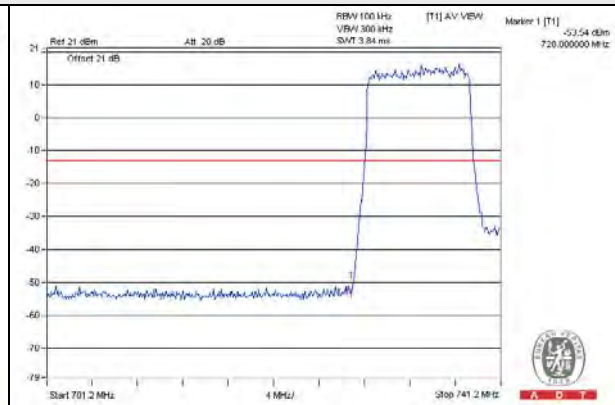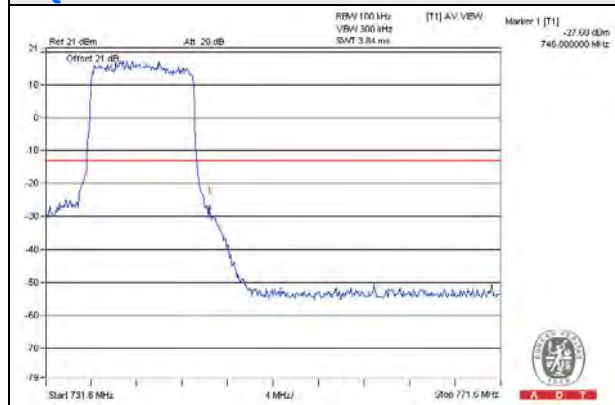


4.6 Conducted Spurious Emissions

4.6.1 Limits of Conducted Spurious Emissions Measurement

In the FCC 27.53(m)(4), On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The emission limit equal to -13dBm .

4.6.2 Test Setup

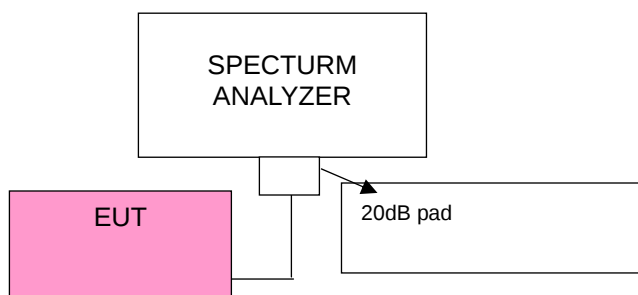


4.6.3 Test Procedure

- All measurements were done at 3 channels: low, middle and high operational frequency range.
- When the spectrum scanned from 9kHz to 22GHz, it shall be connected to the 20dB pad attenuated the carried frequency. The spectrum set $RB = 1\text{MHz}$, $VB = 3\text{MHz}$.

4.6.4 Test Results


Chain 0

LTE Band 4 (Channel Bandwidth 5MHz): QPSK

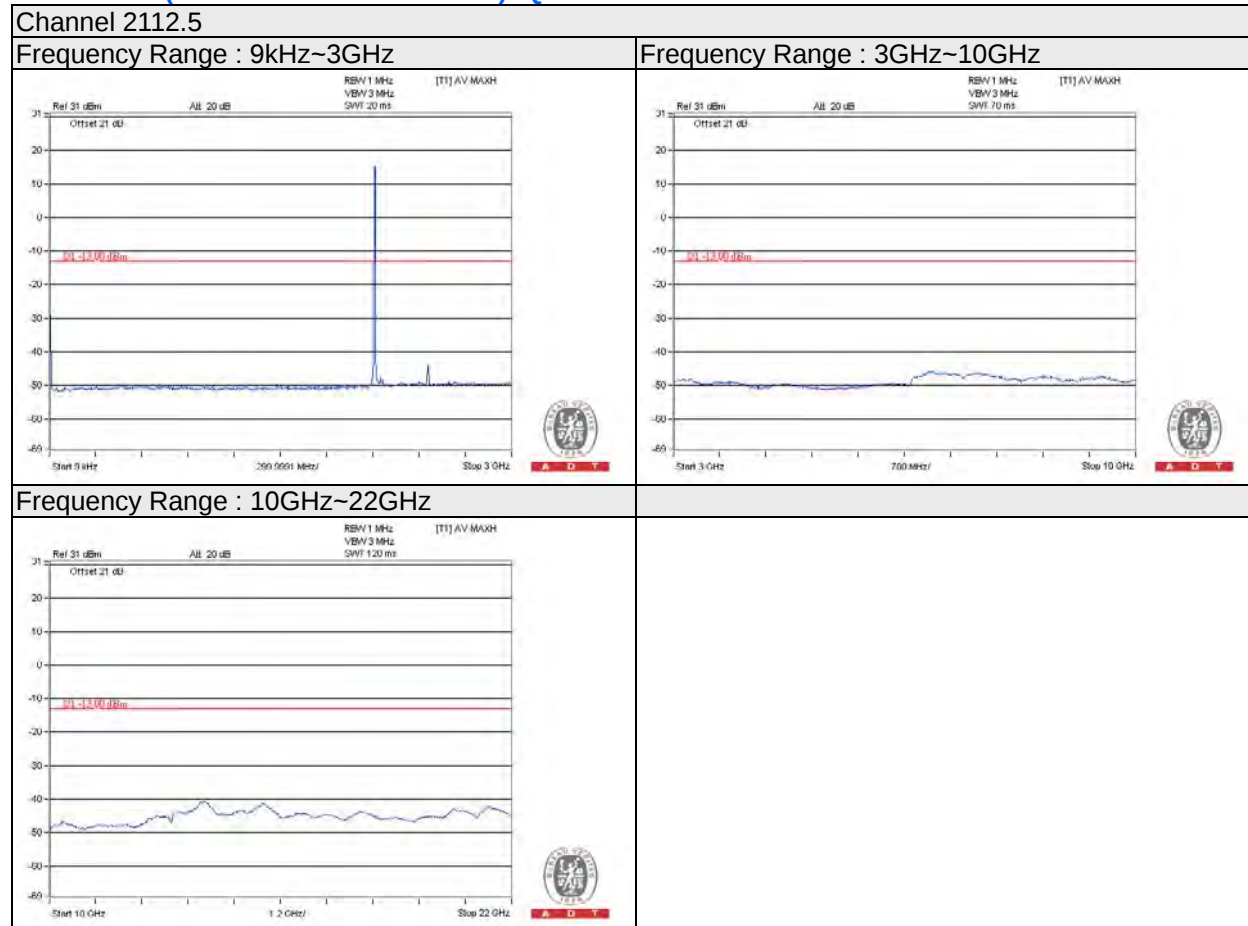


Channel 2132.5



Frequency Range : 9kHz~3GHz

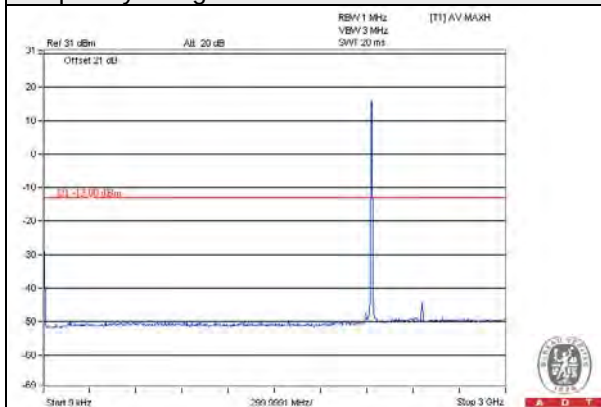

Frequency Range : 3GHz~10GHz

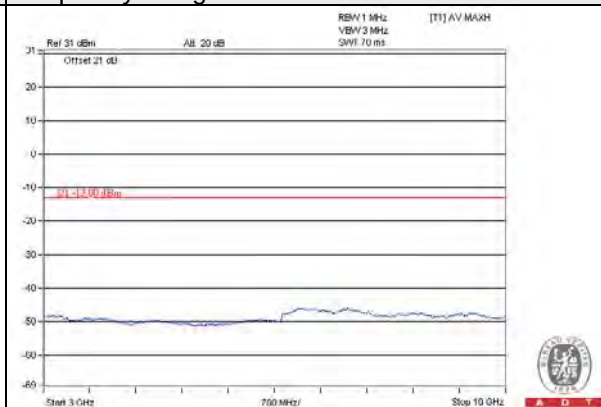


Frequency Range : 10GHz~22GHz

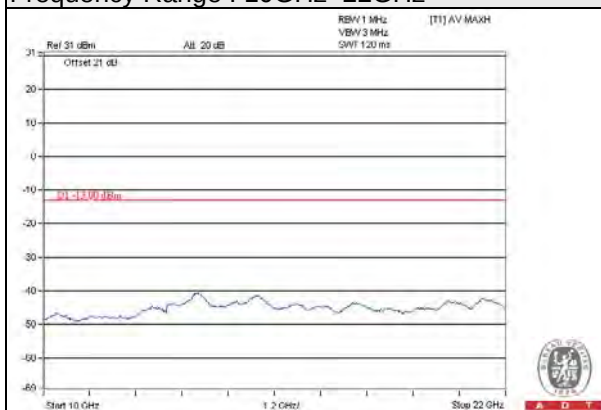


Channel 2152.5


Frequency Range : 9kHz~3GHz

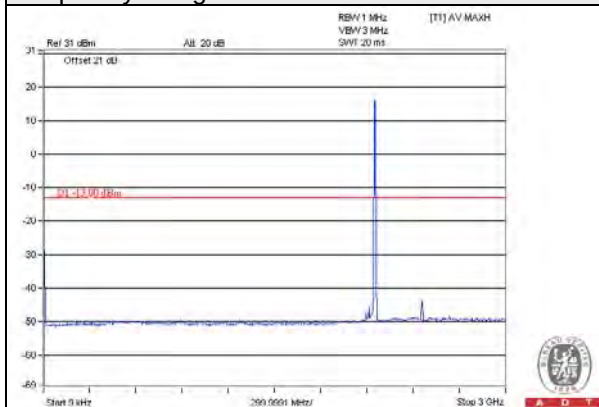

Frequency Range : 3GHz~10GHz

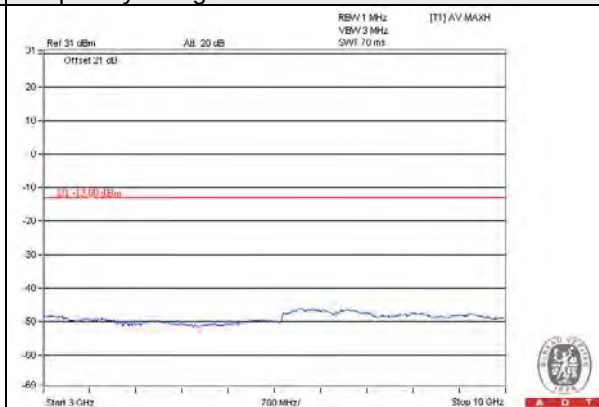


Frequency Range : 10GHz~22GHz




LTE Band 4 (Channel Bandwidth 5MHz): 16QAM

Channel 2112.5

Frequency Range : 9kHz~3GHz

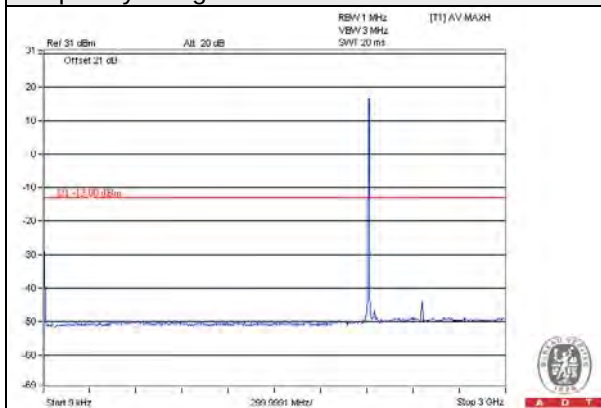

Frequency Range : 3GHz~10GHz

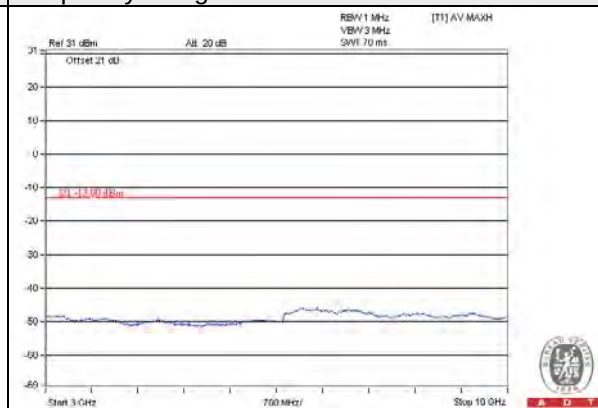


Frequency Range : 10GHz~22GHz




Channel 2132.5

Frequency Range : 9kHz~3GHz

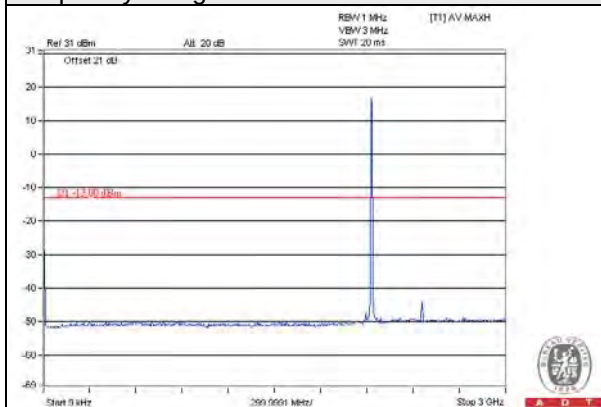

Frequency Range : 3GHz~10GHz

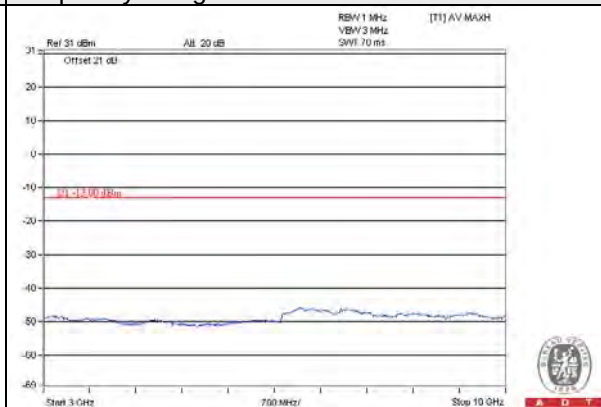


Frequency Range : 10GHz~22GHz




Channel 2152.5


Frequency Range : 9kHz~3GHz

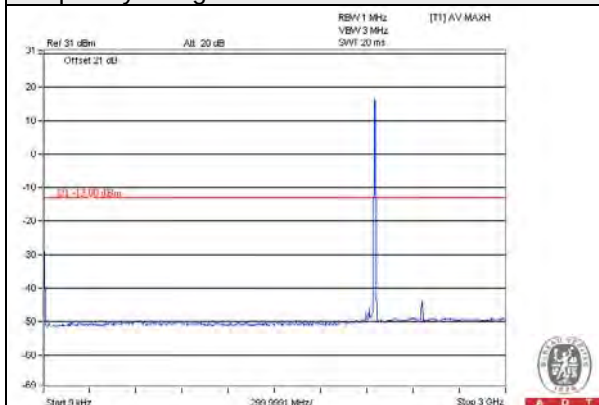

Frequency Range : 3GHz~10GHz

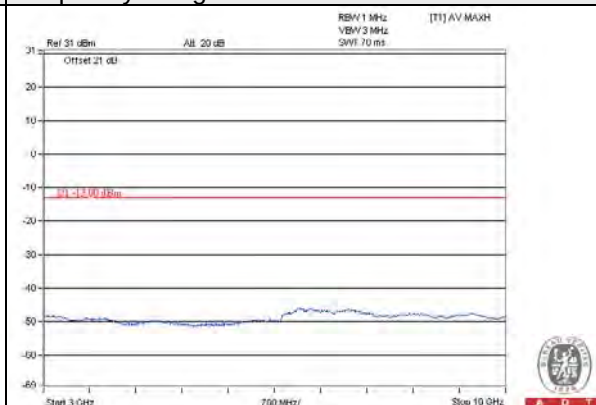


Frequency Range : 10GHz~22GHz

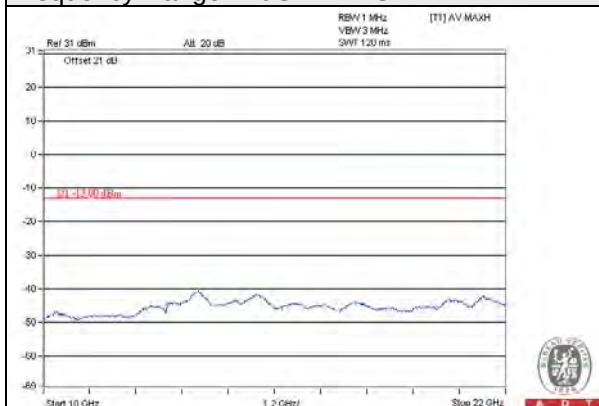


LTE Band 4 (Channel Bandwidth 5MHz): 64QAM

Channel 2112.5

Frequency Range : 9kHz~3GHz

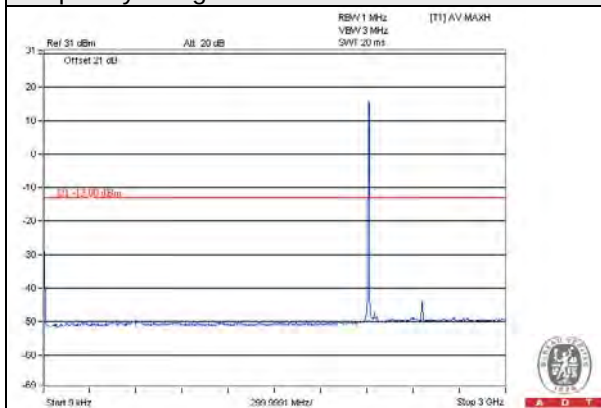

Frequency Range : 3GHz~10GHz

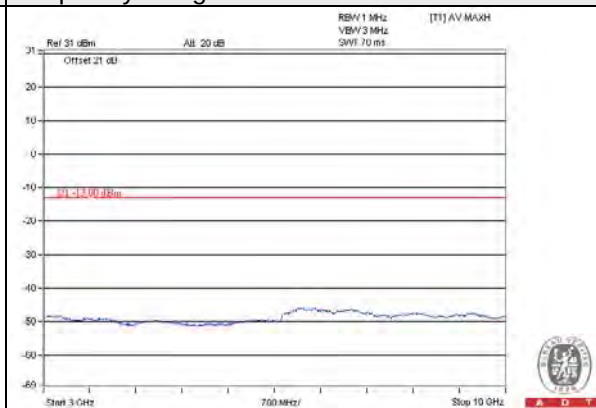


Frequency Range : 10GHz~22GHz




Channel 2132.5


Frequency Range : 9kHz~3GHz

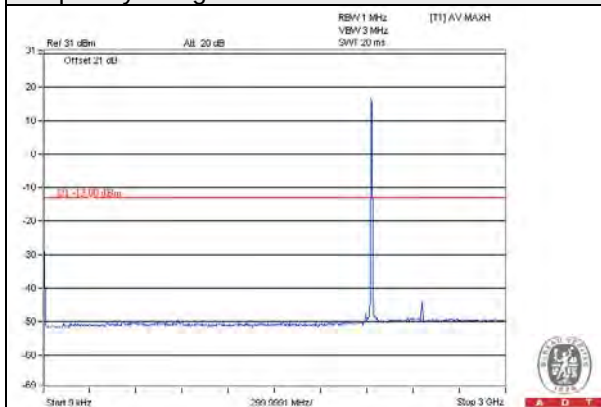

Frequency Range : 3GHz~10GHz

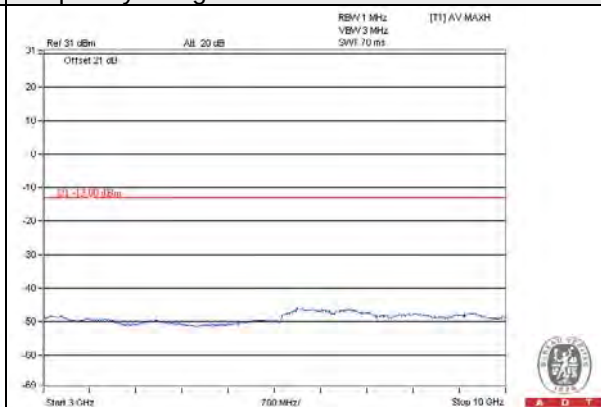


Frequency Range : 10GHz~22GHz

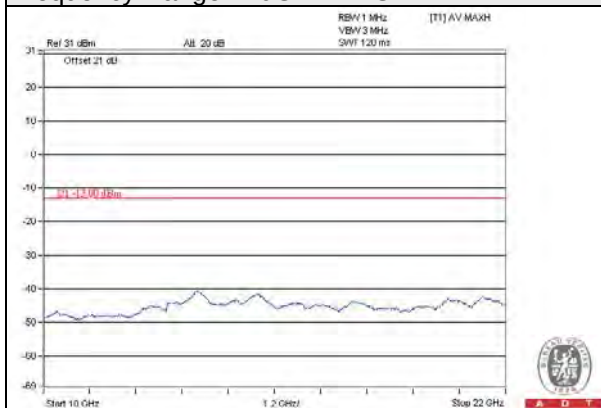


Channel 2152.5


Frequency Range : 9kHz~3GHz

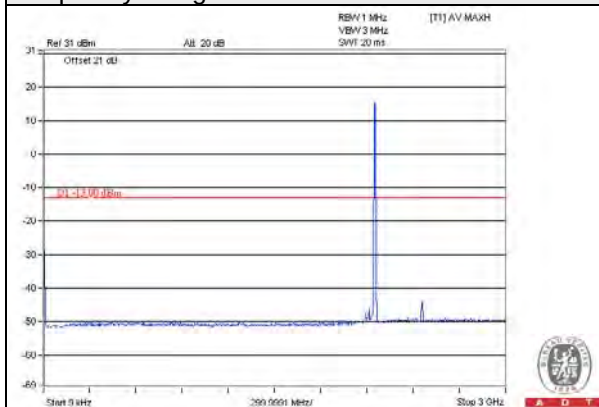

Frequency Range : 3GHz~10GHz

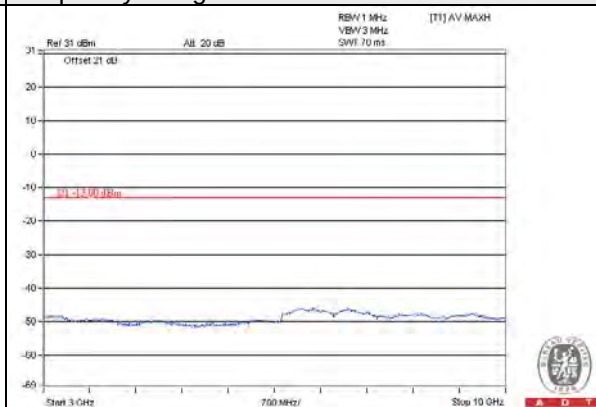

Frequency Range : 10GHz~22GHz

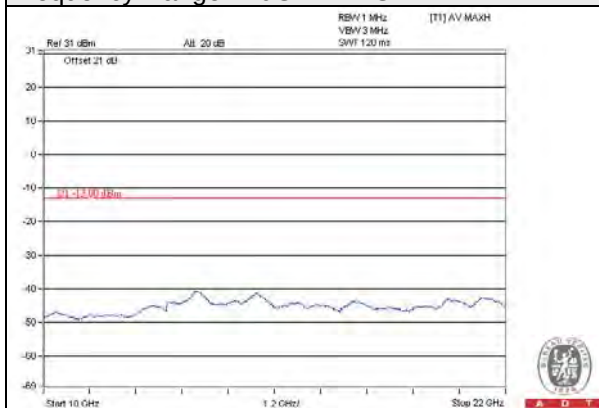


Chain 1


LTE Band 4 (Channel Bandwidth 5MHz): QPSK

Channel 2112.5

Frequency Range : 9kHz~3GHz

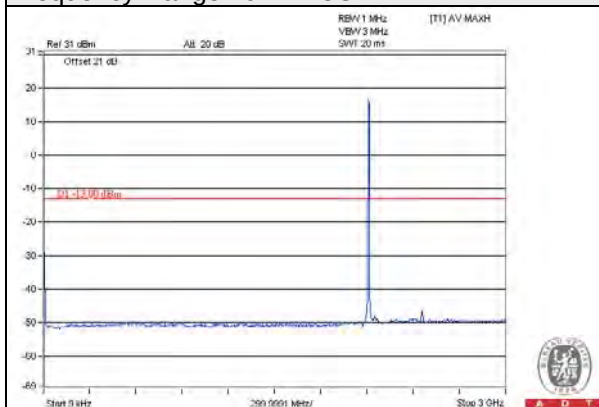

Frequency Range : 3GHz~10GHz

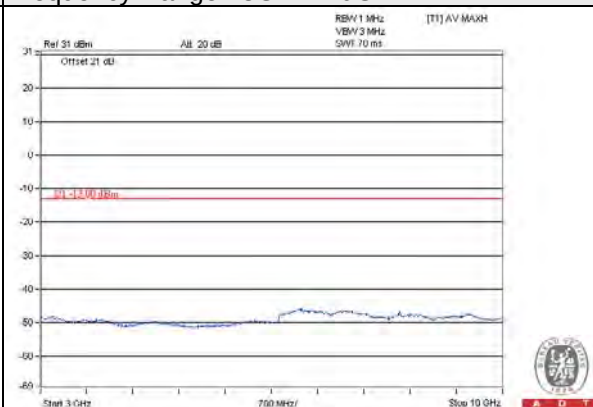


Frequency Range : 10GHz~22GHz




Channel 2132.5



Frequency Range : 9kHz~3GHz

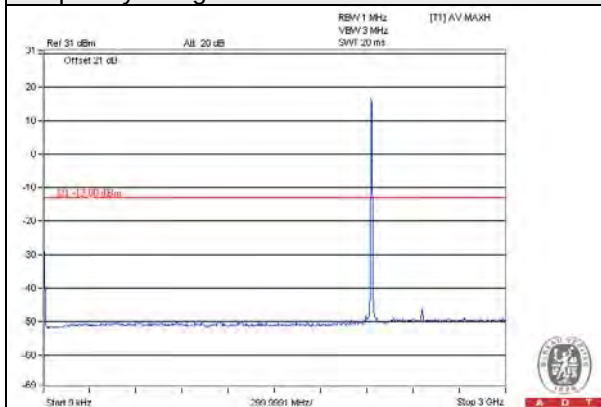

Frequency Range : 3GHz~10GHz

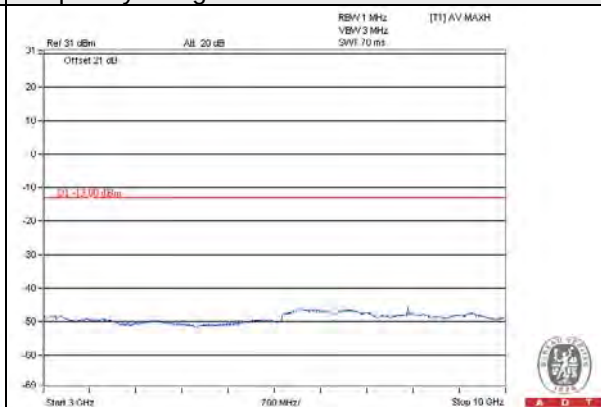


Frequency Range : 10GHz~22GHz

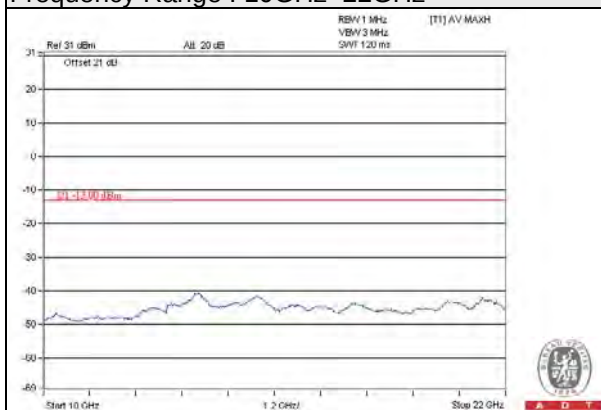


Channel 2152.5

Frequency Range : 9kHz~3GHz

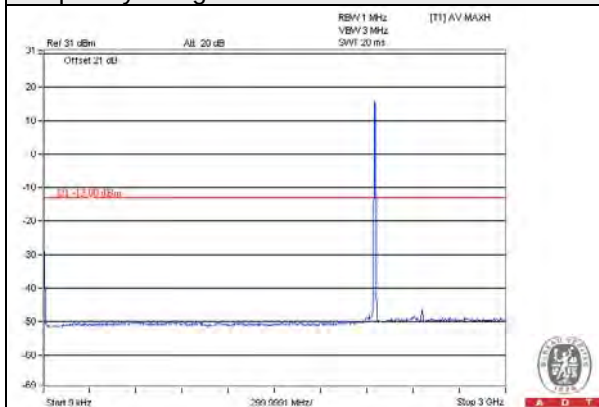

Frequency Range : 3GHz~10GHz

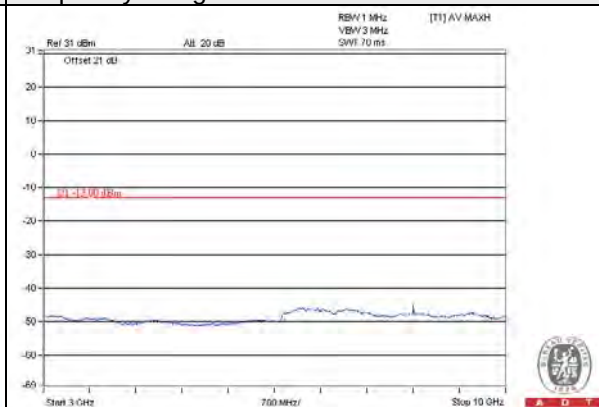


Frequency Range : 10GHz~22GHz




LTE Band 4 (Channel Bandwidth 5MHz): 16QAM

Channel 2112.5

Frequency Range : 9kHz~3GHz

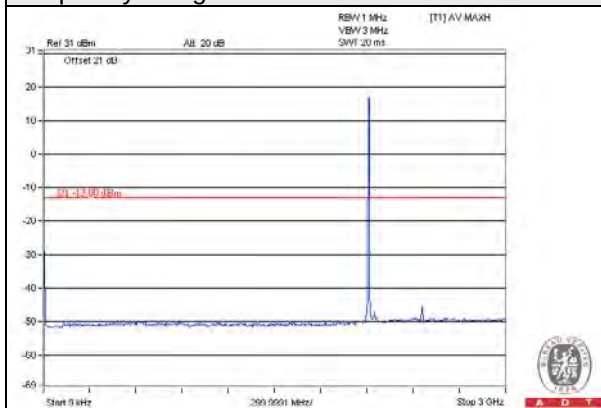

Frequency Range : 3GHz~10GHz

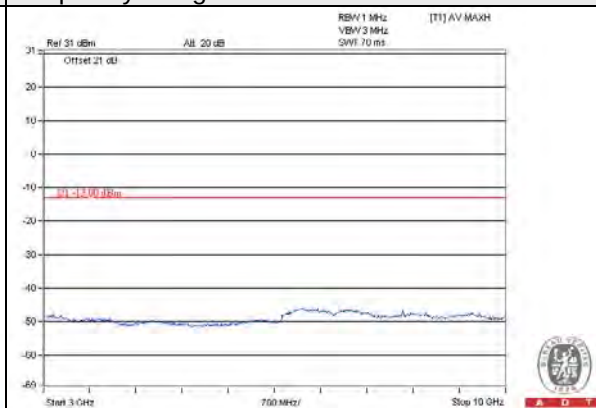


Frequency Range : 10GHz~22GHz




Channel 2132.5

Frequency Range : 9kHz~3GHz

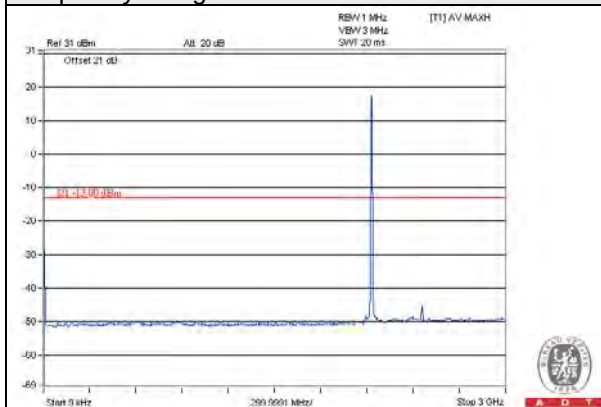

Frequency Range : 3GHz~10GHz

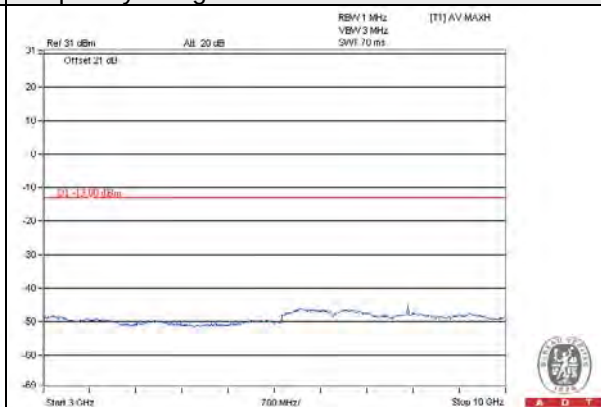


Frequency Range : 10GHz~22GHz




Channel 2152.5



Frequency Range : 9kHz~3GHz

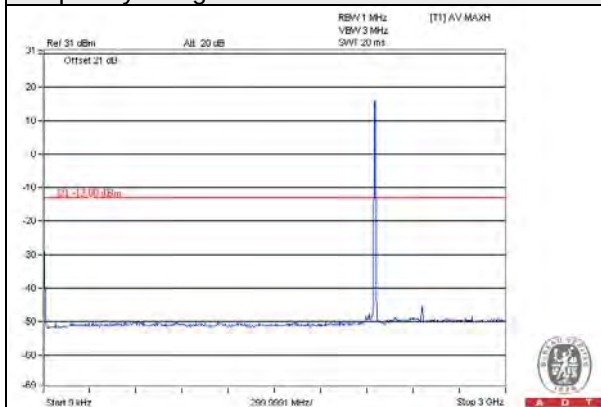

Frequency Range : 3GHz~10GHz

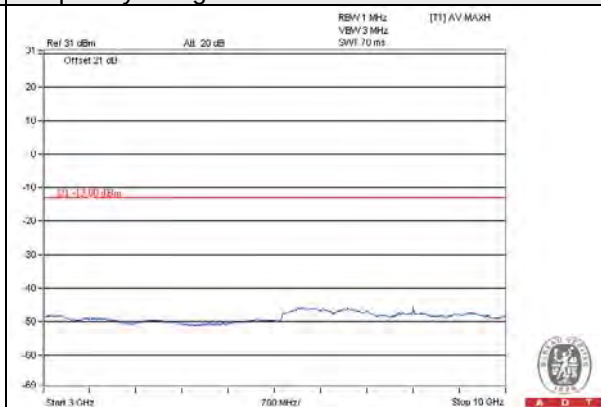


Frequency Range : 10GHz~22GHz

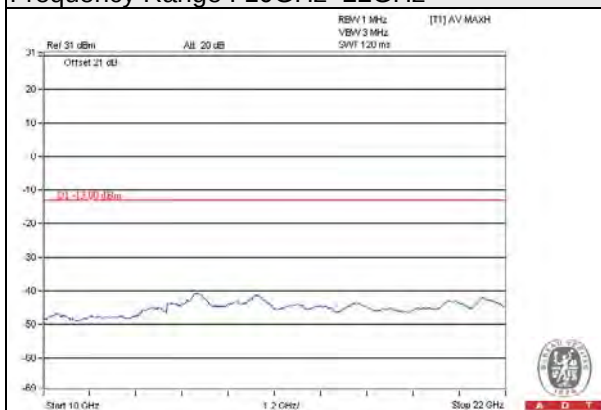


LTE Band 4 (Channel Bandwidth 5MHz): 64QAM

Channel 2112.5


Frequency Range : 9kHz~3GHz

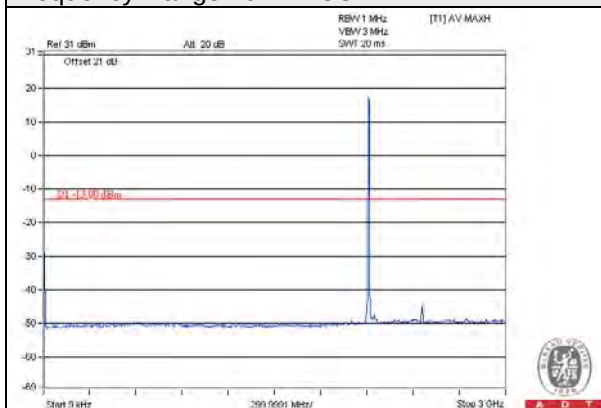

Frequency Range : 3GHz~10GHz

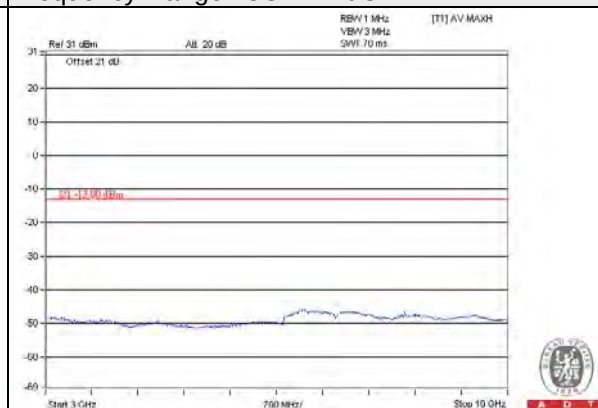


Frequency Range : 10GHz~22GHz

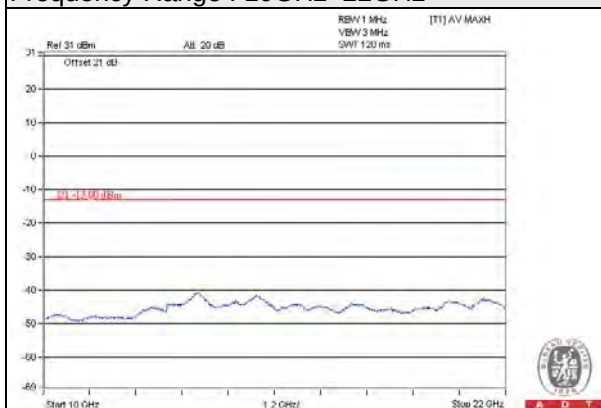


Channel 2132.5

Frequency Range : 9kHz~3GHz

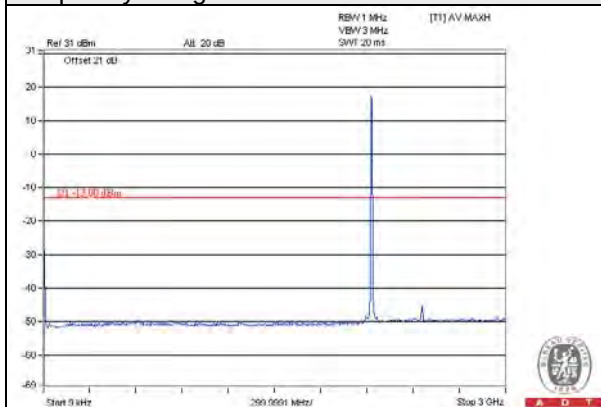

Frequency Range : 3GHz~10GHz

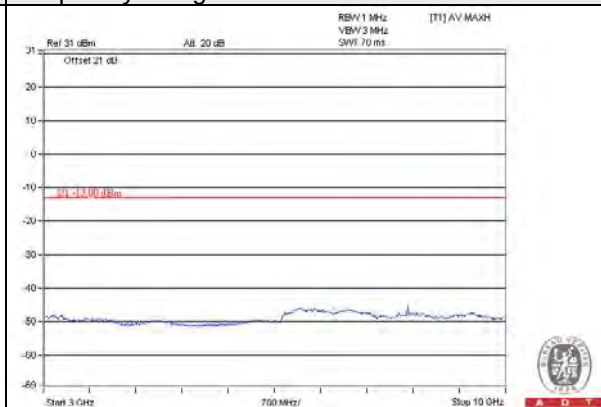


Frequency Range : 10GHz~22GHz




Channel 2152.5



Frequency Range : 9kHz~3GHz

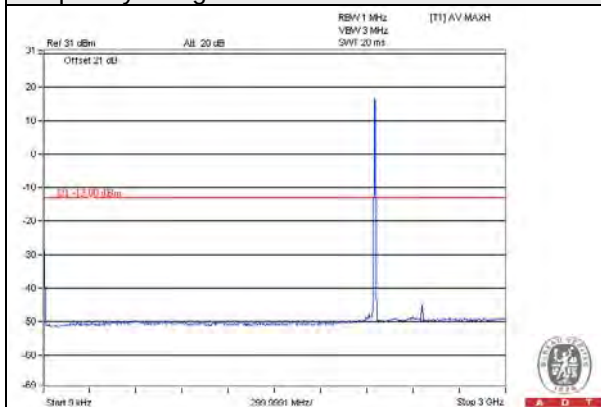

Frequency Range : 3GHz~10GHz

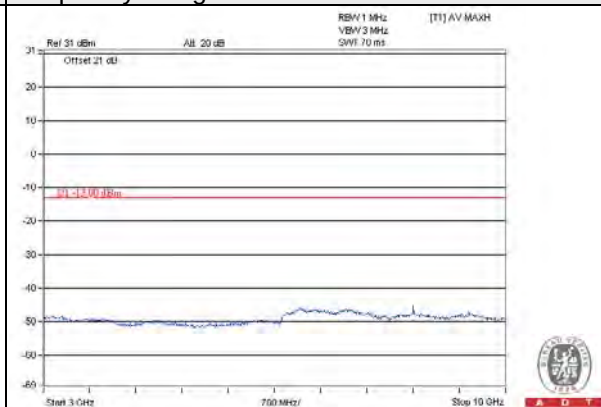


Frequency Range : 10GHz~22GHz

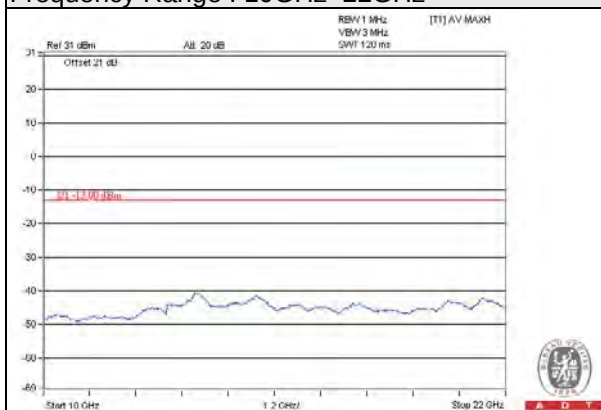


Chain 0 LTE Band 4 (Channel Bandwidth 10MHz): QPSK

Channel 2115.0


Frequency Range : 9kHz~3GHz

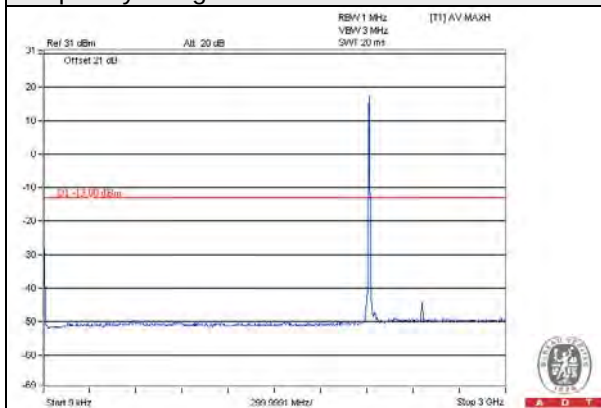

Frequency Range : 3GHz~10GHz

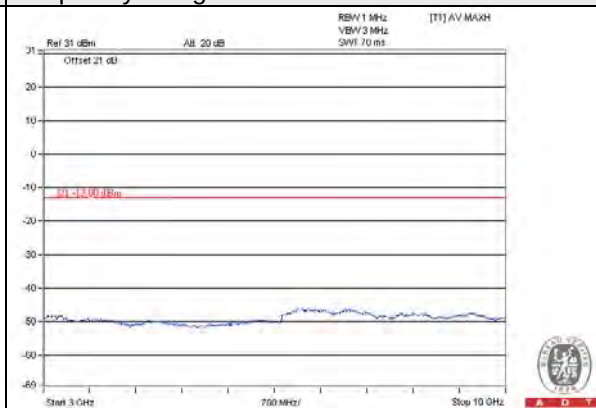


Frequency Range : 10GHz~22GHz

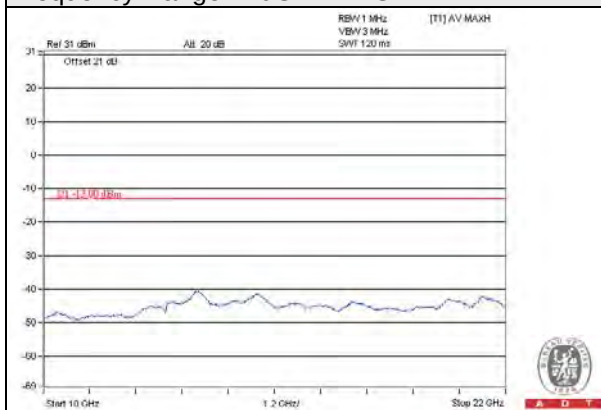


Channel 2132.5


Frequency Range : 9kHz~3GHz

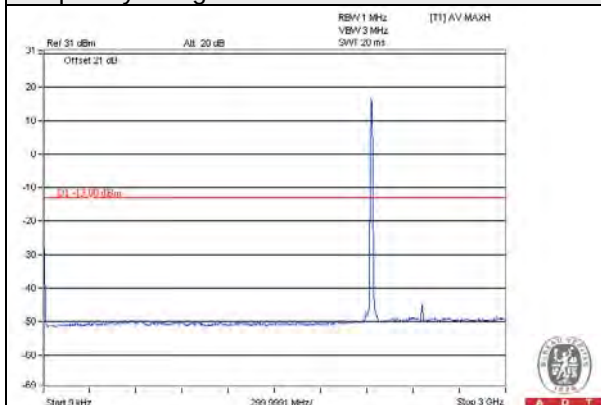

Frequency Range : 3GHz~10GHz

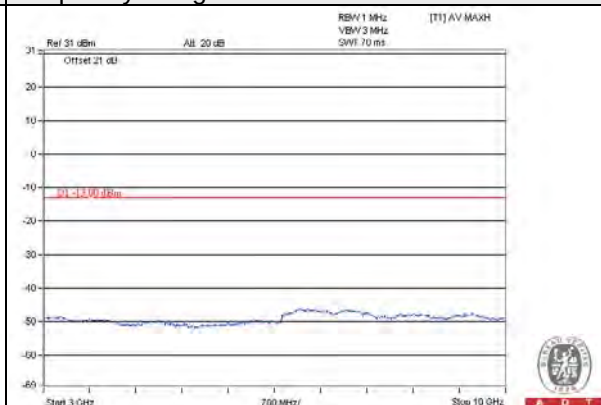


Frequency Range : 10GHz~22GHz




Channel 2150.0


Frequency Range : 9kHz~3GHz

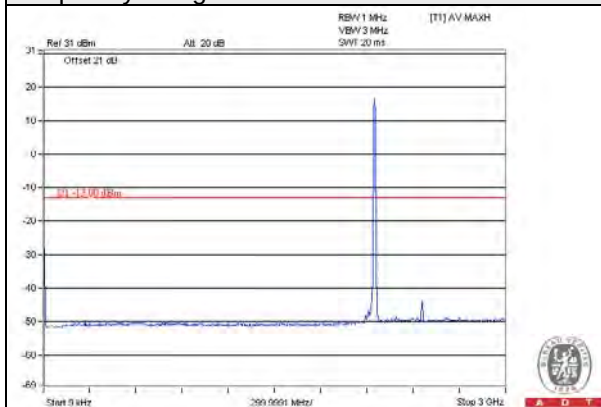

Frequency Range : 3GHz~10GHz

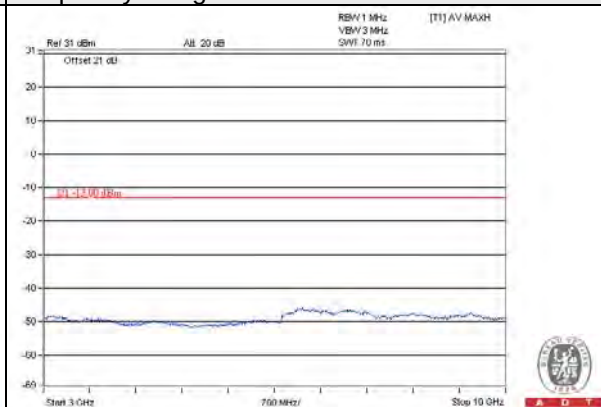


Frequency Range : 10GHz~22GHz




LTE Band 4 (Channel Bandwidth 10MHz): 16QAM

Channel 2115.0

Frequency Range : 9kHz~3GHz

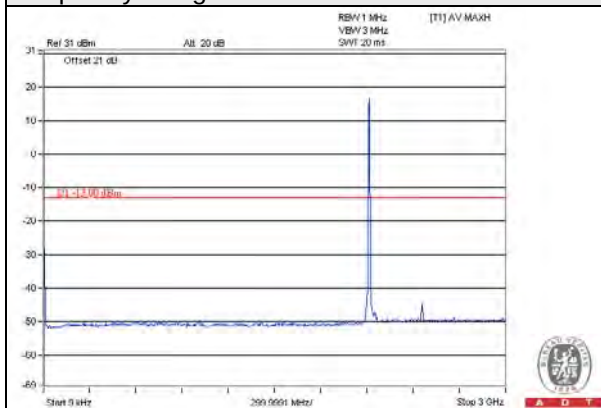

Frequency Range : 3GHz~10GHz

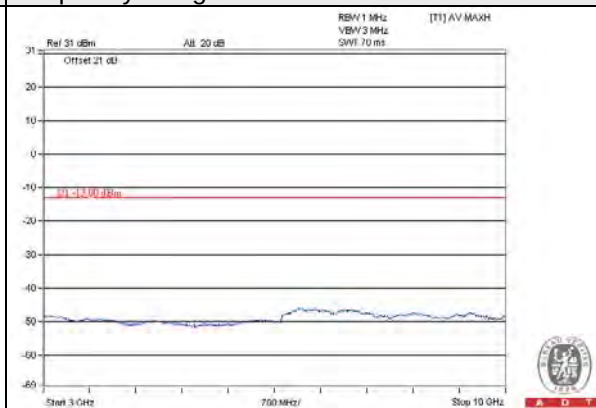


Frequency Range : 10GHz~22GHz




Channel 2132.5


Frequency Range : 9kHz~3GHz

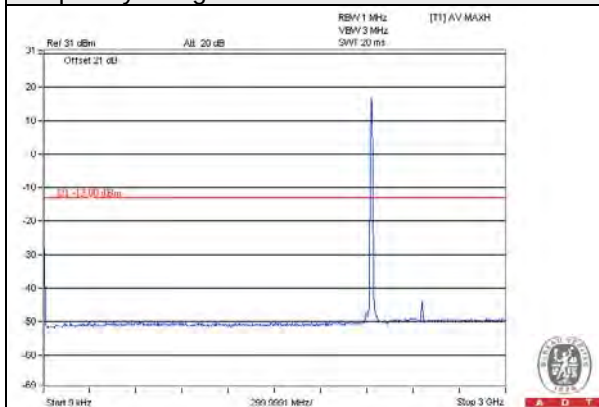

Frequency Range : 3GHz~10GHz

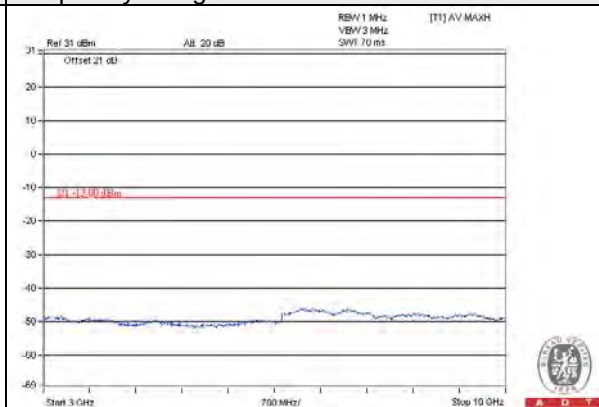


Frequency Range : 10GHz~22GHz

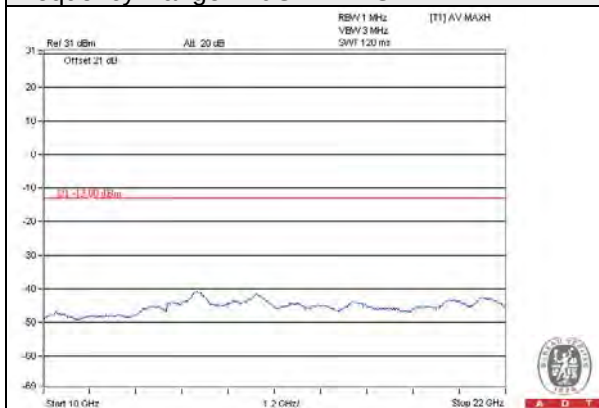


Channel 2150.0


Frequency Range : 9kHz~3GHz

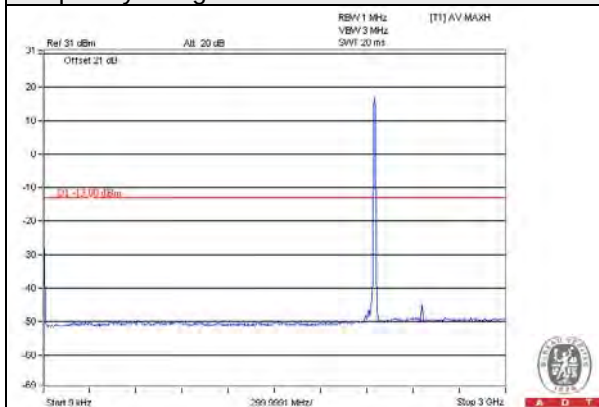

Frequency Range : 3GHz~10GHz

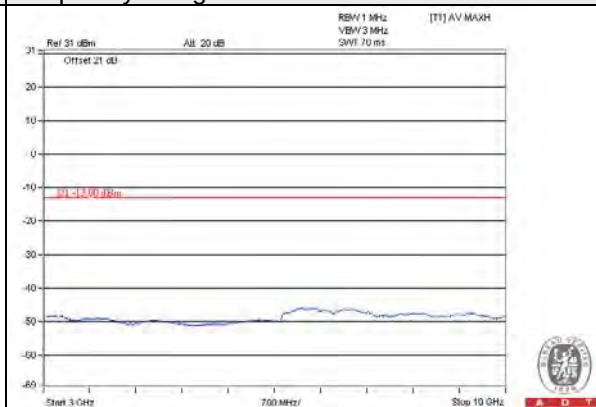


Frequency Range : 10GHz~22GHz




LTE Band 4 (Channel Bandwidth 10MHz): 64QAM

Channel 2115.0

Frequency Range : 9kHz~3GHz

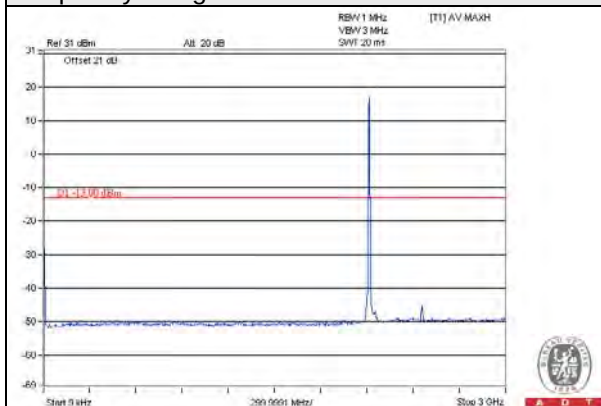

Frequency Range : 3GHz~10GHz

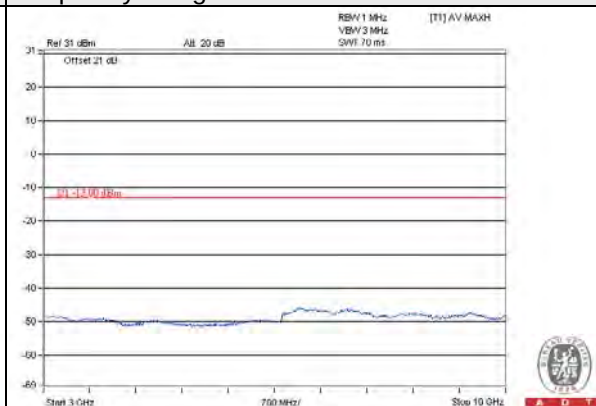


Frequency Range : 10GHz~22GHz




Channel 2132.5


Frequency Range : 9kHz~3GHz

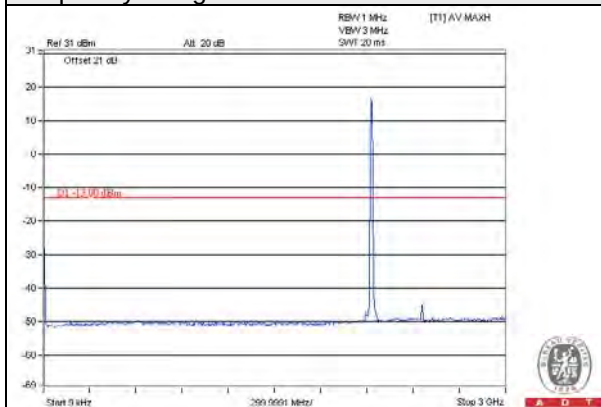

Frequency Range : 3GHz~10GHz

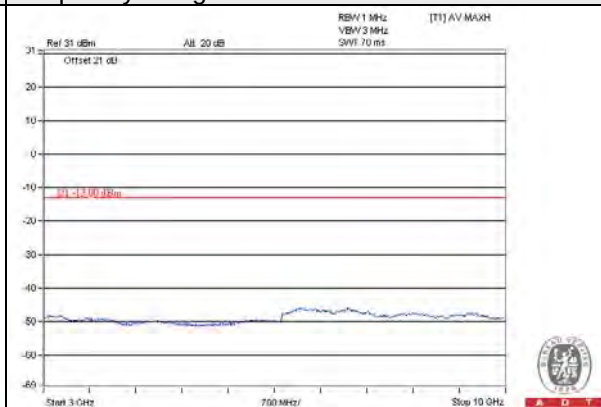


Frequency Range : 10GHz~22GHz

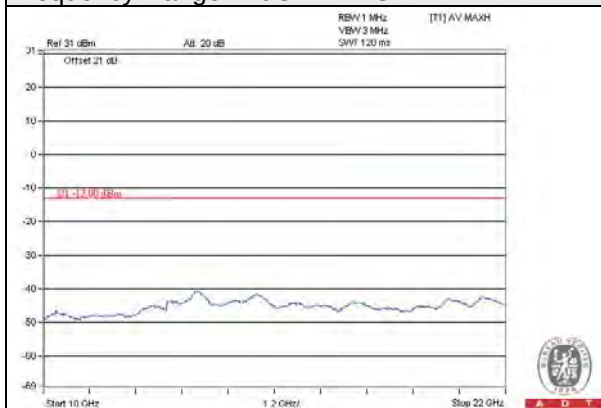


Channel 2150.0


Frequency Range : 9kHz~3GHz

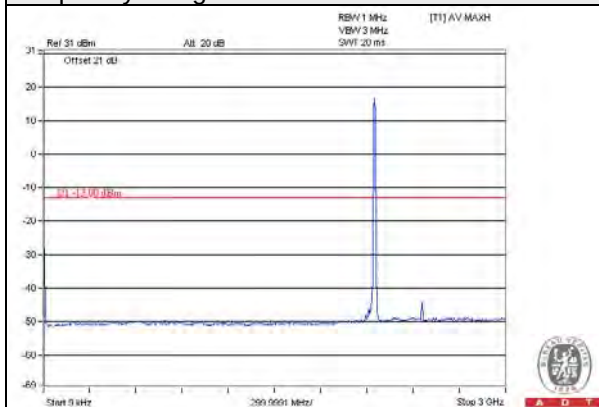

Frequency Range : 3GHz~10GHz

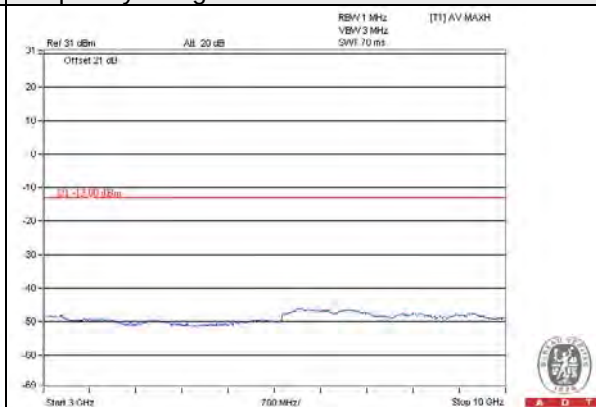

Frequency Range : 10GHz~22GHz

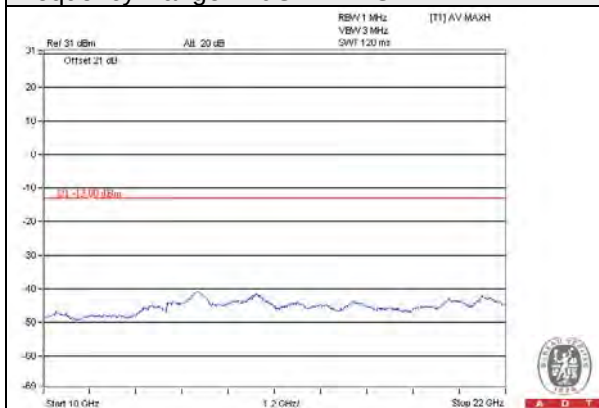


Chain 1


LTE Band 4 (Channel Bandwidth 10MHz): QPSK

Channel 2115.0


Frequency Range : 9kHz~3GHz

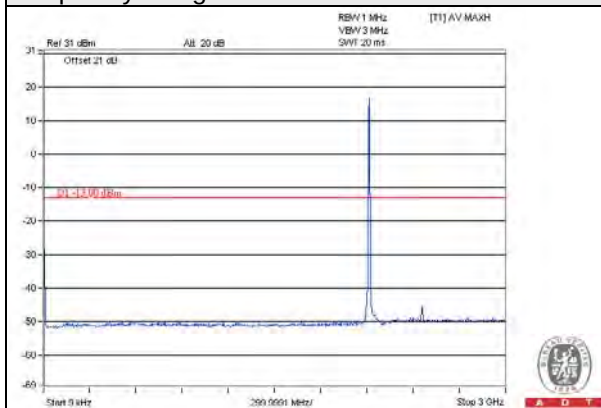

Frequency Range : 3GHz~10GHz

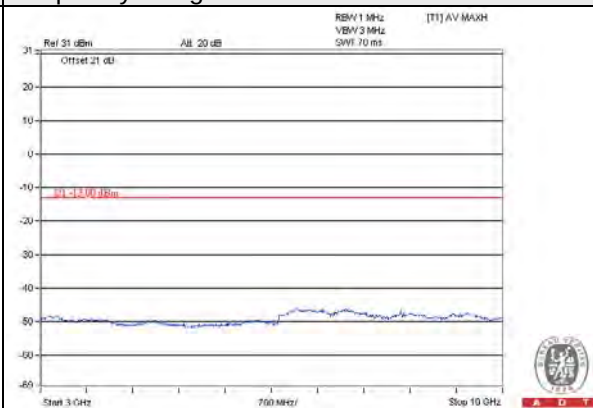


Frequency Range : 10GHz~22GHz

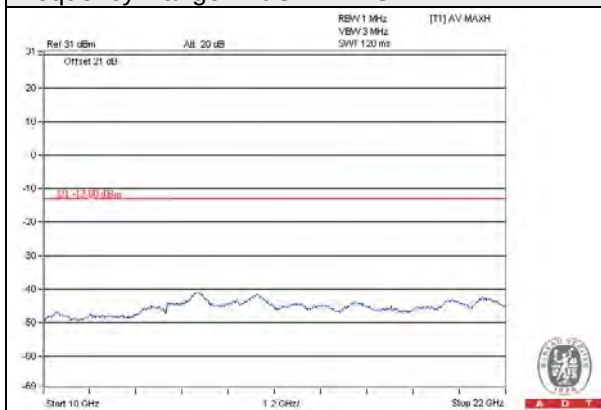


Channel 2132.5


Frequency Range : 9kHz~3GHz

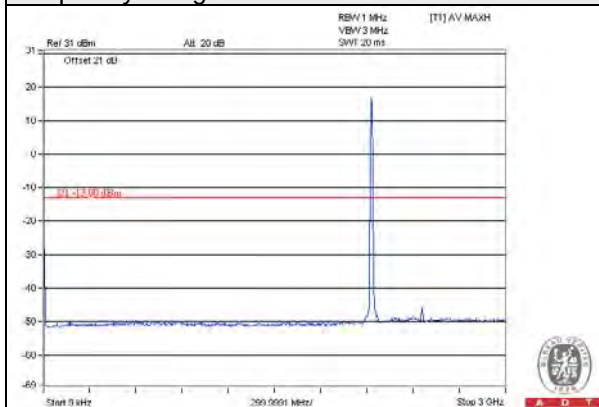

Frequency Range : 3GHz~10GHz

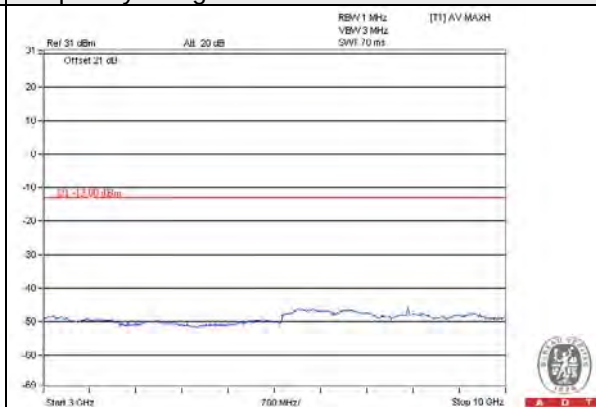


Frequency Range : 10GHz~22GHz




Channel 2150.0


Frequency Range : 9kHz~3GHz

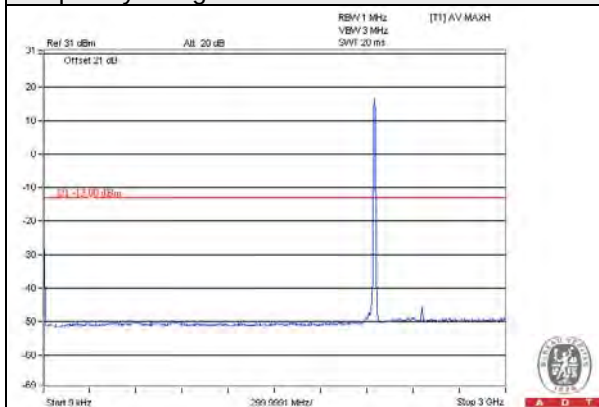

Frequency Range : 3GHz~10GHz

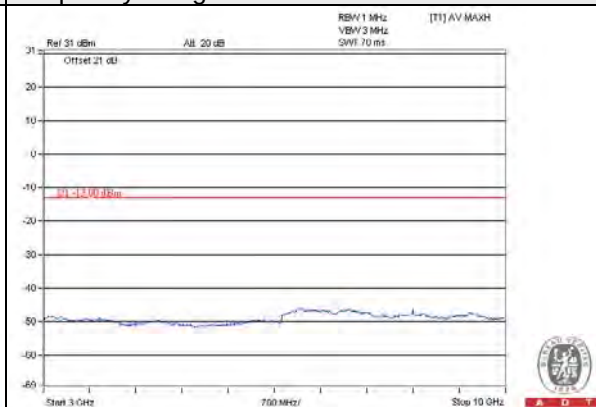


Frequency Range : 10GHz~22GHz

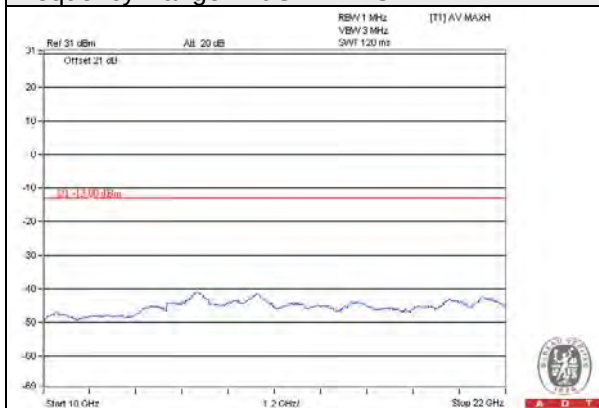


LTE Band 4 (Channel Bandwidth 10MHz): 16QAM

Channel 2115.0


Frequency Range : 9kHz~3GHz

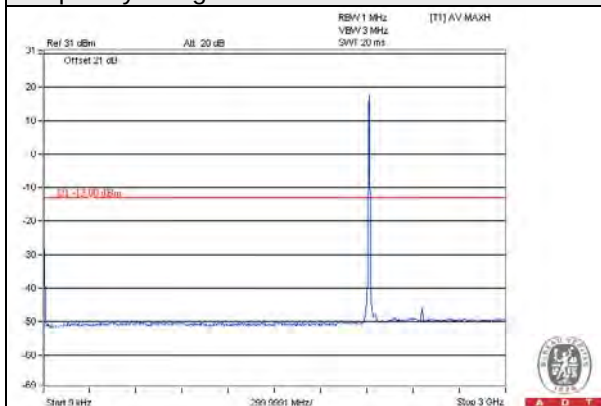

Frequency Range : 3GHz~10GHz

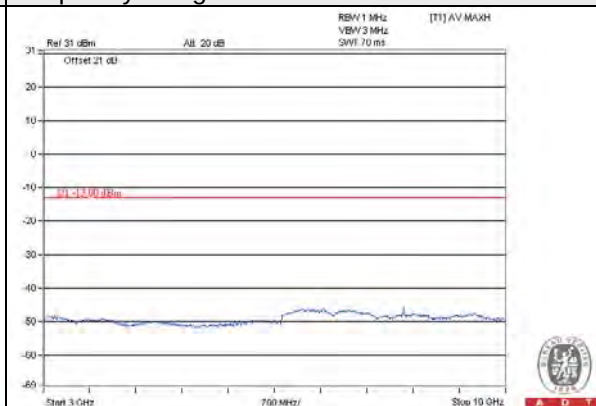


Frequency Range : 10GHz~22GHz

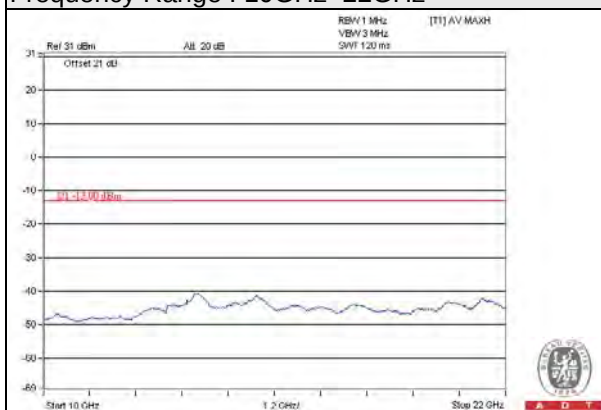


Channel 2132.5


Frequency Range : 9kHz~3GHz

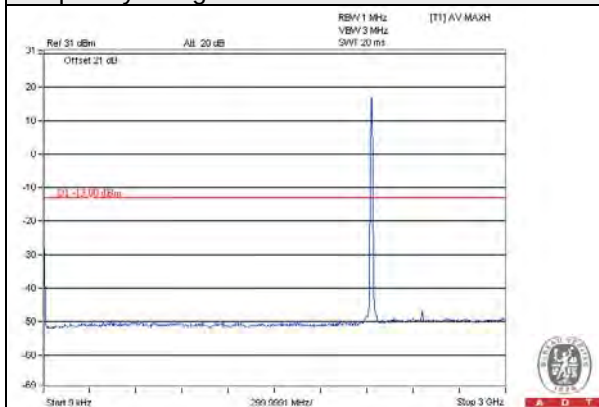

Frequency Range : 3GHz~10GHz

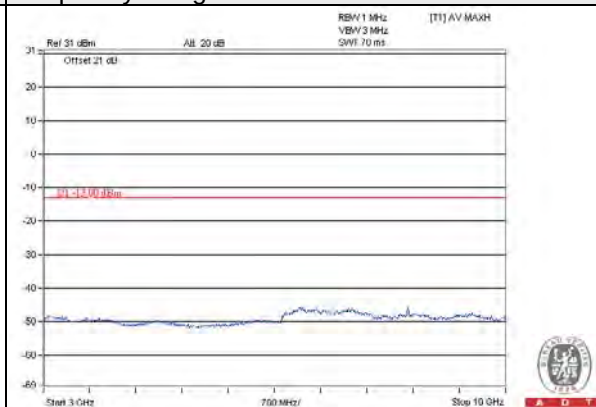


Frequency Range : 10GHz~22GHz




Channel 2150.0

Frequency Range : 9kHz~3GHz

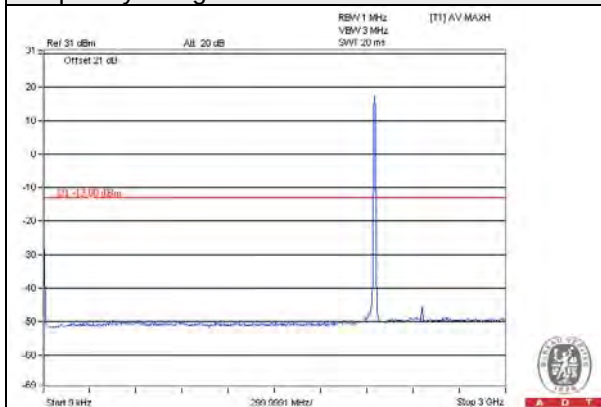

Frequency Range : 3GHz~10GHz

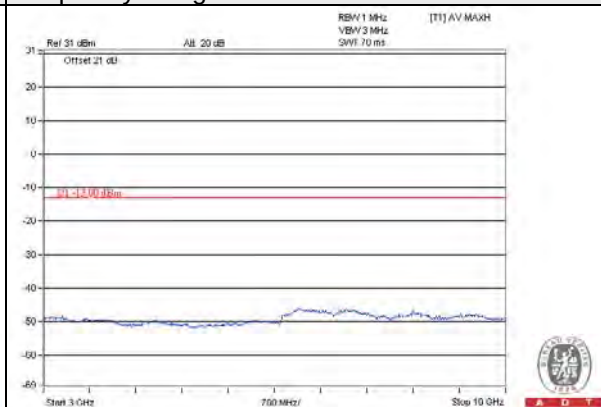


Frequency Range : 10GHz~22GHz




LTE Band 4 (Channel Bandwidth 10MHz): 64QAM

Channel 2115.0

Frequency Range : 9kHz~3GHz

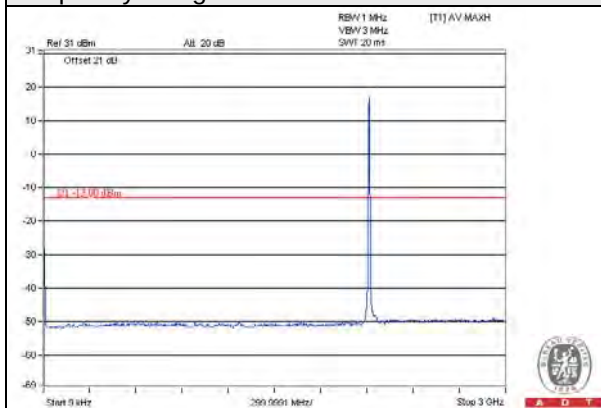

Frequency Range : 3GHz~10GHz

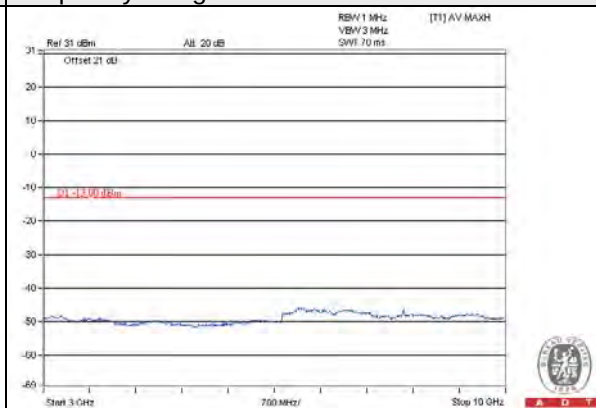


Frequency Range : 10GHz~22GHz




Channel 2132.5


Frequency Range : 9kHz~3GHz

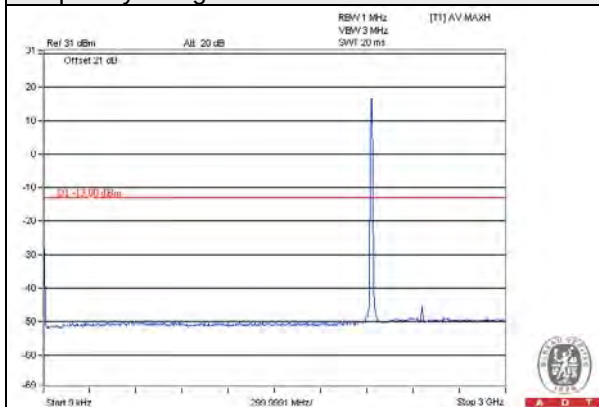

Frequency Range : 3GHz~10GHz

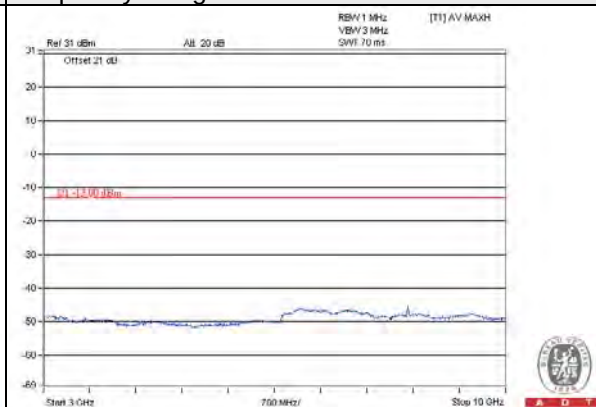


Frequency Range : 10GHz~22GHz

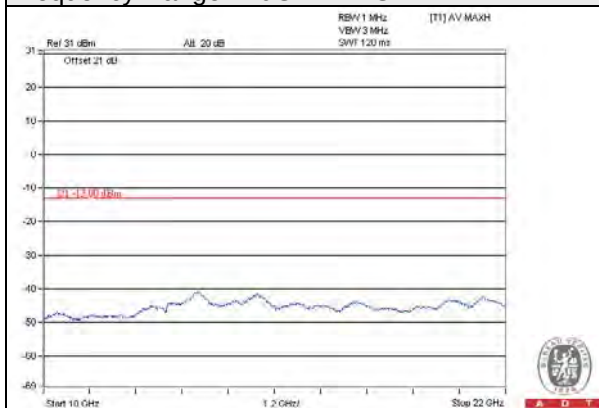


Channel 2150.0


Frequency Range : 9kHz~3GHz

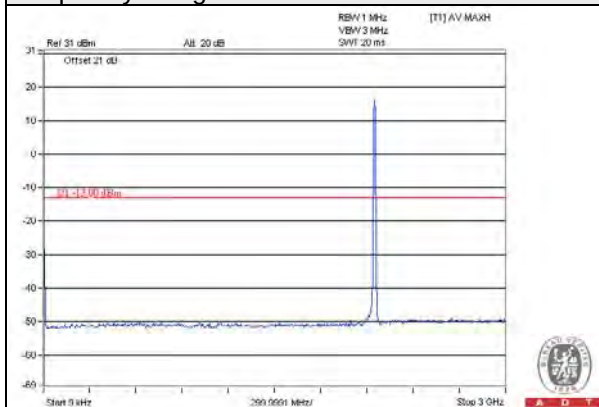

Frequency Range : 3GHz~10GHz

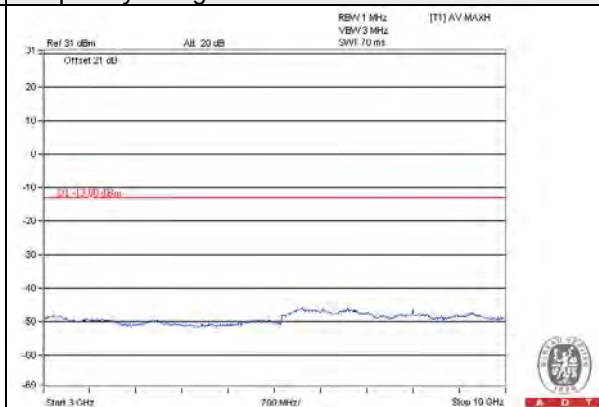

Frequency Range : 10GHz~22GHz

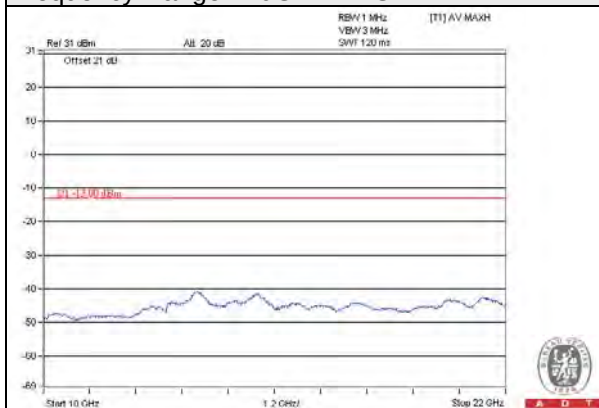


Chain 0


LTE Band 12 (Channel Bandwidth 5MHz): QPSK

Channel 731.5

Frequency Range : 9kHz~3GHz

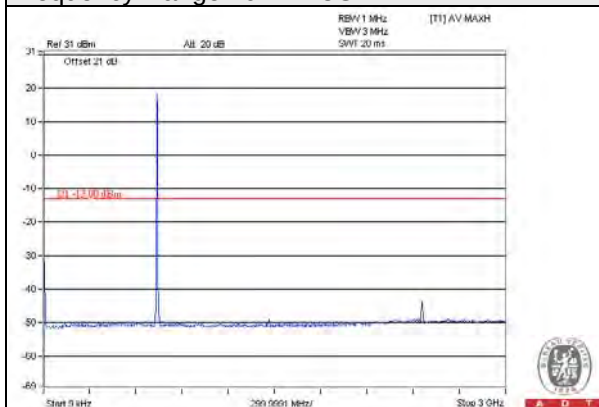

Frequency Range : 3GHz~10GHz

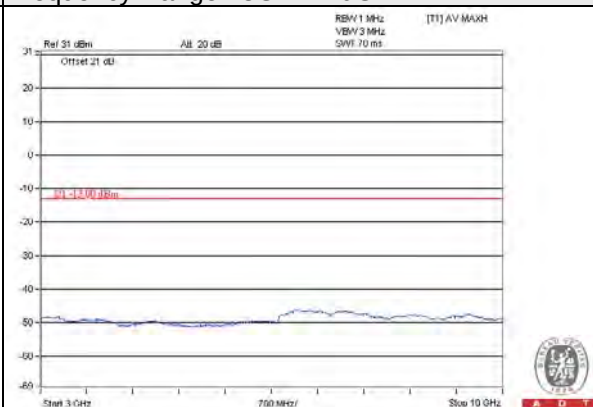


Frequency Range : 10GHz~22GHz




Channel 737.0


Frequency Range : 9kHz~3GHz

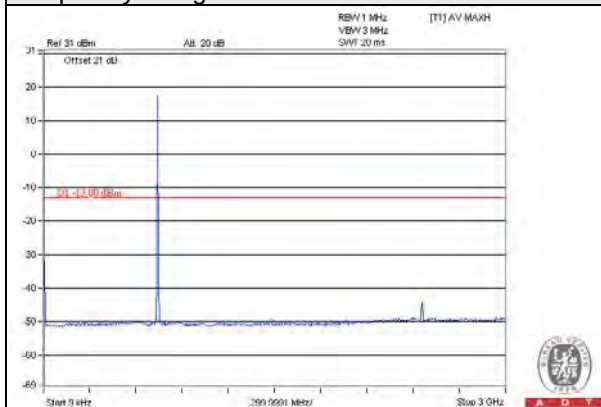

Frequency Range : 3GHz~10GHz

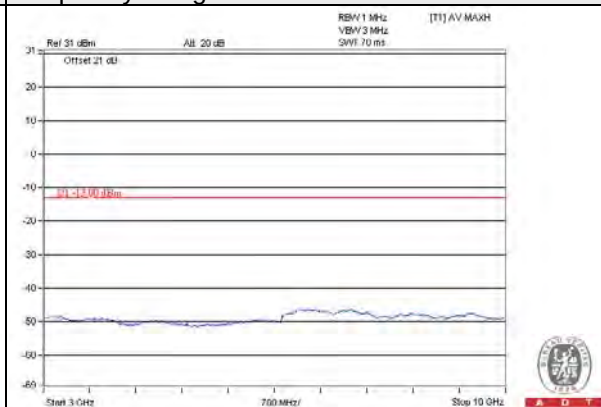


Frequency Range : 10GHz~22GHz

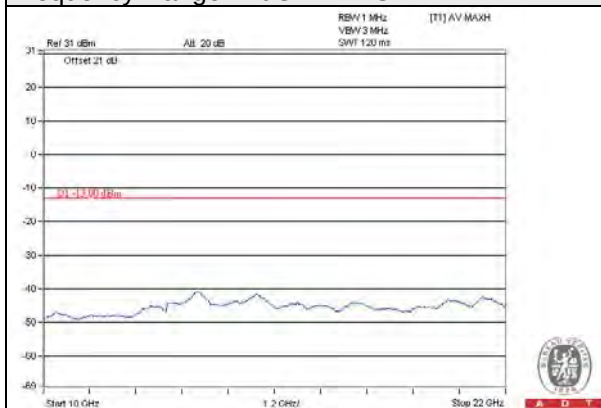


Channel 742.5

Frequency Range : 9kHz~3GHz

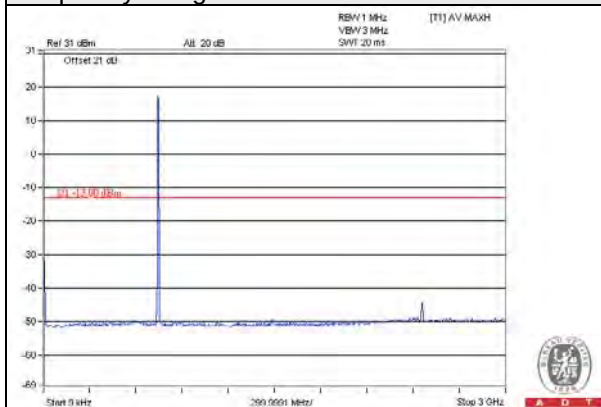

Frequency Range : 3GHz~10GHz

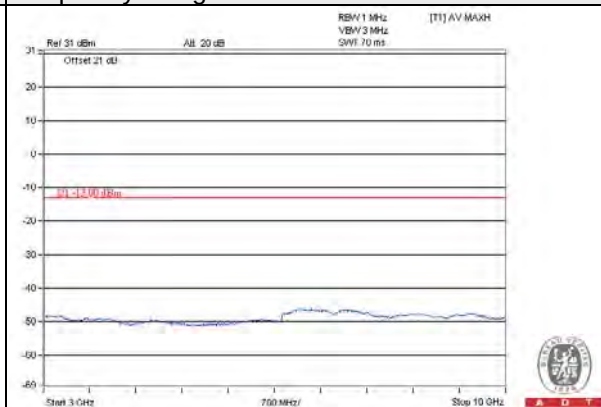


Frequency Range : 10GHz~22GHz




LTE Band 12 (Channel Bandwidth 5MHz): 16QAM

Channel 731.5

Frequency Range : 9kHz~3GHz

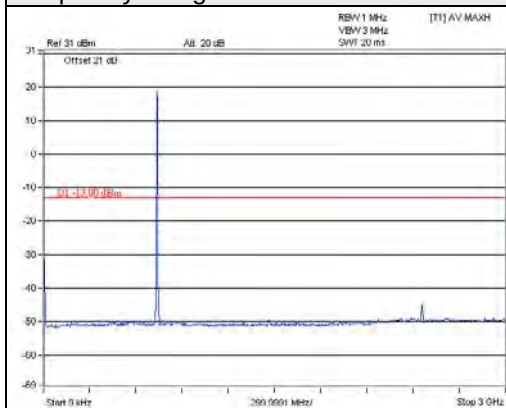

Frequency Range : 3GHz~10GHz

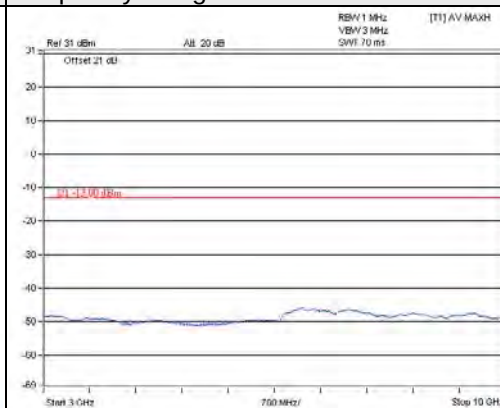


Frequency Range : 10GHz~22GHz




Channel 737.0



Frequency Range : 9kHz~3GHz

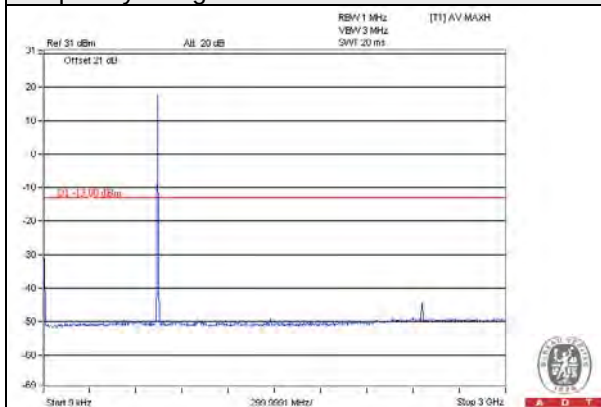

Frequency Range : 3GHz~10GHz

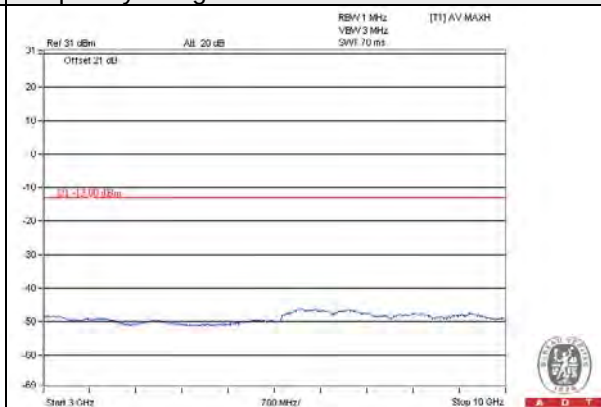


Frequency Range : 10GHz~22GHz

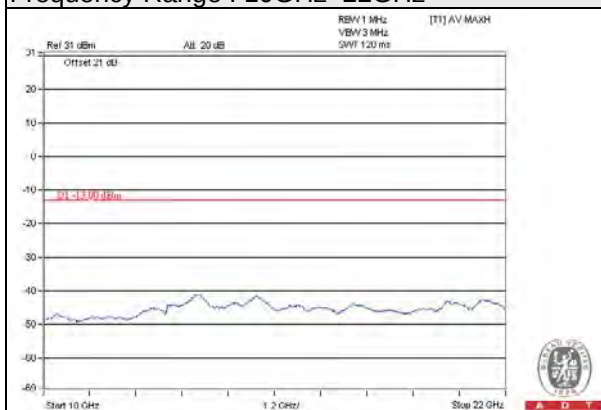


Channel 742.5

Frequency Range : 9kHz~3GHz

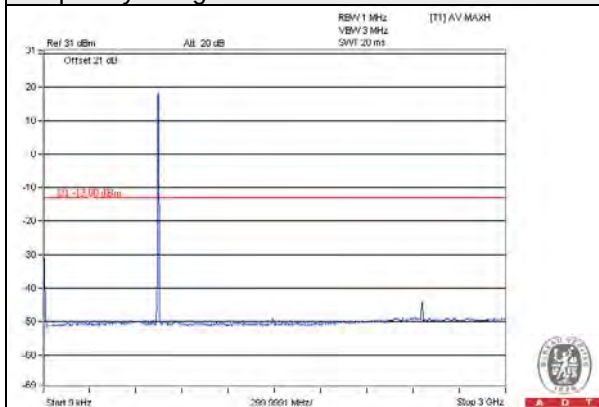

Frequency Range : 3GHz~10GHz

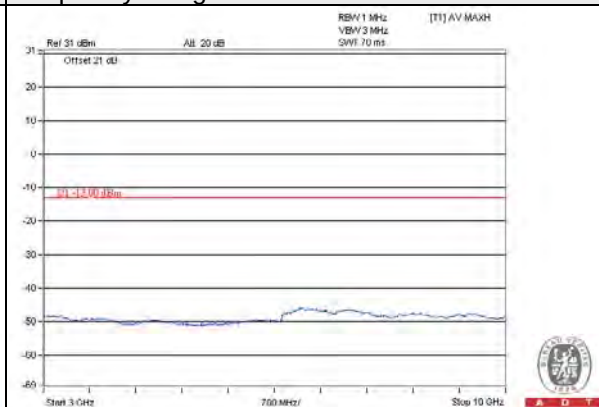


Frequency Range : 10GHz~22GHz




LTE Band 12 (Channel Bandwidth 5MHz): 64QAM

Channel 731.5


Frequency Range : 9kHz~3GHz

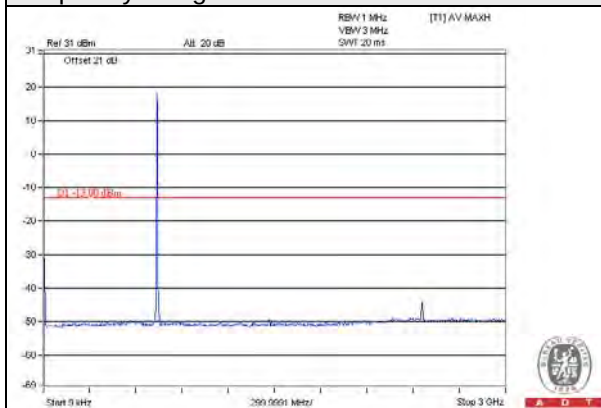

Frequency Range : 3GHz~10GHz

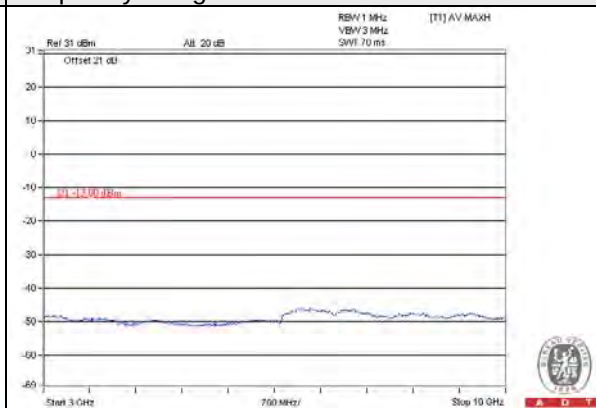


Frequency Range : 10GHz~22GHz

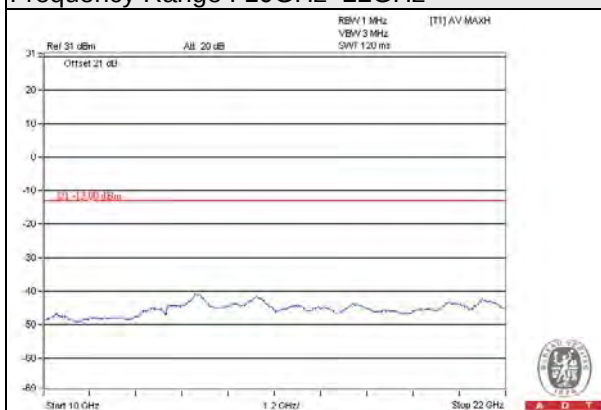


Channel 737.0


Frequency Range : 9kHz~3GHz

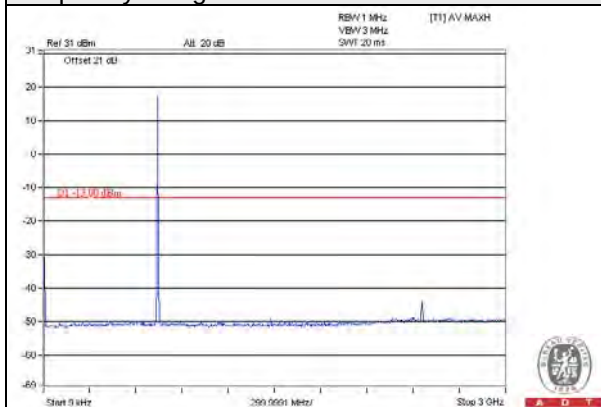

Frequency Range : 3GHz~10GHz

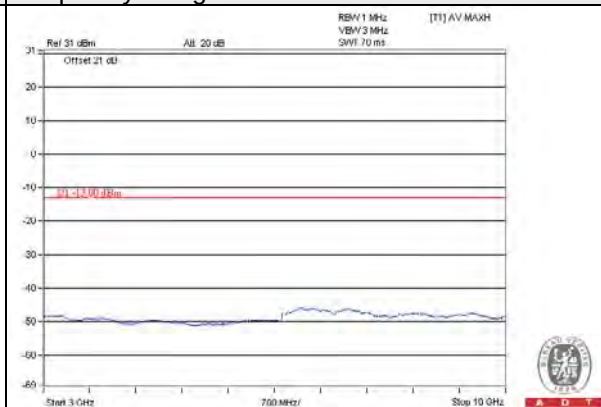


Frequency Range : 10GHz~22GHz




Channel 742.5



Frequency Range : 9kHz~3GHz

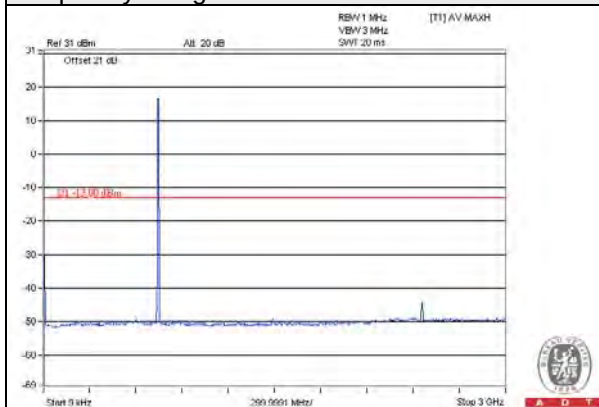

Frequency Range : 3GHz~10GHz

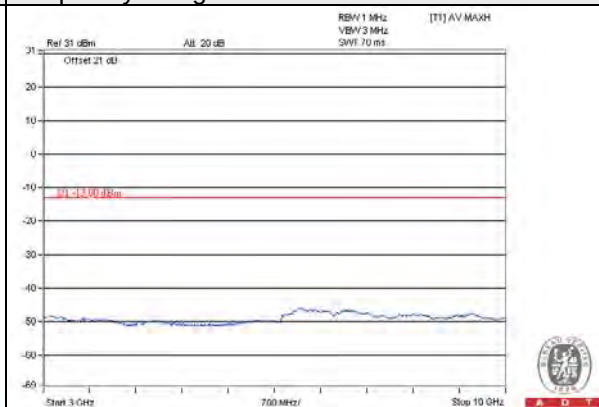

Frequency Range : 10GHz~22GHz

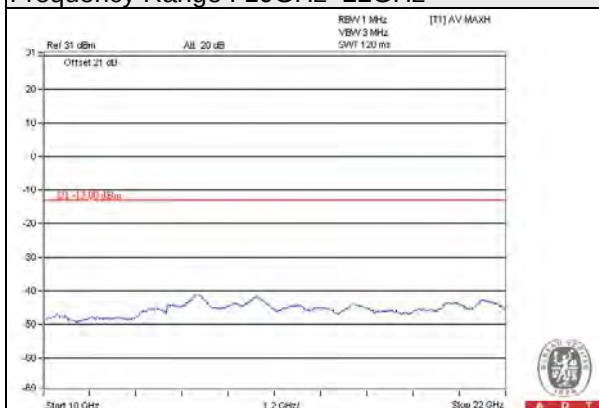


Chain 1


LTE Band 12 (Channel Bandwidth 5MHz): QPSK

Channel 731.5


Frequency Range : 9kHz~3GHz

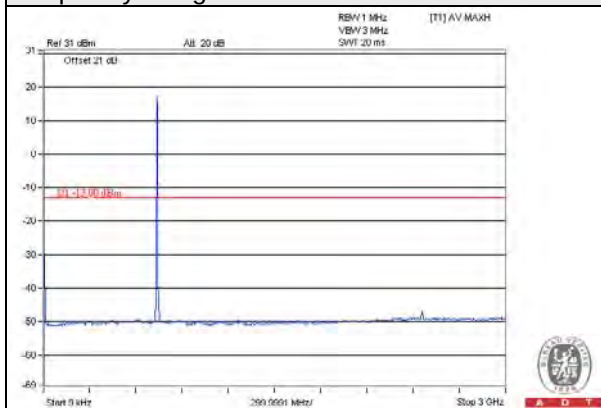

Frequency Range : 3GHz~10GHz

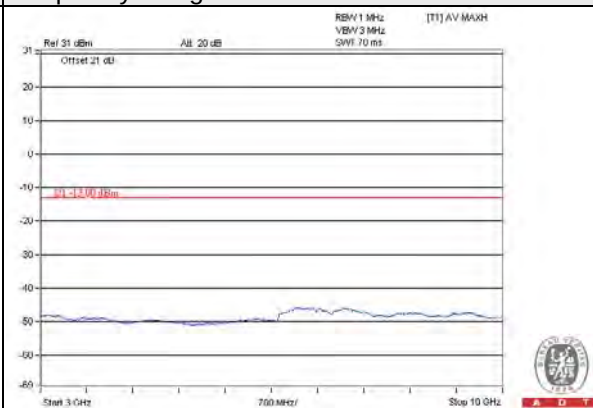


Frequency Range : 10GHz~22GHz

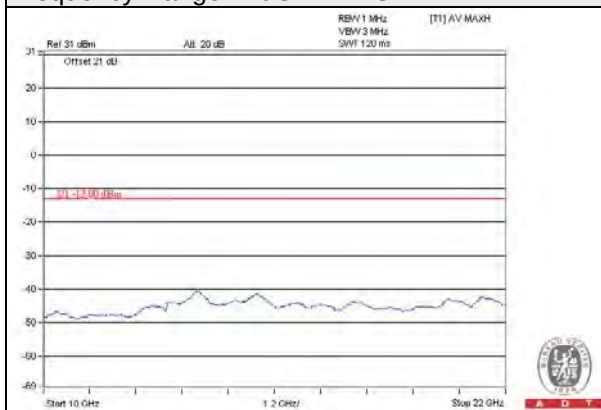


Channel 737.0


Frequency Range : 9kHz~3GHz

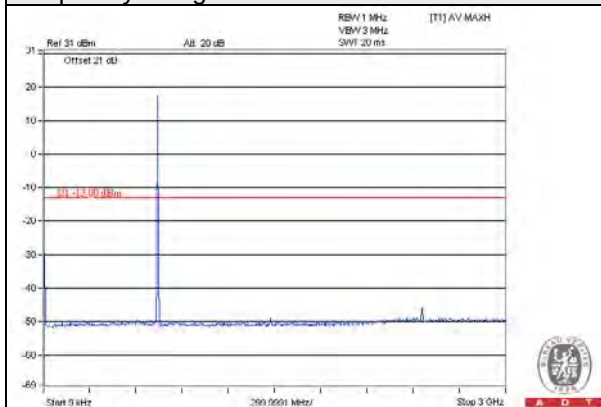

Frequency Range : 3GHz~10GHz

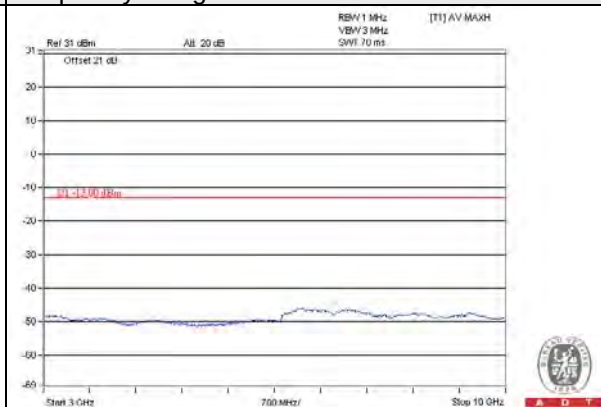


Frequency Range : 10GHz~22GHz

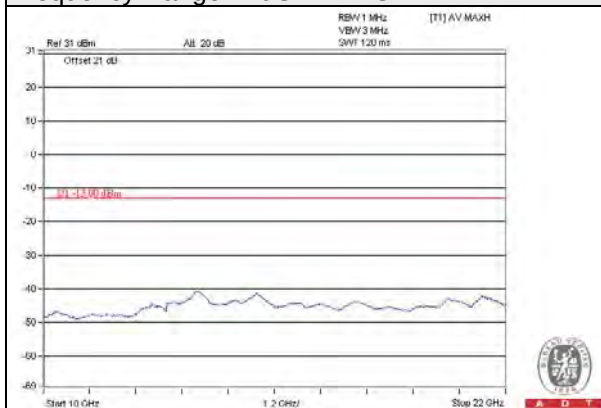


Channel 742.5


Frequency Range : 9kHz~3GHz

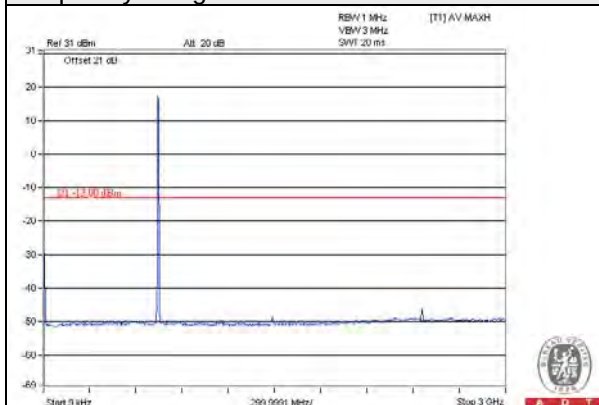

Frequency Range : 3GHz~10GHz

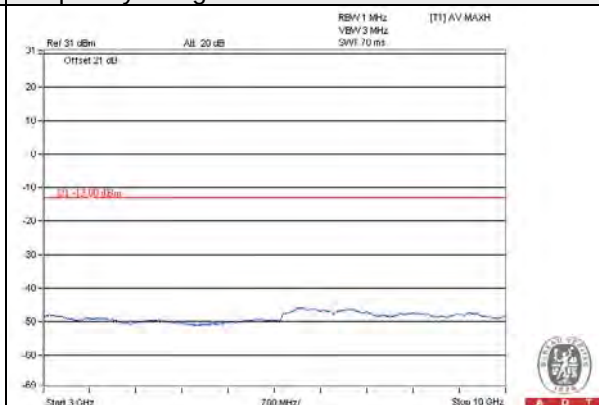


Frequency Range : 10GHz~22GHz

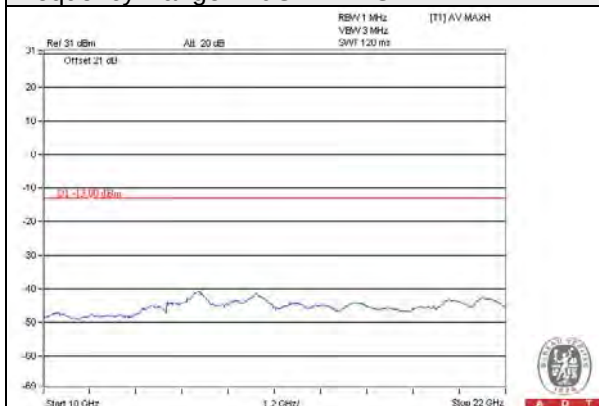


LTE Band 12 (Channel Bandwidth 5MHz): 16QAM

Channel 731.5


Frequency Range : 9kHz~3GHz

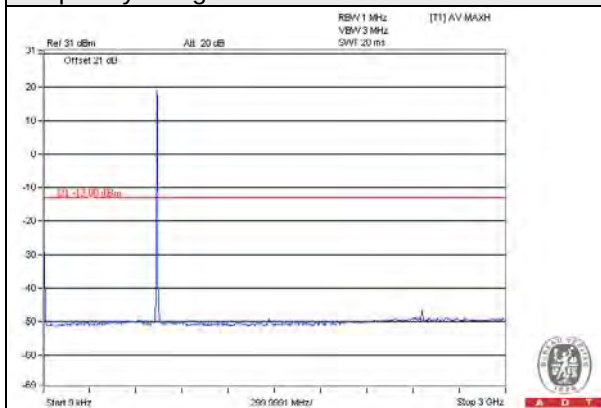

Frequency Range : 3GHz~10GHz

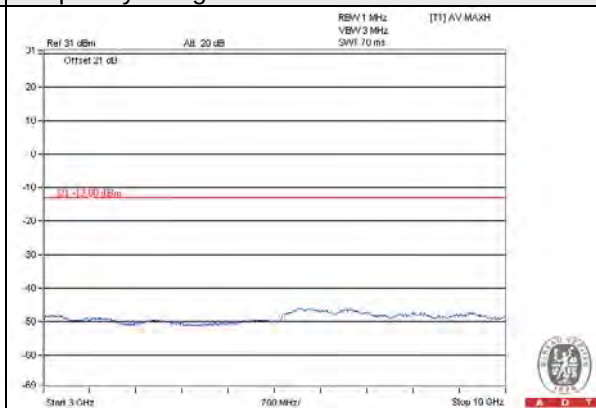


Frequency Range : 10GHz~22GHz

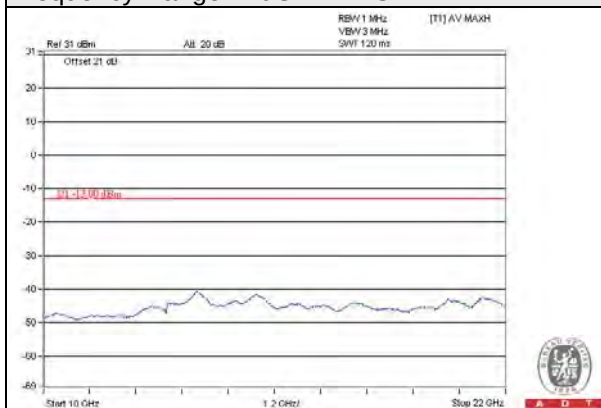


Channel 737.0

Frequency Range : 9kHz~3GHz

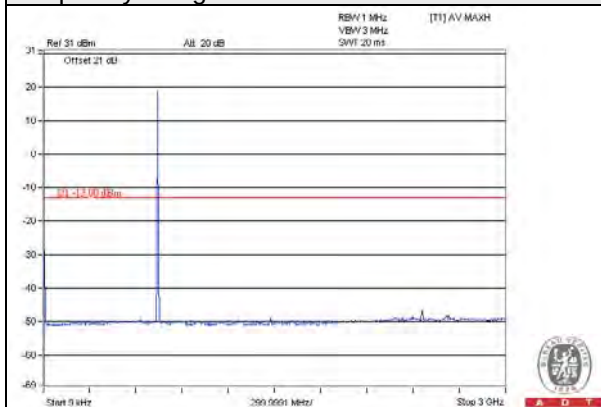

Frequency Range : 3GHz~10GHz

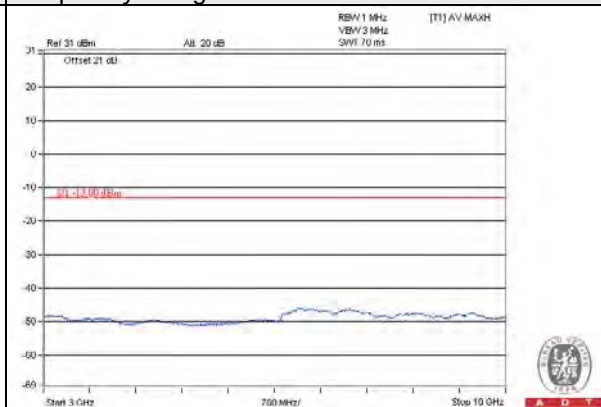


Frequency Range : 10GHz~22GHz




Channel 742.5



Frequency Range : 9kHz~3GHz

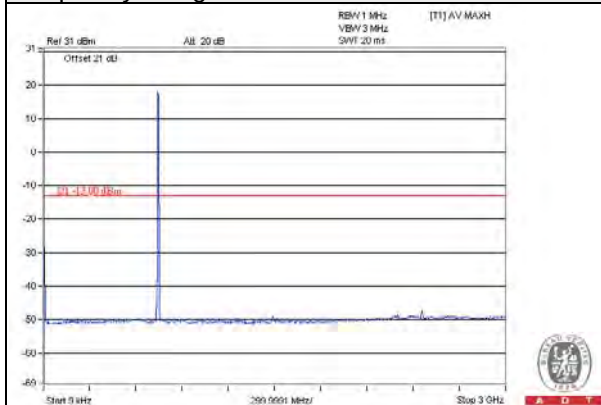

Frequency Range : 3GHz~10GHz

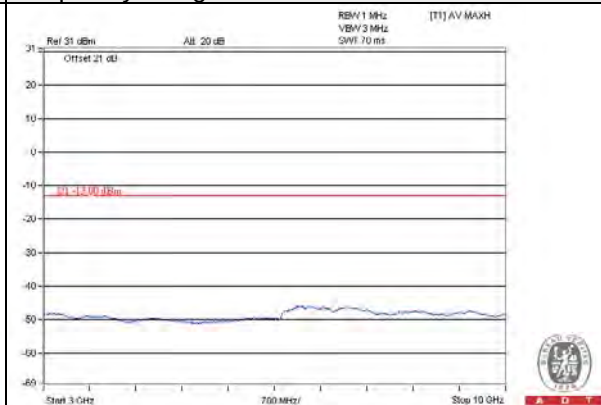


Frequency Range : 10GHz~22GHz

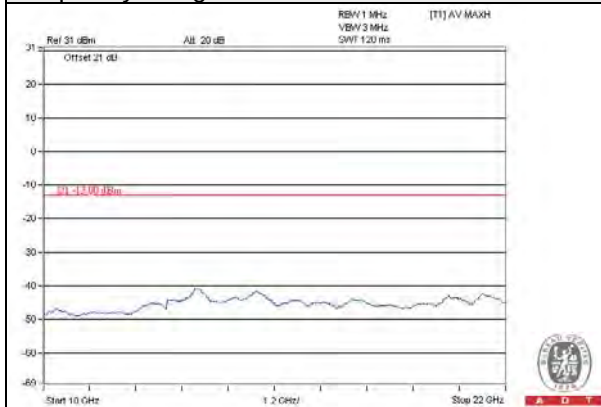


LTE Band 12 (Channel Bandwidth 5MHz): 64QAM

Channel 731.5

Frequency Range : 9kHz~3GHz

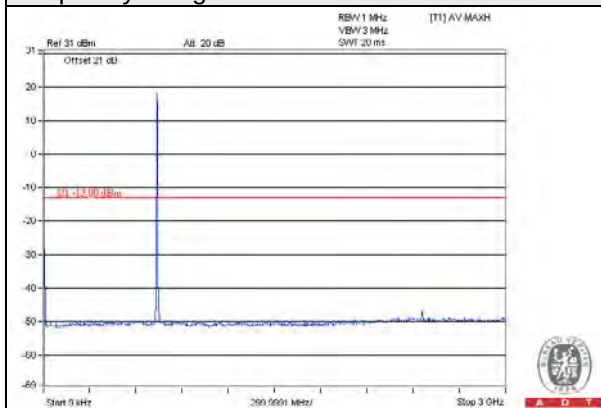

Frequency Range : 3GHz~10GHz

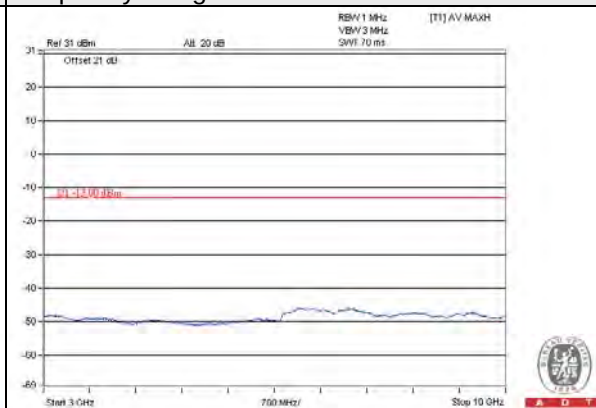


Frequency Range : 10GHz~22GHz




Channel 737.0


Frequency Range : 9kHz~3GHz

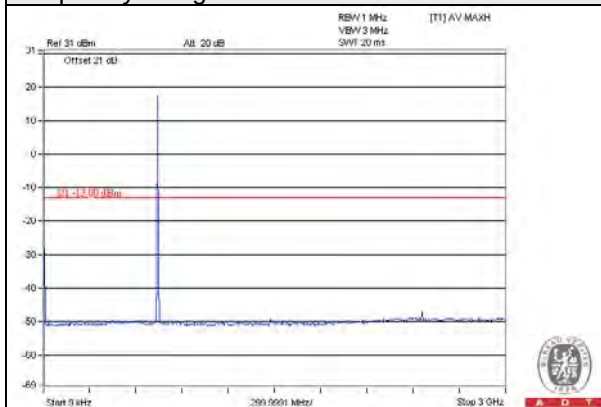

Frequency Range : 3GHz~10GHz

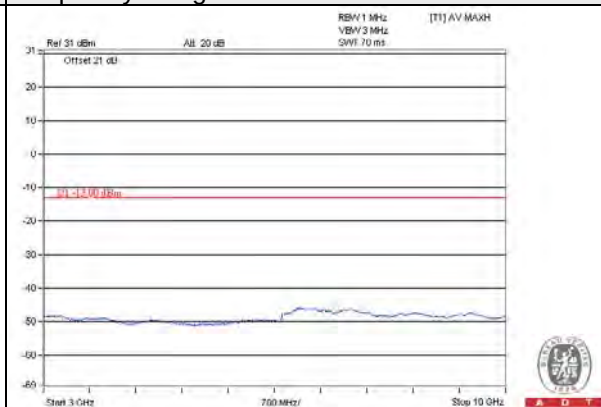


Frequency Range : 10GHz~22GHz




Channel 742.5


Frequency Range : 9kHz~3GHz

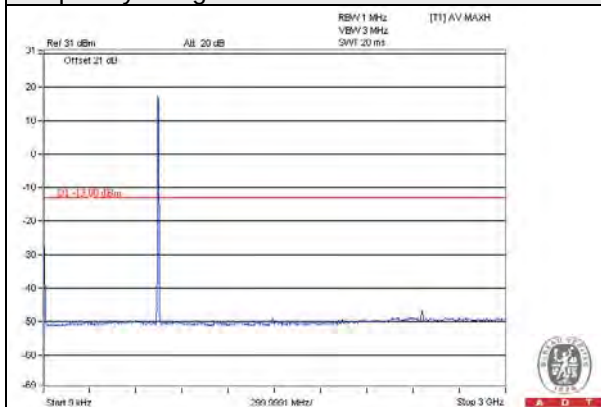

Frequency Range : 3GHz~10GHz

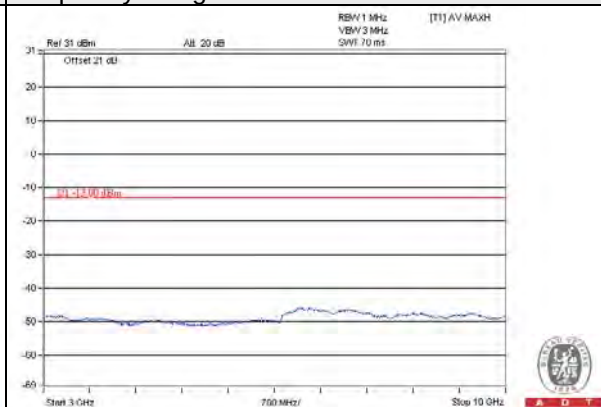

Frequency Range : 10GHz~22GHz

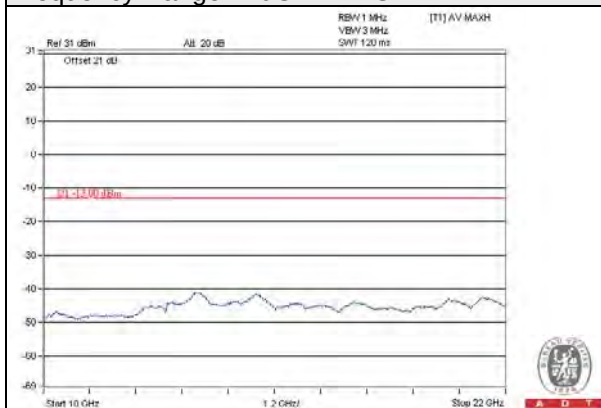



Chain 0

LTE Band 12 (Channel Bandwidth 10MHz): QPSK


Channel 734.0

Frequency Range : 9kHz~3GHz

Frequency Range : 3GHz~10GHz

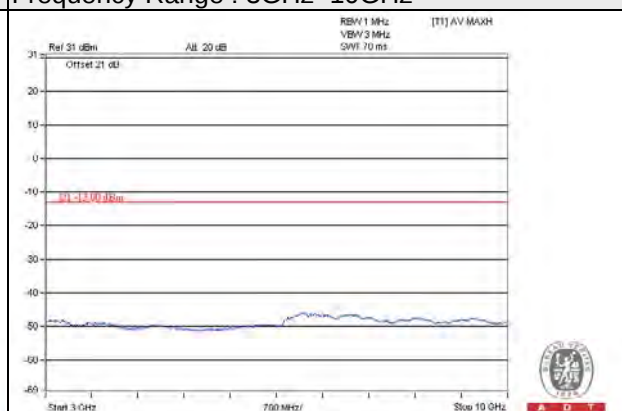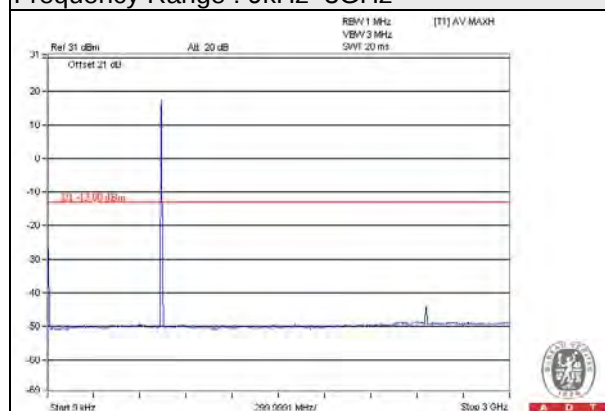


Frequency Range : 10GHz~22GHz




Channel 737.0

Frequency Range : 9kHz~3GHz

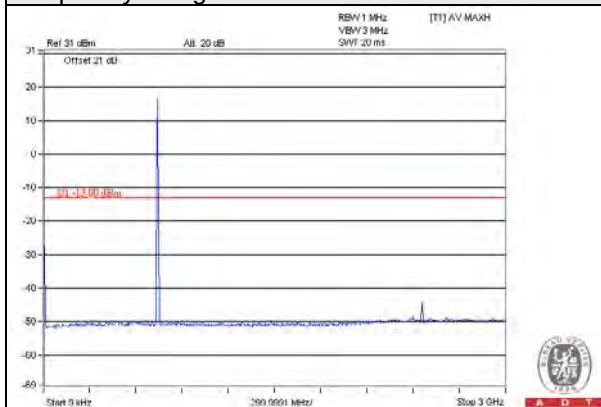

Frequency Range : 3GHz~10GHz

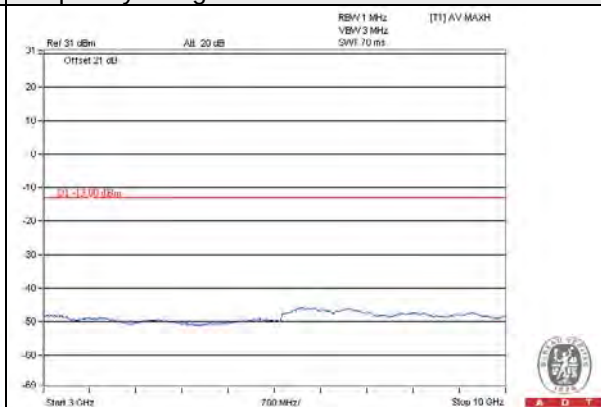


Frequency Range : 10GHz~22GHz




Channel 740.0



Frequency Range : 9kHz~3GHz

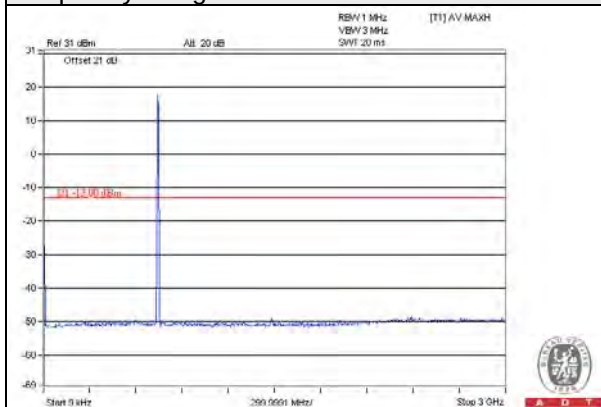

Frequency Range : 3GHz~10GHz

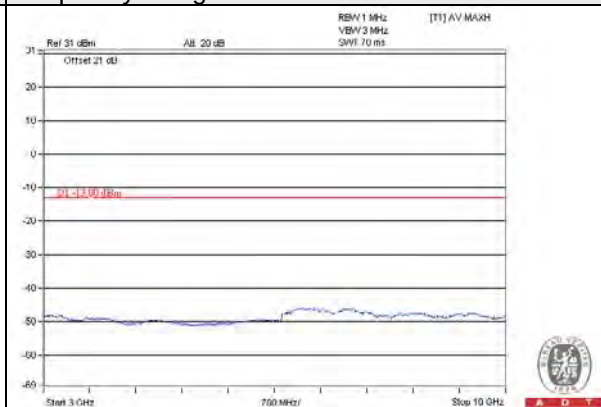


Frequency Range : 10GHz~22GHz

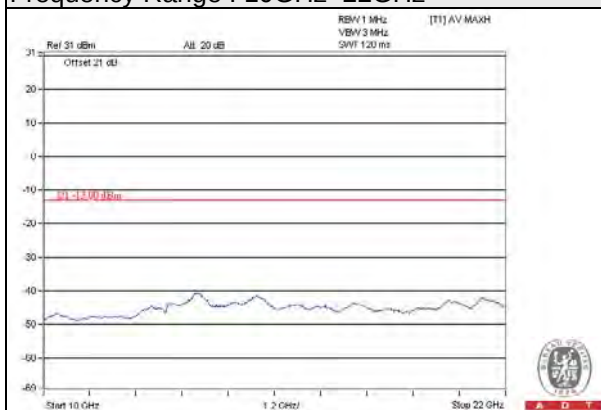


LTE Band 12 (Channel Bandwidth 10MHz): 16QAM

Channel 734.0


Frequency Range : 9kHz~3GHz

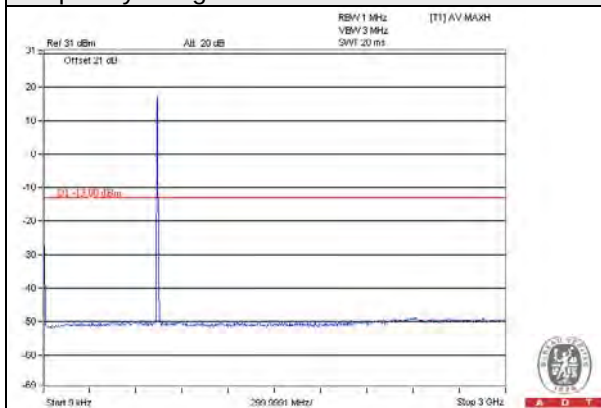

Frequency Range : 3GHz~10GHz

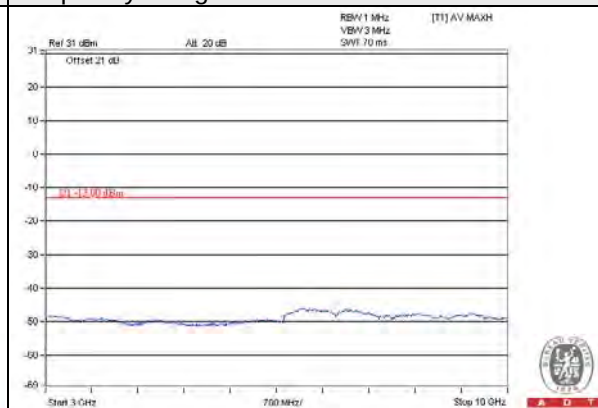


Frequency Range : 10GHz~22GHz

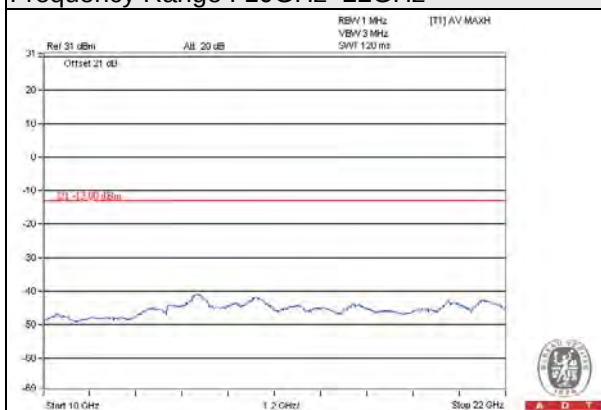


Channel 737.0


Frequency Range : 9kHz~3GHz

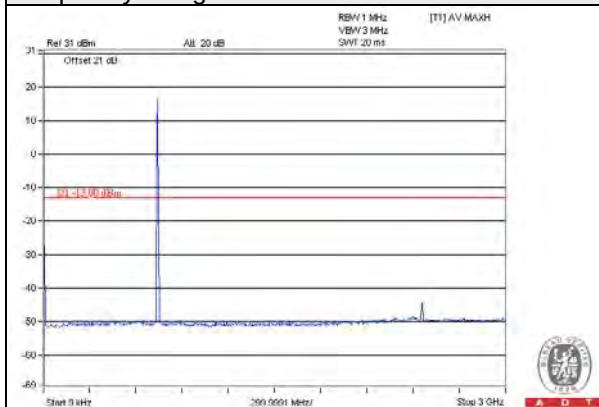

Frequency Range : 3GHz~10GHz

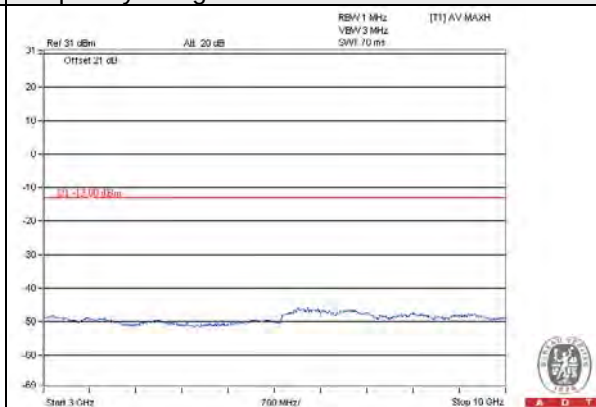


Frequency Range : 10GHz~22GHz




Channel 740.0


Frequency Range : 9kHz~3GHz

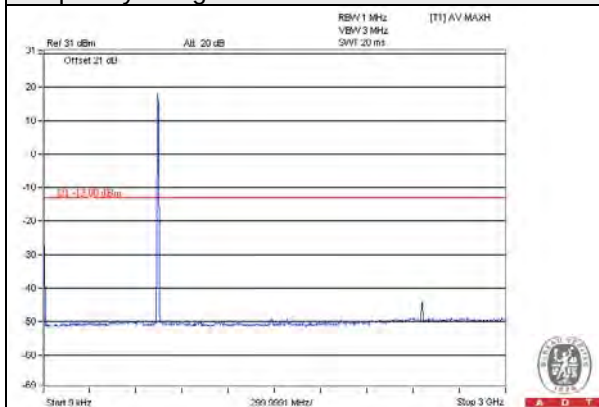

Frequency Range : 3GHz~10GHz

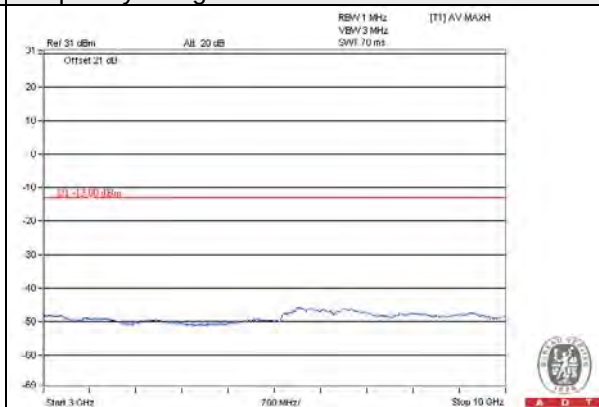


Frequency Range : 10GHz~22GHz




LTE Band 12 (Channel Bandwidth 10MHz): 64QAM

Channel 734.0

Frequency Range : 9kHz~3GHz

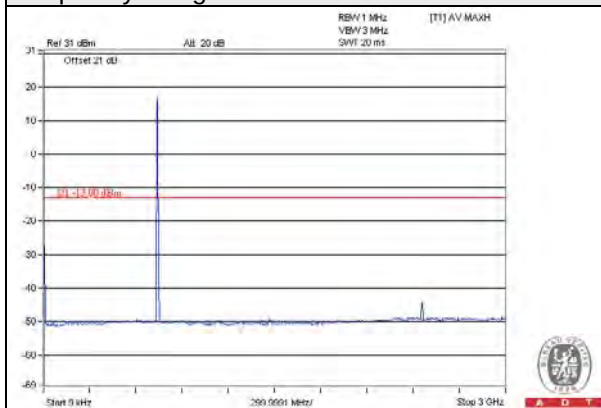

Frequency Range : 3GHz~10GHz

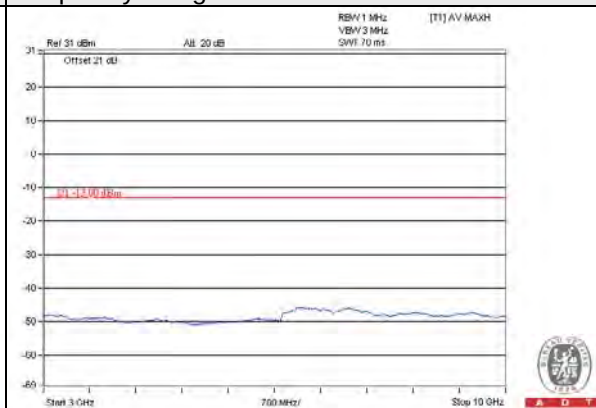


Frequency Range : 10GHz~22GHz




Channel 737.0



Frequency Range : 9kHz~3GHz

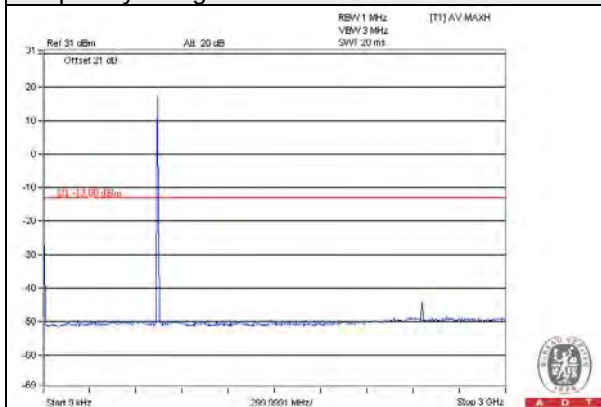

Frequency Range : 3GHz~10GHz

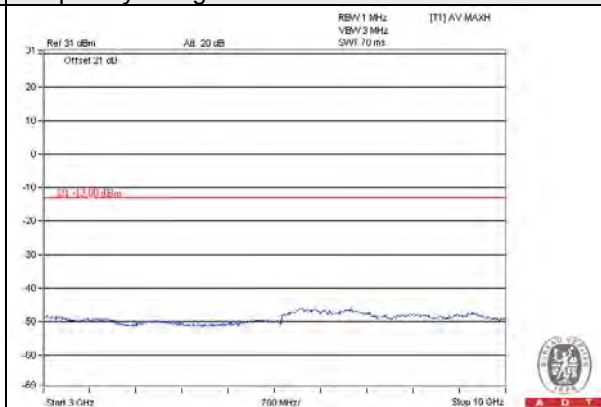


Frequency Range : 10GHz~22GHz

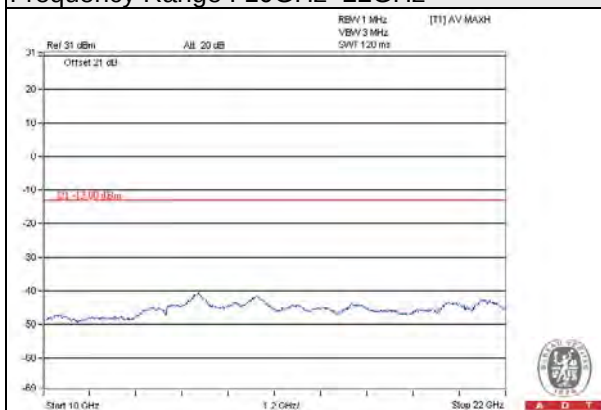


Channel 740.0


Frequency Range : 9kHz~3GHz

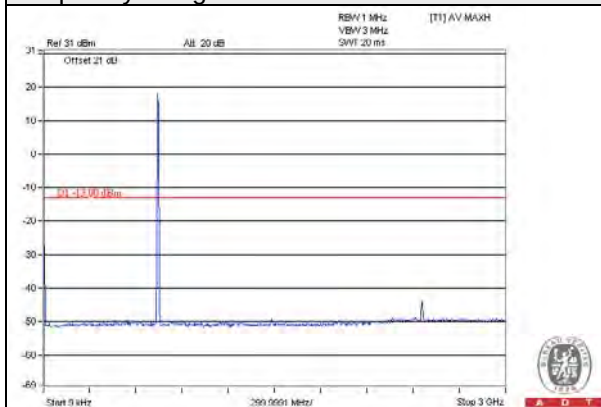

Frequency Range : 3GHz~10GHz

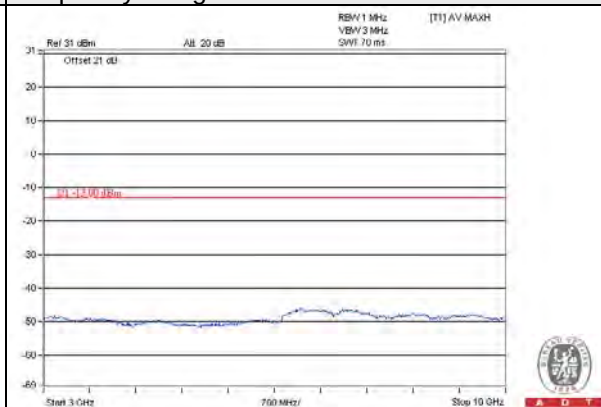

Frequency Range : 10GHz~22GHz

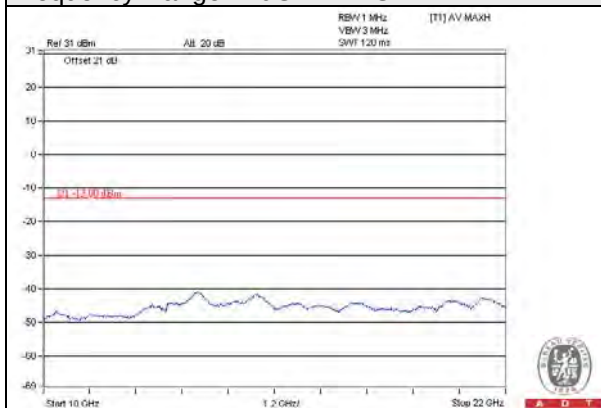


Chain 1


LTE Band 12 (Channel Bandwidth 10MHz): QPSK

Channel 734.0

Frequency Range : 9kHz~3GHz

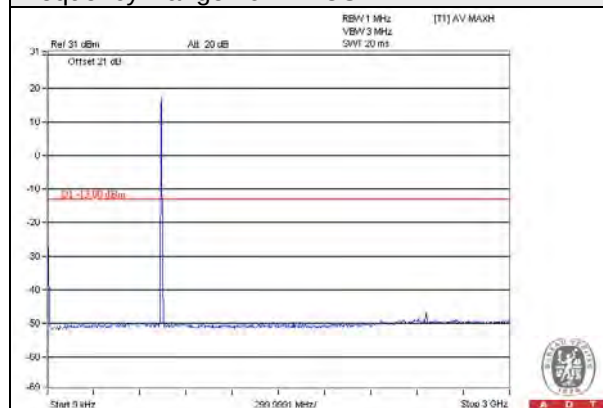

Frequency Range : 3GHz~10GHz

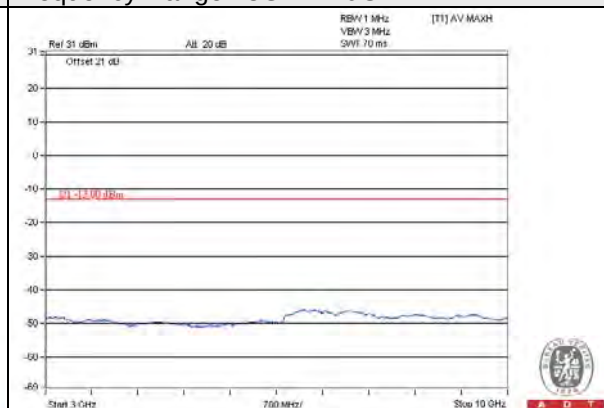


Frequency Range : 10GHz~22GHz




Channel 737.0



Frequency Range : 9kHz~3GHz

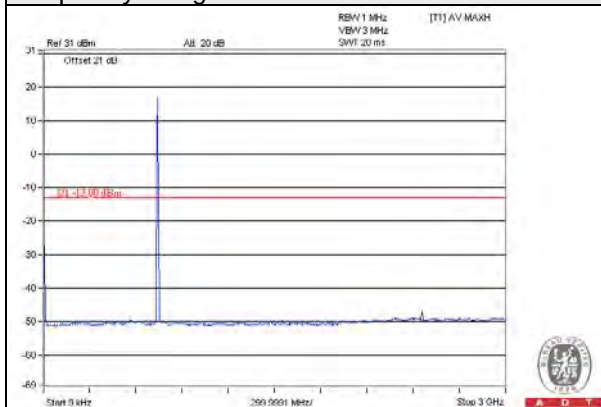

Frequency Range : 3GHz~10GHz

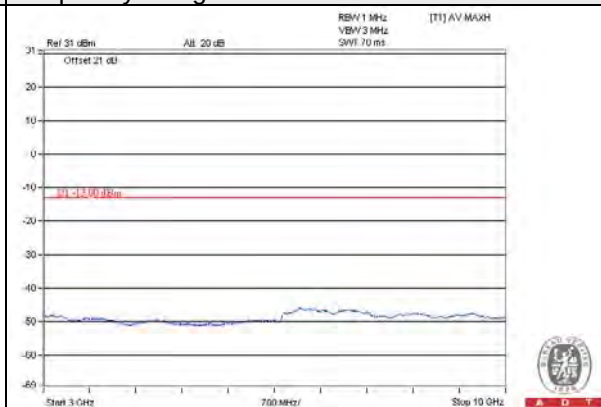


Frequency Range : 10GHz~22GHz

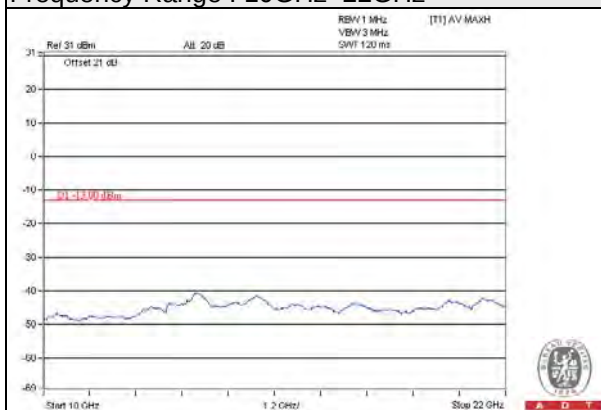


Channel 740.0


Frequency Range : 9kHz~3GHz

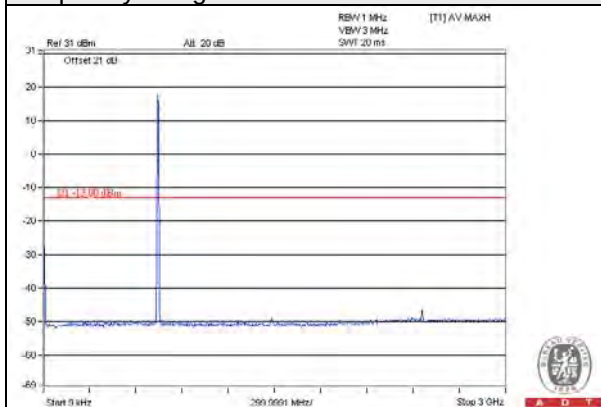

Frequency Range : 3GHz~10GHz

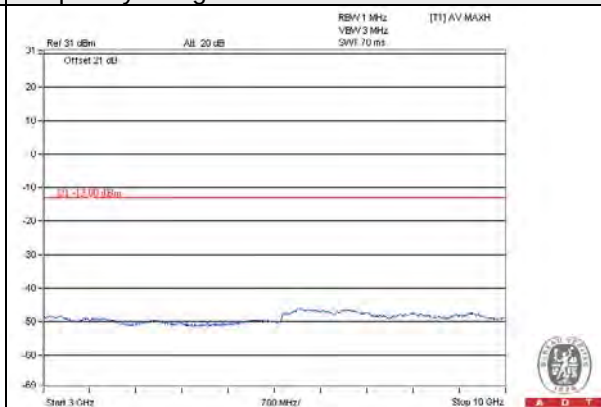


Frequency Range : 10GHz~22GHz

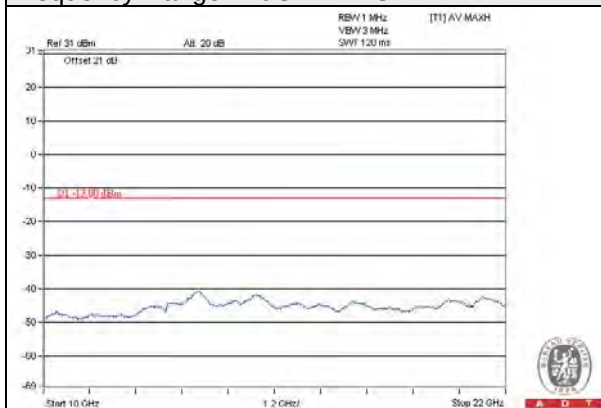


LTE Band 12 (Channel Bandwidth 10MHz): 16QAM

Channel 734.0

Frequency Range : 9kHz~3GHz

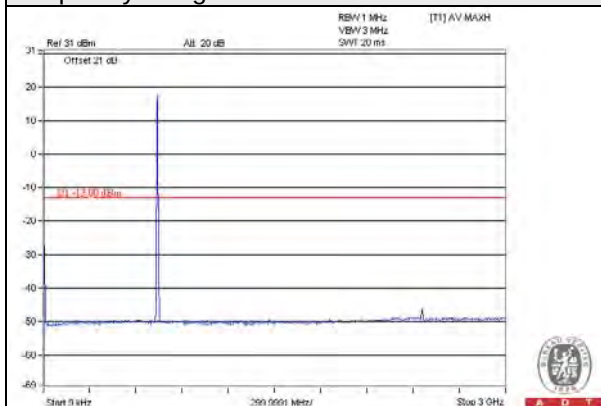

Frequency Range : 3GHz~10GHz

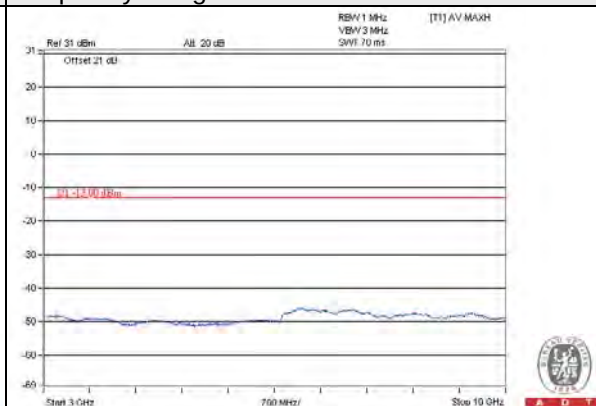


Frequency Range : 10GHz~22GHz




Channel 737.0



Frequency Range : 9kHz~3GHz

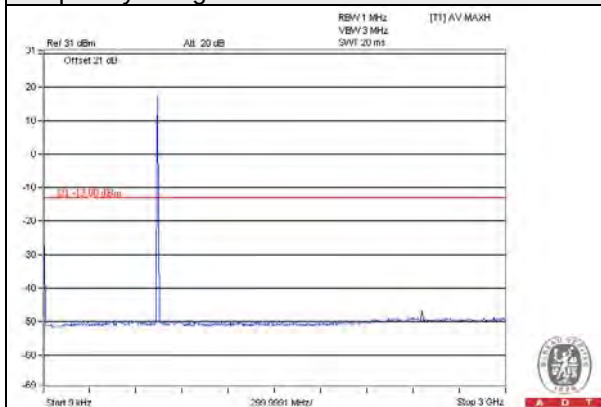

Frequency Range : 3GHz~10GHz

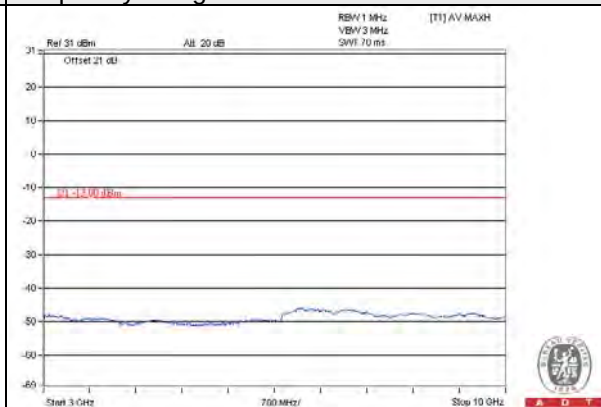


Frequency Range : 10GHz~22GHz

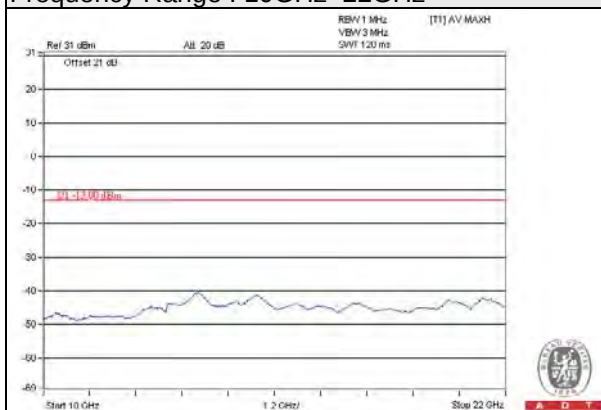


Channel 740.0

Frequency Range : 9kHz~3GHz

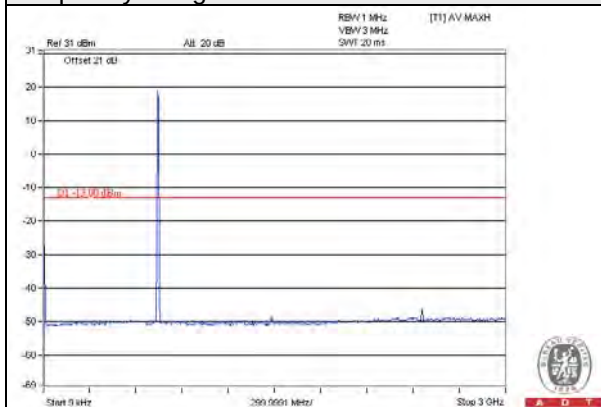

Frequency Range : 3GHz~10GHz

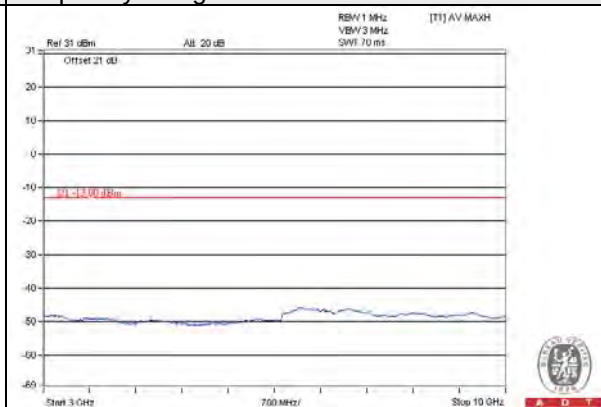


Frequency Range : 10GHz~22GHz




LTE Band 12 (Channel Bandwidth 10MHz): 64QAM

Channel 734.0


Frequency Range : 9kHz~3GHz

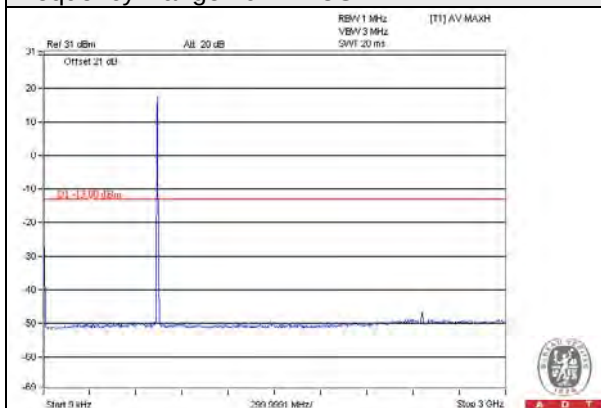

Frequency Range : 3GHz~10GHz

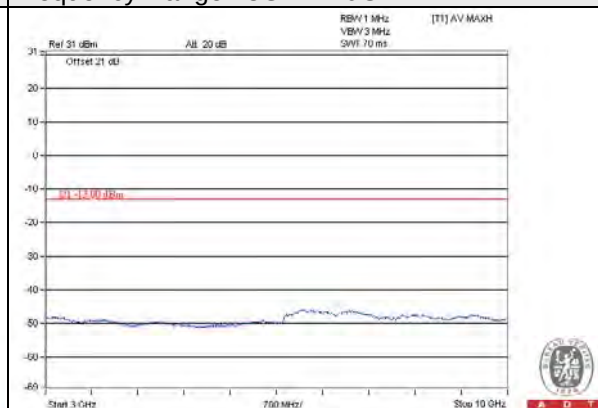


Frequency Range : 10GHz~22GHz




Channel 737.0


Frequency Range : 9kHz~3GHz

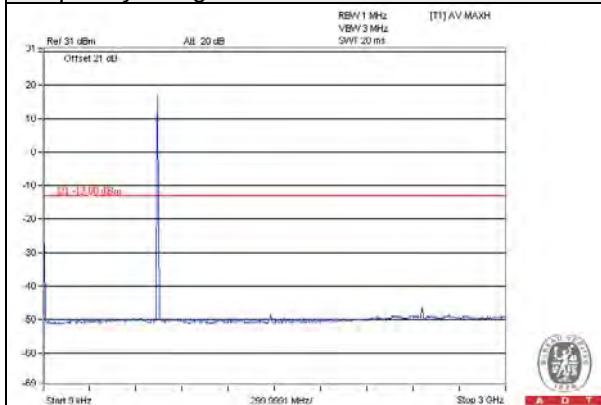

Frequency Range : 3GHz~10GHz

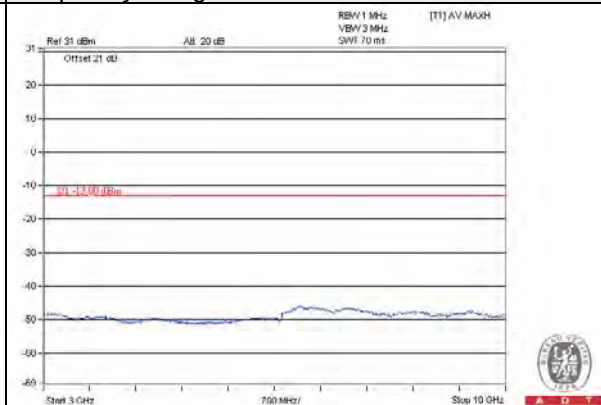


Frequency Range : 10GHz~22GHz

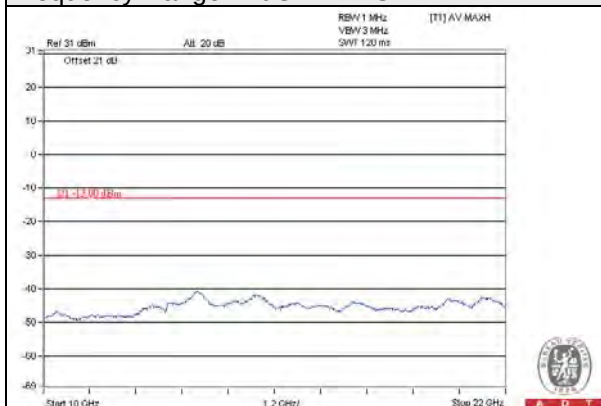


Channel 740.0



Frequency Range : 9kHz~3GHz

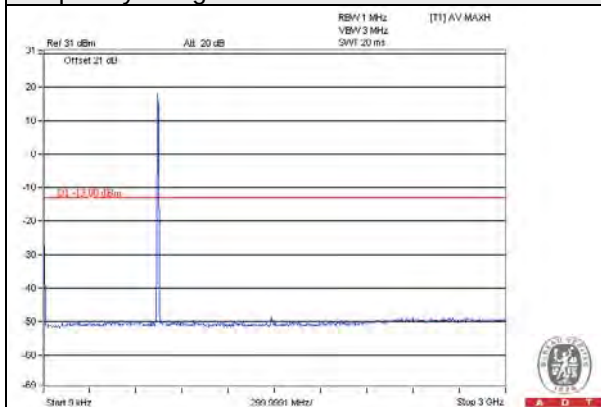

Frequency Range : 3GHz~10GHz

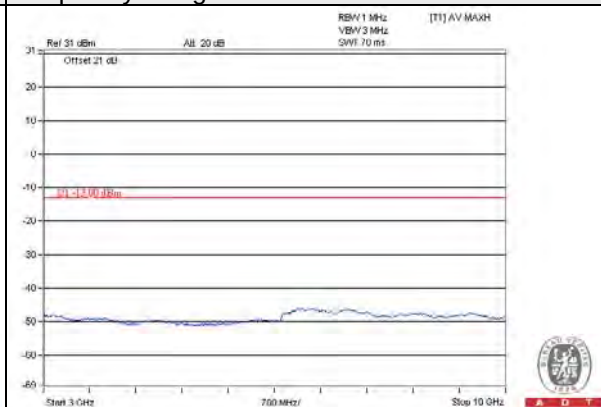

Frequency Range : 10GHz~22GHz

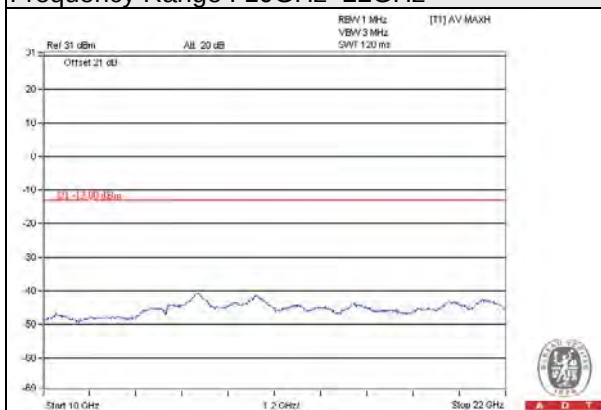

4.7 Radiated Emission Measurement

4.7.1 Limits of Radiated Emission Measurement

In the FCC 27.53(m) (4), On any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The emission limit equal to -13dBm .

4.7.2 Test Procedure


- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high channel of operational frequency range.)
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step b. Record the power level of S.G
- d. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution antenna}.$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.7.3 Deviation from Test Standard

No deviation.

4.7.4 Test Setup

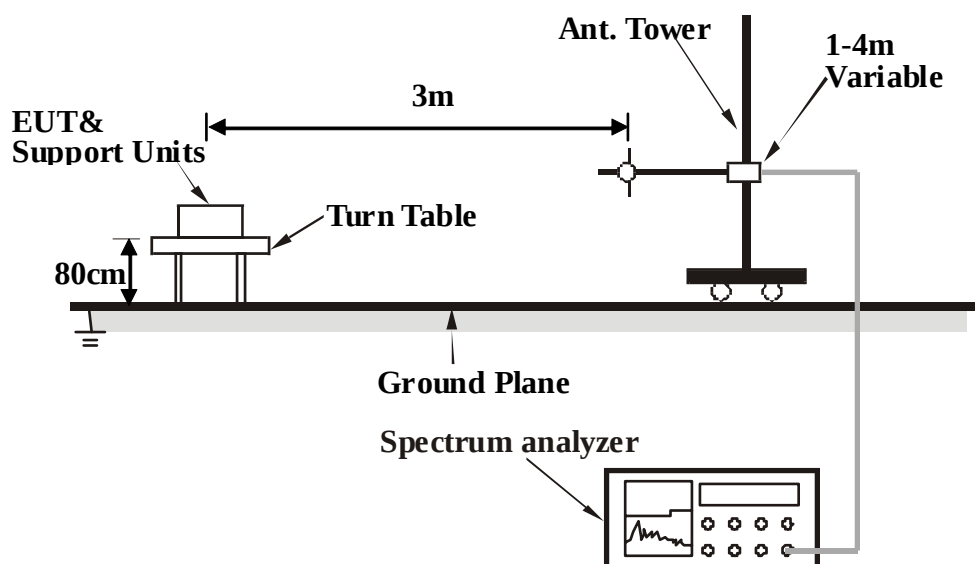

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 Test Results

Below 1GHz

LTE Band 4 (Channel Bandwidth 10MHz): 16QAM

Mode	TX channel 2150.0	Frequency Range	Below 1000 MHz
------	-------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	49.40	-51.93	-55.24	6.78	-48.46	-13.00	-35.46
2	150.28	-51.97	-59.43	6.78	-52.65	-13.00	-39.65
3	282.20	-51.00	-61.71	6.78	-54.93	-13.00	-41.93
4	342.34	-47.74	-58.06	6.78	-51.28	-13.00	-38.28
5	472.32	-48.95	-56.96	6.78	-50.18	-13.00	-37.18
6	804.06	-48.30	-49.92	6.78	-43.14	-13.00	-30.14
7	891.36	-49.51	-50.41	6.78	-43.63	-13.00	-30.63
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	61.04	-49.72	-49.93	6.78	-43.15	-13.00	-30.15
2	148.34	-50.32	-56.74	6.78	-49.96	-13.00	-36.96
3	458.74	-49.61	-57.99	6.78	-51.21	-13.00	-38.21
4	547.98	-49.83	-55.76	6.78	-48.98	-13.00	-35.98
5	736.16	-49.44	-52.09	6.78	-45.31	-13.00	-32.31
6	825.40	-48.73	-50.42	6.78	-43.64	-13.00	-30.64
7	976.72	-49.72	-49.40	6.78	-42.62	-13.00	-29.62

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 12 (Channel Bandwidth 10MHz): 16QAM

Mode	TX channel 740.0	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	47.46	-48.45	-51.92	6.78	-45.14	-13.00	-32.14
2	113.42	-47.73	-57.38	6.78	-50.60	-13.00	-37.60
3	150.28	-48.67	-56.13	6.78	-49.35	-13.00	-36.35
4	247.28	-40.55	-53.50	6.78	-46.72	-13.00	-33.72
5	501.42	-46.31	-53.69	6.78	-46.91	-13.00	-33.91
6	978.66	-41.19	-40.74	6.78	-33.96	-13.00	-20.96
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.07	-21.94	-24.52	6.78	-17.74	-13.00	-4.74
2	53.28	-36.4	-37.77	6.78	-30.99	-13.00	-17.99
3	152.22	-48.17	-54.63	6.78	-47.85	-13.00	-34.85
4	255.04	-41.61	-52.84	6.78	-46.06	-13.00	-33.06
5	340.46	-48.69	-55.60	6.78	-48.82	-13.00	-35.82
6	505.37	-39.84	-46.88	6.78	-40.10	-13.00	-27.10
7	980.66	-35.48	-35.19	6.78	-28.41	-13.00	-15.41

Remarks:

- Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

ABOVE 1GHz

LTE Band 4 (Channel Bandwidth 10MHz): 16QAM

Mode	TX channel 2115.0	Frequency Range	Above 1000MHz
------	-------------------	-----------------	---------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3592.25	-44.70	-55.51	17.07	-38.44	-13.00	-25.44
2	4231.85	-32.32	-46.84	19.89	-26.95	-13.00	-13.95
3	4552.66	-43.25	-58.74	20.99	-37.75	-13.00	-24.75
4	6346.57	-41.04	-54.95	23.61	-31.34	-13.00	-18.34
5	9496.02	-43.49	-61.48	29.15	-32.33	-13.00	-19.33
6	10984.09	-45.09	-57.85	28.73	-29.12	-13.00	-16.12
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3592.01	-44.82	-55.48	17.07	-38.41	-13.00	-25.41
2	4231.97	-32.92	-47.13	19.89	-27.24	-13.00	-14.24
3	6346.58	-38.99	-52.85	23.61	-29.24	-13.00	-16.24
4	9304.06	-43.85	-62.39	29.07	-33.32	-13.00	-20.32
5	10984.07	-45.35	-58.23	28.73	-29.50	-13.00	-16.50
6	12712.00	-44.19	-59.82	31.99	-27.83	-13.00	-14.83

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 2132.5	Frequency Range	Above 1000MHz
------	-------------------	-----------------	---------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3592.05	-44.81	-55.63	17.07	-38.56	-13.00	-25.56
2	4264.19	-41.78	-56.81	20.25	-36.56	-13.00	-23.56
3	6616.61	-45.64	-59.86	24.21	-35.65	-13.00	-22.65
4	8680.07	-44.44	-62.51	28.35	-34.16	-13.00	-21.16
5	9496.15	-43.48	-61.47	29.15	-32.32	-13.00	-19.32
6	10984.22	-45.30	-58.06	28.73	-29.33	-13.00	-16.33

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3592.05	-44.91	-55.57	17.07	-38.50	-13.00	-25.50
2	4264.11	-32.07	-46.73	20.25	-26.48	-13.00	-13.48
3	6376.06	-38.84	-52.70	23.67	-29.03	-13.00	-16.03
4	9496.23	-43.50	-62.09	29.15	-32.94	-13.00	-19.94
5	10984.49	-45.29	-58.15	28.72	-29.43	-13.00	-16.43
6	12712.10	-44.18	-59.81	31.99	-27.82	-13.00	-14.82

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 2150.0	Frequency Range	Above 1000MHz
------	-------------------	-----------------	---------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3640.27	-44.64	-56.25	17.57	-38.68	-13.00	-25.68
2	4300.83	-42.33	-57.91	20.63	-37.28	-13.00	-24.28
3	6568.45	-45.85	-59.93	24.09	-35.84	-13.00	-22.84
4	8152.03	-44.89	-62.12	27.55	-34.57	-13.00	-21.57
5	9544.92	-43.40	-61.55	29.23	-32.32	-13.00	-19.32
6	10984.05	-45.25	-58.01	28.73	-29.28	-13.00	-16.28
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3592.77	-44.80	-55.44	17.07	-38.37	-13.00	-25.37
2	4300.85	-33.10	-48.23	20.63	-27.60	-13.00	-14.60
3	6424.41	-37.06	-50.92	23.76	-27.16	-13.00	-14.16
4	8728.06	-43.61	-62.02	28.40	-33.62	-13.00	-20.62
5	9544.02	-42.78	-61.48	29.23	-32.25	-13.00	-19.25
6	10984.19	-45.03	-57.91	28.73	-29.18	-13.00	-16.18

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 12 (Channel Bandwidth 10MHz): 16QAM

Mode	TX channel 734.0	Frequency Range	Above 1000MHz
------	------------------	-----------------	---------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1468.23	-37.46	-51.30	11.76	-39.54	-13.00	-26.54
2	3592.11	-44.88	-55.70	17.07	-38.63	-13.00	-25.63
3	6616.26	-45.86	-60.08	24.21	-35.87	-13.00	-22.87
4	8152.05	-44.76	-61.99	27.55	-34.44	-13.00	-21.44
5	9496.81	-43.46	-61.45	29.15	-32.30	-13.00	-19.30
6	10984.09	-45.24	-58.00	28.73	-29.27	-13.00	-16.27
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1468.39	-28.60	-42.26	11.76	-30.50	-13.00	-17.50
2	2202.25	-41.39	-51.86	12.79	-39.07	-13.00	-26.07
3	3160.47	-42.10	-53.48	16.12	-37.36	-13.00	-24.36
4	3592.33	-44.84	-55.49	17.07	-38.42	-13.00	-25.42
5	6568.01	-45.76	-59.84	24.09	-35.75	-13.00	-22.75
6	8872.69	-43.86	-62.34	28.73	-33.61	-13.00	-20.61

Remarks:

- Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 737.0	Frequency Range	Above 1000MHz
------	------------------	-----------------	---------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1474.98	-43.33	-57.3	11.83	-45.47	-13.00	-32.47
2	3685.71	-44.19	-56.94	18.2	-38.74	-13.00	-25.74
3	6568.42	-45.90	-59.98	24.09	-35.89	-13.00	-22.89
4	9544.05	-43.44	-61.59	29.23	-32.36	-13.00	-19.36
5	10984.07	-45.32	-58.08	28.73	-29.35	-13.00	-16.35
6	12712.00	-44.21	-60.2	31.99	-28.21	-13.00	-15.21
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1474.11	-25.15	-38.89	11.82	-27.07	-13.00	-14.07
2	2211.34	-35.07	-45.51	12.83	-32.68	-13.00	-19.68
3	3160.76	-41.14	-52.52	16.12	-36.40	-13.00	-23.40
4	6520.28	-45.83	-59.72	23.93	-35.79	-13.00	-22.79
5	9496.30	-43.64	-62.23	29.15	-33.08	-13.00	-20.08
6	10984.00	-45.06	-57.94	28.73	-29.21	-13.00	-16.21

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 740.0	Frequency Range	Above 1000MHz
------	------------------	-----------------	---------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1480.22	-40.85	-54.92	11.88	-43.04	-13.00	-30.04
2	3592.15	-44.93	-55.75	17.07	-38.68	-13.00	-25.68
3	6568.43	-45.92	-60.00	24.09	-35.91	-13.00	-22.91
4	9496.31	-43.41	-61.40	29.15	-32.25	-13.00	-19.25
5	10984.02	-45.25	-58.01	28.73	-29.28	-13.00	-16.28
6	12712.99	-44.24	-60.23	31.99	-28.24	-13.00	-15.24
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1480.23	-24.59	-38.41	11.88	-26.53	-13.00	-13.53
2	2220.88	-33.75	-44.16	12.87	-31.29	-13.00	-18.29
3	4888.71	-45.71	-58.71	21.01	-37.70	-13.00	-24.70
4	9544.00	-43.58	-62.28	29.23	-33.05	-13.00	-20.05
5	10984.19	-45.48	-58.36	28.73	-29.63	-13.00	-16.63
6	12712.32	-44.15	-59.78	31.99	-27.79	-13.00	-14.79

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---