



Frequency	802.11N HT40 5310 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

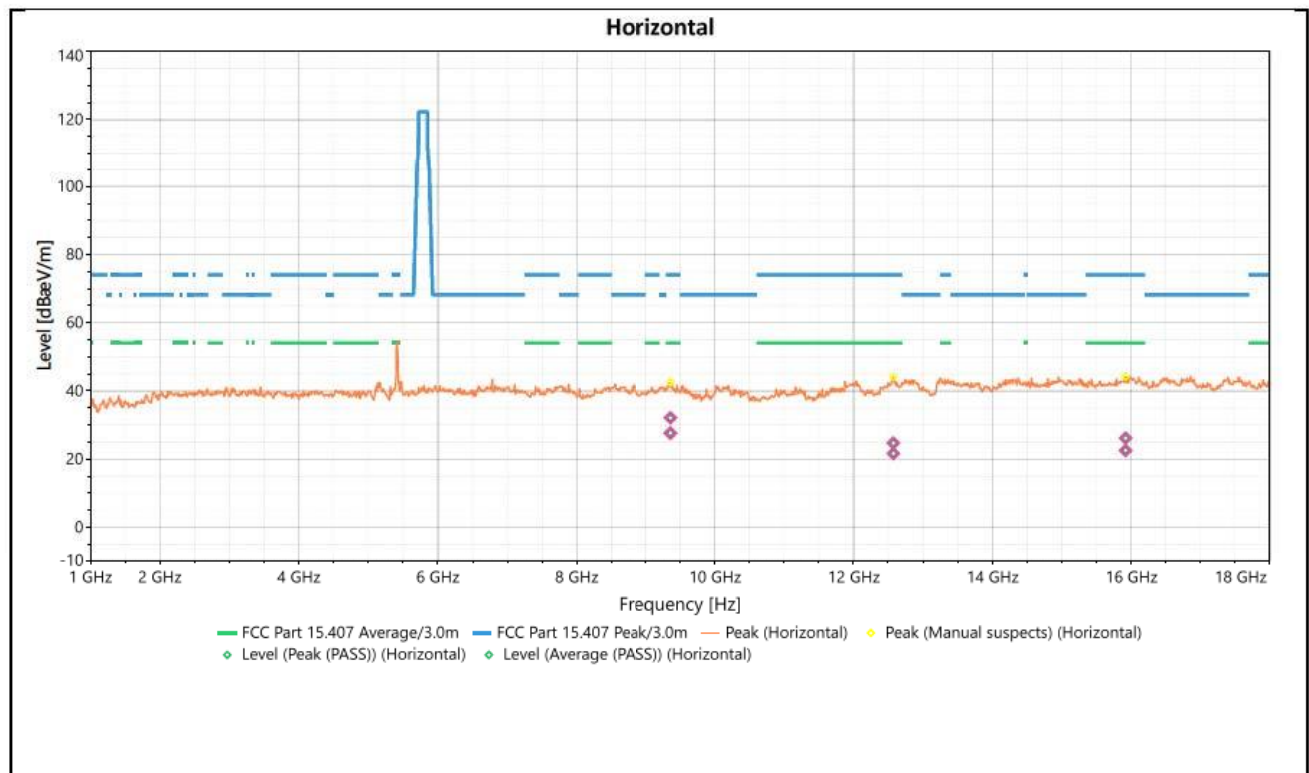

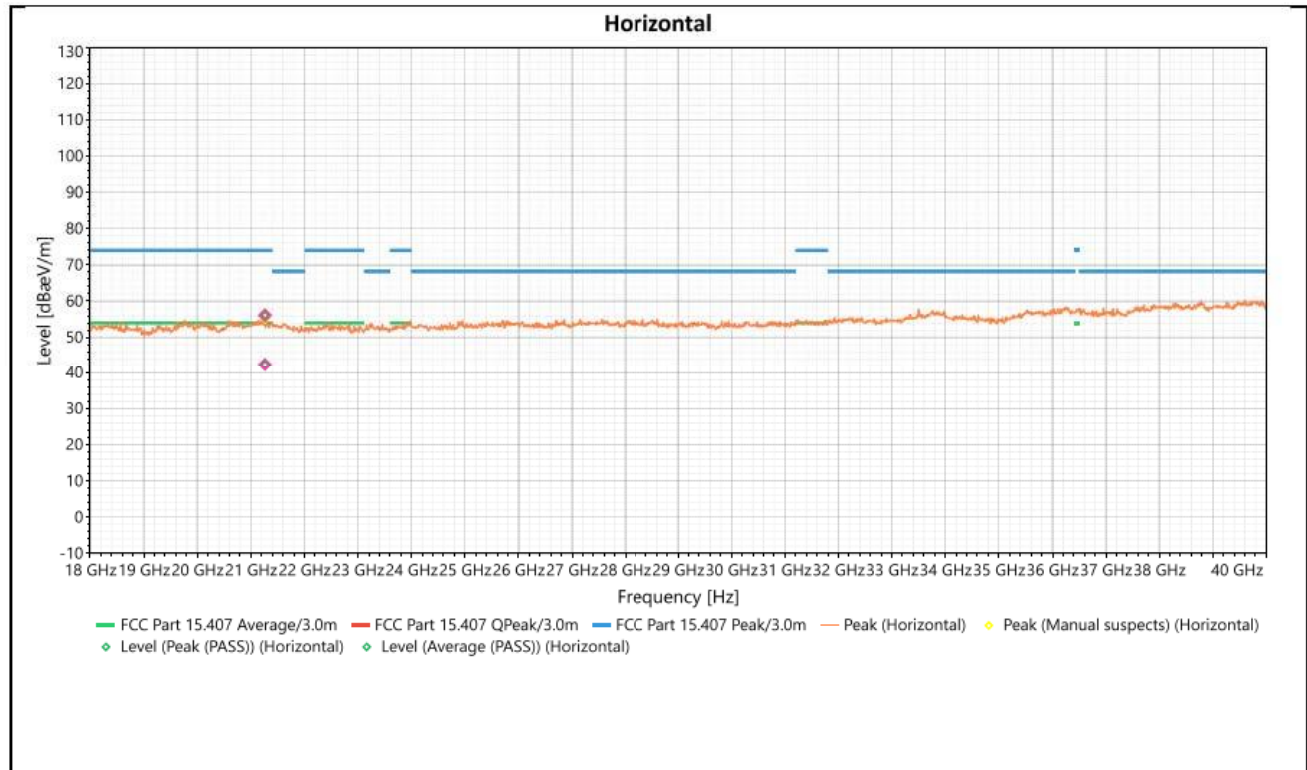



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/Result
1	9361.984	Horizontal	32.149	74	-41.851	3.5	315	2.16	Peak (PASS)
2	9361.984	Horizontal	27.643	54	-26.357	3.5	315	2.16	Average (PASS)
3	12574.77	Horizontal	21.681	74	-52.319	2.24	297	3.87	Peak (PASS)
4	12574.77	Horizontal	24.708	54	-29.292	2.24	297	3.87	Average (PASS)
5	15920.4	Horizontal	22.545	74	-51.455	2.13	18	4.8	Peak (PASS)
6	15920.4	Horizontal	26.185	54	-27.815	2.13	18	4.8	Average (PASS)
7	21264.7	Horizontal	56.103	74	-17.897	1.4	66	8.29	Peak (PASS)
8	21264.7	Horizontal	42.363	54	-11.637	1.4	66	8.29	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5510 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

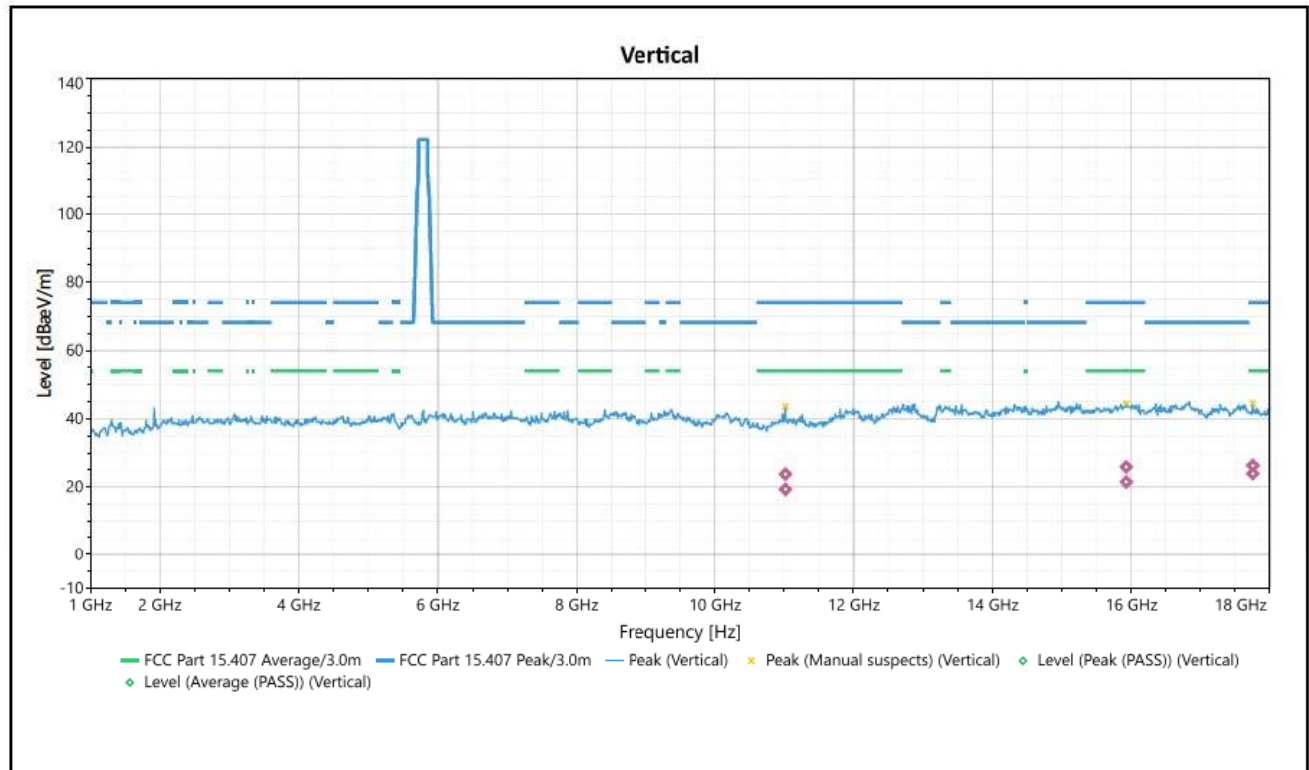

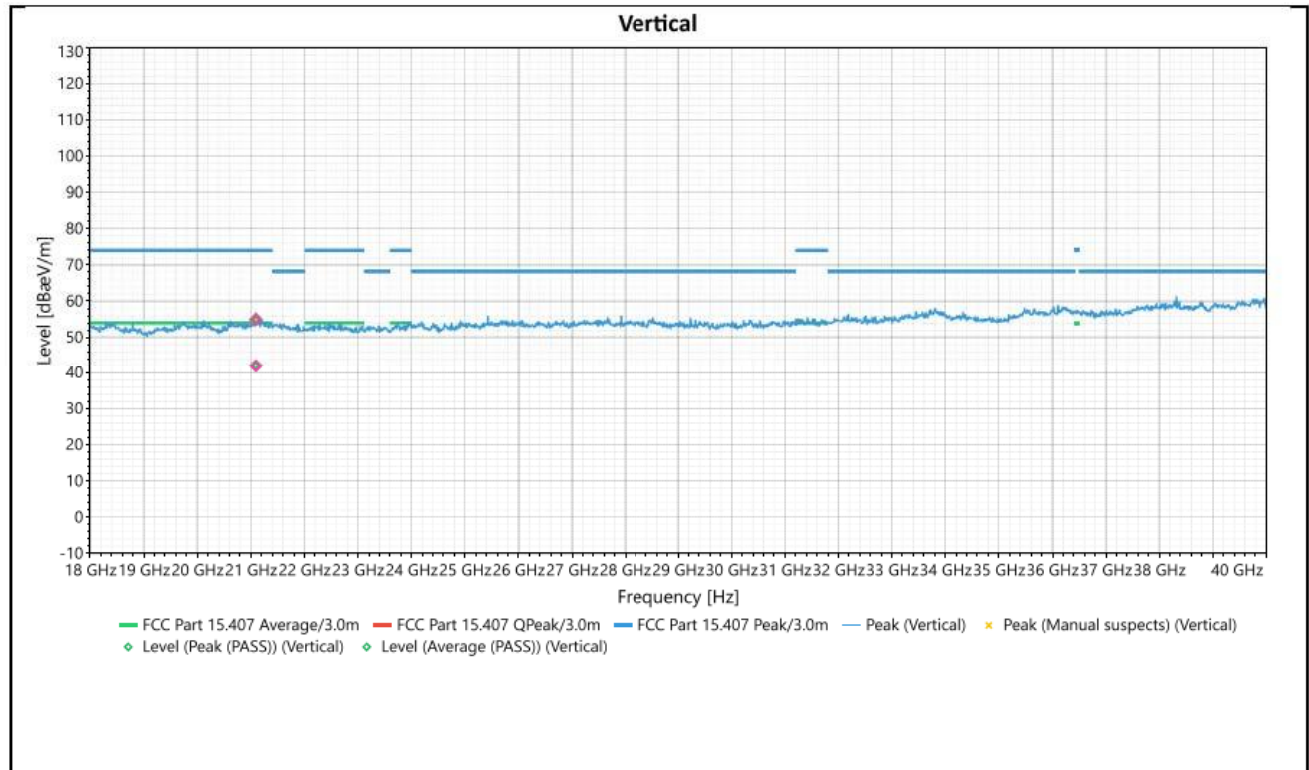



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11020.27	Vertical	23.739	74	-50.261	1.59	149	2.72	Peak (PASS)
2	11020.27	Vertical	19.263	54	-34.737	1.59	149	2.72	Average (PASS)
3	15930.78	Vertical	21.46	74	-52.54	1.7	241	4.96	Peak (PASS)
4	15930.78	Vertical	25.821	54	-28.179	1.7	241	4.96	Average (PASS)
5	17755.1	Vertical	23.908	74	-50.092	2	260	2.96	Peak (PASS)
6	17755.1	Vertical	26.279	54	-27.721	2	260	2.96	Average (PASS)
7	21093.18	Vertical	54.897	74	-19.103	1.97	74	8.63	Peak (PASS)
8	21093.18	Vertical	41.954	54	-12.046	1.97	74	8.63	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5510 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

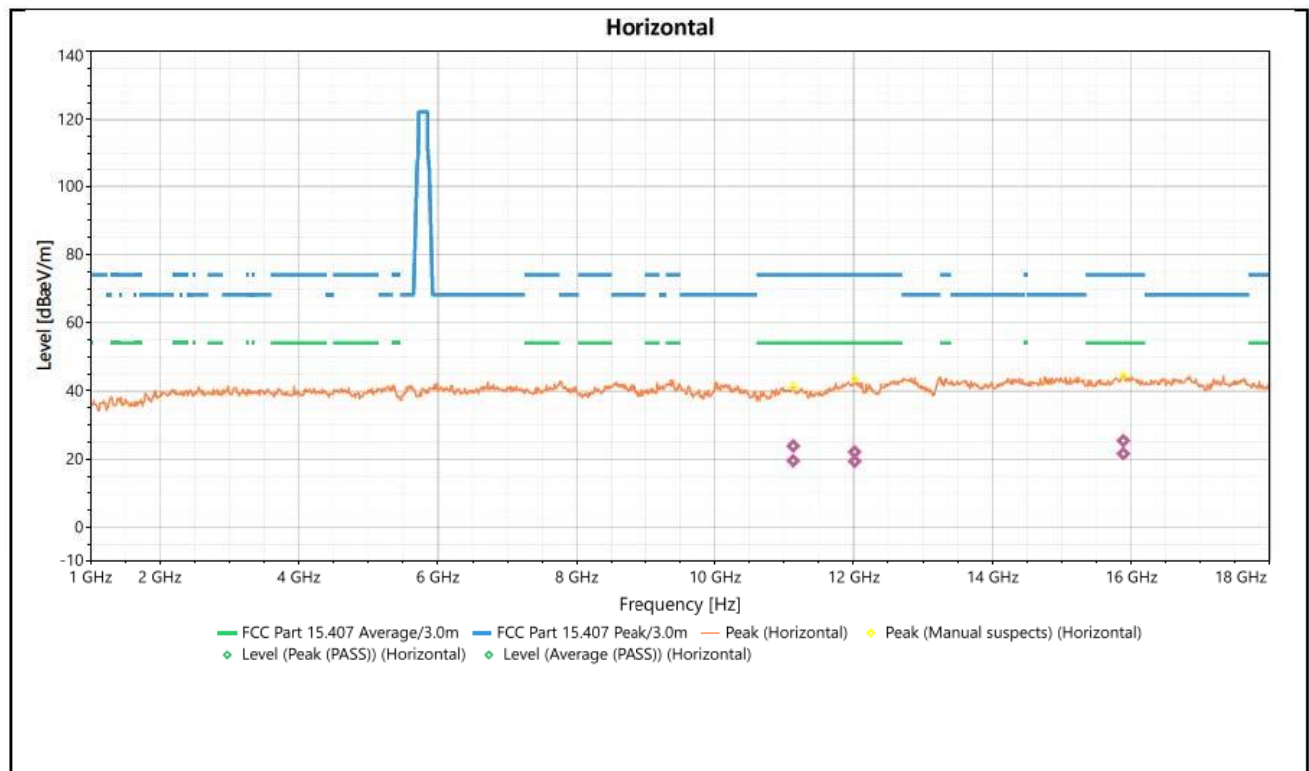

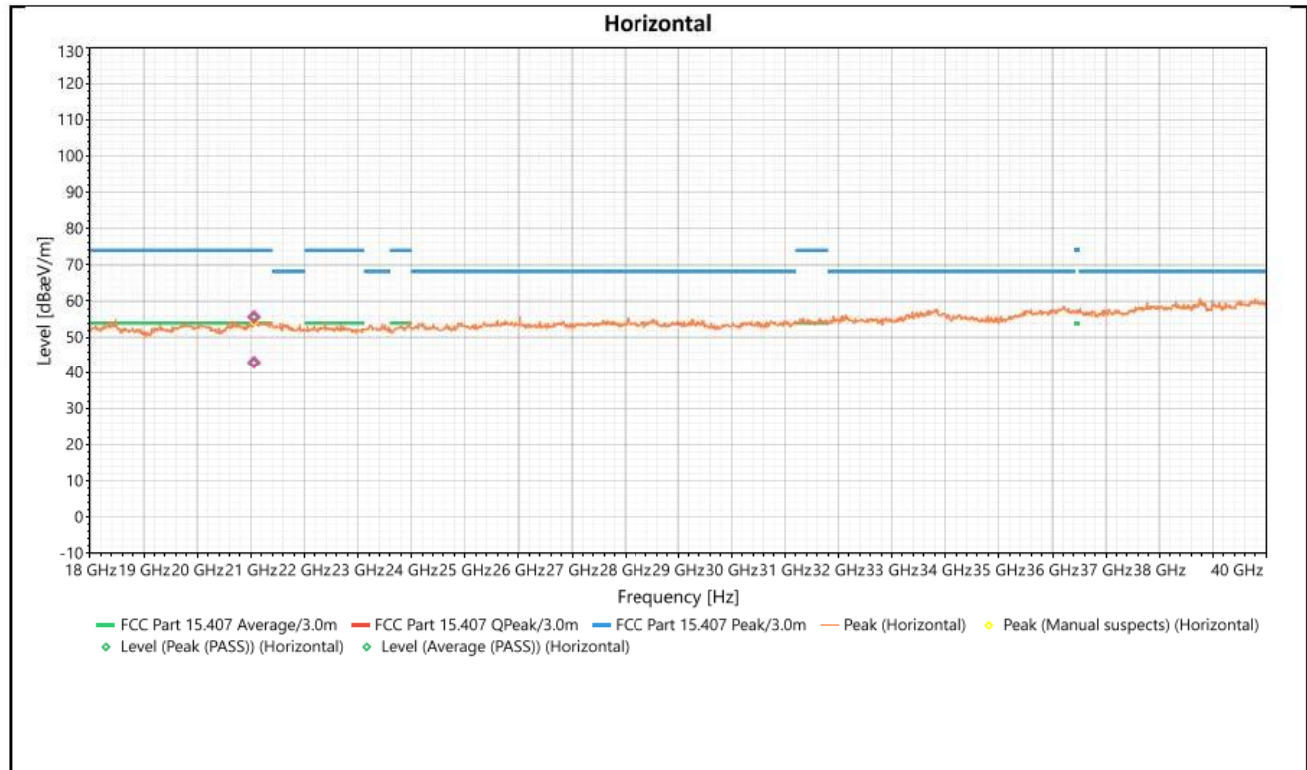



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11132.33	Horizontal	23.864	74	-50.136	2	315	2.75	Peak (PASS)
2	11132.33	Horizontal	19.505	54	-34.495	2	315	2.75	Average (PASS)
3	12016.48	Horizontal	19.355	74	-54.645	1.91	241	3.52	Peak (PASS)
4	12016.48	Horizontal	22.12	54	-31.88	1.91	241	3.52	Average (PASS)
5	15889.26	Horizontal	21.638	74	-52.362	1.69	4	4.8	Peak (PASS)
6	15889.26	Horizontal	25.372	54	-28.628	1.69	4	4.8	Average (PASS)
7	21060.1	Horizontal	55.637	74	-18.363	1.79	172	8.5	Peak (PASS)
8	21060.1	Horizontal	43.007	54	-10.993	1.79	172	8.5	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5550 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

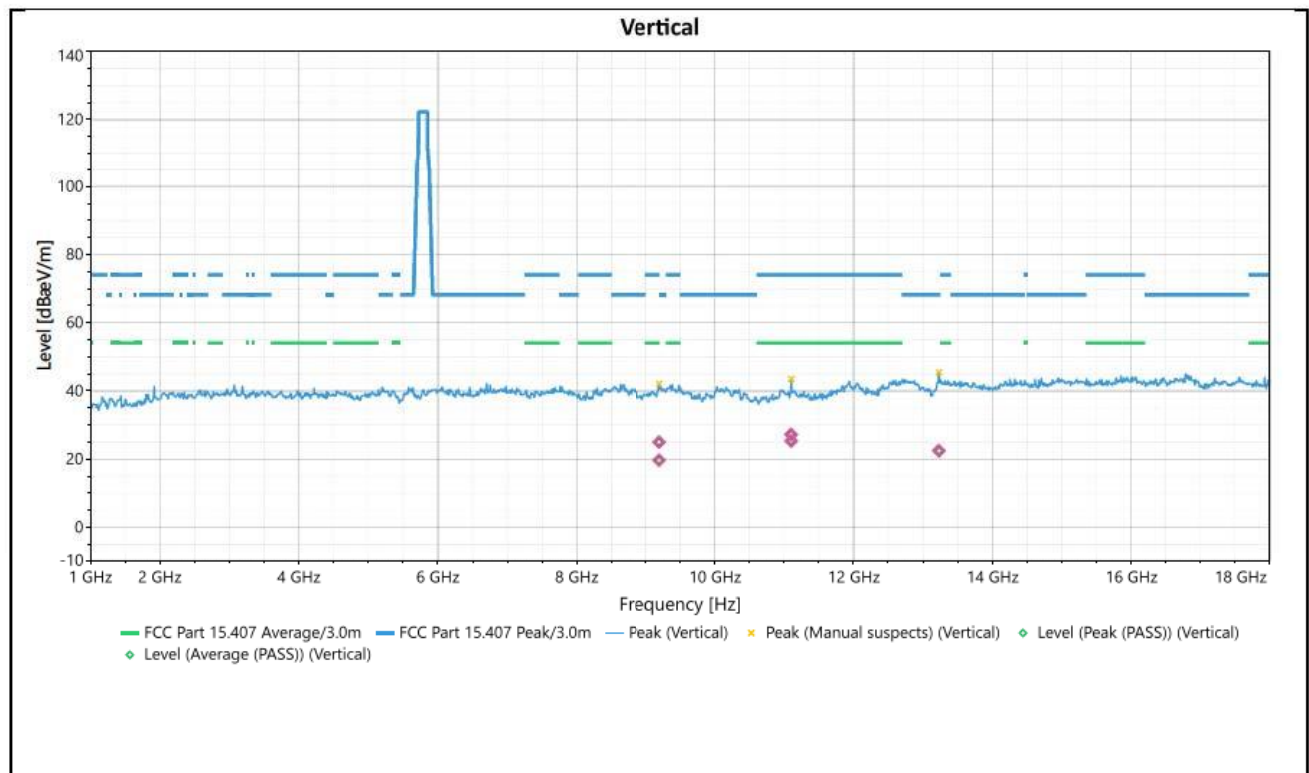

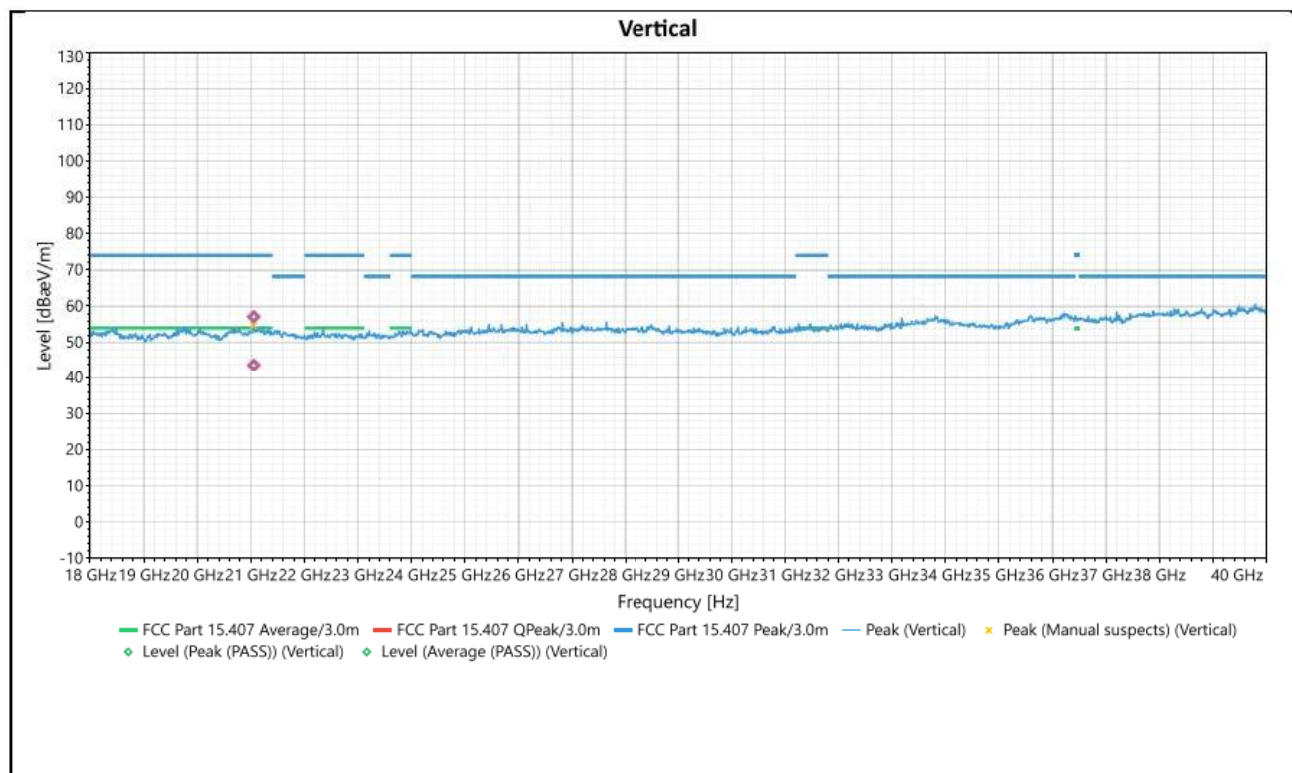



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	9198.026	Vertical	25.031	74	-48.969	1.37	278	2.08	Peak (PASS)
2	9198.026	Vertical	19.712	54	-34.288	1.37	278	2.08	Average (PASS)
3	11101.21	Vertical	25.319	74	-48.681	1.91	278	2.69	Peak (PASS)
4	11101.21	Vertical	27.23	54	-26.77	1.91	278	2.69	Average (PASS)
5	13230.62	Vertical	22.467	68.23	-45.763	2	241	3.33	Peak (PASS)
6	21053.64	Vertical	57.078	74	-16.922	1.61	168	8.64	Peak (PASS)
7	21053.64	Vertical	43.637	54	-10.363	1.61	168	8.64	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5550 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

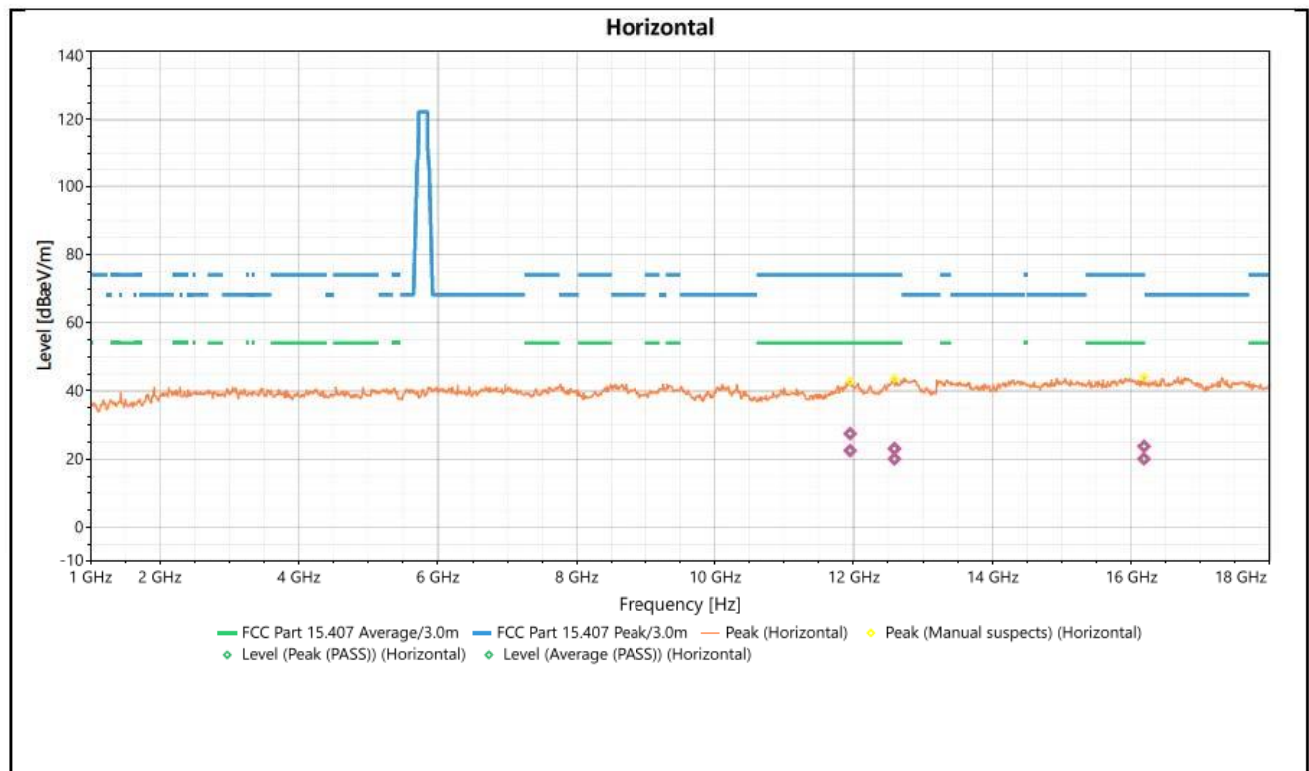

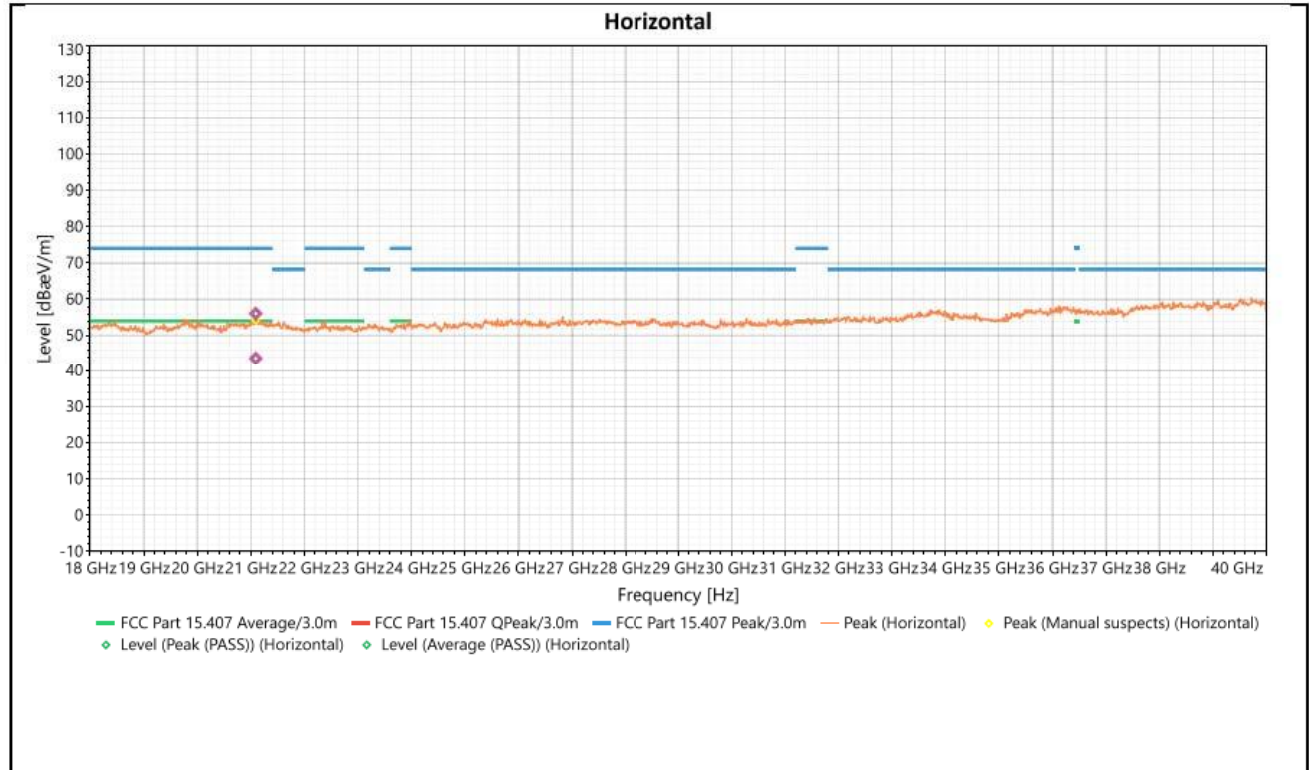



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11952.14	Horizontal	27.476	74	-46.524	1.8	296	3.46	Peak (PASS)
2	11952.14	Horizontal	22.5	54	-31.5	1.8	296	3.46	Average (PASS)
3	12589.3	Horizontal	20.093	74	-53.907	1.58	334	3.87	Peak (PASS)
4	12589.3	Horizontal	23.092	54	-30.908	1.58	334	3.87	Average (PASS)
5	16186.05	Horizontal	20.094	74	-53.906	1.26	360	4.83	Peak (PASS)
6	16186.05	Horizontal	23.77	54	-30.23	1.26	360	4.83	Average (PASS)
7	21093.1	Horizontal	56.05	74	-17.95	1.6	270	8.49	Peak (PASS)
8	21093.1	Horizontal	43.617	54	-10.383	1.6	270	8.49	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5590 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

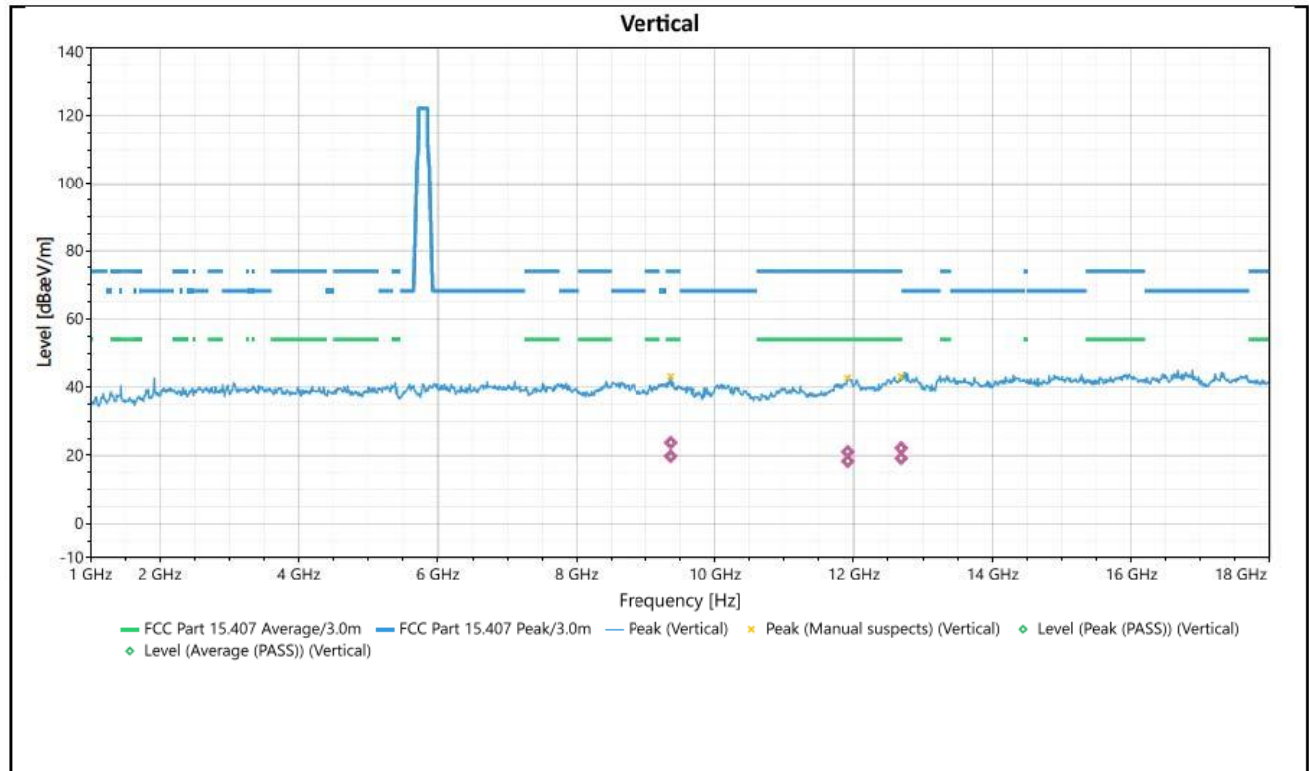

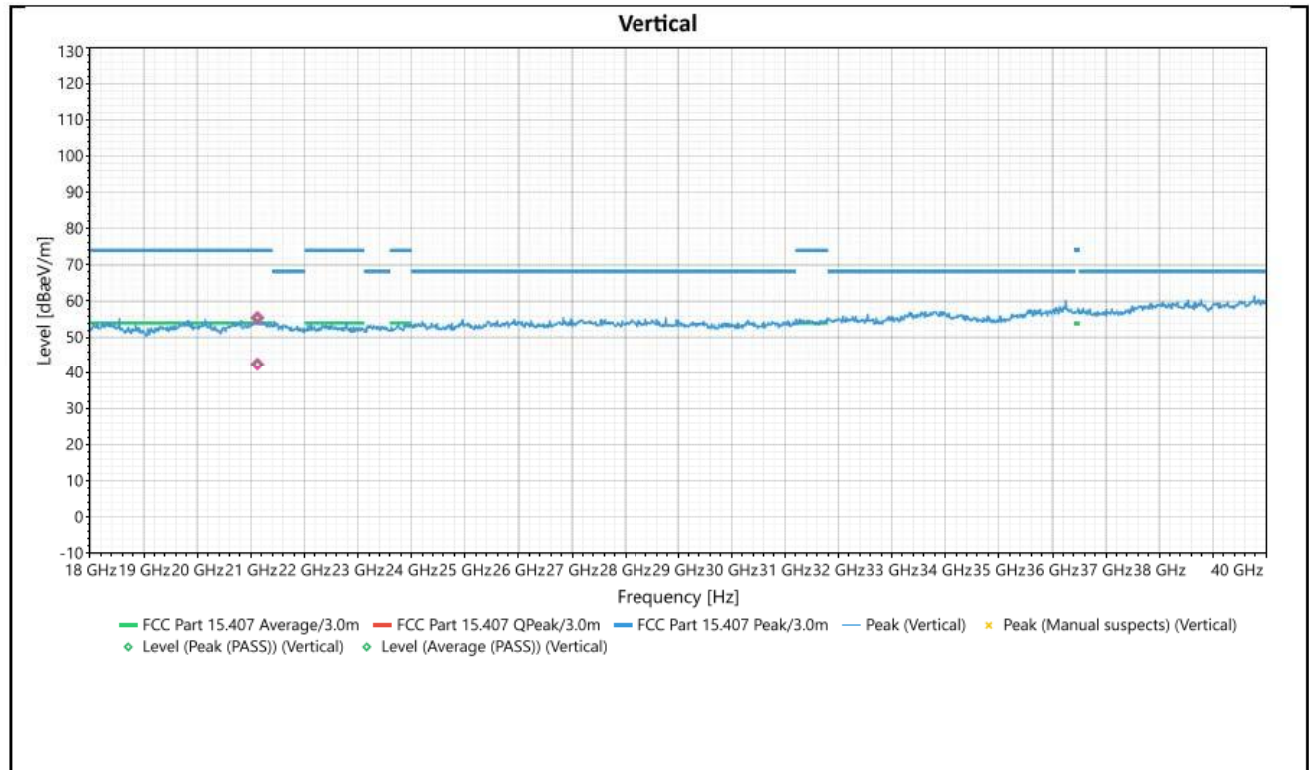



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	9366.134	Vertical	23.778	74	-50.222	1.69	55	2.21	Peak (PASS)
2	9366.134	Vertical	19.773	54	-34.227	1.69	55	2.21	Average (PASS)
3	11916.85	Vertical	18.299	74	-55.701	1.15	222	3.51	Peak (PASS)
4	11916.85	Vertical	21.068	54	-32.932	1.15	222	3.51	Average (PASS)
5	12686.86	Vertical	19.123	74	-54.877	1.36	148	3.8	Peak (PASS)
6	12686.86	Vertical	22.158	54	-31.842	1.36	148	3.8	Average (PASS)
7	21121.84	Vertical	55.369	74	-18.631	1.7	238	8.59	Peak (PASS)
8	21121.84	Vertical	42.454	54	-11.546	1.7	238	8.59	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5590 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

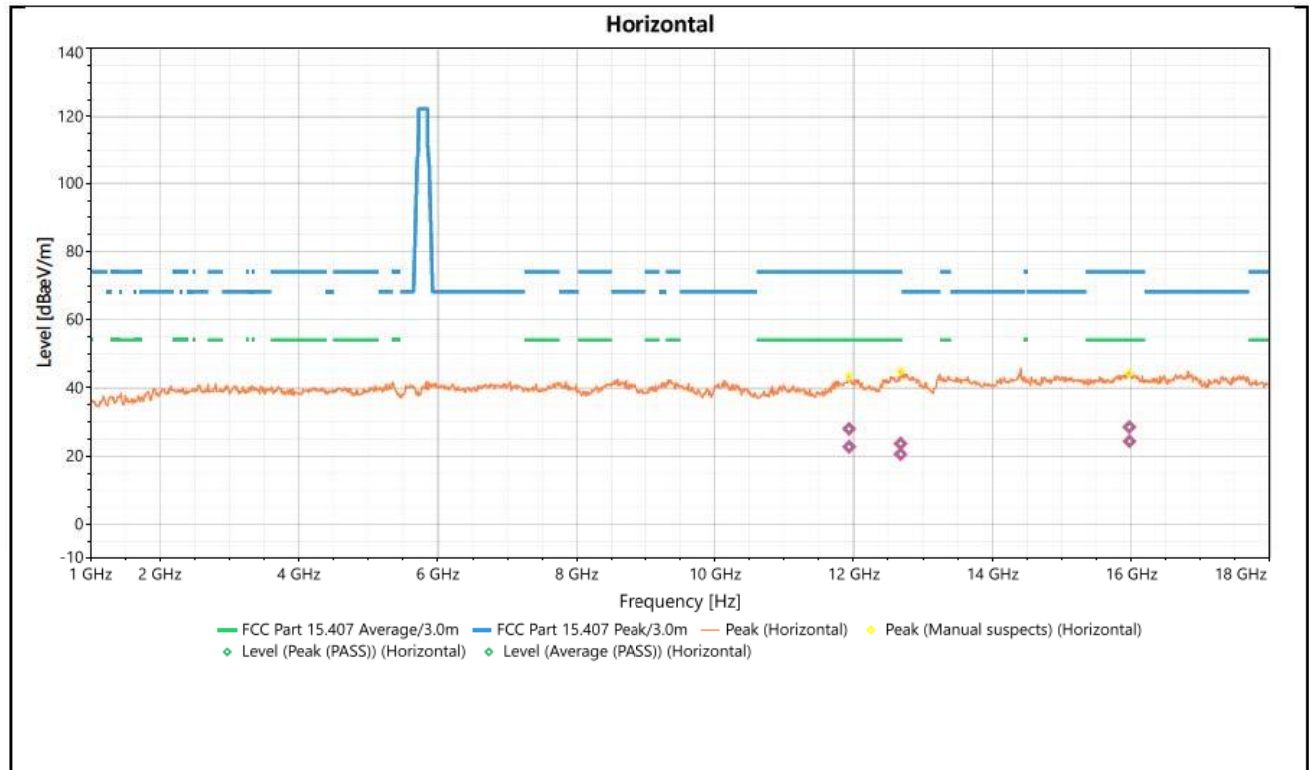

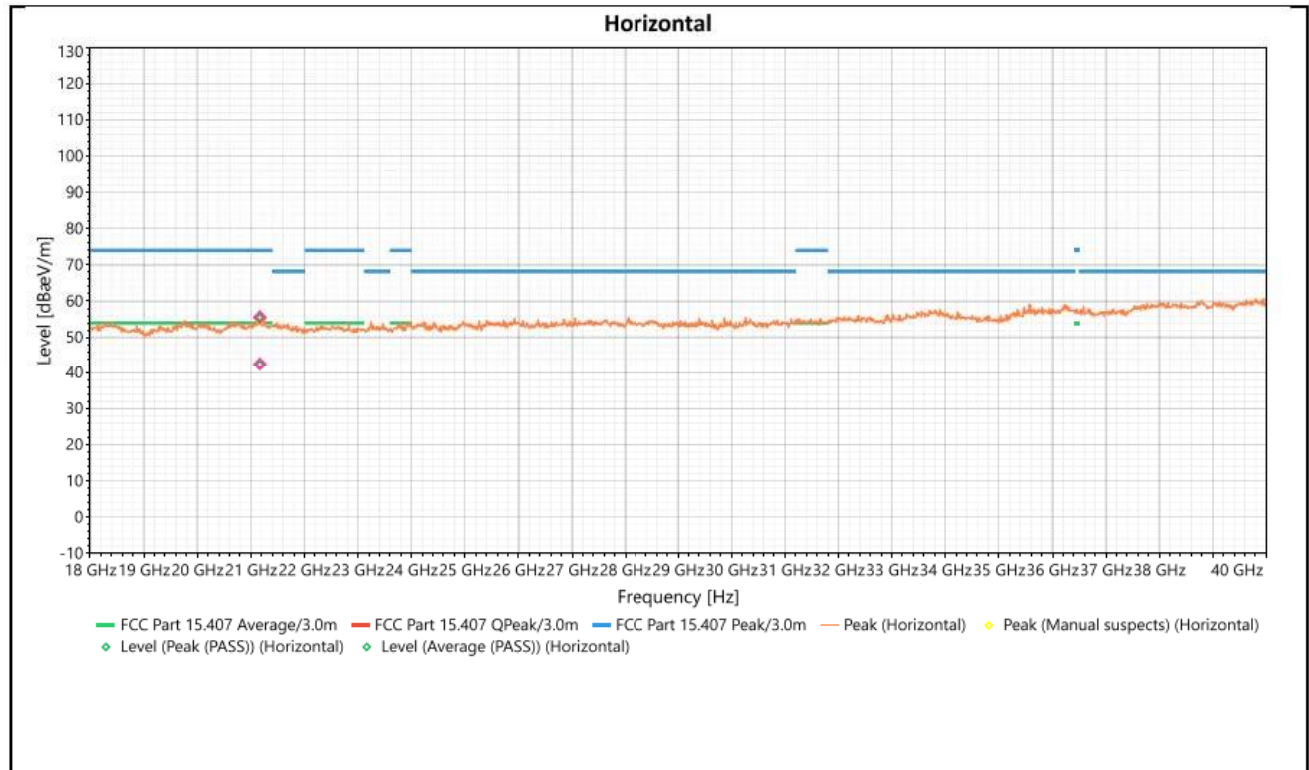



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11937.61	Horizontal	28.013	74	-45.987	1.04	18	3.45	Peak (PASS)
2	11937.61	Horizontal	22.764	54	-31.236	1.04	18	3.45	Average (PASS)
3	12678.55	Horizontal	20.57	74	-53.43	2.24	279	3.87	Peak (PASS)
4	12678.55	Horizontal	23.7	54	-30.3	2.24	279	3.87	Average (PASS)
5	15976.43	Horizontal	24.373	74	-49.627	3.6	351	4.82	Peak (PASS)
6	15976.43	Horizontal	28.527	54	-25.473	3.6	351	4.82	Average (PASS)
7	21167.9	Horizontal	55.522	74	-18.478	1.63	356	8.4	Peak (PASS)
8	21167.9	Horizontal	42.469	54	-11.531	1.63	356	8.4	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5630 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

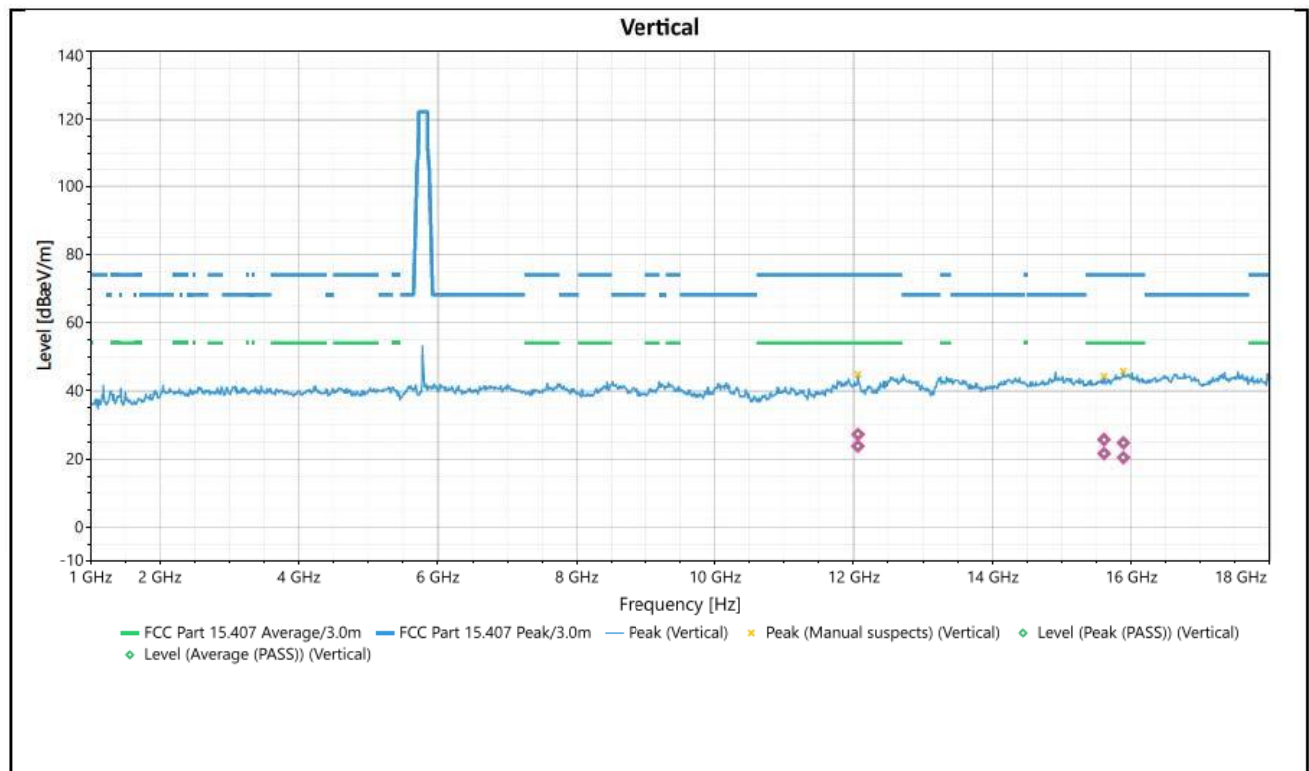

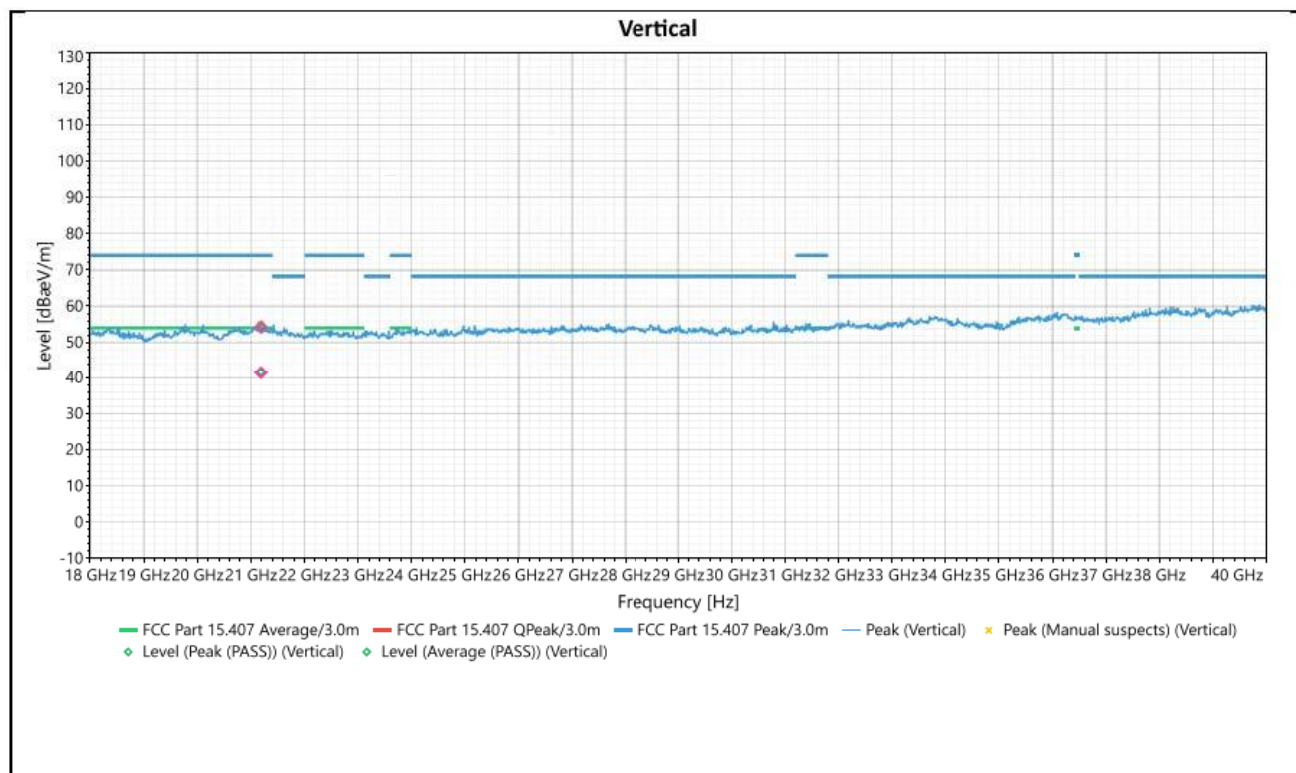



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	12064.21	Vertical	27.247	74	-46.753	1.68	36	3.64	Peak (PASS)
2	12064.21	Vertical	23.827	54	-30.173	1.68	36	3.64	Average (PASS)
3	15611.17	Vertical	21.609	74	-52.391	1.58	296	4.5	Peak (PASS)
4	15611.17	Vertical	25.722	54	-28.278	1.58	296	4.5	Average (PASS)
5	15889.27	Vertical	20.481	74	-53.519	1.15	148	4.96	Peak (PASS)
6	15889.27	Vertical	24.757	54	-29.243	1.15	148	4.96	Average (PASS)
7	21190.03	Vertical	54.225	74	-19.775	1	203	8.47	Peak (PASS)
8	21190.03	Vertical	41.452	54	-12.548	1	203	8.47	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5630 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

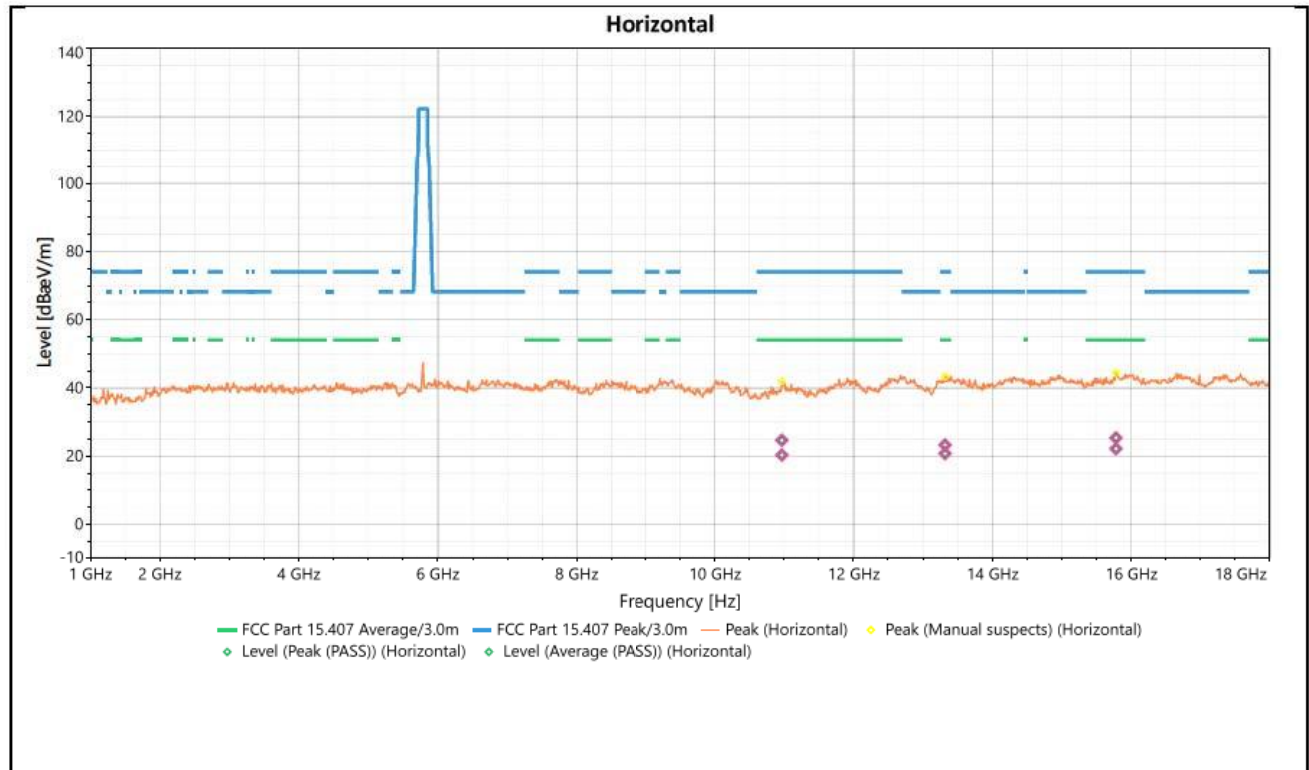

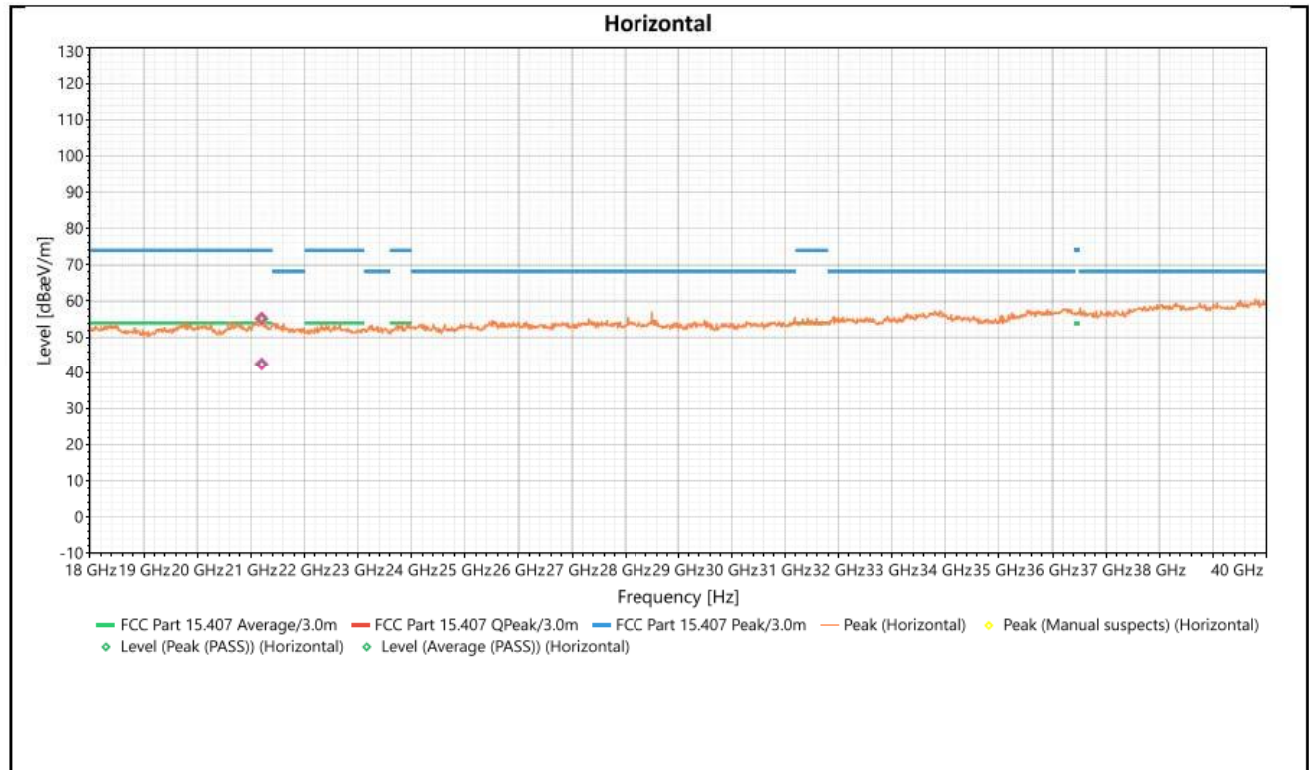



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	10968.38	Horizontal	24.704	74	-49.296	1.69	333	2.85	Peak (PASS)
2	10968.38	Horizontal	20.334	54	-33.666	1.69	333	2.85	Average (PASS)
3	13319.86	Horizontal	20.769	74	-53.231	1.36	184	3.24	Peak (PASS)
4	13319.86	Horizontal	23.276	54	-30.724	1.36	184	3.24	Average (PASS)
5	15781.34	Horizontal	22.191	74	-51.809	1.47	111	4.7	Peak (PASS)
6	15781.34	Horizontal	24.704	74	-49.296	1.69	333	4.7	Average (PASS)
7	21203.1	Horizontal	55.171	74	-18.829	2	116	8.36	Peak (PASS)
8	21203.1	Horizontal	42.509	54	-11.491	2	116	8.36	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5670 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

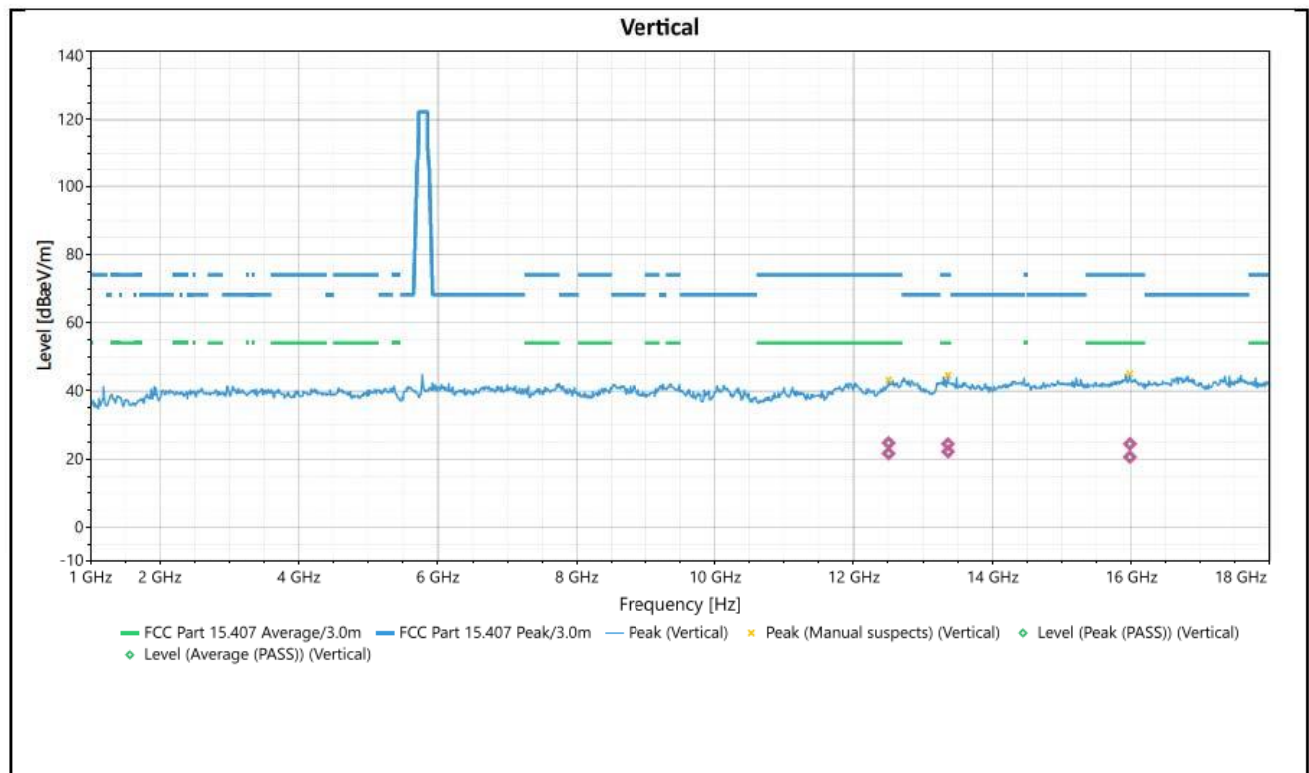

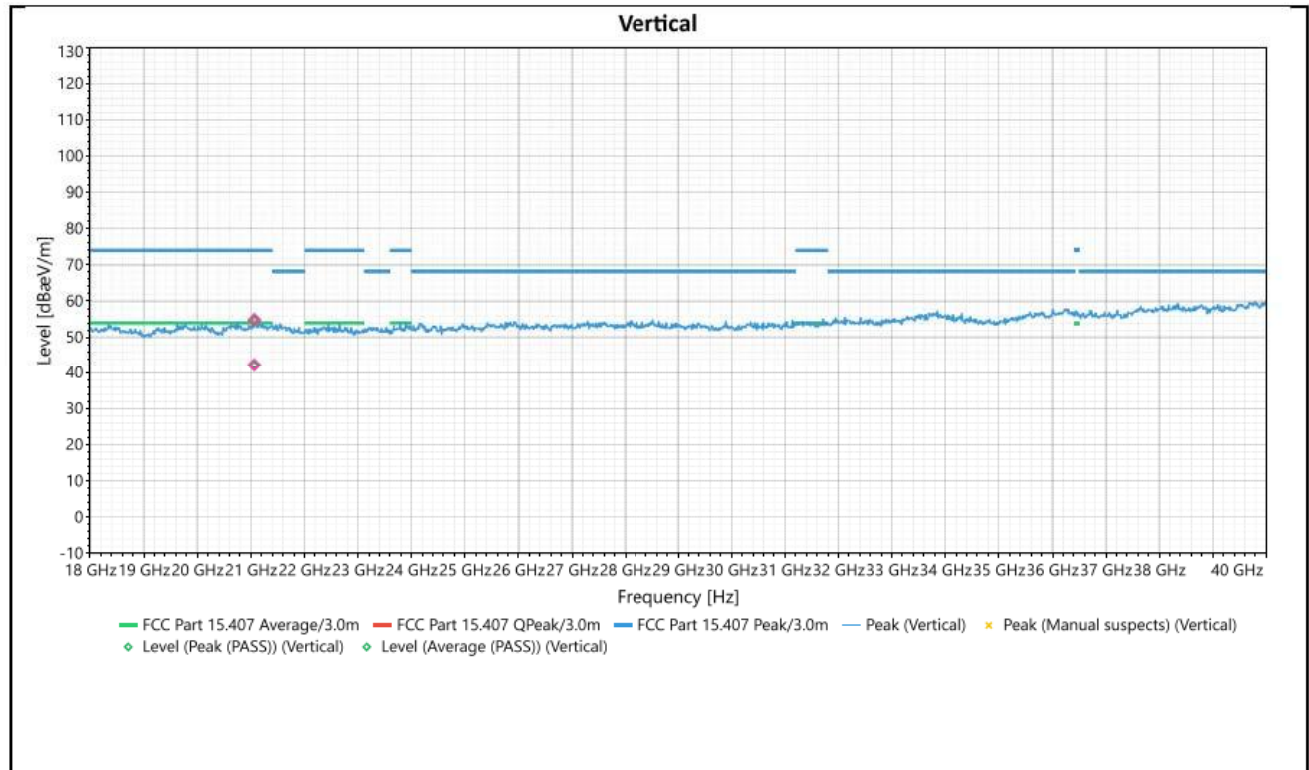



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	12506.29	Vertical	24.767	74	-49.233	1.15	129	3.77	Peak (PASS)
2	12506.29	Vertical	21.668	54	-32.332	1.15	129	3.77	Average (PASS)
3	13361.37	Vertical	22.176	74	-51.824	1.69	4	3.24	Peak (PASS)
4	13361.37	Vertical	24.467	54	-29.533	1.69	4	3.24	Average (PASS)
5	15982.66	Vertical	20.611	74	-53.389	1.15	149	4.96	Peak (PASS)
6	15982.66	Vertical	24.495	54	-29.505	1.15	149	4.96	Average (PASS)
7	21066.8	Vertical	54.824	74	-19.176	1.69	237	8.64	Peak (PASS)
8	21066.8	Vertical	42.207	54	-11.793	1.69	237	8.64	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5670 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

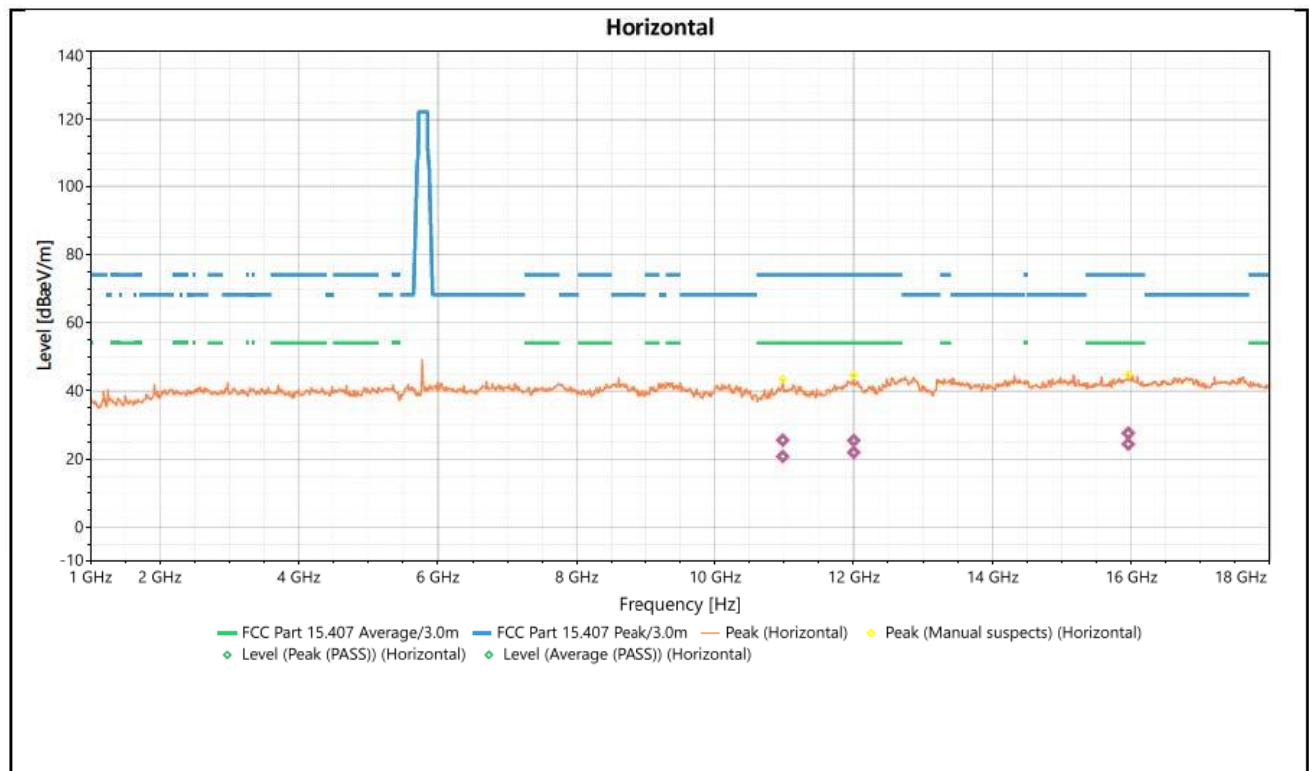

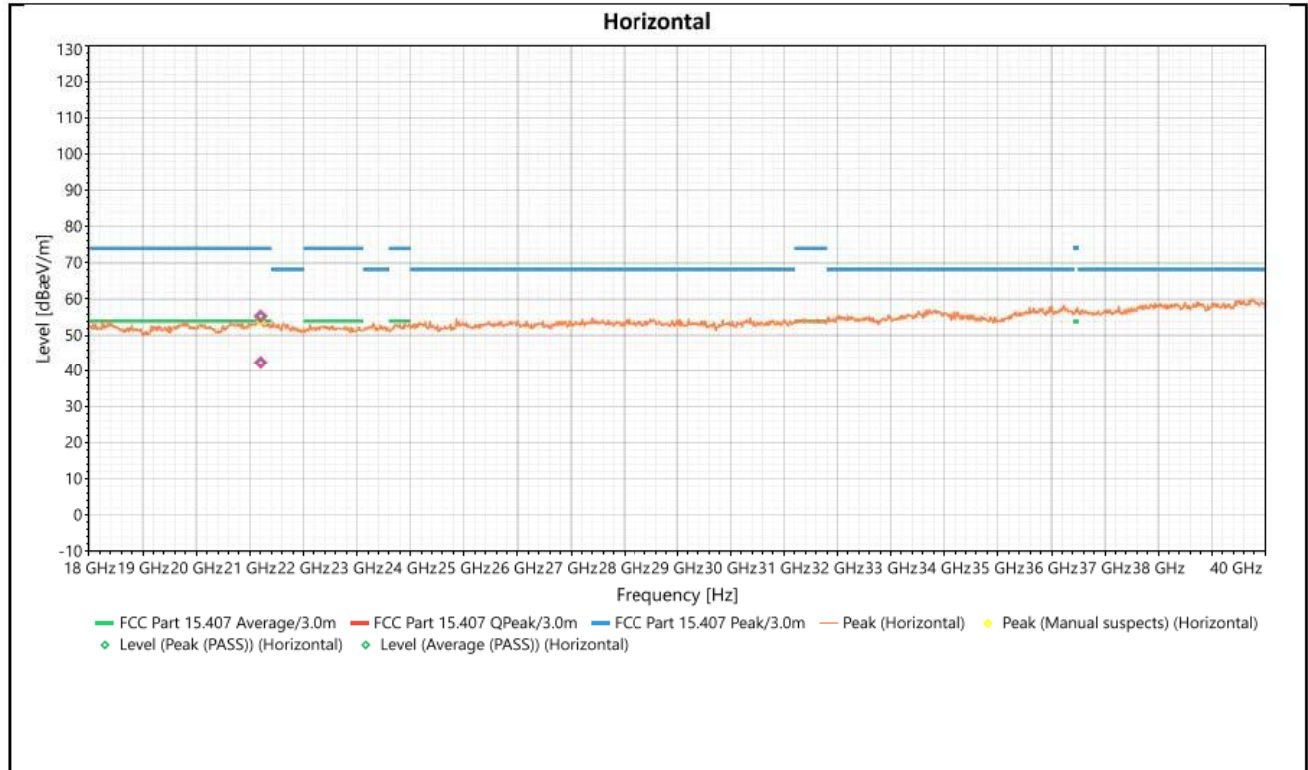



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	10980.83	Horizontal	25.603	74	-48.397	1	240	2.83	Peak (PASS)
2	10980.83	Horizontal	20.827	54	-33.173	1	240	2.83	Average (PASS)
3	12004.02	Horizontal	21.951	74	-52.049	2	295	3.52	Peak (PASS)
4	12004.02	Horizontal	25.43	54	-28.57	2	295	3.52	Average (PASS)
5	15959.84	Horizontal	24.409	74	-49.591	2	4	4.8	Peak (PASS)
6	15959.84	Horizontal	27.614	54	-26.386	2	4	4.8	Average (PASS)
7	21200.9	Horizontal	55.292	74	-18.708	1.25	263	8.36	Peak (PASS)
8	21200.9	Horizontal	42.351	54	-11.649	1.25	263	8.36	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5755 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

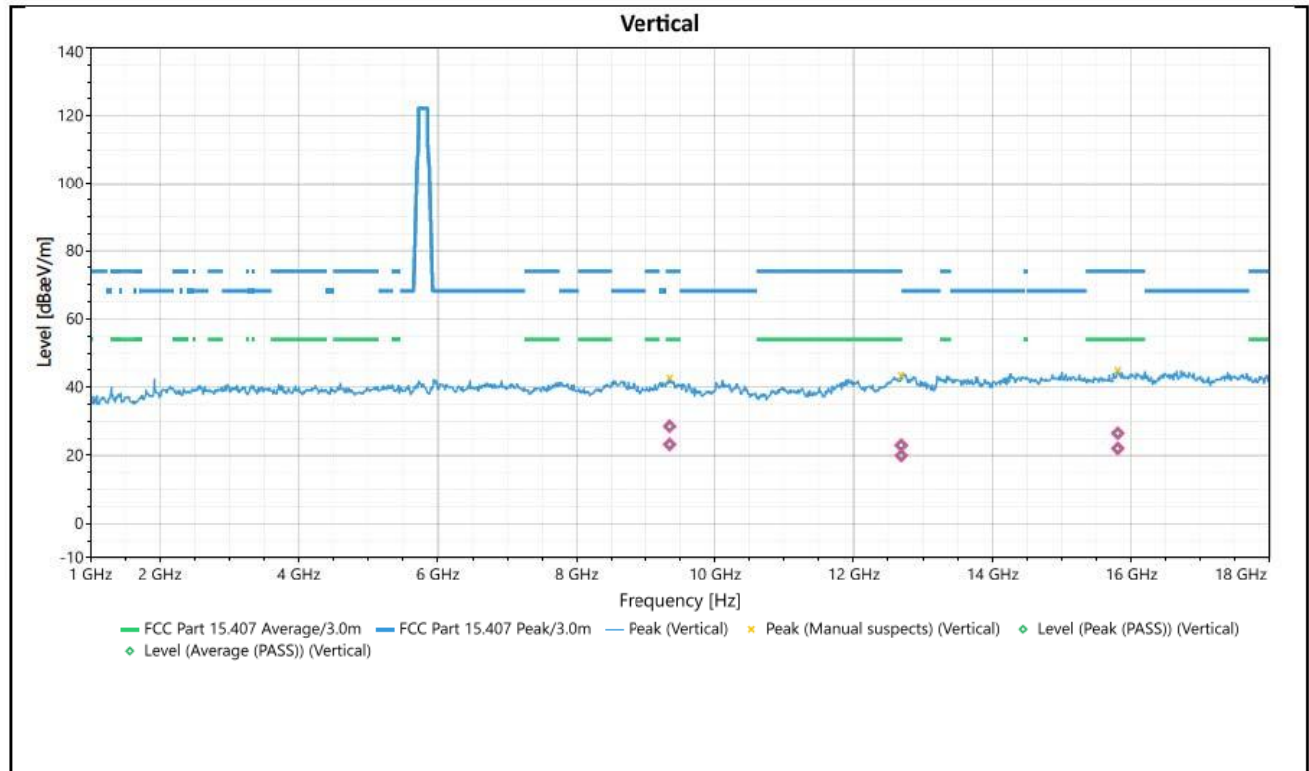

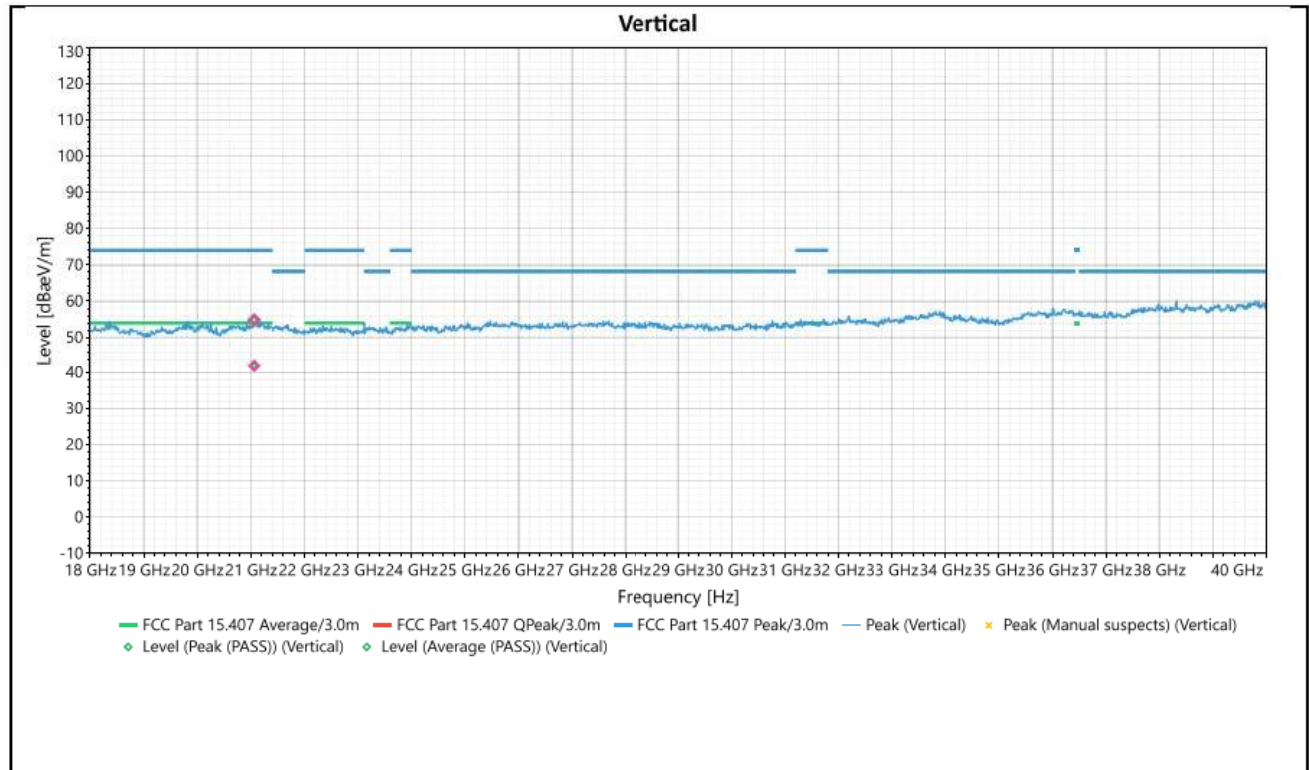

Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	9351.617	Vertical	28.57	74	-45.43	2	314	2.2	Peak (PASS)
2	9351.617	Vertical	23.239	54	-30.761	2	314	2.2	Average (PASS)
3	12688.93	Vertical	19.937	74	-54.063	1.58	166	3.8	Peak (PASS)
4	12688.93	Vertical	22.961	54	-31.039	1.58	166	3.8	Average (PASS)
5	15808.32	Vertical	22.024	74	-51.976	1.8	18	4.93	Peak (PASS)
6	15808.32	Vertical	26.517	54	-27.483	1.8	18	4.93	Average (PASS)
7	21062.4	Vertical	54.793	74	-19.207	2	324	8.64	Peak (PASS)
8	21062.4	Vertical	41.991	54	-12.009	2	324	8.64	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5755 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

